

SECTION A.A - 1:100

WINDOW SCHEDULE

NO.	WINDOW	PANE SIZE	THICKNESS	GLASS	FRAME
W1 W2 W4 W5		3,000	2,60	5mm	TOUGHENED SAFETY GLASS WHITE PVC ALUMINIUM
W3		4,200	3,12	6mm	TOUGHENED SAFETY GLASS WHITE PVC ALUMINIUM
W6		600	1,20	4mm	TOUGHENED SAFETY GLASS WHITE PVC ALUMINIUM
W7		4,000	1,75	4mm	TOUGHENED SAFETY GLASS WHITE PVC ALUMINIUM
W10 W11 W12		2,400	2,08	5mm	TOUGHENED SAFETY GLASS WHITE PVC ALUMINIUM
W33 W34 W36		1,000	2,60	5mm	TOUGHENED SAFETY GLASS WHITE PVC ALUMINIUM

WINDOW SCHEDULE


NO.	WINDOW	PANE SIZE	THICKNESS	GLASS	FRAME
W13		2,400	3,12	6mm	TOUGHENED SAFETY GLASS WHITE PVC ALUMINIUM
W14		4,500	3,00	6mm	TOUGHENED SAFETY GLASS WHITE PVC ALUMINIUM
W15 W36		3,600	3,12	6mm	TOUGHENED SAFETY GLASS WHITE PVC ALUMINIUM
W16		3,000	3,12	6mm	TOUGHENED SAFETY GLASS WHITE PVC ALUMINIUM
W17		3,000	3,12	6mm	TOUGHENED SAFETY GLASS WHITE PVC ALUMINIUM
W18 W19 W20		1,000	0,45	4mm	TOUGHENED SAFETY GLASS WHITE PVC ALUMINIUM
W21		1,400	0,42	4mm	TOUGHENED SAFETY GLASS WHITE PVC ALUMINIUM
W22 W25 W26 W27		600	0,42	4mm	TOUGHENED SAFETY GLASS WHITE PVC ALUMINIUM
W23 W24		1,200	0,54	4mm	TOUGHENED SAFETY GLASS WHITE PVC ALUMINIUM
W28		600	0,36	4mm	TOUGHENED SAFETY GLASS WHITE PVC ALUMINIUM
W29 W30 W31		1,800	0,72	4mm	TOUGHENED SAFETY GLASS WHITE PVC ALUMINIUM
W32 W33		3,600	3,78	6mm	TOUGHENED SAFETY GLASS WHITE PVC ALUMINIUM
W38 W39		1,000	0,60	4mm	TOUGHENED SAFETY GLASS WHITE PVC ALUMINIUM

THIS DRAWING IS THE COPYRIGHT INTERLECTUAL PROPERTY OF S4 ARCHITECTS, CC. AND MAY NOT BE COPIED, SHARED OR REPRODUCED WITHOUT THE WRITTEN CONSENT OF S4 ARCHITECTS, CC.

- GENERAL NOTES**
- CHECK ALL DIMENSIONS ON SITE.
 - FIGURED DIMENSIONS TO BE USED IN PREFERENCE TO SCALED DIMENSIONS.
 - NOTIFY ARCHITECT OF ANY DISCREPANCIES BEFORE COMMENCING BUILDING OPERATIONS.
 - ALL LEVELS MUST BE SET AND CONFIRMED WITH THE ARCHITECT ON SITE BEFORE CONSTRUCTION COMMENCES.
 - ALL WORKMANSHIP AND MATERIALS TO COMPLY WITH THE NATIONAL BUILDING REGULATIONS.
 - TWO COURSES OF BRICKWORK REINFORCED BRICKWORK AT BOTH WINDOW CILL AND WALL PLATE LEVELS.
 - ALL BANKS TO BE MAXIMUM 26 DEGREES.
 - SAFETY GLASS WHERE REQUIRED TO NBR.
 - SEWER AND STORMWATER CONNECTION POINTS TO BE CONFIRMED ON SITE PRIOR TO THE LAYING OF ANY PIPEWORK.
 - ALL NEW ROOFSLABS, FLOORSLABS, COLUMNS, BEAMS AND RETAINING WALLS TO STRUCTURAL ENGINEERS DETAILS AND SPECIFICATION.
 - STRUCTURAL ENGINEER TO VERIFY STORMWATER DISPOSAL ON ROOF AND ON GROUND LEVEL.

REVISIONS

DATE	NO.	REVISION
26/02/14	01	EX BEDROOMS ON GROUND FLOOR CONVERTED TO LOUNGE

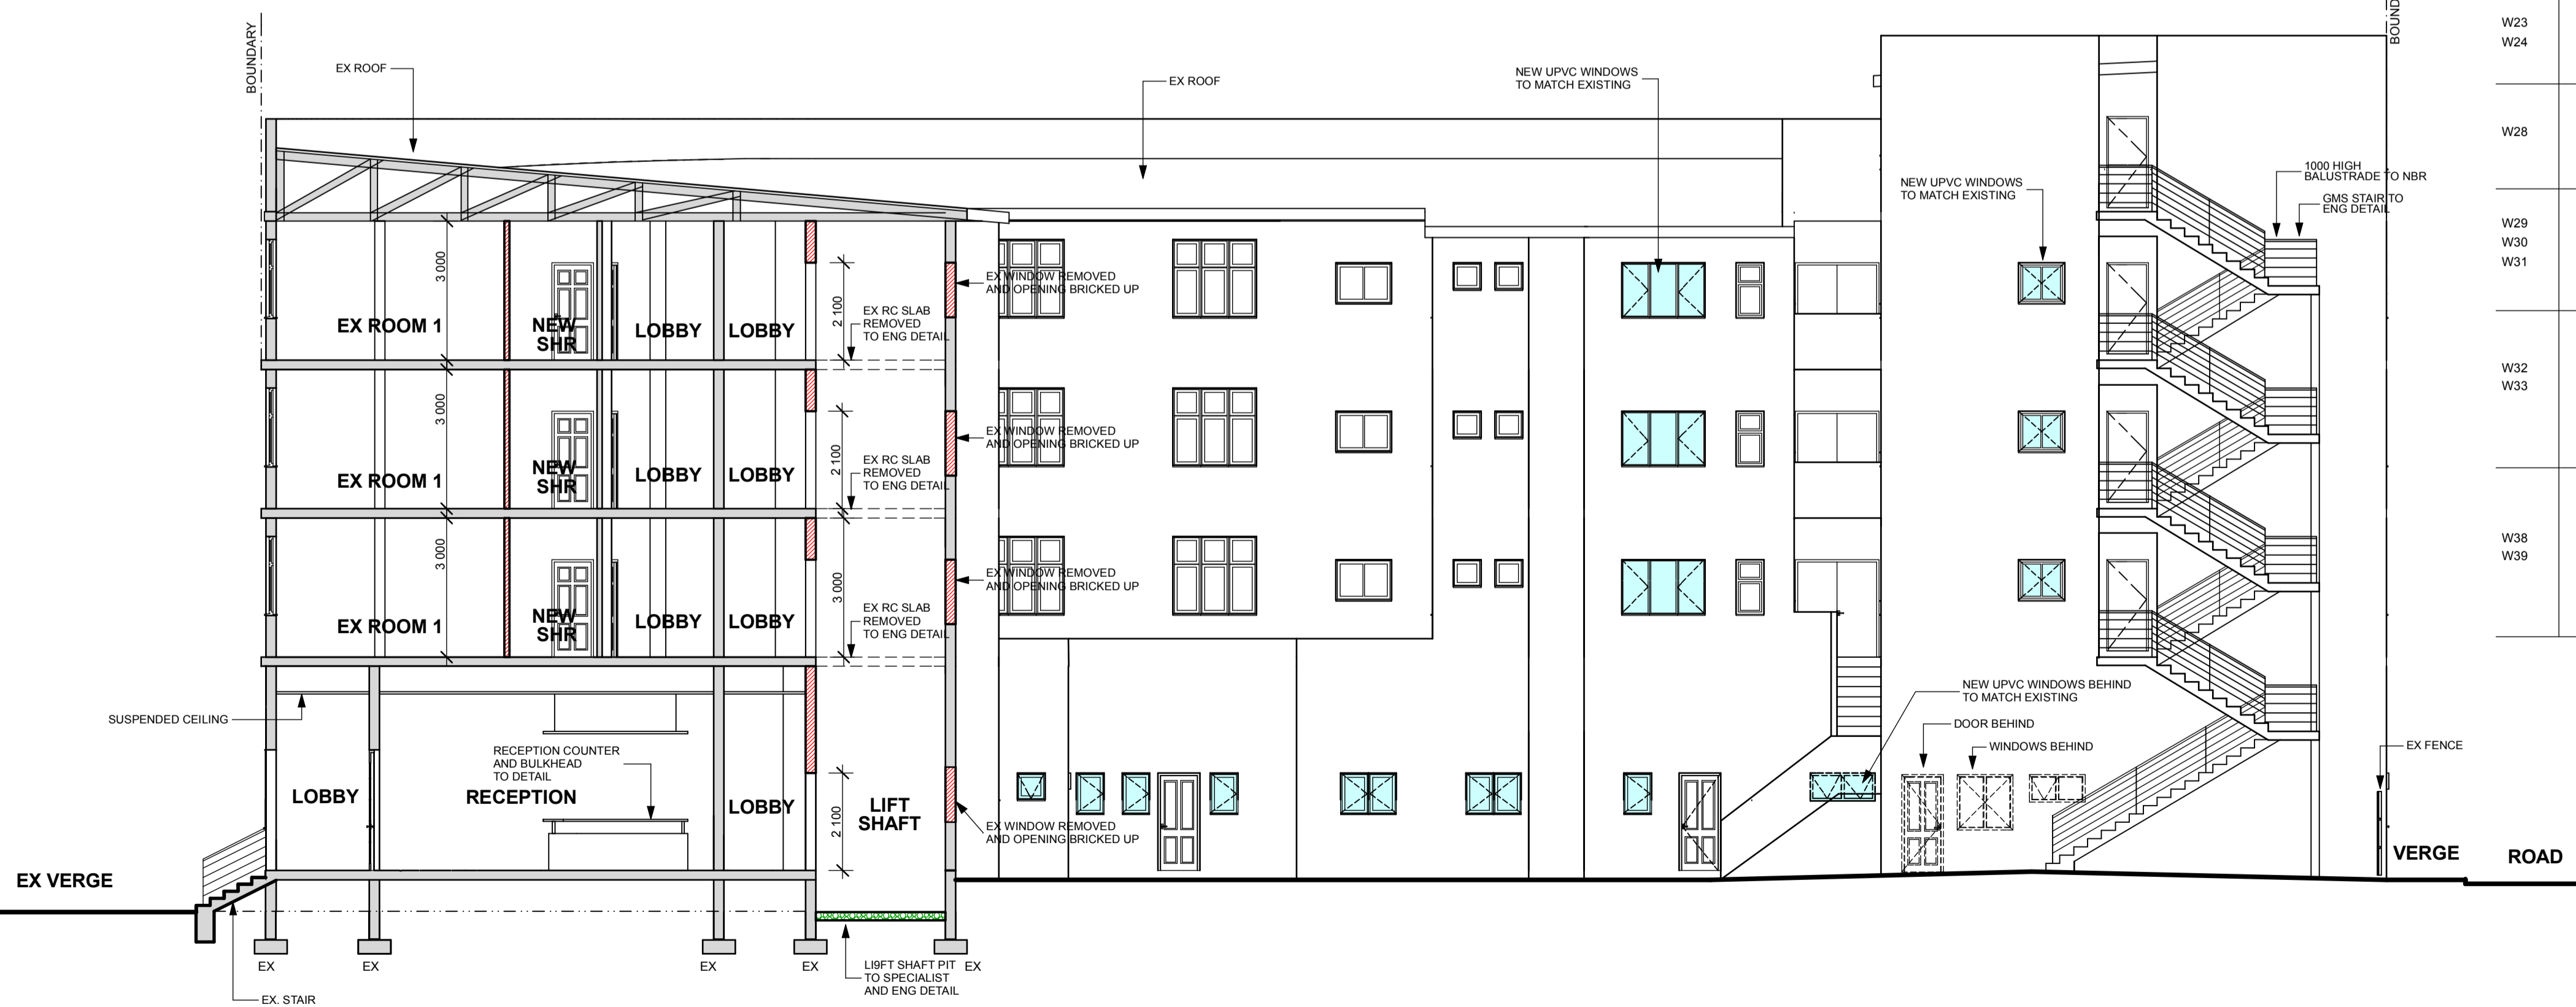

SECTIONAL ELEVATION B.B - 1:100

SHIRISH SUKHLAL - PR. ARCHITECT - REG NOS. - 7236(SACAP) - 7350(SAJA) - 470(KZNA)

OWNER'S SIGNATURE

PAVILION HOTEL
 PROPOSED ALTERATIONS
 ON PORTION 3 & 4 OF ERF 11380,
 DURBAN
 AT 15-19 K.E. MASINGA ROAD
 FOR TRACKSTAR TRADING 182 PTY. LTD

WORKING DRAWINGS

PROJECT No.	DRAWING No.
S4-11	06/08 rev1
SCALE	DATE
1:100	06 FEB. 2014
DESIGNED/DRAWN	S. SUKHLAL / U. MADURAY

