DEPARTMENT OF ENVIRONMENTAL AFFAIRS

NO. 435

22 MARCH 2019

NATIONAL ENVIRONMENTAL MANAGEMENT ACT, 1998 (ACT NO. 107 OF 1998)

NOTICE OF IDENTIFICATION, IN TERMS OF SECTION 24(5) OF THE NATIONAL ENVIRONMENTAL MANAGEMENT ACT, 1998, OF A GENERIC ENVIRONMENTAL MANAGEMENT PROGRAMME RELEVANT TO AN APPLICATION FOR SUBSTATION AND OVERHEAD ELECTRICITY TRANSMISSION AND DISTRIBUTION INFRASTRUCTURE WHICH REQUIRE ENVIRONMENTAL AUTHORISATION AS IDENTIFIED IN TERMS OF SECTION 24(2) OF THE ACT

I, Nomvula Paula Mokonyane, Minister of Environmental Affairs, hereby publish, in terms of section 24(5) of the National Environmental Management Act, 1998 (Act No. 107 of 1998) (the Act); Regulations 19(4) and 23(4) of the Environmental Impact Assessment Regulations, 2014, as amended; as well as Appendix 4 to such Regulations, the generic environmental management programme relevant to an application for environmental authorisation for substation and overhead electricity transmission and distribution infrastructure as identified in terms of section 24(2)(a) of the Act and which require environmental authorisation for activity 11 or 47 of Environmental Impact Assessment Regulations Listing Notice 1 of 2014, as amended, or for activity 9 of Environmental Impact Assessment Regulations Listing Notice 2 of 2014, as amended, and any other listed and specified activities necessary for the realisation of such infrastructure, as set out in the Schedule hereto.

NOMVULA PAULA MOKONYANE MINISTER OF ENVIRONMENTAL AFFAIRS

SCHEDULE

I hereby give Notice that applications for environmental authorisation for substation and overhead electricity transmission and distribution infrastructure, when such facilities trigger—

- activity 11 or 47 of Environmental Impact Assessment Regulations Listing Notice 1 of 2014, as amended, and any other listed and specified activities necessary for the realisation of such facilities; or
- activity 9 of Environmental Impact Assessment Regulations Listing Notice 2 of 2014, as amended and any other listed or specified activities necessary for the realisation of such facilities;

must use the generic Environmental Management Programme, contemplated in Regulations 19(4), 23(4) and Appendix 4 to the Environmental Impact Assessment Regulations, 2014, as amended. The generic Environmental Management Programme for substation infrastructure for electricity transmission and distribution is set out in Appendix 1 and the generic Environmental Management Programme for overhead electricity transmission and distribution infrastructure is set out in Appendix 2.

APPENDIX 1

GENERIC ENVIRONMENTAL MANAGEMENT PROGRAMME (EMPr) FOR THE DEVELOPMENT AND EXPANSION OF SUBSTATION INFRASTRUCTURE FOR THE TRANSMISSION AND DISTRIBUTION OF ELECTRICITY





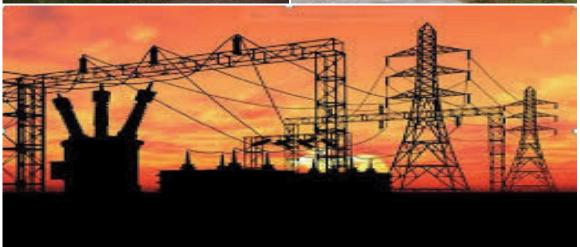






TABLE OF CONTENTS

INTR	RODUC	TION	1
1.	. Bac	ckground	1
2	. Pur	pose	1
3.	. Ob	ective	1
4	. Scc	pe	1
5.	. Stru	cture of this document	2
6.	. Co	mpletion of part B: section 1: the pre-approved generic EMPr template	4
7. a		endments of the impact management outcomes and impact management	4
8. d		cuments to be submitted as part of part B: section 2 site specific information ar	
(i) Am	endments to Part B: Section 2 – site specific information and declaration	5
PAR	2T A – C	GENERAL INFORMATION	6
1.	. DEF	initions	6
2.	. AC	RONYMS and ABBREVIATIONS	7
3. (E		LES AND RESPONSIBILITIES FOR ENVIRONMENTAL MANAGEMENT PROGRAMME MPLEMENTATION	8
4.	. EN	/IRONMENTAL DOCUMENTATION REPORTING AND COMPLIANCE	14
	4.1	Document control/Filing system	14
	4.2	Documentation to be available	14
	4.3	Weekly Environmental Checklist	14
	4.4	Environmental site meetings	15
	4.5	Required Method Statements	15
	4.6	Environmental Incident Log (Diary)	16
	4.7	Non-compliance	16
	4.8	Corrective action records	17
	4.9	Photographic record	17
	4.10	Complaints register	18
	4.11	Claims for damages	18
	4.12	Interactions with affected parties	18
	4.13	Environmental audits	19
	4.14	Final environmental audits	19
PAR	T B: SE	CTION 1: Pre-approved generic EMPr template	20
5.	. IMF	ACT MANAGEMENT OUTCOMES AND IMPACT MANAGEMENT ACTIONS	20
	5.1	Environmental awareness training	21

	5.2	Site Establishment development	23
	5.3	Access restricted areas	24
	5.4	Access roads	24
	5.5	Fencing and Gate installation	25
	5.6	Water Supply Management	27
	5.7	Storm and waste water management	28
	5.8	Solid and hazardous waste management	29
	5.9	Protection of watercourses and estuaries	30
	5.10	Vegetation clearing	31
	5.11	Protection of fauna	33
	5.12	Protection of heritage resources	34
	5.13	Safety of the public	34
	5.14	Sanitation	35
	5.15	Prevention of disease	36
	5.16	Emergency procedures	37
	5.17	Hazardous substances	38
	5.18	Workshop, equipment maintenance and storage	40
	5.19	Batching plants	41
	5.20	Dust emissions	42
	5.21	Blasting	43
	5.22	Noise	44
	5.23	Fire prevention	44
	5.24	Stockpiling and stockpile areas	45
	5.25	Civil works	46
	5.26	Excavation of foundation, cable trenching and drainage systems	47
	5.27	Installation of foundations, cable trenching and drainage systems	48
	5.28 Insula	Installation of equipment (circuit breakers, current Transformers, Isolators, tors, surge arresters, voltage transformers, earth switches)	48
	5.30	Cabling and Stringing	49
	5.31 integr	Testing and Commissioning (all equipment testing, earthing system, system ation)	50
	5.32	Socio-economic	50
	5.33	Temporary closure of site	51
	5.34	Dismantling of old equipment	52
	5.35	Landscaping and rehabilitation	53
6	ACCE	SS TO THE GENERIC EMPr	55
PART	B: SECT	ION 2	56

7	SITE	SPECIFIC INFORMATION AND DECLARATION	56
	7.1	Sub-section 1: contact details and description of the project	56
	7.2	Sub-section 2: Development footprint site map	56
	7.3	Sub-section 3: Declaration	57
	7.4	Sub-section 4: amendments to site specific information (Part B; section 2)	57
PAF	RT C		58
8	SITE	SPECIFIC ENVIRONMENTAL ATTRIBUTES	58
APF	PENDIX	1: METHOD STATEMENTS	59
List	of table	es	
Tab	le 1: G	uide to roles and responsibilities for implementation of a generic EMPr	8

INTRODUCTION

1. Background

The National Environmental Management Act, 1998 (Act No. 107 of 1998) (NEMA) requires that an environmental management programme (EMPr) be submitted where an environmental impact assessment (EIA) has been identified as the environmental instrument to be utilised as the basis for a decision on an application for environmental authorisation (EA). The content of an EMPr must either contain the information set out in Appendix 4 of the Environmental Impact Assessment Regulations, 2014, as amended (EIA Regulations) or must be a generic EMPr relevant to an application as identified and gazetted by the Minister in a government notice. Once the Minister has identified, through a government notice that a generic EMPr is relevant to an application for EA, that generic EMPr must be applied by all parties involved in the EA process, including but not limited to the applicant and the competent authority (CA).

2. Purpose

This document constitutes a generic EMPr relevant to applications for the development or expansion of substation infrastructure for the transmission and distribution of electricity, and all listed and specified activities necessary for the realisation of such infrastructure.

3. Objective

The objective of this generic EMPr is to prescribe and pre-approve generally accepted impact management outcomes and impact management actions, which can commonly and repeatedly be used for the avoidance, management and mitigation of impacts and risks associated with the development or expansion of substation infrastructure for the transmission and distribution of electricity. The use of a generic EMPr is intended to reduce the need to prepare and review individual EMPrs for applications of a similar nature.

4. Scope

The scope of this generic EMPr applies to the development or expansion of substation infrastructure for the transmission and distribution of electricity requiring EA in terms of NEMA. This generic EMPr applies to activities requiring EA, mainly activity 11 and 47 of the Environmental Impact Assessment Regulations Listing Notice 1 of 2014, as amended, and activity 9 of the Environmental Impact Assessment Regulations Listing Notice 2 of 2014, as amended, and all associated listed or specified activities necessary for the realization of such infrastructure.

5. Structure of this document

This document is structured in three parts with an Appendix as indicated in the table below:

Part	Section	Heading	Content
A		Provides general guidance and information and is not legally binding	Definitions, acronyms, roles & responsibilities and documentation and reporting.
В	1	Pre-approved generic EMPr template	Contains generally accepted impact management outcomes and impact management actions required for the avoidance, management and mitigation of impacts and risks associated with the development or expansion of substation infrastructure for the transmission and distribution of electricity, which are presented in the form of a template that has been preapproved.
			The template in this section is to be completed by the contractor, with each completed page signed and dated by the holder of the EA prior to commencement of the activity.
			Where an impact management outcome is not relevant, the words "not applicable" can be inserted in the template under the "responsible persons" column.
			Once completed and signed, the template represents the EMPr for the activity approved by the CA and is legally binding. The template is not required to be submitted to the CA as once the generic EMPr is gazetted for implementation, it has been approved by the CA.
			To allow interested and affected parties access to the pre-approved EMPr template for consideration through the decision-making process, the EAP on behalf of the applicant /proponent must make the hard copy of this EMPr available at a public location and where the applicant has a website, the EMPr should also be made available on such publicly accessible website.
	2	Site specific information	Contains preliminary infrastructure layout and a declaration that the applicant/holder of the EA

Part	Section	Heading	Content
			will comply with the pre-approved generic EMPr template contained in <u>Part B: Section 1</u> , and understands that the impact management outcomes and impact management actions are legally binding . The preliminary infrastructure layout must be finalized to inform the final EMPr that is to be submitted with the basic assessment report (BAR) or environmental impact assessment report (EIAR), ensuring that all impact management outcomes and impact management actions have been either preapproved or approved in terms of <u>Part C</u> .
			This section must be submitted to the CA together with the final BAR or EIAR. The information submitted to the CA will be considered to be incomplete should a signed copy of <u>Part B: section 2</u> not be submitted. Once approved, this Section forms part of the EMPr for the development and is legally binding.
С		Site specific sensitivities/ attributes	If any specific environmental sensitivities/ attributes are present on the site which require site specific impact management outcomes and impact management actions, not included in the pre-approved generic EMPr, to manage impacts, these specific impact management outcomes and impact management actions must be included in this section. These specific environmental attributes must be referenced spatially and impact management outcomes and impact management actions must be provided. These specific impact management outcomes and impact management actions must be presented in the format of the preapproved EMPr template (Part B: section 1)
			This section will not be required should the site contain no specific environmental sensitivities or attributes. However, if <u>Part C</u> is applicable to the site, it is required to be submitted together with the BAR or EIAR, for consideration of, and decision on, the application for EA. The information in this section must be prepared by an EAP and must contain his/her name and expertise including a curriculum vitae. Once

Part	Section	Heading	Content
			approved, Part C forms part of the EMPr for the site and is legally binding.
			This section applies only to additional impact management outcomes and impact management actions that are necessary for the avoidance, management and mitigation of impacts and risks associated with the specific development or expansion and which are not already included in <u>Part B: section 1</u> .
Арре	endix 1		Contains the method statements to be prepared prior to commencement of the activity. The method statements are not required to be submitted to the competent authority.

6. Completion of part B: section 1: the pre-approved generic EMPr template

The template is to be completed prior to commencement of the activity, by providing the following information for each environmental impact management action:

- For implementation
 - a 'responsible person',
 - a method for implementation,
 - a timeframe for implementation
- For monitoring
 - a responsible person
 - frequency
 - evidence of compliance.

The completed template must be signed and dated by the holder of the EA prior to commencement of the activity. The method statements prepared and agreed to by the holder of the EA must be appended to the template as <u>Appendix 1</u>. Each method statement must be signed and dated on each page by the holder of the EA. This template once signed and dated is legally binding. The holder of the EA will remain responsible for its implementation.

7. Amendments of the impact management outcomes and impact management actions

Once the activity has commenced, a holder of an EA may make amendments to the impact management outcomes and impact management actions in the following manner:

- Amendment of the impact management outcomes: in line with the process contemplated in Regulation 37 of the EIA Regulations; and
- Amendment of the impact management actions: in line with the process contemplated in Regulation 36 of the EIA Regulations.

8. Documents to be submitted as part of part B: section 2 site specific information and declaration

<u>Part B: Section 2</u> has three distinct sub-sections. The first and third sub-sections are in a template format. Sub-section two requires a map to be produced.

<u>Sub-section 1</u> contains the project name, the applicant's name and contact details, the site information, which includes coordinates of the property or farm in which the proposed substation infrastructure is proposed as well as the 21-digit Surveyor General code of each cadastral land parcel and, where available, the farm name.

<u>Sub-section 2</u> is to be prepared by an EAP and must contain his/her name and expertise including a curriculum vitae. This sub-section must include a map of the site sensitivity overlaid with the preliminary infrastructure layout using the national web based environmental screening tool, when available for compulsory use at: https://screening.environment.gov.za/screeningtool. The sensitivity map shall identify the nature of each sensitive feature e.g. threatened plant species, archaeological site, etc. Sensitivity maps shall identify features both within the planned working area and any known sensitive features and within 50 m from the development footprint.

<u>Sub-section 3</u> is the declaration that the applicant (s)/proponent (s) or holder of the EA in the case of a change of ownership must complete which confirms that the applicant/EA holder will comply with the pre-approved 'generic EMPr' template in <u>Section 1</u> and understands that the impact management outcomes and impact management actions are legally binding.

(a) Amendments to Part B: Section 2 – site specific information and declaration

Should the EA be transferred, <u>Part B: Section 2</u> must be completed by the new applicant/proponent and submitted with the application for an amendment of the EA in terms of regulations 29 or 31 of the EIA Regulations, whichever applies. The information submitted as part of such an application for an amendment to an EA will be considered to be incomplete should a signed copy of <u>Part B: Section 2</u> not be submitted. Once approved, <u>Part B: Section 2</u> forms part of the EMPr for the development and the EMPr becomes legally binding to the new EA holder.

PART A - GENERAL INFORMATION

1. DEFINITIONS

In this EMPr any word or expression to which a meaning has been assigned in the NEMA or EIA Regulations has that meaning, and unless the context requires otherwise –

"clearing" means the clearing and removal of vegetation, whether partially or in whole, including trees and shrubs, as specified;

"construction camp" is the area designated for key construction infrastructure and services, including but not limited to offices, overnight vehicle parking areas, stores, the workshop, stockpile and lay down areas, hazardous storage areas (including fuels), the batching plant (if one is located at the construction camp), designated access routes, equipment cleaning areas and the placement of staff accommodation, cooking and ablution facilities, waste and wastewater management;

"contractor" - The Contractor has overall responsibility for ensuring that all work, activities, and actions linked to the delivery of the contract, are in line with the Environmental Management Programme and that Method Statements are implemented as described.

"hazardous substance" is a substance governed by the Hazardous Substances Act, 1973 (Act No. 15 of 1973) as well as the Hazardous Chemical and Substances Regulations, 1995;

"method statement" means a written submission by the Contractor to the Project Manager in response to this EMPr or a request by the Project Manager and ECO. The method statement must set out the equipment, materials, labour and method(s) the Contractor proposes using to carry out an activity identified by the Project Manager when requesting the Method Statement. This must be done in such detail that the Project Manager and ECO is able to assess whether the Contractor's proposal is in accordance with this specification and/or will produce results in accordance with this specification;

The method statement must cover as a minimum applicable details with regard to:

- (i) Construction procedures;
- (ii) Plant, materials and equipment to be used;
- (iii) Transporting the equipment to and from site;
- (iv) How the plant/ material/ equipment will be moved while on site;
- (v) How and where the plant/ material/ equipment will be stored;
- (vi) The containment (or action to be taken if containment is not possible) of leaks or spills of any liquid or material that may occur;
- (vii) Timing and location of activities;
- (viii) Compliance/ non-compliance; and
- (ix) Any other information deemed necessary by the Project Manager.

"slope" means the inclination of a surface expressed as one unit of rise or fall for so many horizontal units;

"solid waste" means all solid waste, including construction debris, hazardous waste, excess cement/concrete, wrapping materials, timber, cans, drums, wire, nails, food and domestic waste (e.g. plastic packets and wrappers);

"spoil" means excavated material which is unsuitable for use as material in the construction works or is material which is surplus to the requirements of the construction works;

"topsoil" means a varying depth (up to 300 mm) of the soil profile irrespective of the fertility, appearance, structure, agricultural potential, fertility and composition of the soil;

"works" means the works to be executed in terms of the Contract

2. ACRONYMS and ABBREVIATIONS

CA	Competent Authority
cEO	Contractors Environmental Officer
dEO	Developer Environmental Officer
DPM	Developer Project Manager
DSS	Developer Site Supervisor
EAR	Environmental Audit Report
ECA	Environmental Conservation Act No. 73 of
	1989
ECO	Environmental Control Officer
EA	Environmental Authorisation
EIA	Environmental Impact Assessment
ERAP	Emergency Response Action Plan
EMPr	Environmental Management Programme
	Report
EAP	Environmental Assessment Practitioner
FPA	Fire Protection Agency
HCS	Hazardous chemical Substance
NEMA	National Environmental Management Act,
	1998 (Act No. 107 of 1998)
NEMBA	National Environmental Management:
	Biodiversity Act ,2004 (Act No. 10 of 2004)
NEMWA	National Environmental Management:
	Waste Act, 2008 (Act No. 59 of 2008)
MSDS	Material Safety Data Sheet
RI&AP's	Registered Interested and affected parties

ROLES AND RESPONSIBILITIES FOR ENVIRONMENTAL MANAGEMENT PROGRAMME (EMPr) IMPLEMENTATION က

requirements will ultimately determine the need for the appointment of specific person(s) to undertake specific roles and or responsibilities. As such, it must be noted that in the event that no specific person, for example, an environmental control officer (ECO) is appointed, the holder of The effective implementation of this generic EMPr is dependent on established and clear roles, responsibilities and reporting lines within an institutional framework. This section of the EMPr gives guidance to the various environmental roles and reporting lines, however, project specific the EA remains responsible for ensuring that the duties indicated in this document for action by the ECO are undertaken.

Table 1: Guide to roles and responsibilities for implementation of an EMPr

(a)	- 11 1 1 1 1 1 1 1 1 1
Developer's Project Manager (DPM)	Role The Project Developer is accountable for ensuring compliance with the EMPr and any conditions of approval from the competent authority (CA). Where required, an environmental control officer (ECO) must be contracted by the Project Developer to objectively monitor the implementation of the EMPr according to relevant environmental legislation, and the conditions of the environmental authorisation (EA). The Project Developer is further responsible for providing and giving mandate to enable the ECO to perform responsibilities, and he must ensure that the ECO is integrated as part of the project team while remaining independent.
	 Responsibilities Be fully conversant with the conditions of the EA; Ensure that all stipulations within the EMPr are communicated and adhered to by the Developer and its Contractor(s); Issuing of site instructions to the Contractor for corrective actions required; Monitor the implementation of the EMPr throughout the project by means of site inspections and meetings. Overall management of the project and EMPr implementation; and Ensure that periodic environmental performance audits are undertaken on the project implementation.

8 Page

Responsible Person(s)	Role and Responsibilities
Developer Site Supervisor (DSS)	Role The DSS reports directly to the DPM, oversees site works, liaises with the contractor(s) and the ECO. The DSS is responsible for the day to day implementation of the EMPr and for ensuring the compliance of all contractors with the conditions and requirements stipulated in the EMPr. Responsibilities - Ensure that all contractors identify a contractor's Environmental Officer (CEO);
	and ECO; - Must be raily corrected in with the conditions of the LA. Oversees site works, liabor with Corridation, Dr. M. - Must ensure that all landowners have the relevant contact details of the site staff, ECO and cEO; - Issuing of site instructions to the Contractor for corrective actions required; - Will issue all non-compliances to contractors; and - Ratify the Monthly Environmental Report.
Environmental Control Officer (ECO)	Role The ECO should have appropriate training and experience in the implementation of environmental management specifications. The primary role of the ECO is to act as an independent quality controller and monitoring agent regarding all environmental concerns and associated environmental impacts. In this respect, the ECO is to conduct periodic site inspections, attend regular site meetings, pre-empt problems and suggest mitigation and be available to advise on incidental issues that arise. The ECO is also required to conduct compliance audits, verifying the monitoring reports submitted by the cEO. The ECO provides feedback to the DSS and Project Manager regarding all environmental matters. The Contractor, cEO and dEO are answerable to the Environmental Control Officer for non-compliance with the Performance Specifications as set out in the EA and EMPr.
	The ECO provides feedback to the DSS and Project Manager, who in turn reports back to the Contractor and potential and Registered Interested &Affected Parties' (RI&AP's), as required. Issues of non-compliance raised by the ECO must be taken up by the Project Manager, and resolved with the Contractor as per the conditions of his contract. Decisions regarding environmental procedures, specifications and requirements which have a cost implication (i.e. those that are deemed to be a variation, not allowed for in the

Responsible Person(s)	Role and Responsibilities
	Performance Specification) must be endorsed by the Project Manager. The ECO must also, as specified by the EA, report to the relevant CA as and when required.
	Responsibilities
	The responsibilities of the ECO will include the following:
	 Be aware of the findings and conclusions of all EA related to the development;
	- Be familiar with the recommendations and mitigation measures of this EMPr;
	- Be conversant with relevant environmental legislation, policies and procedures, and ensure
	compliance with them;
	- Undertake regular and comprehensive site inspections / audits of the construction site according to
	the generic EMPr and applicable licenses in order to monitor compliance as required;
	- Educate the construction team about the management measures contained in the EMPr and
	environmental licenses;
	- Compilation and administration of an environmental monitoring plan to ensure that the environmental
	management measures are implemented and are effective;
	- Monitoring the performance of the Contractors and ensuring compliance with the EMPr and
	associated Method Statements;
	- In consultation with the Developer Site Supervisor order the removal of person(s) and/or equipment
	which are in contravention of the specifications of the EMPr and/or environmental licenses;
	- Liaison between the DPM, Contractors, authorities and other lead stakeholders on all environmental
	concerns;
	- Compile a regular environmental audit report highlighting any non-compliance issues as well as
	satisfactory or exceptional compliance with the EMPr;
	- Validating the regular site inspection reports, which are to be prepared by the contractor
	Environmental Officer (cEO);
	- Checking the cEO's record of environmental incidents (spills, impacts, legal transgressions etc.) as well
	as corrective and preventive actions taken;
	- Checking the cEO's public complaints register in which all complaints are recorded, as well as action
	taken;

10 | Page

Responsible Person(s)	Role and Responsibilities
	 Assisting in the resolution of conflicts; Facilitate training for all personnel on the site – this may range from carrying out the training, to reviewing the training programmes of the Contractor; In case of non-compliances, the ECO must first communicate this to the Senior Site Supervisor, who has the power to ensure this matter is addressed. Should no action or insufficient action be taken, the ECO may report this matter to the authorities as non-compliance; Maintenance, update and review of the EMPr to the relevant stakeholders.
developer Environmental Officer (dEO)	Role The dEOs will report to the Project Manager and are responsible for implementation of the EMPr, environmental monitoring and reporting, providing environmental input to the Project Manager and Contractor's Manager, liaising with contractors and the landowners as well as a range of environmental coordination responsibilities.
	Responsibilities - Be fully conversant with the EMPr; - Be familiar with the recommendations and mitigation measures of this EMPr, and implement these measures; - Ensure that all stipulations within the EMPr are communicated and adhered to by the Employees, Contractor(s); - Confine the development site to the demarcated area; - Conduct environmental internal audits with regards to EMPr and authorisation compliance (on CEO); - Assist the contractors in addressing environmental challenges on site; - Reporting environmental incidents to developer and ensuring that corrective action is taken, and lessons learnt shared; - Assist the contractor in investigating environmental incidents and compile investigation reports; - Follow-up on pre-warnings, defects, non-conformance reports;

11 | Page

Responsible Person(s)	Role and Responsibilities
	 Measure and communicate environmental performance to the Contractor; Conduct environmental awareness training on site together with ECO and cEO; Ensure that the necessary legal permits and / or licenses are in place and up to date; Acting as Developer's Environmental Representative on site and work together with the ECO and contractor;
Contractor	Role The Contractor appoints the cEO and has overall responsibility for ensuring that all work, activities, and actions linked to the delivery of the contract are in line with the EMPr and that Method Statements are implemented as described. External contractors must ensure compliance with this EMPr while performing the onsite activities as per their contract with the Project Developer. The contractors are required, where specified, to provide Method Statements setting out in detail how the impact management actions contained in the EMPr will be implemented during the development or expansion of substation infrastructure for the transmission and distribution of electricity activities. Responsibilities - project delivery and quality control for the development services as per appointment; - employ a suitably qualified person to monitor and report to the Project Developer's appointed person on the daily activities on-site during the construction period; - ensure that safe, environmentally acceptable working methods and practices are implemented and that equipment is properly operated and maintained, to facilitate proper access and enable any operation to be carried out safely; - attend on site meeting(s) prior to the commencement of activities to confirm the procedure and designated activity zones; - ensure that contractors' staff repair, at their own cost, any environmental damage as a result of a contravention of the specifications contained in EMPr, to the satisfaction of the ECO.

Responsible Person(s)	Role and Responsibilities
contractor Environmental Officer (cEO)	Role Each Contractor affected by the EMPr should appoint a cEO, who is responsible for the on-site implementation of the EMPr (or relevant sections of the EMPr). The Contractor's representative can be the site agent; site engineer; a dedicated environmental officer; or an independent consultant. The Contractor must ensure that the Contractor's Representative is suitably qualified to perform the necessary tasks and is appointed at a level such that she/he can interact effectively with other site Contractors, labourers, the Environmental Control Officer and the public. As a minimum the cEO shall meet the following criteria:
	Responsibilities - Be on site throughout the duration of the project and be dedicated to the project; - Ensure all their staff are aware of the environmental requirements, conditions and constraints with respect to all of their activities on site;
	 Implementing the environmental conditions, guidelines and requirements as stipulated within the EA, EMPr and Method Statements; Attend the Environmental Site Meeting; Undertaking corrective actions where non-compliances are registered within the stipulated timeframes:
	 Report back formally on the completion of corrective actions; Assist the ECO in maintaining all the site documentation; Prepare the site inspection reports and corrective action reports for submission to the ECO; Assist the ECO with the preparing of the monthly report; and Where more than one Contractor is undertaking work on site, each company appointed as a Contractor will appoint a cEO representing that company.

13 Page

4. ENVIRONMENTAL DOCUMENTATION REPORTING AND COMPLIANCE

To ensure accountable and demonstrated implementation of the EMPr, a number of reporting systems, documentation controls and compliance mechanisms must be in place for all substation infrastructure projects as a minimum requirement.

4.1 Document control/Filing system

The holder of the EA is solely responsible for the upkeep and management of the EMPr file. As a minimum, all documentation detailed below will be stored in the EMPr file. A hard copy of all documentation shall be filed, while an electronic copy may be kept where relevant. A duplicate file will be maintained in the office of the DSS (where applicable). This duplicate file must remain current and up-to-date. The filing system must be updated and relevant documents added as required. The EMPr file must be made available at all times on request by the CA or other relevant authorities. The EMPr file will form part of any environmental audits undertaken as prescribed in the EIA Regulations.

4.2 Documentation to be available

At the outset of the project the following preliminary list of documents shall be placed in the filing system and be accessible at all times:

- Full copy of the signed EA from the CA in terms of NEMA, granting approval for the development or expansion;
- Copy of the generic and site specific EMPr as well as any amendments thereof;
- Copy of declaration of implementing generic EMPr and subsequent approval of site specific EMPr and amendments thereof;
- All method statements;
- Completed environmental checklists;
- Minutes and attendance register of environmental site meetings;
- An up-to-date environmental incident log;
- A copy of all instructions or directives issued;
- A copy of all corrective actions signed off. The corrective actions must be filed in such a way that a clear reference is made to the non-compliance record;
- Complaints register.

4.3 Weekly Environmental Checklist

The ECOs are required to complete a Weekly Environmental Checklist, the format of which is to be agreed prior to commencement of the activity. The ECOs are required to sign and date the checklist, retain a copy in the EMPr file and submit a copy of the completed checklist to the DSS on a weekly basis.

The checklists will form the basis for the Monthly Environmental Reports. Copies of all completed checklists will be attached as Annexures to the Environmental Audit Report as required in terms of the EIA Regulations.

4.4 Environmental site meetings

Minutes of the environmental site meetings shall be kept. The minutes must include an attendance register and will be attached to the Monthly Report that is distributed to attendees. Each set of minutes must clearly record "Matters for Attention" that will be reviewed at the next meeting.

4.5 Required Method Statements

The method statement will be done in such detail that the ECOs are enabled to assess whether the contractor's proposal is in accordance with the EMPr.

The method statement must cover applicable details with regard to:

- development procedures;
- materials and equipment to be used;
- getting the equipment to and from site;
- how the equipment/ material will be moved while on site;
- how and where material will be stored;
- the containment (or action to be taken if containment is not possible) of leaks or spills of any liquid or material that may occur;
- timing and location of activities;
- compliance/ non-compliance with the EMPr; and
- any other information deemed necessary by the ECOs.

Unless indicated otherwise by the Project Manager, the Contractor shall provide the following method statements to the Project Manager no less than 14 days prior to the commencement date of the activity:

- Site establishment Camps, Lay-down or storage areas, satellite camps, infrastructure;
- Batch plants;
- Workshop or plant servicing;
- Handling, transport and storage of Hazardous Chemical Substance's;
- Vegetation management Protected, clearing, aliens, felling;
- Access management Roads, gates, crossings etc.;
- Fire plan;
- Waste management transport, storage, segregation, classification, disposal (all waste streams);
- Social interaction complaints management, compensation claims, access to properties etc.;
- Water use (source, abstraction and disposal), access and all related information, crossings and mitigation;
- Emergency preparedness Spills, training, other environmental emergencies;
- Dust and noise management methodologies;
- Fauna interaction and risk management only if the risk was identified wildlife interaction especially on game farms; and
- Heritage and palaeontology management.

The ECOs shall monitor and ensure that the contractors perform in accordance with these method statements. Completed and agreed method statements between the holder of the EA and the contractor shall be captured in Appendix 1.

4.6 Environmental Incident Log (Diary)

The ECOs are required to maintain an up-to-date and current Environmental Incident Log (environmental diary). The Environmental Incident Log is a means to record all environmental incidents and/or all non-compliance notice would not be issued. An environmental incident is defined as:

- Any deviation from the listed impact management actions (listed in this EMPr) that
 may be addressed immediately by the ECOs. (For example a contractor's staff
 member littering or a drip tray that has not been emptied);
- Any environmental impact resulting from an action or activity by a contractor in contravention of the environmental stipulations and guidelines listed in the EMPr which as a single event would have a minor impact but which if cumulative and continuous would have a significant effect (for example no toilet paper available in the ablutions for an afternoon); and
- General environmental information such as road kills or injured wildlife.

The ECOs are to record all environmental incidents in the Environmental Incident Log. All incidents regardless of severity must be reported to the Developer. The Log is to be kept in the EMPr file and at a minimum the following will be recorded for each environmental incident:

- The date and time of the incident;
- Description of the incident;
- The name of the Contractor responsible;
- The incident must be listed as significant or minor;
- If the incident is listed as significant, a non-compliance notice must be issued, and recorded in the log;
- Remedial or corrective action taken to mitigate the incident; and
- Record of repeat minor offences by the same contractor or staff member.

The Environmental Incident Log will be captured in the EAR.

4.7 Non-compliance

A non-compliance notice will be issued to the responsible contractor by the ECOs via the DSS or Project Manager. The non-compliance notice will be issued in writing; a copy filed in the EMPr file and will at a minimum include the following:

- Time and date of the non-compliance;
- Name of the contractor responsible;
- Nature and description of the non-compliance;
- Recommended / required corrective action; and
- Date by which the corrective action to be completed.
- The contractors shall act immediately when a notice of non-compliance is received and correct whatever is the cause for the issuing of the notice. Complaints received regarding activities on the development site pertaining to the environment shall be

recorded in a dedicated register and the response noted with the date and action taken. The ECO should be made aware of any complaints. Any non-compliance with the agreed procedures of the EMPr is a transgression of the various statutes and laws that define the manner by which the environment is managed. Failure to redress the cause shall be reported to the relevant CA for them to deal with the transgression, as it deems fit. The contractor is deemed not to have complied with the EMPr if, inter alia, There is a deviation from the environmental conditions, impact management outcomes and impact management actions activities, as approved in generic and site specific EMPr as relevant as set out in the EMPr, which deviation has, or may cause, an environmental impact.

4.8 Corrective action records

For each non-compliance notice issued, a documented corrective action must be recorded. On receiving a non-compliance notice from the DSS, the contractor's cEO will ensure that the corrective actions required take place within the stipulated timeframe. On completion of the corrective action the cEO is to issue a Corrective Action Report in writing to the ECOs. If satisfied that the corrective action has been completed, the ECOs are to sign-off on the Corrective Action Report, and attach the report to the non-compliance notice in the EMPr file. A corrective action is considered complete once the report has signed off by the ECOs.

4.9 Photographic record

A digital photographic record will be kept. The photographic record will be used to show before, during and post rehabilitation evidence of the project as well used in cases of damages claims if they arise. Each image must be dated and a brief description note attached.

The Contractor shall:

1. Allow the ECOs access to take photographs of all areas, activities and actions.

The ECOs shall keep an electronic database of photographic records which will include:

- 1. Pictures of all areas designated as work areas, camp areas, development sites and storage areas taken before these areas are set up;
- 2. All bunding and fencing;
- 3. Road conditions and road verges;
- 4. Condition of all farm fences;
- 5. Topsoil storage areas;
- 6. All areas to be cordoned off during construction;
- 7. Waste management sites;
- 8. Ablution facilities (inside and out);
- 9. Any non-conformances deemed to be "significant";
- 10. All completed corrective actions for non-compliances;
- 11. All required signage;
- 12. Photographic recordings of incidents;
- 13. All areas before, during and post rehabilitation; and
- 14. Include relevant photographs in the Final Environmental Audit Report.

4.10 Complaints register

The ECOs shall keep a current and up-to-date complaints register. The complaints register is to be a record of all complaints received from communities, stakeholders and individuals. The Complaints Record shall:

- 1. Record the name and contact details of the complainant;
- 2. Record the time and date of the complaint;
- 3. Contain a detailed description of the complaint;
- 4. Where relevant and appropriate, contain photographic evidence of the complaint or damage (ECOs to take relevant photographs); and
- 5. Contain a copy of the ECOs written response to each complaint received and keep a record of any further correspondence with the complainant. The ECO's written response will include a description of any corrective action to be taken and must be signed by the Contractor, ECO and affected party. Where a damage claim is issued by the complainant, the ECOs shall respond as described in (section 4.11) below.

4.11 Claims for damages

In the event that a Claim for Damages is submitted by a community, landowner or individual, the ECOs shall:

- 1. Record the full detail of the complaint as described in (section 4.10) above;
- 2. The DPM will evaluate the claim and associated damage and submit the evaluation to the Senior Site Representative for approval;
- 3. Following consideration by the DPM, the claim is to be resolved and settled immediately, or the reason for not accepting the claim communicated in writing to the claimant. Should the claimant not accept this, the ECO shall, in writing report the incident to the Developer's negotiator and legal department; and
- 4. A formal record of the response by the ECOs to the claimant as well as the rectification of the method of making payments not amount will be recorded in the EMPr file.

4.12 Interactions with affected parties

Open, transparent and good relations with affected landowners, communities and regional staff are an essential aspect to the successful management and mitigation of environmental impacts.

The ECOs shall:

- 1. Ensure that all queries, complaints and claims are dealt within an agreed timeframe;
- 2. Ensure that any or all agreements are documented, signed by all parties and a record of the agreement kept in the EMPr file;
- 3. Ensure that a complaints telephone numbers are made available to all landowners and affected parties; and
- 4. Ensure that contact with affected parties is courteous at all times;

4.13 Environmental audits

Internal environmental audits of the activity and implementation of the EMPr must be undertaken. The findings and outcomes included in the EMPr file and submitted to the CA at intervals as indicated in the EA.

The ECOs must prepare a monthly EAR. The report will be tabled as the key point on the agenda of the Environmental Site Meeting. The Report is submitted for acceptance at the meeting and the final report will be circulated to the Project Manager and filed in the EMPr file. At a frequency determined by the EA, the ECOs shall submit the monthly reports to the CA. At a minimum the monthly report is to cover the following:

- Weekly Environmental Checklists;
- Deviations and non-compliances with the checklists;
- Non-compliances issued;
- Completed and reported corrective actions;
- Environmental Monitoring;
- General environmental findings and actions; and
- Minutes of the Bi-monthly Environmental Site Meetings.

4.14 Final environmental audits

On final completion of the rehabilitation and/or requirements of the EA a final EAR is to be prepared and submitted to the CA. The EAR must comply with Appendix 7 of the EIA Regulations.

PART B: SECTION 1: Pre-approved generic EMPr template

5. IMPACT MANAGEMENT OUTCOMES AND IMPACT MANAGEMENT ACTIONS

This section provides a pre-approved generic EMPr template with aspects that are common to the development of substation infrastructure for the transmission and distribution of electricity. There is a list of aspects identified for the development or expansion of substation infrastructure for the transmission and distribution of electricity, and for each aspect a set of prescribed impact management outcomes and associated impact management actions have been identified. Holders of EAs are responsible to ensure the implementation of these outcomes and actions for all projects as a minimum requirement, in order to mitigate the impact of such aspects identified for the development or expansion of substation infrastructure for the transmission and distribution of electricity.

The template provided below is to be completed by providing the information under each heading for each environmental impact management action.

The completed template must be signed and dated on each page by both the contractor and the holder of the EA prior to commencement of the activity. The method statements prepared and agreed to by the holder of the EA must be appended to the template as Appendix 1. Each method statement must also be duly signed and dated on each page by the contactor and the holder of the EA. This template, once signed and dated, is legally binding. The holder of the EA will remain responsible for its implementation.

5.1 Environmental awareness training

Impact management outcome: All onsite staff are aware and unde	erstands the indi	vidual responsibilitie	and understands the individual responsibilities in terms of this EMPr.	APr.		
Impact Management Actions	Implementation	u		Monitoring		
	Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of
	ווספושלו			ווספושל		compliance
All staff must receive environmental awareness training prior to						
commencement of the activities;						
- The Contractor must allow for sufficient sessions to train all						
personnel with no more than 20 personnel attending each						
course;						
- Refresher environmental awareness training is available as and						
when required;						
- All staff are aware of the conditions and controls linked to the						
EA and within the EMPr and made aware of their individual roles						
and responsibilities in achieving compliance with the EA and						
EMPr;						
- The Contractor must erect and maintain information posters at						
key locations on site, and the posters must include the following						
information as a minimum:						
a) Safety notifications; and						
b) No littering.						
- Environmental awareness training must include as a minimum						
the following:						
a) Description of significant environmental impacts,						
actual or potential, related to their work activities;						
b) Mitigation measures to be implemented when						
carrying out specific activities;						

21 | P a g e

()	Emergency preparedness and response			
pr	procedures;			
р	Emergency procedures;			
(e)	Procedures to be followed when working near or			
w	within sensitive areas;			
f)	Wastewater management procedures;			
(D	Water usage and conservation;			
(H	Solid waste management procedures;			
(i	Sanitation procedures;			
ij	Fire prevention; and			
\searrow	Disease prevention.			
record	- A record of all environmental awareness training courses			
ndertaken	undertaken as part of the EMPr must be available;			
ducate wa	Educate workers on the dangers of open and/or unattended			
fires;				
staff att	A staff attendance register of all staff to have received			
nvironmer	environmental awareness training must be available.			
ourse m	- Course material must be available and presented in			
opropriate 5 cm	appropriate languages that all staff can understand.			

Evidence of

compliance

5.2 Site Establishment development

Impact management outcome: Impacts on the environment are minimised during site establishment and the development footprint are kept to demarcated development area.

Impact Management Actions	Implementation	uc		Monitoring		
	Responsible Method		of Timeframe for Responsible Frequency	Responsible	Frequency	ш
	person	implementation	implementation implementation	person		O
- A method statement must be provided by the contractor prior						
to any onsite activity that includes the layout of the construction						
camp in the form of a plan showing the location of key						
infrastructure and services (where applicable), including but not						
limited to offices, overnight vehicle parking areas, stores, the						
workshop, stockpile and lay down areas, hazardous materials						
storage areas (including fuels), the batching plant (if one is						
located at the construction camp), designated access routes,						
equipment cleaning areas and the placement of staff						
accommodation, cooking and ablution facilities, waste and						
wastewater management;						

Location of camps must be within approved area to ensure that
the site does not impact on sensitive areas identified in the
environmental assessment or site walk through;

Sites must be located where possible on previously disturbed areas;

The camp must be fenced in accordance with Section 5.5:
 Fencing and gate installation; and

- The use of existing accommodation for contractor staff, where possible, is encouraged.

5.3 Access restricted areas

Impact management outcome: Access to restricted areas prevented.

Responsib - Identification of access restricted areas is to be informed by the environmental assessment, site walk through and any	Responsible Method of implementation	Method of Timeframe for Responsible Frequency Evidence of implementation implementation person compliance	Responsible person	Frequency	
Identification of access restricted areas is to be informed by the environmental assessment, site walk through and any	implementation	implementation	person		Evidence of
					compliance
the environmental assessment, site walk through and any	_				
additional areas identified during development;					
- Erect, demarcate and maintain a temporary barrier with					
clear signage around the perimeter of any access restricted					
area, colour coding could be used if appropriate; and					
- Unauthorised access and development related activity inside					
access restricted areas is prohibited.					

5.4 Access roads

Impact management outcome: Minimise impact to the environment through the planned and restricted movement of vehicles on site.

Impact Management Actions	Implementation	uc		Monitoring		
	Responsible Method		of Timeframe for Responsible Frequency Evidence of	Responsible	Frequency	Evidence of
	person	implementation implementation person	implementation	person		compliance
- An access agreement must be formalised and signed by the						
DPM, Contractor and landowner before commencing with						
the activities;						

24 | P a g e

All private roads used for access to the servitude must be	maintained and upon completion of the works, be left in at	least the original condition

- All contractors must be made aware of all these access
- Any access route deviation from that in the written agreement must be closed and re-vegetated immediately, at the contractor's expense;
- Maximum use of both existing servitudes and existing roads must be made to minimize further disturbance through the
- must be made to minimize further disturbance through the development of new roads;

 In circumstances where private roads must be used, the condition of the said roads must be recorded in accordance with section 4.9: photographic record; prior to use and the condition thereof agreed by the landowner, the DPM, and the contractor;
- Access roads in flattish areas must follow fence lines and tree belts to avoid fragmentation of vegetated areas or croplands
 Access roads must only be developed on a pre-planned and approved roads.

5.5 Fencing and Gate installation

Impact management outcome: Minimise impact to the environment and ensure safe and controlled access to the site through the erection of fencing and gates where required.

Impact Management Actions	Implementati	no		Monitoring		
	Responsible Method		of Timeframe for Responsible Frequency Evidence of	Responsible	Frequency	Evidence of
	person	implementation	implementation person	person		compliance

ı	Use existing gates provided to gain access to all parts of the		
	area authorised for development, where possible;		
1	Existing and new gates to be recorded and documented in		
	accordance with section 4.9: photographic record;		
ı	All gates must be fitted with locks and be kept locked at all		
	times during the development phase, unless otherwise		
	agreed with the landowner;		
1	At points where the line crosses a fence in which there is no		
	suitable gate within the extent of the line servitude, on the		
	instruction of the DPM, a gate must be installed at the		
	approval of the landowner;		
1	Care must be taken that the gates must be so erected that		
	there is a gap of no more than 100 mm between the bottom		
	of the gate and the ground;		
1	Where gates are installed in jackal proof fencing, a suitable		
	reinforced concrete sill must be provided beneath the gate;		
1	Original tension must be maintained in the fence wires;		
1	All gates installed in electrified fencing must be re-electrified;		
1	All demarcation fencing and barriers must be maintained in		
	good working order for the duration of the development		
	activities;		
1	Fencing must be erected around the camp, batching plants,		
	hazardous storage areas, and all designated access		
	restricted areas, where applicable;		
1	Any temporary fencing to restrict the movement of life-stock		
	must only be erected with the permission of the land owner.		
ı	All fencing must be developed of high quality material		
	bearing the SABS mark;		
1	The use of razor wire as fencing must be avoided;		

١			
	- Fenced areas with gate access must remain locked after		
	hours, during weekends and on holidays if staff is away from		
	site. Site security will be required at all times;		
	- On completion of the development phase all temporary		
	fences are to be removed;		
	- The contractor must ensure that all fence uprights are		
	appropriately removed, ensuring that no uprights are cut at		
	ground level but rather removed completely.		

5.6 Water Supply Management

Impact management outcome: Undertake responsible water usage.						
Impact Management Actions	Implementation	no		Monitoring		
	Responsible person	Method of implementation	of Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
 All abstraction points or bore holes must be registered with the DWS and suitable water meters installed to ensure that the abstracted volumes are measured on a daily basis; The Contractor must ensure the following: a. The vehicle abstracting water from a river does not enter or cross it and does not operate from within the river; b. No damage occurs to the river bed or banks and that the abstraction of water does not entail stream diversion activities; and c. All reasonable measures to limit pollution or sedimentation of the downstream watercourse are implemented. e. Ensure water conservation is being practiced by: a. Minimising water use during cleaning of equipment; 						-

27 | P a g e

	ervation		
b. Undertaking regular audits of water systems; and	c. Including a discussion on water usage and conse	during environmental awareness training.	d. The use of grey water is encouraged.

5.7 Storm and waste water management

Impact management outcome: Impacts to the environment caused by storm water and wastewater discharges during construction are avoided.

Impact Management Actions	Implementation	no		Monitoring		
	Responsible	Method of	Timeframe for	Responsible	Frequency	Frequency Evidence of
	person	implementation	implementation	person		compliance
- Runoff from the cement/ concrete batching areas must be	4)					
strictly controlled, and contaminated water must be	4)					
collected, stored and either treated or disposed of off-site, at	+					
a location approved by the project manager;						
- All spillage of oil onto concrete surfaces must be controlled	7					
by the use of an approved absorbent material and the used	7					
absorbent material disposed of at an appropriate waste	4)					
disposal facility;						
- Natural storm water runoff not contaminated during the	4)					
development and clean water can be discharged directly						
to watercourses and water bodies, subject to the Project	+					
Manager's approval and support by the ECO;						
- Water that has been contaminated with suspended solids,						
such as soils and silt, may be released into watercourses or						
water bodies only once all suspended solids have been						
removed from the water by settling out these solids in						
settlement ponds. The release of settled water back into the	5					

Manager's	
Project	
the t	
subject to	y the ECO.
t be	port by
or In	oddns pu
environment must be subject to the	approval and support by t

Solid and hazardous waste management 5.8

Impa	Impact Management Actions	Implementation	uc		Monitoring		
		Responsible	Method of implementation	Timeframe for	for Responsible	Frequency	Evidence of
-	All measures regarding waste management must be						
	ınagem						
	approach;						
1	Sufficient, covered waste collection bins (scavenger and						
_	weatherproof) must be provided;						
 -	A suitably positioned and clearly demarcated waste						
	collection site must be identified and provided;						
_ 	The waste collection site must be maintained in a clean and						
	orderly manner;						
1	Waste must be segregated into separate bins and clearly						
	marked for each waste type for recycling and safe disposal;						
1	Staff must be trained in waste segregation;						
ا ا	Bins must be emptied regularly;						
) 	General waste produced onsite must be disposed of at						
	egistered waste disposal sites/ recycling company;						
<u></u>	Hazardous waste must be disposed of at a registered waste						
	disposal site;						
1	Certificates of safe disposal for general, hazardous and						
_	recycled waste must be maintained.						

5.9 Protection of watercourses and estuaries

<u>E</u>	Impact management outcome: Pollution and contamination of the watercourse environment and or estuary erosion are prevented.	vatercourse e	nvironment and or	estuary erosion are	prevented.			
<u>=</u>	Impact Management Actions	Implementation	uc		Monitoring			
		Responsible person	Method of implementation	Timeframe for implementation	Responsible	Frequency	Evidence of	
	All watercourses must be protected from direct or indirect	- - - - - - -	5		5)		5	
l	spills of pollutants such as solid waste, sewage, cem							
	fuels, chemicals, aggregate tailings, wash and							
	contaminated water or organic material resulting from the							
	Contractor's activities;							
-	In the event of a spill, prompt action must be taken to clear							
	the polluted or affected areas;							
l 	Where possible, no development equipment must traverse							
	any seasonal or permanent wetland							
	No return flow into the estuaries must be allowed and no							
	disturbance of the Estuarine functional Zone should occur;							
I	Development of permanent watercourse or estuary crossing							
	must only be undertaken where no alternative access to							
	tower position is available;							
ı	There must not be any impact on the long term							
	morphological dynamics of watercourses or estuaries;							
l 	Existing crossing points must be favored over the creation of							
	new crossings (including temporary access)							
ı	When working in or near any watercourse or estuary, the							
	following environmental controls and consideration must be							
	taken:							
	a) Water levels during the period of construction;							

30 P a g e

No altering of the bed, banks, course or characteristics of a	
watercourse	
b) During the execution of the works, appropriate measures	
to prevent pollution and contamination of the riparian	
environment must be implemented e.g. including ensuring	
that construction equipment is well maintained;	
c) Where earthwork is being undertaken in close proximity	
to any watercourse, slopes must be stabilised using suitable	
materials, i.e. sandbags or geotextile fabric, to prevent sand	
and rock from entering the channel; and	
d) Appropriate rehabilitation and re-vegetation measures	
for the watercourse banks must be implemented timeously. In	
this regard, the banks should be appropriately and	
incrementally stabilised as soon as development allows.	

5.10 Vegetation clearing

Impact management outcome: Vegetation clearing is restricted to the authorised development footprint of the proposed infrastructure.

Impact Management Actions	Implementation	uo		Monitoring		
	Responsible Method implementa	l j	MethodofTimeframeforResponsibleFrequencyEvidence ofimplementationimplementationpersoncompliance	Responsible person	Frequency	Evidence of compliance
General:						
 Indigenous vegetation which does not interfere with the development must be left undisturbed; Protected or endangered species may occur on or near the development site. Special care should be taken not to damage such species; 						

 Search, rescue and replanting of all protected and endangered species likely to be damaged during project development must be identified by the relevant specialist and completed prior to any development or clearing; Permits for removal must be obtained from the relevant CA prior to the cutting or clearing of the affected species, and they must be filled: 	The Environmental Audit Report must confirm that all identified species have been rescued and replanted and that the location of replanting is compliant with conditions of approvals;	 Trees felled due to construction must be documented and form part of the Environmental Audit Report; Rivers and watercourses must be kept clear of felled trees, vegetation cuttings and debris; Only a registered pest control operator may apply herbicides on a commercial basis and commercial application must be 	carried out under the supervision of a registered pest control operator, supervision of a registered pest control operator or is appropriately trained; - A daily register must be kept of all relevant details of herbicide usage; - No herbicides must be used in estuaries;	 All protected species and sensitive vegetation not removed must be clearly marked and such areas fenced off in accordance to Section 5.3: Access restricted areas. Alien invasive vegetation must be removed and disposed of at a licensed waste management facility.

5.11 Protection of fauna

<u>E</u>	Impact management outcome: Disturbance to fauna is minimised.						
<u>m</u>	Impact Management Actions	Implementation	no		Monitoring		
		Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
1 1 1 1 1 1	No interference with livestock must occur without the landowner's written consent and with the landowner or a person representing the landowner being present; The breeding sites of raptors and other wild birds species must be taken into consideration during the planning of the development programme; Breeding sites must be kept intact and disturbance to breeding birds must be avoided. Special care must be taken where nestlings or fledglings are present; Special recommendations of the avian specialist must be adhered to at all times to prevent unnecessary disturbance of birds; No poaching must be tolerated under any circumstances. All animal dens in close proximity to the works areas must be marked as Access restricted areas; No deliberate or intentional killing of fauna is allowed; In areas where snakes are abundant, snake deterrents to be deployed on the pylons to prevent snakes climbing up, being electrocuted and causing power outages; and						
I	No Threatened or Protected species (ToPs) and/or protected fauna as listed according NEMBA (Act No. 10 of 2004) and relevant provincial ordinances may be removed and/or relocated without appropriate authorisations/permits.						

33 P a g e

5.12 Protection of heritage resources

sources is minimised.
t outcome: Impact to heritage resources is minimise
Impact management outcome: Impact to heritage resources is minimised
Impact ma

Impact Management Actions	Implementation	on		Monitoring		
	Responsible	Method of	of Timeframe for	Responsible	Frequency	Evidence of
	person	implementation	implementation implementation	person		compliance
- Identify, demarcate and prevent impact to all known	\u00e4					
sensitive heritage features on site in accordance with the No-	-0					
Go procedure in Section 5.3: Access restricted areas;						
- Carry out general monitoring of excavations for potential	al					
fossils, artefacts and material of heritage importance;						
- All work must cease immediately, if any human remains	ns					
and/or other archaeological, palaeontological and historical	al					
material are uncovered. Such material, if exposed, must be	96					
reported to the nearest museum, archaeologist/	51/					
palaeontologist (or the South African Police Services), so that	at					
a systematic and professional investigation can be	90					
undertaken. Sufficient time must be allowed to	to					
remove/collect such material before development	nt					
recommences.						

5.13 Safety of the public

Impact management outcome: All precautions are taken to minimise the risk of injury, harm or complaints.

Monitoring
Implementation
Impact Management Actions

		Responsible Method		of Timeframe for Responsible Frequency Evidence of	Responsible	Frequency	Evidence of
		person	implementation	implementation implementation person	person		compliance
1	Identify fire hazards, demarcate and restrict public access to						
	these areas as well as notify the local authority of any						
	potential threats e.g. large brush stockpiles, fuels etc.;						
ı	All unattended open excavations must be adequately						
	fenced or demarcated;						
1	Adequate protective measures must be implemented to						
	prevent unauthorised access to and climbing of partly						
	constructed towers and protective scaffolding;						
ı	Ensure structures vulnerable to high winds are secured;						
ı	Maintain an incidents and complaints register in which all						
	incidents or complaints involving the public are logged.						

5.14 Sanitation

Impact management outcome: Clean and well maintained toilet facilities are available to all staff in an effort to minimise the risk of disease and impact to the ō compliance Evidence Frequency Responsible Monitoring person for implementation Timeframe oţ implementation Method **Implementation** Responsible person The use of ablution facilities and or mobile toilets must be used at all times and no indiscriminate use of the veld for the Mobile chemical toilets are installed onsite if no other ablution purposes of ablutions must be permitted under any Impact Management Actions facilities are available; circumstances; environment. ı ı

35 P a g e

Where mobile chemical toilets are required, the following				
nust be ensured:				
3) Toilets are located no closer than 100 m to any watercourse				
or water body;				
o) Toilets are secured to the ground to prevent them from				
oppling due to wind or any other cause;				
c) No spillage occurs when the toilets are cleaned or emptied				
and the contents are managed in accordance with the EMPr;				
d) Toilets have an external closing mechanism and are closed				
and secured from the outside when not in use to prevent toilet				
baper from being blown out;				
e) Toilets are emptied before long weekends and workers				
nolidays, and must be locked after working hours;				
Toilets are serviced regularly and the ECO must inspect				
oilets to ensure compliance to health standards;				
A copy of the waste disposal certificates must be maintained.				

5.15 Prevention of disease

Impact Management outcome: All necessary precautions linked to the spread of disease are taken.

Impact Management Actions	Implementation	uo		Monitoring		
	Responsible	Responsible Method of Timeframe for Responsible Frequency Evidence of	Timeframe for	Responsible	Frequency	Evidence of
	person	implementation implementation person	implementation	person		compliance
- Undertake environmentally-friendly pest control in the camp						
area;						
- Ensure that the workforce is sensitised to the effects of sexually						
transmitted diseases, especially HIV AIDS;						

36 | P a g e

- The Contractor must ensure that information posters on AIDS			
are displayed in the Contractor Camp area;			
- Information and education relating to sexually transmitted			
diseases to be made available to both construction workers			
and local community, where applicable;			
- Free condoms must be made available to all staff on site at			
central points;			
 Medical support must be made available; 			
- Provide access to Voluntary HIV Testing and Counselling			
Services.			

5.16 Emergency procedures

Impact management outcome: Emergency procedures are in place to enable a rapid and effective response to all types of environmental emergencies.

Ē	Impact Management Actions	Implementation	uc		Monitoring		
,		Responsible person	Method implementatio	Method of Timeframe for Responsible implementation implementation	sible	Frequency	Frequency Evidence of compliance
1	Compile an Emergency Response Action Plan (ERAP) prior to						
	the commencement of the proposed project;						
	. The Emergency Plan must deal with accidents, potential						
	spillages and fires in line with relevant legislation;						
-	. All staff must be made aware of emergency procedures as						
	part of environmental awareness training;						
	. The relevant local authority must be made aware of a fire as						
	soon as it starts;						
- I	In the event of emergency necessary mitigation measures to						
	contain the spill or leak must be implemented (see Hazardous						
	Substances section 5.17).						

37 | P a g e

5.17 Hazardous substances

substances.
of hazardous
disposal c
dling, use and di
torage, han
come: Safe s
gement out
Impact manager
_

Responsible Method of Timeframe for Responsible Frequency person raddous substances to be minimised I non-toxic alternatives substituted must be stored in suitable containers Statement; any marked to indicate contents, uirements; bunded. The bunded area must be contained as pill / leak from the stored by lined with a SABS approved liner; dous Chemical Substance (HCS) awn up and kept up to date on a that will be used on site must have sits (MSDS); ith HCS must be trained in the safe according to the safety data sheet; andows substances / materials must added so a different social imposate and follow appropriate did impacts and follow appropriate	Impact Management Actions	Implementation	u		Monitoring		
The use and storage of hazardous substances to be minimised and non-hazardous substances must be stored in suitable containers as defined in the Method Statement; All hazardous substances must be clearly marked to indicate contents, and stored area must be clearly marked to indicate containers. All storage areas must be clearly marked to indicate contents, and stored area must be clearly marked to indicate containers. Bunded areas to be suitably lined with a SABS approved liner; An Alphabelical Hazardous Chemical Substance (HCS) control sheet must be drawn up and kept up to date on a continuous basis; All hazardous chemicals that will be used on site must have Marterial Safety Data Sheet (MSDS); All hazardous chemicals that will be used on site must have materials and containing impacts and follow appropriate be aware of the potential impacts and follow appropriate be aware of the potential impacts and follow appropriate personal protective equipment must be made available.		Responsible			Responsible	Frequency	Evidence of
		person	implementation	implementation	person		compliance
	- The use and storage of hazardous substances to be minimised						
	and non-hazardous and non-toxic alternatives substituted						
	where possible;						
	- All hazardous substances must be stored in suitable containers						
	as defined in the Method Statement;						
	quantities and safety requirements;						
	- All storage areas must be bunded. The bunded area must be						
	of sufficient capacity to contain a spill / leak from the stored						
	containers;						
	- Bunded areas to be suitably lined with a SABS approved liner;						
	- An Alphabetical Hazardous Chemical Substance (HCS)						
	continuous basis;						
Material Safety Data Sheets (MSDS): - All employees working with HCS must be trained in the safe use of the substance and according to the safety data sheet; - Employees handling hazardous substances / materials must be aware of the potential impacts and follow appropriate safety measures. Appropriate personal protective equipment must be made available:	All hazardous chemicals that will be used on site						
 All employees working with HCS must be trained in the safe use of the substance and according to the safety data sheet; Employees handling hazardous substances / materials must be aware of the potential impacts and follow appropriate safety measures. Appropriate personal protective equipment 	Material Safety Data Sheets (MSDS);						
use of the substance and according to the safety data sheet; - Employees handling hazardous substances / materials must be aware of the potential impacts and follow appropriate safety measures. Appropriate personal protective equipment must be made available:	- All employees working with HCS must be trained in the safe						
Employees handling hazardous substances / materials must be aware of the potential impacts and follow appropriate safety measures. Appropriate personal protective equipment must be made available:	use of the substance and according to the safety data sheet;						
be aware of the potential impacts and follow appropriate safety measures. Appropriate personal protective equipment must be made available:	- Employees handling hazardous substances / materials must						
safety measures. Appropriate personal protective equipment must be made available:	be aware of the potential impacts and follow appropriate						
must be made available:	safety measures. Appropriate personal protective equipment						
	must be made available;						

38 P a g e

 The Contractor must ensure that diesel and other liquid fuel, oil and hydraulic fluid is stored in appropriate storage tanks or in bowsers; The tanks/ bowsers must be situated on a smooth impermeable surface (concrete) with a permanent bund. The impermeable lining must extend to the crest of the bund and the volume inside the bund must be 130% of the total capacity of all the storage tanks/ bowsers (110% statutory requirement plus an allowance for rainfall); The floor of the bund must be sloped, draining to an oil separator; Provision must be made for refueling at the storage area by protecting the soil with an impermeable groundcover. Where dispensing equipment is used, a drip tray must be used to ensure small spills are contained; All empty externally dirty drums must be stored on a drip tray or within a bunded area; No unauthorised access into the hazardous substances storage areas must be permitted; No unauthorised access into the hazardous substances storage areas must be permitted; Adequate fire-fighting equipment must be made available at all hazardous storage areas; Adequate fire-fighting equipment must be used. Appropriate required, a mobile refueling unit must be used. Appropriate 	ground protection such as drip trays must be used; An appropriately sized spill kit kept onsite relevant to the scale	of the activity/s involving the use of hazardous substance must be available at all times; The responsible operator must have the required training to make use of the spill kit in emergency situations;

Evidence of compliance

Frequency

- All applications are not spell in strings are divalidated and most	
To boated in all grows where and tribing are being indeptation.	
- In the event of a spill, contaminated soil must be collected in	
containers and stored in a central location and disposed of	
according to the National Environmental Management:	
Waste Act 59 of 2008. Refer to Section 5.7 for procedures	
concerning storm and waste water management and 5.8 for	
solid and hazardous waste management.	

5.18 Workshop, equipment maintenance and storage

Impact management outcome: Soil, surface water and groundwater contamination is minimised.	r contaminatie	on is minimised.		
Impact Management Actions	Implementation	uo		Monitoring
	Responsible Method	1	of Timeframe for Responsible	Responsible
				person
- Where possible and practical all maintenance of vehicles				
and equipment must take place in the workshop area;				
- During servicing of vehicles or equipment, especially where				
emergency repairs are effected outside the workshop area,				
a suitable drip tray must be used to prevent spills onto the soil.				
The relevant local authority must be made aware of a fire as				

40 | Page

The workshop area must have a bunded concrete slab that is

the activity taking place must be available;

sloped to facilitate runoff into a collection sump or suitable oil

Appropriately sized spill kit kept onsite relevant to the scale of

Workshop areas must be monitored for oil and fuel spills;

ı

removed from site to facilitate repair;

Leaking equipment must be repaired immediately or be

soon as it starts;

/ water separator where maintenance work on vehicles and	equipment can be performed;	- Water drainage from the workshop must be contained and	managed in accordance Section 5.7: Storm and waste water	management.

5.19 Batching plants

l E	Impact Management Actions	Implementation	uc		Monitoring		
		Responsible	Method of	Timeframe for	. Responsible	Frequency	Frequency Evidence of
		person	implementation	implementation	person		compliance
ı	Concrete mixing must be carried out on an impermeable						
	surface;						
1	Batching plants areas must be fitted with a containment						
	facility for the collection of cement laden water.						
1	Dirty water from the batching plant must be contained to						
	prevent soil and groundwater contamination						
1	Bagged cement must be stored in an appropriate facility and						
	at least 10 m away from any water courses, gullies and drains;						
1	A washout facility must be provided for washing of concrete						
	associated equipment. Water used for washing must be						
	restricted;						
1	Hardened concrete from the washout facility or concrete						
	mixer can either be reused or disposed of at an appropriate						
	licenced disposal facility;						
1	Empty cement bags must be secured with adequate binding						
	material if these will be temporarily stored on site;						

Sand and aggregates containing cement must be kept damp to prevent the generation of dust (Refer to Section 5.20: Dust emissions) Any excess sand, stone and cement must be removed or reused from site on completion of construction period and disposed at a registered disposal facility: Temporary fencing must be erected around batching plants in accordance with Section 5.5: Fencing and ante installation
--

5.20 Dust emissions

Impact management outcome: Dust prevention measures are applied to minimise the generation of dust.

Impact Management Actions	Implementation	uo		Monitoring		
	Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of
	person	implementation	implementation	person		compliance
- Take all reasonable measures to minimise the generation of						
dust as a result of project development activities to the						
satisfaction of the ECO;						
- Removal of vegetation must be avoided until such time as soil						
stripping is required and similarly exposed surfaces must be re-						
vegetated or stabilised as soon as is practically possible;						
- Excavation, handling and transport of erodible materials must						
be avoided under high wind conditions or when a visible dust						
plume is present;						
- During high wind conditions, the ECO must evaluate the						
situation and make recommendations as to whether dust-						
damping measures are adequate, or whether working will						
cease altogether until the wind speed drops to an						
acceptable level;						

42 | P a g

5.21 Blasting

Impact management outcome: Impact to the environment is minimised through a safe blasting practice.

Impact Management Actions	Implementation	uc		Monitoring		
	Responsible	Responsible Method of Timeframe for Responsible Frequency Evidence of	Timeframe for	Responsible	Frequency	Evidence of
	person	implementation implementation person	implementation	person		compliance
- Any blasting activity must be conducted by a suitably						
licensed blasting contractor; and						
- Notification of surrounding landowners, emergency services						
site personnel of blasting activity 24 hours prior to such activity						
taking place on Site.						

5.22 Noise

Impact Management outcome: Prevent unnecessary noise to the environment by ensuring that noise from development activity is mitigated.

Impact Management Actions	Implementation	uc		Monitoring		
	Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of
	person	implementation	implementation	person		compliance
- The Contractor must keep noise level within acceptable limits,						
Restrict the use of sound amplification equipment for						
communication and emergency only;						
- All vehicles and machinery must be fitted with appropriate						
silencing technology and must be properly maintained;						
- Any complaints received by the Contractor regarding noise						
must be recorded and communicated. Where possible or						
applicable, provide transport to and from the site on a daily						
basis for construction workers;						
- Develop a Code of Conduct for the construction phase in						
terms of behaviour of construction staff. Operating hours as						
determined by the environmental authorisation are adhered						
to during the development phase. Where not defined, it must						
be ensured that development activities must still meet the						
impact management outcome related to noise						
management.						

5.23 Fire prevention

Impact management outcome: Prevention of uncontrollable fires.

Monitoring
Implementation
Impact Management Actions

44 Page

Evidence of compliance

Frequency

	Responsible Method		of Timeframe for	Responsible	Frequency	Frequency Evidence of
	person	implementation	implementation implementation person	person		compliance
- Designate smoking areas where the fire hazard could be	Φ					
regarded as insignificant;						
- Firefighting equipment must be available on all vehicles	Se					
located on site;						
- The local Fire Protection Agency (FPA) must be informed of	of					
construction activities;						
 Contact numbers for the FPA and emergency services must 	St					
be communicated in environmental awareness training and	P					
displayed at a central location on site;						
- Two way swop of contact details between ECO and FPA.						

5.24 Stockpiling and stockpile areas

Impact management outcome: Reduce erosion and sedimentation as a result of stockpiling.

Responsible Monitoring person ф implementation Timeframe ō implementation Method **Implementation** Responsible person All stockpiled material must be maintained and kept clear of phase (either during piling (if required) or earthworks) must be stored appropriately on site in order to minimise impacts to weeds and alien vegetation growth by undertaking regular All material that is excavated during the project development watercourses, watercourses and water bodies; weeding and control methods; Impact Management Actions Ī I

45 | P a g e

-	 Topsoil stockpiles must not exceed 2 m in height; 			
1	- During periods of strong winds and heavy rain, the stockpiles			
	must be covered with appropriate material (e.g. cloth,			
	tarpaulin etc.);			
	- Where possible, sandbags (or similar) must be placed at the			
	bases of the stockpiled material in order to prevent erosion of			
	the material.			

5.25 Civil works

<u>E</u>	Impact management outcome: Impact to the environment minimised during civil works to create the substation terrace.	ed during civil v	vorks to create the	substation terrace.			
<u>m</u>	Impact Management Actions	Implementation	uc		Monitoring		
		Responsible person	Method of implementation	of Timeframe for implementation	Responsible person	Frequency	Frequency Evidence of compliance
١	Where terracing is required, topsoil must be collected and						
	retained for the purpose of re-use later to rehabilitate						
I	disturbed areas not covered by yard stone; Areas to be rehabilitated include terrace embankments and						
	areas outside the high voltage yards;						
I	Where required, all sloped areas must be stabilised to ensure						
	proper rehabilitation is effected and erosion is controlled;						
I	These areas can be stabilised using design structures or						
	vegetation as specified in the design to prevent erosion of						
	embankments. The contract design specifications must be						
	adhered to and implemented strictly;						
I	Rehabilitation of the disturbed areas must be managed in						
	accordance with Section 5.35: Landscaping and						
	rehabilitation;						

All excess spoil generated during ferracing action disposed of in an appropriate manner and at landfill site; and Spoil can however be used for landscaping it must be covered with a layer of 150 mr rehabilitation purposes.	All excess spoil generated disposed of in an approlandfill site; and Spoil can however be must be covered wit rehabilitation purposes.
--	--

5.26 Excavation of foundation, cable trenching and drainage systems

Impact management outcome: No environmental degradation occurs as a result of excavation of foundation, cable trenching and drainage systems.

Impact Management Actions	Implementation	uc		Monitoring		
	Responsible person	Method of implementation	of Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
 All excess spoil generated during foundation excavation must be disposed of in an appropriate manner and at a licensed landfill site, if not used for backfilling purposes; Spoil can however be used for landscaping purposes and must be covered with a layer of 150 mm topsoil for rehabilitation purposes; Management of equipment for excavation purposes must be undertaken in accordance with Section 5.18: Workshop, equipment maintenance and storage; and Hazardous substances spills from equipment must be managed in accordance with Section 5.17: Hazardous substances. 						

5.27 Installation of foundations, cable trenching and drainage systems

Impact management outcome: No environmental degradation occurs during the installation of foundation, cable trenching and drainage system.

Impact Management Actions	Implementation	uc		Monitoring		
	Responsible	Responsible Method of Timeframe for Responsible Frequency Evidence of Implementation person	Timeframe for	Responsible	Frequency	Evidence of
- Batching of cement to be undertaken in accordance with						
Section 5.19: Batching plants; and						
- Residual solid waste must be disposed of in accordance with						
Section 5.8: Solid waste and hazardous management.						

5.28 Installation of equipment (circuit breakers, current Transformers, Isolators, Insulators, surge arresters, voltage transformers, earth switches)

Impact Management Actions	Implementation	uo		Moniforing		
	Responsible	Method	of Timeframe for Responsible Frequency Evidence of	Responsible	Frequency	Evidence of
	person	implementation	implementation implementation person	person		compliance
 Management of dust must be conducted in accordance 						
with Section 5. 20: Dust emissions;						
 Management of equipment used for installation must be 						
conducted in accordance with Section 5.18: Workshop,						
equipment maintenance and storage;						
 Management hazardous substances and any associated 						
spills must be conducted in accordance with Section 5.17:						
Hazardous substances; and						

48 Page

Residual solid waste must be recycled or disposed of in accordance with Section 5.8: Solid waste and hazardous management.				
Residual solid waste must be recycled or disposed of in accordance with Section 5.8: Solid waste and hazardous management.				
Residual solid waste must be recycled or disposed of in accordance with Section 5.8: Solid waste and hazardous management.				
Residual solid waste must be recycled or disposed accordance with Section 5.8: Solid waste and hazc management .	d of in	ırdous		
i .	sidual solid waste must be recycled or disposec	cordance with Section 5.8: Solid waste and hazc	ınagement.	

5.29 Steelwork Assembly and Erection

Impact management outcome: No environmental degradation occurs as a result of steelwork assembly and erection.

<u>Ē</u>	Impact Management Actions	Implementation	uc		Monitoring		
		Responsible	Responsible Method of Timeframe for Responsible Frequency Evidence of	Timeframe for	Responsible	Frequency	Evidence of
		person	Implementation	Implementation Implementation person	person		compliance
ı	During assembly, care must be taken to ensure that no						
	wasted/unused materials are left on site e.g. bolts and nuts						
1	Emergency repairs due to breakages of equipment must						
	be managed in accordance with Section 5. 18: Workshop,						
	equipment maintenance and storage and Section 5.16:						
	Emergency procedures.						

5.30 Cabling and Stringing

Impact management outcome: No environmental degradation occurs as a result of stringing.

Impact Management Actions	Implementation	uo		Monitoring		
	Responsible Method		of Timeframe for Responsible	Responsible	Frequency	Frequency Evidence of
	person	implementation	implementation	person		compliance

Residual solid waste (off cuts etc.) shall be recycled or	
disposed of in accordance with Section 6.8: Solid waste and	
hazardous Management;	
Management of equipment used for installation shall be	
conducted in accordance with Section 5.18: Workshop,	
equipment maintenance and storage;	
Management hazardous substances and any associated	
spills shall be conducted in accordance with Section 5.17:	
Hazardous substances.	

5.31 Testing and Commissioning (all equipment testing, earthing system, system integration)

Impact management outcome: No environmental degradation occurs as a result of Testing and Commissioning.

Impact Management Actions	Implementation	u		Monitoring		
	Responsible	Method of	Responsible Method of Timeframe for Responsible Frequency Evidence of	Responsible	Frequency	Evidence of
	person	implementation	implementation implementation person	person		compliance
- Residual solid waste must be recycled or disposed of in						
accordance with Section 5.8: Solid waste and hazardous						
management.						

5.32 Socio-economic

Impact management outcome: enhanced socio-economic development.

Monitoring	
Implementation	
Impact Management Actions	

50 | P a g e

		Responsible Method		of Timeframe for Responsible Frequency Evidence of	Responsible	Frequency	Evidence of
		person	implementation	implementation implementation person	person		compliance
ı	Develop and implement communication strategies to						
	facilitate public participation;						
I	Develop and implement a collaborative and constructive						
	approach to conflict resolution as part of the external						
	stakeholder engagement process;						
I	Sustain continuous communication and liaison with						
	neighboring owners and residents						
I	Create work and training opportunities for local stakeholders;						
	and						
I	Where feasible, no workers, with the exception of security						
	personnel, must be permitted to stay over-night on the site.						
	This would reduce the risk to local farmers.						

5.33 Temporary closure of site

Impact management outcome: Minimise the risk of environmental impact during periods of site closure greater than five days.

	Impact Management Actions	Implementation	uo		Monitoring			
•		Responsible	Responsible Method of Timeframe for Responsible Frequency Evidence of	Timeframe for	Responsible	Frequency	Evidence of	
		person	implementation	implementation implementation person	person		compliance	
	- Bunds must be emptied (where applicable) and need to be							
	undertaken in accordance with the impact management							
	actions included in sections 5.17: Hazardous substances and							
	5.18: Workshop, equipment maintenance and storage;							
	 Hazardous storage areas must be well ventilated; 							

Hre extinguishers must be serviced and accessible. Service			
records to be filed and audited at last service;			
Emergency and contact details displayed must be displayed;			
Security personnel must be briefed and have the facilities to			
contact or be contacted by relevant management and			
emergency personnel;			
Night hazards such as reflectors, lighting, traffic signage etc.			
must have been checked;			
Fire hazards identified and the local authority must have been			
notified of any potential threats e.g. large brush stockpiles,			
fuels etc.;			
Structures vulnerable to high winds must be secured;			
Wind and dust mitigation must be implemented;			
Cement and materials stores must have been secured;			
Toilets must have been emptied and secured;			
Refuse bins must have been emptied and secured;			
Drip trays must have been emptied and secured.			

5.34 Dismantling of old equipment

 $1 \quad 1 \quad 1 \quad 1 \quad 1 \quad 1$

Impact Management Actions	Implementation	uc		Monitoring		
	Responsible	Method of	Responsible Method of Timeframe for Responsible Frequency Evidence of	Responsible	Frequency	Evidence of
	person	implementation	implementation implementation person	person		compliance
- All old equipment removed during the project must be						
stored in such a way as to prevent pollution of the						
environment;						

Impact management outcome: Impact to the environment to be minimised during the dismantling, storage and disposal of old equipment commissioning.

52 P a g e

ent	pup		has	10st	sing	y as		pup		uste	
Oil containing equipment must be stored to prevent	leaking or be stored on drip trays; All scrap steel must be stacked neatly and any disused and	broken insulators must be stored in containers;	Once material has been scrapped and the contract has	been placed for removal, the disposal Contractor must	ensure that any equipment containing pollution causing	substances is dismantled and transported in such a way	to prevent spillage and pollution of the environment;	The Contractor must also be equipped to contain and	clean up any pollution causing spills; and	Disposal of unusable material must be at a licensed waste	disposal site.
1	ı		1					1		1	

5.35 Landscaping and rehabilitation

Impact management outcome: Areas disturbed during the development phase are returned to a state that approximates the original condition.

Impact Management Actions	Implementation	uc		Monitoring		
	Responsible	esponsible Method of Timeframe for Responsible Frequency Evidence of	Timeframe for	Responsible	Frequency	Evidence of
	person	implementation implementation person	implementation	person		compliance
- All areas disturbed by construction activities must be subject						
to landscaping and rehabilitation; All spoil and waste must be						
disposed of to a registered waste site;						
- All slopes must be assessed for contouring, and to contour						
only when the need is identified in accordance with the						
Conservation of Agricultural Resources Act, No 43 of 1983						

All slopes must be assessed for terracing, and to terrace only when the need is identified in accordance with the Conservation of Agricultural Resources Act, No 43 of 1983; Berms that have been created must have a slope of 1:4 and be replanted with indigenous species and grasses that approximates the original condition; Where new access roads have crossed cultivated farmlands, that lands must be rehabilitated by ripping which must be agreed to by the holder of the EA and the landowners; Rehabilitation of access roads outside of farmland; Indigenous species must be used for with species and/grasses to where it compliments or approximates the original condition; Stockpiled topsoil must be used for rehabilitation (refer to Section 5.24: Stockpiling and stockpiled areas); Stockpiled topsoil must be evenly spread so as to facilitate seeding and minimise loss of soil due to erosion; Before placing topsoil, all visible weeds from the placement area and from the topsoil must be removed; Subsoil must be ripped before topsoil is placed; The rehabilitation must be timed so that rehabilitation can take place at the optimal time for vegetation establishment; Where impacted through construction related activity, all sloped areas must be stabilised to ensure proper rehabilitation is effected and erosion is controlled; Sloped areas stabilised using design structures or vegetation as specified in the design to prevent erosion of embankments. The contract design specifications must be adhered to and implemented stricity;
--

Where required, re-vegetation including hydro-seeding can	
be enhanced using a vegetation seed mixture as described	
below. A mixture of seed can be used provided the mixture is	
carefully selected to ensure the following:	
a) Annual and perennial plants are chosen;	
b) Pioneer species are included;	
c) Species chosen must be indigenous to the area with the	
seeds used coming from the area;	
d) Root systems must have a binding effect on the soil;	
e) The final product must not cause an ecological imbalance	
in the area	

6 ACCESS TO THE GENERIC EMPr

Once completed and signed, to allow the public access to the generic EMPr, the holder of the EA must make the EMPr available to the public in accordance with the requirements of Regulation 26(h) of the EIA Regulations.

PART B: SECTION 2

7 SITE SPECIFIC INFORMATION AND DECLARATION

7.1 Sub-section 1: contact details and description of the project

7.1.1 Details of the applicant: Name of applicant: Hendrina South Wind Energy Facility (RF) Pty Ltd

Tel No: 021 207 2081

Fax No: -

Postal Address: Suite 104, Albion Springs, 183 Main Road, Rondebosch, Cape Town

Physical Address: Suite 104, Albion Springs, 183 Main Road, Rondebosch, Cape Town

7.1.2 Details and expertise of the EAP:

Name of EAP: Lelani Claassen

Tel No: 011 794 7539

Fax No: 011 794 6946

E-mail address: info@cabangaenvironmental.co.za

Expertise of the EAP (Curriculum Vitae included as Appendix in Appendix D of the EIA Report):

Lelani Claassen started her career as an environmental consultant in 2008. She holds an Honours degree in Environmental Management from UNISA, which she completed whilst working as an environmental consultant following the successful completion of a BSc Degree in Landscape Architecture from the University of Pretoria. She has also successfully completed the SABS Short-course: Environmental Legal Requirements for ISO 14001 compliance. Her project experience is extensive in scope and covers various aspects of development including residential developments, filling stations and depots, infrastructure and mining projects.

Lelani's experience includes environmental authorisation processes: Basic Assessments, Environmental Impact Assessments, Environmental Management Plans and Programmes, Mining Right Applications, Water Use Licensing, Concept (Fatal Flaw), Pre-Feasibility and Feasibility Studies. She also has experience as an Environmental Control Officer on construction projects. Lelani has also completed numerous environmental compliance audits and environmental-legal compliance assessments.

Lelani is a Registered EAP (Registration Number 2018/153) with the Environmental Assessment Practitioner's Association of South Africa (EAPASA), the only Registration Authority for EAPs in South Africa in terms of Section 24H of the National Environmental Management Act, 1998 (Act No. 107 of 1998) (NEMA).

Lelani is also a Registered Scientist with the South African Council for Natural Scientific Professions (SACNASP) (Environmental Science) (Pr. Sci. Nat 121645), the legislated regulatory body for natural science practitioners in South Africa in terms of the Natural Scientific Professions Act of 2003.

7.1.3 Project name: Hendrina South Wind Energy Facility and Associated Infrastructure

7.1.4 Description of the project:

The proposed Project involves the development of the Hendrina South Wind Energy Facility (WEF) and associated infrastructure, including sub-station (IPP Portion) and Battery Energy Storage System (BESS), Operations and Maintenance (O&M) Building, Roads and Cables and temporary construction camps and laydown areas.

The Project is being developed in the context of the REIPPP, in line with the IRP – Renewable Wind Energy, and will connect to the National Grid via the Hendrina South Grid Infrastructure Project which is the subject of a separate application.

The development area comprises of 2,900ha, with the total buildable area comprising approximately 200ha. The total extent of the proposed Project is calculated in Table 1.

Table 1: Project Extent

Component	Area per component	Number of components	Total footprint
Turbines:	1На	26	26Ha
O&M) building:	200m² (0.02Ha)	1	0.02Ha
Workshop:	150m² (0.015Ha)	1	0.015Ha
Stores:	150m² (0.015Ha)	1	0.015Ha
Construction Camps:	5000m² (0.5Ha)	2	1На
Laydown Areas:	30,000m² (3Ha)	2	6На
Internal Roads:	10m wide, 40km long = 400000m²		40Ha
On-site substation and BESS:	ЗНа	1	ЗНа
76.5 Ha			76.5 Ha

7.1.5 Project location:

	7.1.5 Project loca		1	1	1	·
NO	FARM NAME(if	FARM NUMBER(PORTION	PORTION NUMBER	LATITUDE	LONGITUDE
	applicable)	if applicable)	NAME			
	Dunbar	189 IS		Part of Portion 1	26°11'39.81"S	29°32'54.85"E
	Dunbar	189 IS		Part of Portion 3	26°12'4.69"S	29°33'18.62"E
	Dunbar	189 IS		Part of Portion 5	26°11'1.09"S	29°32'37.67"E
	Dunbar	189 IS		Part of Portion 6	26°11'25.93"S	29°32'44.04"E
	Dunbar	189 IS		7	26°11'7.28"S	29°32'2.81"E
	Halfgewonnen	190 IS		11	26°13'55.64"S	29°32'43.60"E
	Halfgewonnen	190 IS		14	26°13'12.40"S	29°32'58.36"
	Halfgewonnen	190 IS		15	26°12'35.18"S	29°33'3.02"E
	Weltevreden	193 IS		0	26°13'7.52"S	29°33'45.87"E
	Weltevreden	193 IS		2	26°13'36.37"S	29°33'18.21"E
	Weltevreden	193 IS		10	26°14'22.18"S	29°33'1.58"E
	Weltevreden	193 IS		11	26°13'14.49"S	29°35'43.69"E
	Weltevreden	193 IS		12	26°13'11.31"S	29°35'12.61"E
	Weltevreden	193 IS		13	26°12'16.93"S	29°35'58.28"E
	Weltevreden	193 IS		Part of Portion 14	26°11'28.34"S	29°35'36.15"E
	Weltevreden	193 IS		Part of Portion 15	26°11'50.06''S	29°35'15.13"E
	Weltevreden	193 IS		Part of Portion 16	26°12'8.11"S	29°34'57.66"E
	Weltevreden	193 IS		Part of Portion 17	26°12'30.04"S	29°34'41.38"E
	Weltevreden	193 IS		18	26°12'38.18"S	29°34'9.19"E

7.2 Sub-section 2: Development footprint site map

This sub-section must include a map of the site sensitivity overlaid with the preliminary infrastructure layout. The sensitivity map must be prepared from the national web based environmental screening tool, when available for compulsory use at: https://screening.environment.gov.za/screeningtool. The sensitivity map shall identify the nature of each sensitive feature e.g. threatened plant species, archaeological site, etc. Sensitivity maps shall identify features both within the planned working area and any known sensitive features within 50 m from the development footprint.

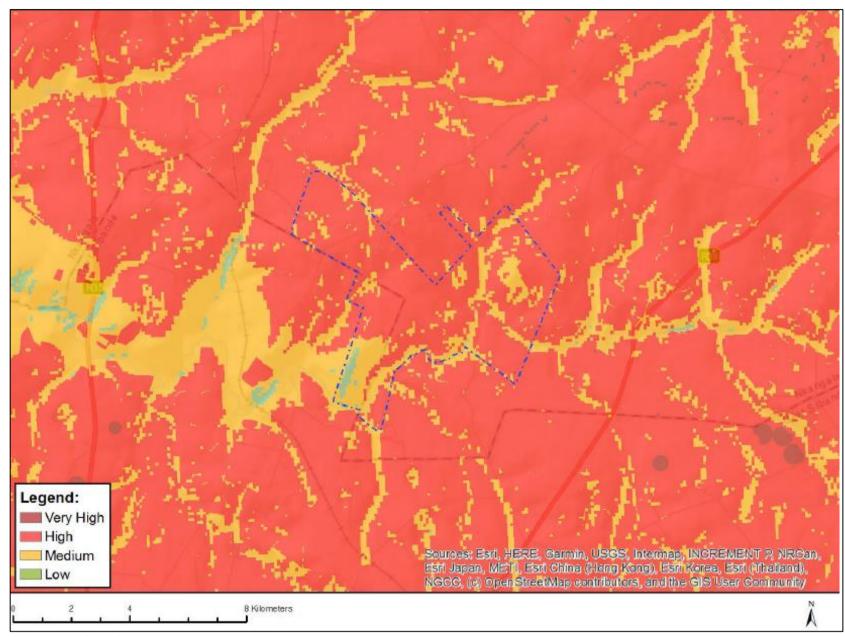


Figure 1: Agriculture Theme sensitivity

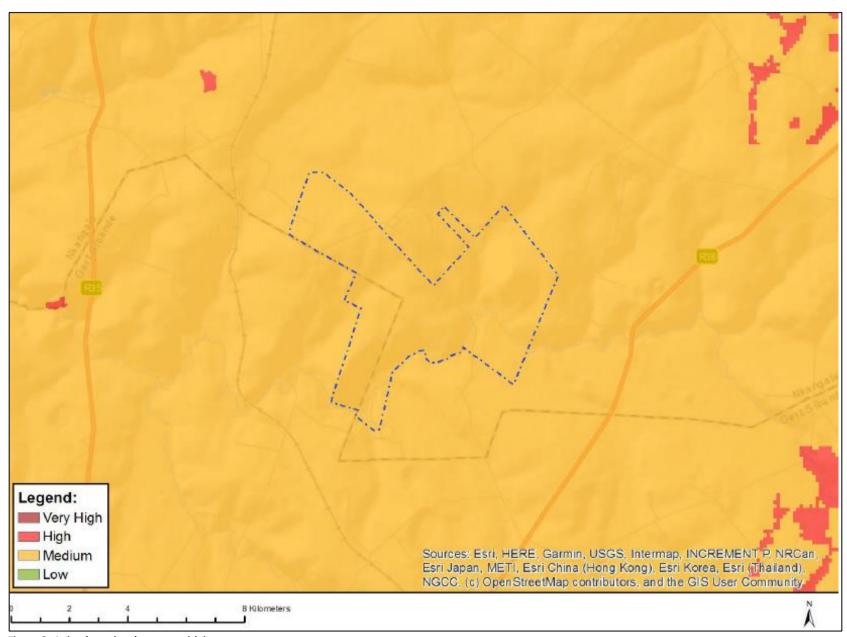


Figure 2: Animal species theme sensitivity

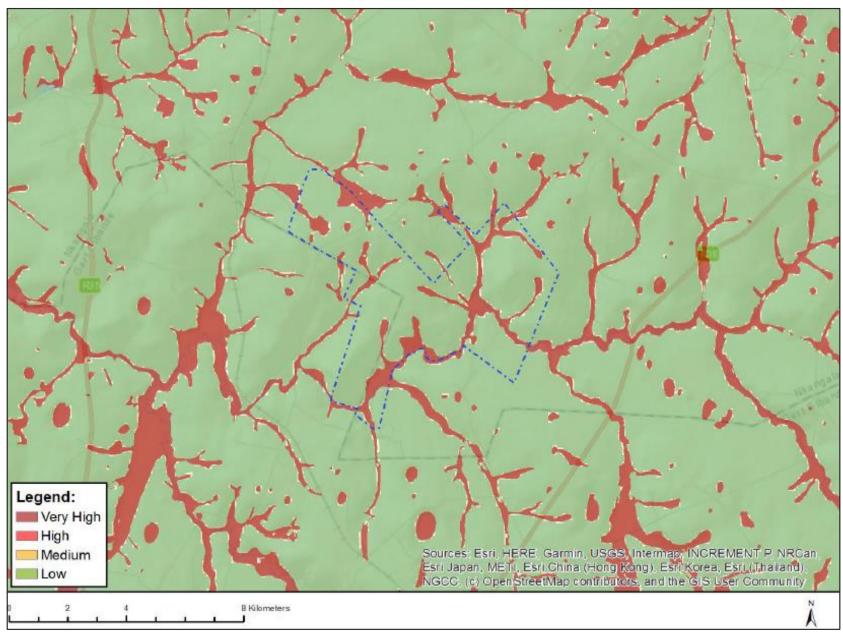


Figure 3: Aquatic Biodiversity Theme sensitivity

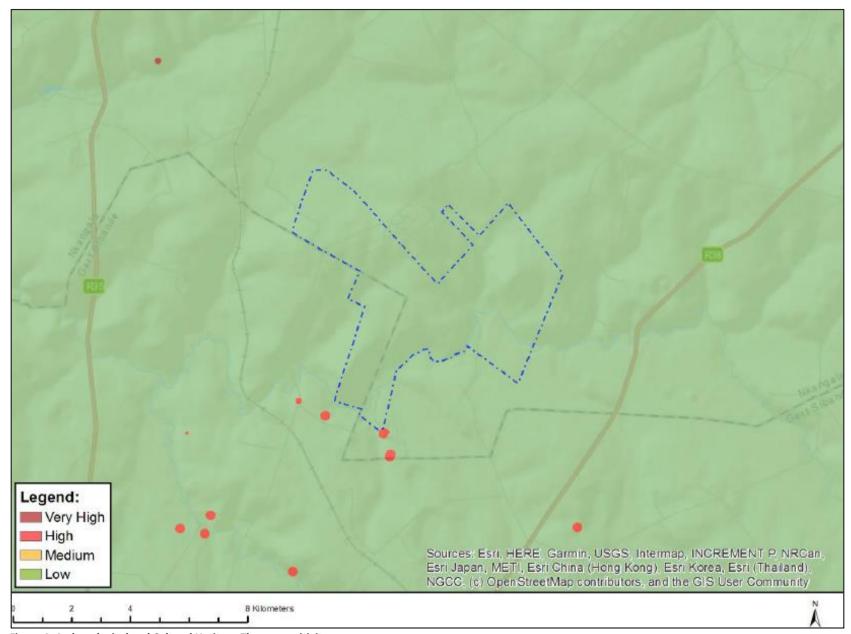


Figure 4: Archaeological and Cultural Heritage Theme sensitivity

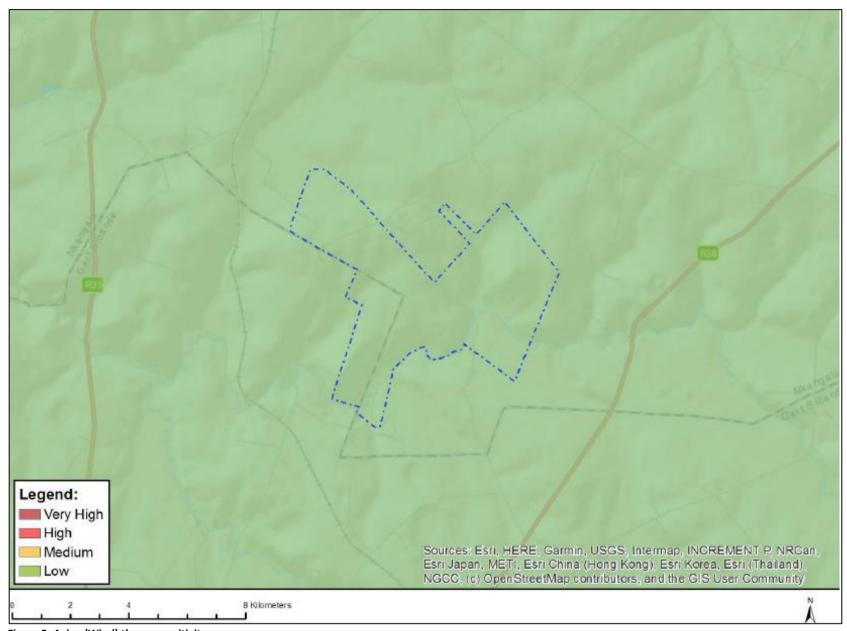


Figure 5: Avian (Wind) theme sensitivity

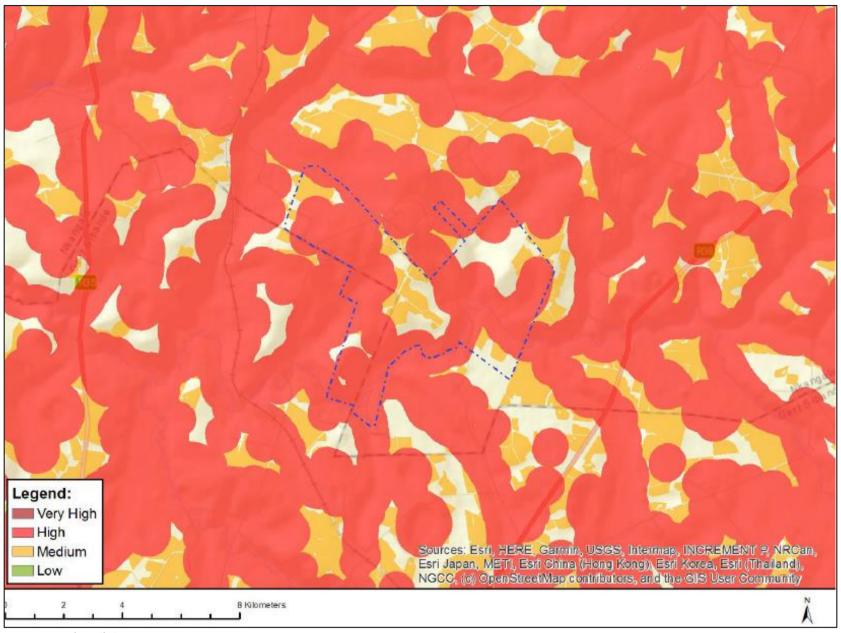


Figure 6: Bats (Wind) theme sensitivity

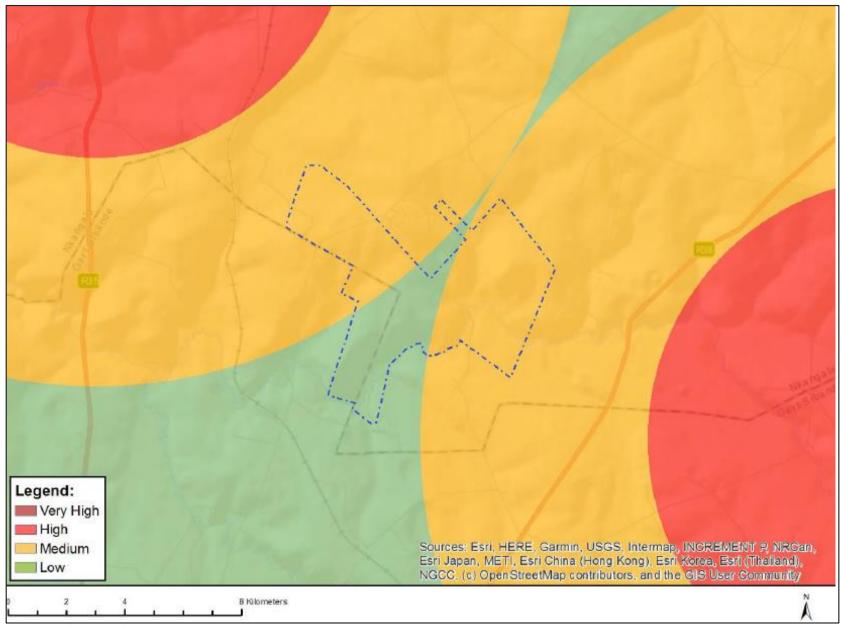


Figure 7: Civil aviation theme sensitivity

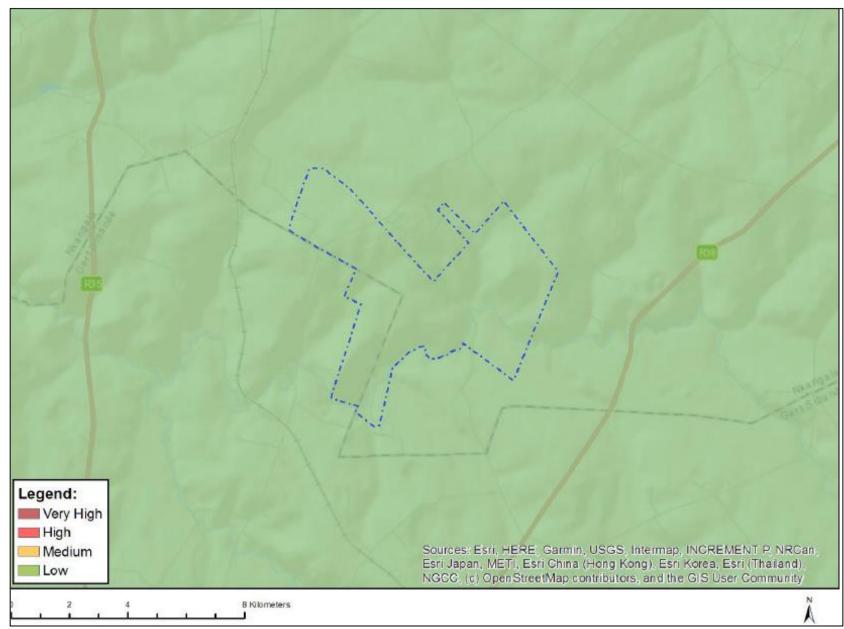


Figure 8: Defence theme sensitivity

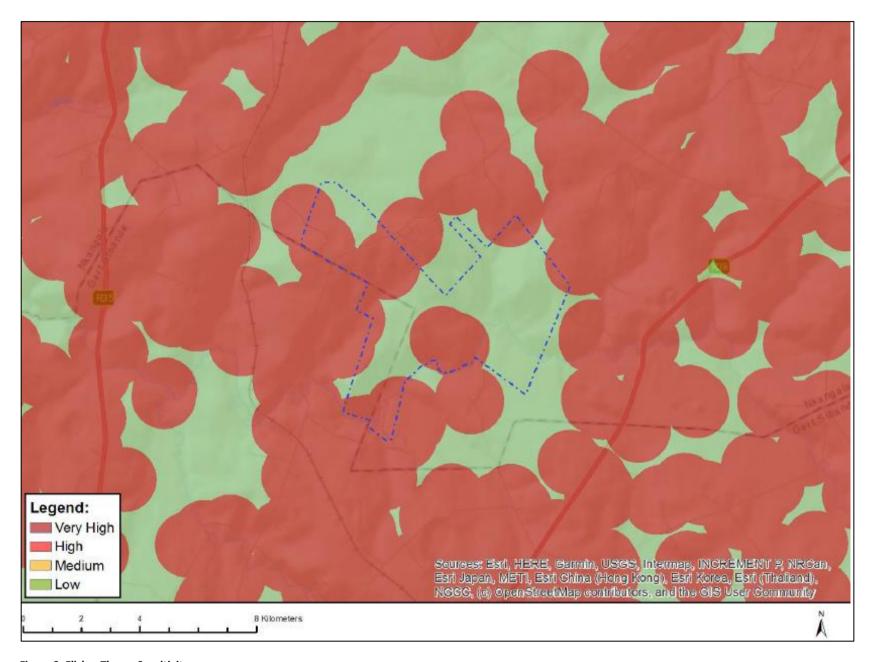


Figure 9: Flicker Theme Sensitivity

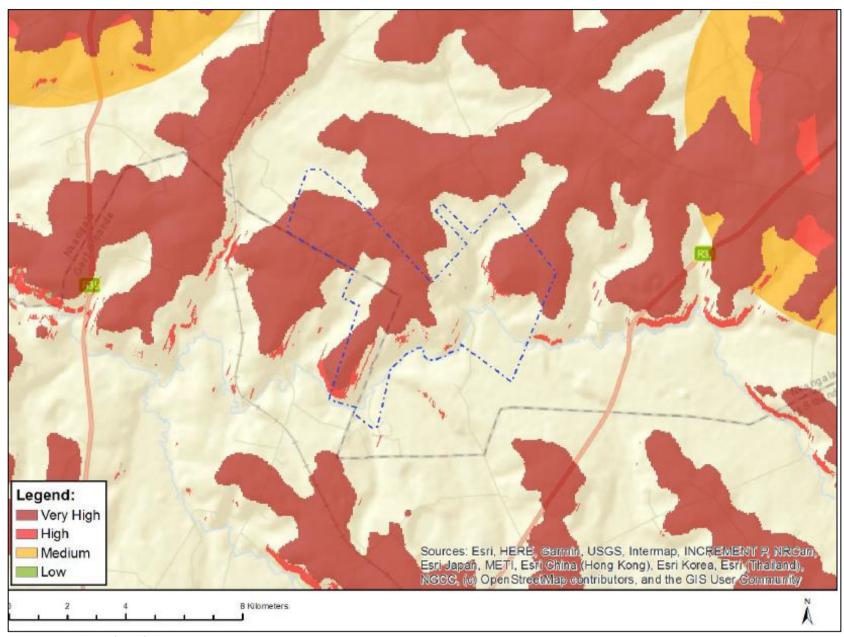


Figure 10: Landscape (Wind) Theme sensitivity

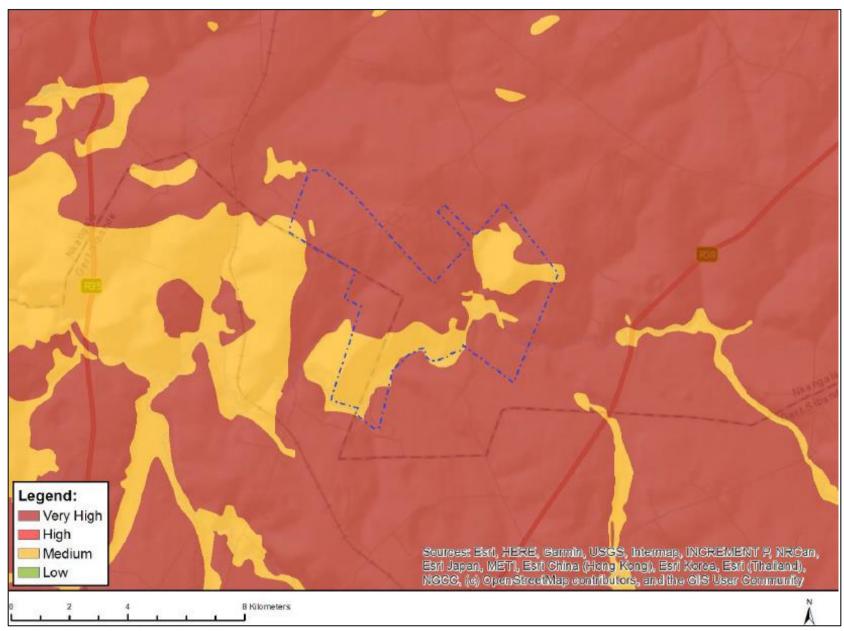


Figure 11: Palaeontology Theme sensitivity

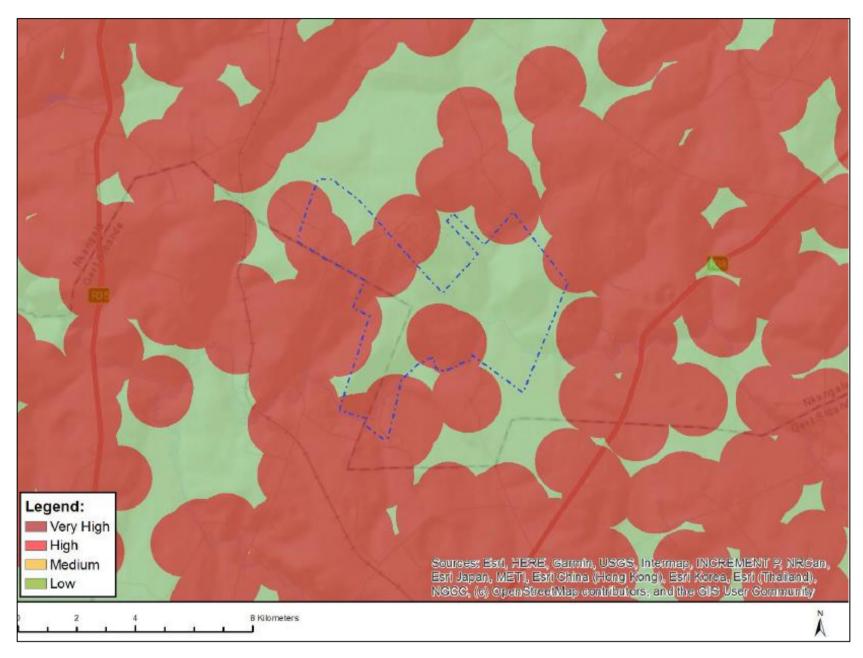


Figure 12: Noise Theme sensitivity

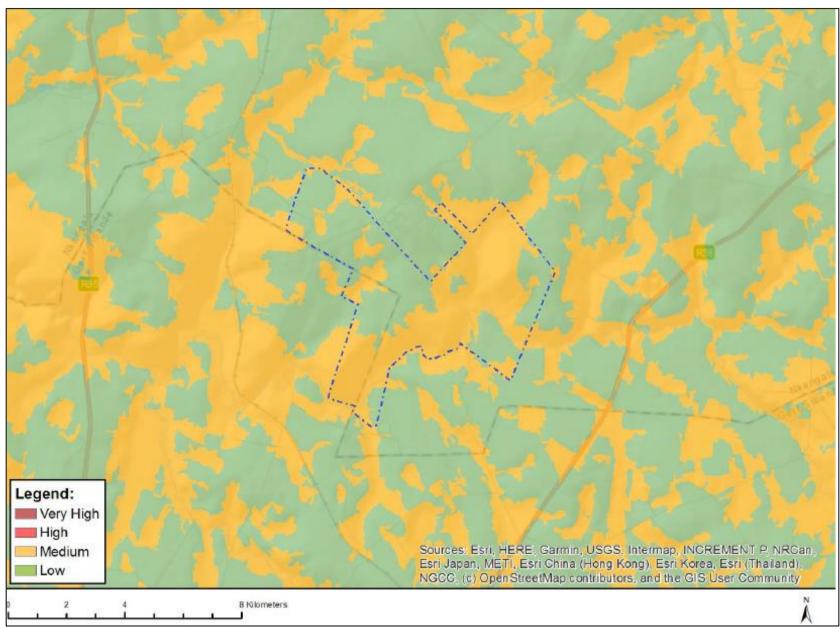


Figure 13: Plant species theme sensitivity

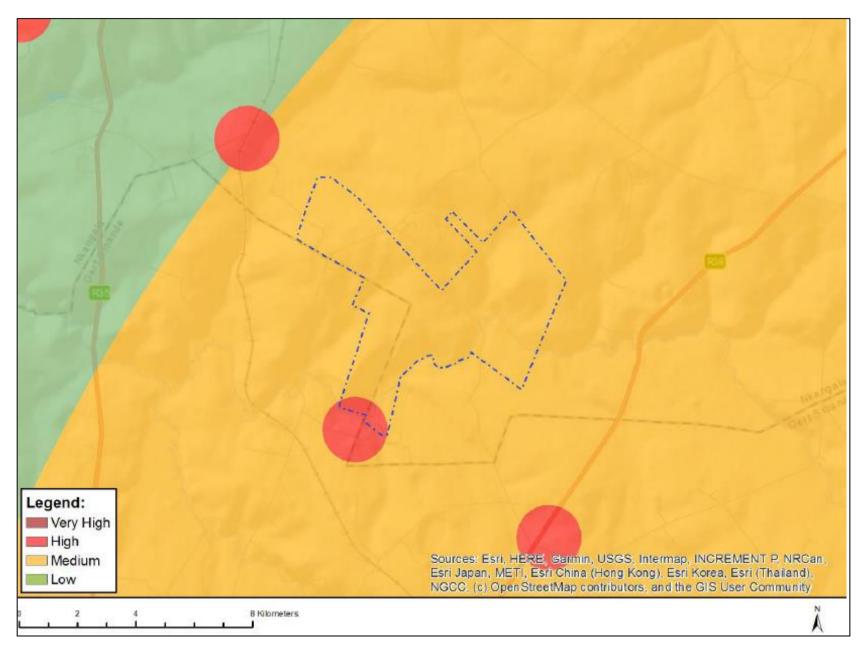


Figure 14: RFI (Wind) species theme sensitivity

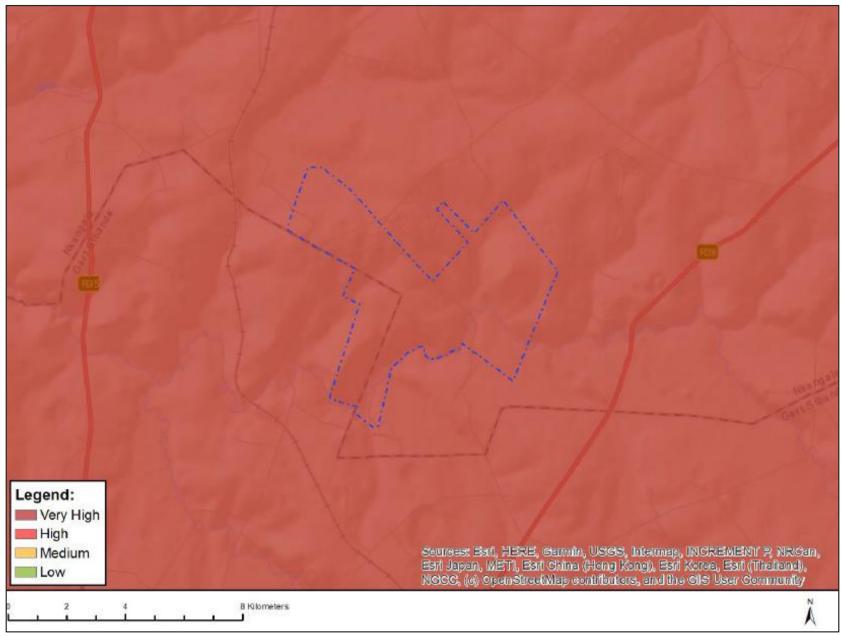


Figure 15: Terrestrial Biodiversity Theme

7.3 Sub-section 3: Declaration

The proponent/applicant or holder of the EA affirms that he/she will abide and comply with the prescribed impact management outcomes and impact management actions as stipulated in part B: section 1 of the generic EMPr and have the understanding that the impact management outcomes and impact management actions are legally binding. The proponent/applicant or holder of the EA affirms that he/she will provide written notice to the CA 14 day prior to the date on which the activity will commence of commencement of construction to facilitate compliance inspections.

Signature Proponent/applicant/ holder of EA	Date:
Note: will be completed as part of contractual arrangements with EPC, if Project is preferred bidder	

7.4 Sub-section 4: amendments to site specific information (Part B; section 2)

Should the EA be transferred to a new holder, <u>Part B: Section 2</u> must be completed by the new holder and submitted with the application for an amendment of the EA in terms of Regulations

29 or 31 of the EIA Regulations, whichever applies. The information submitted for an amendment to an environmental authorisation will be considered to be incomplete should a signed copy of <u>Part B: Section 2</u> not be submitted. Once approved, <u>Part B: Section 2</u> forms part of the EMPr for the development and the EMPr becomes legally binding to the new EA holder.

PART C

8 SITE SPECIFIC ENVIRONMENTAL ATTRIBUTES

If any specific environmental sensitivities/attributes are present on the site which require more specific impact management outcomes and actions, not included in the pre-approved generic EMPr template, to manage impacts, those impact management outcomes and impact management actions must be included in this section. These specific management controls must be referenced spatially, and must include impact management outcomes and impact management actions. The management controls including impact management outcomes and impact management actions must be presented in the format of the preapproved generic EMPr template. This applies only to additional impact management outcomes and impact management actions that are necessary. If Part C is applicable to the development as authorised in the EA, it is required to be submitted to the CA together with the BAR or EIAR, for consideration of, and decision on, the application for EA. The information in this section must be prepared by an EAP and the name and expertise of the EAP, including the curriculum vitae are to be included. Once approved, Part C forms part of the EMPr for the site and is legally binding. This section will not be required should the site contain no specific environmental sensitivities or attributes.

The IPP Substation associated with the proposed Project is not located on an area that contains any specific environmental sensitivities or attributes, as confirmed through the specialist studies undertaken for the Project.

APPENDIX 1: METHOD STATEMENTS

To be prepared by the contractor prior to commencement of the activity. The method statements are **not required** to be submitted to the CA.