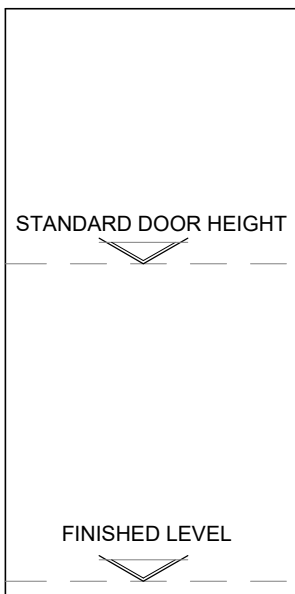
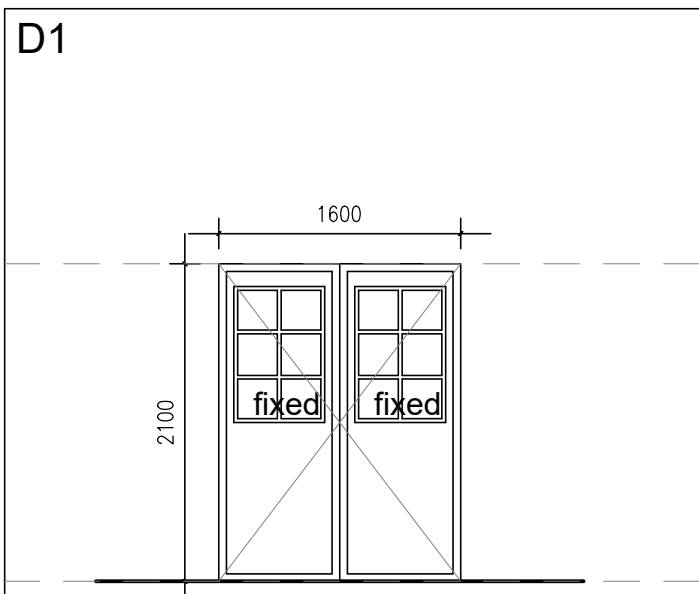
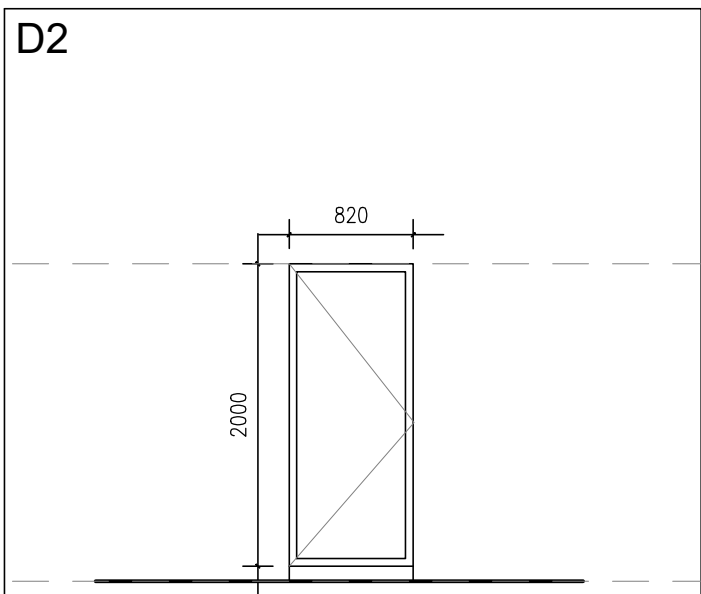
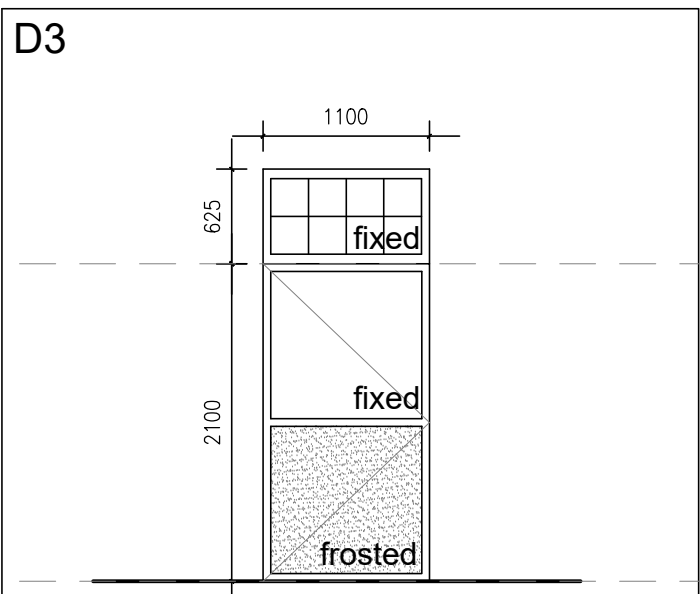
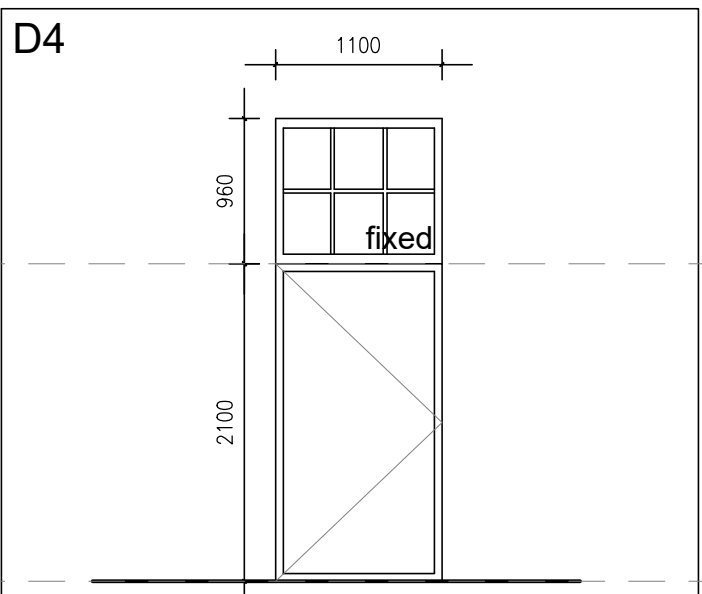
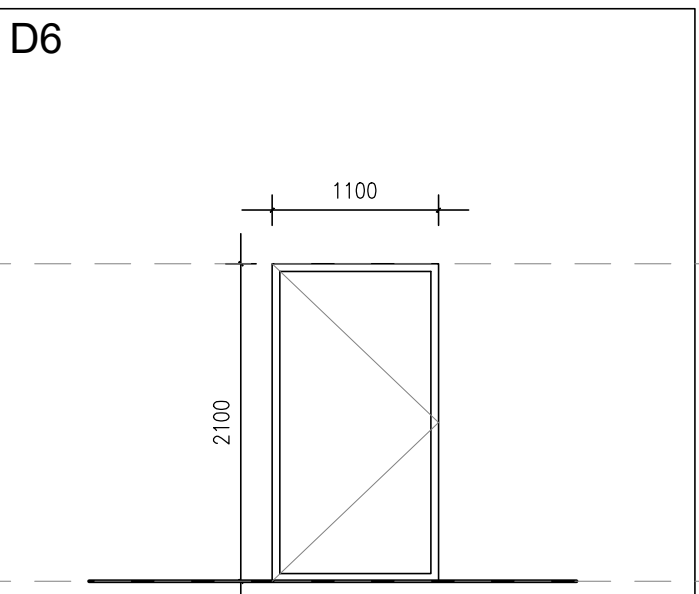
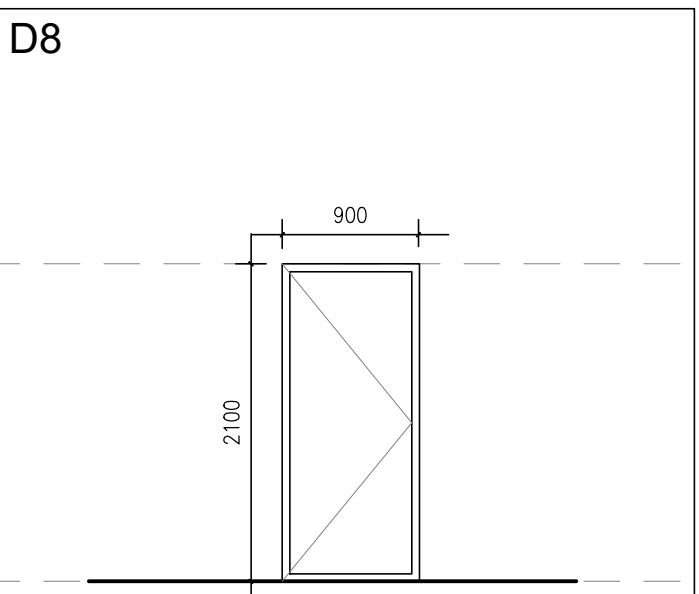
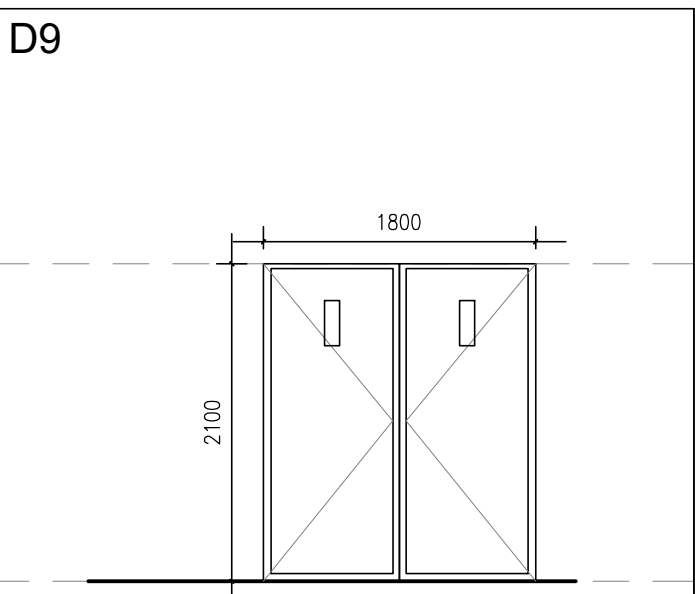
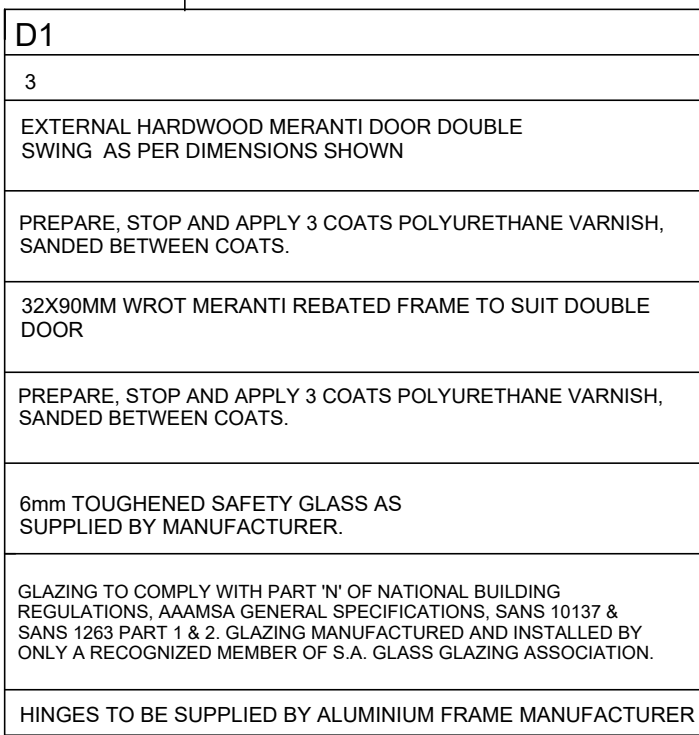
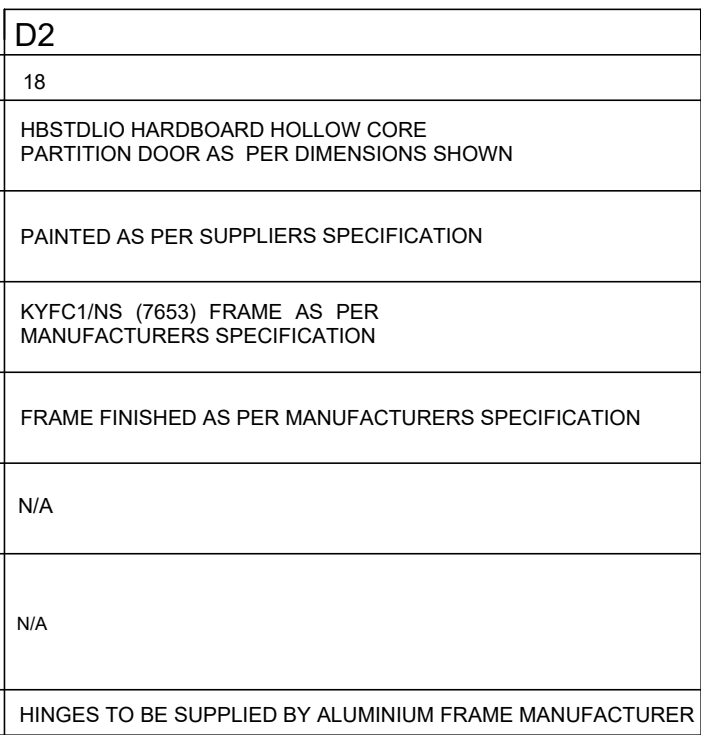
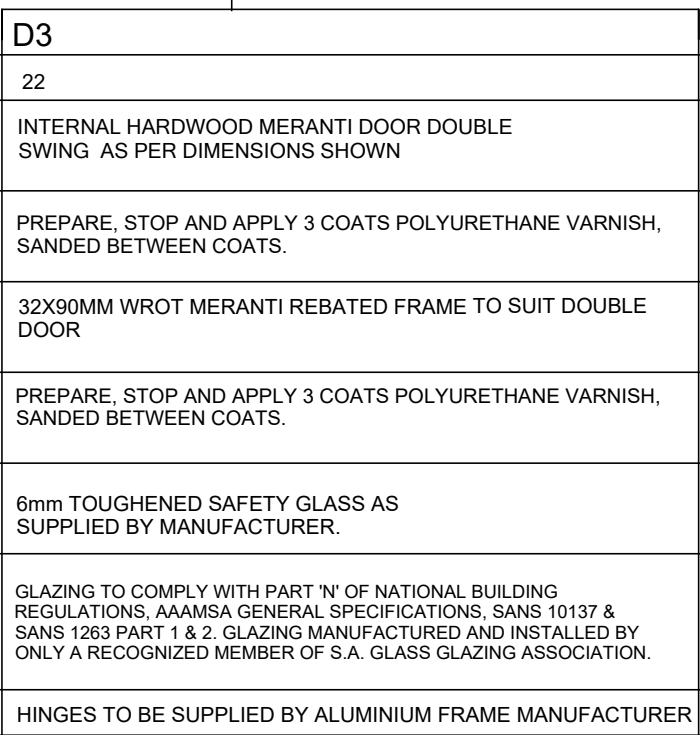
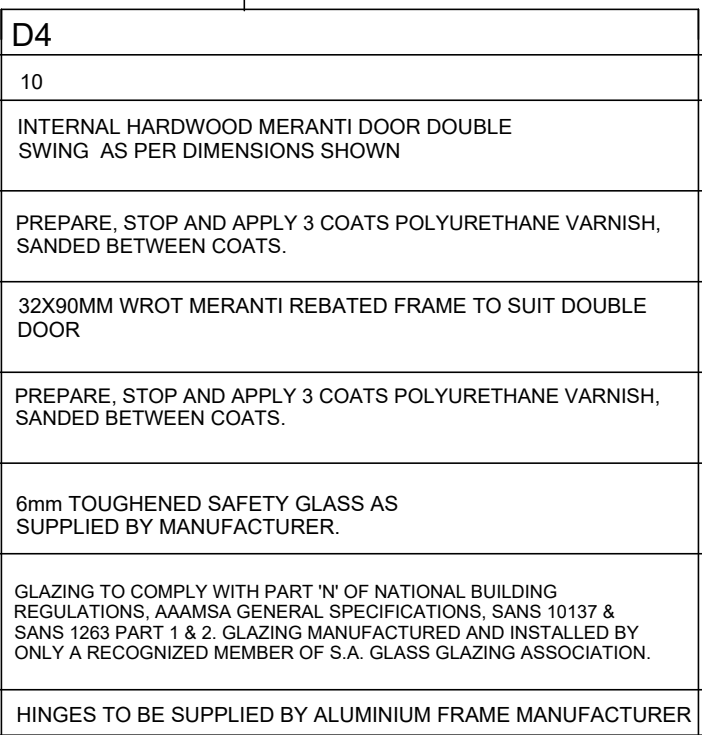
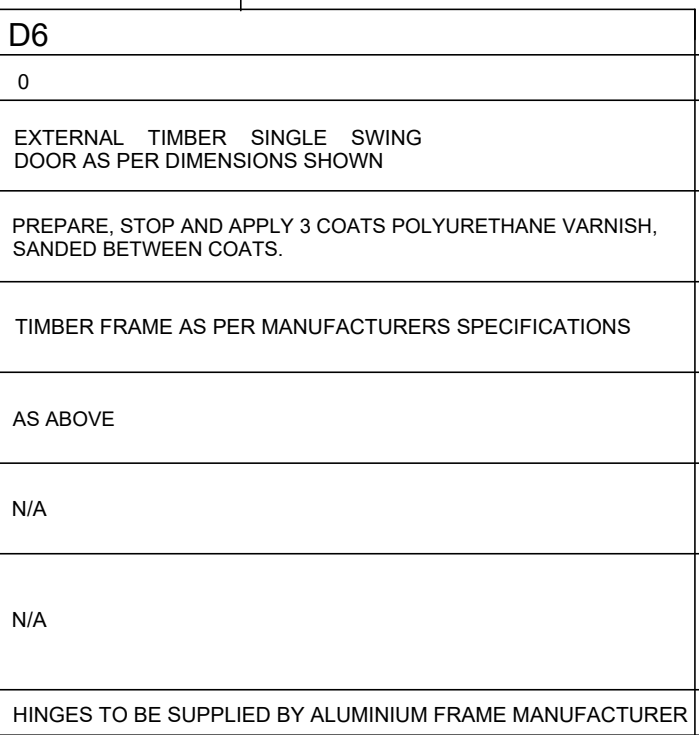
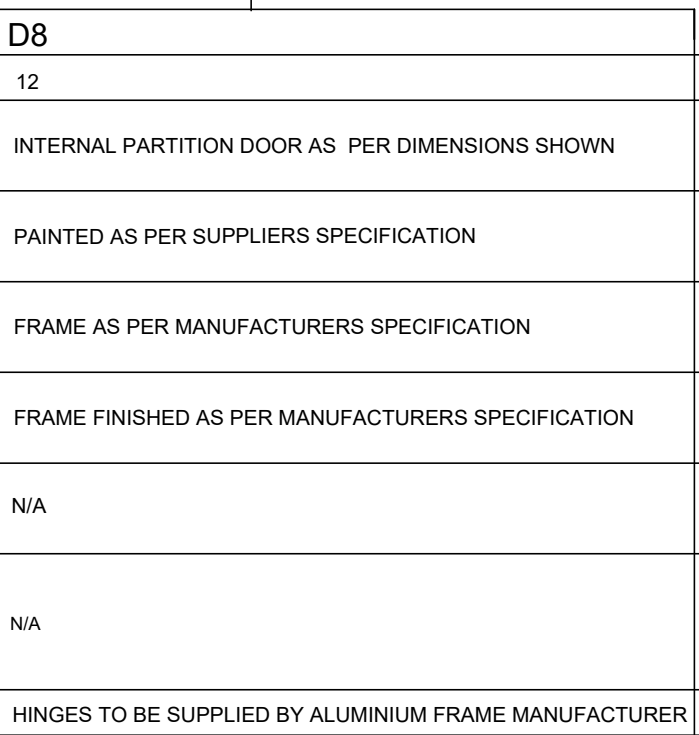
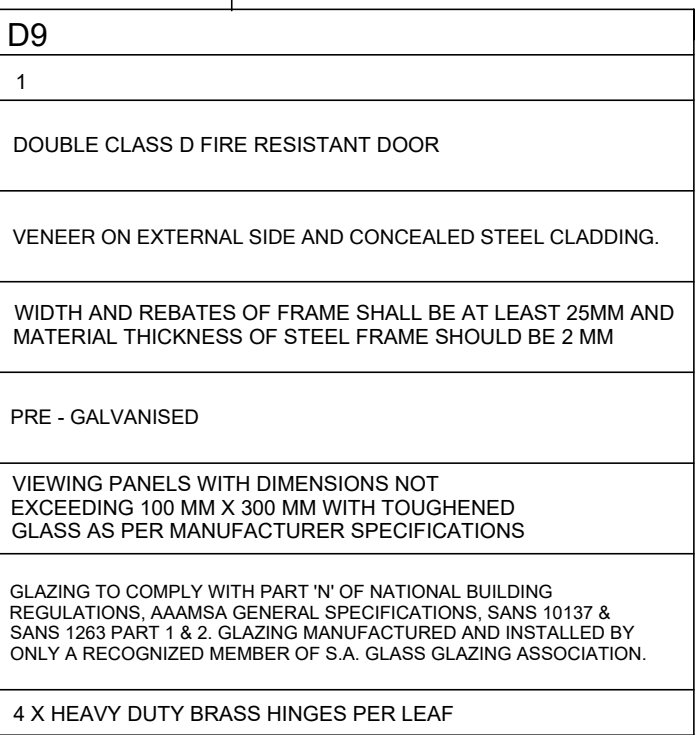
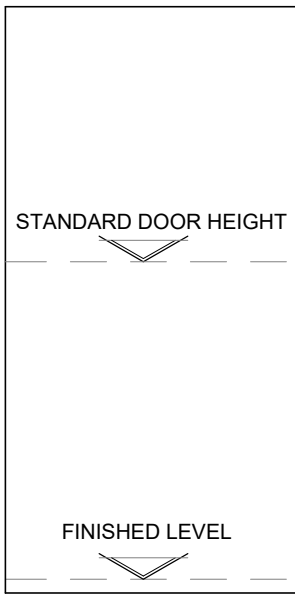
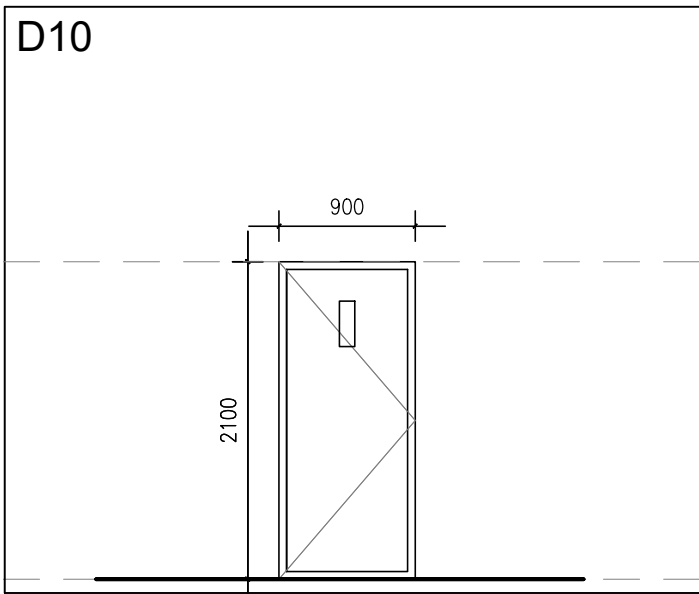
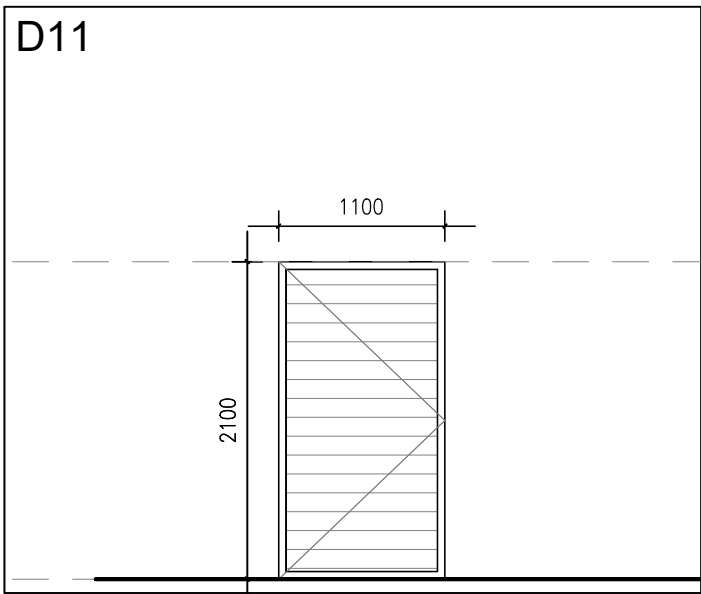
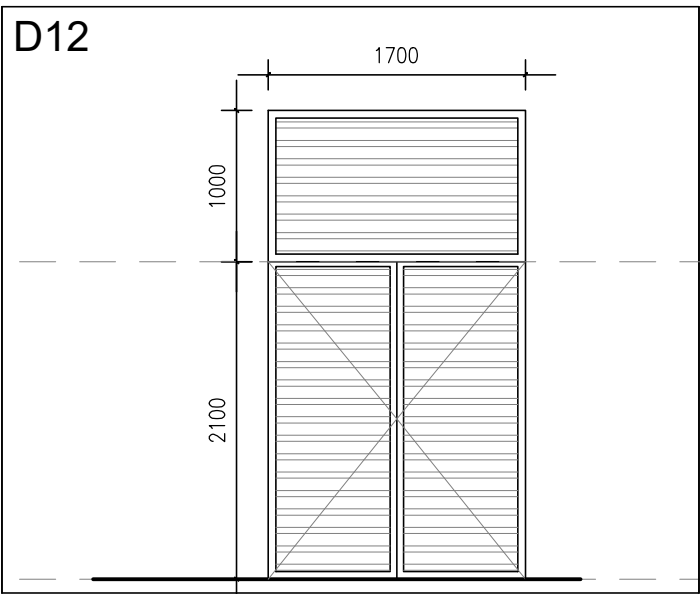
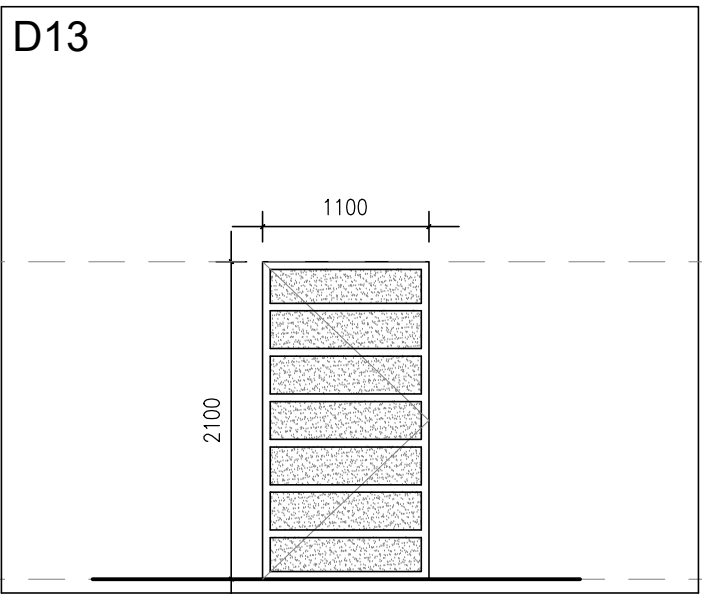
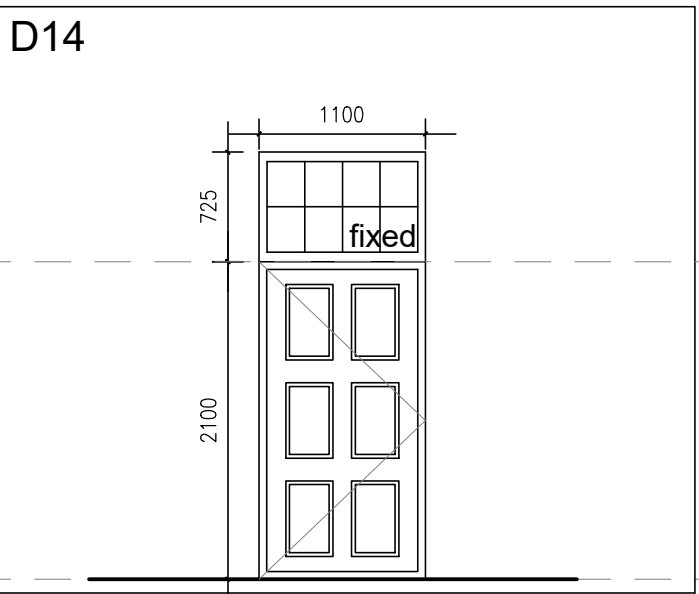
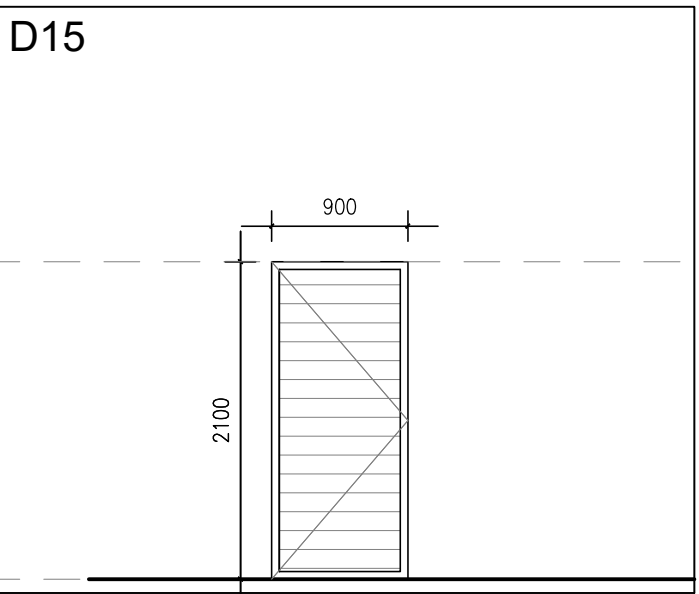
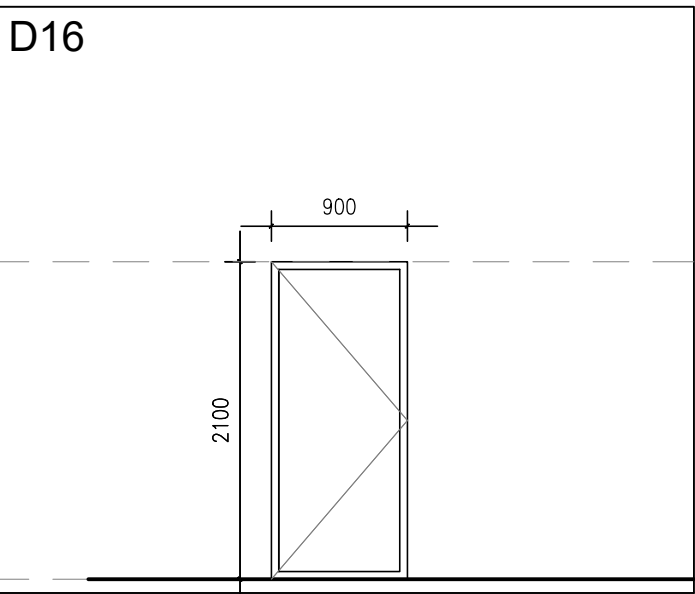
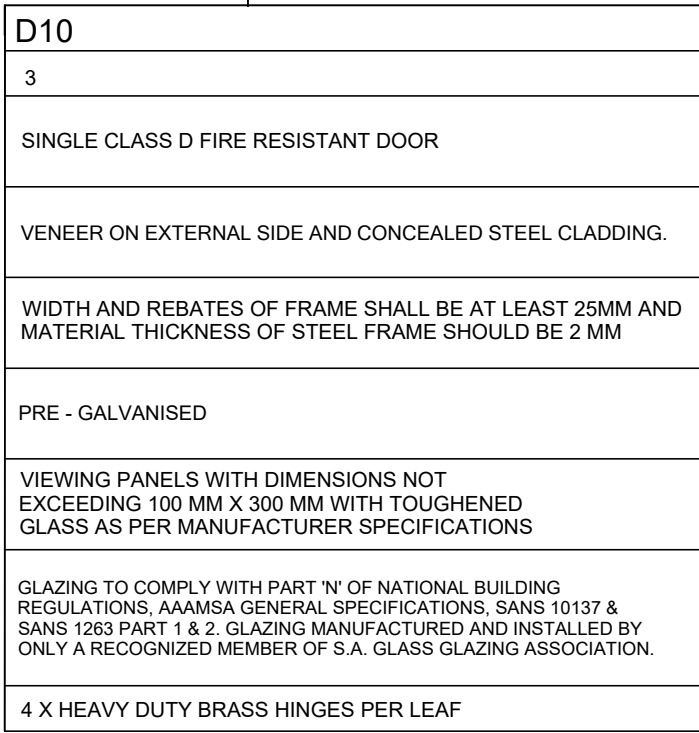
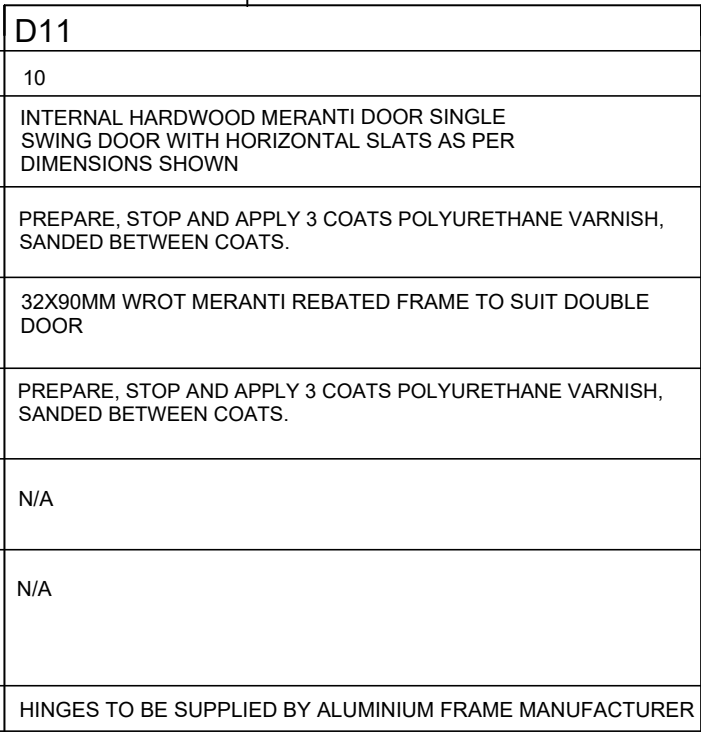
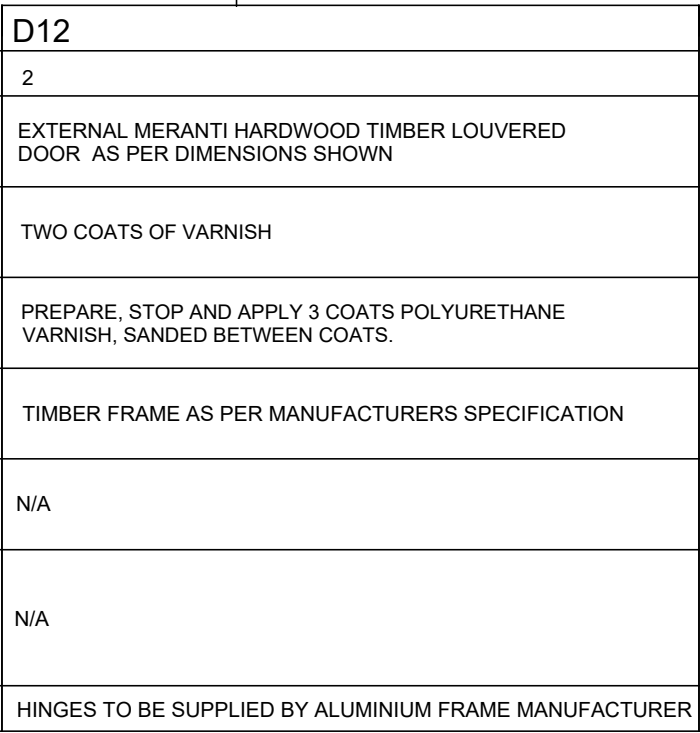
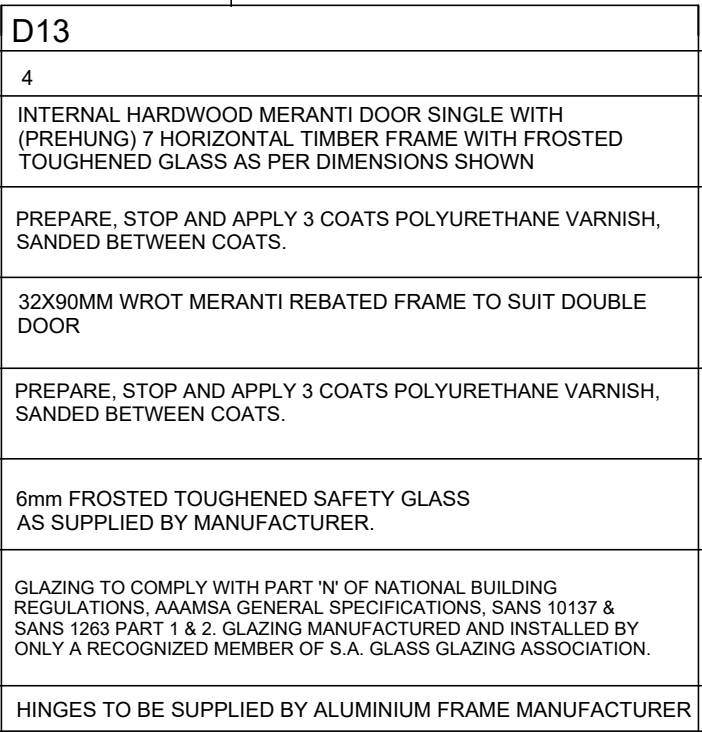
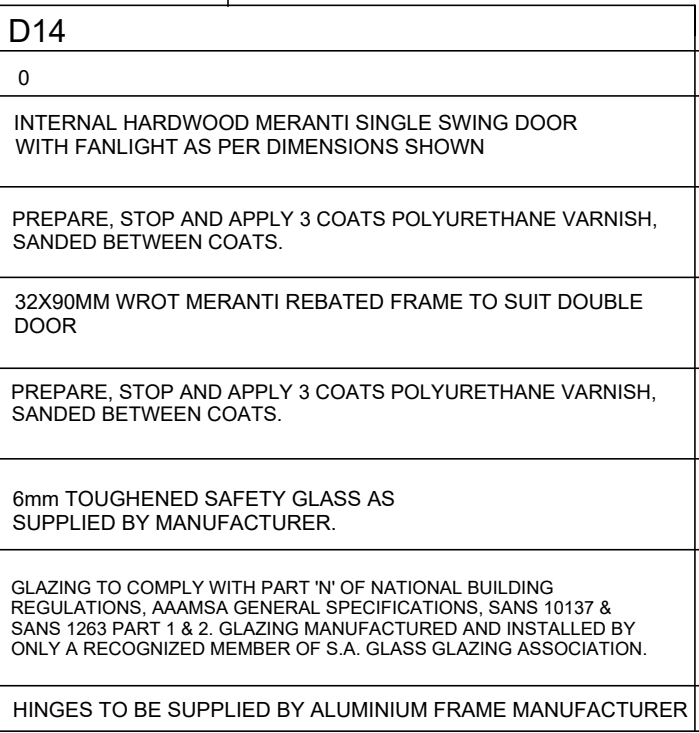
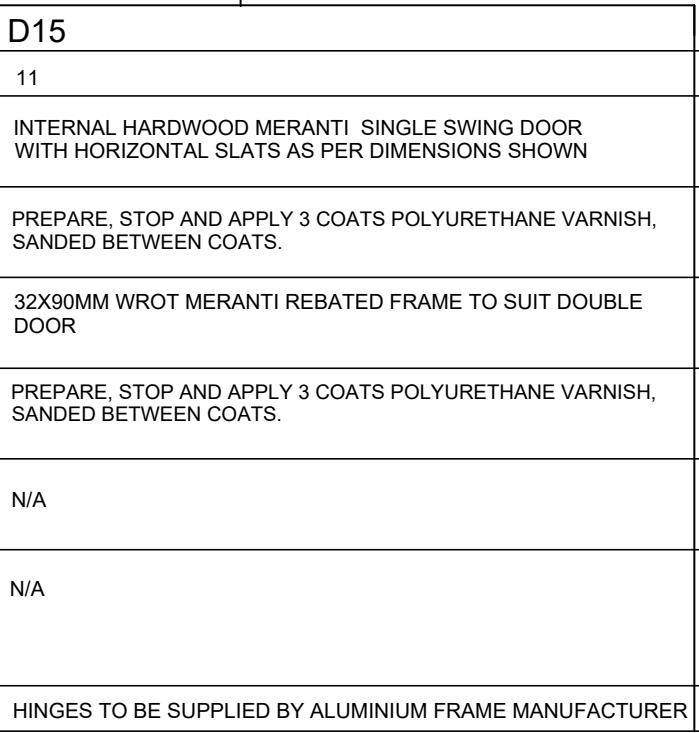
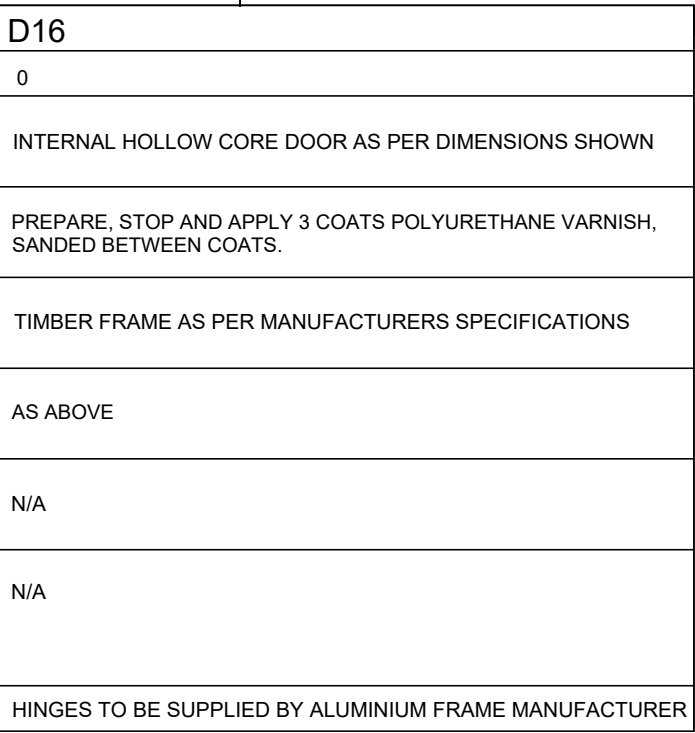
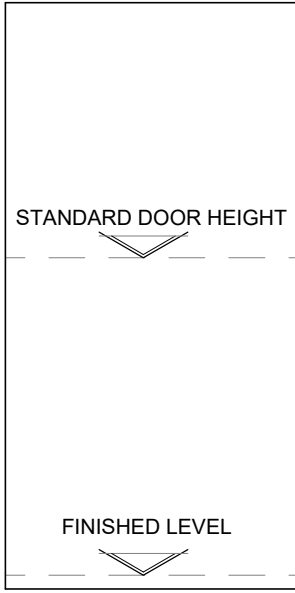
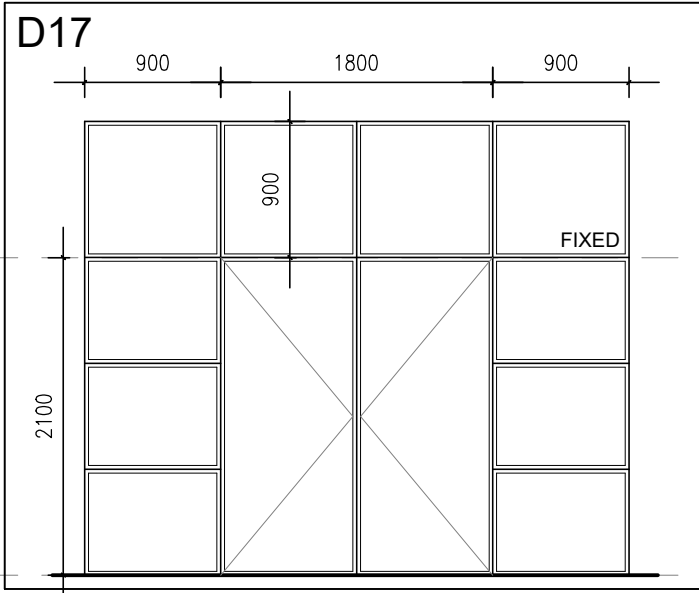
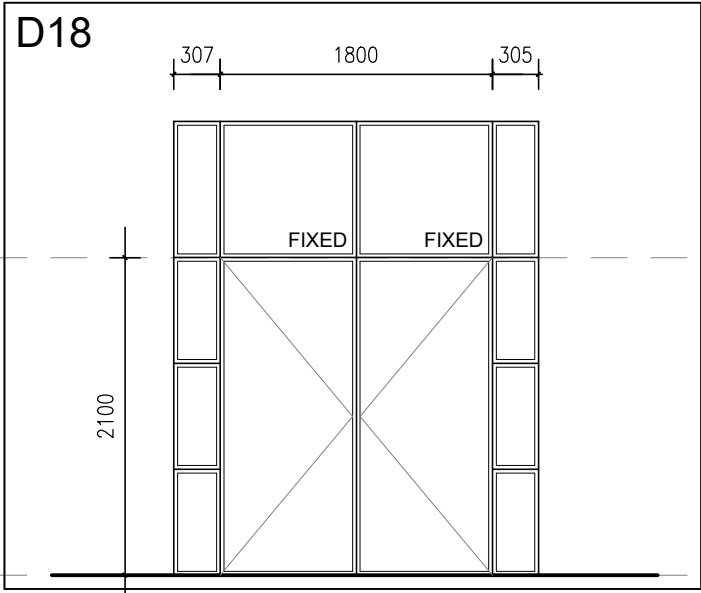
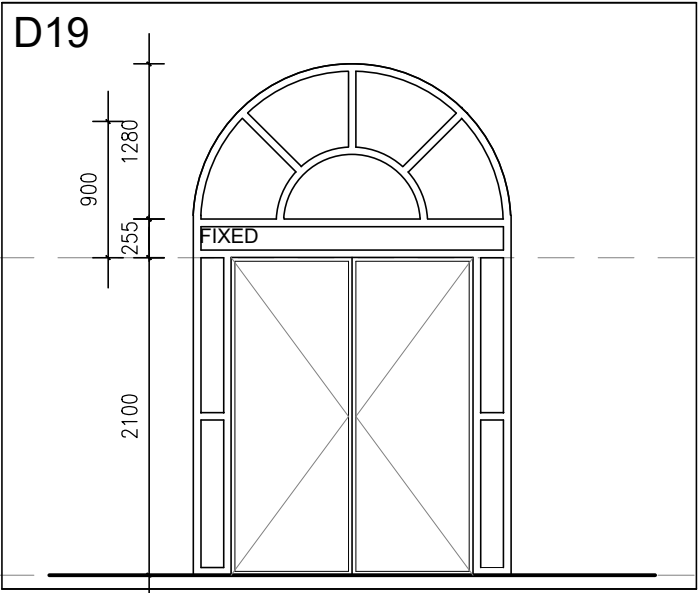
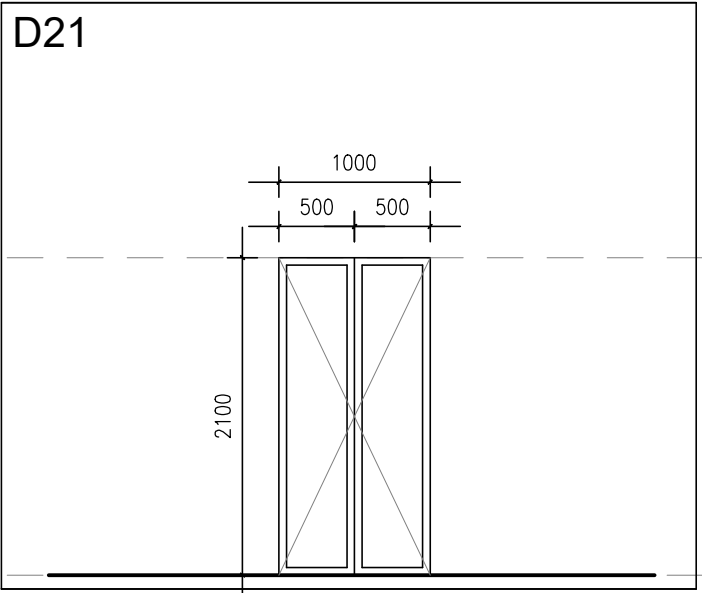
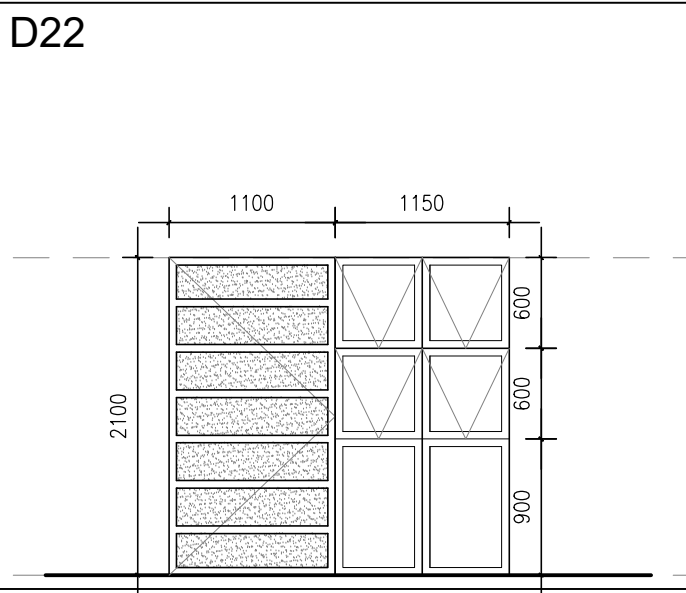
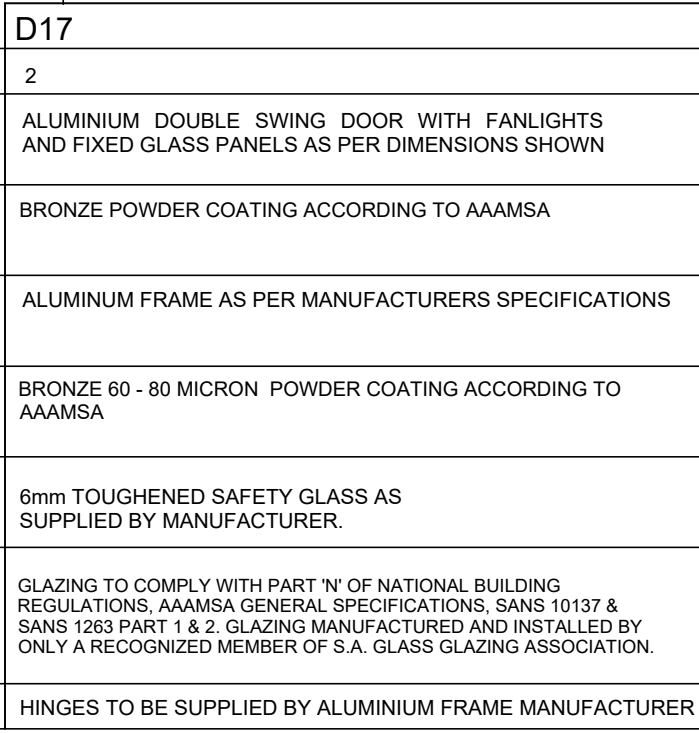
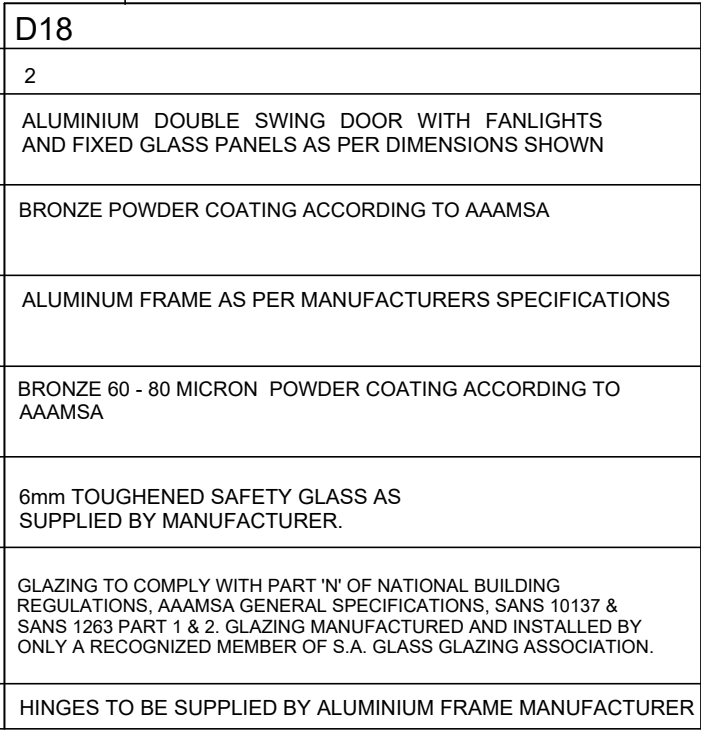
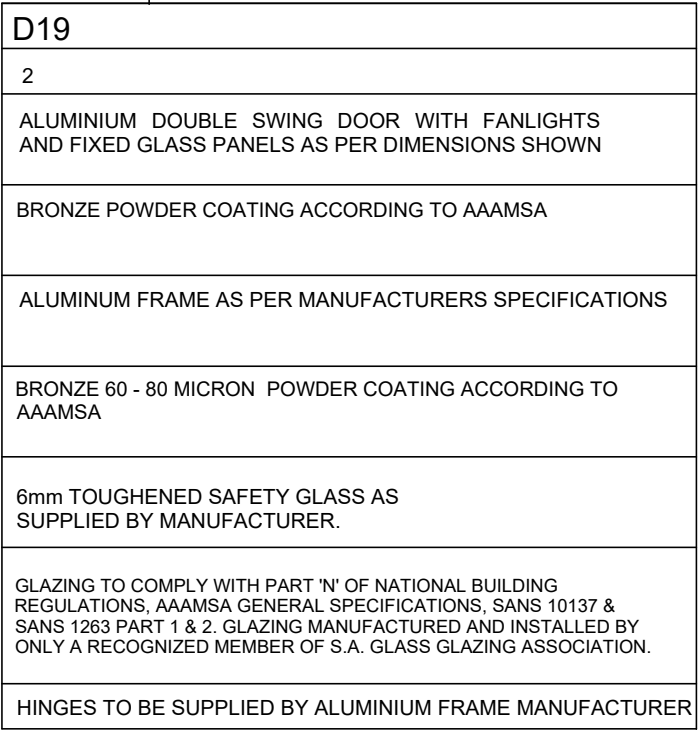
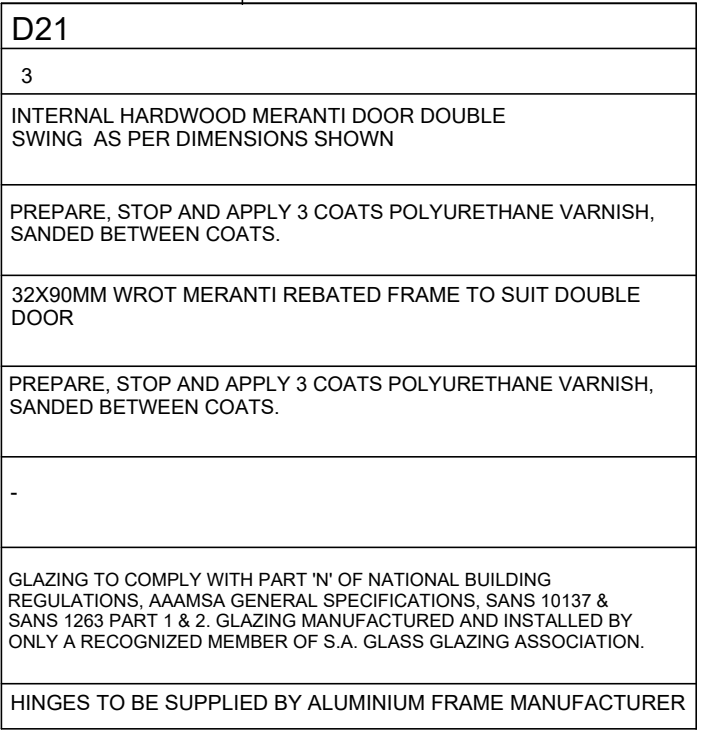
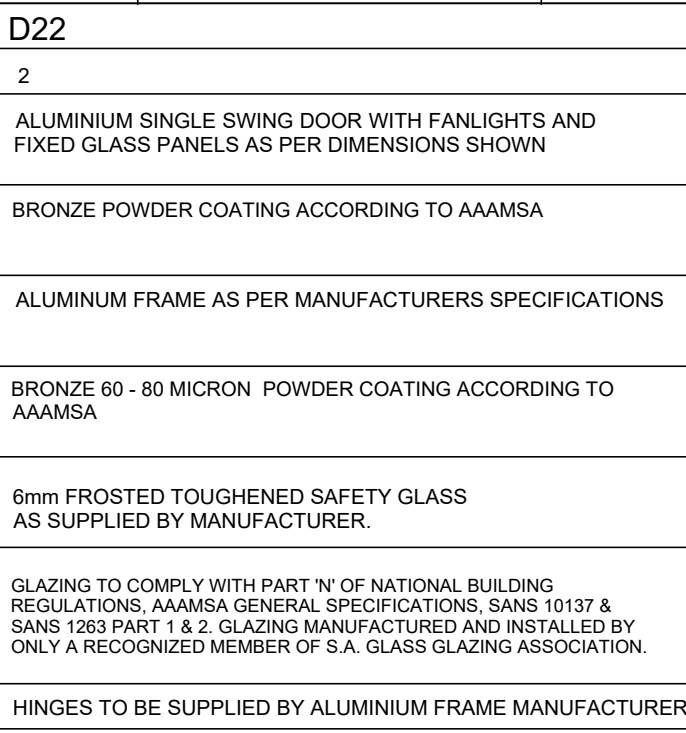


DOOR SCHEDULE

DETAIL DESIGN

| | | | | | | | |
|--|---|---|---|---|---|---|---|
|  |  |  |  |  |  |  |  |
| |  |  |  |  |  |  |  |
| DOOR NUMBER | D1 | D2 | D3 | D4 | D6 | D8 | D9 |
| QUANTITY | 3 | 18 | 22 | 10 | 0 | 12 | 1 |
| DOOR DESCRIPTION | EXTERNAL HARDWOOD MERANTI DOOR DOUBLE SWING AS PER DIMENSIONS SHOWN | HBSTDLO HARDBOARD HOLLOW CORE PARTITION DOOR AS PER DIMENSIONS SHOWN | INTERNAL HARDWOOD MERANTI DOOR DOUBLE SWING AS PER DIMENSIONS SHOWN | INTERNAL HARDWOOD MERANTI DOOR DOUBLE SWING AS PER DIMENSIONS SHOWN | EXTERNAL TIMBER SINGLE SWING DOOR AS PER DIMENSIONS SHOWN | INTERNAL PARTITION DOOR AS PER DIMENSIONS SHOWN | DOUBLE CLASS D FIRE RESISTANT DOOR |
| DOOR FINISH | PREPARE, STOP AND APPLY 3 COATS POLYURETHANE VARNISH, SANDED BETWEEN COATS. | PAINTED AS PER SUPPLIERS SPECIFICATION | PREPARE, STOP AND APPLY 3 COATS POLYURETHANE VARNISH, SANDED BETWEEN COATS. | PREPARE, STOP AND APPLY 3 COATS POLYURETHANE VARNISH, SANDED BETWEEN COATS. | PREPARE, STOP AND APPLY 3 COATS POLYURETHANE VARNISH, SANDED BETWEEN COATS. | PAINTED AS PER SUPPLIERS SPECIFICATION | VENEER ON EXTERNAL SIDE AND CONCEALED STEEL CLADDING. |
| FRAME | 32X90MM WROT MERANTI REBATED FRAME TO SUIT DOUBLE DOOR | KYFC1NS (7653) FRAME AS PER MANUFACTURERS SPECIFICATION | 32X90MM WROT MERANTI REBATED FRAME TO SUIT DOUBLE DOOR | 32X90MM WROT MERANTI REBATED FRAME TO SUIT DOUBLE DOOR | TIMBER FRAME AS PER MANUFACTURERS SPECIFICATIONS | FRAME AS PER MANUFACTURERS SPECIFICATION | WIDTH AND REBATES OF FRAME SHALL BE AT LEAST 25MM AND MATERIAL THICKNESS OF STEEL FRAME SHOULD BE 2 MM |
| FRAME FINISH | PREPARE, STOP AND APPLY 3 COATS POLYURETHANE VARNISH, SANDED BETWEEN COATS. | FRAME FINISHED AS PER MANUFACTURERS SPECIFICATION | PREPARE, STOP AND APPLY 3 COATS POLYURETHANE VARNISH, SANDED BETWEEN COATS. | PREPARE, STOP AND APPLY 3 COATS POLYURETHANE VARNISH, SANDED BETWEEN COATS. | AS ABOVE | FRAME FINISHED AS PER MANUFACTURERS SPECIFICATION | PRE - GALVANISED |
| GLASS | 6mm TOUGHENED SAFETY GLASS AS SUPPLIED BY MANUFACTURER. | N/A | 6mm TOUGHENED SAFETY GLASS AS SUPPLIED BY MANUFACTURER. | 6mm TOUGHENED SAFETY GLASS AS SUPPLIED BY MANUFACTURER. | N/A | N/A | VIEWING PANELS WITH DIMENSIONS NOT EXCEEDING 100 MM X 300 MM WITH TOUGHENED GLASS AS PER MANUFACTURER SPECIFICATIONS |
| GLAZING | GLAZING TO COMPLY WITH PART 'N' OF NATIONAL BUILDING REGULATIONS, AAAMSA GENERAL SPECIFICATIONS, SANS 10137 & SANS 1263 PART 1 & 2. GLAZING MANUFACTURED AND INSTALLED BY ONLY A RECOGNIZED MEMBER OF S.A. GLASS GLAZING ASSOCIATION. | N/A | GLAZING TO COMPLY WITH PART 'N' OF NATIONAL BUILDING REGULATIONS, AAAMSA GENERAL SPECIFICATIONS, SANS 10137 & SANS 1263 PART 1 & 2. GLAZING MANUFACTURED AND INSTALLED BY ONLY A RECOGNIZED MEMBER OF S.A. GLASS GLAZING ASSOCIATION. | GLAZING TO COMPLY WITH PART 'N' OF NATIONAL BUILDING REGULATIONS, AAAMSA GENERAL SPECIFICATIONS, SANS 10137 & SANS 1263 PART 1 & 2. GLAZING MANUFACTURED AND INSTALLED BY ONLY A RECOGNIZED MEMBER OF S.A. GLASS GLAZING ASSOCIATION. | N/A | N/A | GLAZING TO COMPLY WITH PART 'N' OF NATIONAL BUILDING REGULATIONS, AAAMSA GENERAL SPECIFICATIONS, SANS 10137 & SANS 1263 PART 1 & 2. GLAZING MANUFACTURED AND INSTALLED BY ONLY A RECOGNIZED MEMBER OF S.A. GLASS GLAZING ASSOCIATION. |
| FURNITURE | HINGES TO BE SUPPLIED BY ALUMINIUM FRAME MANUFACTURER | HINGES TO BE SUPPLIED BY ALUMINIUM FRAME MANUFACTURER | HINGES TO BE SUPPLIED BY ALUMINIUM FRAME MANUFACTURER | HINGES TO BE SUPPLIED BY ALUMINIUM FRAME MANUFACTURER | HINGES TO BE SUPPLIED BY ALUMINIUM FRAME MANUFACTURER | HINGES TO BE SUPPLIED BY ALUMINIUM FRAME MANUFACTURER | 4 X HEAVY DUTY BRASS HINGES PER LEAF |

| | | | | | | | |
|---|---|--|--|---|---|---|---|
|  |  |  |  |  |  |  |  |
| |  |  |  |  |  |  |  |
| DOOR NUMBER | D10 | D11 | D12 | D13 | D14 | D15 | D16 |
| QUANTITY | 3 | 10 | 2 | 4 | 0 | 11 | 0 |
| DOOR DESCRIPTION | SINGLE CLASS D FIRE RESISTANT DOOR | INTERNAL HARDWOOD MERANTI DOOR SINGLE SWING DOOR WITH HORIZONTAL SLATS AS PER DIMENSIONS SHOWN | EXTERNAL MERANTI HARDWOOD TIMBER LOUVERED DOOR AS PER DIMENSIONS SHOWN | INTERNAL HARDWOOD MERANTI DOOR SINGLE WITH (PREHUNG) 7 HORIZONTAL TIMBER FRAME WITH FROSTED TOUGHENED GLASS AS PER DIMENSIONS SHOWN | INTERNAL HARDWOOD MERANTI SINGLE SWING DOOR WITH FANLIGHT AS PER DIMENSIONS SHOWN | INTERNAL HARDWOOD MERANTI SINGLE SWING DOOR WITH HORIZONTAL SLATS AS PER DIMENSIONS SHOWN | INTERNAL HOLLOW CORE DOOR AS PER DIMENSIONS SHOWN |
| DOOR FINISH | VENEER ON EXTERNAL SIDE AND CONCEALED STEEL CLADDING. | PREPARE, STOP AND APPLY 3 COATS POLYURETHANE VARNISH, SANDED BETWEEN COATS. | TWO COATS OF VARNISH | PREPARE, STOP AND APPLY 3 COATS POLYURETHANE VARNISH, SANDED BETWEEN COATS. | PREPARE, STOP AND APPLY 3 COATS POLYURETHANE VARNISH, SANDED BETWEEN COATS. | PREPARE, STOP AND APPLY 3 COATS POLYURETHANE VARNISH, SANDED BETWEEN COATS. | PREPARE, STOP AND APPLY 3 COATS POLYURETHANE VARNISH, SANDED BETWEEN COATS. |
| FRAME | WIDTH AND REBATES OF FRAME SHALL BE AT LEAST 25MM AND MATERIAL THICKNESS OF STEEL FRAME SHOULD BE 2 MM | 32X90MM WROT MERANTI REBATED FRAME TO SUIT DOUBLE DOOR | PREPARE, STOP AND APPLY 3 COATS POLYURETHANE VARNISH, SANDED BETWEEN COATS. | 32X90MM WROT MERANTI REBATED FRAME TO SUIT DOUBLE DOOR | 32X90MM WROT MERANTI REBATED FRAME TO SUIT DOUBLE DOOR | 32X90MM WROT MERANTI REBATED FRAME TO SUIT DOUBLE DOOR | TIMBER FRAME AS PER MANUFACTURERS SPECIFICATIONS |
| FRAME FINISH | PRE - GALVANISED | PREPARE, STOP AND APPLY 3 COATS POLYURETHANE VARNISH, SANDED BETWEEN COATS. | TIMBER FRAME AS PER MANUFACTURERS SPECIFICATION | PREPARE, STOP AND APPLY 3 COATS POLYURETHANE VARNISH, SANDED BETWEEN COATS. | PREPARE, STOP AND APPLY 3 COATS POLYURETHANE VARNISH, SANDED BETWEEN COATS. | PREPARE, STOP AND APPLY 3 COATS POLYURETHANE VARNISH, SANDED BETWEEN COATS. | AS ABOVE |
| GLASS | VIEWING PANELS WITH DIMENSIONS NOT EXCEEDING 100 MM X 300 MM WITH TOUGHENED GLASS AS PER MANUFACTURER SPECIFICATIONS | N/A | N/A | 6mm FROSTED TOUGHENED SAFETY GLASS AS SUPPLIED BY MANUFACTURER. | 6mm TOUGHENED SAFETY GLASS AS SUPPLIED BY MANUFACTURER. | N/A | N/A |
| GLAZING | GLAZING TO COMPLY WITH PART 'N' OF NATIONAL BUILDING REGULATIONS, AAAMSA GENERAL SPECIFICATIONS, SANS 10137 & SANS 1263 PART 1 & 2. GLAZING MANUFACTURED AND INSTALLED BY ONLY A RECOGNIZED MEMBER OF S.A. GLASS GLAZING ASSOCIATION. | N/A | N/A | GLAZING TO COMPLY WITH PART 'N' OF NATIONAL BUILDING REGULATIONS, AAAMSA GENERAL SPECIFICATIONS, SANS 10137 & SANS 1263 PART 1 & 2. GLAZING MANUFACTURED AND INSTALLED BY ONLY A RECOGNIZED MEMBER OF S.A. GLASS GLAZING ASSOCIATION. | GLAZING TO COMPLY WITH PART 'N' OF NATIONAL BUILDING REGULATIONS, AAAMSA GENERAL SPECIFICATIONS, SANS 10137 & SANS 1263 PART 1 & 2. GLAZING MANUFACTURED AND INSTALLED BY ONLY A RECOGNIZED MEMBER OF S.A. GLASS GLAZING ASSOCIATION. | N/A | N/A |
| FURNITURE | 4 X HEAVY DUTY BRASS HINGES PER LEAF | HINGES TO BE SUPPLIED BY ALUMINIUM FRAME MANUFACTURER | HINGES TO BE SUPPLIED BY ALUMINIUM FRAME MANUFACTURER | HINGES TO BE SUPPLIED BY ALUMINIUM FRAME MANUFACTURER | HINGES TO BE SUPPLIED BY ALUMINIUM FRAME MANUFACTURER | HINGES TO BE SUPPLIED BY ALUMINIUM FRAME MANUFACTURER | HINGES TO BE SUPPLIED BY ALUMINIUM FRAME MANUFACTURER |

| | | | | | |
|--|---|---|---|---|---|
|  |  |  |  |  |  |
| |  |  |  |  |  |
| DOOR NUMBER | D17 | D18 | D19 | D21 | D22 |
| QUANTITY | 2 | 2 | 2 | 3 | 2 |
| DOOR DESCRIPTION | ALUMINIUM DOUBLE SWING DOOR WITH FANLIGHTS AND FIXED GLASS PANELS AS PER DIMENSIONS SHOWN | ALUMINIUM DOUBLE SWING DOOR WITH FANLIGHTS AND FIXED GLASS PANELS AS PER DIMENSIONS SHOWN | ALUMINIUM DOUBLE SWING DOOR WITH FANLIGHTS AND FIXED GLASS PANELS AS PER DIMENSIONS SHOWN | INTERNAL HARDWOOD MERANTI DOOR DOUBLE SWING AS PER DIMENSIONS SHOWN | ALUMINIUM SINGLE SWING DOOR WITH FANLIGHTS AND FIXED GLASS PANELS AS PER DIMENSIONS SHOWN |
| DOOR FINISH | BRONZE POWDER COATING ACCORDING TO AAAMSA | BRONZE POWDER COATING ACCORDING TO AAAMSA | BRONZE POWDER COATING ACCORDING TO AAAMSA | PREPARE, STOP AND APPLY 3 COATS POLYURETHANE VARNISH, SANDED BETWEEN COATS. | BRONZE POWDER COATING ACCORDING TO AAAMSA |
| FRAME | ALUMINIUM FRAME AS PER MANUFACTURERS SPECIFICATIONS | ALUMINIUM FRAME AS PER MANUFACTURERS SPECIFICATIONS | ALUMINIUM FRAME AS PER MANUFACTURERS SPECIFICATIONS | 32X90MM WROT MERANTI REBATED FRAME TO SUIT DOUBLE DOOR | ALUMINIUM FRAME AS PER MANUFACTURERS SPECIFICATIONS |
| FRAME FINISH | BRONZE 60 - 80 MICRON POWDER COATING ACCORDING TO AAAMSA | BRONZE 60 - 80 MICRON POWDER COATING ACCORDING TO AAAMSA | BRONZE 60 - 80 MICRON POWDER COATING ACCORDING TO AAAMSA | PREPARE, STOP AND APPLY 3 COATS POLYURETHANE VARNISH, SANDED BETWEEN COATS. | BRONZE 60 - 80 MICRON POWDER COATING ACCORDING TO AAAMSA |
| GLASS | 6mm TOUGHENED SAFETY GLASS AS SUPPLIED BY MANUFACTURER. | 6mm TOUGHENED SAFETY GLASS AS SUPPLIED BY MANUFACTURER. | 6mm TOUGHENED SAFETY GLASS AS SUPPLIED BY MANUFACTURER. | - | 6mm FROSTED TOUGHENED SAFETY GLASS AS SUPPLIED BY MANUFACTURER. |
| GLAZING | GLAZING TO COMPLY WITH PART 'N' OF NATIONAL BUILDING REGULATIONS, AAAMSA GENERAL SPECIFICATIONS, SANS 10137 & SANS 1263 PART 1 & 2. GLAZING MANUFACTURED AND INSTALLED BY ONLY A RECOGNIZED MEMBER OF S.A. GLASS GLAZING ASSOCIATION. | GLAZING TO COMPLY WITH PART 'N' OF NATIONAL BUILDING REGULATIONS, AAAMSA GENERAL SPECIFICATIONS, SANS 10137 & SANS 1263 PART 1 & 2. GLAZING MANUFACTURED AND INSTALLED BY ONLY A RECOGNIZED MEMBER OF S.A. GLASS GLAZING ASSOCIATION. | GLAZING TO COMPLY WITH PART 'N' OF NATIONAL BUILDING REGULATIONS, AAAMSA GENERAL SPECIFICATIONS, SANS 10137 & SANS 1263 PART 1 & 2. GLAZING MANUFACTURED AND INSTALLED BY ONLY A RECOGNIZED MEMBER OF S.A. GLASS GLAZING ASSOCIATION. | GLAZING TO COMPLY WITH PART 'N' OF NATIONAL BUILDING REGULATIONS, AAAMSA GENERAL SPECIFICATIONS, SANS 10137 & SANS 1263 PART 1 & 2. GLAZING MANUFACTURED AND INSTALLED BY ONLY A RECOGNIZED MEMBER OF S.A. GLASS GLAZING ASSOCIATION. | GLAZING TO COMPLY WITH PART 'N' OF NATIONAL BUILDING REGULATIONS, AAAMSA GENERAL SPECIFICATIONS, SANS 10137 & SANS 1263 PART 1 & 2. GLAZING MANUFACTURED AND INSTALLED BY ONLY A RECOGNIZED MEMBER OF S.A. GLASS GLAZING ASSOCIATION. |
| FURNITURE | HINGES TO BE SUPPLIED BY ALUMINIUM FRAME MANUFACTURER | HINGES TO BE SUPPLIED BY ALUMINIUM FRAME MANUFACTURER | HINGES TO BE SUPPLIED BY ALUMINIUM FRAME MANUFACTURER | HINGES TO BE SUPPLIED BY ALUMINIUM FRAME MANUFACTURER | HINGES TO BE SUPPLIED BY ALUMINIUM FRAME MANUFACTURER |

NOTE: ALL DOORS THAT ARE BEING REMOVED AND REPLACED ARE TO BE REPLACED WITH TIMBER DOORS ALL NEW DOORS THAT ARE PROPOSED ARE TO BE ALUMINIUM

| REVISION STATUS | | | | |
|-----------------|------------|---|----|---------|
| Rev. | Date | Description | By | Checked |
| 01 | 23.08.2022 | D19 revised | PP | RJM |
| 05 | 06.04.2023 | revised as per client and team comments | PP | RJM |

GENERAL NOTES:

- CHECK ALL DIMENSIONS AND LEVELS BEFORE COMMENCING ANY WORK.
- DO NOT SCALE FROM THE DRAWINGS.
- ANY QUERIES TO BE BROUGHT TO THE ARCHITECT'S ATTENTION.
- ALL STRUCTURAL STEEL, CONCRETE STRENGTH AND TIMBER SPECIFICATION ARE TO BE IN ACCORDANCE WITH ENGINEER'S DETAILS.
- DRAWINGS FOR INFORMATION PURPOSES ONLY

CLIENT
The Department of Public Works
455A Jan Smuts Highway
Mayville
Durban
4001
Tel: 060 554 3053
Email: ngobile.cele@kznworks.gov.za



PRINCIPAL AGENT AND ARCHITECTS
RMA Architects
346 Che Guevara Road
Glenwood
Durban
4001
Tel: 031 201 5173
E-mail: nishara.rma@gmail.com



QUANTITY SURVEYOR
LDM QUANTITY SURVEYORS
21 W Riding Road
Sherwood
Durban
4001
Tel: 031 207 1340
Email: khwela@ldm.co.za



ELECTRICAL ENGINEER
Matla Consulting Engineers
11 Sinemba Crescent
Somerset Park
Umhlanga
4051
Tel: 031 566 2800
Email: deon@matlaeng.com



STRUCTURAL AND CIVIL ENGINEERS
Dartingo Consulting Engineers
64 Underwood Road
Hutton Estate
Pinetown
3610
Tel: 031 266 0903
Email: premesh@dartingo.co.za



MECHANICAL ENGINEER
Muteo Consulting
39 Grobler Street
Polokwane
0750
Tel: 012 664 6577
Email: arinaon@muteo.co.za



PROJECT NAME: MLB BUILDING
ROOF REPLACEMENT AND RENOVATIONS TO THE MLB BUILDING

ERF NO : ERF 106 OF DURBAN & 107 OF DURBAN

DRAWING TITLE: DOOR SCHEDULE

| | | | |
|--------------|----------------|-----------|---------|
| DRAWN BY | PP | | |
| CHECKED BY | NS/TRW | | |
| DATE | 30 AUGUST 2022 | | |
| LATEST ISSUE | 06 APRIL 2023 | | |
| SCALE | AS SHOWN | | |
| PROJECT: | | DWG NO. | REV NO. |
| MLB BUILDING | | MLB.DD.16 | R.05 |