



1:100 GROUND STOREY PLAN

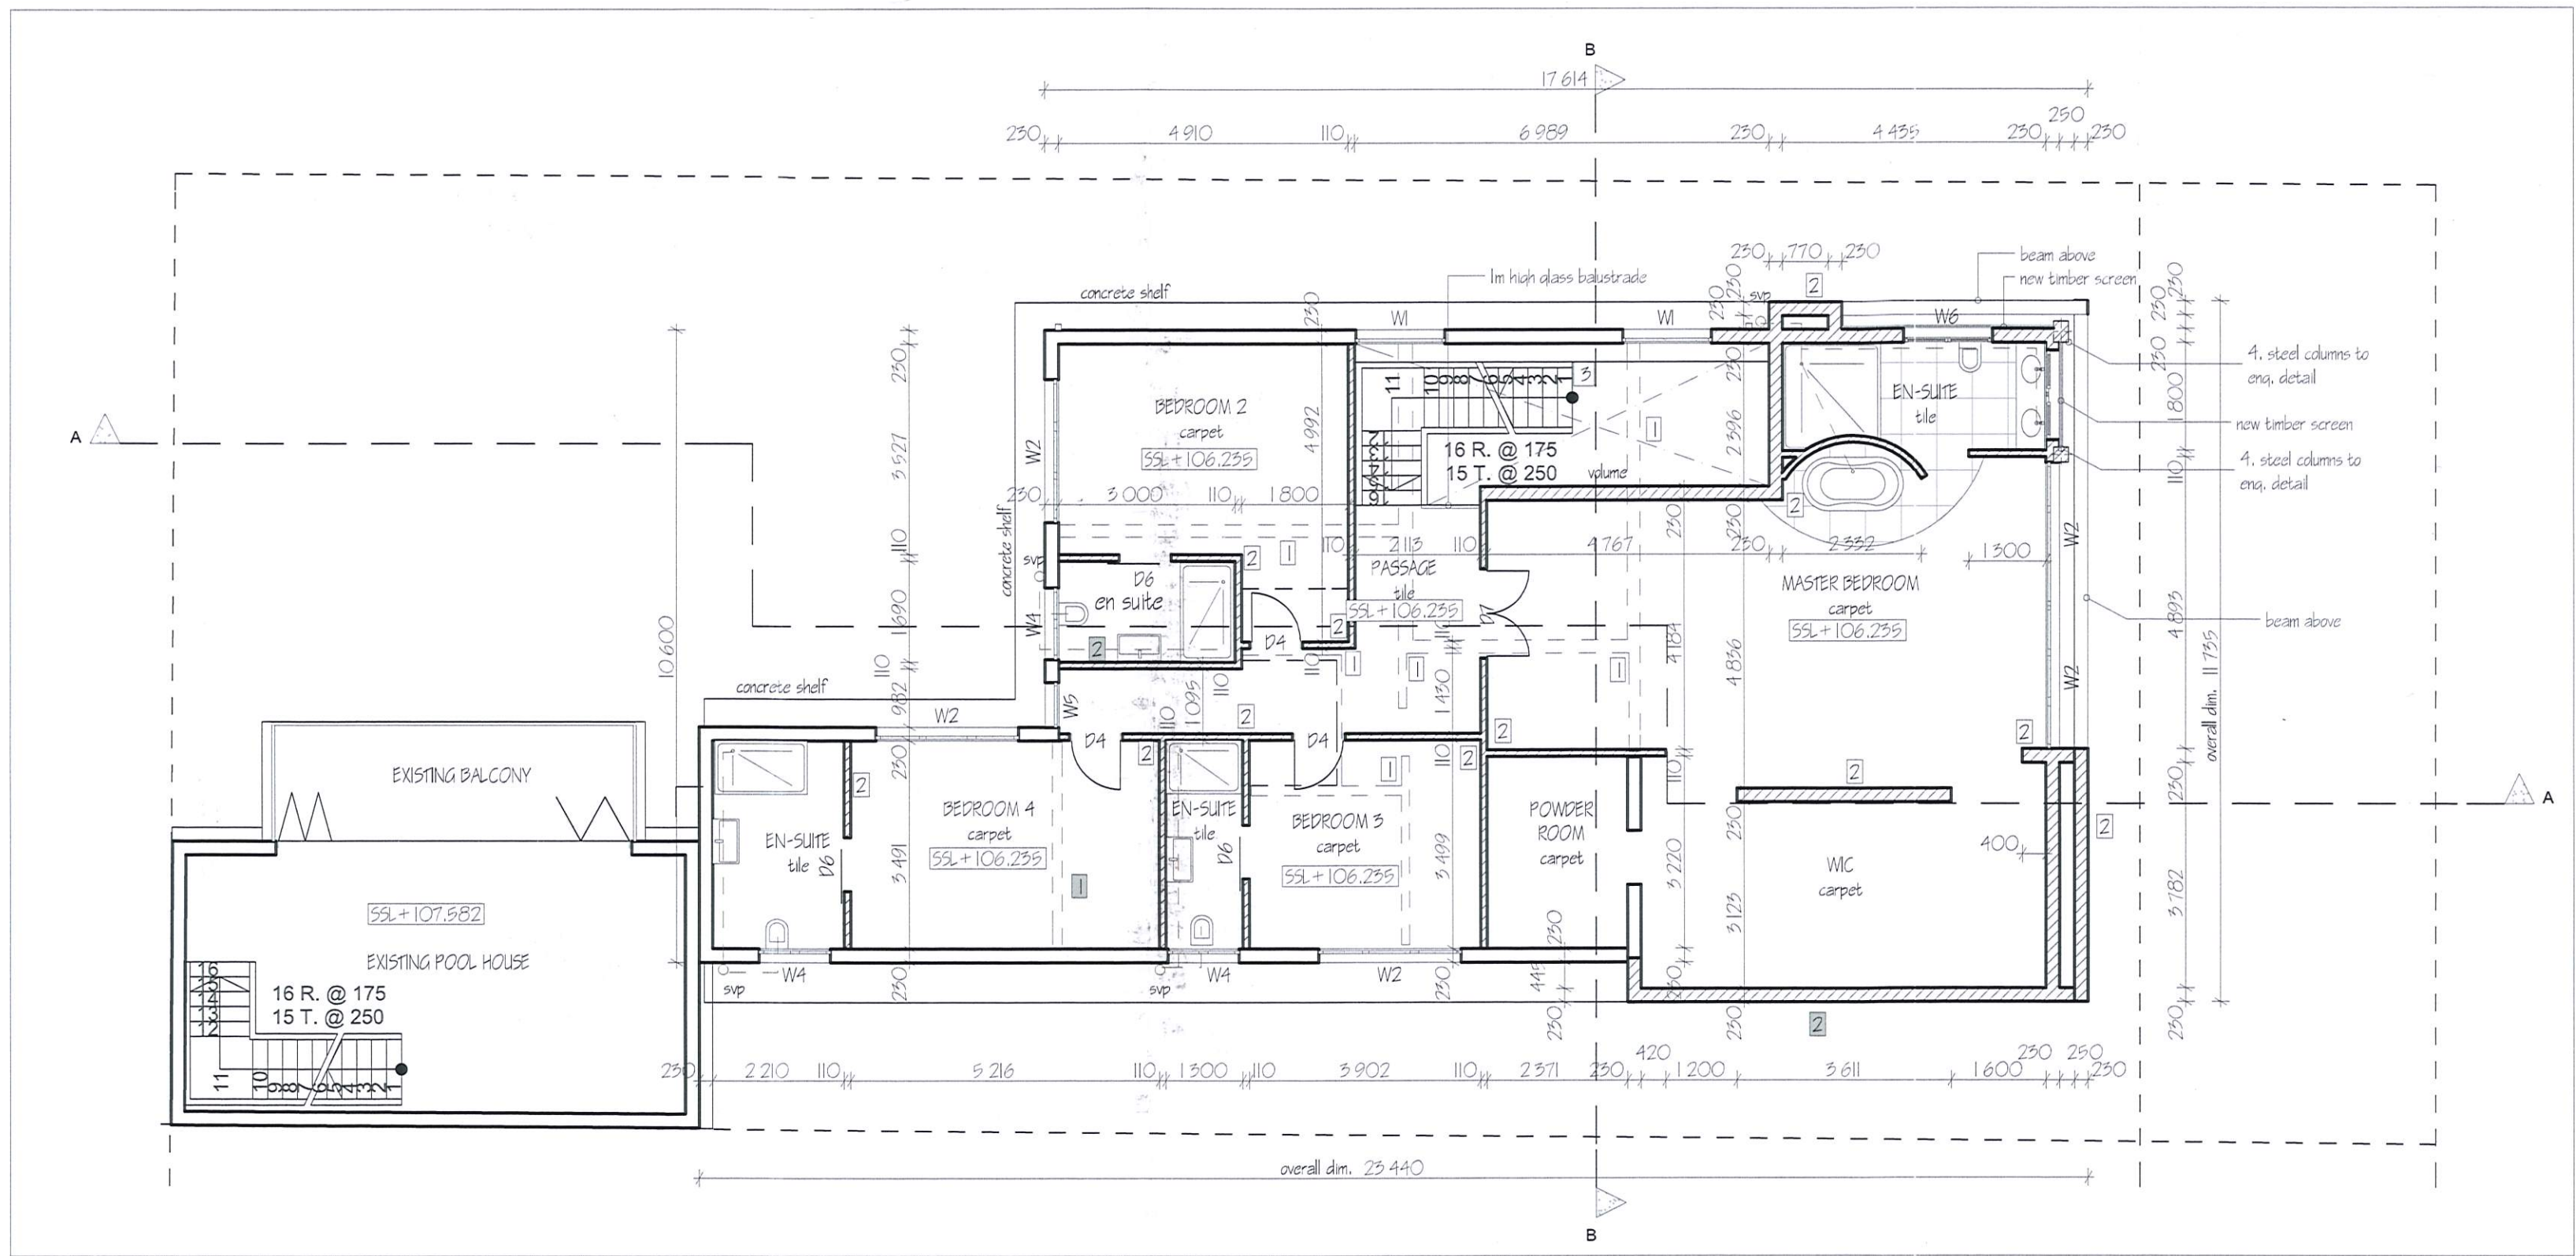

1:100 FIRST STOREY PLAN

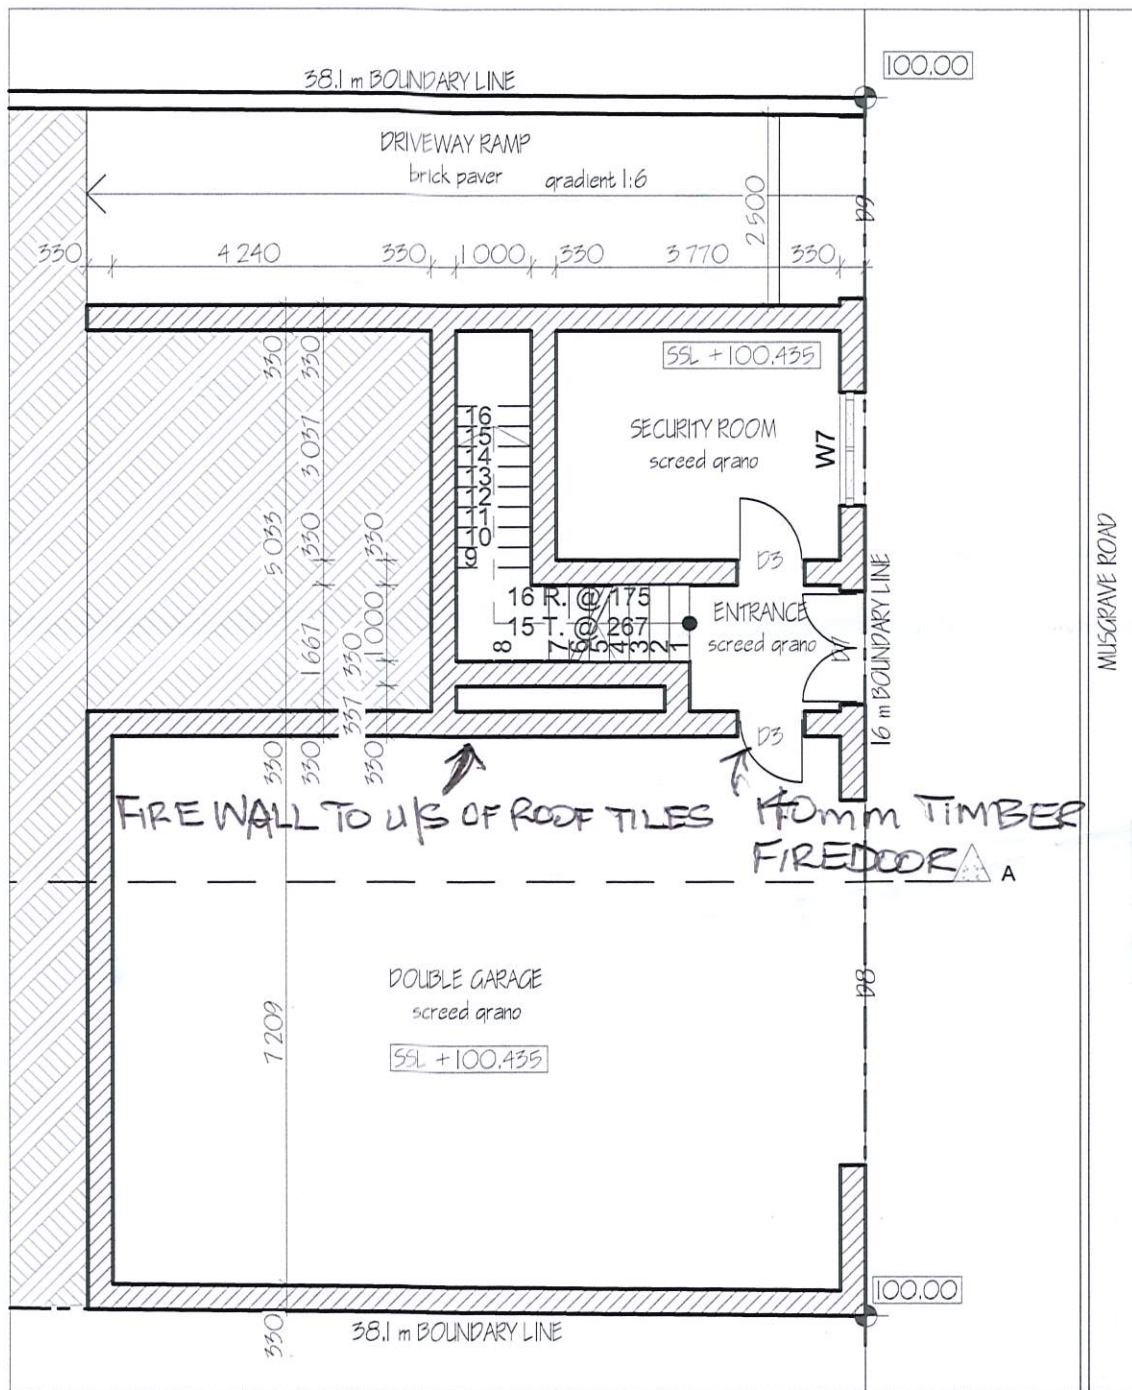

1:100 LOWER GROUND STOREY PLAN

GENERAL NOTES:

Classification: H3

- FIGURED DIMENSIONS TO BE TAKEN IN PREFERENCE TO SCALING. ALL DIMENSIONS IN MM'S UNLESS STATED OTHERWISE.
- ALL WORK TO BE EXECUTED IN STRICT ACCORDANCE TO NBR AND LOCAL AUTHORITY BY LAWS.
- THE CONTRACTOR IS RESPONSIBLE FOR THE CORRECT SETTING OUT OF THE WORKS, PARTICULARLY BOUNDARIES, BUILDING LINES, SERVITUDES, ETC.
- THE CONTRACTOR IS TO VERIFY ALL LEVEL HEIGHTS AND DIMENSIONS ON SITE AND TO CHECK THESE AGAINST THE DRAWINGS BEFORE COMMENCING WORK.
- THE CONTRACTOR IS TO LOCATE AND IDENTIFY ANY ALL EXISTING SERVICES AND TO PROTECT THESE FROM DAMAGE WHILE ON SITE THROUGHOUT THE CONTRACT PERIOD.
- ANY DISCREPANCIES, ERRORS, OMISSIONS ETC. ARE TO BE BROUGHT IMMEDIATELY TO THE ATTENTION OF THE ARCHITECT.
- ALL MATERIALS TO BE USED IN STRICT ACCORDANCE TO MANUFACTURER'S SPECS.
- WORKMANSHIP IS TO BE OF THE HIGHEST STANDARD THROUGHOUT.
- FOUNDATIONS NOT TO ENCROACH OVER BOUNDARIES.
- SEWER & S.W. PIPES TO CONNECT TO ESTATE SEWER SERVICES.
- 250 WATER METER & 25 Ø WATER PIPE TO PRESSURE VALVE
- ALL STRUCTURAL ELEMENTS SUCH AS INTELS, WALLS, FOUNDATIONS, ROOFS, STEEL ELEMENTS, RETAINING WALLS, CONCRETE SURFACE BEDS, CONCRETE BEAMS, CONCRETE ROOF SLABS, TIMBER BEAMS & FILL TO BE DESIGNED & CERTIFIED BY APPOINTED STRUCTURAL ENGINEER.
- ALL FLOORS SUPPORTED ON GROUND OR FILLING TO ENGINEER'S DETAIL.
- ALL REINFORCED CONCRETE WORK TO BE STRICTLY IN ACCORDANCE WITH STRUCTURAL ENGINEER'S DETAIL AND SPECIFICATION.
- DAMP-PROOF COURSE TO COMPLY WITH RELEVANT BY-LAWS AND SANS 10400 REQUIREMENTS.
- ALL WALLS TO BE REINFORCED WITH TWO COURSES BRICKFORCE AT CILL AND WALL PLATE LEVELS.
- 250MM THICK POWER FLOAT FINISHED CONCRETE SLAB ON SABS APPROVED UNDERLAY TO STRUCTURAL ENGINEER'S DETAIL. SOIL TO BE POISONED IN ACCORDANCE WITH SABS 1185. CERTIFICATE MUST BE PROVIDED. IMPREGNATED SOFTBOARD, BACKING STRIP & 12MM POLYSULPHIDE SEALANT BETWEEN SURFACE BED AND WALLS. BRC MESH TO BE APPLIED ABOVE UNDERLAY.
- ALL ROOF TRUSS CENTRE SPACING TO BE 760MM IN COMPLIANCE WITH SANS PART L.

WALLS:
ALL WALLS TO COMPLY WITH "PART K" OF THE NATIONAL BUILDING REGULATIONS.
COROBRIK ENGINEERING BRICKS TO BE USED BELOW GROUND LEVEL IN FOUNDATION WALLS. BRICKFORCE TO EVERY 3RD COURSE UP TO WINDOW HEIGHT. THEREAFTER TO EVERY COURSE. GALVANISED CRIMP WIRE WALL TIES (7 PER SQUARE METRE- LAID STAGGERED)
ALL WALLS TO BE REINFORCED WITH TWO COURSES BRICKFORCE AT CILL AND WALL PLATE LEVELS.

FOUNDATIONS:
TYPE & SIZE OF FOUNDATIONS/FOOTINGS BELOW ALL WALLS TO BE TO ENGINEER'S DETAIL IN ACCORDANCE WITH GEOTECHNICAL ENGINEER'S REPORT/SUGGESTIONS.

DRAINAGE AND PLUMBING

- ALL PLUMBING WORK HAS TO COMPLY WITH SANS PART P
- ALL FITTINGS TO BE ON THE SCHEDULE OF ACCEPTED PIPES AND WATER FITTINGS AS FOUND AT WWW.JASWIC.CO.ZA
- ALL 100MM DIA. U.P.V.C SEWER PIPE DRAIN LAID TO A MIN. FALL OF 1:60.
- ALL 100MM DIA. OVP AT HEAD OF DRAIN PIPE AS SHOWN.
- RODDING EYES AT HEAD OF DRAIN AND AT ALL CHANGES OF DIRECTIONS AT MAXIMUM OF 2500MM INTERVALS.
- IE'S TO ALL BENDS OF DRAINS AND TO HAVE MARKED COVERS AT GROUND LEVEL.
- ALL DRAIN PIPES UNDER BUILDINGS TO BE PROTECTED AGAINST LOADS AND LAID IN SLEEVES AND INCASED IN CONCRETE.
- ALL WASTE PIPES TO HAVE 65MM RE-SEAL TRAPS. ALL WASTE PIPES TO BE ACCESSIBLE OVER ENTIRE LENGTH FOR CLEANING PURPOSES AND REPAIRS.
- ALL WASTE PIPES UNDER FLOOR SLAB TO BE SLEEVED AND PROTECTED AGAINST LOAD.
- ALL SOIL FITTINGS WITH VERTICAL DISCHARGE GREATER THAN 1220MM TO HAVE ANTISYPHON VENTPIPS
- ALL DRAINAGE WORK TO COMPLY WITH SANS PART P.

ALL PAINT COLOURS TO BE APPROVED BY CLIENT AND CDMA.


DEVIATION & ADDITION NOTES

- ALL WINDOWS AND DOORS TO BE REPLACED AND REPOSITIONED WITH NEW WINDOWS AND DOORS.
- ALL PLUMBING & SANITARE TO BE NEW- ALL OLD PLUMBING TO BE REMOVED.
- ALL ROOFS TO BE REPLACED AND REPOSITIONED.
- NEW RETAINING WALLS TO ALL BOUNDARIES.

- DEMOLISHED WALLS
- NEW WALLS
- NEW STAIR
- NEW STEEL COLUMNS
- NEW STEEL BEAMS

SHEET 13 OF 13
ETHEKWINI MUNICIPALITY
(CENTRAL)
013 04 17
APPLICATION NO.

BUILDING APPLICATION
Approved in terms of Sec. 7 of The National Building Regulations and Building Standards Act No. 107 of 1977
2017-04-12
LOCAL AUTHORITY
This plan is approved on the basis of the information shown herein.
Attention is drawn to the fact that the applicant is responsible for the accuracy of the information shown and that the approval of this plan does not constitute a guarantee of the accuracy of the information shown or the safety of the building in terms of SANS 10177 or otherwise.

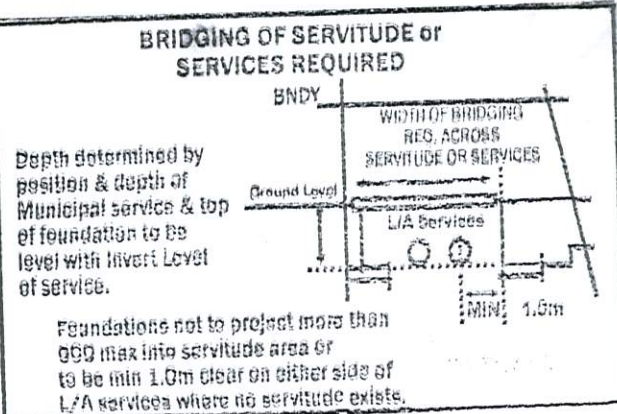

ENCROACHMENTS INTO/OVER SERVITUDES
Any construction work undertaken by the owner which encroaches upon a Municipal servitude is undertaken entirely at the owner's risk. Any authority of the council thereto shall not be waiver of the Municipality's right in respect of such servitude.
Providing, however, to locate the exact position of Municipal services is to be done before any building work is undertaken and is the responsibility of the applicant.
NO concrete hardening is permitted over servitude areas

OWNER:

Joosab

ARCHITECT: M.MANJOO SACAP REG NO: st 0248

THE SOUTH AFRICAN COUNCIL FOR THE ARCHITECTURAL PROFESSION

PROJECT

HOUSE JOOSAB
PROPOSED ALTERATIONS & ADDITIONS
ON LOT 2 OF LOT 2186 DURBAN AT 515
MUSGRAVE ROAD

TITLE

SUBMISSION DRAWING:
PLANS

JOB NO. #P1n	DATE 2017/03/23	DRAWN S.O/N.H
DRAWING NO. 02.1	REVISION NO.	SCALE as shown

ARCHITECTURAL CONSULTANTS