

SPECIALIST ASSESSMENT






AIR QUALITY BASELINE ASSESSMENT FOR PIONEER MINERALS (PTY) LTD FARM REMHOOGTE 152 PROSPECTING RIGHT - NORTHERN CAPE.



DOCUMENT CONTROL

| | |
|-----------------------|--|
| Document Title | Air Quality Baseline Assessment for Pioneer Minerals (Pty) Ltd Farm Remhoogte 152 Prospecting Right - Northern Cape. |
| Report Number | SPS-AQB-063-19_20 |
| Version | 0.0 |
| Date | June 2019 |
| Distribution | 1 x Pioneer Minerals (Pty) Ltd 1 x Environmental Assurance (Pty) Ltd |

QUALITY CONTROL

| | Originated By: | Internal Reviewer: | Technical Reviewer: |
|--------------------|---|--|---|
| Name | Anton Botha | Wian Esterhuizen | Carl Schoeman |
| Designation | Environmental Consultant | Environmental Consultant | Environmental Consultant Pr.Sci.Nat - 114848 |
| Signature |  |  |  |
| Date | 07-06-2019 | 18-02-2019 | 19-06-2019 |

DISCLAIMER

Copyright ENVASS. All Rights Reserved - This documentation is considered the intellectual property of ENVASS. Unauthorised reproduction or distribution of this documentation or any portion of it may result in severe civil and criminal penalties, and violators will be prosecuted to the maximum extent possible under law. Any observations, recommendations and actions taken from this report remain the responsibility of the client. Environmental Assurance (Pty) Ltd and authors of this report are protected from any legal action, possible loss, damage or liability resulting from the content of this report. This document is considered confidential and remains so unless requested by a court of law.

DECLARATION OF OBJECTIVENESS-

I, **Anton Botha**, in my capacity as a specialist consultant, hereby declare that I: -

- Act as an independent consultant;
- Do not have any financial interest in the undertaking of this project, other than remuneration for the work performed in terms of the National Environmental Management Act 107 of 1998;
- Have and will not have vested interest in the proposed and/or existing activity nor will I engage myself in any conflicting interest associated with this project;
- I undertake to disclose and provide to the competent authority any material or information at my disposal regarding this project as required in terms of National Environmental Management Act 107 of 1998;
- Based on the information provided to me by the client and in addition to information obtained during the course of this study, I have presented the results and conclusion with regard to this project to the best of my professional ability;
- I reserve the right to modify aspects pertaining to this study should additional information become available through ongoing research and further work on this field;
- I undertake to have my work peer reviewed on a regular basis by a competent specialist in the field of study;
- I am duly qualified and experienced to undertake the work at hand;



Anton Botha (Environmental Consultant)

| Environmental Consultant | Relevant expertise |
|--------------------------|--|
| Anton Botha | Has completed a B.Sc. in Environmental Sciences, followed by a B.Sc. (Hons) and M.Sc. specialising in Hydrogeology and Hydrology. Anton has comprehensive experience and knowledge on compliance monitoring, project management and specialist reporting. As an environmental consultant, Anton has provided several environmental monitoring assessments, specialist input services, mine closure quantum's and environmental audits. |

| | | | |
|------------------------------------|---------------------------------------|---|--|
| Document No: Revision: Date: | SPS-AQB-063-19_20 0.0 June 2019 | Air Quality Baseline Assessment Pioneer Minerals (Pty) Ltd: Farm Remhoogte 152 | Client Restricted Author: A Botha ii |
|------------------------------------|---------------------------------------|---|--|

EXECUTIVE SUMMARY

This document has been prepared by Environmental Assurance (Pty) Ltd [ENVASS] as an independent environmental consultancy firm as appointed by Pioneer Minerals (Pty) Ltd. to assess the ambient air quality towards the provision of a baseline assessment for the proposed prospecting right on Farm 152 Remhoogte, Northern Cape Province.

Pioneer Minerals (Pty) Ltd is in the process of applying for a prospecting right including bulk sampling by means of opencast pitting and trenching methods using heavy earthmoving machinery. Currently mining is present at the centre of the farm, while the prospecting right application includes the remaining northern and southern extent portions. The prospecting evaluation activities is planned for five years where a total of 250 000 m³ (trenching) and 1 350 m³ (pitting) of ore will be processed. The proposed northern and southern prospecting areas, consisting of the remaining Remhoogte Farm 152 extent (2512.2808 hectares) will constitute as the study area for the baseline assessment.

The field survey relevant to this air quality baseline assessment report was conducted on the 4th and 5th of June 2019. This report and the accompanying data will be used to provide input into the current ambient conditions and relevant impacts relating to the proposed prospecting activity.

Results and Impact Statement

Based on both the northern and southern prospecting boundaries, the measured concentrations presented ideal to moderate air quality in terms of the active indicative parameters monitored, while volatile organic compounds were measured at seven monitoring points (AQ 13, AQ 16, AQ 18, AQ 19, AQ 20, AQ 21 and AQ 22) which could be attributed to a range of variables. Additionally, asbestos fibres were not detected in the sample submitted (AQ 23) for analysis. It is estimated that the prospecting activities and bulk-sampling of the proposed expansion will contribute to the total suspended load in the atmosphere, however it is anticipated that the load increase and impact will be localised within the operational area. Subsequent to undertaking the assessment of all of the perceived impacts associated with the proposed prospecting, it was concluded that all of the perceived impacts have the potential to be reduced to low significance (reduction of the total suspended loads) if mitigation measures outlined in Table 9 and Table 10 and the project-specific Environmental Management Programme report (EMPr) be are implemented.

Specialist's Recommendation

Considering the project as a whole, it is the specialist's opinion that the proposed development continues, provided that the mitigation measures presented within this report and the approved site EMPr be strictly implemented and subsequently monitored.

| | | | |
|--------------|-------------------|--|-------------------|
| Document No: | SPS-AQB-063-19_20 | Air Quality Baseline Assessment | Client Restricted |
| Revision: | 0.0 | Pioneer Minerals (Pty) Ltd: Farm Remhoogte 152 | Author: A Botha |
| Date: | June 2019 | | iii |

TABLE OF CONTENTS

| | |
|---|-----|
| DECLARATION OF OBJECTIVENESS | ii |
| EXECUTIVE SUMMARY | iii |
| TABLE OF CONTENTS | iv |
| LIST OF FIGURES | v |
| LIST OF TABLES | v |
| 1 INTRODUCTION AND BACKGROUND | 1 |
| 1.1 SITE AND PROJECT BACKGROUND..... | 1 |
| 1.2 EXISTING AND FUTURE SOURCES OF AIR POLLUTION..... | 2 |
| 1.3 LAND USE..... | 3 |
| 2 LEGISLATIVE CONTEXT AND REFERENCES | 5 |
| 3 PURPOSE AND SCOPE | 6 |
| 4 METHODOLOGY | 7 |
| 4.1 SITE ESTABLISHMENT | 7 |
| 4.2 ACTIVE INDICATIVE SAMPLING | 9 |
| 4.3 ASBESTOS SAMPLING..... | 10 |
| 4.4 AIR QUALITY BASELINE REPORT | 10 |
| 5 POLLUTANT OVERVIEW | 10 |
| 5.1 CONSTRUCTION PHASE..... | 10 |
| 5.2 OPERATIONAL PHASE | 11 |
| 5.3 POLLUTANT OVERVIEW | 11 |
| 5.3.1 PARTICULATE MATTER (PM)..... | 11 |
| 5.3.2 CARBON MONOXIDE (CO)..... | 12 |
| 5.3.3 CARBON DIOXIDE (CO ₂) | 13 |
| 5.3.4 VOLATILE ORGANIC COMPOUNDS (VOC's)..... | 13 |
| 5.3.5 ASBESTOS..... | 14 |
| 5.4 ENVIRONMENTAL IMPACT | 16 |
| 5.5 IDENTIFYING EMISSION SOURCES FROM PLANNED ACTIVITIES..... | 17 |
| 6 SAMPLING | 18 |
| 6.1 ACTIVE INDICATIVE SAMPLING | 18 |
| 7 EMISSION GENERATION | 19 |
| 7.1 PREDICTED AREAS OF INFLUENCE..... | 20 |
| 7.2 Meteorological Data..... | 20 |
| 7.3 Case Study | 22 |
| 8 LIMITATIONS AND ASSUMPTIONS | 23 |
| 9 RESULTS | 23 |

| | | | |
|------------------------------------|---------------------------------------|---|--|
| Document No: Revision: Date: | SPS-AQB-063-19_20 0.0 June 2019 | Air Quality Baseline Assessment Pioneer Minerals (Pty) Ltd: Farm Remhoogte 152 | Client Restricted Author: A Botha iv |
|------------------------------------|---------------------------------------|---|--|

| | | |
|-----|--|----|
| 9.1 | ACTIVE INDICATIVE SAMPLING | 23 |
| 9.2 | ACTIVE INDICATIVE SAMPLING RESULTS..... | 26 |
| 9.3 | AIR QUALITY GRAPHS | 27 |
| 9.4 | RESULTS – DISCUSSION | 31 |
| 10 | FINDINGS | 33 |
| 11 | MITIGATION AND POLLUTION PREVENTION MEASURES | 34 |
| 12 | CONCLUSION AND RECOMMENDATIONS | 37 |
| 13 | REFERENCES..... | 38 |

LIST OF FIGURES

| | |
|--|----|
| Figure 1: Remhoogte Farm 152 Current Mining and Prospecting Boundaries (Northern and Southern) Map | 4 |
| Figure 2: Remhoogte Farm 152 Prospecting Areas Monitoring Localities | 8 |
| Figure 3: The Quest Technologies EVM-7 environmental monitoring instrument | 9 |
| Figure 4: Wind Direction Frequency Average (Prieska) | 20 |
| Figure 5: Windrose Diagram (Prieska) | 21 |
| Figure 6: Particulate Matter | 25 |
| Figure 7: Measured CO concentrations | 27 |
| Figure 8: Measured CO ₂ concentrations..... | 28 |
| Figure 9: Measured PM10 concentrations | 29 |
| Figure 10: Measured VOC concentrations | 30 |

LIST OF TABLES

| | |
|---|----|
| Table 1: Description of planned activities and emissions | 17 |
| Table 2: Ambient air quality limits for common pollutants (SANS 1929:2011) (Limit Values in µg/m ³) | 18 |
| Table 3: Total Rainfall and Average Wind Speeds..... | 21 |
| Table 4: Wind direction, strength and areas likely to be affected by dust fallout | 22 |
| Table 5: Northern Cape Monitoring Results | 22 |
| Table 6: CO concentrations in the atmosphere | 24 |
| Table 7: Active Indicative Sampling Results | 26 |
| Table 8: Identification of Asbestos Fibres in Bulk Material | 32 |
| Table 9: Proposed Mitigation Measures | 34 |
| Table 10: General Management Measures | 36 |

| | | | |
|--------------|-------------------|--|-------------------|
| Document No: | SPS-AQB-063-19_20 | Air Quality Baseline Assessment | Client Restricted |
| Revision: | 0.0 | Pioneer Minerals (Pty) Ltd: Farm Remhoogte 152 | Author: A Botha |
| Date: | June 2019 | | v |

GLOSSARY

A list of commonly used terms and acronyms.

| ACRONYMS | |
|--|---|
| ASTM | American Society for Testing and Materials |
| CO | Carbon Monoxide |
| CO₂ | Carbon Dioxide |
| DEA | Department of Environmental Affairs |
| ENVASS | Environmental Assurance (Pty) Ltd |
| NEMA | National Environmental Management Act: Act 109 of 1998. |
| NEM:AQA | National Environmental Management: Air Quality Act 39 of 2004 |
| PM₁₀ | Particulate Matter of less than 10 microns in diameter |
| SANS | South African National Standards |
| VOC | Volatile Organic Carbon |
| WHO | World Health Organisation |
| MEASUREMENT UNITS | |
| Mg/L | Milligram per litre |
| mg/m²/day | Milligram per square meter per day |
| PPM | Parts per million |
| µg/m³ | Microgram per cubic meter |
| DEFINITIONS | |
| Ambient air | Outdoor air in the troposphere, excluding air regulated by the relevant national legislation, where air quality is determined in accordance with this standard. |
| ASTM D1739 | Standard test method for the collection measurement of dust fall (settleable particulate matter). |
| Average period | Period of time over which the average value is determined. |
| Dust fallout monitoring programme | Means monitoring of gravimetric dust fallout on a continuous basis. |
| Monthly basis | Period of 30 days (±2 day) as specified by ASTM D1739. |
| National Dust Control Regulations | Means the National Dust Control regulations, 2013, as published in the Government Gazette (No. 36974) of 1 November 2013 in terms of the National Environmental Management: Air Quality Act 39 of 2004. |
| Non-residential area | Means any area not classified for residential use as per local town planning scheme. |
| Residential area | Means any area classified for residential use in terms of the local town planning scheme. |
| SANS1929: 2011 | South African National Standards, Ambient Air Quality – limits for common pollution. |

| | | | |
|--------------|-------------------|--|-------------------|
| Document No: | SPS-AQB-063-19_20 | Air Quality Baseline Assessment | Client Restricted |
| Revision: | 0.0 | Pioneer Minerals (Pty) Ltd: Farm Remhoogte 152 | Author: A Botha |
| Date: | June 2019 | | vi |

1 INTRODUCTION AND BACKGROUND

1.1 SITE AND PROJECT BACKGROUND

Environmental Assurance (Pty) Ltd (ENVASS), as independent environmental consultants, was appointed by Pioneer Minerals (Pty) Ltd. to assess the baseline air quality for the proposed prospecting activity on the remaining extent of Farm Remhoogte 152 - Northern Cape Province (refer to Figure 1 and Table 1). This document reports on results and outlines findings and conclusions.

The Remhoogte project is situated approximately 85km southwest of Douglas which, in turn, is situated 110km southwest of Kimberley, the administrative capital of the Northern Cape Province and the historic centre of the South African diamond mining industry. The Remhoogte project is located on the south bank of the Orange River in the Prieska district of the Northern Cape Province.

Pioneer Minerals (Pty) Ltd is in the process of applying for a prospecting right with bulk Sampling, for the prospecting of alluvial diamonds, diamonds in general and Kimberlite diamonds on the listed properties next to the Middle Orange River. The prospecting operation is based on alluvial diamondiferous gravels that will be sampled by means of opencast pitting and trenching methods using heavy earthmoving machinery. Vegetated soil is stripped where required and the underlying gravels are excavated, screened and treated through a Pan Plant. No ore processing reagents are required or used in the treatment of the ore. The rough diamond product is then removed from site for further beneficiation. Currently mining is present at the centre of the farm, while the prospecting right application includes the remaining northern and southern extent portions. The total duration of the prospecting and evaluation activities is planned for five years, during which a total of 250 000 m³ (trenching) and 1 350 m³ (pitting) of ore will be processed from the prospecting areas.

An air quality baseline assessment is required in order to establish baseline conditions and potential impacts associated with the proposed activities. Baseline readings were taken during a site visit in June 2019 for site establishment and sampling.

This report is structured to include the following:

- Legislative requirements;
- Purpose / Objective of the study;
- Scope of Works / terms of reference;
- Description of methodologies utilised;
- Limitations and assumptions;
- Results from the baseline assessment; and
- Summary of findings and recommendations made.

| | | | |
|--------------|-------------------|--|-------------------|
| Document No: | SPS-AQB-063-19_20 | Air Quality Baseline Assessment | Client Restricted |
| Revision: | 0.0 | Pioneer Minerals (Pty) Ltd: Farm Remhoogte 152 | Author: A Botha |
| Date: | June 2019 | | 1 |

1.2 EXISTING AND FUTURE SOURCES OF AIR POLLUTION

Prospecting activities will primarily make use of existing roads and tracks, but additional haul roads will be created in order to access new pits and trenches. The current estimated ambient air pollution present is that on minimal residential traffic on the associated dirt roads. The typical infrastructure that are most likely to be related to the future prospecting operation footprint include:

- A Drill Site;
- Camp Site and Accommodation;
- Ablution Facility;
- Equipment Storage Area;
- Sample Storage Area;
- Site Office; and
- Temporary Topsoil and Overburden Stockpiles; and
- Access roads.

| | | | |
|--------------|-------------------|--|-------------------|
| Document No: | SPS-AQB-063-19_20 | Air Quality Baseline Assessment | Client Restricted |
| Revision: | 0.0 | Pioneer Minerals (Pty) Ltd: Farm Remhoogte 152 | Author: A Botha |
| Date: | June 2019 | | 2 |

1.3 LAND USE

The surrounding area is currently semi-developed with agricultural activities (mainly farming), natural areas, and residential housing (farm holdings) in the area. The study area is minimally impacted on with good vegetation cover in the area. The predominant land uses identified on the day of the assessment for the study area include *inter alia*:

- De-centralised housing (small holdings);
- Corn Farming (spill-point) in a northern and western direction;
- Main roads and routes of the study area include:
 - The R386 main road to the west of the study area;
 - The R387 main road to the east of study area;
 - Informal internal routes on the site.

| | | | |
|--------------|-------------------|--|-------------------|
| Document No: | SPS-AQB-063-19_20 | Air Quality Baseline Assessment | Client Restricted |
| Revision: | 0.0 | Pioneer Minerals (Pty) Ltd: Farm Remhoogte 152 | Author: A Botha |
| Date: | June 2019 | | 3 |

Pioneer Minerals (Pty) Ltd.: Remhoogte Farm152 & Extension - Prieska, Northern Cape

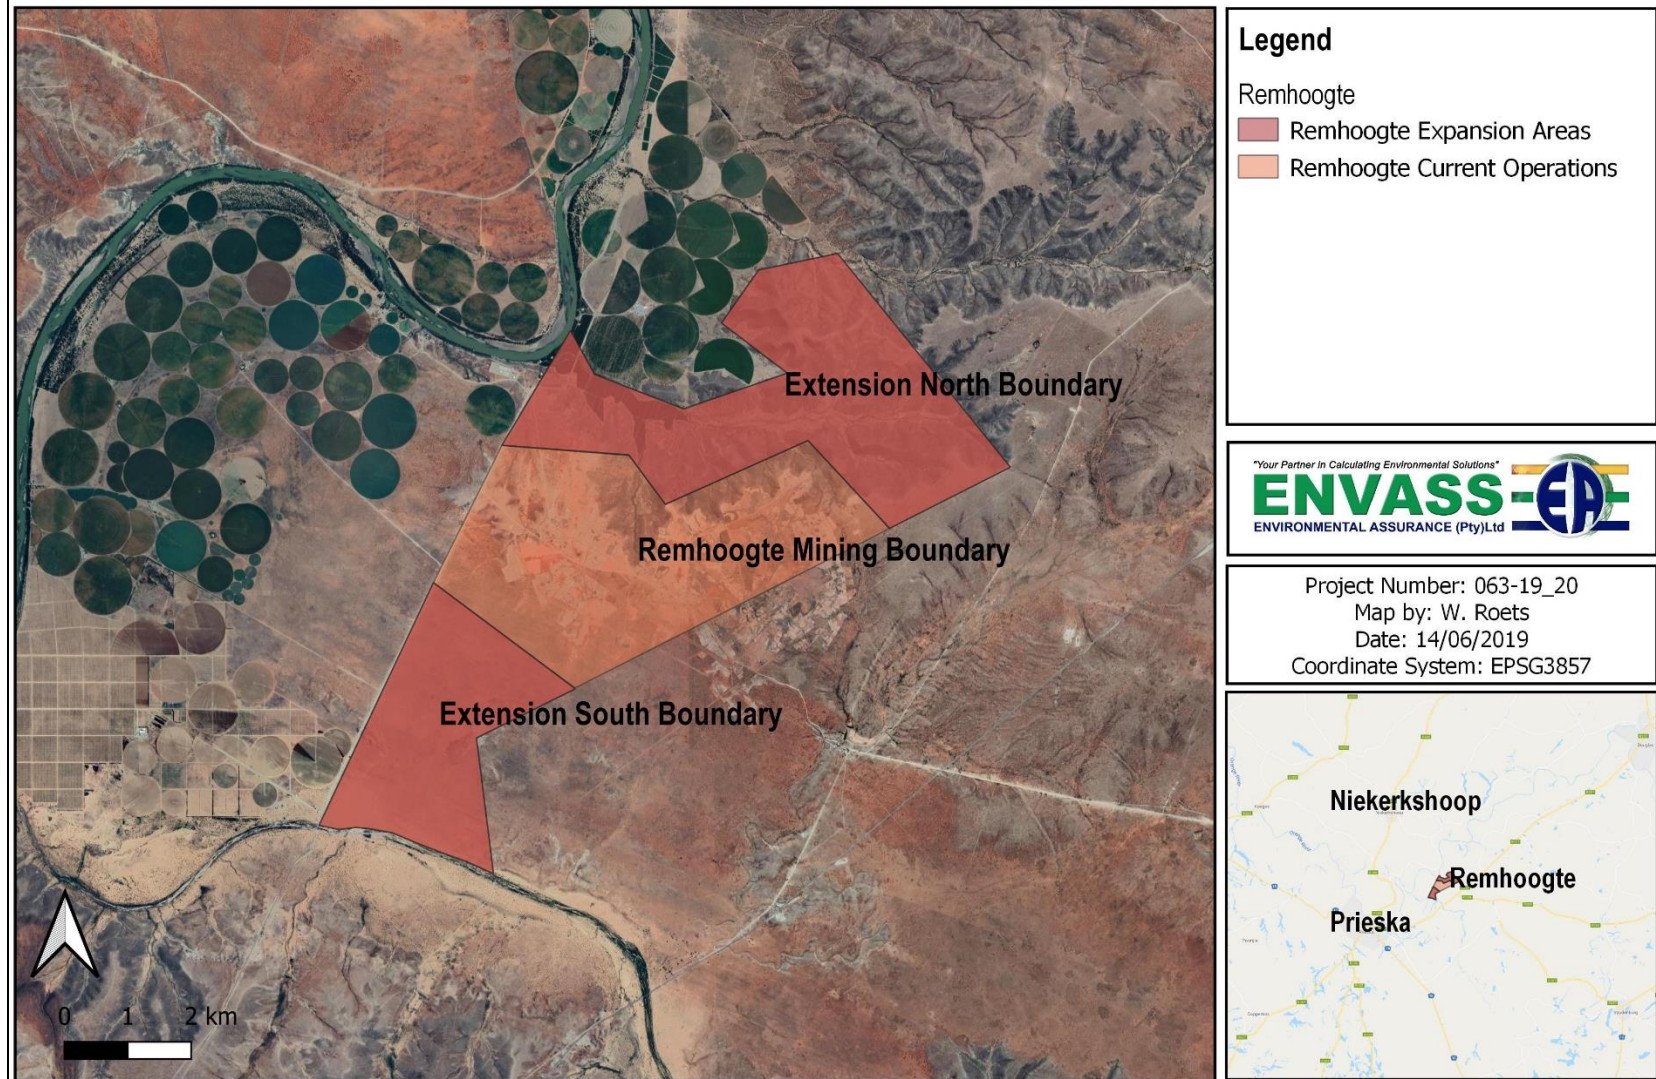


Figure 1: Remhoogte Farm 152 Current Mining and Prospecting Boundaries (Northern and Southern) Map

| | | | |
|--------------|-------------------|--|-------------------|
| Document No: | SPS-AQB-063-19_20 | Air Quality Baseline Assessment | Client Restricted |
| Revision: | 0.0 | Pioneer Minerals (Pty) Ltd: Farm Remhoogte 152 | Author: A Botha |
| Date: | June 2019 | | 4 |

2 LEGISLATIVE CONTEXT AND REFERENCES

Section 28 of the National Environmental Management Act (NEMA, Act 107 of 1998) places a duty of care on any person causing, has caused or may cause significant pollution or degradation of the environment to take reasonable measures to prevent such pollution or degradation from occurring, continuing, or, insofar as such harm to the environment is authorised by law or cannot be reasonably avoided or stopped and rectify such pollution of the environment.

The measures required in terms of subsection (1) may include measures to:

- Investigate, assesses and evaluate the impact on the environment,
- Inform and educate employees on the environmental risk of their work and the manner in which tasks must be performed in order to avoid causing significant pollution or degradation of the environment;
- Cease, modify or control any activity or processes causing pollution or degradation;
- Contain or prevent the movement of pollutants or the cause of degradation;
- Eliminate any source of the pollution or degradation; or
- Remedy the effects of pollution or degradation.

The National Environmental Management: Air Quality Act (Act no. 39 of 2004) (AQA) was developed to give effect to NEMA in order to update air quality legislation to comply with general environmental policies and to ensure that the legislation is in line with local and international standards on air quality and air quality management practices. The main objectives of the act are to:

- Enhance and protect air quality;
- Provide reasonable measures and steps to prevent pollution or environmental degradation; and
- To secure sustainable environmental development in conjunction with economic and social development.

In terms of the AQA certain activities and industries have the responsibility to:

- Comply with any relevant standards or bylaws;
- Comply with relevant emission standards;
- Comply with the Minister's requirement for the implementation of a pollution prevention plan in respect of a substance declared as a priority air pollutant;
- Comply with an Air Quality Official's legal request for impact reports;
- Taking reasonable steps to prevent the emission of any offensive odour caused by any activity on their premises.

Guidelines provide a basis for protecting public health from adverse effects of air pollution and for eliminating, or reducing to a minimum, those contaminants of air that are known or likely to be hazardous to human health and well-being (WHO, 2000). The South African Bureau of Standards (SABS), in collaboration with DEA, established ambient air quality standards for criteria

| | | | |
|--------------|-------------------|--|-------------------|
| Document No: | SPS-AQB-063-19_20 | Air Quality Baseline Assessment | Client Restricted |
| Revision: | 0.0 | Pioneer Minerals (Pty) Ltd: Farm Remhoogte 152 | Author: A Botha |
| Date: | June 2019 | | 5 |

pollutants. The National Ambient Air Quality Standards (Republic of South Africa, 2009a and 2012) provide standards for ambient air quality in terms of criteria pollutants and permitted frequency of exceedances.

3 PURPOSE AND SCOPE

The purpose of this assessment is to determine the baseline ambient air quality of the proposed development area. The baseline air quality assessment will measure the ambient air quality to establish dust and other emissions being generated by the existing and proposed activities to become a nuisance to the surrounding land users and the receiving environment. If it is found that the possibility exists for emissions to pose a problem, a recommendation will be made as to prevent and mitigate the possible effects. This will be done in order to prevent disturbance to the receiving environment and enable the mitigation and control of emissions before the activities start. This report also aims to give effect to the requirements and legislation as promulgated in South Africa. Please refer to Section 2 for detailed legislative requirements for the study. Key aspects for the purpose of this document is to:

- Describe baseline air quality conditions and how it could be affected;
- Raise relevant air quality concerns of the proposed project;
- Identify the most sensitive receptors in terms of air quality impact;
- Define the basis for assessing the impact and determining the significance of the impact; and
- To recommend, based on the conditions, mitigation measures.

The scope includes the assessment of the prospecting boundary regarding the remaining portion of the Farm Remhoogte 152 extent. This includes active indicative sampling with specialised equipment.

| | | | |
|--------------|-------------------|--|-------------------|
| Document No: | SPS-AQB-063-19_20 | Air Quality Baseline Assessment | Client Restricted |
| Revision: | 0.0 | Pioneer Minerals (Pty) Ltd: Farm Remhoogte 152 | Author: A Botha |
| Date: | June 2019 | | 6 |

4 METHODOLOGY

4.1 SITE ESTABLISHMENT

An initial desktop site assessment was conducted to determine suitable locations regarding the air quality baseline assessment. The result of the desktop study was the identification of areas or activities which could possibly contribute to the deterioration of the ambient air quality of the area, as well as the baseline condition of the overall farm extent.

Site establishment (and subsequent field work) occurred on the 4th and 5th of June 2019 for the proposed development. The site establishment was conducted to undertake the active indicative sampling. Sampling was conducted as per the scope of work at the sampling points (nineteen in total) as indicated in Figure 2. The site establishment was conducted to measure the ambient air quality actively for at least 5 minutes at each sampling location during normal conditions (no extraordinary activities must occur as the samples would then not be representative of baseline ambient air quality). Sensitive receptors were identified during the assessment which included a local school (AQ 12), residential areas (AQ 13) of both the land owner and workforce (employees). In addition to the ambient air quality measurement, a supplementary sample (AQ23) was collected for the absent/present analysis of asbestos as a precautionary measurement.

| | | | |
|--------------|-------------------|--|-------------------|
| Document No: | SPS-AQB-063-19_20 | Air Quality Baseline Assessment | Client Restricted |
| Revision: | 0.0 | Pioneer Minerals (Pty) Ltd: Farm Remhoogte 152 | Author: A Botha |
| Date: | June 2019 | | 7 |

Pioneer Minerals (Pty) Ltd.: Remhoogte Farm152 & Extension - Prieska, Northern Cape

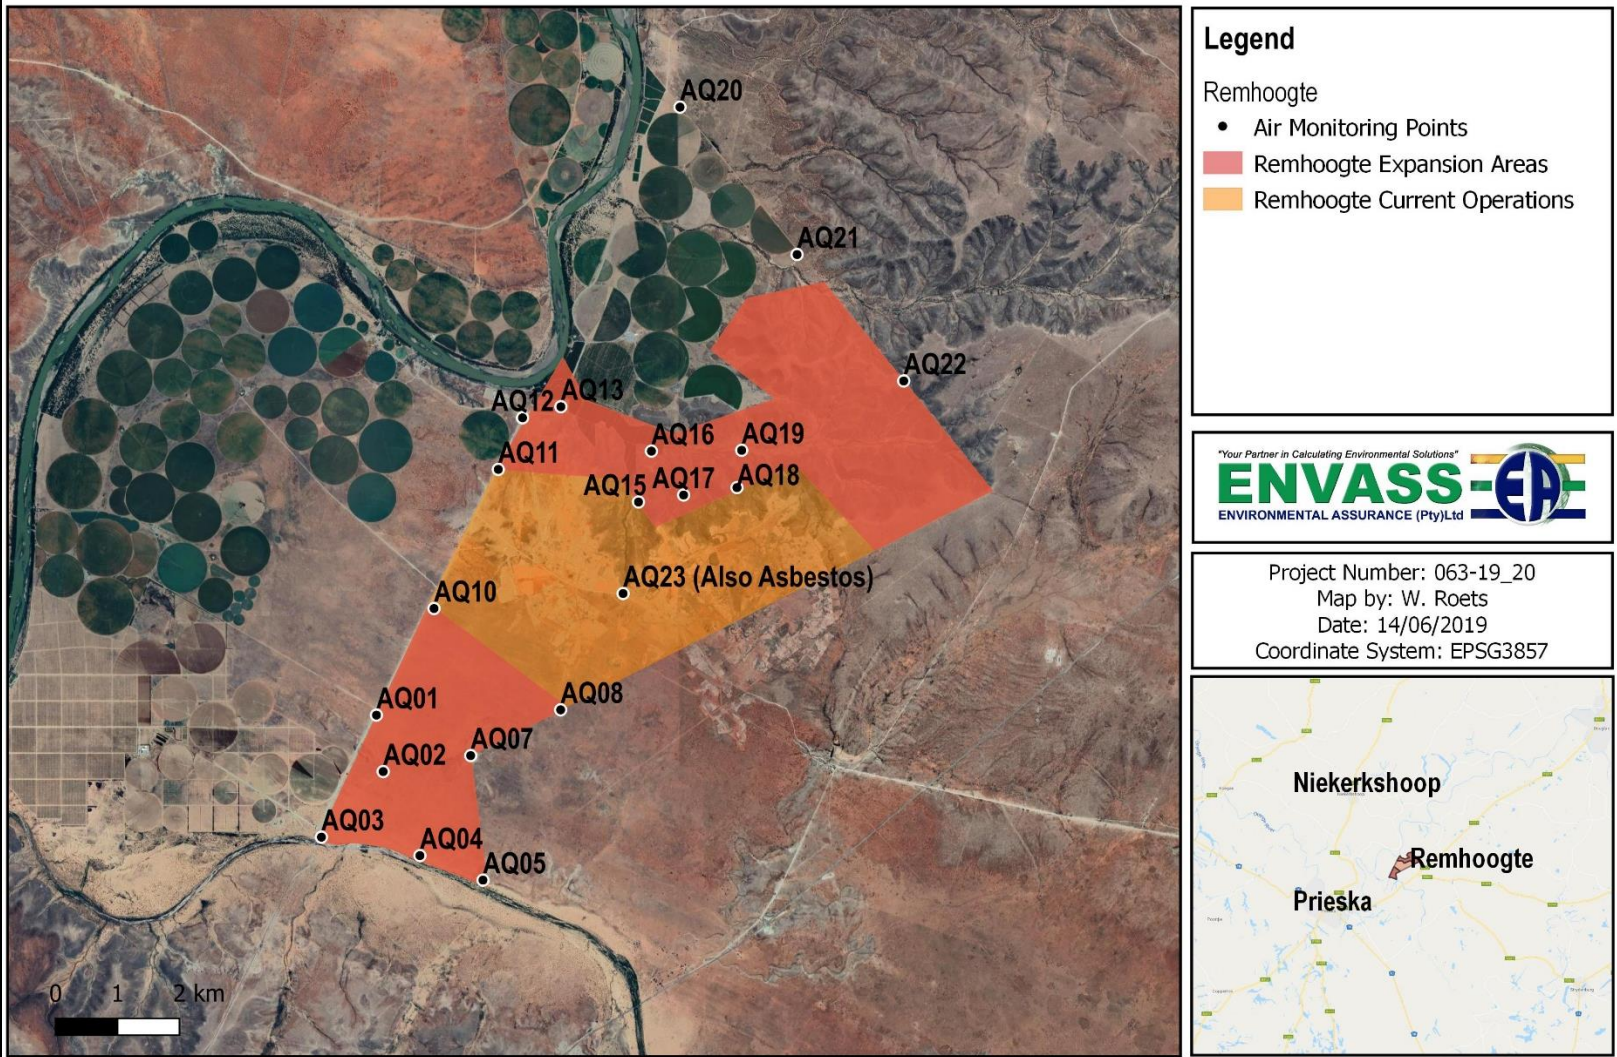


Figure 2: Remhoogte Farm 152 Prospecting Areas Monitoring Localities

| | | | |
|--------------|-------------------|--|-------------------|
| Document No: | SPS-AQB-063-19_20 | Air Quality Baseline Assessment | Client Restricted |
| Revision: | 0.0 | Pioneer Minerals (Pty) Ltd: Farm Remhoogte 152 | Author: A Botha |
| Date: | June 2019 | | 8 |

4.2 ACTIVE INDICATIVE SAMPLING

Active indicative sampling was carried out with an apparatus named the “Quest Technologies EVM-7 environmental monitoring instrument” (Figure 3). This instrument measures Particle Matter 10µm (PM₁₀ in µg/m³), carbon monoxide (CO in ppm), carbon dioxide (CO₂ in ppm) and volatile organic compounds (VOC in ppm). It also measures the physical conditions of the environment (such as relative humidity and temperature). Active indicative sampling is conducted over a minimal timeframe (5 – 10 minutes) at the boundaries of the proposed development and is a snapshot of the current situation providing air quality results for the measured period.



Figure 3: The Quest Technologies EVM-7 environmental monitoring instrument

Additional details of the apparatus:

- Model: EVM-7
- Key Features: IAQ and Particulate Monitor
- Description: Particulate and air quality monitoring combined in one instrument.

Quest Technologies EVM-7 offers the unique capability to simultaneously measure particulates (mass concentration), volatile organic compounds (VOCs), toxic gas, and carbon dioxide (CO₂), relative humidity, temperature and air velocity;

- Simultaneously Measure Particulate and Gas Concentrations
- Reduces the need for multiple instruments
- Lowers the cost of sampling.
- 90° Light Scattering Photometer
- Mass concentration engine offers real-time measurement of particulates.
- Built in Sampling Pump for Gravimetric Analysis
- Allows user to insert a 25- or 37-mm filter cassette to capture particulates for laboratory testing.
- Dial-in Rotary Impactor

| | | | |
|--------------|-------------------|--|-------------------|
| Document No: | SPS-AQB-063-19_20 | Air Quality Baseline Assessment | Client Restricted |
| Revision: | 0.0 | Pioneer Minerals (Pty) Ltd: Farm Remhoogte 152 | Author: A Botha |
| Date: | June 2019 | | 9 |

- Twist and click selection of particulate settings: PM_{2.5}, PM₁₀ or TSP*

For the assessment, the EVM-7 was utilised to monitor Particle Matter 10µm (PM10 in µg/m³), carbon monoxide (CO in ppm), carbon dioxide (CO₂ in ppm) and volatile organic compounds (VOC in ppm) at all monitoring points.

4.3 ASBESTOS SAMPLING

In order to identify the presence of asbestos within the Remhoogte vicinity (sample AQ 23), a 37 mm MCE filter was inserted into the Quest Technologies EVM-7 environmental monitoring instrument. The EVM instrument was initiated in order to collect ambient air quality and settleable dust at the predetermined locality (AQ 23). The filter was extracted and examined at a laboratory through microscopy identification of asbestos fibres [Test Method: HSG 248, Asbestos: The analysts' guide for sampling, analysis and clearance procedures (First edition, published 2006), of the Health and Safety Executive, UK.]

4.4 AIR QUALITY BASELINE REPORT

The report is compiled by studying the proposed activities, identifying the potential sensitive receptors and by determining the possible impacts the proposed activities will have on the receiving environment. Various data source inputs were required which included (but not limited to) the following:

- The average applicable weather conditions of the greater area;
- Data acquired from direct measurement with the EVM-7 active indicative sampler;
- The site layout and geographical location;
- List of activities which could possibly generate emissions; and
- Sensitive receptors in the area.

From the above-mentioned data, the areas or activities on the site most prone to pollutant generation can be determined.

5 POLLUTANT OVERVIEW

5.1 CONSTRUCTION PHASE

Construction activities will commence once the prospecting right has been granted. Construction often generate vast quantities of emissions into the atmosphere by various actions during the construction phase. Some of the proposed pollutant generating activities include:

- A Drill Site;
- Camp Site and Accommodation;
- Ablution Facility;

| | | | |
|--------------|-------------------|--|-------------------|
| Document No: | SPS-AQB-063-19_20 | Air Quality Baseline Assessment | Client Restricted |
| Revision: | 0.0 | Pioneer Minerals (Pty) Ltd: Farm Remhoogte 152 | Author: A Botha |
| Date: | June 2019 | | 10 |

- Equipment Storage Area;
- Sample Storage Area;
- Site Office; and
- Temporary Topsoil and Overburden Stockpiles; and
- Access roads.

From these activities, exhaust emissions from vehicles and equipment will typically include particulates, such as PM₁₀, carbon monoxide (CO), sulphur dioxide (SO₂) and volatile organic compounds (VOCs). Additionally, disturbance of groundcover caused by groundworks and activities will further impact on particulate matter and the generation of this. In the proposed development area and greater footprint, the only activities present consist of residential and agricultural activities.

5.2 OPERATIONAL PHASE

The activities of the proposed prospecting include the typical activities associated with movement of vehicles and generation of particulate matter, as well as vehicle emissions and other activities including stripping, excavation (pits and trenching) and bulk sampling. It should be noted that currently Pioneer Minerals (Pty) Ltd is mining in the centre of the Remhoogte 152 Farm, while the proposed prospecting right application includes the northern and southern remaining extent of the farm which forms part of this air quality baseline investigation report.

5.3 POLLUTANT OVERVIEW

5.3.1 PARTICULATE MATTER (PM)

Particles can be classified by its aerodynamic properties into coarse particles (gravimetric), PM₁₀ (particulate matter with a diameter of less than or equal to 10 microns) and very fine particles such as PM_{2.5} (particulate matter with a diameter of less than or equal to 2.5 microns) (Harrison and van Grieken, 1998). The fine particles may contain aerosols such as sulphates and nitrates (they “cling” to particulate matter), combustion particles and/or recondensed organic and metal vapours. The coarse particles contain earth crust materials and fugitive dust from roads and industries (Fenger, 2002).

In terms of health impacts, particulate air pollution effects are broad, but are predominately associated with effects of the respiratory and cardiovascular systems (WHO, 2000). Particle size is important for health because it controls where in the respiratory system a given particle deposits. Fine particles have been found to be more damaging to human health than coarse particles as larger particles are less respirable in that they do not penetrate deep into the lungs compared to smaller particles (Manahan, 1991).

| | | | |
|--------------|-------------------|--|-------------------|
| Document No: | SPS-AQB-063-19_20 | Air Quality Baseline Assessment | Client Restricted |
| Revision: | 0.0 | Pioneer Minerals (Pty) Ltd: Farm Remhoogte 152 | Author: A Botha |
| Date: | June 2019 | | 11 |

Larger particles are deposited into the extra thoracic part of the respiratory tract while smaller particles are deposited into the smaller airways leading to the respiratory bronchioles (WHO, 2000). A study by Pope and Burnett (2002) indicated that PM_{2.5} leads to high plaque deposits in arteries, causing vascular inflammation and atherosclerosis (Kaonga and Kgabi, 2009). As yet, no evidence of a threshold in the relationship between particulate concentrations and adverse human health effects have been determined (Burger and Scorgie, 2001; WHO 2005).

- *Short-term (acute) exposure*

Recent studies suggest that short-term exposure to particulate matter leads to adverse health effects, even at low concentrations of exposure (below 100 µg/m³). Morbidity effects associated with short-term exposure to particulates include increases in lower respiratory symptoms, medication use and small reductions in lung function.

- *Long-term (or chronic) exposure*

Long-term exposure to low concentrations (~10 µg/m³) of particulates is associated with mortality and other chronic effects such as increased rates of bronchitis and reduced lung function (WHO, 2000). Those most at risk include the elderly, individuals with pre-existing heart or lung disease, asthmatics and children; with an increased risk associated with an increase in exposure (WHO 2005).

5.3.2 CARBON MONOXIDE (CO)

Carbon monoxide (CO) is one of the most common and widely distributed air pollutants. CO is a tasteless, odourless and colourless gas which has a low solubility in water. In the human body, after reaching the lungs it diffuses rapidly across the alveolar and capillary membranes and binds reversibly with the haem proteins.

Approximately 80 - 90% of CO binds to haemoglobin to form carboxyhaemoglobin which is a specific biomarker of exposure in blood. The affinity of haemoglobin for CO is 200 – 250 times that for oxygen. This causes a reduction in the oxygen-carrying capacity of the blood which leads to hypoxia as the body is starved of oxygen (WHO, 2005).

Anthropogenic emissions of CO originate from the incomplete combustion of carbonaceous materials. The largest proportion of these emissions is produced from exhausts of internal combustion engines, in particular petrol vehicles. Other sources include industrial processes, coal power plants and waste incinerators.

Ambient CO concentrations in urban areas depend on the density of vehicles and are influenced by topography and weather conditions. In the streets, CO concentrations vary according to the distance from the traffic. In general, the concentration is

| | | | |
|--------------|-------------------|--|-------------------|
| Document No: | SPS-AQB-063-19_20 | Air Quality Baseline Assessment | Client Restricted |
| Revision: | 0.0 | Pioneer Minerals (Pty) Ltd: Farm Remhoogte 152 | Author: A Botha |
| Date: | June 2019 | | 12 |

highest at the leeward side of the “street canyon” with a sharp decline in concentration from pavement to rooftop level (Rudolf, 1994).

- *Short and Long-term exposure*

The adverse health effects of CO vary depending on the concentration and time of exposure. Clinical symptoms range from headaches, nausea and vomiting, muscular weakness, and shortness of breath at low concentrations (10 ppm) to loss of consciousness and death after prolonged exposure or after acute exposure to high CO concentrations (>500 ppm). Poisoning may cause both reversible, short-lasting neurological deficits and severe, often delayed, neurological damage. Neurobehavioral effects include impaired co-ordination, tracking, driving ability, vigilance and cognitive ability at COHb levels as low as 1.5 - 8.2% (WHO, 2000).

High risk patients with regards to CO exposure include persons with cardiovascular diseases (especially ischaemic heart disease), pregnant mothers and the foetus and new-born infants. Epidemiological and clinical studies indicate that CO from smoking and environmental or occupational exposures may contribute to cardiovascular mortality (WHO, 2000).

5.3.3 CARBON DIOXIDE (CO₂)

Carbon Dioxide (CO₂) is a greenhouse gas emitted by means of various activities or actions occurring. CO₂ is naturally present in the environment and as part of the carbon cycle (process whereby carbon is circulated in the atmosphere, water bodies, vegetation and animals) is released and captured on a cyclical basis. Activities undertaken by humans often increase the emission of CO₂ which was captured or stored in natural environments (such as fossilised fuels utilised).

The effect of increased levels of the pollutant can lead to adverse environmental impacts. On a local scale, increased CO₂ is unlikely to have a major impact, however when considered on the global scale cumulative impact, it leads to a global increase in temperatures due to the effect of *capturing* and retention of energy in the atmosphere. On a personal, human health related level, the effect of exposure could lead to a reduction in available oxygen for respiration which can lead to suffocation or lack of oxygen impacts.

5.3.4 VOLATILE ORGANIC COMPOUNDS (VOC's)

Volatile Organic Compounds (VOCs) are organic chemicals that easily vaporise at room temperature and are colourless. VOCs are released from vehicle exhaust gases either as unburned fuels or as combustion products, and are also emitted by the evaporation of solvents and motor fuels. Short-term exposure to VOCs can cause eye and respiratory tract irritation and damage, headaches, dizziness, visual disorders, fatigue, loss of coordination, allergic skin reactions, nausea, and memory impairment, damage the bone marrow and even death. Long-term exposure to high levels of VOCs has been linked to an increase in occurrence of leukaemia. VOCs can also cause damage to the liver, kidneys and central nervous system.

| | | | |
|--------------|-------------------|--|-------------------|
| Document No: | SPS-AQB-063-19_20 | Air Quality Baseline Assessment | Client Restricted |
| Revision: | 0.0 | Pioneer Minerals (Pty) Ltd: Farm Remhoogte 152 | Author: A Botha |
| Date: | June 2019 | | 13 |

Trace gases and aerosols impact climate through the effect on the radiative balance of the earth. Trace gases such as greenhouse gases absorb and emit infrared radiation which raises the temperature of the earth's surface causing the enhanced greenhouse effect. Aerosol particles have a direct effect by scattering and absorbing solar radiation and an indirect effect by acting as cloud condensation nuclei.

Atmospheric aerosol particles range from dust and smoke to mists, smogs and haze (IPCC, 2001). Smogs and haze are common in regions where certain geographic features, such as mountains, and weather conditions, such as temperature inversions, contribute to the trapping of air pollutants (Kumar and Mohan, 2002). Smogs and haze also contribute to visibility degradation through the absorption and scattering of radiation by gases and particulates (Elsom, 1996).

Other environmental impacts associated with air pollution include loss of biodiversity, damage to sensitive environments and acid rain. Acid rain is a general term referring to a combination of wet and dry deposition from the atmosphere containing elevated amounts of sulphuric and nitric acid. Acid rain occurs when gases, primarily NO₂, SO₂, CO (emitted from industrial and natural processes) dissolve in water, either in the atmosphere or on the ground, to form various acids (Metah, 2010). This increases the acidity of soil and affects the chemical balance of dams and rivers. Acid rain can also cause damage to buildings and infrastructure, and has become an even more serious concern over the last two decades (Fan *et al.*, 2010).

5.3.5 ASBESTOS

The term asbestos designates a group of naturally occurring fibrous serpentine or amphibole minerals, the principal types of asbestos are: Chrysotile, Crocidolite, Amosite, Anthophyllite, Tremolite and Actinolite. Three types of asbestos minerals (Amosite, Chrysotile and Crocidolite) were commonly mined in South Africa regarding the Limpopo, Northern Cape and Mpumalanga provinces. The Department of Environmental Affairs (DEA) explains that asbestos fibres are released into the air through disturbance of asbestos-containing material, demolition work, building or home maintenance, repair and remodelling. According to the WHO (2014) asbestos is one of the most important occupational carcinogens, causing about half of the deaths from occupational cancer of the deaths from occupational cancer.

Adverse health effects from exposure to asbestos remains a serious concern to miners, mining community and residents of buildings that contain asbestos as well as in communities where the soil is contaminated with asbestos. Miners and mining communities are at the greatest risk of catching asbestos-related diseases, but are better prepared to limit their exposure to asbestos than home owners who are unknowingly inhaling asbestos. The following diseases and health effects are associated with asbestos:

Asbestosis

- Scarring of lung tissue reducing ability to take oxygen.

| | | | |
|--------------|-------------------|--|-------------------|
| Document No: | SPS-AQB-063-19_20 | Air Quality Baseline Assessment | Client Restricted |
| Revision: | 0.0 | Pioneer Minerals (Pty) Ltd: Farm Remhoogte 152 | Author: A Botha |
| Date: | June 2019 | | 14 |

- Dose related disease repeated regular exposures.
- Debilitating disease and can be fatal.
- Latency period 10-20 years

Lung Cancer

- It is fatal especially if not caught in its early stages.
- May occur with low levels of exposure such as those that occur in the general environment.
- Higher lung cancer rates are linked to all three types of commercially mined asbestos.

Malignant Mesothelioma

- Develops after exposure to asbestos in the workplace:
 - Industrial settings
 - Shipyards
 - Auto repair shops
 - Old houses, schools and public buildings.

| | | | |
|--------------|-------------------|--|-------------------|
| Document No: | SPS-AQB-063-19_20 | Air Quality Baseline Assessment | Client Restricted |
| Revision: | 0.0 | Pioneer Minerals (Pty) Ltd: Farm Remhoogte 152 | Author: A Botha |
| Date: | June 2019 | | 15 |

5.4 ENVIRONMENTAL IMPACT

Trace gases and aerosols impact the climate through the effect on the radiative balance of the earth. Trace gases such as greenhouse gases absorb and emit infrared radiation which raises the temperature of the earth's surface causing the enhanced greenhouse effect. Aerosol particles have a direct effect by scattering and absorbing solar radiation and an indirect effect by acting as cloud condensation nuclei. Atmospheric aerosol particles range from dust and smoke to mists, smogs and haze (IPCC, 2001). Smogs and haze are common in regions where certain geographic features, such as mountains, and weather conditions, such as temperature inversions, contribute to the trapping of air pollutants (Kumar and Mohan, 2002). Smogs and haze also contribute to visibility degradation through the absorption and scattering of radiation by gases and particulates (Elsom, 1996).

Other environmental impacts associated with air pollution include loss of biodiversity, damage to sensitive environments and acid rain. Acid rain is a general term referring to a combination of wet and dry deposition from the atmosphere containing elevated amounts of sulphuric and nitric acid. Acid rain occurs when gases, primarily NO₂, SO₂, CO (emitted from industrial and natural processes) dissolve in water, either in the atmosphere or on the ground, to form various acids (Metah, 2010). This increases the acidity of soil and affects the chemical balance of dams and rivers. Acid rain can also cause damage to buildings and infrastructure, and has become an even more serious concern over the last two decades (Fan et al., 2010).

| | | | |
|--------------|-------------------|--|-------------------|
| Document No: | SPS-AQB-063-19_20 | Air Quality Baseline Assessment | Client Restricted |
| Revision: | 0.0 | Pioneer Minerals (Pty) Ltd: Farm Remhoogte 152 | Author: A Botha |
| Date: | June 2019 | | 16 |

5.5 IDENTIFYING EMISSION SOURCES FROM PLANNED ACTIVITIES

The proposed activities have the ability to generate dust and other air emissions and if uncontrolled, could become a nuisance. Table 1 provides a list of expected activities associated with the planned activities. These activities are used to represent the potential points/localities of air pollution sources.

Table 1: Description of planned activities and emissions

| ACTIVITY DESCRIPTION | | POSSIBLE EMISSIONS FROM ACTIVITIES |
|--|--------------------------------|--|
| Paved roads, Tar Roads and Break Ramps | | Vehicle emissions (CO, CO ₂ , VOC), particulate matter and dust deposition. |
| Mobile Equipment for trenching and pits (Front End Loader, Bulldozer, and ADT) | | Particulate matter, CO, CO ₂ and VOC |
| Stationary Equipment (Processing Plant) | | Particulate Matter. |
| Waste management | | Particulate Matter and offensive odours. |
| Stockpiling of materials (including Slimes Dam) | | Particulate Matter. |
| Earthworks (Pits and Trenching) | | Particulate Matter. |
| | Medium to high expected impact | |
| | Low to medium expected impact | |
| | None to low expected impact | |

6 SAMPLING

6.1 ACTIVE INDICATIVE SAMPLING

Results obtained from active indicative sampling is evaluated against air quality limits for common pollutants (SANS 1929:2011) as in Table 2 below. Out of the set of possible pollutants measured during the study, there are limits as set out under SANS 1929:2011. See below:

- Particulate Matter (PM₁₀): 0.12 mg/m³; and
- Carbon Monoxide: 30 mg/m³.

For the carbon monoxide, no set limit is provided. However, the verified global average is used as a limit and limit is thus set at:

- CO₂: 350 ppm.

Table 2: Ambient air quality limits for common pollutants (SANS 1929:2011) (Limit Values in µg/m³)

| Pollutant | Averaging Period | Limit Value | Frequency of Exceedance | Compliance Date |
|--|--------------------------|-----------------|-------------------------|------------------------------|
| Sulphur dioxide SO ₂ | 10 minute average | 500 (191) | 526 | Immediate |
| | 1-hr average | 350 (134) | 88 | Immediate |
| | 24-hr average | 125 (48) | 4 | Immediate |
| | Annual average | 50 (19) | 0 | Immediate |
| Nitrogen dioxide NO ₂ | 1-hr average | 200 (106) | 88 | Immediate |
| | Annual average | 40 (21) | 0 | Immediate |
| Carbon monoxide CO | 1-hr average | 30 000 (26 000) | 88 | Immediate |
| | 8-hourly running average | 10 000 (8 700) | 11 | Immediate |
| Ozone O ₃ | 8-hourly running average | 120 (61) | 11 | Immediate |
| Particulate Matter PM10 | 24-hr average | 120 | 4 | Immediate – 31 December 2014 |
| | 24-hr average | 75 | 4 | 1 January 2015 |
| | Annual average | 50 | 0 | Immediate – 31 December 2014 |
| | Annual average | 40 | 0 | 1 January 2015 |
| Lead Pb | Annual average | 0.5 | 0 | Immediate |
| Benzene C ₆ H ₆ | Annual average | 10 (3.2) | 0 | Immediate – 31 December 2014 |
| | Annual average | 5 (1.6) | 0 | 1 January 2015 |

| | | | |
|--------------|-------------------|--|-------------------|
| Document No: | SPS-AQB-063-19_20 | Air Quality Baseline Assessment | Client Restricted |
| Revision: | 0.0 | Pioneer Minerals (Pty) Ltd: Farm Remhoogte 152 | Author: A Botha |
| Date: | June 2019 | | 18 |

7 EMISSION GENERATION

It is important to predict and determine possible areas of emission generation as early identification can help develop mitigation or prevention plans for the specific emission generating activities. A prediction is made possible by using existing examples of emission generating activities on other sites and its effect and measures set in place to mitigate these. As almost all mining activities and related processes are based on the same principle, it is reasonable to assume that the dust fallout for similar activities would be comparable.

From the activities proposed for this project the following can be expected to be activities that can cause or lead to the generation of emissions:

During the Operational phase:

- Vehicle movement;
- Excavation (Trenching and pits);
- Stockpiles; and
- Operational emissions.

By assessing the possible emission generating activities, it can be assumed that a quantifiable amount of emissions will be generated on site and that would possibly require mitigation measures.

| | | | |
|--------------|-------------------|--|-------------------|
| Document No: | SPS-AQB-063-19_20 | Air Quality Baseline Assessment | Client Restricted |
| Revision: | 0.0 | Pioneer Minerals (Pty) Ltd: Farm Remhoogte 152 | Author: A Botha |
| Date: | June 2019 | | 19 |

7.1 PREDICTED AREAS OF INFLUENCE

7.2 Meteorological Data

The possibility of emissions becoming a nuisance is determined by various factors. Specifically, PM₁₀ (dust) is mostly transported by air movement and as such wind and wind intensity can help determine the effective range of travel of pollutants. To determine possible areas that could be affected the wind rose data must be studied and interpreted. The following section provides an interpretation of the areas that could possibly be affected, by assessing the direction the wind is coming from and the areas the wind would deposit transported dust as reasonably expected.

The following graphs provides an insight into the wind conditions versus the downwind area which would be affected during various periods in the 2018 annual period (station from Prieska).

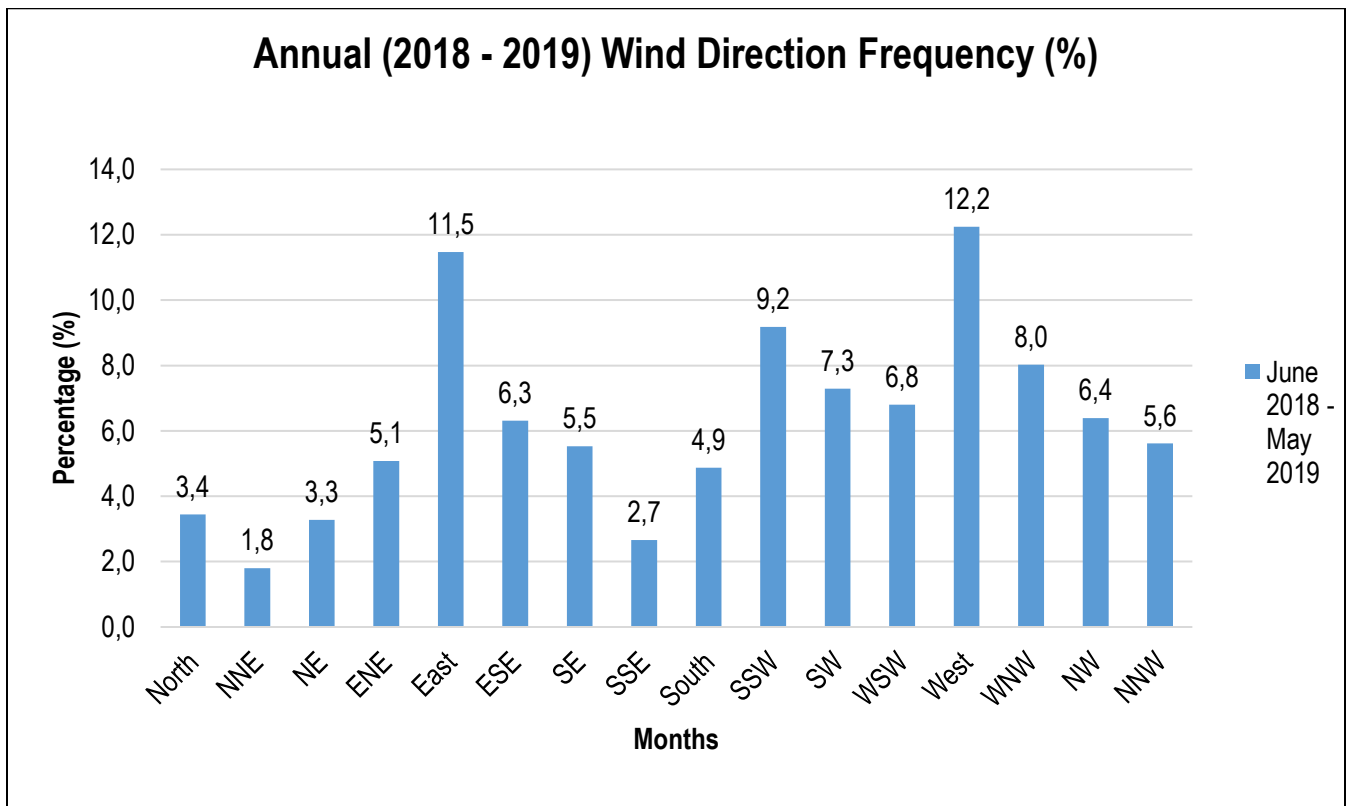


Figure 4: Wind Direction Frequency Average (Prieska)

| | | | |
|--------------|-------------------|--|-------------------|
| Document No: | SPS-AQB-063-19_20 | Air Quality Baseline Assessment | Client Restricted |
| Revision: | 0.0 | Pioneer Minerals (Pty) Ltd: Farm Remhoogte 152 | Author: A Botha |
| Date: | June 2019 | | 20 |

Wind Direction Frequency: June 2018 to May 2019

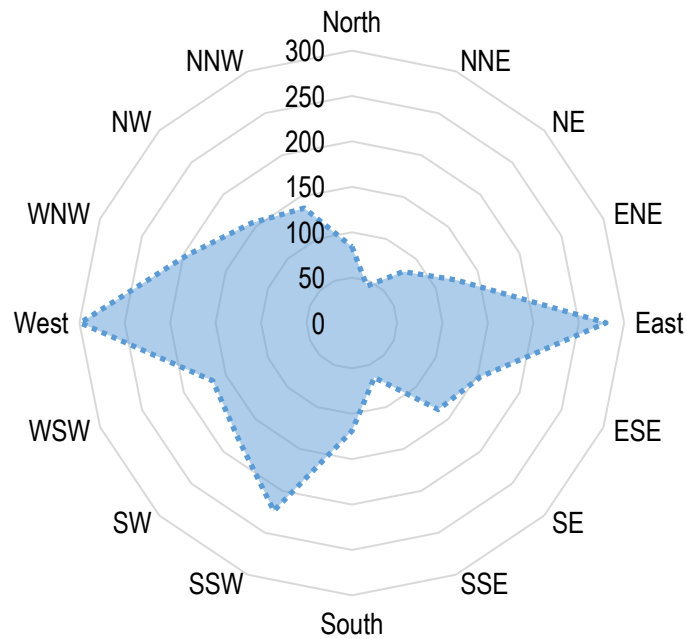


Figure 5: Windrose Diagram (Prieska)

Table 3: Total Rainfall and Average Wind Speeds

| Rainfall and Windspeed Summary: Jun 18 - May 19 | | |
|---|---------------|--------------------|
| Day of Month | Rainfall (mm) | Average Wind Speed |
| Jun-18 | 10,6 | 2,1 |
| Jul-18 | 68,8 | 2,5 |
| Aug-18 | 16,4 | 3,3 |
| Sep-18 | 40,6 | 3,9 |
| Oct-18 | 3,6 | 4,1 |
| Nov-18 | 8,8 | 4,3 |
| Dec-18 | 4,6 | 3,7 |
| Jan-19 | 5,8 | 3,5 |
| Feb-19 | 12,0 | 2,8 |
| Mar-19 | 0,0 | 2,6 |
| Apr-19 | 0,0 | 2,2 |
| May-19 | 0,0 | 1,9 |
| Total Rainfall | 171,2 | - |

Table 4: Wind direction, strength and areas likely to be affected by dust fallout

| Period | Main Wind Direction | Other Notable Wind Directions | Area Most Likely to Be Affected | Characteristics of Affected Area (Area Where Dust Will Settle) |
|-------------|---------------------|-------------------------------|---|--|
| 2018 - 2019 | W & E | SSW | East, West and north-north eastern areas of the site. | Rural Farm Areas |

From Table 3 & 4 and Figure 4 & 5, it is clear that from the average dominating wind direction data for the Prieska area is from a western and eastern direction. Any activities undertaken should in effect impact on areas to the east and western areas of the activities occurring. Moreover, average wind speeds ranged from a light breeze (1.6 – 3.4 m/s) to gentle breeze (3.4 – 5.4 m/s) throughout the annual period.

7.3 Case Study

Continuous air quality monitoring is conducted throughout the Northern Cape province by the South African Weather Service (SAWS), the Department of Environment and Nature Conservation, as well as active mines which are reported to the Air Quality Officer. The following test results indicative of the actual measured concentrations of emissions were obtained from the Air Quality Baseline Assessment Report compiled by uMoya-NILU Consulting (2017) which includes passive sampling from sites within the area, dated December 2014 to January 2017.

Table 5: Northern Cape Monitoring Results

| Facility | Highest Daily PM10 concentration ($\mu\text{g}/\text{m}^3$) | Highest Daily PM2,5 concentration ($\mu\text{g}/\text{m}^3$) | Average NO2 concentration ($\mu\text{g}/\text{m}^3$) | Average SO2 concentration ($\mu\text{g}/\text{m}^3$) |
|---|---|--|--|--|
| Kimberley | NM | NM | 9,76 | 2,1 |
| De Aar | | | 4,76 | 1,1 |
| Upington | | | 7,86 | 1,03 |
| Namakwa DM | | | 4,26 | 0,73 |
| Kuruman | | | 5,46 | 1,63 |
| Petra Diamonds (Finsch Mine) | 45 | 13 | NM | |
| Tshipi Borwa Mine | 542 - 809 | NM | NM | |
| Total Mining Emissions in tonnes per annum | 34 259 | 22 315 | NM | |

*NM – Not measured

From the results obtained, it is evident ambient particulate concentrations of mines varies considerably and is dependent on the nature of the mining activities, the dust control measures, as well as the meteorology. Overall pollutant concentrations associated with combustion (SO_2 , NO_2 and CO_2) are low within the Northern Cape, while particulate concentrations are relatively high in some mine vicinities.

| | | | |
|--------------|-------------------|--|-------------------|
| Document No: | SPS-AQB-063-19_20 | Air Quality Baseline Assessment | Client Restricted |
| Revision: | 0.0 | Pioneer Minerals (Pty) Ltd: Farm Remhoogte 152 | Author: A Botha |
| Date: | June 2019 | | 22 |

8 LIMITATIONS AND ASSUMPTIONS

Due to the timeframe and nature associated with the study, it can be reasonably assumed that only a portion of the actual conditions can be assessed due to a multitude of variables that can affect the ambient air quality. As a result, a twofold approach is used where actual measured data is interpolated with worst case scenarios to determine the current and possible future effect of and on the area under investigation.

It is expected that the area will be further developed. It is therefore vital that the area be assessed in terms of human habitation (presently and in future) so that the current activities identified will not give rise to an unhealthy amount of air pollutant emissions.

The proponent should take heed of all recommendations in this report (and other similar reports) and implement any and all preventative measures. Where authorised emissions of certain pollutants can't be prevented, the proponent must have adequate mitigation measures in place.

Limitations to the study includes, but may not be limited to the following:

- The once-off nature of the assessment cannot account for seasonal or periodical changes in ambient air quality.
- To avoid unsustainable and continued monetary expenditure, only a reasonable amount of time could be allocated for the study. However, every effort to ensure the scientific integrity and objectiveness of the study was taken to present the most accurate results that are as representative of actual environmental conditions as possible.

9 RESULTS

9.1 ACTIVE INDICATIVE SAMPLING

Active indicative sampling is conducted to establish if there are air pollution sources that are emitting such an amount of air pollutants that it can have a negative effect on the environment and/or people. Active indicative sampling is conducted over a minimal timeframe and is just a snapshot of the current situation. Due to the nature of these parameters, it can have negative effects on human health if found in high concentrations. Carbon Dioxide, Carbon Monoxide, Volatile Organic Compounds and PM10 (particulate matter) make out the parameters that are tested for.

Volatile Organic Compounds (VOC's) and Carbon Dioxide (CO₂) are not regulated by the National Environmental Air Quality Act (NEM: AQA, 2004), thus there are no set standards that regulate these parameters.

| | | | |
|--------------|-------------------|--|-------------------|
| Document No: | SPS-AQB-063-19_20 | Air Quality Baseline Assessment | Client Restricted |
| Revision: | 0.0 | Pioneer Minerals (Pty) Ltd: Farm Remhoogte 152 | Author: A Botha |
| Date: | June 2019 | | 23 |

The effects of inhaling particulate matter (PM₁₀) have been widely studied in humans and animals and include asthma, lung cancer, cardiovascular issues, and premature death. The size of the particle is a main determinant of where in the respiratory tract the particle will come to rest when inhaled. Because of their small size, particles in the order of ~10 microns or less can penetrate the deepest part of the lungs. Larger particles are generally filtered in the nose and throat and do not cause problems, but particulate matter smaller than about 10 micrometres, referred to as PM₁₀, can settle in the bronchi and lungs and cause health problems. The 10-micrometre size does not represent a strict boundary between respirable and non-respirable particles, but has been agreed upon for monitoring of airborne particulate matter by most regulatory agencies.

Carbon dioxide (CO₂) in earth's atmosphere is considered a trace gas currently occurring at an average concentration of about 390 parts per million. Carbon monoxide (CO) is a colourless, odourless, and tasteless gas that is slightly lighter than air. It is toxic to humans and animals when encountered in higher concentrations. Carbon monoxide is produced from the partial oxidation of carbon-containing compounds; it forms when there is not enough oxygen to produce carbon dioxide (CO₂).

Table 6: CO concentrations in the atmosphere

| Concentration | Source |
|-----------------|--|
| 0.1 ppmv | Natural atmosphere level |
| 0.5 to 5 ppmv | Average level in homes |
| 5 to 15 ppmv | Near-properly adjusted gas stoves in homes, modern vehicle exhaust emissions |
| 17 ppmv | Atmosphere of Venus |
| 100 to 200 ppmv | Exhaust from automobiles in the Mexico City central area |
| 700 ppmv | Atmosphere of Mars |
| 5,000 ppmv | Exhaust from a home wood fire |
| 7,000 ppmv | Undiluted warm car exhaust without a catalytic converter |

VOCs are numerous, varied and ubiquitous. They include both human-made and naturally occurring chemical compounds. Most scents or odours are caused or carried by VOCs. Some VOCs are dangerous to human health or cause harm to the environment.

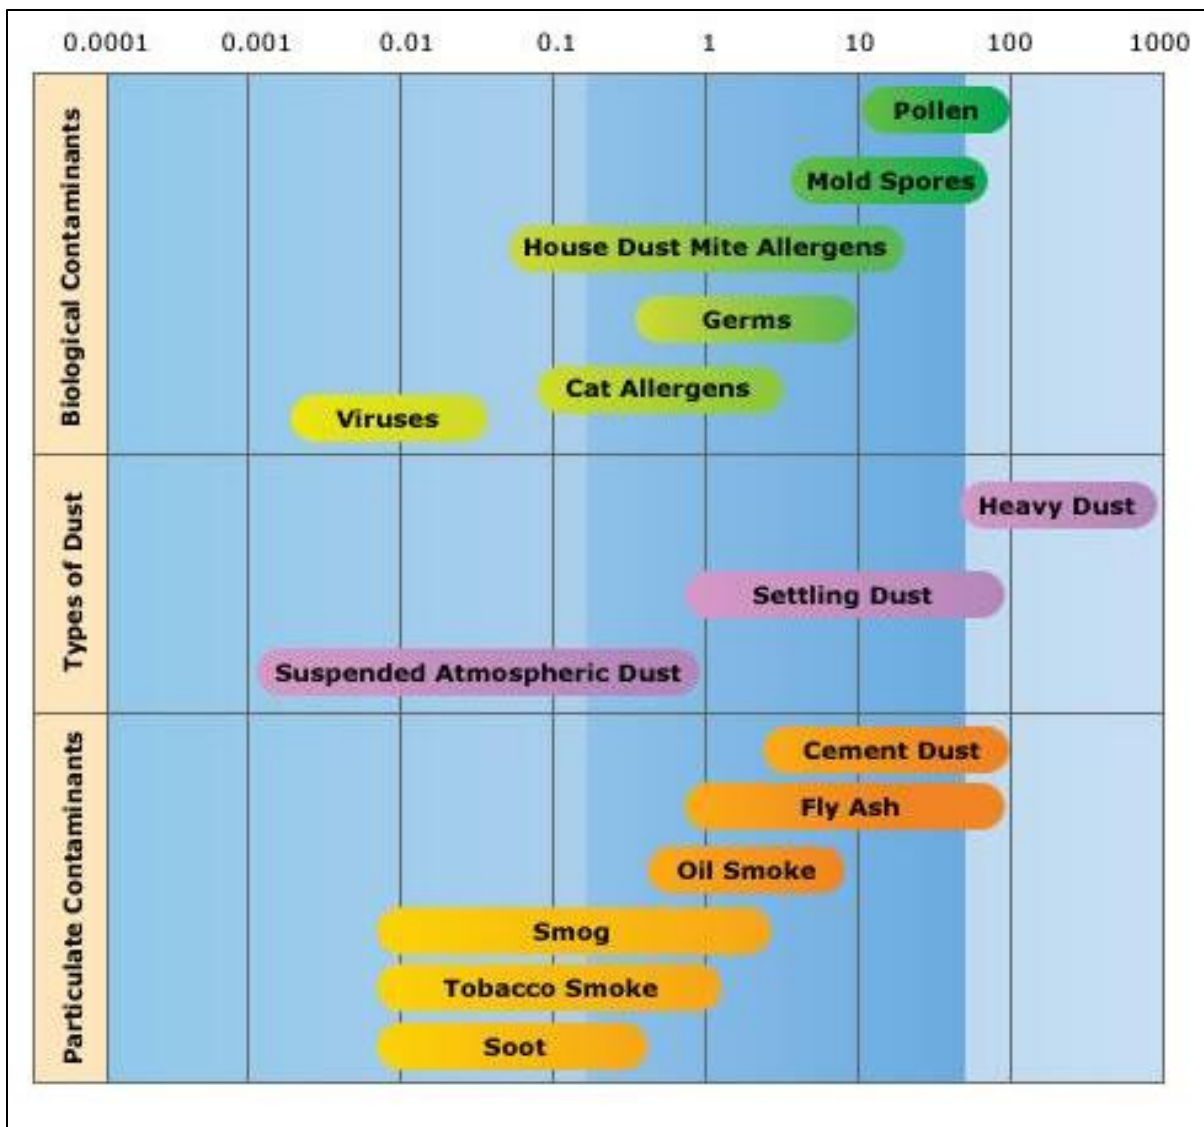


Figure 6: Particulate Matter

9.2 ACTIVE INDICATIVE SAMPLING RESULTS

Table 7: Active Indicative Sampling Results

| Farm Remhoogte 152 Air Quality Data | | | | | |
|-------------------------------------|-----------------------|----------|---------------------------------------|-----------|------------|
| ID | CO ₂ (ppm) | CO (ppm) | PM ₁₀ (mg/m ³) | VOC (ppm) | Temp. (°C) |
| AQ 1 | 412 | 0 | 0,006 | 0,00 | 26,9 |
| AQ 2 | 417 | 0 | 0,037 | 0,00 | 27,0 |
| AQ 3 | 421 | 0 | 0,005 | 0,00 | 27,6 |
| AQ 4 | 416 | 0 | 0,009 | 0,00 | 27,6 |
| AQ 5 | 407 | 0 | 0,007 | 0,00 | 27,4 |
| AQ 6 | Inaccessible | | | | |
| AQ 7 | 403 | 0 | 0,007 | 0,00 | 26,9 |
| AQ 8 | 422 | 0 | 0,003 | 0,00 | 26,6 |
| AQ 9 | Inaccessible | | | | |
| AQ 10 | 414 | 0 | 0,005 | 0,00 | 26,6 |
| AQ 11 | 419 | 0 | 0,071 | 0,00 | 27,6 |
| AQ 12 | 418 | 0 | 0,009 | 0,00 | 27,6 |
| AQ 13 | 370 | 0 | 0,154 | 0,40 | 27,7 |
| AQ 14 | Inaccessible | | | | |
| AQ 15 | 424 | 0 | 0,008 | 0,00 | 28,7 |
| AQ 16 | 390 | 0 | 0,007 | 0,30 | 27,1 |
| AQ 17 | 408 | 0 | 0,010 | 0,00 | 29,7 |
| AQ 18 | 408 | 0 | 0,006 | 0,10 | 27,3 |
| AQ 19 | 390 | 0 | 0,016 | 0,20 | 28,4 |
| AQ 20 | 320 | 0 | 0,041 | 0,40 | 22,8 |
| AQ 21 | 339 | 0 | 0,019 | 0,10 | 25,6 |
| AQ 22 | 353 | 0 | 0,010 | 0,20 | 26,1 |
| AQ 23 | 341 | 0 | 0,007 | 0,00 | 15,4 |
| Average | 394,60 | 0,00 | 0,02 | 0,09 | 26,53 |
| Minimum | 320,00 | 0,00 | 0,00 | 0,00 | 15,40 |
| Maximum | 424,00 | 0,00 | 0,15 | 0,40 | 29,70 |

| | | | |
|--------------|-------------------|--|-------------------|
| Document No: | SPS-AQB-063-19_20 | Air Quality Baseline Assessment | Client Restricted |
| Revision: | 0.0 | Pioneer Minerals (Pty) Ltd: Farm Remhoogte 152 | Author: A Botha |
| Date: | June 2019 | | 26 |

9.3 AIR QUALITY GRAPHS

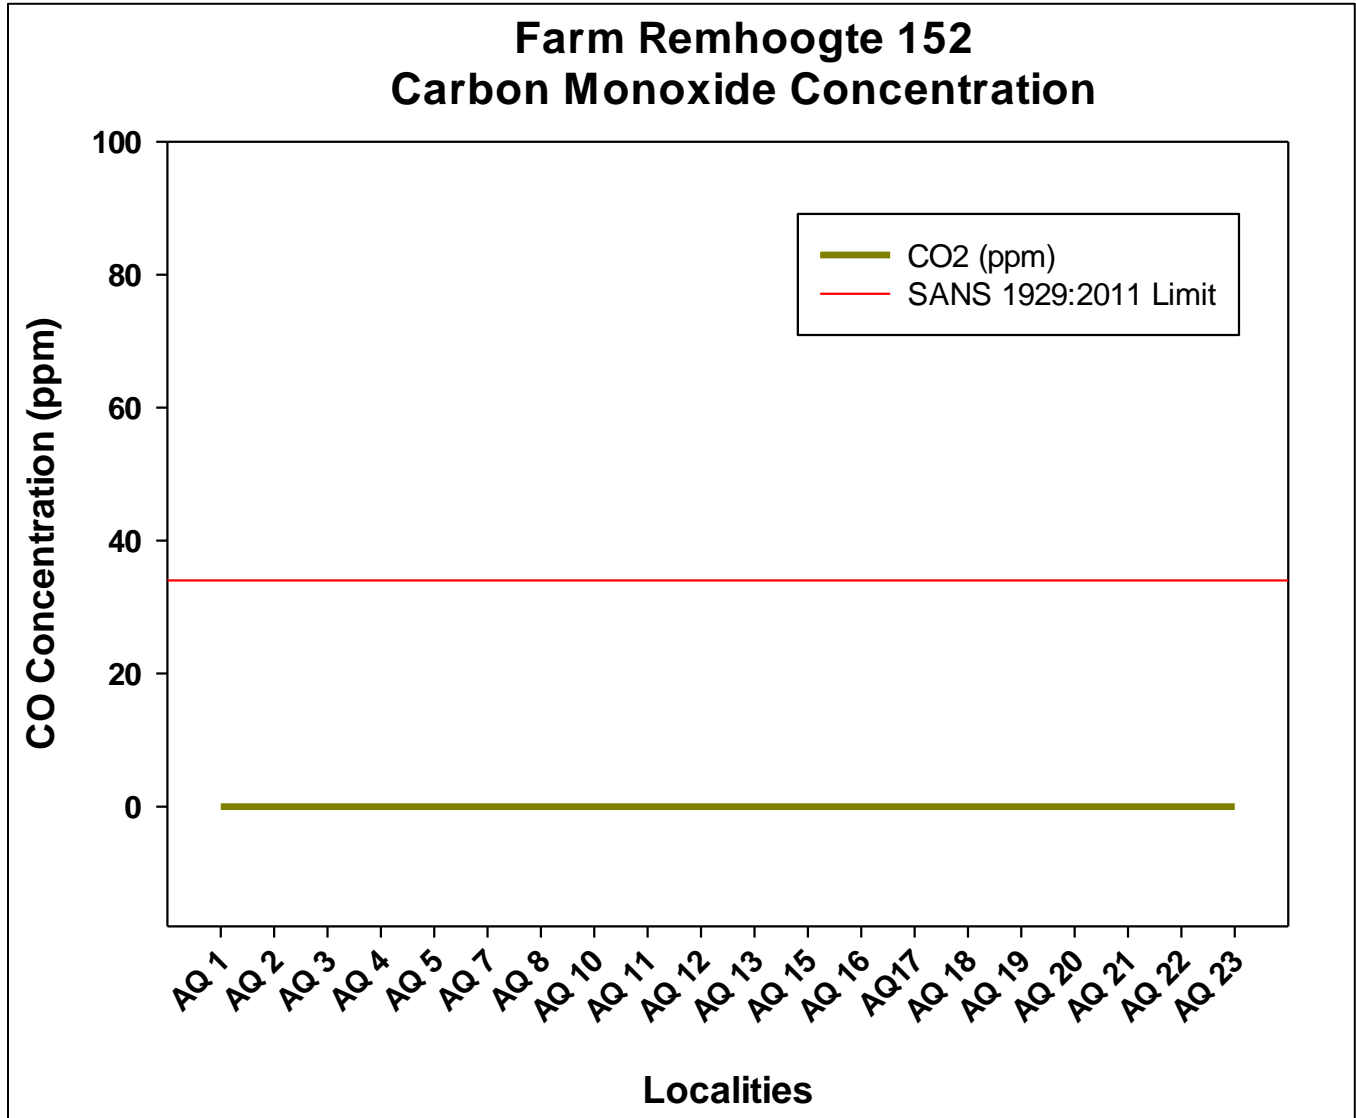


Figure 7: Measured CO concentrations

| | | | |
|--------------|-------------------|--|-------------------|
| Document No: | SPS-AQB-063-19_20 | Air Quality Baseline Assessment | Client Restricted |
| Revision: | 0.0 | Pioneer Minerals (Pty) Ltd: Farm Remhoogte 152 | Author: A Botha |
| Date: | June 2019 | | 27 |

Farm Remhoogte 152 Carbon Dioxide Concentration

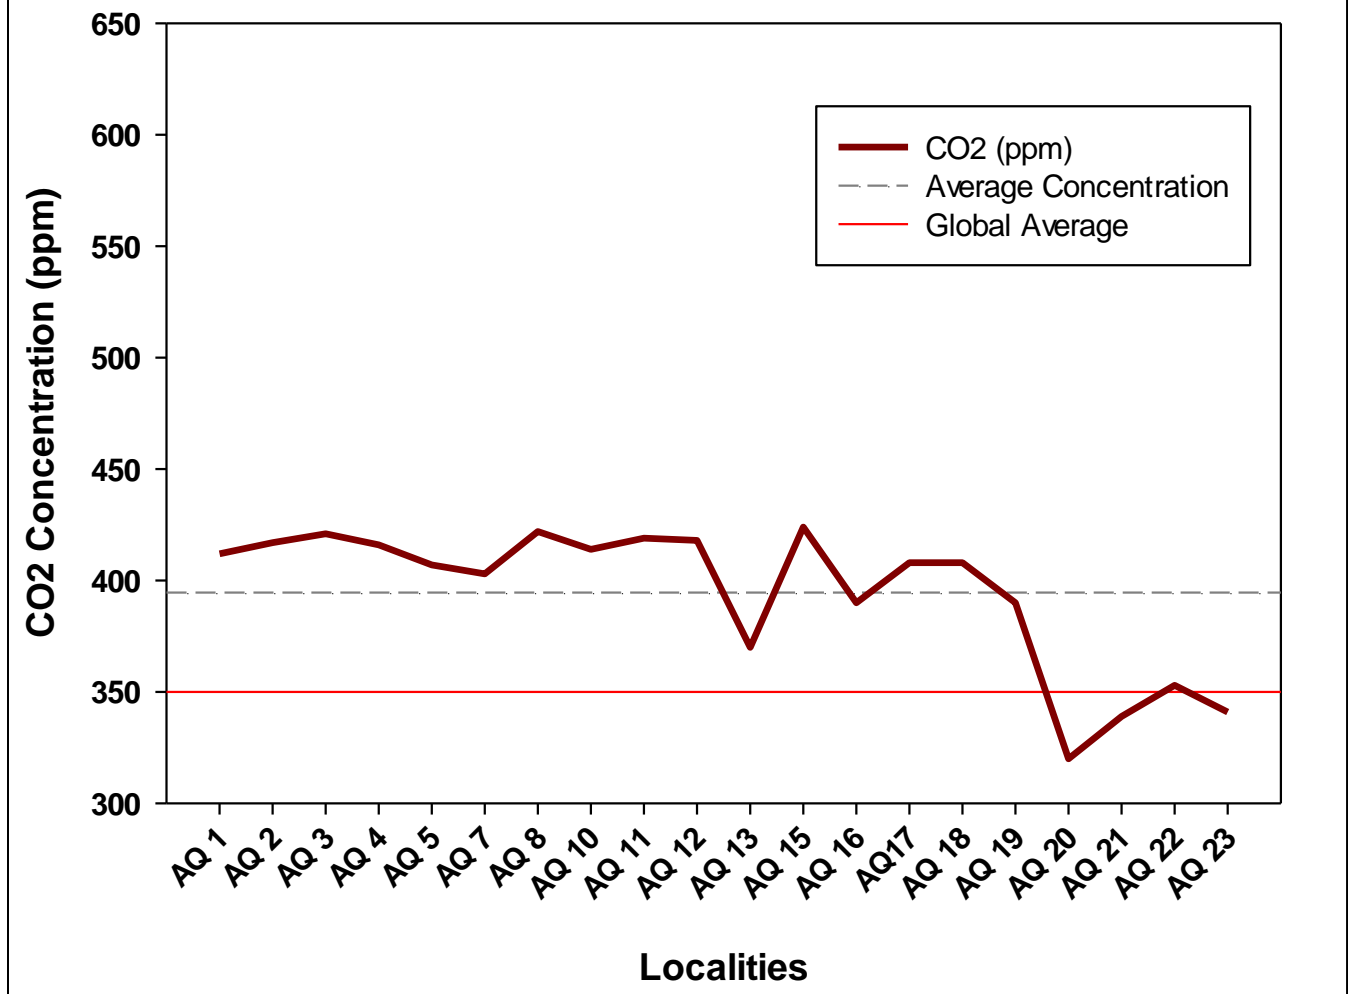


Figure 8: Measured CO₂ concentrations

| | | | |
|--------------|-------------------|--|-------------------|
| Document No: | SPS-AQB-063-19_20 | Air Quality Baseline Assessment | Client Restricted |
| Revision: | 0.0 | Pioneer Minerals (Pty) Ltd: Farm Remhoogte 152 | Author: A Botha |
| Date: | June 2019 | | 28 |

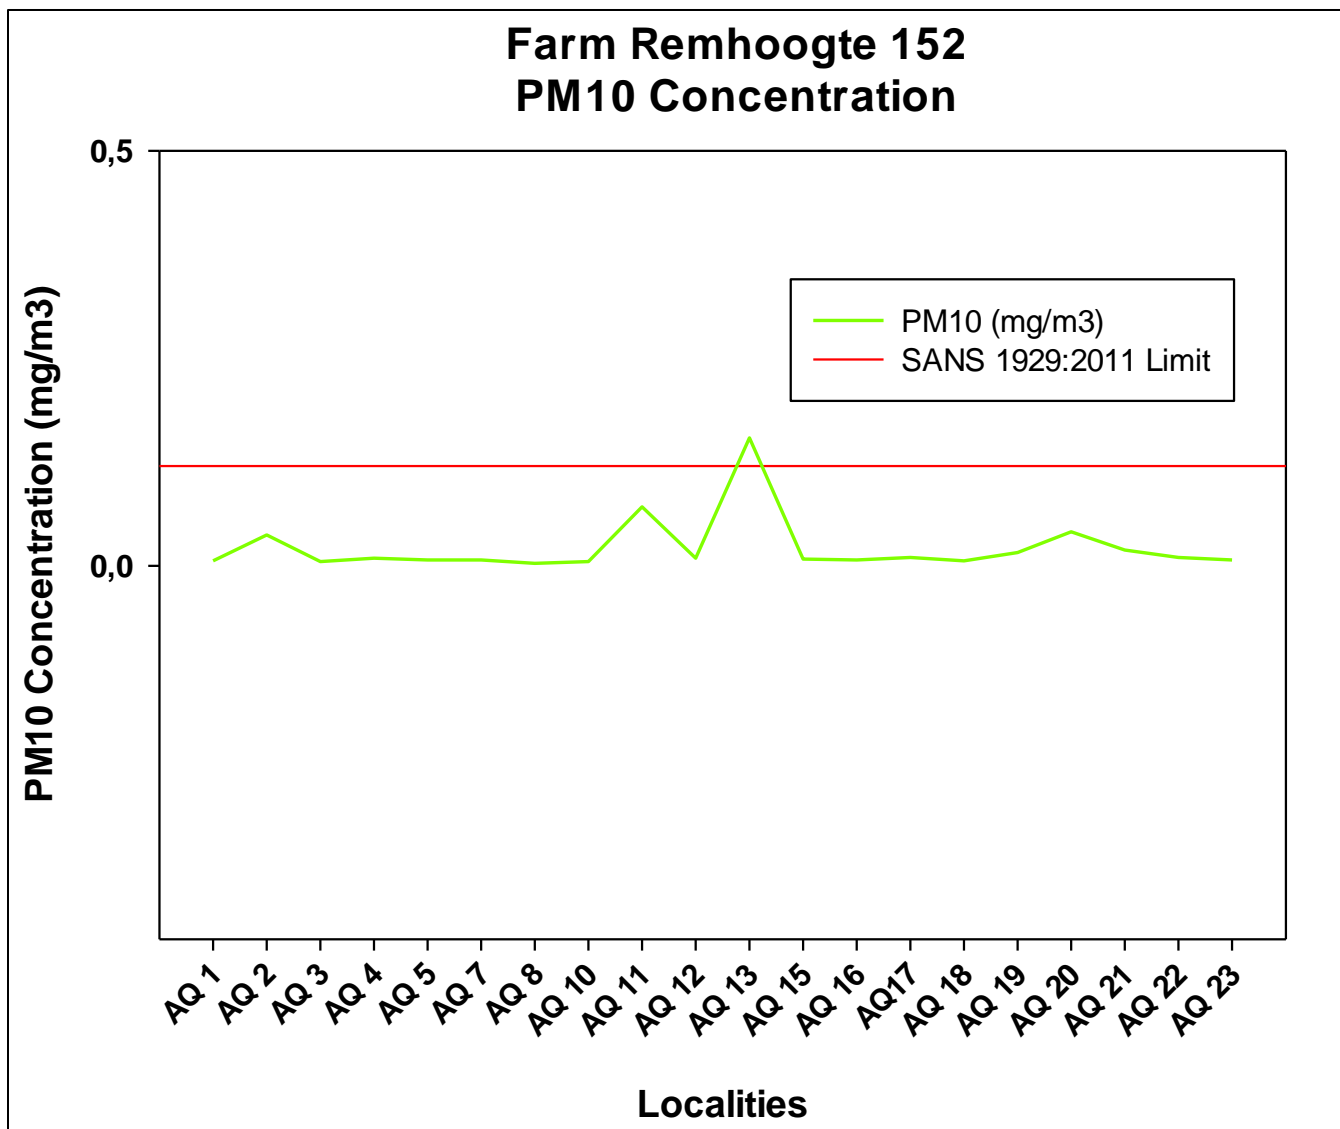


Figure 9: Measured PM10 concentrations

| | | | |
|--------------|-------------------|--|-------------------|
| Document No: | SPS-AQB-063-19_20 | Air Quality Baseline Assessment | Client Restricted |
| Revision: | 0.0 | Pioneer Minerals (Pty) Ltd: Farm Remhoogte 152 | Author: A Botha |
| Date: | June 2019 | | 29 |

Farm Remhoogte 152 Volatile Organic Compounds Concentration

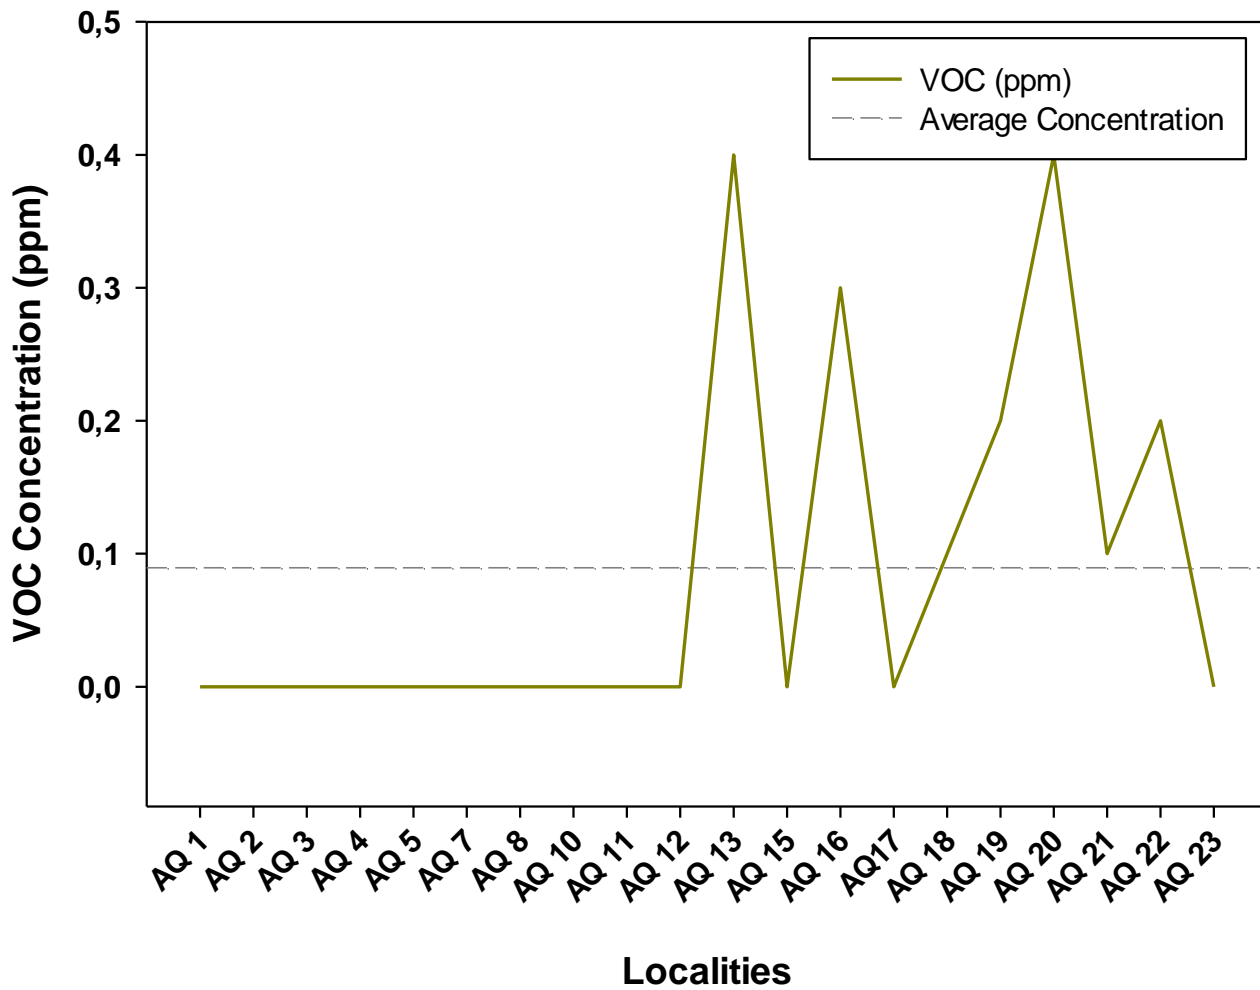


Figure 10: Measured VOC concentrations

| | | | |
|--------------|-------------------|--|-------------------|
| Document No: | SPS-AQB-063-19_20 | Air Quality Baseline Assessment | Client Restricted |
| Revision: | 0.0 | Pioneer Minerals (Pty) Ltd: Farm Remhoogte 152 | Author: A Botha |
| Date: | June 2019 | | 30 |

9.4 RESULTS – DISCUSSION

Active indicative sampling was undertaken on and around the Remhoogte Farm 152 prospecting right area. Sensitive receptors included AQ 2 (Offices) and AQ 13 (residential farm house and workforce housing). The results are provided in Table 7 and Figure 7 to 10. Results of the active indicative sampling indicated the following for the assessment:

- Carbon Monoxide:

CO was not detected at any of the monitoring points. This is an ideal result indicating that a definitive impact is not currently present in and around the proposed activity.

- Carbon Dioxide:

All of the sampling localities recorded carbon dioxide during the June 2019 monitoring period. All the majority of the measured concentrations were above the global average atmospheric concentration of 350 ppm (parts per million), it should be noted that currently operations are not present and these concentrations are representative of the current non-disturbed ambient air quality conditions. Based the ambient CO₂ concentrations, localities AQ 20, AQ 21 and AQ 23 presented ideal conditions, recording below the global average atmospheric concentration. An average value of 394.60 ppm CO₂ was calculated based on all of the measured concentrations within the study area, while the concentrations ranged from a minimum of 320 ppm at AQ 20 (northern monitoring point) to a maximum of 424 ppm at AQ 15 (southwest of the northern extension boundary). From the results it is evident that higher CO₂ concentrations (> 400 ppm) were present at the southern extension boundary.

- Particulate Matter (PM₁₀):

Particulate matter was measured at all of the monitoring locations during the site assessment. A theoretic calculation is applied based on each individual monitoring concentration to determine compliance with the SANS 1929:2011 24-hour limit of 75 mg/m³ through the following: The value (measured over 5 minutes) is multiplied by 12 (to get a theoretic value per hour) and finally multiplied by 24 (to get a theoretic value for 24 hours). Based on the calculation, all of the monitoring localities recorded below the set 24-hour limit. The highest recorded PM₁₀ value was measured at AQ 13 which is situated near sensitive receptors (residential housing) and directly adjacent to the main internal road of the area, which may contribute to the higher concentrations measured. All remaining localities revealed extremely low concentrations during the site assessment (based on a 24-hour cycle) ranging from 0.864 mg/m³ to 20.448 mg/m³. All localities recorded ideal concentrations presenting minimal fine dust generation in the vicinity of the Remhoogte Extension study areas.

| | | | |
|--------------|-------------------|--|-------------------|
| Document No: | SPS-AQB-063-19_20 | Air Quality Baseline Assessment | Client Restricted |
| Revision: | 0.0 | Pioneer Minerals (Pty) Ltd: Farm Remhoogte 152 | Author: A Botha |
| Date: | June 2019 | | 31 |

- Volatile Organic Compounds:

When ambient concentrations are considered, volatile organic compounds were measured at seven monitoring points which included:


- AQ 13 which is located adjacent to the main internal road and residential area – 0.4 ppm;
- AQ 16 situated within the northern extension area, south of the farming plantation – 0.3 ppm;
- AQ 18 within the northern extension area, southeast of the farming plantation – 0.1 ppm
- AQ 19 which is located within the northern extension area, north of AQ 18 – 0.2 ppm;
- AQ 20 situated north of the northern extension boundary at the spill-point farming area – 0.4 ppm;
- AQ 21 located north of the northern extension boundary – 0.1 ppm; and
- AQ 22 which is located northeast of the northern extension boundary – 0.2 ppm.

The presence of volatile organic compounds may be attributed to several activities and sources including evaporation of solvents and/or motor fuels, natural sources as well as the from current vehicle activity. The most common VOC's specifically measured for are methane (CH₄) and ammonia (NH₃). As fine dust is known to carry odours and serve as binding particles of VOC's, a possible relationship between VOC and fine dust emissions may exist. The presence of VOC's at AQ 13 warrants a potential concern to sensitive receptors as this area.

- Asbestos:

The microscopy photos and results are presented within the below table. The sampled 37 mm MCE filter at monitoring locality AQ 23 did not record the presence of asbestos fibres.

Table 8: Identification of Asbestos Fibres in Bulk Material
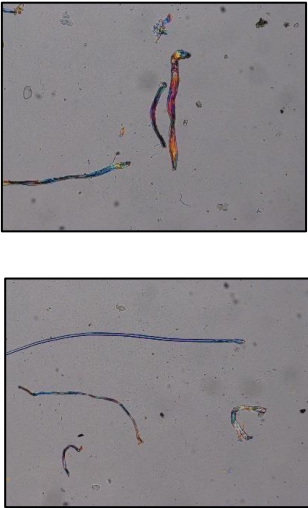
| ID | Identification | Result |
|------------|---|---|
| Bas 620/19 |  | Negative, asbestos fibres not detected. |

10 FINDINGS

From the active indicative sampling and meteorological data obtained, exceedances may be present within the construction and operational phase in terms of dust generation within the activity boundaries. From the assessment, the measured parameters are currently representative of baseline conditions where windblown particulates may present a problem within the prospecting activity. The result/s of concern is the concentration of volatile organic compounds which are currently present at several of the monitoring localities. A possible relationship between fine dust dispersion and its aid in spreading VOC's is recommended for investigation.

Impacts are likely to be largely local and centralised within the site boundaries, while significant off-site impacts are not expected with regards to the proposed activities. It should be mentioned that an estimation of the impact distance is difficult to determine in terms of the baseline assessment and this can be investigated in terms of a full air quality impact assessment.

| | | | |
|--------------|-------------------|--|-------------------|
| Document No: | SPS-AQB-063-19_20 | Air Quality Baseline Assessment | Client Restricted |
| Revision: | 0.0 | Pioneer Minerals (Pty) Ltd: Farm Remhoogte 152 | Author: A Botha |
| Date: | June 2019 | | 33 |

11 MITIGATION AND POLLUTION PREVENTION MEASURES

As there is a very high likelihood of dust generation from the proposed activities, mitigation measures are provided. The following tables propose preventative air quality management measures, as required.

Table 9: Proposed Mitigation Measures

| Aspect: Stakeholder Communication | |
|---|--|
| 1 | Implement a programme of stakeholder communication that includes community engagement before and during work undertaken on site. |
| 2 | Provide a complaint register on site where complaints can be made. This register should enable effective communication of complaints where these are reasonably addressed. |
| 3 | Clearly display the contact details of the environmental site office and manager at the site entrance. |
| Aspect: Dust Management | |
| 4 | Implement and maintain a Dust and Emission Management Plan which provides clear details on preventing, maintaining and improving the air quality in terms of site-specific activities. This plan could possibly incorporate a dust fallout monitoring programme should it be evident that dust emissions is a problem. |
| Aspect: Site Management | |
| 5 | All complaints should be logged in the complaints register and should be available on the site at all times. All complaints regarding air quality should be adequately investigated and actions taken to reduce the impact in a timely manner should it be required. |
| 6 | Note must be taken of incidents that cause air emissions and this must be recorded to ensure that these are resolved and prevented from reoccurring. |
| Aspect: Monitoring | |
| 7 | Weekly site inspections should be undertaken in the vicinity of sensitive receptors. Records should be made of these routine inspections. |
| 8 | Should activities be undertaken during dry and windy conditions, special focus must be taken on the impact and results of the conditions to ensure that minimal impact is occurring. |
| Aspect: Preparing and maintaining the site | |
| 9 | Plan the site layout in such a manner as to ensure that emission generating activities occur as far as possible from sensitive receptors. Make use of site offices and large natural barriers. |
| 10 | Should the conditions require it, erect screens and barriers around the sensitive receptors. |
| 11 | Ensure that all areas, fencing, barriers and scaffolding is kept clear of debris and dust. |
| 12 | Remove any accumulating matter that could serve as emission generator from the site as soon as possible. |

| | | | |
|--------------|-------------------|--|-------------------|
| Document No: | SPS-AQB-063-19_20 | Air Quality Baseline Assessment | Client Restricted |
| Revision: | 0.0 | Pioneer Minerals (Pty) Ltd: Farm Remhoogte 152 | Author: A Botha |
| Date: | June 2019 | | 34 |

| Aspect: Operating vehicle/machinery and sustainable travel | |
|---|---|
| 13 | Ensure that all vehicles are maintained in good working condition and that they are services on regular intervals. |
| 14 | Ensure that all vehicles are switched off when stationary – no vehicles should be idling for extended period. |
| 15 | Avoid the use of diesel- or petrol-powered generators and use mains electricity or battery powered equipment where practicable. |
| 16 | Impose and regulate a speed limit of 30 km/h on the site at all times. |
| Aspect: Operations | |
| 17 | Only use cutting, grinding or sawing equipment fitted or in conjunction with suitable dust suppression techniques such as water sprays or local extraction, e.g. suitable local exhaust ventilation systems. |
| 18 | Ensure an adequate water supply on the site for effective dust/particulate matter suppression/mitigation, using non-potable water where possible. |
| 19 | Ensure equipment is readily available on site to clean any dry spillages, and clean up spillages as soon as reasonably practicable after the event using wet cleaning methods. |
| Waste management | |
| 20 | Only use registered waste carriers to take waste off-site |
| 21 | Avoid bonfires and burning of waste materials. |
| Measures specific to earthworks | |
| 22 | Re-vegetate earthworks and exposed areas/soil stockpiles to stabilise surfaces as soon as practicable. Use Hessian, mulches or tackifiers where it is not possible to re-vegetate or cover with topsoil, as soon as practicable. Only remove the cover in a small area during work and not all at once. |
| Aspect: Measures specific to construction | |
| 23 | Ensure sand and other aggregates are stored in bunded areas and are not allowed to dry out, unless this is required for a particular process, in which case ensure that appropriate additional control measures are in place. |
| 24 | Ensure bulk cement and other fine powder materials are delivered in enclosed tankers and stored in appropriate storage with suitable emission control systems to prevent escape of material and overfilling during delivery. |
| 25 | For smaller supplies of fine power materials ensure bags are sealed after use and stored appropriately to prevent dust. |
| Aspect: Measures specific to track-out | |
| 26 | Use water-assisted dust sweeper(s) on the access and local roads, to remove, as soon as practicable any material tracked out of the site. This may require the sweeper being continuously in use. |
| 27 | Avoid dry sweeping of large areas. |
| 28 | Ensure vehicles entering and leaving sites are covered to prevent escape of materials during transport. |
| 29 | Record all inspections of haul routes and any subsequent action in a site log book. |

| | | | |
|--------------|-------------------|--|-------------------|
| Document No: | SPS-AQB-063-19_20 | Air Quality Baseline Assessment | Client Restricted |
| Revision: | 0.0 | Pioneer Minerals (Pty) Ltd: Farm Remhoogte 152 | Author: A Botha |
| Date: | June 2019 | | 35 |

| | |
|----|---|
| 30 | Install hard surfaced haul routes, which are regularly damped down with fixed or mobile sprinkler systems, or mobile water bowsers and regularly cleaned. |
| 31 | Inspect on-site haul routes for integrity and instigate necessary repairs to the surface as soon as practicable; |
| 32 | Access gates to be located at least 10m from receptors where possible. |

Table 10: General Management Measures

| Aspects | Management action or objective | Responsible Person(s) | Timeframe |
|-----------------------|---|--|------------------------------------|
| Removal of Vegetation | <ul style="list-style-type: none"> Spray areas to be cleared with water. Ensure minimum travel distance between working areas and stockpiles. Ensure that topsoil for stockpiles is sprayed with water before tipping to prevent dust generation. Ensure graded areas are sprayed with water. Minimise the amount of graded areas. Ensure that shortest routes are used for material transport. Load and offload material, as far as possible, downwind of stockpiles. Actively monitor dust fallout generated in the 8 major wind directions on the borders of the site. Implement monthly site inspection to check for possible areas of dust generation not addressed or not effectively managed. | Environmental Site Officer Contractors & Sub-Contractor Safety and Environmental Officers | Duration of the construction phase |
| Land clearing | | | |
| Excavation | | | |
| Material Transport | | | |
| Material Handling | | | |
| Construction | | | |

12 CONCLUSION AND RECOMMENDATIONS

The air quality measured in the proposed prospecting area is in a relatively good condition as per the results obtained. The majority of the detected CO₂ concentrations were above the global average atmospheric concentration, while it should be noted that currently operations are not present and these concentrations are representative of the current non-disturbed ambient air quality conditions. Volatile organic compounds were measured at seven monitoring points (AQ 13, AQ 16, AQ 18, AQ 19, AQ 20, AQ 21 and AQ 22). The presence of VOC's within the vicinity warrants concern to sensitive receptors as well as the extension boundary as these areas will be the centralised area of employed workforce. Based on the assessment pertinent "no-go" areas are not deemed necessary in terms of the project.

It is assumed that the prospecting of the development will contribute to the total suspended load in the atmosphere, although off-site impacts are not expected and the impact is anticipated to be largely local and centralised within the site area. From the active indicative sampling and meteorological data obtained, exceedances may be present within the operational phase in terms of dust generation. In order to ensure and prevent this possible outcome, pertinent measures are provided in this report to enable the proposed development to minimise the impact.

| | | | |
|--------------|-------------------|--|-------------------|
| Document No: | SPS-AQB-063-19_20 | Air Quality Baseline Assessment | Client Restricted |
| Revision: | 0.0 | Pioneer Minerals (Pty) Ltd: Farm Remhoogte 152 | Author: A Botha |
| Date: | June 2019 | | 37 |

13 REFERENCES

Doanstein, J., 2004: Health effects of air pollution, *J Allergy Clin Immunol*, 114, 1116 -1123.

Elsom, D., 1996: *Smog Alert: Managing urban air quality*, Earthscan Publications Ltd, London.

EPA, 1996: *Compilation of Air Pollutant Emission Factors--Volume I: Stationary Point and Area Sources. Fifth Edition Supplement, AP-42*. U. S. Environmental Protection Agency, Office of Air Quality Planning and Standards.

Fan Y. F. et al., 2010: Deterioration of compressive property of concrete under simulated acid rain environment, *Construction and Building Materials*, 24, 1975–1983

Fenger, J., 2002: Urban air quality, In J. Austin, P. Brimblecombe and W. Sturges (eds), *Air pollution science for the 21st century*, Elsevier, Oxford.

Food Factories. www.legacyproject.org. Retrieved on 2011-10-10.

"General Properties and Uses of Carbon Dioxide, Good Plant Design and Operation for Onshore Carbon Capture Installations and Onshore Pipelines". Energy Institute. Retrieved 2012-03-14.

Google.com. N.p., 2016. Web. 12 Aug. 2016.

Harrison, R.M. and R.E. van Grieken, 1998: *Atmospheric Aerosols*. John Wiley: Great Britain.

IPCC, 2001: *Climate Change 2001: The Scientific Basis, Contribution of Working Group I to the Third Assessment Report of the Intergovernmental Panel on Climate Change*, J.T. Houghton, Y. Ding, D.J. Griggs, M. Noguer, P.J. van der Linden, D.K.

Kaonga, B. And Kgabi, Nnensi. 2009: Atmospheric Particulate Matter in the Marikana Mining Area of Rustenburg, South Africa, *European Journal of Scientific Research*, 34, 271-279.

Kumar, P and Mohan, D., 2002: Photochemical smog: mechanism, ill-effects, and control, *TERI Information Digest on Energy and Environment*, 1(3), 445 - 456.

Manahan, S.E., 1991: *Environmental Chemistry*, Lewis Publishers Inc, United States of America.

| | | | |
|--------------|-------------------|--|-------------------|
| Document No: | SPS-AQB-063-19_20 | Air Quality Baseline Assessment | Client Restricted |
| Revision: | 0.0 | Pioneer Minerals (Pty) Ltd: Farm Remhoogte 152 | Author: A Botha |
| Date: | June 2019 | | 38 |

Mauna Loa CO₂ annual mean data from NOAA. "Trend" data was used. See also: Trends in Carbon Dioxide from NOAA.

Maroni, M., Seifert, B. and Lindvall, T. (1995), *Indoor Air Quality A Comprehensive Reference Book*, Elsevier, Amsterdam, Netherlands.

Scorgie, Y., Burger, L.W. and Sowden, M. 2001: *Analysis, synthesis and consolidation of the Qalabotjha and Embalenhle experiments, including other investigations*. Unpublished manuscript. Department of Minerals and Energy, Pretoria.

uMoya-NILU (2017): Air Quality Management Plan for the Northern Cape: Air Quality Baseline Assessment Report, Report No. uMN072-2017, Final – 15 December 2017.

World Health Organization. 2000, *WHO Air Quality Guidelines for Europe*, 2nd edition, WHO Regional Office for Europe, Copenhagen, Denmark (WHO Regional Publications, European Series, No 91).

World Health Organization (WHO), 2002, *The World Health Report*, Annex Table 9, 2002, http://www.who.int/whr/2002/en/whr2002_annex9_10.pdf.

| | | | |
|--------------|-------------------|--|-------------------|
| Document No: | SPS-AQB-063-19_20 | Air Quality Baseline Assessment | Client Restricted |
| Revision: | 0.0 | Pioneer Minerals (Pty) Ltd: Farm Remhoogte 152 | Author: A Botha |
| Date: | June 2019 | | 39 |