



October 2022



Visual Impact Assessment

The development of the Highveld Solar Power Plant near Emalahleni, Mpumalanga Province

PROJECT DETAILS

Project title: **Visual Impact Assessment – The development of the Highveld Solar Power Plant near Emalahleni, Mpumalanga Province**

Prepared by: Johan Botha
Donaway Environmental
30 Fouché Street
Steynsrus
9515
Tel: +27 82 316 7749
Email: johan@donaway.co.za

Prepared for: Highveld Solar Power Plant (RF) (Pty) Ltd
2nd Floor, West Tower
Nelson Mandela Square
Maude Street
Sandton
2196
Tel: 083 608 0005
Email: venter@subsolar.co.za

Report date: October 2022



When used as reference this report should be cited as: Donaway Environmental (2022). Visual Impact Assessment: The development of the Highveld Solar Power Plant near Emalahleni, Mpumalanga Province.

COPYRIGHT RESERVED

This technical report has been produced for Highveld Solar Power Plant (RF) (Pty) Ltd. The intellectual property contained in this report remains vested in Donaway Environmental and Highveld Solar Power Plant (RF) (Pty) Ltd. No part of this report may be reproduced in any manner without written permission from Donaway Environmental or Highveld Solar Power Plant (RF) (Pty) Ltd.

PROJECT BACKGROUND

Highveld Solar Power Plant (RF) (Pty) Ltd is proposing the development of the Highveld Solar Power Plant, a commercial Photovoltaic (PV) solar energy facility and associated infrastructure, including a 132kV power line, located within the Emalahleni Local Municipality, Mpumalanga Province. The proposed project is intended to form part of the Department of Mineral Resources and Energy (DMRE) Renewable Energy Independent Power Producer Procurement (REIPPP) Programme, but the option also exists for other tenders, wheeling or to supply privately, without a generation license from NERSA. The REIPPP Programme aims to secure 14 725 Megawatts (MW) of new generation capacity from renewable energy sources, while simultaneously diversifying South Africa's electricity mix. According to the 2021 State of the Nation Address, Government will soon be initiating the procurement of an additional 11 800 MW of power from renewable energy, natural gas, battery storage and coal in line with the Integrated Resource Plan 2019 and fulfilling their commitments under the United Nations Framework Convention on Climate Change and its Paris Agreement which include the reduction of greenhouse gas emissions. Eskom, our largest greenhouse gas emitter, has committed in principle to net zero emission by 2050 and to increase its renewable capacity.

The proposed development of the Highveld Solar Power Plant requires Environmental Authorisation (EA) from the National Department of Forestry, Fisheries and the Environment (DFFE) in accordance with the National Environmental Management Act (No. 107 of 1998) (NEMA), and the 2019 Environmental Impact Assessment (EIA) Regulations (GNR 324, 325 and 327).

The Visual Impact Assessment (VIA) Report has been prepared by Donaway Environmental on behalf of Environamics and is intended to provide input into the Basic Assessment Report (BAR) to be submitted to DFFE.

APPROACH TO THE STUDY

The Impact Assessment considered the nature, scale and duration of impacts on the visual receptors whether such impacts are positive or negative. Each impact was assessed according to the visual receptors, which were determined by using the ZTV, and the following project phases:

- Construction;
- Operation; and
- Decommissioning.

Where necessary, the proposal for mitigation or optimisation of an impact were detailed. A brief discussion of the impact and the rationale behind the assessment was included. The rating system is applied to the potential impacts on the receiving visual receptors and includes an objective evaluation of the mitigation of the impact.

The ZTV reflects the visibility rating in terms of proximity of viewers to the SPP and PL. The distances were calculated using satellite imagery, but the impact magnitude was determined by using previous experiences, assumptions and opinions, it is therefore theoretical. The ZTV maps will give a clearer understanding of areas susceptible to line of sight which means, an imaginary line from the eye to a perceived object, in this case the PV facility. The ZTV assessment **did not consider existing screening such as buildings and vegetation cover but rather the terrain's above mean sea level (AMSL) which indicates line of sight**. The receptors which were identified were subject to an impact assessment.

SUMMARY OF KEY FINDINGS

Referring to the assessment score of this VIA report, the significance of the visual impact will be a “Negative Low Impact”. The only receptors likely to be impacted by the proposed development are the nearby property owners. A large part of the visual landscape is reflecting a farming landscape with a better visual appearance, and on the other hand, a visually polluted landscape due to large scale coal mining. A summary of the potential impacts identified for the detailed design and construction, and operation phase are presented in **Table A** and **Table B**. A summary of the potential cumulative visual impacts identified for the project is provided in **Table C**.

Table A: Summary of potential visual impacts identified for the design and construction phase.

Impact	Significance Without Mitigation	Significance With Mitigation
Construction impacts of the SPP.	(48) Negative Medium	(33) Negative Medium
Construction impacts of the PL.	(30) Negative Medium	(26) Negative Low

Table B: Summary of potential visual impacts identified for the operational phase.

Impact	Significance Without Mitigation	Significance With Mitigation
Potential visual impacts on sensitive visual receptors located within a 1km radius from the SPP.	(28) Negative Low	(24) Negative Low
Potential visual impacts on sensitive visual receptors located within a 1km radius from the PL.	(32) Negative Medium	(32) Negative Medium
Potential visual impacts on sensitive visual receptors between a 1km and 3km radius from the SPP.	(26) Negative Low	(24) Negative Low
Potential visual impacts on sensitive visual receptors between a 1km and 3km radius from the PL.	(30) Negative Medium	(30) Negative Medium
Potential visual impacts on sensitive visual receptors located between a 3km and 5km radius from the SPP.	(24) Negative Low	(11) Negative Low
Potential visual impacts on sensitive visual receptors located between a 3km and 5km radius from the PL.	(26) Negative Low	(26) Negative Low
Potential visual impacts on sensitive visual receptors located between a 5km and 10km radius from the SPP.	(24) Negative Low	(10) Negative Low
Potential visual impacts on sensitive visual receptors located between a 5km and 10km radius from the PL.	(12) Negative Low	(12) Negative Low
Lighting Impacts of the SPP.	(34) Negative Medium	(10) Negative Low
Solar glint and glare impacts of the SPP.	(9) Negative Low	(9) Negative Low
Visual and sense of place impacts of the SPP.	(39) Negative Medium	(22) Negative Low

Visual and sense of place impacts of the PL.	(26) Negative Low	(26) Negative Low
--	-------------------	-------------------

Table C: Summary of potential cumulative visual impacts identified for the project.

Impact	Overall impact of the proposed project considered in isolation	Cumulative impact of the project and other projects in the area
Cumulative visual impact of the SPP	(24) Negative Low	(32) Negative Medium

Key Findings

SPP

The construction and operational phase of the proposed Highveld SPP and its associated infrastructure, will have a visual impact on the study area, especially within (but not restricted to) a 1km radius of the proposed SPP. The visual impact will differ amongst places, depending on the distance to the SPP. Receptors that might be the most sensitive to the proposed development are residents living on farms. Referring to Table 8.1 to Table 8.3, the proposed SPP development might have a negative low impact after mitigation. The ZTV model also reflects a low theoretical visibility with an average coverage of approximately 40.95% within the 10km radius.

PL

The construction and operational phase of the power line will have a visual impact on the study area, especially within (but not restricted to) a 2km radius. The visual impact will differ amongst places, depending on the distance to the PL. Receptors that might be the most sensitive to the proposed development are residents living on farms and residents of Kwa-Guqa bordering the PL. Referring to the ZTV maps, the power line will have a much higher theoretical visibility than the SPP with an average coverage of approximately 62.5% within the 10km radius.

Cumulative impact

The proposed development is located in a close proximity of existing power infrastructure and large-scale mining developments, and might have a cumulative impact on viewers. Only two other SPP’s are also proposed in the area and the potential for cumulative impacts to occur as a result of the projects is therefore very likely, but very low. The visual landscape mainly consists of agricultural and mining developments with a high and low visual quality. Permanent residents of the area might be desensitised over time with the construction of more SPP’s, but will stay subjective for each viewer. The location of the SPPs within the study area will contribute to the consolidation of SPP structures to this locality and avoid a potentially scattered proliferation of solar energy infrastructure throughout the region. Furthermore, the area is already intensively visually polluted by mining. The SPP will rather have a consolidated visual impact rather than a cumulative visual impact. People in the area might already be desensitised by negative visual impacts due to the mining developments.

Mitigation

Due to the extent of the project, no viable mitigation measures can be implemented to eliminate the visual impact of the PV facility entirely, but the possible visual impacts can be reduced. Several mitigation measures have however been proposed regardless of whether mitigation measures will reduce the significance of the of the anticipated impacts, they are considered good practice and should be implemented and maintained throughout the construction, operational and decommissioning phases of the project, if possible.

In terms of possible landscape degradation, the landscape does not appear to have any specific protection and is characterised by farming development. No buffer areas or areas to be avoided are applicable for this development.

Conclusion

It is believed that renewable energy resources are essential to the environmental well-being of the country and planet (WESSA, 2012). Aesthetic characteristics are subjective, and some people find solar farms and their associated infrastructure pleasant and optimistic while others may find it visually invasive; It is mostly perceived as symbols of energy independence, and local prosperity. The visual impact is also dependant on the land use of an area and the sensitivity thereof in terms of visual impact, such as protected areas, parks and other tourism related activities.

Considering all positive factors of such a development including economic factors, social factors and sustainability factors, especially in a semi-arid country, the visual impact of this proposed development will be insignificant and is suggested that the development commence, from a visual impact point of view. **PLEASE NOTE** that the details of the SPP and PL should be submitted to the South African Civil Aviation Authority (SACAA).

It is therefore Donaway Environmental's recommendation that either of the options of the project be approved.

TABLE OF CONTENTS

PROJECT DETAILS	i
EXECUTIVE SUMMARY	ii
TABLE OF CONTENTS	vi
LIST OF TABLES	viii
LIST OF FIGURES	x
LIST OF ACRONYMS	xii
1. INTRODUCTION	1
1.1. Project Background	1
1.2. Project Location	1
1.3. Project Description	2
1.4. Consideration of Alternatives	7
1.5. EIA Regulations	9
1.6. Terms of Reference	10
1.7. Project Team and Experience	12
2. METHODOLOGY	12
2.1. Purpose of the Study	13
2.2. Approach to the Study	14
2.3. Baseline Assessment – Significance Rating	14
2.4. Visibility rating in terms of proximity by using the Zone of Theoretical Visibility (ZTV) model 17	
2.5. Assumptions and Limitations	18
2.5.1. Spatial Data Accuracy	18
2.5.2. Zone of Theoretical Visibility	18
2.5.3. Viewer Subjectivity	18
2.5.4. Site Access and Drone Photos	18
3. EXISTING LANDSCAPE	20
3.1. Landscape Character	20
3.1.1. Landform and Drainage	20
3.1.2. Vegetation Patterns	29
3.1.3. Nature and Density of the Development	30
4. VISUEL RECEPTORS	31
4.1. Identified Sensitive Visual Receptors	31
4.2. Impacts on airports and aerodromes	32
4.2.1. Objects affecting airspace and applicable legislation	32

4.2.2. Glare	33
5. ZONE OF THEORETICAL VISIBILITY MODEL	37
5.1. ZTV Rating	37
6. VISUAL IMPACT ASSESSMENT	46
6.1. Design and Construction Phase	46
6.1.1. Construction Phase Impacts Associated with the SPP.	49
6.1.2. Construction Phase Impacts Associated with the PL.	50
6.2. Operational Phase	51
6.3. Cumulative Impacts	66
6.3.1. Cumulative Impacts Associated with the SPP and PL.	68
6.4. Decommissioning Phase	69
6.5. Assessment of Alternatives	69
6.6. Assessment of Impacts for the No-Go Alternative	69
7. MITIGATION MEASURES	70
8. KEY FINDINGS AND CONCLUSION	73
9. REFERENCES	76

LIST OF TABLES

Table 1.1: General site information.....	2
Table 1.2: Technical details for the proposed facility.....	7
Table 1.3: Listed activities (SPPs).....	9
Table 2.1: Impact Significance Rating	14
Table 2.2: ZTV Visibility Rating in terms of proximity.....	18
Table 5.1: ZTV Assumptions.....	37
Table 5.2: ZTV Visibility Rating in terms of Proximity to the SPP.	37
Table 5.3: ZTV Visibility Rating in terms of Proximity to the PL.....	38
Table 6.1: Visual impact of construction activities on sensitive visual receptors to the proposed SPP.	49
Table 6.2: Visual impact of construction activities on sensitive visual receptors to the PL.	50
Table 6.3: Visual impacts on sensitive visual receptors within a 1km radius from the SPP.	52
Table 6.4: Visual impacts on sensitive visual receptors within a 1km radius from the PL.	53
Table 6.5: Visual impacts on sensitive visual receptors between a 1km and 3km radius from the SPP.	54
Table 6.6: Visual impacts on sensitive visual receptors between a 1km and 3km radius from the PL.	55
Table 6.7: Visual impacts on sensitive visual receptors between a 3km and 5km radius from the SPP.	56
Table 6.8: Visual impacts on sensitive visual receptors between a 3km and 5km radius from the PL.	57
Table 6.9: Visual impacts on sensitive visual receptors between a 5km and 10km radius from the SPP.	58
Table 6.10: Visual impacts on sensitive visual receptors between a 5km and 10km radius from the PL.....	59
Table 6.9: Significance of visual impacts of lighting at night on sensitive visual receptors in close proximity to the SPP.	60
Table 6.10: Significance of visual impacts of solar glint and glare as a visual distraction and possible air travel hazard of the SPP.....	62
Table 6.11: Visual impact and impacts on sense of place of the SPP.....	63
Table 6.12: Visual impact and impacts on sense of place of the PL.	64

Table 6.13: A summary of related projects, that may have a cumulative impact, in a 30 km radius of the study area.	66
Table 6.14: Cumulative visual impacts of the SPP and PL.	68
Table 8.1: Summary of potential visual impacts identified for the design and construction phase. ...	73
Table 8.2: Summary of potential visual impacts identified for the operational phase.	73
Table 8.3: Summary of potential cumulative visual impacts identified for the project.	74

LIST OF FIGURES

Figure 1.1: Locality map for the development of the Highveld SPP and PL.	2
Figure 1.2: Power Line Corridor.....	6
Figure 3.1: Centre of the site taken towards the north: AGL 6m.	21
Figure 3.2: Centre of site taken towards the north east: AGL 6m.....	21
Figure 3.3: Centre of site taken towards the east: AGL 6m.....	22
Figure 3.4: Centre of site taken towards the south east: AGL 6m.....	22
Figure 3.5: Centre of site taken towards the south: AGL 6m.	23
Figure 3.6: Centre of site taken towards the south west: AGL 6m.....	23
Figure 3.7: Centre of site taken towards the west: AGL 6m.....	24
Figure 3.8: Centre of site taken towards the north west: AGL 6m.	24
Figure 3.9: Centre of site taken towards the north: AGL 32m.	25
Figure 3.10: Centre of site taken towards the north east: AGL 32m.....	25
Figure 3.11: Centre of site taken towards the east: AGL 32m.....	26
Figure 3.12: Centre of site taken towards the south east: AGL 32m.....	26
Figure 3.13: Centre of site taken towards the south (PL route): AGL 32m.	27
Figure 3.14: Centre of site taken towards the south west: AGL 32m.....	27
Figure 3.15: Centre of site taken towards the west: AGL 32m.....	28
Figure 3.16: Centre of site taken towards the north west: AGL 32m.....	28
Figure 4.1: Reflection Characteristics of normal glass (left) and PV glass (right)	34
Figure 4.2: Reflection Comparison of everyday objects	34
Figure 4.3: Solar Installations at the George Airport in the Western Cape.....	35
Figure 4.4: View of the Bokamoso SPP from an airplane at a height of 36000 feet amsl.....	35
Figure 5.1: View towards the Droogfontein 2 SPP at 2km: 6m AGL.....	39
Figure 5.2: View towards the Droogfontein 2 SPP at 2km: 30m AGL.....	39
Figure 5.3: View towards the Droogfontein 2 SPP at 2km: 50m AGL.....	40
Figure 5.4: View towards the Droogfontein 2 SPP at 1km: 6m AGL.....	40
Figure 5.5: View towards the Droogfontein 2 SPP at 1km: 30m AGL.....	41
Figure 5.6: View towards the Droogfontein 2 SPP at 1km: 50m AGL.....	41
Figure 5.7: Zone of Theoretical Visibility (ZTV) for the SPP, Satellite View.	42
Figure 5.8: Zone of Theoretical Visibility (ZTV) for the SPP, Topography View.....	43
Figure 5.9: Zone of Theoretical Visibility (ZTV) for the PL, Satellite View.	44
Figure 5.10: Zone of Theoretical Visibility (ZTV) for the PL, Topography View.	45

Figure 6.1: Cumulative map showing the location of other solar energy facilities within 30km of the project site. 67

LIST OF ACRONYMS

AMSL	above mean sea level
AC	Alternating Current
AGL	Above Ground Level
BAR	Basic Assessment Report
B-BBEE	Broad-Based Black Economic Empowerment
BEE	Black Economic Empowerment
BESS	Battery Energy Storage System
CLO	Community Liaison Officer
CSP	Concentrated Solar Power
DC	Direct Current
DEA	Department of Environmental Affairs (National)
DEAT	Department of Environmental Affairs and Tourism
DFFE	Department Forestry, Fisheries and the Environment
DMRE	Department of Mineral Resources and Energy
DM	District Municipality
EA	Environmental Authorisation
ECA	Environment Conservation Act (No. 73 of 1989)
ECO	Environmental Control Officer
EHS	Environmental, Health and Safety
EIA	Environmental Impact Assessment
EMPr	Environmental Management Programme
EP	Equator Principles
EPC	Engineering, Procurement and Construction
FMP	Fire Management Plan
ha	Hectares
I&APs	Interested and Affected Parties
IDP	Integrated Development Plan
IEP	Integrated Energy Plan

IFC	International Finance Corporation
IPP	Independent Power Producer
IRP	Integrated Resource Plan
IUCN	International Union for Conservation of Nature
GIS	Geographic Information System
km	Kilometre
kV	Kilovolt
LED	Local Economic Development
LM	Local Municipality
MW	Megawatt
NDP	National Development Plan
NEPCO	National Electrical Power Company
NEMA	National Environmental Management Act (No. 107 of 1998)
O&M	Operations and Maintenance
OHS	Occupational Health and Safety
PSDF	Provincial Spatial Development Framework
PV	Photovoltaic
RE	Renewable Energy
REDZ	Renewable Energy Development Zone
REIPPP	Renewable Energy Independent Power Producer Procurement Programme
SDF	Spatial Development Framework
SPP	Solar Energy Facility
SPP	Solar Power Plant
ToR	Terms of Reference
UNESCO	United Nations Educational, Scientific and Cultural Organisation
VIA	Visual Impact Assessment
ZTV	Zone of Theoretical Visibility

1. INTRODUCTION

1.1. Project Background

Highveld Solar Power Plant (RF) (Pty) Ltd is proposing the development of the Highveld Solar Power Plant, a commercial Photovoltaic (PV) solar energy facility and associated infrastructure, including a 132kV power line, located within the Emalahleni Local Municipality, Mpumalanga Province. The proposed project is intended to form part of the Department of Mineral Resources and Energy (DMRE) Renewable Energy Independent Power Producer Procurement (REIPPP) Programme, but the option also exists for other tenders, wheeling or to supply privately, without a generation license from NERSA. The REIPPP Programme aims to secure 14 725 Megawatts (MW) of new generation capacity from renewable energy sources, while simultaneously diversifying South Africa's electricity mix. According to the 2021 State of the Nation Address, Government will soon be initiating the procurement of an additional 11 800 MW of power from renewable energy, natural gas, battery storage and coal in line with the Integrated Resource Plan 2019 and fulfilling their commitments under the United Nations Framework Convention on Climate Change and its Paris Agreement which include the reduction of greenhouse gas emissions. Eskom, our largest greenhouse gas emitter, has committed in principle to net zero emission by 2050 and to increase its renewable capacity.

The proposed development of the Highveld Solar Power Plant requires Environmental Authorisation (EA) from the National Department of Forestry, Fisheries and the Environment (DFFE) in accordance with the National Environmental Management Act (No. 107 of 1998) (NEMA), and the 2019 Environmental Impact Assessment (EIA) Regulations (GNR 324, 325 and 327).

The Visual Impact Assessment (VIA) Report has been prepared by Donaway Environmental on behalf of Environamics and is intended to provide input into the Basic Assessment Report (BAR) to be submitted to DFFE.

1.2. Project Location

The proposed Highveld SPP is located approximately 19km north west from the city centre of Emalahleni and approximately 5km North from the N4 National Road.

Please refer to **Figure 1.1** below, Locality Map.

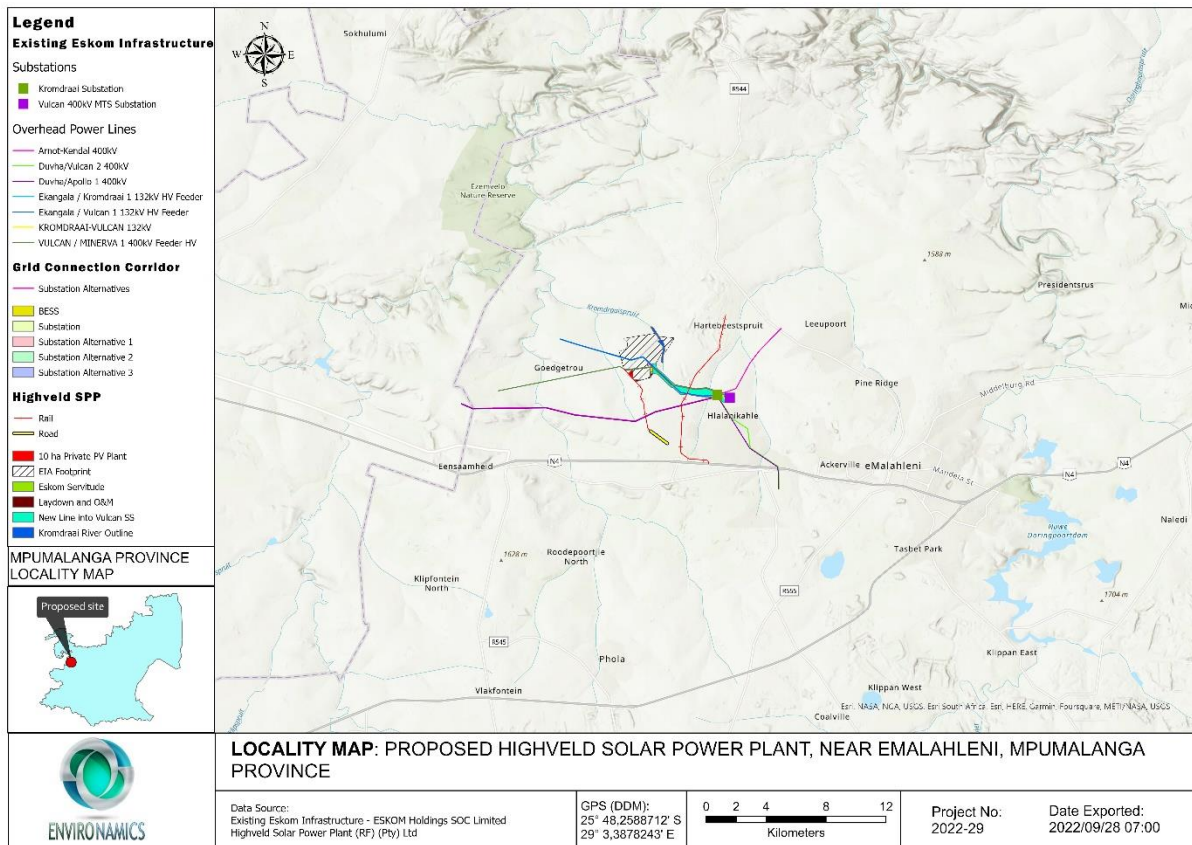


Figure 1.1: Locality map for the development of the Highveld SPP and PL.

1.3. Project Description

The term photovoltaic describes a solid-state electronic cell that produces direct current electrical energy from the radiant energy of the sun through a process known as the Photovoltaic Effect. This refers to light energy placing electrons into a higher state of energy to create electricity. Each PV cell is made of silicon (i.e., semiconductors), which is positively and negatively charged on either side, with electrical conductors attached to both sides to form a circuit. This circuit captures the released electrons in the form of an electric current (direct current). The key components of the proposed project are described below and general site information in **Table 1.1**:

Table 1.1: General site information

<p>Description of affected farm portion</p>	<p>Solar Power Plant</p> <ul style="list-style-type: none"> Portion 17 of the Farm Kleinwater No. 301 Remainder of Portion 2 of the Farm Kromdraai No. 279 Remainder of Portion 15 of the Farm Kromdraai No. 279 Portion 47 of the Farm Kromdraai 47 No. 279 Portion 48 of the Farm Kromdraai 48 No. 279 <p>Power Line</p> <ul style="list-style-type: none"> Remainder of the farm Coronation No.280
---	---

	<p>Remainder of Portion 2 of the Farm Kleinwater No.301</p> <p>Portion 6 of the Farm Nooitgedacht No. 300</p> <p>Remainder of Portion 12 of the Farm Nooitgedacht No. 300</p> <p>Remainder of Portion 13 of the Farm Nooitgedacht No. 300</p> <p>Portion 15 of the Farm Nooitgedacht No. 300</p> <p>Portion 21 of the Farm Nooitgedacht No. 300</p> <p>Portion 22 of the Farm Nooitgedacht No. 300</p> <p>Portion 25 of the Farm Nooitgedacht No. 300</p> <p>Portion 30 of the Farm Nooitgedacht No. 300</p> <p>Remainder of Portion 94 of the Farm Nooitgedacht No. 300</p> <p>Remainder of Portion 95 of the Farm Nooitgedacht No. 300</p> <p>Portion 121 of the Farm Nooitgedacht No. 300</p> <p>Portion 122 of the Farm Nooitgedacht No. 300</p> <p>Portion 126 of the Farm Nooitgedacht No. 300</p> <p>Portion 127 of the Farm Nooitgedacht No. 300</p> <p>Portion 131 of the Farm Nooitgedacht No. 300</p> <p>Portion 141 of the Farm Nooitgedacht No. 300</p> <p>Portion 148 of the Farm Nooitgedacht No. 300</p>
Province	Mpumalanga
District Municipality	Nkangala District Municipality
Local Municipality	eMalahleni Local Municipality
Ward numbers	12
Closest towns	Witbank is located approximately 15 km south east of the proposed development.
21 Digit Surveyor General codes	<p><u>Solar Power Plant</u></p> <p>Portion 17 of the Farm Kleinwater No. 301 T0JS0000000030100017</p> <p>Remainder of Portion 2 of the Farm Kromdraai No. 279 T0JS00000000027900002</p> <p>Remainder of Portion 15 of the Farm Kromdraai No. 279 T0JS00000000027900015</p> <p>Portion 47 of the Farm Kromdraai No. 279 T0JS00000000027900047</p> <p>Portion 48 of the Farm Kromdraai 48 No. 279</p>

	<p>T0JS0000000027900048</p> <p><u>Power Line</u></p> <p>Remainder of the Farm Coronation No. 280</p> <p>T0JS0000000028000000</p> <p>Remainder of Portion 2 of the Farm Kleinwater No. 301</p> <p>T0JS0000000030100002</p> <p>Portion 6 of the Farm Nooitgedacht No. 300</p> <p>T0JS0000000030000006</p> <p>Remainder of Portion 12 of the Farm Nooitgedacht No. 300</p> <p>T0JS0000000030000012</p> <p>Remainder of Portion 13 of the Farm Nooitgedacht No. 300</p> <p>T0JS0000000030000013</p> <p>Portion 15 of the Farm Nooitgedacht No. 300</p> <p>T0JS0000000030000015</p> <p>Portion 21 of the Farm Nooitgedacht No. 300</p> <p>T0JS0000000030000021</p> <p>Portion 22 of the Farm Nooitgedacht No. 300</p> <p>T0JS0000000030000022</p> <p>Portion 25 of the Farm Nooitgedacht No. 300</p> <p>T0JS0000000030000025</p> <p>Portion 30 of the Farm Nooitgedacht No. 300</p> <p>T0JS0000000030000030</p> <p>Remainder of Portion 94 of the Farm Nooitgedacht No. 300</p> <p>T0JS0000000030000094</p> <p>Remainder of Portion 95 of the Farm Nooitgedacht No. 300</p> <p>T0JS0000000030000095</p> <p>Portion 121 of the Farm Nooitgedacht No. 300</p> <p>T0JS0000000030000121</p> <p>Portion 122 of the Farm Nooitgedacht No. 300</p> <p>T0JS0000000030000122</p> <p>Portion 126 of the Farm Nooitgedacht No. 300</p> <p>T0JS0000000030000126</p> <p>Portion 127 of the Farm Nooitgedacht No. 300</p> <p>T0JS0000000030000127</p>
--	--

	Portion 131 of the Farm Nooitgedacht No. 300 T0JS0000000003000013 Portion 141 of the Farm Nooitgedacht No. 300 T0JS00000000030000141 Portion 148 of the Farm Nooitgedacht No. 300 T0JS00000000030000148
Type of technology	Photovoltaic solar facility
Structure Height	Panels ~6m, buildings ~ 6m, power line ~32m and battery storage facility ~8m height
Battery storage	Within a 4-hectare area
Surface area to be covered (Development footprint)	Approximately 500 ha
Laydown area dimensions (EIA footprint)	Assessed 500 ha
Structure orientation	The panels will either be fixed to a single-axis horizontal tracking structure where the orientation of the panel varies according to the time of the day, as the sun moves from east to west or tilted at a fixed angle equivalent to the latitude at which the site is located in order to capture the most sun.
Generation capacity	Up to 329 MW (DC) and 250MW (AC)
Expected production	678 GWh per annum (Expected production by 329MWdc modules Considering Bifacial and one-axis tracker)

Based on a review of previous similar projects and the basic project information received for the purpose of this VIA, the scope of work and basic infrastructure that are inclusive of any ancillary activities and that can be associated with the proposed development of the Highveld SPP would include:

- PV Panel Array

To produce up to 329MW, the proposed facility will require numerous linked cells placed behind a protective glass sheet to form a panel. Multiple panels will be required to form the solar PV arrays which will comprise the PV facility. The PV panels will be tilted at a northern angle in order to capture the most sun or using one-axis tracker structures to follow the sun to increase the yield.

- Wiring to Inverters

Sections of the PV array will be wired to inverters. The inverter is a pulse width mode inverter that converts direct current (DC) electricity to alternating current (AC) electricity at grid frequency.

- Connection to the grid

Connecting the array to the electrical grid requires transformation of the voltage from 480V to 33kV to 132kV. The normal components and dimensions of a distribution rated electrical substation will be required. Output voltage from the inverter is 480V and this is fed into step up transformers to 132kV. An onsite substation will be required on the site to step the voltage up to 132kV, after which the power will be evacuated into the national grid via the proposed power line. It is expected that generation from the facility will link to the Eskom Vulcan 400kV MTS Substation. The connection will be assessed within the 250m wide (up to 690m in some instances) grid connection corridor. Connection will be limited to the grid connection corridor. The Highveld SPP will inject up to 250MW into the National Grid. The installed capacity will be approximately 329MW.

Refer to the **Figure 1.2** below:



Figure 1.2: Power Line Corridor.

- Electrical reticulation network

An internal electrical reticulation network will be required and will be laid ~2-4m underground as far as practically possible.

- Battery storage

A Battery Storage Facility with a maximum height of 8m and a maximum volume of 1,740 m³ of batteries and associated operational, safety and control infrastructure.

- Supporting infrastructure:

The supporting infrastructure such as the auxiliary buildings will be situated in an area measuring up to 4 ha.

- Roads

Access will be obtained via an unnamed road off of the N4 to the south of the site and via another unnamed road to the east of the site. An internal site road network will also be required to provide access to the solar field and associated infrastructure. The access and internal roads will be constructed within a 25- meter corridor. Access Points: coordinates 25°49'14.48"S; 29° 3'4.95"E and 25°48'55.80"S; 29° 3'43.84"E.

- Fencing

For health, safety and security reasons, the facility will be required to be fenced off from the surrounding farm. Fencing with a height of 2.5 meters will be used.

Table 1.2: Technical details for the proposed facility

Component	Description / dimensions
Height of PV panels	6 meters
Area of PV Array	500 hectares (Development footprint)
Number of inverters required	Minimum 50
Area occupied by inverter / transformer stations / substations / BESS	Central inverters+ LV/MV trafo: 750 m ² HV/MV substation with switching station: 15 000 m ² BESS: 40 000 m ²
Capacity of on-site substation	132kV
Capacity of the power line	132kV
Area occupied by both permanent and construction laydown areas	Total Footprint Area: 500 hectares Construction laydown area: within ~ 5.47 ha
Area occupied by buildings	Security Rooms (3): ~405 m ² O&M laydown: Within 5.74 ha
Battery storage facility	Maximum height: 8m Maximum volume: 1740 m ³ Capacity: Up to 500 MW
Length of internal roads	Approximately 16.41 km
Width of internal roads	Between 4 and 6 meters
Proximity to grid connection	Approximately 5.3km
Grid connection corridor width	Between 250 and 690 m
Grid connection corridor length	Approximately 5.3km
Power line servitude width	32m
Height of fencing	Approximately 2.5 meters

1.4. Consideration of Alternatives

The DEAT 2006 guidelines on 'assessment of alternatives and impacts' proposes the consideration of four types of alternatives namely, the no-go, location, activity, and design alternatives. It is however, important to note that the regulation and guidelines specifically state that only 'feasible' and

'reasonable' alternatives should be explored. It also recognizes that the consideration of alternatives is an iterative process of feedback between the developer and EAP, which in some instances culminates in a single preferred project proposal. An initial site assessment was conducted by the developer the affected properties and the farm portions were found favorable due to its proximity to grid connections, solar radiation, ecology and relative flat terrain. These factors were then taken into consideration and avoided as far as possible.

The following alternatives were considered in relation to the proposed activity and all specialists should also make mention of these:

- No-go alternative

This alternative considers the option of 'do nothing' and maintaining the status quo. The site is currently zoned for agricultural land uses. Should the proposed activity not proceed, the site will remain unchanged and will continue to be used for agricultural purposes. The potential opportunity costs in terms of alternative land use income through rental for energy facility and the supporting social and economic development in the area would be lost if the status quo persist

- Location alternatives

No other possible sites were identified on Portion 17 of the Farm Kleinwater No. 301, Remaining Extent of Portion 2, Remaining Extent of Portion 15, Portion 47 and 48 of the Farm Kromdraai No. 279. This site is referred to as the preferred site. Some limited sensitive features occur on the site. The size of the site makes provision for the exclusion of any sensitive environmental features that may arise through the EIA proses.

- Technical alternatives: Power Lines

Generation from the facility will link to the Eskom Vulcan 400kV MTS Substation. The connection alternatives will be assessed within the 250m wide (up to 690m in some instances) grid connection corridor. Connection will be limited to the grid connection corridor. The Highveld SPP will inject up to 250MW into the National Grid. The installed capacity will be approximately 329MW.

- Battery Storage Facility

It is proposed that a nominal up to 500 MWh Battery Storage Facility for grid storage would be housed in stacked containers, or multi-storey building, with a maximum height of 8m and a maximum volume of 1,740m³ of batteries and associated operational, safety and control infrastructure. Three types of battery technologies are being considered for the proposed project: Lithium-ion, Sodium-sulphur or Vanadium Redox flow battery. The preferred battery technology is Lithium-ion.

Battery storage offers a wide range of advantages to South Africa including renewable energy time shift, renewable capacity firming, electricity supply reliability and quality improvement, voltage regulation, electricity reserve capacity improvement, transmission congestion relief, load following and time of use energy cost management. In essence, this technology allows renewable energy to enter the base load and peak power generation market and therefore can compete directly with fossil fuel sources of power generation and offer a truly sustainable electricity supply option.

- Design and layout alternatives

Design alternatives will be considered throughout the planning and design phase and specialist studies are expected to inform the final layout of the proposed development.

○ Technology alternatives

There are several types of semiconductor technologies currently available and in use for PV solar panels. Two, however, have become the most widely adopted, namely crystalline silicon (Mono-facial and Bi-facial) and thin film. The technology that (at this stage) proves more feasible and reasonable with respect to the proposed solar facility is crystalline silicon panels, due to it being non-reflective, more efficient, and with a higher durability. However, due to the rapid technological advances being made in the field of solar technology the exact type of technology to be used, such as bifacial panels, will only be confirmed at the onset of the project.

1.5. EIA Regulations

The National Environmental Management Act identifies listed activities (in terms of Section 24) which are likely to have an impact on the environment. These activities cannot commence without obtaining an EA from the relevant competent authority. Sufficient information is required by the competent authority to make an informed decision and the project is therefore subject to an environmental assessment process which can be either a Basic Assessment Process or a full Scoping and Environmental Impact Assessment process.

The EIA Regulations No. 324, 325, and 327 outline the activities that may be triggered and therefore require EA. The following listed activities with special reference to the proposed development is triggered:

Table 1.3: Listed activities (SPPs)

Relevant notice:	Activity No (s)	Description of each listed activity as per project description:
GNR. 327 (as amended in 2017)	Activity 11(i)	<ul style="list-style-type: none"> • <i>“The development of facilities or infrastructure for the transmission and distribution of electricity (i) outside urban areas or industrial complexes with a capacity of more than 33 but less than 275 kilovolts.”</i> • Activity 11(i) is triggered as the proposed photovoltaic solar facility will transmit and distribute electricity of 132 kilovolts outside an urban area.
GNR. 327 (as amended in 2017)	Activity 24(ii)	<ul style="list-style-type: none"> • <i>“The development of a road (ii) with reserve wider than 13,5 meters, or where no reserve exists where the road is wider than 8 meters;</i> • Activity 24(ii) is triggered as the internal roads will vary between 6 and 12 meters in width.
GNR. 327 (as amended in 2017)	Activity 28(ii)	<ul style="list-style-type: none"> • <i>“Residential, mixed, retail, commercial, industrial or institutional developments where such land was used for agriculture or afforestation on or after 1998 and where such development (ii) will occur outside an urban area,</i>

		<p><i>where the total land to be developed is bigger than 1 hectare.”</i></p> <ul style="list-style-type: none"> • Activity 28(ii) is triggered as portions of the affected farm has been previously used for grazing and the property will be re-zoned to “special” use.
GNR. 325 (as amended in 2017)	Activity 1	<ul style="list-style-type: none"> • <i>“The development of facilities or infrastructure for the generation of electricity from a renewable resource where the electricity output is 20 megawatts or more.”</i> • Activity 1 is triggered since the proposed photovoltaic solar facility will generate up to 150 megawatts electricity through the use of a renewable resource.
GNR. 325 (as amended in 2017)	Activity 15	<ul style="list-style-type: none"> • <i>“The clearance of an area of 20 hectares or more of indigenous vegetation.”</i> • More than 20 hectares of indigenous vegetation will be cleared.

The activities triggered under Listing Notice 1 and 2 (Regulation 327 & 325) for the project implies that the development is considered as potentially having an impact on the environment and therefore require the implementation of appropriate mitigation measures. The site is located in a Renewable Energy Development Zone (REDZ) and therefore a ‘basic assessment (BA) process’ is required as described in Regulation 19.

1.6. Terms of Reference

The Terms of Reference (ToR) as provided and agreed upon with Environamics include the following:

Specialists in their field of expertise will consider baseline data and identify and assess impacts according to predefined rating scales. Specialists will also suggest optional or essential ways in which to mitigate negative impacts and enhance positive impacts. Further, specialists will, where possible, take into consideration the cumulative effects associated with this and other projects, which are either developed or in the process of being developed in the local area. The results of these specialist studies will be integrated into the BAR for comments and final submissions to all Interested and Affected Parties (I&APs) and DFFE. The Terms of Reference (ToR) or general requirements proposed for the inputs are listed below:

General Requirements:

Specialists’ reports must comply with Appendix 6 of GNR326 published under sections 24(5), and 44 of the National Environmental Management Act, 1998 (Act No. 107 of 1998), as amended and whereby the following are to be included:

- The details of the specialist who prepared the report and the expertise of that specialist to compile a specialist report including a curriculum vitae.

- A declaration that the specialist is independent in a form as may be specified by the competent authority.
- An indication of the scope of, and the purpose for which, the report was prepared.
- The date and season of the site investigation and the relevance of the season to the outcome of the assessment.
- A description of the methodology adopted in preparing the report or carrying out the specialised process; the specific identified sensitivity of the site related to the activity and its associated structures and infrastructure.
- An identification of any areas to be avoided, including buffers.
- A map superimposing the activity including the associated structures and infrastructure on the environmental sensitivities of the site including areas to be avoided, including buffers.
- A description of any assumptions made and any uncertainties or gaps in knowledge.
- A description of the findings and potential implications of such findings on the impact of the proposed activity, including identified alternatives on the environment.
- Any mitigation measures for inclusion in the EMPr;
- Any conditions for inclusion in the environmental authorisation.
- Any monitoring requirements for inclusion in the EMPr or environmental authorisation.
- A reasoned opinion as to whether the proposed activity or portions thereof should be authorised, and if the opinion is that the proposed activity or portions thereof should be authorised, any avoidance, management and mitigation measures that should be included in the EMPr, and where applicable, the closure plan.
- A description of any consultation process that was undertaken during preparing the specialist report.
- A summary and copies of any comments received during any consultation process and where applicable all responses thereto; and
- Any other information requested by the competent authority.

In development of the above, specialists are expected to:

- Review the BAR, with specific reference to the Comments and Response Report to familiarize with all relevant issues or concerns relevant to their field of expertise.
- In development of the impacts listed in the BAR, identify any issue or aspect that needs to be assessed and provide expert opinion on any issue in their field of expertise that they deem necessary in order to avoid potential detrimental impacts.
- Assess the degree and extent of all identified impacts (including cumulative impacts) that the preferred project activity and its proposed alternatives, including that of the no-go alternative, may have.

- Identify and list all legislation and permit requirements that are relevant to the development proposal in context of the study.
- Reference all sources of information and literature consulted; and
- Include an executive summary to the report.

The terms of reference for this Visual Impact Assessment (VIA) requires providing the following:

- Conduct a desktop review of available information that can support and inform the specialist study;
- Describe the receiving environment and the visual absorption for the proposed project;
- Conduct a field survey to determine the actual or practical extent of potential visibility of the proposed development;
- Conduct a photographic survey of the landscape surrounding the development;
- Identify issues and potential visual impacts for the proposed project, to be considered in combination with any additional relevant issues that may be raised through the public consultation process;
- Identify possible cumulative impacts related to the visual aspects for the proposed project;
- Assess the potential impacts, both positive and negative, associated with the proposed project for the construction, operation and decommissioning phases;
- Identify management actions to avoid or reduce negative visual impacts; and to enhance positive benefits of the project; and
- Use mapping and photo-montage techniques as appropriate.

1.7. Project Team and Experience

The project team will consist of Johan Botha.

Johan Botha graduated with an Honours degree in 2011 from the North West University in the field of Environmental Sciences specialising in Geography and Environmental Management and has since been involved in the environmental management of substations, powerlines and solar PV plants together with over 45 Visual Impact Assessments (VIA) and 15 Social Impact Assessments (SIA), mostly in the field of Renewable Energy. All the above-mentioned experience accumulated the necessary skills to conduct visual and social impact assessments.

2. METHODOLOGY

A site inspection was conducted on 26 September 2022. Most of the visual receptors were determined by using ZTV and geographical imagery before the site inspection.

2.1. Purpose of the Study

To determine the purpose of the study, one would first have to understand what a visual impact is: Visual impacts occur when changes in the landscape are noticeable to viewers looking at the landscape from their homes or from parks and conservation areas, highways and travel routes, and important cultural features and historic sites.

Visual impacts therefore relate to the changes that arise in the composition of views as a result of:

- Changes to the landscape;
- People's response to those changes; and
- the overall negative effect with respect to the scenic beauty of that landscape, which can be subjective.

Visual impact is therefore measured as the change or contrast to the existing visual environment and the extent to which that change compromises (negative impact) or enhances (positive impact) or maintains the visual quality of the landscape.

Visual impacts can be seen as an issue because it reduces the public's enjoyment and appreciation of the landscape and impair the character or quality of such a place as well as the aesthetic quality of the landscape if it is considered to be a national resource.

VIA addresses the importance of the inherent aesthetics of the landscape, the public value of viewing that landscape, and the contrast or change in the landscape derived from the physical presence of a proposed project. For instance, Sensitive Geographical Areas can be classified as sensitive properties that are evaluated for the potential for adverse visual impacts, based on the current land use or enjoyment of the view. The sensitivity of a certain geographical area is the degree to which a particular area can accommodate change. An example of a sensitive geographical area would be when scenic quality was influential in its being. In other words, a geographical area is not sensitive to visual impact if visual aspects of its feeling and setting are not part of what makes it eligible.

A project therefore has a significant visual impact in a certain geographical area when the proximity of the proposed project impairs aesthetic features or attributes of that area in a substantially visual way such that features, or attributes are considered important contributing elements to the value of the resource.

The purpose and objectives of this VIA report is to:

- give the reader an overview of the aesthetics of the landscape.
- determine the visual receptors present within the study area.
- determine the receptors likely to be sensitive to the proposed development.
- determine the extent and significance of the visual impact.

The scope of the assessment includes the proposed development area and its associated structures and infrastructure.

2.2. Approach to the Study

The approach to the study followed various guidelines for visual impact assessments that are available. This assessment will be undertaken in accordance with:

- South African Provincial Government (Western Cape Province) – Guideline for Involving Visual and Aesthetic Specialists in EIA Processes (2005);
- United States of America, Texas Department of Transportation - Standard Operating Procedure for Visual Impact Assessments (2012);
- The Landscape Institute with the Institute of Environmental Management and Assessment – Guidelines for Landscape and Visual Impact Assessments, Second Edition (2002); and
- World Bank Group - Environmental, Health, and Safety Guidelines for Wind Energy (2015).

Together these documents provide a comprehensive basis and data base for the level of approach of a visual impact assessment.

2.3. Baseline Assessment – Significance Rating

Impact assessment must take account of the nature, scale and duration of impacts on the visual receptors whether such impacts are positive or negative. Each impact is also assessed according to the visual receptors, which were determined by using the ZTV, Google Earth (for visual receptors and development types) and the following project phases:

- Construction;
- Operation; and
- Decommissioning.

Where necessary, the proposal for mitigation or optimisation of an impact should be detailed. A brief discussion of the impact and the rationale behind the assessment of its significance should also be included. The rating system is applied to the potential impacts on the receiving visual receptors and includes an objective evaluation of the mitigation of the impact. In assessing the significance of each impact, Table 2.1 below, will be utilised as the baseline impact assessment for visual receptors and phases of the project.

Table 2.1: Impact Significance Rating

NATURE		
Include a brief description of the impact of environmental parameter being assessed in the context of the project. This criterion includes a brief written statement of the environmental aspect being impacted upon by a particular action or activity.		
GEOGRAPHICAL EXTENT		
This is defined as the area over which the impact will be experienced.		
1	Site	The impact will only affect the site.
2	Local/district	Will affect the local area or district.

3	Province/region	Will affect the entire province or region.
4	International and National	Will affect the entire country.
PROBABILITY		
This describes the chance of occurrence of an impact.		
1	Unlikely	The chance of the impact occurring is extremely low (Less than a 25% chance of occurrence).
2	Possible	The impact may occur (Between a 25% to 50% chance of occurrence).
3	Probable	The impact will likely occur (Between a 50% to 75% chance of occurrence).
4	Definite	Impact will certainly occur (Greater than a 75% chance of occurrence).
DURATION		
This describes the duration of the impacts. Duration indicates the lifetime of the impact as a result of the proposed activity.		
1	Short term	The impact will either disappear with mitigation or will be mitigated through natural processes in a span shorter than the construction phase (0 – 1 years), or the impact will last for the period of a relatively short construction period and a limited recovery time after construction, thereafter it will be entirely negated (0 – 2 years).
2	Medium term	The impact will continue or last for some time after the construction phase but will be mitigated by direct human action or by natural processes thereafter (2 – 10 years).
3	Long term	The impact and its effects will continue or last for the entire operational life of the development but will be mitigated by direct human action or by natural processes thereafter (10 – 30 years).
4	Permanent	The only class of impact that will be non-transitory. Mitigation either by man or natural process will not occur in such a way or such a time span that the impact can be considered indefinite.
INTENSITY/ MAGNITUDE		
Describes the severity of an impact.		
1	Low	Impact affects the quality, use and integrity of the system/component in a way that is barely perceptible.
2	Medium	Impact alters the quality, use and integrity of the system/component but system/component still

		continues to function in a moderately modified way and maintains general integrity (some impact on integrity).
3	High	Impact affects the continued viability of the system/component and the quality, use, integrity and functionality of the system or component is severely impaired and may temporarily cease. High costs of rehabilitation and remediation.
4	Very high	Impact affects the continued viability of the system/component and the quality, use, integrity and functionality of the system or component permanently ceases and is irreversibly impaired. Rehabilitation and remediation often impossible. If possible, rehabilitation and remediation often unfeasible due to extremely high costs of rehabilitation and remediation.

REVERSIBILITY

This describes the degree to which an impact can be successfully reversed upon completion of the proposed activity.

1	Completely reversible	The impact is reversible with implementation of minor mitigation measures.
2	Partly reversible	The impact is partly reversible but more intense mitigation measures are required.
3	Barely reversible	The impact is unlikely to be reversed even with intense mitigation measures.
4	Irreversible	The impact is irreversible and no mitigation measures exist.

IRREPLACEABLE LOSS OF RESOURCES

This describes the degree to which resources will be irreplaceably lost as a result of a proposed activity.

1	No loss of resource	The impact will not result in the loss of any resources.
2	Marginal loss of resource	The impact will result in marginal loss of resources.
3	Significant loss of resources	The impact will result in significant loss of resources.
4	Complete loss of resources	The impact is result in a complete loss of all resources.

CUMULATIVE EFFECT

This describes the cumulative effect of the impacts. A cumulative impact is an effect which in itself may not be significant but may become significant if added to other existing or potential impacts emanating from other similar or diverse activities as a result of the project activity in question.

1	Negligible cumulative impact	The impact would result in negligible to no cumulative effects.
---	------------------------------	---

2	Low cumulative impact	The impact would result in insignificant cumulative effects.
3	Medium cumulative impact	The impact would result in minor cumulative effects.
4	High cumulative impact	The impact would result in significant cumulative effects

SIGNIFICANCE

Significance is determined through a synthesis of impact characteristics. Significance is an indication of the importance of the impact in terms of both physical extent and time scale, and therefore indicates the level of mitigation required. The calculation of the significance of an impact uses the following formula: (Extent + probability + reversibility + irreplaceability + duration + cumulative effect) x magnitude/intensity.

The summation of the different criteria will produce a non-weighted value. By multiplying this value with the magnitude/intensity, the resultant value acquires a weighted characteristic which can be measured and assigned a significance rating.

Points	Impact significance rating	Description
6 to 28	Negative low impact	The anticipated impact will have negligible negative effects and will require little to no mitigation.
6 to 28	Positive low impact	The anticipated impact will have minor positive effects.
29 to 50	Negative medium impact	The anticipated impact will have moderate negative effects and will require moderate mitigation measures.
29 to 50	Positive medium impact	The anticipated impact will have moderate positive effects.
51 to 73	Negative high impact	The anticipated impact will have significant effects and will require significant mitigation measures to achieve an acceptable level of impact.
51 to 73	Positive high impact	The anticipated impact will have significant positive effects.
74 to 96	Negative very high impact	The anticipated impact will have highly significant effects and are unlikely to be able to be mitigated adequately. These impacts could be considered "fatal flaws".
74 to 96	Positive very high impact	The anticipated impact will have highly significant positive effects.

2.4. Visibility rating in terms of proximity by using the Zone of Theoretical Visibility (ZTV) model

The ZTV reflects the visibility rating in terms of proximity of viewers to the SPP and power line. The distances were calculated using satellite imagery, but the impact magnitude was determined by using previous experiences, assumptions and opinions, it is therefore theoretical. The ZTV maps will give a clearer understanding of areas susceptible to line of sight which means, an imaginary line from the

eye to a perceived object. The ZTV maps also indicate the line of sight coverage in terms of percentage. The ZTV assessment **did not consider existing screening such as buildings and vegetation cover but rather the terrain's above mean sea level (AMSL) which indicates line of sight**. The receptors which were identified were subject to an impact assessment. The following table was utilised to determine the ZTV Visibility Rating in terms of proximity:

Table 2.2: ZTV Visibility Rating in terms of proximity

Radius	Visibility rating in terms of proximity
0-1km	Very High
1-3km	High
3-5km	Medium
5-10km	Low

2.5. Assumptions and Limitations

2.5.1. Spatial Data Accuracy

Spatial data used for visibility analysis originate from various sources and scales. Inaccuracy and errors are therefore inevitable. Where relevant, these are highlighted in the report. Every effort was made to minimize their effect.

2.5.2. Zone of Theoretical Visibility

A zone of theoretical visibility (ZTV) is the geographical area that is visible from a location. It includes all surrounding points that are in line-of-sight of that location and excludes points that are beyond the horizon or obstructed by terrain and other features. The initial determination of the theoretical visibility on maps does not consider the potential screening effect of vegetation and buildings.

2.5.3. Viewer Subjectivity

It is believed that renewable energy resources are essential to the environmental well-being of the country and planet (WESSA, 2012). Aesthetic issues are subjective, and some people find wind & solar farms, power line infrastructure and masts pleasant and optimistic while others may find it visually invasive; it is mostly perceived as symbols of energy independence; and local prosperity. Some tourism officials predict that solar farms will enhance tourism, while some solar farms have themselves become tourist attractions, with several around the world having visitor. Other tourists might find the SPPs intrusive and spoil their views of the natural environment.

2.5.4. Site Access and Drone Photos

Access to certain areas of the proposed project can sometimes be difficult due to terrain limitations or access denied by landowners. Thus, site photos are taken at the best possible location.

Photos taken by the drone are done at a certain Above Ground Level (AGL) shown on the drone's controller. The AGL on the drone's controller might slightly differ from the real world AGL.

3. EXISTING LANDSCAPE

It is possible that landscape change due to the proposed development could impact the character of an important landscape area.

Importance can be derived from specific features that can relate to urban or rural settings. They might include key natural, historic or culturally significant elements. Importance might also relate to landscapes that are uncommon or under threat from development.

Generally, the most significant natural areas are afforded a degree of legal protection such as National Parks and Reserves; however, they might also have local significance and not be protected.

This section describes the types of landscape that may be impacted, indicating the likely degree of sensitivity and describes how the landscape areas are likely to be impacted.

3.1. Landscape Character

Landscape character is a composite of several influencing factors including:

- Landform and drainage.
- Vegetation patterns.
- Nature and density of development.

3.1.1. Landform and Drainage

3.1.1.1. SPP

The proposed SPP is located in an area with relatively low significance in elevation, meaning that the site is not located on a mountain, at the foot of a mountain or in an area with a significant difference in elevation. The area around the site can be described as undulating landform formations with spikes in elevation at mining sites. However, the difference in elevation of the project site itself is approximately 89m from the highest to the lowest amsl. The SPP is located at an above mean sea level (amsl) of approximately 1527m at the highest elevation and at an amsl of 1438m at the lowest elevation. The SPP drains towards the north east.

3.1.1.2. PL

The area description above also applies to the PL. The PL is located at an above mean sea level (amsl) of approximately 1533m at the highest elevation and at an amsl of 1460m (stream crossing) at the lowest elevation. The PL drain towards the west.

The landform and drainage described above is likely to limit visibility due the undulating landforms in the area together with existing mining activities. The ZTV Section (Section 5) of this report will reflect the theoretical visibility.

Please refer to the photos below for a better understanding of the visual landscape surrounding the proposed development.



Figure 3.1: Centre of the site taken towards the north: AGL 6m.



Figure 3.2: Centre of site taken towards the north east: AGL 6m.



Figure 3.3: Centre of site taken towards the east: AGL 6m.



Figure 3.4: Centre of site taken towards the south east: AGL 6m.



Figure 3.5: Centre of site taken towards the south: AGL 6m.



Figure 3.6: Centre of site taken towards the south west: AGL 6m.



Figure 3.7: Centre of site taken towards the west: AGL 6m.



Figure 3.8: Centre of site taken towards the north west: AGL 6m.



Figure 3.9: Centre of site taken towards the north: AGL 32m.



Figure 3.10: Centre of site taken towards the north east: AGL 32m.



Figure 3.11: Centre of site taken towards the east: AGL 32m.



Figure 3.12: Centre of site taken towards the south east: AGL 32m.



Figure 3.13: Centre of site taken towards the south (PL route): AGL 32m.



Figure 3.14: Centre of site taken towards the south west: AGL 32m.



Figure 3.15: Centre of site taken towards the west: AGL 32m.



Figure 3.16: Centre of site taken towards the north west: AGL 32m.

3.1.2. Vegetation Patterns

3.1.2.1. SPP

The most recent classification of the area by Mucina & Rutherford (2006) shows that the SPP footprint falls within the classified *Rand Highveld Grassland*. Distribution includes Gauteng, North-West, Free State and Mpumalanga Provinces; In areas between rocky ridges from Pretoria to Witbank, extending onto ridges in the Stoffberg and Roossenekal regions as well as west of Krugersdorp centred in the vicinity of Derby and Potchefstroom, extending southwards and north-eastwards from there. Altitude 1 300–1 635 m, but reaches 1 760 m in some places.

The vegetation and landscape features can be described as highly variable landscape with extensive sloping plains and a series of ridges slightly elevated over undulating surrounding plains. The vegetation is species-rich, wiry, sour grassland alternating with low, sour shrubland on rocky outcrops and steeper slopes. Most common grasses on the plains belong to the genera *Themeda*, *Eragrostis*, *Heteropogon* and *Elionurus*. High diversity of herbs, many of which belong to the Asteraceae, is also a typical feature. Rocky hills and ridges carry sparse (savannoid) woodlands with *Protea caffra* subsp. *caffra*, *P. welwitschii*, *Acacia caffra* and *Celtis africana*, accompanied by a rich suite of shrubs among which the genus *Rhus* (especially *R. magalismonata*) is most prominent.

The conservation status is classified as “Endangered”. Poorly conserved (only 1%). Small patches protected in statutory reserves (Kwaggavoetpad, Van Riebeeck Park, Bronkhorstspuit, Boskop Dam Nature Reserves) and in private conservation areas (e.g., Doornkop, Zemvelo, Rhenosterpoort and Mpopomeni). Almost half has been transformed mostly by cultivation, plantations, urbanisation or dam-building. Cultivation may also have had an impact on an additional portion of the surface area of the unit where old lands are currently classified as grasslands in land-cover classifications and poor land management has led to degradation of significant portions of the remainder of this unit (D.B. Hoare, personal observation). Scattered aliens (most prominently *Acacia mearnsii*) occur in about 7% of this unit. Only about 7% has been subjected to moderate to high erosion levels.

3.1.2.2. PL

The most recent classification of the area by Mucina & Rutherford (2006) shows that the PL footprint falls within the classified *Eastern Highveld Grassland*. Distribution includes Mpumalanga and Gauteng Provinces; Plains between Belfast in the east and the eastern side of Johannesburg in the west and extending southwards to Bethal, Ermelo and west of Piet Retief. Altitude 1 520–1 780 m, but also as low as 1 300 m.

The vegetation and landscape features can be described as slightly to moderately undulating plains, including some low hills and pan depressions. The vegetation is short dense grassland dominated by the usual highveld grass composition (*Aristida*, *Digitaria*, *Eragrostis*, *Themeda*, *Tristachya* etc.) with small, scattered rocky outcrops with wiry, sour grasses and some woody species (*Acacia caffra*, *Celtis africana*, *Diospyros lycioides* subsp. *lycioides*, *Parinari capensis*, *Protea caffra*, *P. welwitschii* and *Rhus magalimontanum*).

The conservation status is classified as “Endangered”. Only a very small fraction conserved in statutory reserves (Nooitgedacht Dam and Jericho Dam Nature Reserves) and in private reserves (Holkranse,

Kransbank, Morgenstond). Some 44% transformed primarily by cultivation, plantations, mines, urbanisation and by building of dams. Cultivation may have had a more extensive impact, indicated by land-cover data. No serious alien invasions are reported, but *Acacia mearnsii* can become dominant in disturbed sites. Erosion is very low.

3.1.3. Nature and Density of the Development

Development within the study area can be divided into the following types:

- **Industrial Development;** Industrial development associated with larger urban development and large-scale coal mining development. Roughly 60% of South Africa's coal deposits are located in the Emalahleni and surrounding areas.
- **Urban Development;** Emalahleni and surrounding suburbs.
- **Sports and Recreational Development;** Facilities associated with urban development like sports clubs, sport stadiums and other recreational developments as part of urban development.
- **Agricultural Development;** This is one of the main development types in the area consisting mostly out of cattle, sheep, irrigation and dryland cultivation farming.
- **Service Development;** Facilities and infrastructure associated with development. This includes roads, power infrastructure, water infrastructure etc. Most services are linked to urban and mining development.
- **Tourism Development;** A number of guest houses and lodges are present within the study area.

4. VISUEL RECEPTORS

Visual Receptors can be defined as: “Individuals, groups or communities who are subject to the visual influence of a particular project”.

4.1. Identified Sensitive Visual Receptors

This section is intended to highlight possible receptors within the landscape which due to use could be sensitive to landscape change. They include:

- **Area Receptors** which include:
 - Emalaheni.
 - Springvalley.
 - Bankenveld Gholf Club.
 - Witbank Nature Reserve.
 - Witbank Dam.
 - Schoongezicht.
 - Ackerville.
 - Kwa-Guqa.
 - Pine Ridge.
 - Klarinet.
 - Clewer.
 - Greenside Golf Club.
 - Landau Mashie Golf Course.
 - Phola.
 - Wilge.
- **Linear Receptors** which include:
 - N4 National Road.
 - N12 National Road.
 - R547 regional road.
 - R555 regional road.
 - R544 regional road.
 - R545 regional road.
 - R104 regional road.
 - R906 regional road.
 - Witbank Skydive Club (Airstrip).
- **Point Receptors** which include:
 - Homesteads on farms.
 - Smallholdings.
 - Sports and Recreational facilities.
 - Tourism and lodging facilities.

Refer to **Figure 5.7 to 5.10: Zone of Theoretical Visibility (ZTV). These maps indicate all areas that are in direct line of site of the proposed development up to a distance of 10km.

4.2. Impacts on airports and aerodromes

4.2.1. Objects affecting airspace and applicable legislation

Any communications structure, building or other structure, whether temporary or permanent, which has the potential to endanger aviation in navigable airspace, or has the potential to interfere with the operation of navigation or surveillance systems or Instrument Landing Systems, including meteorological systems for aeronautical purposes, is considered an obstacle and shall be submitted to the Commissioner for Civil Aviation for evaluation (refer to SA-CAR Part 139.01.33).

As navigable airspace is any airspace where "heavier than air" craft can operate, it means that any obstacle, anywhere, needs to be evaluated.

The main reason is to control or prevent structures that could have a serious effect on aviation safety, especially in the vicinity of an aerodrome. It also follows that the knowledge of where obstacles are, will add to aviation safety.

Power lines

Power lines, overhead wires and cables are considered as obstacles and the detail shall be communicated to the Commissioner for Civil Aviation at an early planning stage.

The Commissioner shall require the route of the power line, the co-ordinates (latitude and longitude in degree, minute, seconds and tenth of seconds format) of turning points in the line, the maximum height of the structures above ground level and the name of the power line. The Commissioner shall evaluate the route and require those sections of the line (if any), which is considered a danger to aviation to be marked or rerouted.

Power lines shall be marked when crossing a river, valley or major highway with marker spheres of a diameter of not less than 60 cm. The spheres shall be of one colour and displayed alternately orange/red and white or a colour that is in sharp contrast to the background as seen from an airborne perspective. The spacing between the spheres and between the spheres and the supporting towers shall not exceed 30m. On lines with multiple cables, the spheres shall be fitted to the highest cable.

The marker spheres shall be visible from at least 1000m from an airborne perspective and 300m from the ground.

Where power lines cross a river or valley, the co-ordinates (latitude and longitude in degree, minute, seconds and tenth of seconds format) and the height of the line above the valley or river, shall be communicated to the Commissioner for publication in the appropriate media.

The Commissioner may require that supporting towers be marked and lighted.

Cranes

Where cranes are erected, prior permission shall be obtained from the Commissioner. The co-ordinates (latitude and longitude in degree, minute, seconds and tenth of seconds format), the ground elevation of the site above mean sea level, the height of the crane, the dimensions of the jib as well as the erecting date and duration of the project must be communicated to the Commissioner for evaluation and publication in the relevant media.

The Commissioner shall specify markings, if required.

When markings are required, the crane shall be painted in a conspicuous colour which in a sharp contrast to the background from an airborne perspective. Illumination shall clearly define the shape of the crane and the extremities of the structure shall be illuminated by medium intensity Type B flashing red light (20 – 60 flashes per minute), of 2000 candela ($\pm 25\%$) intensity.

Variations on Markings

Written, motivated request for the variation of any of the requirements for the marking of structures may be addressed to the Commissioner.

Specifications on markings

Specification on the lighting and painting of structures can be found in International Civil Aviation Organization's Annex 14 chapter 6 and the specifics in Annex 14 APPENDIX 1. COLOURS FOR AERONAUTICAL GROUND LIGHTS, MARKINGS, SIGNS AND PANELS. (<https://www.flashtechology.com/wp-content/uploads/2017/09/ICAO-Annex-14-Chapter-6-2013.pdf>).

4.2.2. Glare

Solar panels are designed to absorb light, and accordingly only reflect a small amount of the sunlight that falls on them compared to most other everyday objects (Refer to **Figure 4.1 to 4.4**). Most notably, solar panels reflect significantly less light than flat water.

In fact, glass, one of the uppermost and important components of a solar panel, reflects only a small portion of the light that falls on it—about 2-4%, depending on whether it has undergone an anti-reflective treatment. These days, to increase solar panel efficiency and power output, most panels are treated with anti-reflective coating.

The potential glint and glare effects for Bi-facial panels remains the same due to both faces consisting of a reflective surface, it is deemed very unlikely that significant glare effects from the underside are possible for static, single and dual axis trackers. This is because this face will almost always be facing away from the Sun. On static systems (north facing with a 20-degree elevation angle, for example), the underside of the panel will be angled downward towards the ground. Considering the path of the Sun throughout a typical day in South Africa, any reflections will only ever go towards the floor. The possibility of glare effects for the optimised face (the face orientated towards the Sun) remains the same.

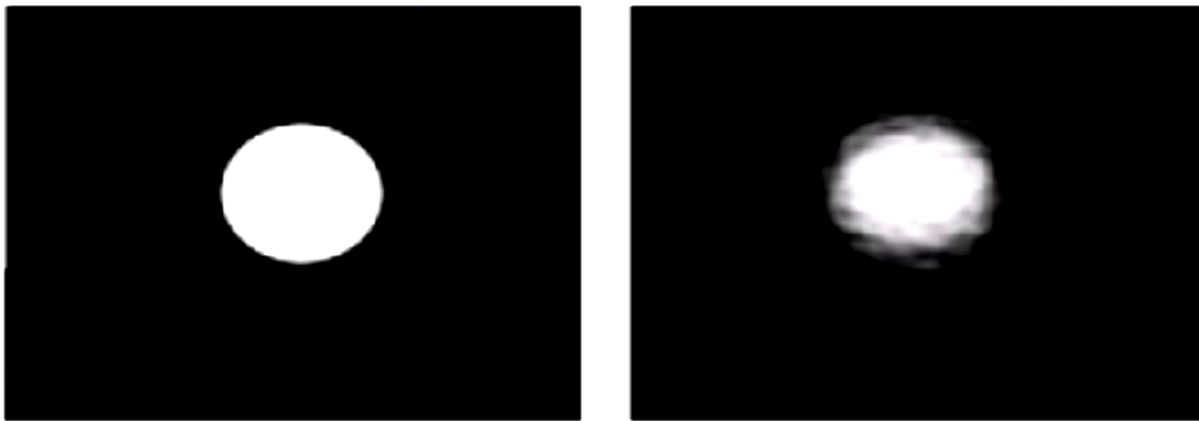


Figure 4.1: Reflection Characteristics of normal glass (left) and PV glass (right)

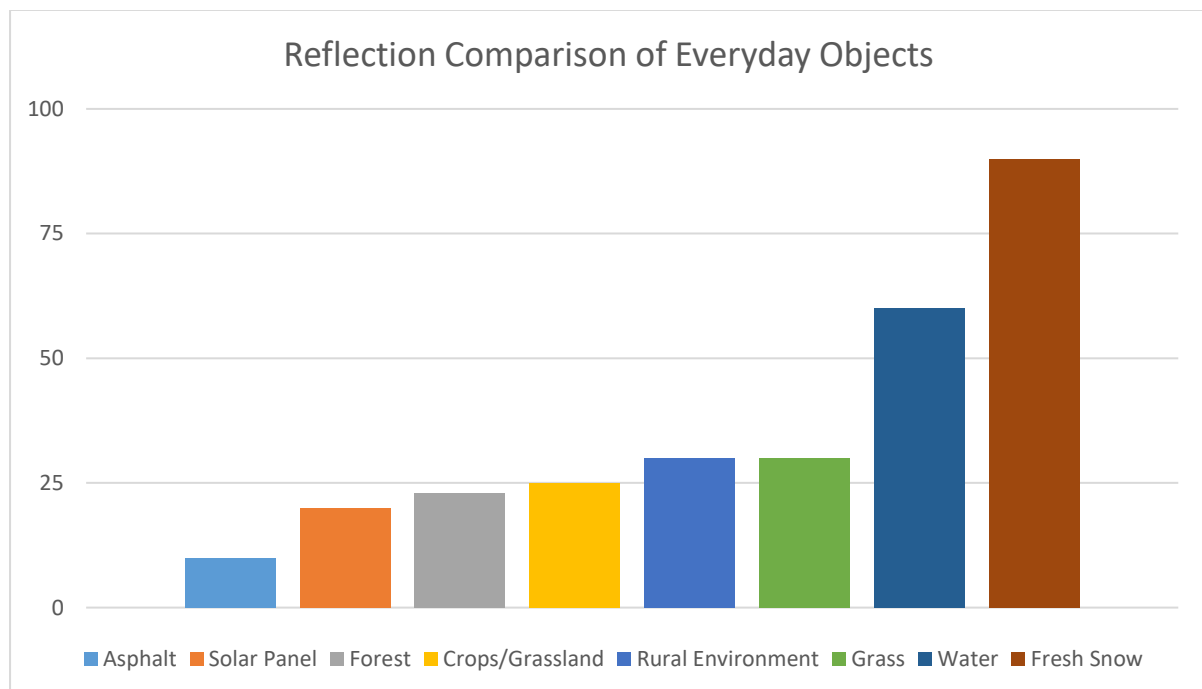


Figure 4.2: Reflection Comparison of everyday objects

Numerous airports around the world have solar installations located on their premises (Refer to Figure 4.3). Airports Company South Africa (ACSA) has commissioned three solar powered airports, George Airport in the Western Cape, followed by Kimberley airport and Upington International Airport. Most examples in which solar panels have been installed at, on or near airports are testament to fact that they are not automatically a hazard to pilots.



Figure 4.3: Solar Installations at the George Airport in the Western Cape.



Figure 4.4: View of the Bokamoso SPP from an airplane at a height of 36000 feet amsl.

Please Note: A Glint & Glare Assessment will be required as soon as the proposed site is located on the extended runway centreline within the ICAO Annex 14 Approach Surface, Take-Off Climb Surface & Departure Surface, and within 3km radius around an Aerodrome/helistop as pe Part 139.01.30 (3).

5. ZONE OF THEORETICAL VISIBILITY MODEL

Visual Receptors can be defined as: “Individuals, groups or communities who are subject to the visual influence of a particular project.”

A Zone of Theoretical Visibility (ZTV) is a Geographic Information System (GIS)-generated tool to identify the likely (or theoretical) extent of visibility of a development. The tool used in this model does not take existing screening into account but only the above mean sea level of the landscape.

Table 5.1: ZTV Assumptions

Radius	Impact Magnitude
0-1km	Very High
1-3km	High
3-5km	Medium
5-10km	Low

5.1. ZTV Rating

Table 5.2 and Table 5.3 below reflects the visibility rating in terms of proximity on sensitive receptors of the SPP and PL. **Figures 5.7 to 5.10** reflects the theoretical visibility. The distances were calculated according to experience, assumptions and opinion. The ZTV maps will give a clearer understanding of areas susceptible to line of sight of the SPP and PL.

Table 5.2: ZTV Visibility Rating in terms of Proximity to the SPP.

Radius	Visual Receptors	Visibility rating in terms of proximity
0-1km	<ul style="list-style-type: none"> - One homestead on a farm. <p>Coverage: 82.9%</p>	Very High
1-3km	<ul style="list-style-type: none"> - Two homesteads on farms. <p>Coverage: 51.9%</p>	High
3-5km	<ul style="list-style-type: none"> - Two homesteads on farms. <p>Coverage: 14.7%</p>	Medium
5-10km	<ul style="list-style-type: none"> - 23 homesteads on farms. - One lodging facility. - One cluster smallholdings. <p>Coverage: 14.3%</p>	Low

Table 5.3: ZTV Visibility Rating in terms of Proximity to the PL.

Radius	Visual Receptors	Visibility rating in terms of proximity
0-1km	<ul style="list-style-type: none"> - Two homesteads on farms. <p>Coverage: 96.6%</p>	Very High
1-3km	<ul style="list-style-type: none"> - 12 homesteads on farms. - Kwa-Guqa. <p>Coverage: 68.1%</p>	High
3-5km	<ul style="list-style-type: none"> - 13 homesteads on farms. - Kwa-Guqa. - N4 National Road. <p>Coverage: 60.5%</p>	Medium
5-10km	<ul style="list-style-type: none"> - 32 homesteads on farms. - One lodging facility. - N4 National Road. - R547 regional road. - R544 regional road. - Ackerville. - Clewer. <p>Coverage: 24.8%</p>	Low

Please Note: The ZTV assessment did not consider existing screening such as buildings and vegetation cover but rather the terrain's above mean sea level (AMSL) which indicates line of sight.

The photos below reflect a view towards the operational 200 hectares Matla A Bokone Solar Power Plant, previously known as Droogfontein 2, at a distance of approximately 1km and 2km respectively. Three photos were taken at different AGL of 6m, 30m and 50m. The photos reflect an almost negligible visibility of the solar power plants in their operational phase. Furthermore, as seen in the photos, almost no existing screening is present.

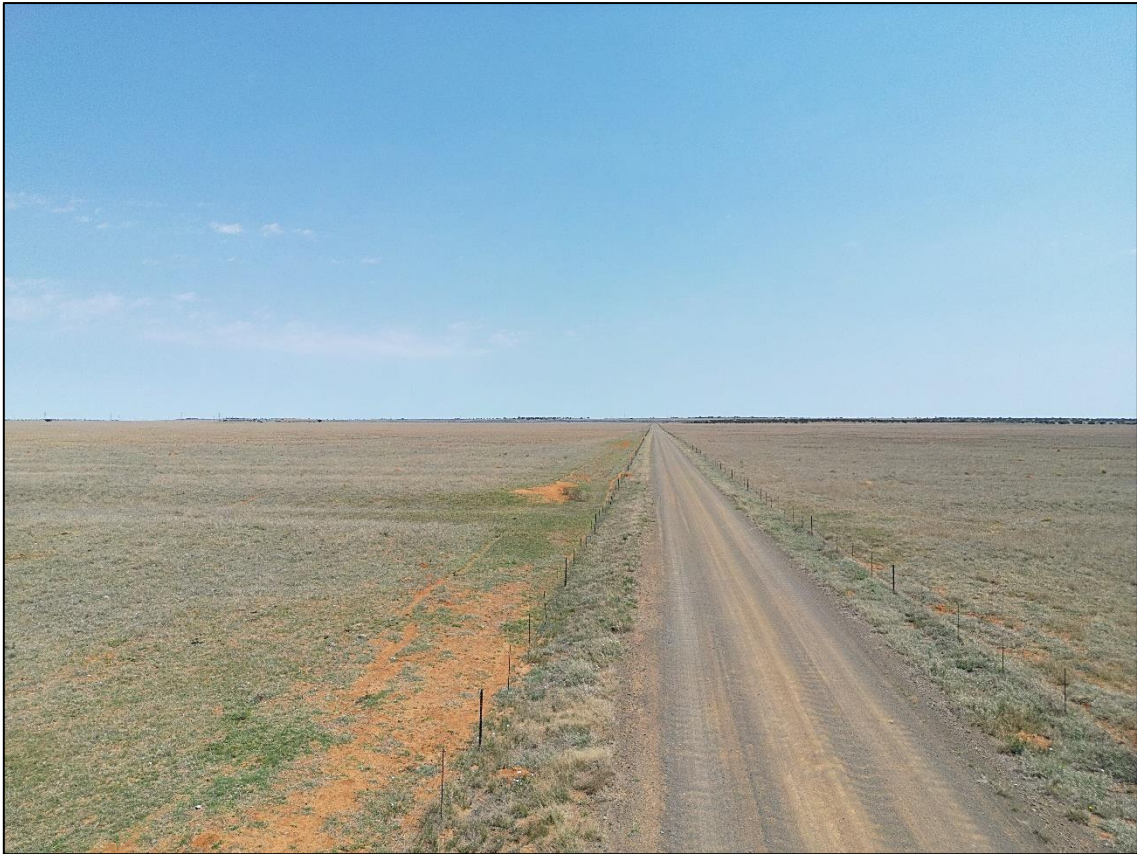


Figure 5.1: View towards the Droogfontein 2 SPP at 2km: 6m AGL.

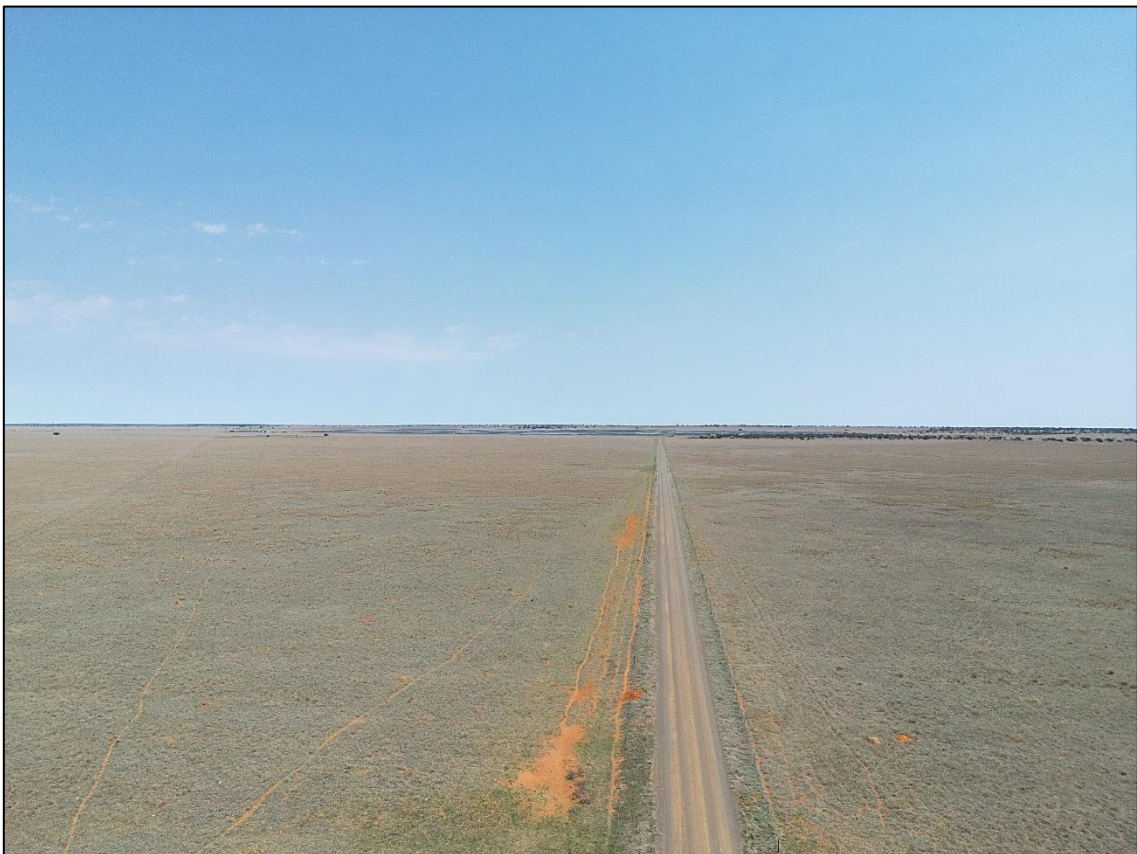


Figure 5.2: View towards the Droogfontein 2 SPP at 2km: 30m AGL.



Figure 5.3: View towards the Droogfontein 2 SPP at 2km: 50m AGL.



Figure 5.4: View towards the Droogfontein 2 SPP at 1km: 6m AGL.



Figure 5.5: View towards the Droogfontein 2 SPP at 1km: 30m AGL.



Figure 5.6: View towards the Droogfontein 2 SPP at 1km: 50m AGL.

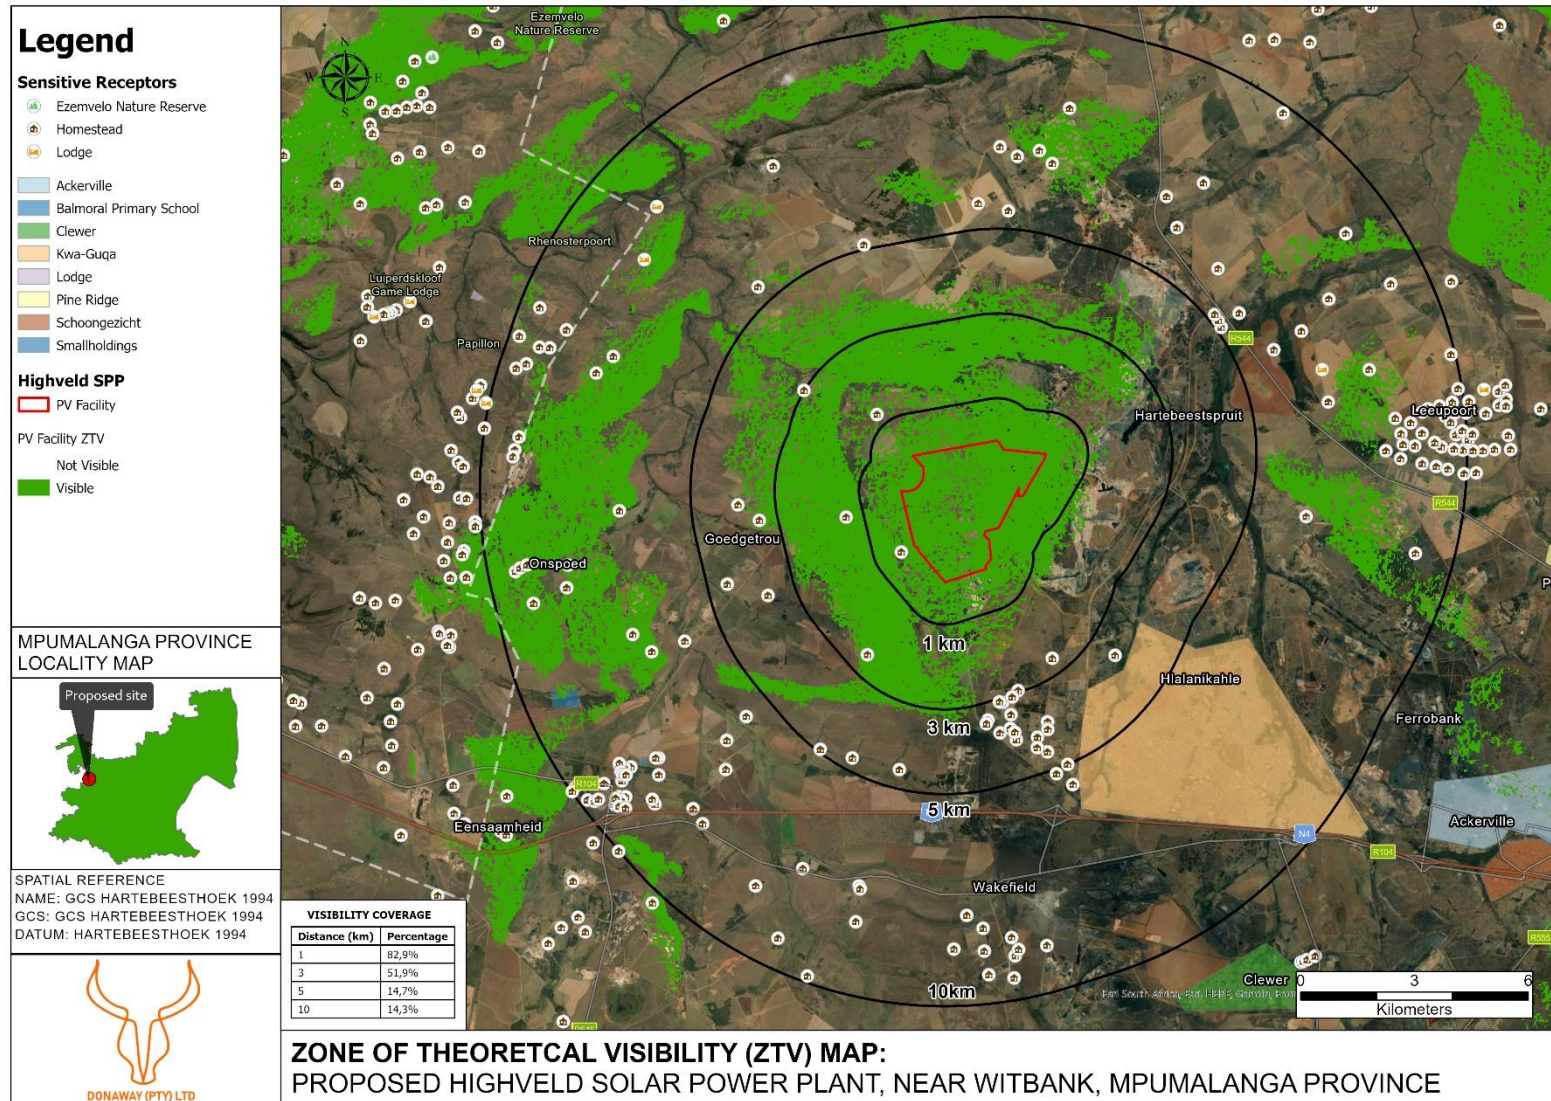


Figure 5.7: Zone of Theoretical Visibility (ZTV) for the SPP, Satellite View.

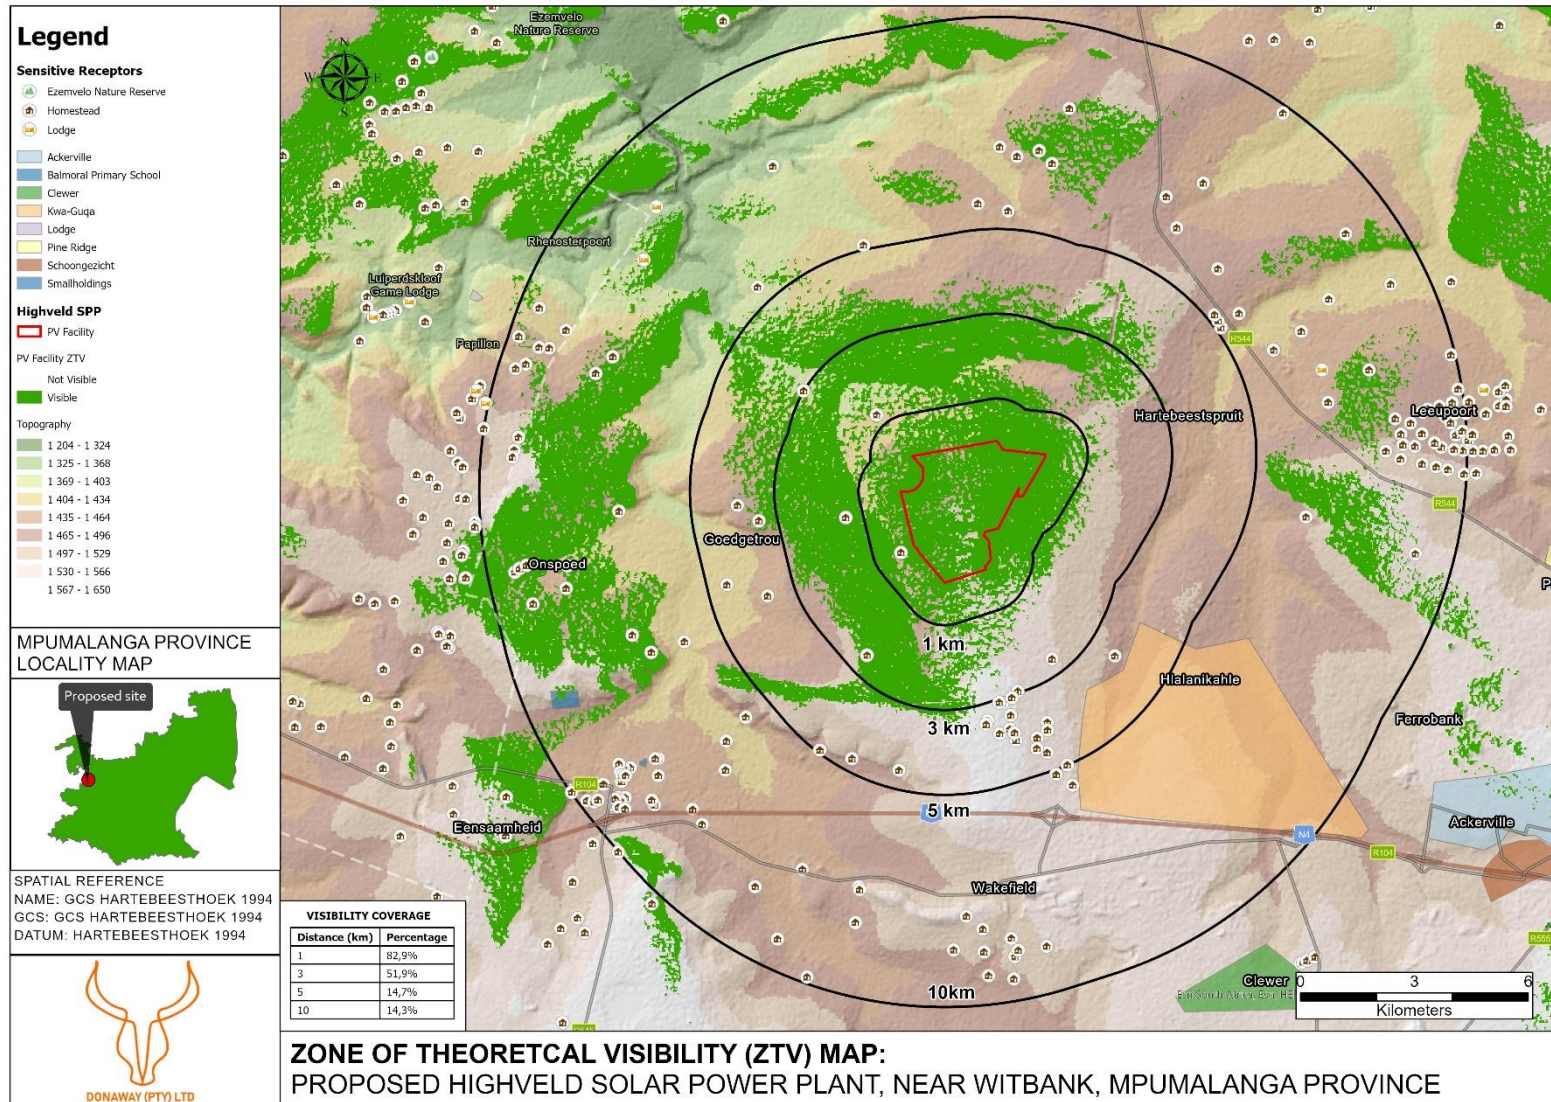


Figure 5.8: Zone of Theoretical Visibility (ZTV) for the SPP, Topography View.

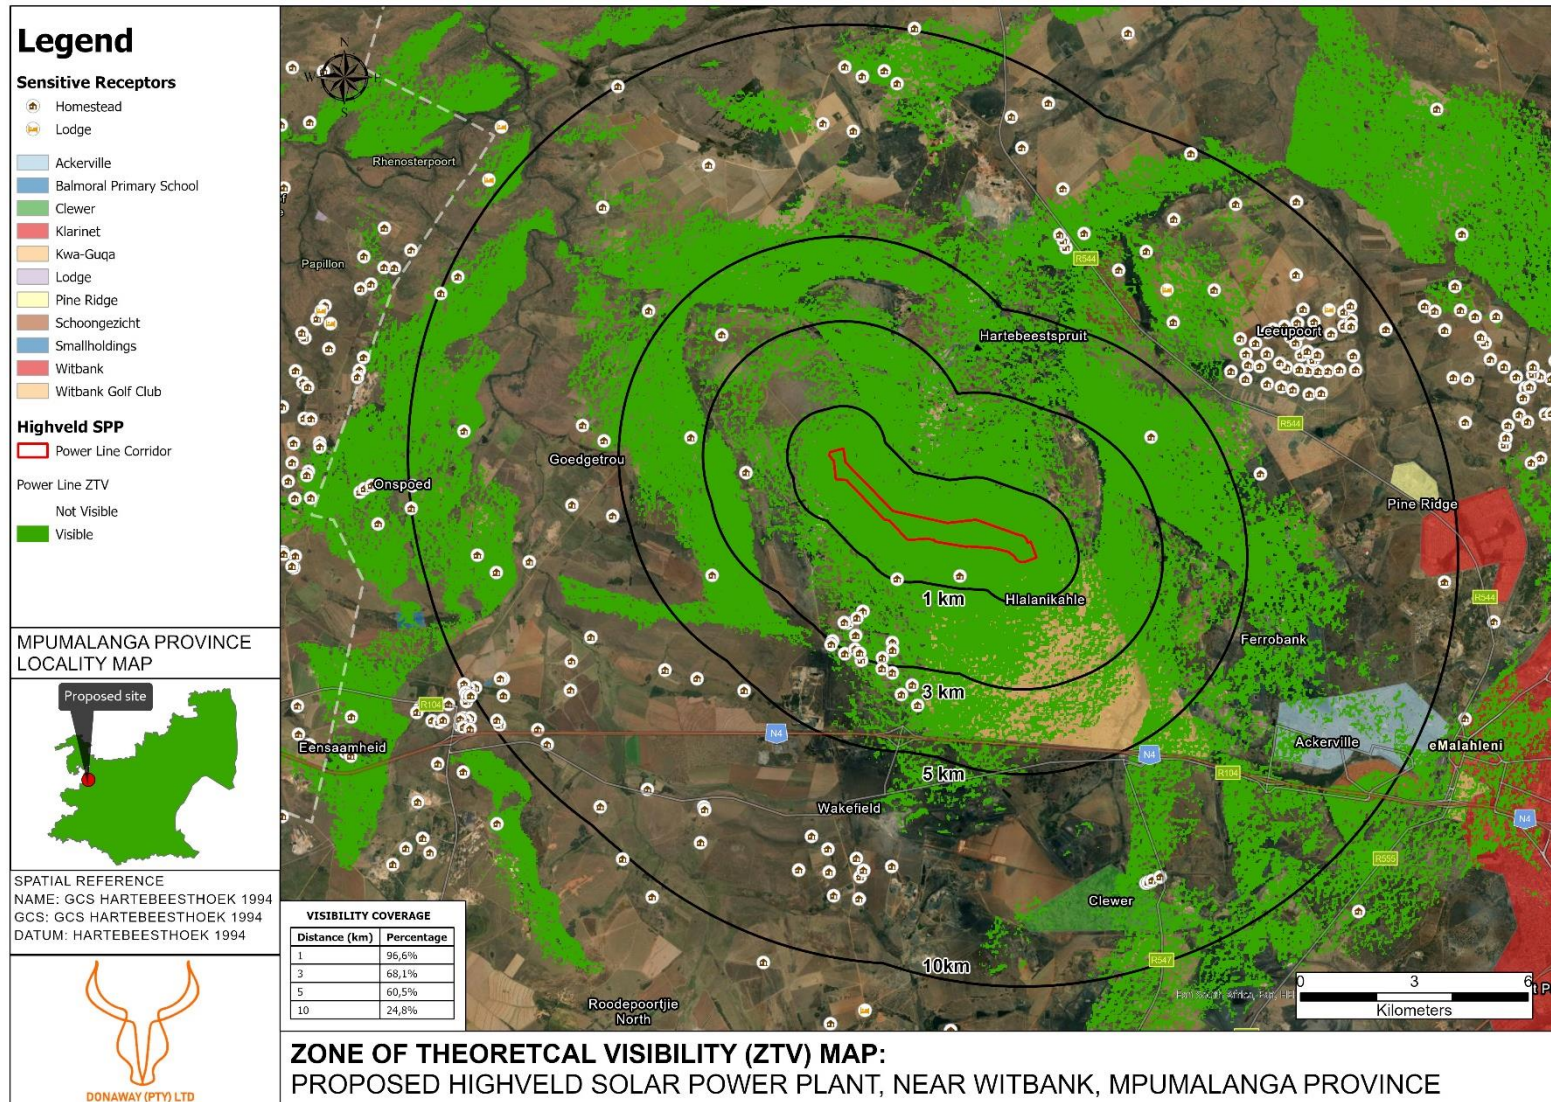


Figure 5.9: Zone of Theoretical Visibility (ZTV) for the PL, Satellite View.

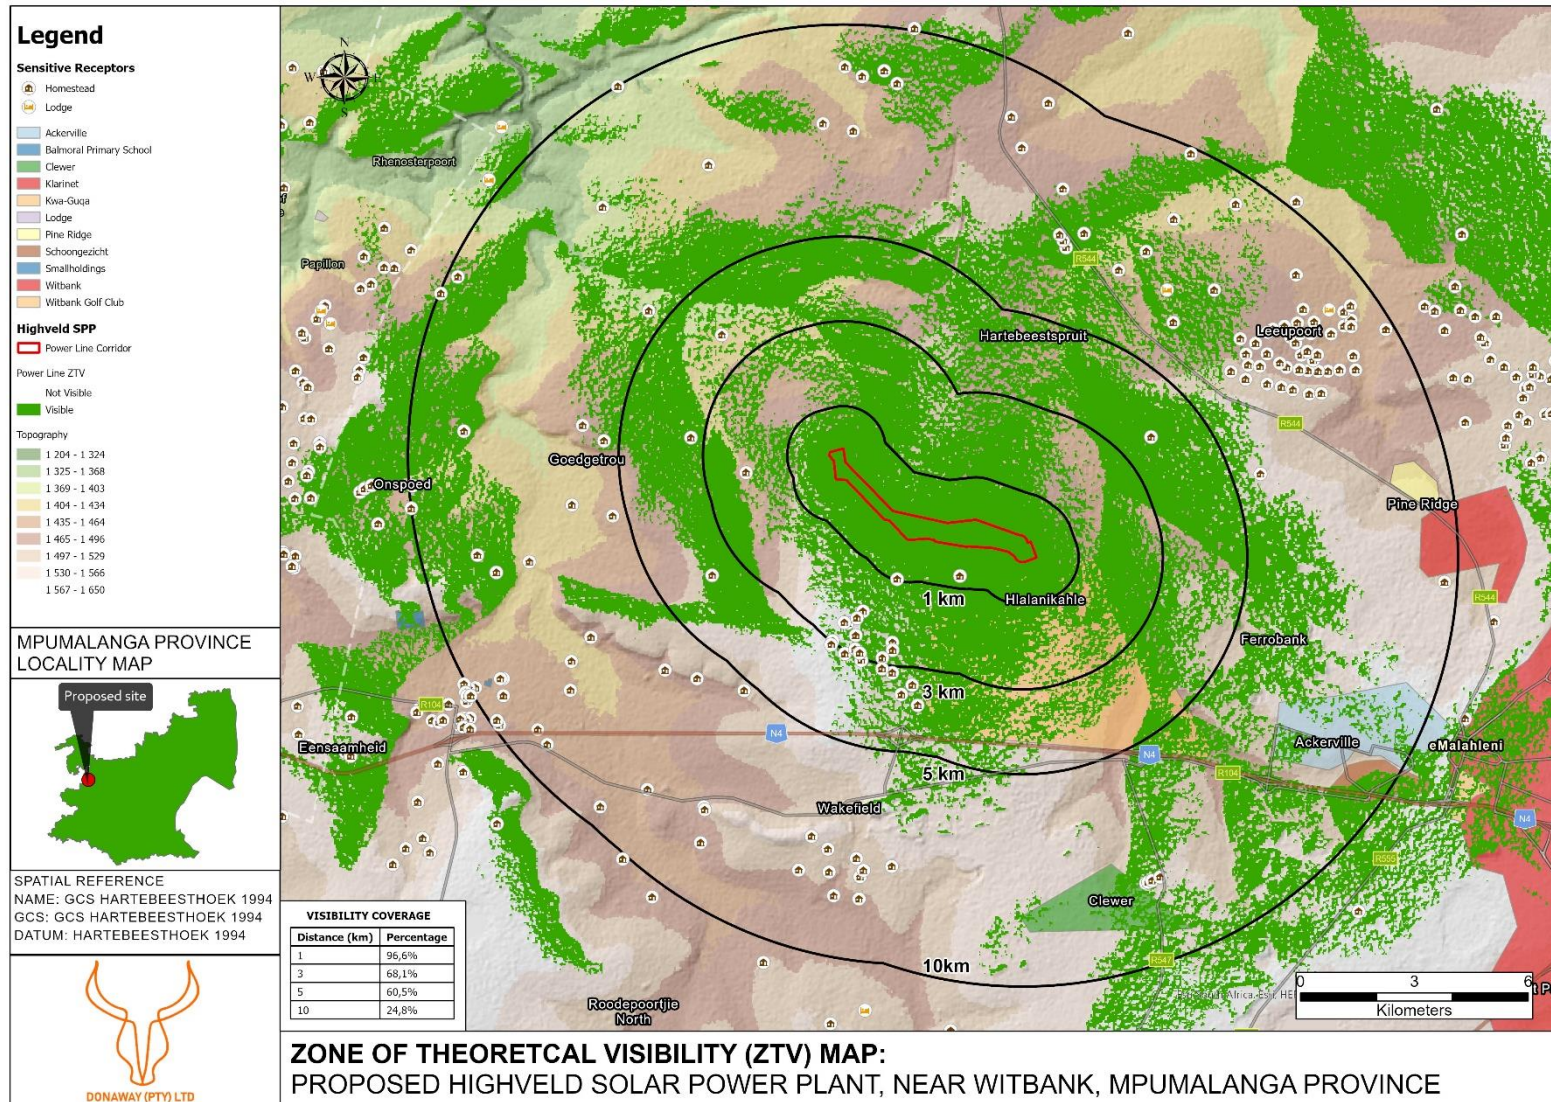


Figure 5.10: Zone of Theoretical Visibility (ZTV) for the PL, Topography View.

6. VISUAL IMPACT ASSESSMENT

This section provides a detailed description and assessment of the potential visual impacts that were identified during the EIA process for the detailed design and construction, operation, and decommissioning phases of Highveld SPP and PL.

6.1. Design and Construction Phase

The design and construction phase are expected to take approximately 12 to 18 months to complete. It is anticipated that the following activities would be included and would form part of the detailed design and construction phase:

- **Pre-planning:** Several post-authorisation factors are expected to influence the final design of the facility and could result in small-scale modifications of the positioning of the PV array and / or associated infrastructure. The construction process is dynamic and unforeseen changes to the project specifications may occur. The final facility design is required to be approved by DFFE prior to any construction activities commencing on-site. Should any substantive changes or deviations from the original scope or layout of the project reflected in the EIA process occur, DFFE would need to be notified thereof, and where applicable additional approval may need to be obtained.
- **Conduct surveys:** Prior to initiating construction, several surveys will be required. These include, but are not limited to, confirmation of the micro-siting footprint (i.e., confirming the precise location of the PV panels, substation, and the plant's associated infrastructure) and a geotechnical survey.
- **Procurement and employment:** At the peak of construction the project is likely to create up to 120 employment opportunities. These employment opportunities will be temporary and will last for a period of approximately 12 to 18 months (i.e., the length of construction). Employment opportunities generated during the construction phase will include low skilled, semi-skilled, and skilled opportunities. Solar PV projects make use of large numbers of unskilled and semi-skilled labour so there will be good opportunity to use local labour. The injection of income into the area in the form of wages will represent an opportunity for the local economy and businesses in the area. Most of the labour force is expected to be sourced from the surrounding cities. No labourers will be accommodated on-site during the construction period.
- **Establishment of an access road to the site:** Access to the facility will be obtained via two gravel roads from the N4 national road. An internal site road network will also be required to provide access to the solar field and associated infrastructure. The access and internal roads will be constructed within a 25-meter corridor. The final layout will be determined following the identification of site related sensitivities.
- **Undertake site preparation:** Site preparation activities will include clearance of vegetation. These activities will require the stripping of topsoil which will need to be stockpiled, backfilled and / or spread on site.
- **Transport of components and equipment to site:** The national, regional, secondary and proposed internal access roads will be used to transport all components and equipment

required during the construction phase of the solar facility. Some of the components (i.e., substation transformer) may be defined as abnormal loads in terms of the National Road Traffic Act (No. 93 of 1996) (NRTA) by virtue of the dimensional limitations. Typical civil engineering construction equipment will need to be brought to the site (e.g., excavators, trucks, graders, compaction equipment, cement trucks, etc.) as well as components required for the mounting of the PV support structures, construction of the substation and site preparation.

- **Establishment of laydown areas on site:** Laydown and storage areas will be required for typical construction equipment. Once the required equipment has been transported to site, a dedicated equipment construction camp and laydown area will need to be established adjacent to the workshop area. The equipment construction camp serves to confine activities and storage of equipment to one designated area to limit potential impacts associated with this phase of development. The laydown area will be used for the assembly of the PV panels and the general placement / storage of construction equipment.
- **Erect PV arrays and construct substation and invertors:** The construction phase involves installation of the PV solar panels and structural and electrical infrastructure required for the operation of the facility. In addition, preparation of the soil and improvement of the access roads is likely to continue for most of the construction phase. For array installations, vertical support posts are driven into the ground. The posts will hold the support structures (tables) on which the PV modules would be mounted. Trenches are dug for the underground AC and DC cabling and the foundations of the inverter enclosures and transformers are prepared if necessary. Underground cables and overhead circuits connect the Power Conversion Stations (PCS) to the on-site AC electrical infrastructure and ultimately the solar facility's onsite substation. The construction of the substation will require a survey of the site, site clearing and levelling and construction of access road(s) (where applicable), construction of a level terrace and foundations, assembly, erection, installation and connection of equipment, and rehabilitation of any disturbed areas, and protection of erosion sensitive areas.
- **Establishment of ancillary infrastructure:** Ancillary infrastructure will include workshop, storage and laydown areas, gatehouse and security complex, as well as a temporary contractor's equipment camp. The establishment of the ancillary infrastructure and support buildings will require the clearing of vegetation and levelling of the development site, and the excavation of foundations prior to construction. Laydown areas for building materials and equipment associated with these buildings will also be required.
- **Construction of the power line:** A power line is constructed by surveying the power line route, constructing foundations for the towers, installing the towers, stringing the conductors, and finally rehabilitating disturbed areas and protecting erosion sensitive areas.
- **Undertake site rehabilitation:** Once construction is completed and all construction equipment has been removed, the site will be rehabilitated where practical and reasonable. In addition, on full commissioning of the solar facility, any access points which are not required during operation must be closed and rehabilitated accordingly.

The majority of visual impacts associated with the project are anticipated to occur during the operational phase of the development. Impacts during the construction phase of the SPP are typical

of the type of visual impacts generally associated with construction activities. Impacts associated with the design and construction phase of a project are usually of a short duration and temporary in nature but could have long-term effects on the surrounding visual environment if not planned or managed appropriately. It is therefore necessary that the design phase be conducted in such a manner so as not to result in permanent impacts associated with the ill placement of project components or associated infrastructure.

6.1.1. Construction Phase Impacts Associated with the SPP.

Impacts during the construction phase of the project mainly relate to construction activities, dust generation and there may be a notable increase in heavy vehicles utilising the roads to the development site that may cause, at the very least, a visual nuisance to other road users and landowners in the area.

Table 6.1: Visual impact of construction activities on sensitive visual receptors to the proposed SPP.

Nature of Impact	Visual impact of construction activities on sensitive visual receptors in close proximity to the SPP.							
	Geographical Extent	Probability	Duration	Magnitude	Reversibility	Irreplaceable Loss of Resources	Cumulative Effect	SIGNIFICANCE
Pre-Mitigation	Local (2)	Definite (4)	Short term (1)	Very High (4)	Partly Reversible (2)	Marginal loss of resources (2)	Negligible (1)	(48) Negative Medium
Post-Mitigation	Local (2)	Probable (3)	Short term (1)	High (3)	Partly Reversible (2)	Marginal loss of resources (2)	Negligible (1)	(33) Negative Medium
Can the impact be mitigated?	Yes, but only partially.							
Mitigation:	Planning <ul style="list-style-type: none"> - Retain and maintain natural vegetation immediately adjacent to the development footprint. Construction <ul style="list-style-type: none"> - Ensure that vegetation is not unnecessarily removed during the construction phase. - Plan the placement of laydown areas and temporary construction equipment camps in order to minimise vegetation clearing (i.e., in already disturbed areas) where possible. - Restrict the activities and movement of construction workers and vehicles to the immediate construction site and existing access roads. - Ensure that rubble, litter, etc. are appropriately stored (if it can't be removed daily) and then disposed of regularly at a licenced waste site. - Reduce and control dust during construction by utilising dust suppression measures. - Limit construction activities between 07:00 and 18:00, where possible, in order to reduce the impacts of construction lighting. 							

	- Rehabilitate all disturbed areas immediately after the completion of construction work and maintain good housekeeping.
No-Go Alternative:	The current status quo is maintained due to no impact.
Cumulative Impacts:	The construction of the SPP may increase the cumulative visual impact together with existing power infrastructure and should any of the other proposed PV facilities be constructed. Dust will be the main factor to consider.
Residual Impacts:	None, if rehabilitation is carried out as specified.

6.1.2. Construction Phase Impacts Associated with the PL.

Table 6.2: Visual impact of construction activities on sensitive visual receptors to the PL.

Nature of Impact	Visual impact of construction activities on sensitive visual receptors in close proximity to the power line.							
	Geographical Extent	Probability	Duration	Magnitude	Reversibility	Irreplaceable Loss of Resources	Cumulative Effect	SIGNIFICANCE
Pre-Mitigation	Local (2)	Definite (4)	Short term (1)	Medium (2)	Partly Reversible (2)	Marginal loss of resources (2)	High (4)	(30) Negative Medium
Post-Mitigation	Local (2)	Probable (3)	Short term (1)	Low (1)	Partly Reversible (2)	No loss of resources (1)	High (4)	(26) Negative Low
Can the impact be mitigated?	Yes							
Mitigation:	Planning - Retain and maintain natural vegetation immediately adjacent to the development footprint. Construction - Ensure that vegetation is not unnecessarily removed during the construction phase.							

	<ul style="list-style-type: none"> - Plan the placement of laydown areas and temporary construction equipment camps in order to minimise vegetation clearing (i.e., in already disturbed areas) where possible. - Restrict the activities and movement of construction workers and vehicles to the immediate construction site and existing access roads. - Ensure that rubble, litter, etc. are appropriately stored (if it can't be removed daily) and then disposed of regularly at a licenced waste site. - Reduce and control dust during construction by utilising dust suppression measures. - Limit construction activities between 07:00 and 18:00, where possible, in order to reduce the impacts of construction lighting. - Rehabilitate all disturbed areas immediately after the completion of construction work and maintain good housekeeping.
No-Go Alternative:	The current status quo is maintained due to no impact.
Cumulative Impacts:	The construction of the 132kV power line may increase the cumulative visual impact together with existing electricity infrastructure and should any of the other proposed SPP's be constructed. Dust will be the main factor to consider.
Residual Impacts:	None, if rehabilitation is carried out as specified.

6.2. Operational Phase

The SPP and PL is anticipated to operate for a minimum of 20 years. The facility will operate continuously, 7 days a week, during daylight hours. While the solar facility will be largely self-sufficient, monitoring and periodic maintenance activities will be required. Key elements of the Operation and Management (O&M) Plan include monitoring and reporting the performance of the solar facility, conducting preventative and corrective maintenance, receiving visitors, and maintaining security.

The potential positive and negative visual impacts which could arise as a result of the operation of the proposed project include the following:

6.2.1. Potential visual impacts on sensitive visual receptors located within a 1km radius.

6.2.1.1. Potential visual impacts on sensitive visual receptors located within a 1km radius from the SPP.

Table 6.3: Visual impacts on sensitive visual receptors within a 1km radius from the SPP.

Nature of Impact	Visual impact on sensitive visual receptors within a 1km radius from the SPP.							
	Geographical Extent	Probability	Duration	Magnitude	Reversibility	Irreplaceable Loss of Resources	Cumulative Effect	SIGNIFICANCE
Pre-Mitigation	Local (2)	Definite (4)	Long term (3)	Medium (2)	Partly Reversible (2)	Marginal loss of resources (2)	Negligible (1)	(28) Negative Low
Post-Mitigation	Local (2)	Possible (2)	Long term (3)	Medium (2)	Partly Reversible (2)	Marginal loss of resources (2)	Negligible (1)	(24) Negative Low
Can the impact be mitigated?	Yes, but only partially.							
Mitigation:	Planning <ul style="list-style-type: none"> - Retain/re-establish and maintain natural vegetation immediately adjacent to the development footprint. - Where insufficient natural vegetation exists next to the property, a ‘screen’ can be planted if the landowner requests additional mitigation. This can be done using endemic, fast growers that are water efficient. Operations <ul style="list-style-type: none"> - Maintain general appearance of the facility as a whole. 							
No-Go Alternative:	The current status quo is maintained due to no impact.							
Cumulative Impacts:	The SPP may increase the cumulative visual impact together with existing power infrastructure and should any of the other proposed PV facilities be constructed.							
Residual Impacts:	The visual impact will be removed after decommissioning of the site, if the SPP is not decommissioned after 20 years – the visual impact will remain.							

6.2.1.2. Potential visual impacts on sensitive visual receptors located within a 1km radius from the PL.

Table 6.4: Visual impacts on sensitive visual receptors within a 1km radius from the PL.

Nature of Impact	Visual impact on sensitive receptors within a 1km radius from the power line.							
	Geographical Extent	Probability	Duration	Magnitude	Reversibility	Irreplaceable Loss of Resources	Cumulative Effect	SIGNIFICANCE
Pre-Mitigation	Local (2)	Probable (3)	Long term (3)	Medium (2)	Barely Reversible (3)	Marginal loss of resources (2)	Medium (3)	(32) Negative Medium
Post-Mitigation	Local (2)	Probable (3)	Long term (3)	Medium (2)	Barely Reversible (3)	Marginal loss of resources (2)	Medium (3)	(32) Negative Medium
Can the impact be mitigated?	Yes, but it might have severe financial complications.							
Mitigation:	Planning <ul style="list-style-type: none"> - Retain/re-establish and maintain natural vegetation immediately adjacent to the development footprint. Operations <ul style="list-style-type: none"> - Maintain general appearance of the power line corridor. - Screening can be established near sensitive receptors, upon request, rather than to mitigate the impact at the source. 							
No-Go Alternative:	The current status quo is maintained due to no impact.							
Cumulative Impacts:	The operation of the 132kV power line may increase the cumulative visual impact together with existing electricity infrastructure and should any of the other proposed SPP's be constructed.							
Residual Impacts:	The visual impact will be removed after decommissioning of the power line.							

6.2.2. Potential visual impacts on sensitive visual receptors located between a 1km and 3km radius.

6.2.2.1. Potential visual impacts on sensitive visual receptors located between a 1km and 3km radius from the SPP.

Table 6.5: Visual impacts on sensitive visual receptors between a 1km and 3km radius from the SPP.

Nature of Impact	Visual impact on sensitive visual receptors between a 1km and 3km radius from the SPP.							
	Geographical Extent	Probability	Duration	Magnitude	Reversibility	Irreplaceable Loss of Resources	Cumulative Effect	SIGNIFICANCE
Pre-Mitigation	Local (2)	Probable (3)	Long term (3)	Medium (2)	Partly Reversible (2)	Marginal loss of resources (2)	Negligible (1)	(26) Negative Low
Post-Mitigation	Local (2)	Possible (2)	Long term (3)	Medium (2)	Partly Reversible (2)	Marginal loss of resources (2)	Negligible (1)	(24) Negative Low
Can the impact be mitigated?	Yes, but only partially.							
Mitigation:	Planning <ul style="list-style-type: none"> - Retain/re-establish and maintain natural vegetation immediately adjacent to the development footprint. - Where insufficient natural vegetation exists next to the property, a ‘screen’ can be planted if the landowner requests additional mitigation. This can be done using endemic, fast growers that are water efficient. Operations <ul style="list-style-type: none"> - Maintain general appearance of the facility as a whole. 							
No-Go Alternative:	The current status quo is maintained due to no impact.							
Cumulative Impacts:	The SPP may increase the cumulative visual impact together with existing power infrastructure and should any of the other proposed PV facilities be constructed.							

Residual Impacts:	The visual impact will be removed after decommissioning of the site, if the SPP is not decommissioned after 20 years – the visual impact will remain.
--------------------------	---

6.2.2.2. Potential visual impacts on sensitive visual receptors located between a 1km and 3km radius from the PL.

Table 6.6: Visual impacts on sensitive visual receptors between a 1km and 3km radius from the PL.

Nature of Impact	Visual impact on sensitive receptors between a 1km and 3km radius from the power line.							
	Geographical Extent	Probability	Duration	Magnitude	Reversibility	Irreplaceable Loss of Resources	Cumulative Effect	SIGNIFICANCE
Pre-Mitigation	Local (2)	Probable (3)	Long term (3)	Medium (2)	Partly Reversible (2)	Marginal loss of resources (2)	Medium (3)	(30) Negative Medium
Post-Mitigation	Local (2)	Probable (3)	Long term (3)	Medium (2)	Partly Reversible (2)	Marginal loss of resources (2)	Medium (3)	(30) Negative Low
Can the impact be mitigated?	Yes, but it might have severe financial complications.							
Mitigation:	Planning <ul style="list-style-type: none"> - Retain/re-establish and maintain natural vegetation immediately adjacent to the development footprint. Operations <ul style="list-style-type: none"> - Maintain general appearance of the power line corridor. - Screening can be established near sensitive receptors, upon request, rather than to mitigate the impact at the source. 							
No-Go Alternative:	The current status quo is maintained due to no impact.							
Cumulative Impacts:	The operation of the 132kV power line may increase the cumulative visual impact together with existing electricity infrastructure and should any of the other proposed SPP's be constructed.							

Residual Impacts:	The visual impact will be removed after decommissioning of the power line.
--------------------------	--

6.2.3. Potential visual impacts on sensitive visual receptors located between a 3km and 5km radius.

6.2.3.1. Potential visual impacts on sensitive visual receptors located between a 3km and 5km radius from the SPP.

Table 6.7: Visual impacts on sensitive visual receptors between a 3km and 5km radius from the SPP.

Nature of Impact	Visual impact on sensitive visual receptors within a 3-5km radius from the SPP.							
	Geographical Extent	Probability	Duration	Magnitude	Reversibility	Irreplaceable Loss of Resources	Cumulative Effect	SIGNIFICANCE
Pre-Mitigation	Local (2)	Possible (2)	Long term (3)	Medium (2)	Partly Reversible (2)	Marginal loss of resources (2)	Negligible (1)	(24) Negative Low
Post-Mitigation	Local (2)	Unlikely (1)	Long term (3)	Low (1)	Partly Reversible (2)	Marginal loss of resources (2)	Negligible (1)	(11) Negative Low
Can the impact be mitigated?	Yes							
Mitigation:	Planning <ul style="list-style-type: none"> - Retain/re-establish and maintain natural vegetation immediately adjacent to the development footprint. - Where insufficient natural vegetation exists next to the property, a ‘screen’ can be planted if the landowner requests additional mitigation. This can be done using endemic, fast growers that are water efficient. Operations <ul style="list-style-type: none"> - Maintain general appearance of the facility as a whole. 							
No-Go Alternative:	The current status quo is maintained due to no impact.							
Cumulative Impacts:	The SPP may increase the cumulative visual impact together with existing electricity infrastructure and should any of the other proposed PV facilities be constructed.							

Residual Impacts:	The visual impact will be removed after decommissioning of the site, if the SPP is not decommissioned after 20 years – the visual impact will remain.
--------------------------	---

6.2.3.2. Potential visual impacts on sensitive visual receptors located between a 3km and 5km radius from the PL.

Table 6.8: Visual impacts on sensitive visual receptors between a 3km and 5km radius from the PL.

Nature of Impact	Visual impact on sensitive receptors within a 3-5km radius from the power line.							
	Geographical Extent	Probability	Duration	Magnitude	Reversibility	Irreplaceable Loss of Resources	Cumulative Effect	SIGNIFICANCE
Pre-Mitigation	Local (2)	Possible (2)	Long term (3)	Low (2)	Partly Reversible (2)	Marginal loss of resources (2)	Low (2)	(26) Negative Low
Post-Mitigation	Local (2)	Possible (2)	Long term (3)	Low (2)	Partly Reversible (2)	Marginal loss of resources (2)	Low (2)	(26) Negative Low
Can the impact be mitigated?	Yes, but it might have severe financial complications.							
Mitigation:	Planning <ul style="list-style-type: none"> - Retain/re-establish and maintain natural vegetation immediately adjacent to the development footprint. Operations <ul style="list-style-type: none"> - Maintain general appearance of the power line corridor. - Screening can be established near sensitive receptors, upon request, rather than to mitigate the impact at the source. 							
No-Go Alternative:	The current status quo is maintained due to no impact.							
Cumulative Impacts:	The operation of the 132kV power line may increase the cumulative visual impact together with existing electricity infrastructure and should any of the other proposed SPP's be constructed.							

Residual Impacts:	The visual impact will be removed after decommissioning of the power line.
--------------------------	--

6.2.4. Potential visual impacts on sensitive visual receptors located between a 5km and 10km radius.

6.2.4.1. Potential visual impacts on sensitive visual receptors located between a 5km and 10km radius from the SPP.

Table 6.9: Visual impacts on sensitive visual receptors between a 5km and 10km radius from the SPP.

Nature of Impact	Visual impact on sensitive visual receptors within a 5-10km radius from the SPP.							
	Geographical Extent	Probability	Duration	Magnitude	Reversibility	Irreplaceable Loss of Resources	Cumulative Effect	SIGNIFICANCE
Pre-Mitigation	Local (2)	Possible (2)	Long term (3)	Medium (2)	Partly Reversible (2)	Marginal loss of resources (2)	Negligible (1)	(24) Negative Low
Post-Mitigation	Local (2)	Unlikely (1)	Long term (3)	Low (1)	Partly Reversible (2)	No loss of resources (1)	Negligible (1)	(10) Negative Low
Can the impact be mitigated?	Yes							
Mitigation:	Planning <ul style="list-style-type: none"> - Retain/re-establish and maintain natural vegetation immediately adjacent to the development footprint. - Where insufficient natural vegetation exists next to the property, a ‘screen’ can be planted if the landowner requests additional mitigation. This can be done using endemic, fast growers that are water efficient. Operations <ul style="list-style-type: none"> - Maintain general appearance of the facility as a whole. 							
No-Go Alternative:	The current status quo is maintained due to no impact.							
Cumulative Impacts:	The SPP may increase the cumulative visual impact together with existing electricity infrastructure and should any of the other proposed PV facilities be constructed.							

Residual Impacts:	The visual impact will be removed after decommissioning of the site, if the SPP is not decommissioned after 20 years – the visual impact will remain.
--------------------------	---

6.2.4.2. Potential visual impacts on sensitive visual receptors located between a 5km and 10km radius from the PL.

Table 6.10: Visual impacts on sensitive visual receptors between a 5km and 10km radius from the PL.

Nature of Impact	Visual impact on sensitive receptors within a 5-10km radius from the power line.							
	Geographical Extent	Probability	Duration	Magnitude	Reversibility	Irreplaceable Loss of Resources	Cumulative Effect	SIGNIFICANCE
Pre-Mitigation	Local (2)	Possible (2)	Long term (3)	Low (1)	Partly Reversible (2)	No loss of resources (1)	Low (2)	(12) Negative Low
Post-Mitigation	Local (2)	Possible (2)	Long term (3)	Low (1)	Partly Reversible (2)	No loss of resources (1)	Low (2)	(12) Negative Low
Can the impact be mitigated?	Yes, but it might have severe financial complications.							
Mitigation:	Planning - Retain/re-establish and maintain natural vegetation immediately adjacent to the development footprint. Operations - Maintain general appearance of the power line corridor. - Screening can be established near sensitive receptors, upon request, rather than to mitigate the impact at the source.							
No-Go Alternative:	The current status quo is maintained due to no impact.							
Cumulative Impacts:	The operation of the 132kV power line may increase the cumulative visual impact together with existing electricity infrastructure and should any of the other proposed SPP's be constructed.							
Residual Impacts:	The visual impact will be removed after decommissioning of the power line.							

6.2.5. Lighting impacts.

These lighting impacts relate to the effects of glare and sky glow. The source of glare light is unshielded luminaries which emit light in all directions, and which are visible over long distances.

Sky glow is the condition where the night sky is illuminated when light reflects off particles in the atmosphere such as moisture, dust or smog. The sky glow intensifies with the increase in the number of light sources. It is possible that the SPP may contribute to the effect of sky glow within a close proximity to other proposed projects.

Please Note: The powerline will not be included into the lighting impact assessment. Lighting impacts are not associated with power lines.

6.2.5.1. Lighting impacts of the SPP.

Table 6.11: Significance of visual impacts of lighting at night on sensitive visual receptors in close proximity to the SPP.

Nature of Impact	Visual impacts of lighting at night on sensitive visual receptors in close proximity to the proposed facility.							
	Geographical Extent	Probability	Duration	Magnitude	Reversibility	Irreplaceable Loss of Resources	Cumulative Effect	SIGNIFICANCE
Pre-Mitigation	Local (2)	Possible (2)	Long term (3)	Medium (2)	irreversible (4)	Marginal loss of resources (2)	Medium (4)	(34) Negative Medium
Post-Mitigation	Local (2)	Unlikely (1)	Long term (3)	Low (1)	Completely Reversible (1)	No loss of resources (1)	Low (2)	(10) Negative Low
Can the impact be mitigated?	Yes, but only partially.							

Mitigation:	<p>Planning & Operation</p> <p>As far as practically possible:</p> <ul style="list-style-type: none"> - Shield the source of light by physical barriers (walls, vegetation etc.) - Limit mounting heights of lighting fixtures, or alternatively use footlights or bollard level lights. - Make use of minimum lumen or wattage in fixtures. - Make use of down-lighters, or shield fixtures. - Make use of low-pressure sodium lighting or other types of low impact lighting. - Make use of motion detectors on security lighting. This will allow the site to remain in relative darkness, until lighting is required for security or maintenance purposes. - The use of night vision or thermal security cameras are very effective and can replace security lighting entirely.
No-Go Alternative:	The current status quo is maintained due to no impact.
Cumulative Impacts:	The SPP may increase the cumulative visual impact should any of the other proposed PV facilities be constructed.
Residual Impacts:	The visual impact will be removed after decommissioning of the site, if the SPP is not decommissioned after 20 years – the visual impact will remain.

6.2.6. Solar glint and glare impacts.

Glint and glare occur when the sun reflects off surfaces with specular (mirror-like) properties. Examples of these include glass windows, waterbodies and potentially some solar energy generation technologies. Glint is generally of shorter duration and is described as “a momentary flash of bright light”, whilst glare is the reflection of bright light for a longer duration.

The visual impact of glint and glare relates to the potential it has to negatively affect sensitive visual receptors in relatively close proximity to the source (e.g., residents of neighbouring properties), or aviation safety risks for pilots.

Photovoltaic panels are designed to generate electricity by absorbing the rays of the sun and are therefore constructed of dark materials and are covered by an anti-reflective coating. Indications are that as little as 2% of the incoming sunlight is reflected from the surface of modern PV panels.

Please Note: The powerline will not be included into the glint and glare assessment. Glint and glare impacts are not associated with power lines.

6.2.6.1. Solar glint and glare impacts of the SPP.

Table 6.12: Significance of visual impacts of solar glint and glare as a visual distraction and possible air travel hazard of the SPP.

Nature of Impact	Visual impacts of glint and glare as a visual distraction and possible air travel hazard.							
	Geographical Extent	Probability	Duration	Magnitude	Reversibility	Irreplaceable Loss of Resources	Cumulative Effect	SIGNIFICANCE
Pre-Mitigation	Local (2)	Unlikely (1)	Long term (3)	Medium (1)	Completely Reversible (1)	No loss of resources (1)	Low (1)	(9) Negative Low
Post-Mitigation	Local (2)	Unlikely (1)	Long term (3)	Medium (1)	Completely Reversible (1)	No loss of resources (1)	Low (1)	(9) Negative Low
Can the impact be mitigated?	N/A							
Mitigation:	No mitigation measures are required.							
No-Go Alternative:	The current status quo is maintained due to no impact.							
Cumulative Impacts:	N/A							
Residual Impacts:	N/A							

6.2.7. Visual and sense of place impacts.

An area’s sense of place is created through the interaction of various characteristics of the environment, including atmosphere, visual resources, aesthetics, climate, lifestyle, culture, and heritage. An area’s sense of place is however subjective and largely dependent on the demographics of the population residing within the area and their perceptions regarding trade-offs. For example, while some individuals may prefer not to see any form of infrastructure development, others may have an interest in large-scale infrastructure, or engineering projects, and the operation of such facilities, and consider the impact to be less significant. Such a scenario may especially be true given that the project comprises a Renewable Energy project and could therefore be seen as benefitting the local environment, when compared to non-renewable energy generation projects.

An impact on the sense of place is one that alters the visual landscape to such an extent that the user experiences the environment differently, and more specifically, in a less appealing or less positive light. The visual impacts associated with the impact on sense of place relate to the change in the landscape character and visual impact of the SPP and PL. The area surrounding the project site is characterised by existing livestock, irrigation and dryland cultivation farming.

6.2.7.1. Visual and sense of place impacts of the SPP.

Table 6.13: Visual impact and impacts on sense of place of the SPP.

Nature of Impact	Visual impacts on sense of place associated with the operational phase of the SPP.							
	Geographical Extent	Probability	Duration	Magnitude	Reversibility	Irreplaceable Loss of Resources	Cumulative Effect	SIGNIFICANCE
Pre-Mitigation	Local (2)	Probable (3)	Long term (3)	High (3)	Reversible (2)	Marginal loss of resources (2)	Negligible (1)	(39) Negative Medium
Post-Mitigation	Local (2)	Possible (2)	Long term (3)	Medium (2)	Reversible (1)	Marginal loss of resources (2)	Negligible (1)	(22) Negative Low
Can the impact be mitigated?	Yes							

Mitigation:	<ul style="list-style-type: none"> - It is believed that renewable energy resources are essential to the environmental well-being of the country and planet (WESSA, 2012). Aesthetic issues are subjective, and some people find solar farms and their associated infrastructure pleasant and optimistic while others may find it visually invasive; it is mostly perceived as symbols of energy independence; and local prosperity. - The subjectivity towards the project in its entirety can be influenced by creating a “Green Energy” awareness campaign, educating the local community and potentially tourists on the benefits of renewable energy. This can be achieved by also hosting an ‘open day’ where the local community can have the opportunity to view the completed project which may enlist a sense of pride in the renewable energy project in their area. - Implement good housekeeping measures.
No-Go Alternative:	The current status quo is maintained due to no impact.
Cumulative Impacts:	Potential impact on the current sense of place in the area due to other solar power developments within the area.
Residual Impacts:	The visual impact of the SPP will remain if the facility is not decommissioned and dismantled after the end of its operational life.

6.2.7.2. Visual and sense of place impacts of the PL.

Table 6.14: Visual impact and impacts on sense of place of the PL.

Nature of Impact	Visual impacts and sense of place impacts associated with the operation phase of the PL.							
	Geographical Extent	Probability	Duration	Magnitude	Reversibility	Irreplaceable Loss of Resources	Cumulative Effect	SIGNIFICANCE
Pre-Mitigation	Local (2)	Probable (3)	Long term (3)	Medium (2)	Reversible (1)	Marginal loss of resources (2)	Low (2)	(26) Negative Low
Post-Mitigation	Local (2)	Probable (3)	Long term (3)	Medium (2)	Reversible (1)	Marginal loss of resources (2)	Low (2)	(26) Negative Low
Can the impact be mitigated?	No, but best practice measures can be implemented, and subjectivity can be influenced.							

Mitigation:	<ul style="list-style-type: none"> - It is believed that renewable energy resources are essential to the environmental well-being of the country and planet (WESSA, 2012). Aesthetic issues are subjective, and some people find solar farms and their associated infrastructure pleasant and optimistic while others may find it visually invasive; it is mostly perceived as symbols of energy independence; and local prosperity. - The subjectivity towards the project in its entirety can be influenced by creating a “Green Energy” awareness campaign, educating the local community and potentially tourists on the benefits of renewable energy. This can be achieved by also hosting an ‘open day’ where the local community can have the opportunity to view the completed project which may enlist a sense of pride in the renewable energy project in their area. - Implement good housekeeping measures.
No-Go Alternative:	The current status quo is maintained due to no impact.
Cumulative Impacts:	Potential impact on the current sense of place in the area due to other power line infrastructure within the area.
Residual Impacts:	The visual impact of the power line will remain if the power line is not decommissioned and dismantled after the end of its operational life

6.3. Cumulative Impacts

The EIA Regulations (as amended in 2017) determine that cumulative impacts, “*in relation to an activity, means the past, current and reasonably foreseeable future impact of an activity, considered together with the impact of activities associated with that activity, that in itself may not be significant, but may become significant when added to the existing and reasonably foreseeable impacts eventuating from similar or diverse activities.*” Cumulative impacts can be incremental, interactive, sequential or synergistic. EIAs have traditionally failed to come to terms with such impacts, largely as a result of the following considerations:

- Cumulative effects may be local, regional or global in scale and dealing with such impacts requires coordinated institutional arrangements;
- Complexity - dependent on numerous fluctuating influencing factors which may be completely independent of the controllable actions of the proponent or communities; and
- Project level investigations are ill-equipped to deal with broader biophysical, social and economic considerations.

According to the DFFE’s database only two solar PV plant applications have been submitted to the Department within the geographic area of investigation (refer to **Table 6.13** and **Figure 6.1** for an overview of solar PV facilities within a 30km radius of the project site).

Table 6.15: A summary of related projects, that may have a cumulative impact, in a 30 km radius of the study area.

Site name	Distance from study area	Proposed generating capacity	DEFF reference	EIA process	Project status
Samancor Chrome	11km	45 MW	12/12/20/1866	Scoping and EIA	Approved
ESKOM Duvha power station	29km	24 MW	14/12/16/3/3/2/759	Scoping and EIA	Approved

***It is unclear whether other projects not related to renewable energy will be constructed in this area. In general, development activity in the area is focused on agriculture. It is quite possible that more future solar farm development may take place within the general area.*

The potential for cumulative impacts to occur as a result of the projects is therefore likely, but very low. On the other hand, the location of the SPPs within the study area will contribute to the consolidation of SPP structures to this locality and avoid a potentially scattered proliferation of solar energy infrastructure throughout the region.

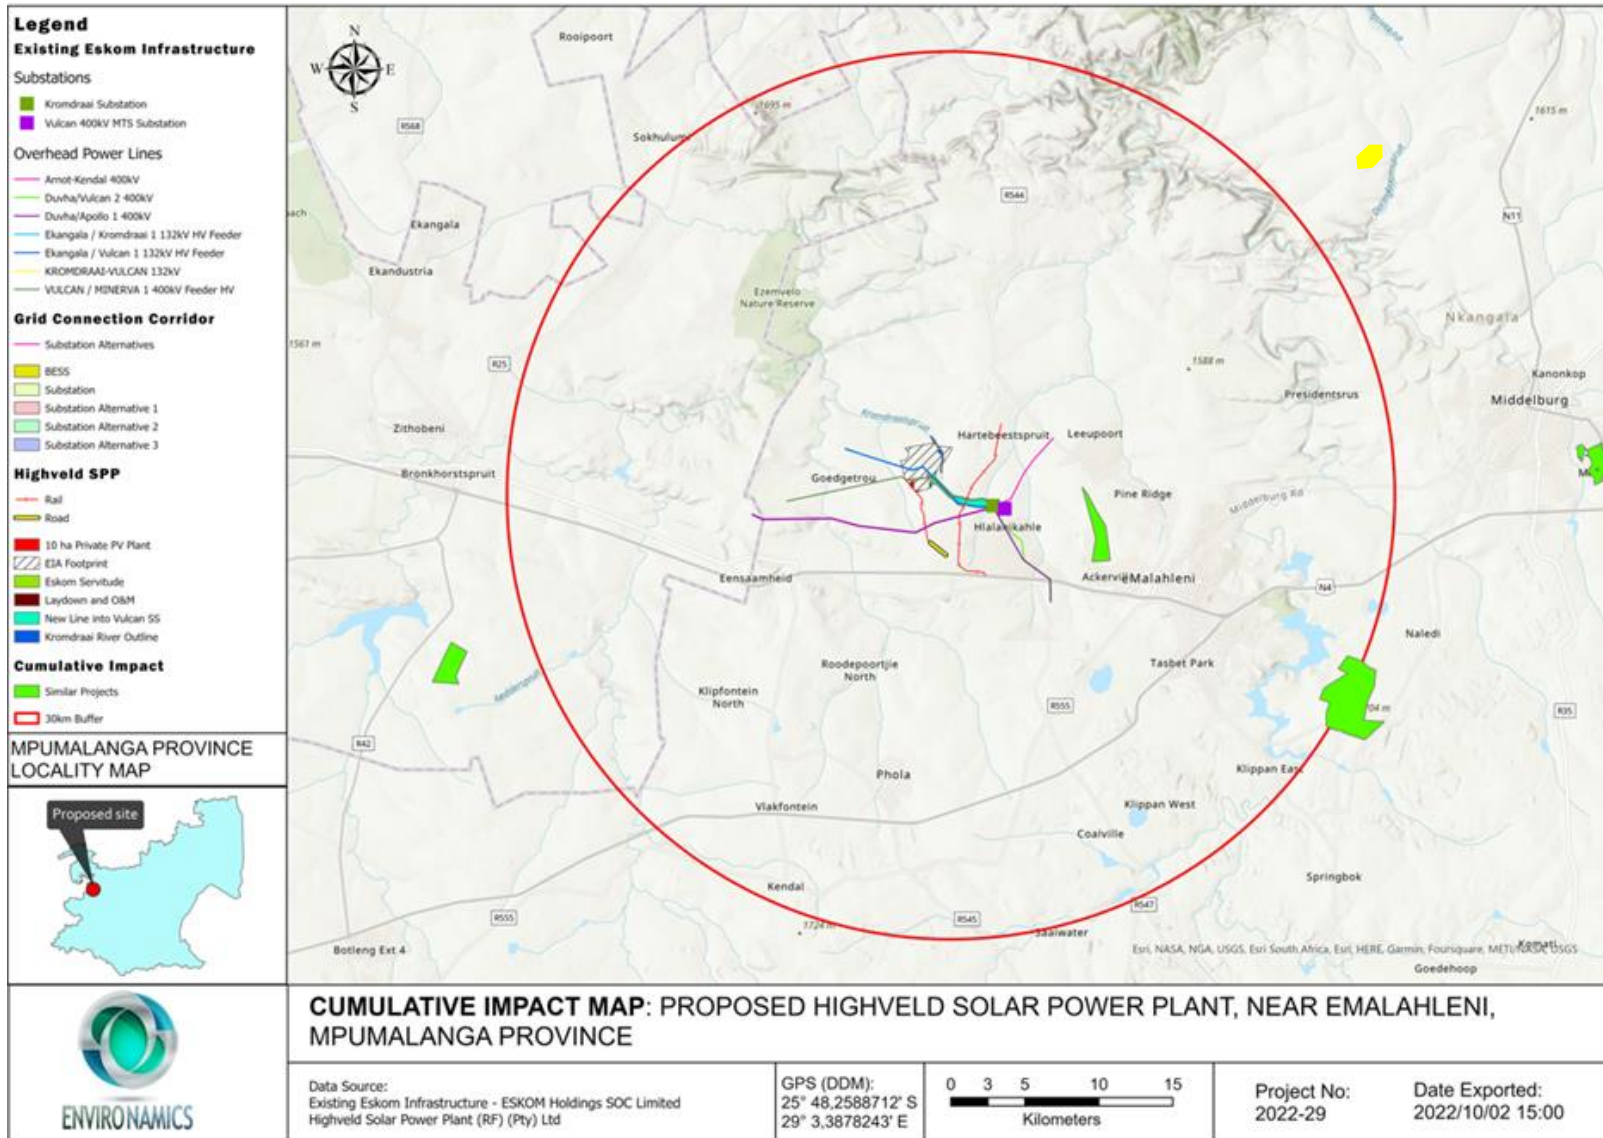


Figure 6.1: Cumulative map showing the location of other solar energy facilities within 30km of the project site.

6.3.1. Cumulative Impacts Associated with the SPP and PL.

6.3.1.1. Cumulative visual impact of the SPP and PL.

The anticipated cumulative visual impact for both proposed options of the SPP and power line, separately, are expected to include the change in sense of place, as well as the precedent being set for SPP in the area where currently there is only a precedent for agricultural related activities. Further construction and operation of the SPP in the area is likely to have a negative impact.

Table 6.16: Cumulative visual impacts of the SPP and PL.

Nature of Impact	Cumulative visual impacts related to the SPP and PL.							
	Geographical Extent	Probability	Duration	Magnitude	Reversibility	Irreplaceable Loss of Resources	Cumulative Effect	SIGNIFICANCE
Overall impact of the proposed project considered in isolation	Local (2)	Possible (2)	Long term (3)	Medium (2)	Partly Reversible (2)	Marginal loss of resources (2)	Negligible (1)	(24) Negative Low
Cumulative impact of the project and other projects in the area	Local (2)	Definite (4)	Long term (3)	Medium (2)	Barely Reversible (3)	Marginal loss of resources (2)	Low (2)	(32) Negative Medium
Can the impact be mitigated?	Yes, but only partially.							
Enhancement:	Planning - Retain/re-establish and maintain natural vegetation immediately adjacent to the development footprint / servitude.							
No-Go Alternative:	The current status quo is maintained due to no impact.							
Residual Impacts:	The visual impact of the SPP will remain if the facility is not decommissioned and dismantled after the end of its operational life.							

6.4. Decommissioning Phase

The decommissioning phase of the project will result in the same visual impacts experienced during the construction phase of the project. However, in the case of the Highveld SPP it is anticipated that the proposed facility will be refurbished and upgraded to prolong its life. No decommissioning of the facility is proposed.

6.5. Assessment of Alternatives

No alternative sites have been identified for assessment. The final location of the proposed project will be informed by technical considerations and inputs from the relevant specialist studies (including the VIA) being undertaken as part of the EIA process.

6.6. Assessment of Impacts for the No-Go Alternative

The “no-go” alternative is the option of not constructing the Highveld SPP. The implementation of the Highveld SPP is expected to result in several negative visual impacts, but if the SPP is not constructed the following positive impacts will be lost:

- Potential direct and indirect employment opportunities.
- Potential economic multiplier effect.
- Development of non-polluting, renewable energy infrastructure.

7. MITIGATION MEASURES

The primary visual impact, which is associated with the layout and appearance of the PV solar panels is not mitigatable to the point where the visual impact can be eliminated, but it can be reduced by implementing best practice measures. The functionality of the SPP cannot be changed to reduce the possible visual impact, but the following measures can be put in place to reduce the possible visual impact:

- It is recommended that vegetation cover (i.e., either natural or cultivated) immediately adjacent to the development footprint, be maintained, during both the construction and operational phases of the SPP. This will minimise the visual impact through the presence of a buffer screen between the visual receptors and the SPP.
- Existing roads should be utilised wherever possible. New roads should be planned to take due cognisance of the topography to limit cut and fill requirements. The construction/upgrade of roads should be undertaken properly, with adequate drainage structures in place to minimise the risk of erosion.
- In terms of onsite associated infrastructure and buildings, it is recommended that proper planning is implemented to minimise vegetation clearing. Consolidating infrastructure as much as possible and making use areas that already disturbed, where possible.
- Mitigation of lighting impacts include the pro-active design, planning and specification of lighting for the facility. The correct specification and placement of lighting fixtures for the proposed SPP and associated infrastructure will go far in containing, rather than spreading the light. As far as practically possible, mitigation measures include:
 - Shielding the sources of light by physical barriers (walls, vegetation, or structures.)
 - Limiting mounting heights of lighting fixtures, or alternatively using footlights or bollard level lights.
 - Making use of minimum lumen or wattage lights.
 - Making use of downlighters, or shielded fixtures.
 - Making use of low-pressure sodium lighting or other types of low impact lighting.
 - Making use of motion detectors for security lighting. This will allow the site to remain in relative darkness, until lighting is required for security or maintenance purposes.
 - The use of night vision or thermal security cameras are very effective and can replace security lighting entirely.

The following mitigation and monitoring requirements are recommended to ensure the visual impact of the proposed development is limited:

7.1. Mitigation Measures during the Construction and Decommissioning Phases

- An Environmental Control Officer should be appointed during the construction and decommissioning phase to oversee environmental compliance.
- Ensure that vegetation is not unnecessarily cleared or removed during the construction period.
- Reduce the construction period through careful logistical planning and productive implementation of resources.

- Plan the placement of lay-down areas and potential temporary construction camps in order to minimise vegetation clearing (i.e., in already disturbed areas) where possible.
- Restrict the activities and movement of construction workers and vehicles to the immediate construction site and existing access roads.
- Implement good housekeeping through the removal of rubble, litter and construction material, if it is not removed daily to a registered landfill site, then it should be stored appropriately until removal can take place.
- Dust suppression should be implemented during construction especially near roads where dust may cause reduced visibility. Due to a scarcity of water in the region, contractors could source alternative ways to implement dust suppression. One such way could be the use of fine gravel stone on roads with heavy traffic.
- Restrict construction activities to daylight hours in order to negate or reduce the visual impact associated with lighting.
- Rehabilitate all disturbed areas, construction areas, roads, slopes etc. immediately after the completion of construction works.

7.2. Mitigation Measures during the Operational Phase

- Maintenance and good housekeeping of the SPP.
- Roads must be maintained to eliminate erosion and suppress dust.
- Rehabilitated areas must be monitored for rehabilitation failure and remedial action must then be implemented as and when required.
- Where sensitive visual receptors are likely to be affected (e.g., residents of homesteads in close proximity to the SPP), it is recommended that the developer enter into negotiations with property owners regarding the potential screening of visual impacts at the receptor site. This may entail the planting of vegetation or trees. Visual screening has been found to be most effective when placed at the receptor itself.
- Similar screening (e.g., vegetation barriers or vegetation berms) may be considered along boundaries of the SPP that is adjacent to roads, mitigating the potential visual impact on observers travelling along the road.

7.3. Monitoring Requirements

The following monitoring requirements are recommended to be included as conditions in the Environmental Authorisation to ensure the visual impact of the proposed development is limited:

- The ECO and ELO should monitor the amount of litter on site during construction on a daily basis to ensure litter prevention.
- The ECO and ELO should monitor housekeeping during construction to ensure neat and tidy laydown areas.
- The ECO and ELO should monitor the amount of dust seen up to 20km from site during construction. Dust suppression should be implemented on a daily basis.
- The ECO and ELO should ensure and monitor all rehabilitation after construction for at least the first 6 months to ensure all vegetation is established in a proper and healthy way. This will also depend on the amount of rainfall and season after construction which might shorten the monitoring requirement.

- Permanent workforce should monitor the health and progress of the added vegetation to ensure proper screening is maintained. This monitoring can be implemented for at least the first 3 years after construction **IF** drought tolerant vegetation is added, otherwise on a permanent basis.
- Any other monitoring requirements set out by the EA, EMP and SACAA.

8. KEY FINDINGS AND CONCLUSION

Referring to the assessment score of this VIA report, the significance of the visual impact will be a “Negative Low Impact”. The only receptors likely to be impacted by the proposed development are the nearby property owners. A large part of the visual landscape is reflecting a farming landscape with a better visual appearance, and on the other hand, a visually polluted landscape due to large scale coal mining. A summary of the potential impacts identified for the detailed design and construction, and operation phase are presented in **Table 8.1** and **Table 8.2**. A summary of the potential cumulative visual impacts identified for the project is provided in **Table 8.3**.

Table 8.1: Summary of potential visual impacts identified for the design and construction phase.

Impact	Significance Without Mitigation	Significance With Mitigation
Construction impacts of the SPP.	(48) Negative Medium	(33) Negative Medium
Construction impacts of the PL.	(30) Negative Medium	(26) Negative Low

Table 8.2: Summary of potential visual impacts identified for the operational phase.

Impact	Significance Without Mitigation	Significance With Mitigation
Potential visual impacts on sensitive visual receptors located within a 1km radius from the SPP.	(28) Negative Low	(24) Negative Low
Potential visual impacts on sensitive visual receptors located within a 1km radius from the PL.	(32) Negative Medium	(32) Negative Medium
Potential visual impacts on sensitive visual receptors between a 1km and 3km radius from the SPP.	(26) Negative Low	(24) Negative Low
Potential visual impacts on sensitive visual receptors between a 1km and 3km radius from the PL.	(30) Negative Medium	(30) Negative Medium
Potential visual impacts on sensitive visual receptors located between a 3km and 5km radius from the SPP.	(24) Negative Low	(11) Negative Low
Potential visual impacts on sensitive visual receptors located between a 3km and 5km radius from the PL.	(26) Negative Low	(26) Negative Low
Potential visual impacts on sensitive visual receptors located between a 5km and 10km radius from the SPP.	(24) Negative Low	(10) Negative Low
Potential visual impacts on sensitive visual receptors located between a 5km and 10km radius from the PL.	(12) Negative Low	(12) Negative Low
Lighting Impacts of the SPP.	(34) Negative Medium	(10) Negative Low
Solar glint and glare impacts of the SPP.	(9) Negative Low	(9) Negative Low
Visual and sense of place impacts of the SPP.	(39) Negative Medium	(22) Negative Low

Visual and sense of place impacts of the PL.	(26) Negative Low	(26) Negative Low
--	-------------------	-------------------

Table 8.3: Summary of potential cumulative visual impacts identified for the project.

Impact	Overall impact of the proposed project considered in isolation	Cumulative impact of the project and other projects in the area
Cumulative visual impact of the SPP	(24) Negative Low	(32) Negative Medium

8.1. Key Findings

8.1.1. SPP

The construction and operational phase of the proposed Highveld SPP and its associated infrastructure, will have a visual impact on the study area, especially within (but not restricted to) a 1km radius of the proposed SPP. The visual impact will differ amongst places, depending on the distance to the SPP. Receptors that might be the most sensitive to the proposed development are residents living on farms. Referring to Table 8.1 to Table 8.3, the proposed SPP development might have a negative low impact after mitigation. The ZTV model also reflects a low theoretical visibility with an average coverage of approximately 40.95% within the 10km radius.

8.1.2. PL

The construction and operational phase of the power line will have a visual impact on the study area, especially within (but not restricted to) a 2km radius. The visual impact will differ amongst places, depending on the distance to the PL. Receptors that might be the most sensitive to the proposed development are residents living on farms and residents of Kwa-Guqa bordering the PL. Referring to the ZTV maps, the power line will have a higher theoretical visibility than the SPP with an average coverage of approximately 62.5% within the 10km radius.

8.1.3. Cumulative impact

The proposed development is located in a close proximity of existing power infrastructure and large-scale mining developments, and might have a cumulative impact on viewers. Only two other SPP's are also proposed in the area and the potential for cumulative impacts to occur as a result of the projects is therefore very likely, but very low. The visual landscape mainly consists of agricultural and mining developments with a high and low visual quality. Permanent residents of the area might be desensitised over time with the construction of more SPP's, but will stay subjective for each viewer. The location of the SPPs within the study area will contribute to the consolidation of SPP structures to this locality and avoid a potentially scattered proliferation of solar energy infrastructure throughout the region. Furthermore, the area is already intensively visually polluted by mining. The SPP will

rather have a consolidated visual impact rather than a cumulative visual impact. People in the area might already be desensitised by negative visual impacts due to the mining developments.

8.1.4. Mitigation

Due to the extent of the project, no viable mitigation measures can be implemented to eliminate the visual impact of the PV facility entirely, but the possible visual impacts can be reduced. Several mitigation measures have however been proposed regardless of whether mitigation measures will reduce the significance of the of the anticipated impacts, they are considered good practice and should be implemented and maintained throughout the construction, operational and decommissioning phases of the project, if possible.

In terms of possible landscape degradation, the landscape does not appear to have any specific protection and is characterised by farming development. No buffer areas or areas to be avoided are applicable for this development.

8.2. Conclusion

It is believed that renewable energy resources are essential to the environmental well-being of the country and planet (WESSA, 2012). Aesthetic characteristics are subjective, and some people find solar farms and their associated infrastructure pleasant and optimistic while others may find it visually invasive; It is mostly perceived as symbols of energy independence, and local prosperity. The visual impact is also dependant on the land use of an area and the sensitivity thereof in terms of visual impact, such as protected areas, parks and other tourism related activities.

Considering all positive factors of such a development including economic factors, social factors and sustainability factors, especially in a semi-arid country, the visual impact of this proposed development will be insignificant and is suggested that the development commence, from a visual impact point of view. **PLEASE NOTE** that the details of the SPP and PL should be submitted to the South African Civil Aviation Authority (SACAA).

It is therefore Donaway Environmental's recommendation that the project be approved.

9. REFERENCES

Department of Water Affairs and Forestry, South Africa. 2004. Upper Vaal Water Management Area: Internal Strategic Perspective. Prepared by PDNA, WRP Consulting Engineers (Pty) Ltd, WMB and Kwezi-V3 on behalf of the Directorate: National Water Resource Planning. DWAF Report No P WMA 08/000/00/0304.

Department of Water Affairs and Forestry, South Africa. 2004 Middle Vaal Water Management Area: Internal Strategic Perspective. Prepared by PDNA, WRP Consulting Engineers (Pty) Ltd, WMB and Kwezi-V3 on behalf of the Directorate: Water Resource Planning. DWAF Report No P WMA 09/000/00/0304)

Department of Water Affairs and Forestry, South Africa. 2004. Lower Vaal Water Management Area: Internal Strategic Perspective. Prepared by PDNA, WRP Consulting Engineers (Pty) Ltd, WMB and Kwezi-V3 on behalf of the Directorate: National Water Resource Planning. DWAF Report No P WMA 10/000/00/0304).

Mucina and Rutherford. 2006. **The vegetation of South Africa, Lesotho and Swaziland.** Strelitzia 19, South African National Biodiversity Institute, Pretoria, South Africa (2006).

South African Civil Aviation Authority. 2016. Objects affecting air space. Available at: <http://www.caa.co.za/Pages/Obstacles/Objects-affecting-airspace.aspx> [accessed Jul 19, 2017].

The Landscape Institute. 2002. Guidelines for Landscape and Visual Impact Assessment 2nd ed., New York: Spon Press.

WESSA. 2012. Wind Energy: WESSA Position Statement. Available at: http://wessa.org.za/site17/wp-content/uploads/2017/01/Wind_Energy_Position_Statement_2013.pdf [accessed Jul 23, 2017].

World Bank Group. 2015. Environmental, Health, and Safety Guidelines for Wind Energy. Available at: http://www.ifc.org/wps/wcm/connect/2c410700497a7933b04cf1ef20a40540/FINAL_Aug+2015_Wind+Energy_EHS+Guideline.pdf?MOD=AJPERES. [accessed Jul 19, 2017].

Young, G, Maxibuko, B., and Muller, L. 2009. Visual Impacts of Power Lines in Eskom, Eskom Research and Innovation Department Technology, Strategy and Planning, Research Report, Report Number RES/RR/08/30193