

# **HOTAZEL PHOTOVOLTAIC FACILITY AND ASSOCIATED INFRASTRUCTURE**



## **TRAFFIC AND TRANSPORTATION ASSESSMENT**

**NOVEMBER 2018**



P O Box 381  
Century City  
7441  
Tel. +27 21 555 0400

Rev	Description	Date
0	Issued in Draft	October 2018
1	Final Submission	November 2018

This report was prepared and reviewed by the undersigned.

Prepared:

Amory Le Roux-Arries  
Civil Engineer

Reviewed:

Andrew Cleghorn,  
Principal Civil Engineer

This report was prepared by Knight Piésold Ltd. for the account of ABO Wind Lichtenburg 1 PV (Pty). Report content reflects Knight Piésold's best judgement based on the information available at the time of preparation. Any use a third party makes of this report, or any reliance on or decisions made based on it is the responsibility of such third parties. Knight Piésold Ltd. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. Any reproductions of this report are uncontrolled and might not be the most recent revision.

## Table of Contents

1. INTRODUCTION .....	1
1.1 Objectives of the Study .....	1
1.2 Study Area .....	2
1.3 Locality.....	2
2. THE DEVELOPMENT .....	4
2.1. Current and Proposed Land Use Rights .....	4
3. ROAD NETWORK ASSESSMENT .....	5
3.1. R31.....	5
3.2. R380.....	5
3.3. Current Legislation on Road Freight.....	6
3.4. Authority and Permit Requirements .....	7
4. TRAFFIC GENERATION .....	8
4.1. Construction Phase.....	8
4.2. Traffic Statement.....	8
4.3. Operational Phase .....	9
5. TRANSPORT STUDY .....	10
5.1. Proposed Access .....	10
5.2. Internal Roads.....	11
5.3. Route from Preferred Port .....	12
5.4. Route from first Alternative Port.....	16
5.5. Route from Second Alternative Port .....	18
5.6. Access during Construction (Route for Construction Materials) .....	20
6. CONCLUSIONS.....	20

## List of Figures

Figure 1.1: Locality Plan.....	3
Figure 2.1: Conceptual layout of PV panels.....	4
Figure 4.1: Site Areas during Construction .....	8
Figure 5.1: Site Access .....	10
Figure 5.2: Preferred route from Durban port .....	12
Figure 5.3: Route from alternative 1 Port .....	16
Figure 5.4: Route from alternative 2 port.....	18

## List of Tables

Table 5.1: Preferred Route Assessment .....	13
Table 5.2 Route Elements from Alternative 1 Port .....	16
Table 5.3 Route Elements from Alternative 2 Port .....	19

## 1. INTRODUCTION

Knight Piésold Consulting was appointed by ABO Wind Hotazel PV (Pty) Ltd to undertake a Traffic and Transportation Assessment for the proposal of a photovoltaic (PV) energy facility and associated infrastructure, on a site approximately 3km south east of Hotazel, in the Northern Cape Province of South Africa. This site falls within ward 4 of the Joe Morolong local Municipality in the John Taolo Gaetsewe District.

The remainder of Farm York A279 with Grid connection on Remainder of Farm 280 and Portion 11 of Farm York A 279 has been identified by the applicant (ABO Wind Hotazel PV (Pty) Ltd) as the preferred site suitable for the development of a commercial PV facility. The total assessed area of the project site is 636.8ha.

Hotazel Solar is to consist of solar photovoltaic (PV) technology with fixed, single or double axis tracking mounting structures, with a maximum generation capacity of 100MW as well as associated infrastructure, which will include:

- On-site substation;
- Auxiliary buildings (gatehouse and security, control centre, office, warehouse, canteen and visitors centre and staff lockers);
- Inverter stations, transformers and internal electrical reticulation;
- Access and internal road network;
- Laydown area;
- Overhead 132kV electrical distribution line / grid connection connecting to the existing Eskom Hotazel Substation;
- Rainwater tanks; and
- Perimeter fencing and security infrastructure.

### 1.1 Objectives of the Study

The objectives of this traffic and transportation study are to:

- a. Review the study area and describe the baseline traffic conditions;
- b. Determine the suitability of access to and egress from the site;
- c. To evaluate the safety of the proposed accesses;
- d. Address the impact of traffic generated by the proposed development, with specific reference to traffic safety, operations and road condition;
- e. Propose mitigation measures for any identified significant risks or impacts and enhance positive risks or impacts of the project.

The broad methodology applied to the study is as follows:


- Site visit;
- Reviewing of the Draft Scoping report;
- Data collection and observation of existing traffic conditions;
- Data analysis;
- Liaison with client and property owners;
- Preparation of report and drawings;
- Review of comments on report;
- Amendments to report and finalisation.

## **1.2 Study Area**

The site is located approximately 3km south east of Hotazel, in the Northern Cape Province of South Africa. This site falls within ward 4 of the Joe Morolong local Municipality in the John Taolo Gaetsewe District.

## **1.3 Locality**

The full extent of 636.8ha of the site was assessed for the proposed project. A maximum area of 275ha (approximately 43% of total project site) is required for the development of Hotazel Solar. The PV structures will occupy a maximum area of 275ha, while the supporting infrastructure such as internal roads (18ha), auxiliary buildings (1ha), and an onsite substation (1ha) will occupy the remaining extent. The locality plan is illustrated in *Figure 1.1* below.

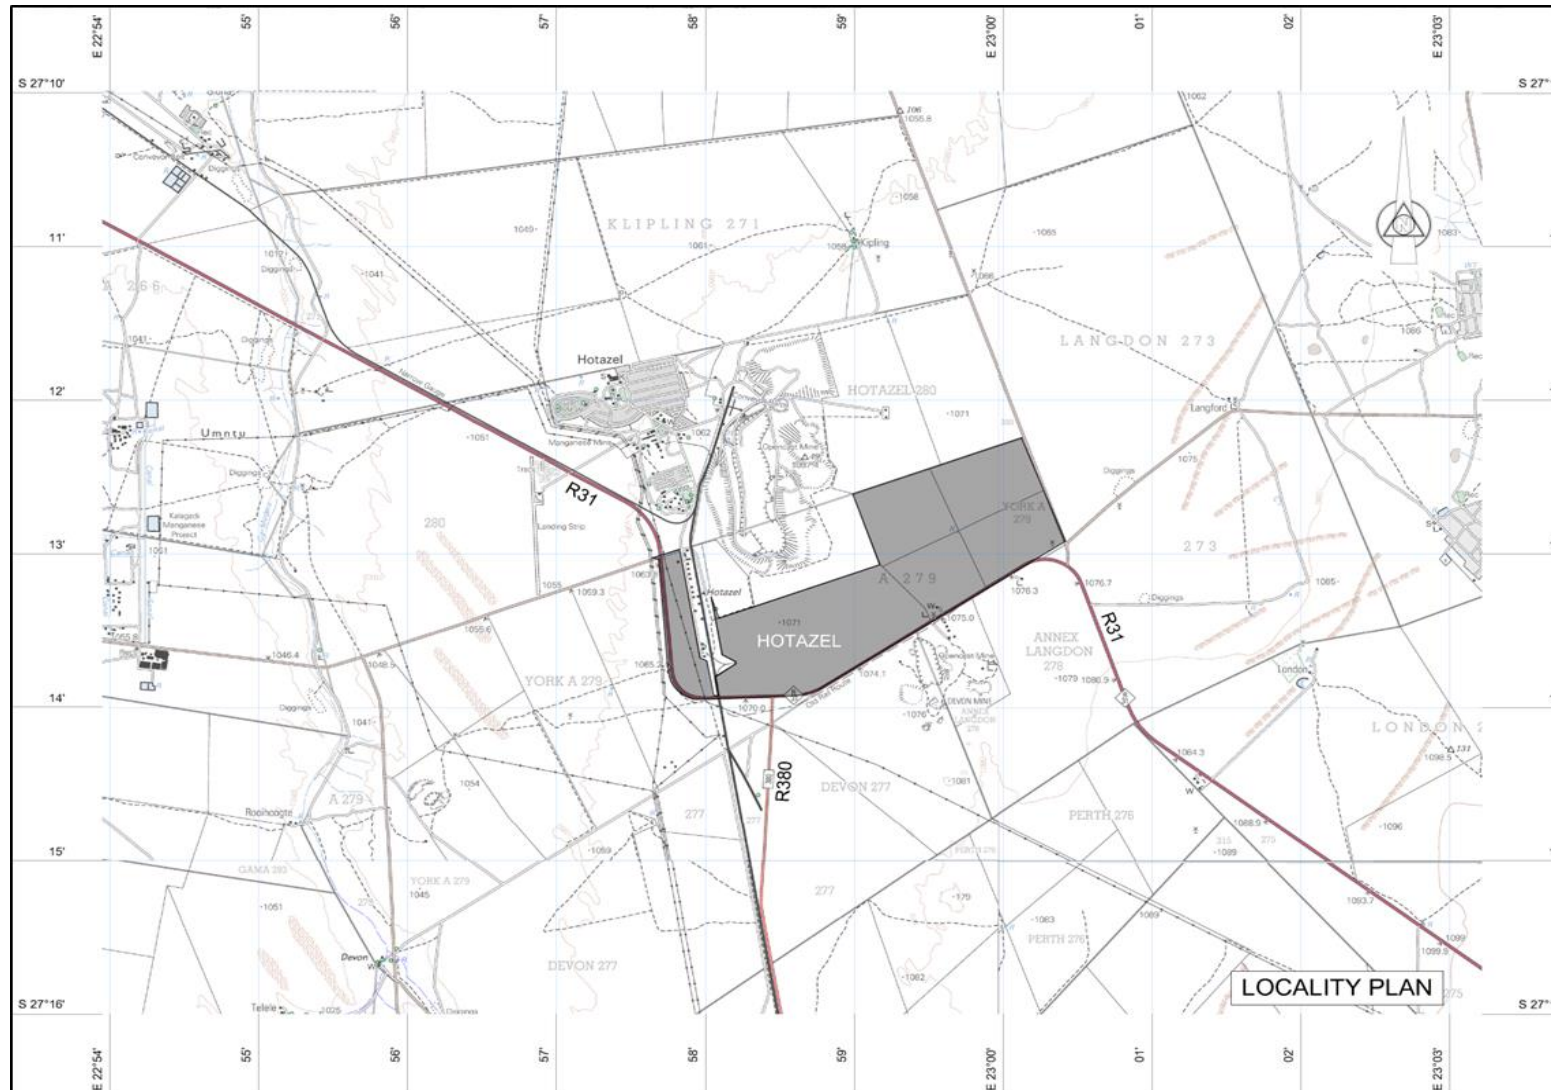


**Figure 1.1: Locality Plan**



## 2. THE DEVELOPMENT

### 2.1. Current and Proposed Land Use Rights

The project site is currently zoned for agricultural use. Rezoning is therefore required to a Special Zone to enable commercial use of this property. The proposed site layout is illustrated in *Figure 2.1* below.

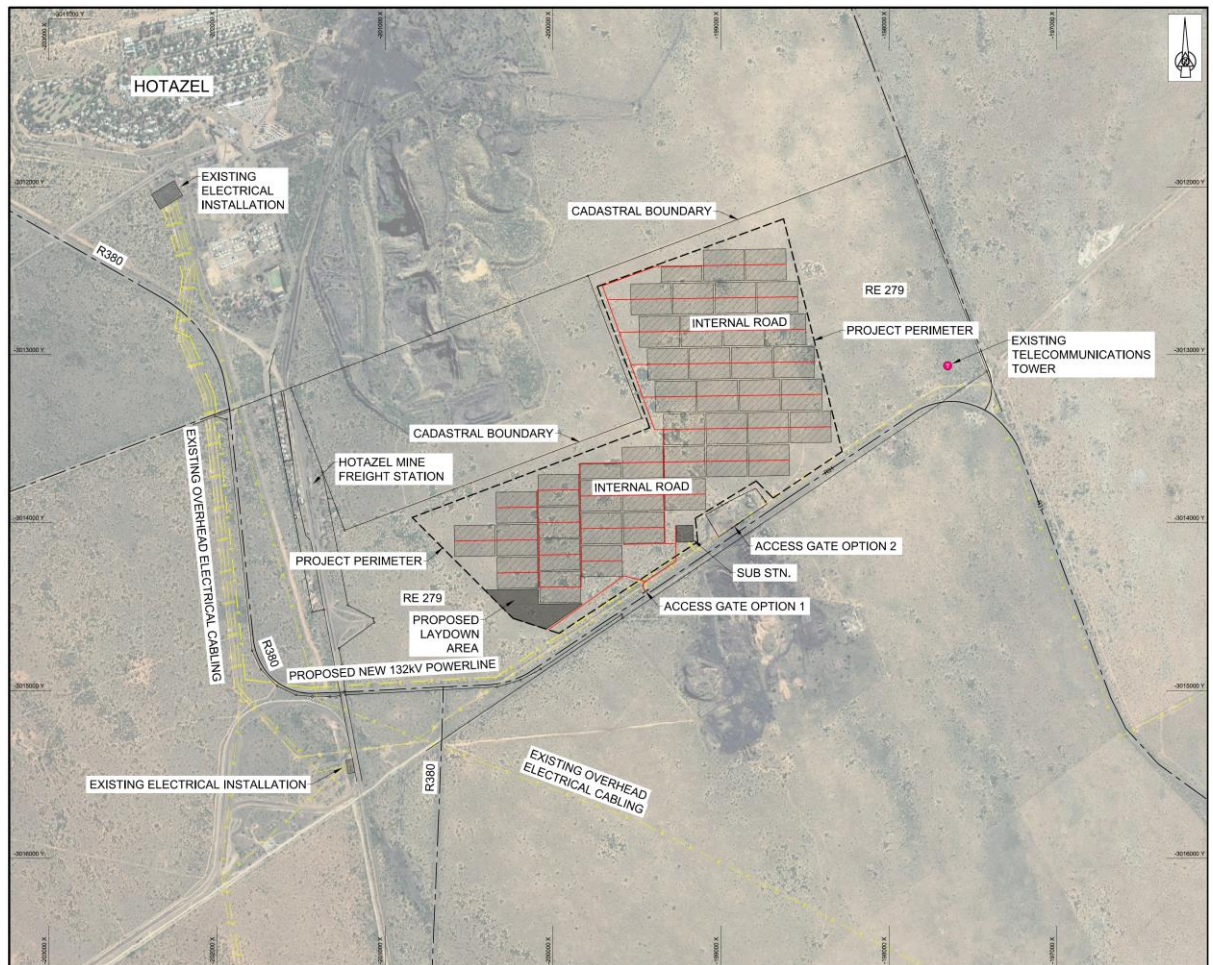

**Figure 2.1:** Conceptual layout of PV panels



### 3. ROAD NETWORK ASSESSMENT

National, regional, secondary and the proposed internal access roads will be used to transport all components and equipment required during the construction phase of the solar facility. Some of the components (e.g. substation transformer) may be defined as abnormal loads in terms of the National Road Traffic Act (No.93 of 1996), by virtue of the dimensional limitations.

The routes leading to the site, from both the preferred and alternative ports, are Provincial and National Roads.

#### 3.1. R31

The Regional Route 31 (R31) is a single carriageway road with one lane in each direction. The lanes on this road are approximately 3.7m wide with gravel shoulders. This road connects Kimberley with the Namibian border via Kuruman and Hotazel. The current pavement condition of this road was found to be fair to good.



**Photograph 3.1:** Road condition R31



**Photograph 3.2:** Road markings on R31

#### 3.2. R380

The Regional Route 380 (R380) is a single carriageway road with one lane in each direction. The lanes on this road are approximately 3.7m wide with gravel shoulders on both sides of the road. This road connects the town of Kathu, off the N14, to the R31. The speed limit on this road varies between 60 to 80km/h. The R380 also provides access to the Mokala Mine which is located approximately 10km south of the R31 intersection.

The current pavement condition of this road was found to be poor with large crocodile cracks, no road markings and nearly no road edge for most part of the road as shown in *Photographs 3.3 to 3.6*.



**Photograph 3.3:** Patching along the route



**Photograph 3.4:** Crocodile cracks in the pavement



**Photograph 3.5:** non-existing road edge



**Photograph 3.6:** No centreline

### 3.3. Current Legislation on Road Freight

The current general limitations on road freight transport are:

- a. Axle load limitation of 7.7 ton on front axle and 9.0 ton on single rear axles;
- b. Axle unit limitations of 18t for dual axle unit and 24t for 3 axle unit
- c. The bridge formula requirements to limit load concentration and to regulate load distribution on the vehicle is as follows:
  - Permissible mass =  $(L * 2\ 100) + 18\ 000$  kilogram
  - With L = the distance from the first axle of any axle or axle unit to the last axle of any consecutive axle or axle unit (in meters).
- d. Gross vehicle mass limited to 56t. This equates to a typical payload of approximately 30t;

- e. Maximum vehicle length of 22m for interlinks, 18.5m for horse and trailer and 13.5m for a single unit;
- f. Width limit of 2.6m; and
- g. A height limit of 4.3m.

Abnormal permits are required for vehicles exceeding any of the above limits. If, for any one of the above reasons, the equipment cannot be delivered along the preferred route, the alternate route should be considered.

### **3.4. Authority and Permit Requirements**

For authority and permit requirements, the following should be noted:

- a. Toll fees are payable on routes from the port. Toll fees for heavy vehicles with five or more axles are estimated to be R850 per trip on the preferred route.
- b. A separate abnormal load permit will be required for each Provincial Authority that the abnormal load passes through. The estimated fee of these permits' ranges between R10 000 and R 17 500 per trip. The application process for these permits takes approximately four weeks to complete.




## 4. TRAFFIC GENERATION

### 4.1. Construction Phase

Imported elements are shipped to, and transported from, the nearest and most practical South African port to site. The largest potential load will be a single 100MVA transformer, with a payload of approximately 90 tons. Freight will be transported predominantly on surfaced National and Provincial roads.

Typical civil engineering construction plant, as well as other specialist equipment, will be required for site preparation, construction of the substation and mounting of the PV support structures. A temporary laydown area, approximately 5ha in extent will be required during construction. Storage areas will be required for typical construction equipment, see *Figure 4.1*.

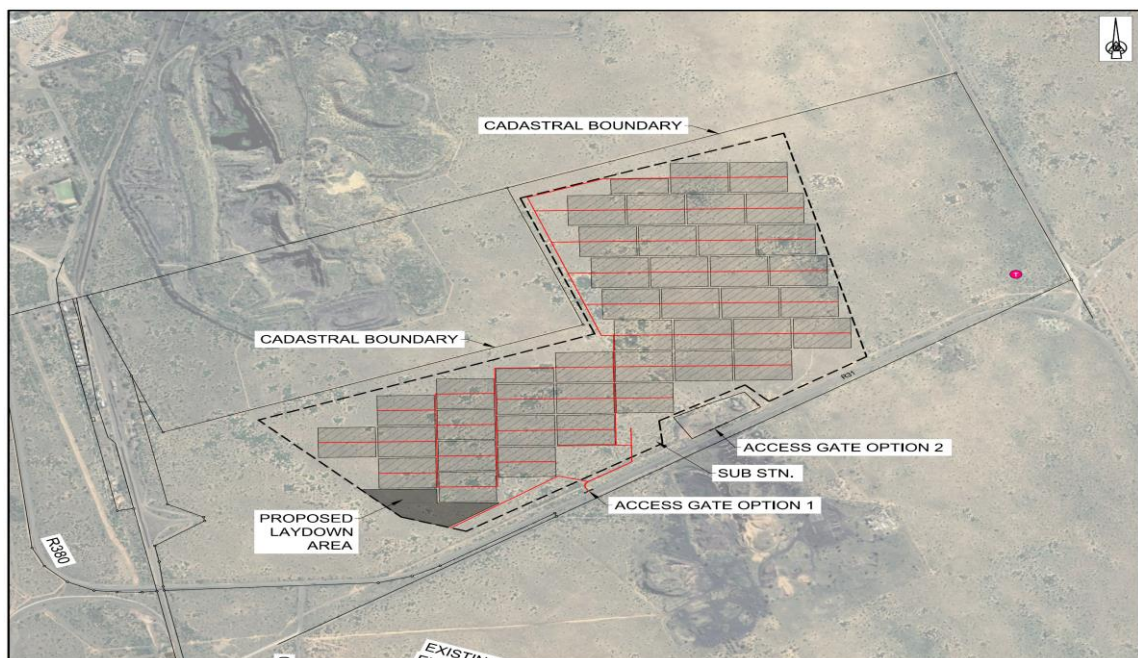

**Figure 4.1:** Site Areas during Construction

### 4.2. Traffic Statement

It is estimated that the total number of heavy vehicle trips for a 100MW installation would vary between 4 500 and 6 000. These trips would be made over an estimated construction period of between 12 and 18 months. In the worst case, the calculated number of trips would be between 15 and 25 daily trips. The impact of this on the road network would however be negligible, as the additional peak hourly traffic would at most be 2 trips. This low volume of construction traffic will have no significant impact on the existing traffic service levels.

During the peak of the construction phase, it is estimated that approximately 400 workers would be employed on the project site. These employees will be sourced from within a 50km to 100km radius from the site with the nearest towns of Hotazel (3km) or Deben (41km) and may be from

as far as Kathu (86km) or even Kuruman (72,6km) and will be transported from the towns to site by bus or taxi. This would equate to 5-7 additional trips during the peak hours, if transported by 60-seater busses, or 20-27 additional trips if 15-seater minibus taxis are used. This may result in slight delays at the entrance to the proposed site.

#### **4.3. Operational Phase**

The proposed solar facility is expected to operate for a minimum period of 20 years and will operate 7 days a week, during daylight hours. It is assumed that once the plant is fully operational, it will employ a staff compliment of approximately 60 workers. It is also assumed that the managers, supervisors and skilled staff will constitute 30% of the permanent workforce. This workforce will travel to work by private vehicles. Assuming vehicle occupancy of 1.2 persons per vehicle, the total trips generated will be as calculated below:

Vehicles per hour =  $(60 \text{ employees} \times 30\%) / 1.2 \text{ persons per vehicle} = 15 \text{ vehicles per hour}$

The unskilled employees will therefore constitute 80% of the total workforce. These employees will travel to work by bus or minibus taxi. Assuming vehicle occupancy of 15 persons per taxi, then the total trips generated will be calculated as follows:


Vehicles per hour =  $(60 \text{ employees} \times 70\%) / 15 \text{ persons per vehicle} = 3 \text{ vehicles per hour}$

The total number of trips generated by the permanent workforce during the operational phase during the AM and PM peak period is therefore 18 vehicles per hour. As no other trips are expected to be generated during the operation period, the additional traffic is not considered to have a significant effect on the internal roads or the access roads and surrounding road network.

## 5. TRANSPORT STUDY

### 5.1. Proposed Access

Two existing gravel access roads are proposed as options to provide access from the regional road (R31), to the property, see *Figure 5.1*. The current roads inside the property are informal tracks to be stabilised from the R31 access point to the proposed site camp and surrounding the boundary of the PV panels. Access option 1 is the preferred access option to the layout provided, but access option 2 is analysed as an alternative option to either provide additional access or as an alternative access.

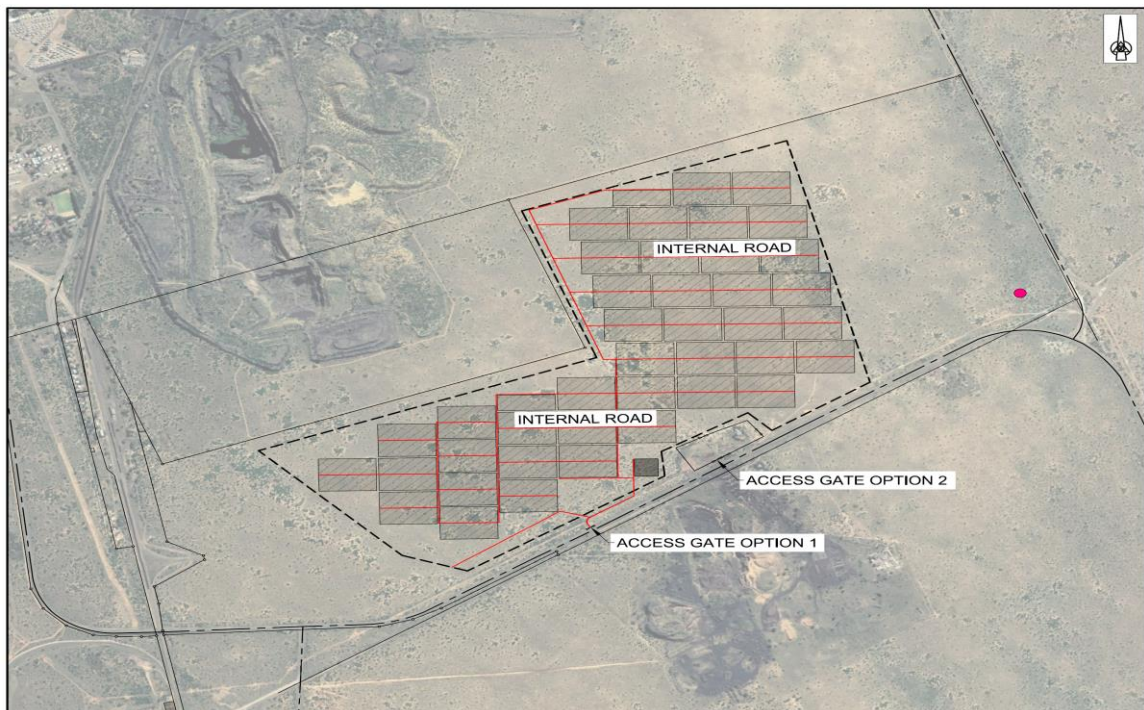

**Figure 5.1: Site Access**

During construction the project site will be accessed via the existing roads which will subsequently be utilised for maintenance purposes, during operation. The final site layout will determine the exact extent of the internal roads.

The first 200m of the access road (access 2), off the R31, as illustrated in *Photograph 5.1*, consists of soft sands, after which it becomes loose sand material, which should be investigated prior to construction, to determine the measures required for stabilisation to accommodate heavy vehicles. This access road is currently 6m wide, see *Photograph 5.1*. It may require a hardened (bitumen) surface, which will be determined after a geotechnical inspection.

Access 1 is currently being used for maintenance access of service providers to the site area. The first 300m of this access road (Access 1) consists of soft, loose sand material. This access road would require stabilisation prior to construction. This road width is currently 6m wide as illustrated in *Photograph 5.2*.





**Photograph 5.1:** Access 2 off R31



**Photograph 5.2:** Access 1 off R31


## 5.2. Internal Roads

Permanent access roads will be constructed between the solar panels as follows, depending on the final layout design:

- a. The first 200m from the R31 onto the gravel road will be asphalt, depending on the detailed design;
- b. Internal access road(s) approximately 4 to 5m wide to be stabilised gravel with informal tracks;
- c. Internal gravel access roads in between solar panels of approximately 18ha, depending on final layout design.




### 5.3. Route from Preferred Port

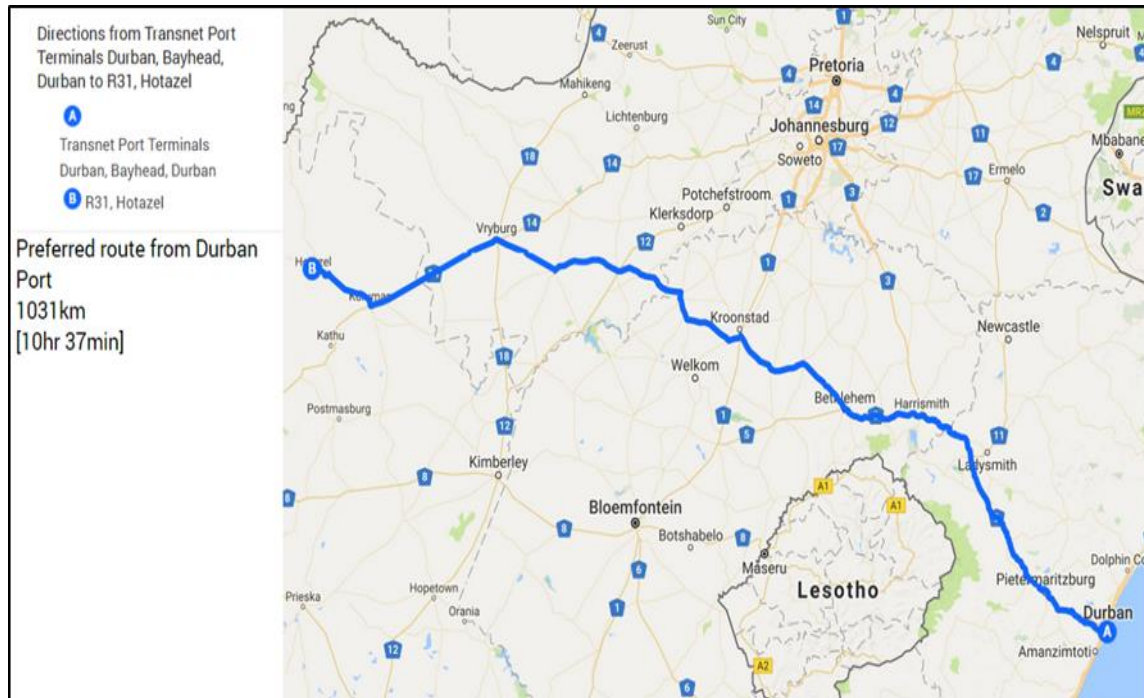


The route for the transportation of imported equipment is either from Port Elizabeth, Coega or Durban. The preferred delivery route for abnormal loads is from Durban port to site as is shown in *Figure 5.2*. This route is 1 018km in length via the N3. The route elements are illustrated in *Table 5.1* below.





**Figure 5.2:** Preferred route from Durban port

**Table 5.1: Preferred Route Assessment**

Section	Route Name	From	To	Distance (km)	Type
1	N3	Durban	Harrismith	300	Surfaced National Road
				<p>The N3 is a dual carriageway four lane road leaving Durban and merges into a two lane road with surfaced shoulders for the most part</p>	
2	N5	Harrismith	Bethlehem	91,5	Surfaced National Road
				<p>The N5 is a dual carriageway two lane road with surfaced shoulders for the most part</p>	
3	R76	Bethlehem	Kroonstad	143	Surfaced Regional Road
				<p>The R76 is a single carriageway two lane road with gravel shoulders</p>	


Section	Route Name	From	To	Distance (km)	Type
4	R713	Kroonstad	Bothaville	92	Surfaced Regional Road
				<p>The R713 is a single carriageway two lane road with gravel shoulders</p>	
5	R504	Bothaville	Schweizer-Reneke	147	Surfaced Regional Road
				<p>The R504 is a single carriageway two lane road with gravel shoulders</p>	
6	R34	Schweizer-Reneke	Vryburg	62	Surfaced Regional Road
				<p>The R34 is a single carriageway two lane road with gravel shoulders</p>	



Section	Route Name	From	To	Distance (km)	Type
7	N14	Vryburg	Kuruman	144	Surfaced Regional Road
				<p>The N14 is a single carriageway two lane road with gravel shoulders for the most part</p>	
8	R31	Kuruman	Site	73.2	Surfaced Regional Road
				<p>The R31 is a single carriageway two lane road with surfaced shoulders for the most part</p>	


#### 5.4. Route from first Alternative Port

The first alternative port to have equipment delivered would be either Port Elizabeth or Coega port, which is 1 040km from site, via the N10 as shown in *Figure 5.3*. The existing road elements are illustrated in *Table 5.2* below:

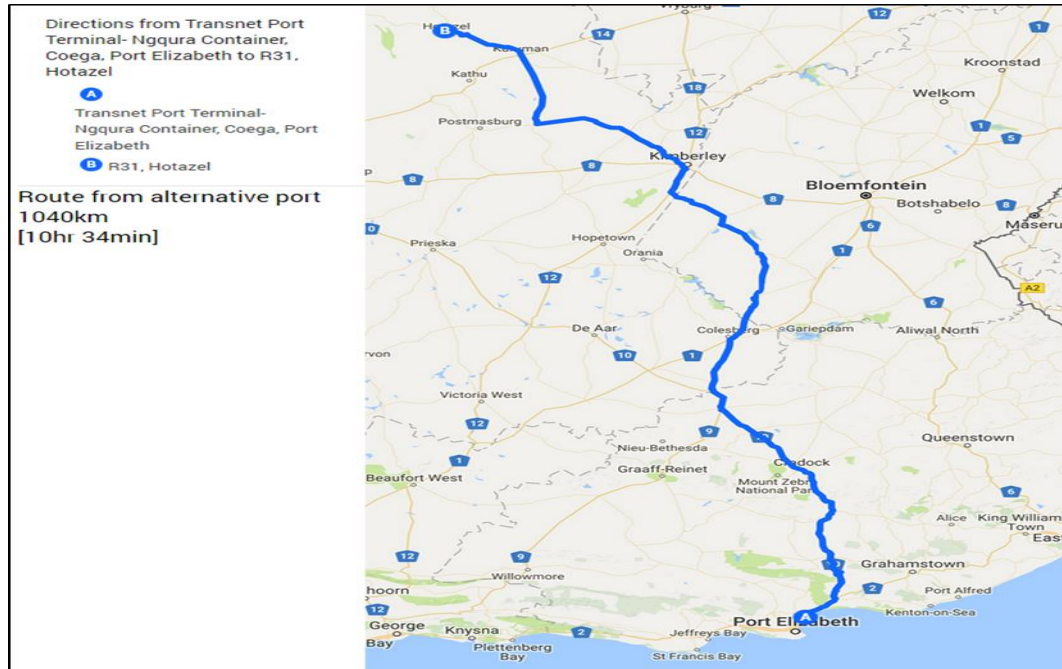




**Figure 5.3: Route from alternative 1 Port**

**Table 5.2** Route Elements from Alternative 1 Port


Section	Route Name	From	To	Distance (km)	Type
1	N2	Port of Coega	N9/N10 intersection	32	Surfaced National Road
				<p>The N2 is a two lane dual carriageway which merges into a one lane in each direction single carriageway with surfaced shoulders.</p>	



Section	Route Name	From	To	Distance (km)	Type
2	N10	N9/N10 intersection	Colesberg	312	Surfaced National Road
				<p>The N10 is a single carriageway two lane road with gravel shoulders</p>	
3	R717	Colesberg	Kimberley	277	Surfaced National Road
				<p>The R717 is a single carriageway two lane road with gravel shoulders.</p>	
4	R31	Kimberley	Site	73.2	Surfaced Regional Road
				<p>The R31 is a two lane single carriageway, with surfaced shoulders for the most part.</p>	




## 5.5. Route from Second Alternative Port

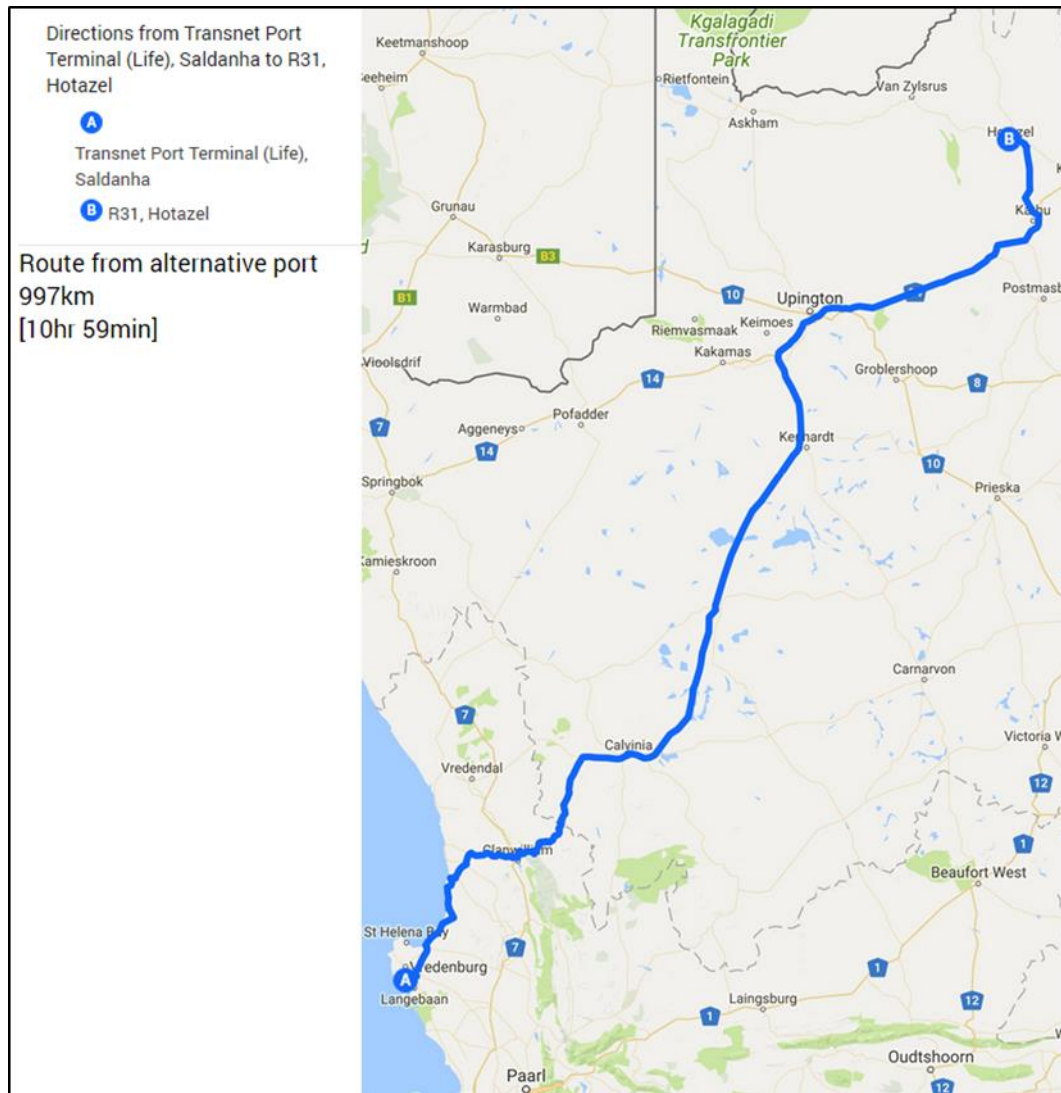The second alternative port to have equipment delivered is Saldanha Bay port, which is a distance of 1 059km from site, via the N14/ R27 as shown in *Figure 5.4*. The existing road elements are illustrated in *Table 5.3* below:



**Figure 5.4:** Route from alternative 2 port

**Table 5.3** Route Elements from Alternative 2 Port

Section	Route Name	From	To	Distance (km)	Type
1	R27	Port of Saldanha	Neilersdrift	245	Surfaced Regional Road
				<p>The R27 is a single carriageway with surfaced shoulders for the most part. This road leads via the R364</p>	
2	N14	Neilersdrift	Kuruman	191	Surfaced Regional Road
				<p>The N14 is a two lane single carriageway with gravel shoulders for the most part. Reduced surfaced shoulders are found along the rest of the road.</p>	
3	R31	Kuruman	Site	73.2	Surfaced Regional Road
				<p>The R31 is a two lane single carriageway, with surfaced shoulders for the most part.</p>	

## **5.6. Access during Construction (Route for Construction Materials)**

The materials required for road construction are available in Kuruman, which is located 69 km from site. All materials can be transported from here and surrounding towns to site, on any of the National and Provincial roads. If any materials are not locally available, they would have to be sourced and transported from major towns such as Johannesburg, Kimberley or Cape Town. These materials can be transported from any of the major cities on the National and Provincial roads, with no limitations imposed on normal freight.

## **6. CONCLUSIONS**

It was observed during the site inspection that the R31 road within the study area is functioning at an acceptable level of service, while the R380 which also leads to site is in very poor to bad condition and should not be used for heavy vehicle transport. No congestion problems, queue delays and delays were evident on the surrounding network. The surrounding network has the capacity to accommodate the additional volumes of 2 trips per hour for the construction vehicles, as well 15 to 25 bus trips required to transport employees during peak hours. The additional 18 trips during the operational phase of this proposed development can also be accommodated. If minibus taxis are used for the transportation of employees instead of buses, the additional trips generated will then increase to between 20 and 27 during the peak period. The mitigation measure for this would be to create bus drop-off points at the mine dumps located on the R31.

Dust could pose a potential health risk to people as well as animals in the vicinity of the site during the construction phase of the development and must be addressed in the risk assessment during each phase of the project.