



LEADERS IN ENVIRONMENTAL MONITORING



**Anglo American Platinum
Rustenburg Process Division**

Annual Integrated Surface and
Groundwater Quality, Biomonitoring
and Toxicity Testing Assessment
Report, Vol I

September 2018 to August 2019



Copyright reserved

No part of this document may be produced
in any manner without full
acknowledgement of the source

**Anglo American Platinum
Rustenburg Process Division**

Annual Integrated Surface and
Groundwater Quality, Biomonitoring
and Toxicity
Testing Assessment Report, Vol I

September 2018 to August 2019

REFERENCE	APPD/AR1.1/2019/WR
REPORT TITLE	Annual Integrated Surface and Groundwater Quality, Biomonitoring and Toxicity Testing Assessment Report. September 2018 to August 2019
DATE SUBMITTED	14 January 2020
CLIENT	Dustin van Helsdingen
	Environmental Manager: Northwest Rustenburg Process Division
	Western Limbs Distribution Centre
	Rustenburg
	South Africa
	Tel: +27 14 344 0102
	Email: dustin.vanhelsdingen@angloamerican.com
PREPARED BY	Werner Rossouw
	Aquatico Scientific
	Route 21 Corporate Park
	89 Regency Drive
	Irene Ext. 72
	Centurion
	0178
	Tel: +27 12 450 3800
	Email: werner@aquatico.co.za
REVIEWED BY	Jako Mostert, B.Sc. (Hons), M.Sc. (Geography)
APPROVED BY	Pierre Maree, B.Sc. (Hons)
STATUS	Final
REPORTING SCOPE	This is an extensive report and includes a full evaluation of all the results obtained during the annual monitoring period. The report includes a statistical summary (temporal & spatial) of all the chemical variables for all the monitoring localities, time-series graphs (for the entire database period), linear trend determinations, performance analyses and compliance assessments, water quality thematic maps indicating pollution sources and impacts on the receiving water body as well as a discussion and recommendation section. This report is composed of three volumes.

Table of Contents

List of Tables	3
List of Figures	4
1. INTRODUCTION	6
2. WATER USE LICENCE.....	8
3. LEGAL PERSPECTIVE AND MONITORING REQUIREMENTS.....	11
4. SITE DESCRIPTION AND BACKGROUND INFORMATION	16
4.1. Background	16
4.2. Operational Overview	16
5. WATER MONITORING PROGRAM	18
6. SAMPLING AND MONITORING PROCEDURES	22
6.1. Fieldwork	22
6.2. Laboratory Analysis.....	25
6.3. Water Quality Reporting	27
6.4. Data Presentation.....	28
6.5. Data evaluation.....	30
6.5.1. Water quality evaluation against applicable guidelines	30
7. SURFACE WATER MONITORING SUMMARY PER BUSINESS UNIT.....	36
7.1. PRECIOUS METAL REFINERS (PMR)	39
7.1.1. Process water	39
7.1.2. Discharges, effluents and seepages.....	43
7.1.3. Receiving environment.....	43
7.2. RUSTENBURG BASE METAL REFINERS (RBMR)	48
7.2.1. Process water	48
7.2.2. Discharges, effluents and seepages.....	51
7.2.3. Receiving environment.....	51
7.3. WATERVAL SMELTER AND ACP	56
7.3.1. Process water	56
7.3.2. Discharges, effluents and seepages.....	58
7.3.3. Receiving environment.....	59
7.4. WATERVAL-EAST TAILINGS STORAGE FACILITY	63
7.4.1. Process water	63
7.4.2. Receiving environment.....	65
8. RECEIVING ENVIRONMENT SUMMARY.....	67
8.1. Klipgatspruit.....	67
8.2. Klipfonteinspruit	70
9. STANDARD ANGLO RISK RATING.....	78
10. SURFACE WATER CONCLUSION.....	81
11. REFERENCES	82

List of Tables

Table 1: Quality limits for water monitoring programme	10
Table 2: Rustenburg Process Division surface water monitoring locality names and descriptions	20
Table 3: Rustenburg Process Division groundwater monitoring locality names and descriptions	21
Table 4: Analytical packages associated with the Anglo Platinum water monitoring localities	26
Table 5: Analytical suites applied to the different types of surface water monitoring localities	26
Table 6: SAWQG Target water quality guidelines	31
Table 7: DWAF General Limit Guideline	32
Table 8: WUL Resource and Groundwater Quality Limits	33
Table 9: Structure of the classification system describing the effects of the different classes of water on the various domestic uses of water (DWAF <i>et al</i> , 1998)	34
Table 10: Physical Quality of Water Parameters	34
Table 11: Chemical Quality of Water	35
Table 12: Bacteriological Quality of Water	35
Table 13: General water quality description parameters	36
Table 14: PMR sampling register of the surface water monitoring conducted during the annual period	38
Table 15: Average PMR process dams data table for the annual monitoring period	42
Table 16: Average spatial assessment for PMR impacts on the Klipfonteinspruit	43
Table 17: Average PMR receiving environment data table for the annual monitoring period	45
Table 18: RBMR sampling register of the surface water monitoring conducted during the annual period	47
Table 19: Average RBMR process dams data table for the annual monitoring period	50
Table 20: Average spatial assessment for the BMR impacts on the Klipfonteinspruit	52
Table 21: Average RBMR receiving environment data table for the annual monitoring period	53
Table 22: Waterval Smelter and ACP sampling register of the surface water monitoring conducted during the annual period	55
Table 23: Average Waterval Smelter and ACP process dam data table for the annual monitoring period	57
Table 24: Average smelter and ACP impacts on the Klipfonteinspruit	59
Table 25: Average Waterval Smelter and ACP receiving environment data table for the annual monitoring period	60
Table 26: WVE TSF sampling register of the surface water monitoring conducted during the annual period	62
Table 27: Average WVE TSF process dams data table for the annual monitoring period	64
Table 28: Average Waterval TSF-East impacts on the Klipfonteinspruit	65
Table 29: Average WVE TSF receiving environment data table for the annual monitoring period	66

Table 30: Exceedance table for the Klipfonteinspruit measuring percentage non-compliance to the Anglo surface water WUL conditions	76
Table 31: Exceedance table for the Klipfonteinspruit measuring percentage non-compliance to the SANS 241-1:2015 Drinking Water Standard	77
Table 32: Anglo American Risk Matrix.....	79
Table 33: Environmental risk table for surface water regime at Anglo Platinum Process Division	80

List of Figures

Figure 1: Resource Protection and Waste Management Hierarchy	9
Figure 2: Diagrammatic presentation of the importance of environmental monitoring in Integrated Environmental Management, as adopted from BPG G3	11
Figure 3: Water monitoring process as adopted from BPG G3	14
Figure 4: Procedure to develop a monitoring programme as adopted from BPG G3	15
Figure 5: Anglo Platinum monitoring area.....	19
Figure 6: A –The field PDA units that are being used during sampling. B – Field technician scanning a bar-coded sampling container after the sample has been taken. C – National Luna cooling units fitted on all field vehicles to ensure proper sample transport to the laboratory (at 4C)	24
Figure 7: PMR Water Monitoring Programme.....	37
Figure 8: STIFF diagrams representing the water quality profile of the PMR Pollution control dams (K209, K212, K213 and K214).....	39
Figure 9: STIFF diagrams representing the water quality profile of the PMR Pollution control dams (K210 and K211).....	40
Figure 10: PMR pollution control dams and stormwater dams timeline graph.....	41
Figure 11: RBMR Water Monitoring Programme	46
Figure 12: STIFF diagrams showing the water quality profiles of the RBMR pollution control dams	48
Figure 13: RBMR PCD TDS concentration trend line graph	49
Figure 14: STIFF diagrams showing the water quality profiles of the Klipfonteinspruit, up-, mid- and downstream of RBMR.....	51
Figure 15: Waterval Smelter and ACP Water Monitoring Programme.....	54
Figure 16: Time-series STIFF diagrams of the ACP Pollution Control Dam.....	56
Figure 17: ACP pollution control dam (K098) time-series data for pH, EC, iron and nickel ...	58
Figure 18: Waterval Tailings Storage Facility East Water Monitoring Programme	61
Figure 19: Time series STIFF diagrams representing the Klipgat RWD water quality for the past annual period.....	63
Figure 20: Average data for in-stream localities in the Klipgatspruit for the annual period September 2018 to August 2019	68
Figure 21: Schematic diagram of the Klipgatspruit relative to Rustenburg Process Division localities	69

Figure 22: Schematic diagram of the Klipfonteinspruit relative to Rustenburg Process Division localities	69
Figure 23: Time series data for pH, EC and Ni concentrations at K028 from 1995 to August 2019	71
Figure 24: Average data for in-stream localities in the Klipfonteinspruit for the annual period September 2018 to August 2019	72
Figure 25: Annual average Nickel concentrations in the Klipfonteinspruit	73
Figure 26: Nickel concentrations per selected localities over the monitoring period	74
Figure 27: Nickel concentrations over time at localities K028 and K098	74
Figure 28: <i>E.coli</i> counts detected in the Klipfonteinspruit catchment for the annual period ...	75

APPENDIX A: Annual Report on Groundwater Monitoring

APPENDIX B: Biomonitoring Report

APPENDIX C: Toxicity Test Report

ANGLO AMERICAN PLATINUM: RUSTENBURG PROCESS DIVISION**Annual Surface Water Quality Report****September 2018 to August 2019****1. INTRODUCTION**

Globally, water is one of the prime environmental resources that are affected by anthropogenic activities. Activities associated with mining can pose a risk for adverse environmental impacts. Mining and mineral beneficiation can affect water quality; alter the hydrological and topographical characteristics on a local scale and subsequently surface runoff, soil moisture, evapo-transpiration and groundwater behaviour. Mining activities can pose a significant risk to South Africa's water resource security. Failure to manage the impacts on water resources in an acceptable manner throughout life-of-mine and post-closure will result in the mining industry finding it increasingly difficult to obtain community and government support for existing and future projects.

In South Africa, environmental impacts associated with mining are managed under the Minerals and Petroleum Resources Development Act, 2002 (MPRDA, Act 28 of 2002) which is administrated by the Department of Mineral Resources (DMR). The Department of Water and Sanitation (DWS) acts as primary agent for water related issues in the mining sector. As custodian of the natural water resources, it is an integral function of the Department of Water and Sanitation's (DWS) regulatory system to manage the effects of any anthropogenic activities on the country's water resources. The National Water Act provides the legal framework for the effective and sustainable management of our water resources. The protection of water resources is fundamentally related to their use, development, conservation, management and control.

The National Water Act, 1998 (Act 36 of 1998) (NWA) introduced the concept of Integrated Water Resource Management (IWRM), comprising all aspects of the water resource, including water quality, water quantity and the aquatic ecosystem quality (quality of the aquatic biota and in-stream and riparian habitat) (DWAF, 2007). The mentioned IWRM approach also calls for both resource and source directed measures. Resource directed actions include the formulation of resource quality objectives and catchment management strategies while source directed measures focus on impacts at source. The resource directed measures must also give effect to the Class, Reserve and Resource Quality Objectives of the water resources and associated protection measures (DWAF, 2008).

The promulgation of the NWA thus lead to a paradigm shift resulting in the natural environment being regarded as an integral part of the water resource itself, as well as one of the competing water users. Hence the biota, the physical and chemical in-stream habitats and the processes which link biota and habitat are all considered being inseparably part of the water resource itself.

Section 19 of Chapter 3 in the NWA deals with pollution prevention, and in particular the situation where pollution of a water resource occurs or might occur as a result of activities on land, such as mining, and states that: *"The person who owns, controls, occupies or uses the land in question is responsible for taking measures to prevent pollution of water resources. If these measures are not taken, the catchment management agency concerned may itself do whatever is necessary to prevent*

pollution or to remedy its effects, and to recover all reasonable costs from the persons responsible for the pollution.”

In Section 22 of Chapter 4 of the Act, the general principles for regulating the use of water are set out. Water use is defined broadly and includes the taking and storing of water, activities which reduce stream flow or alters a water course, waste discharges and disposal, removing water from underground and controlled activities which may impact detrimentally on a water resource. In general, a water use must be licensed under the Act.

Section 26 of the National Water Act, 1998 (Act 36 of 1998) also provides for the development of regulations to, amongst others:

- ◆ Require that the use of water from a water resource be monitored, measured and recorded.
- ◆ Regulate or prohibit any activity in order to protect a water resource or in-stream or riparian habitat.
- ◆ Prescribe the outcome or effect, which must be achieved through management practices for the treatment of waste, or any class of waste before it is discharged into or allowed to enter a water resource.
- ◆ Require that waste discharged or deposited into or allowed to enter a water resource be monitored and analysed, and prescribing methods for such monitoring and analysis.

Prior to issuing of the WUL the Rustenburg operations operated according to the expired Exemption Permit issued in terms of the now repealed Water Act, 1956 (Act 54 of 1956). Both the WUL and the expired Permit stipulated that a surface- and ground water quality, biomonitoring and toxicity testing program should be designed, implemented and maintained.

Rustenburg Platinum Mines: Rustenburg Section (RPM-RS) was issued with a Water Use License (WUL; License No 03/A22H/ACGIJ/926) in terms of Chapter 4 of the National Water Act, 1998 (Act No 36 of 1998) in March 2012. Due to several substantial errors observed in the approved WUL and after consultation with DWA, an amendment WULA was submitted on 12 July 2012; A the new WUL (WUL; License No A22H/GIAC/6501) was issued in January 2018 and will henceforth be referenced as WUL, 2018.

The Anglo Platinum Environmental Department decided to take a pro-active approach towards auditing requirements, as well as the latest development in national water management policy. Aquatico Scientific was commissioned by Anglo Platinum to conduct the surface water and groundwater monitoring programme and to evaluate the physical, chemical and biological properties of the receiving water environment subject to potential impact.

This annual report presents the data from the Anglo Platinum monitoring programme while effectively indicating compliance with the applicable policy of regulating authorities, such as contained in the mentioned WUL. It is thus the intention of this annual monitoring report to indicate the implementation of a well-designed and maintained monitoring programme which is considered essential within any mine water management strategy on the basis that “one cannot manage what one cannot measure” (DWAF, 2008).

Additional information can be found in the comprehensive annual water management report “Anglo Platinum Process Division – Annual DWA Compliance Report” No. **APPD/ACR1/2019/WR** submitted to DWA and compiled by Aquatico Scientific. Additional information referenced in above-mentioned report includes:

- ◆ Operations and permit information;

- ◆ Production figures and water usage;
- ◆ Rainfall and evaporation data; and
- ◆ Flow data.

2. WATER USE LICENCE

Note on compliance towards license conditions as set out in the WUL (2018)

A new water use license in terms of Chapter 4 of the National Water Act, 1998 (Act No. 36 of 1998) (The Act) was issued by the Department of Water and Sanitation (DWS) in 2018: Licence no. A22H/GIAC/6501. The license was issued for water uses relating to the following:

- i. Section 21(a) of the Act: Taking water from a water resource
- ii. Section 21(g) of the Act: Disposing of waste in a manner which may detrimentally impact on a water resource

The uses applicable to the water monitoring programme and the current document are Section 21(g) of the Act relating to the disposing of waste which may detrimentally impact on a water resource.

As mentioned, the NWA introduced the concept of Integrated Water Resource Management (IWRM), comprising all aspects of the water resource, including water quality, water quantity and the aquatic ecosystem quality. The IWRM approach provides for both resource directed and source directed measures. Resource directed measures aim to protect and manage the receiving environment. Examples of resource directed actions are the formulation of resource quality objectives and the development of associated strategies to ensure on-going attainment of these objectives; catchment management strategies and the establishment of catchment management agencies (CMAs) to implement these strategies.

On the other hand, source directed measures aim to control the impacts at source through the identification and implementation of pollution prevention, water reuse and water treatment mechanisms.

The integration of resource and source directed measures forms the basis of the **hierarchy of decision-taking** aimed at protecting the resource from waste impacts (Figure 1). This hierarchy is based on a *precautionary approach* and the following order of priority for mine water and waste management decisions and/or actions is applicable:

RESOURCE PROTECTION AND WASTE MANAGEMENT HIERARCHY

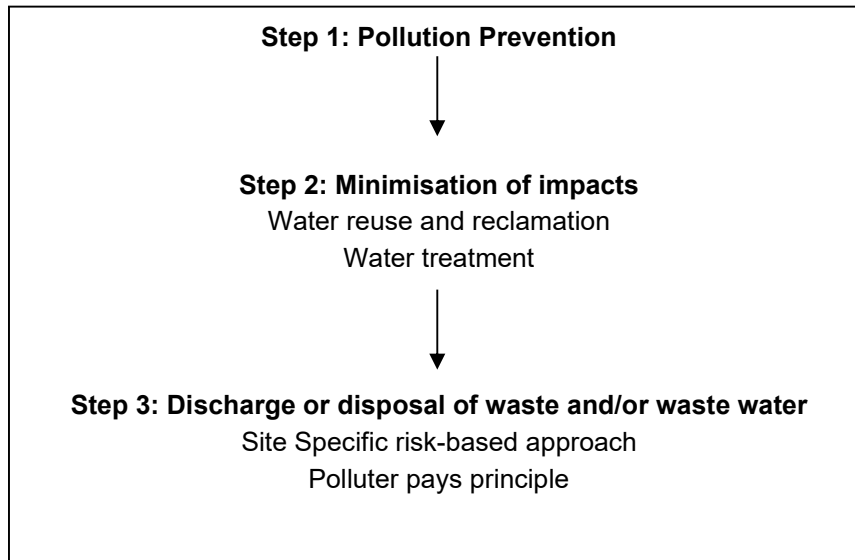


Figure 1: Resource Protection and Waste Management Hierarchy

Appendix III of the WUL (2018) stipulates that the Licensee shall monitor the water resources at surface water monitoring points, groundwater monitoring points, biomonitoring points and toxicity monitoring points to determine the impact of the facilities and other activities on the water quality. The WUL has two main water quality objectives; (1) limits for the impact of the activities on groundwater (in Table 8 of the WUL), and (2) water quality limits stipulated for the impact of the activities on the surface water quality of the area (in Table 9 of the WUL), i.e. the resource water quality objectives.

Presented in Table 1 below are the guidelines which were issued by the DWA to serve as protection of the resource and to monitor the quality of of the source. Also shown are the SANS241:2015 Drinking water standard, the South African Water Quality Guidelines' Target water quality guideline ranges for Domestic Use (DWAF, 1996) and the quality typical of the wastewater dams (Return Water Dams) of the RPM-RS operations.

The table shows stringent WUL limits as oppose to the presented drinking water quality guidelines and also greater compared to typical upstream and wastewater quality for the RPM-RS lease area. It is therefore recommended that the WUL limits be revised which should be created using the background 'in-coming' quality as reference and not pristine groundwater quality of the region or catchment.

Table 1: Quality limits for water monitoring programme

VARIABLE	Units	Groundwater Quality Limits (WUL 2018)	Surface Water Quality Limits (WUL 2018)	SANS 241-1:2015 Drinking water standards	General Limit [Section 21 (f) and (h)]	DWA SAWQG Ideal (Class 0) Domestic Water
pH	pH units	6.0 - 9.5	6.0 - 9.0	5.0 - 9.7	5.5 - 9.5	6.0 - 9.0
Electrical Conductivity (EC)	mS/m	150	85.00	170	150	0 - 70
Total Dissolved Solids (TDS)	mg/l	-	-	< 1200	-	0 - 450
Dissolved Oxygen (DO)	mg/l	-	43654.00	-	-	-
Total Alkalinity (CaCO ₃)	mg/l	-	-	-	-	-
Hardness (CaCO ₃)	mg/l	-	50	-	-	0 - 200
Calcium (Ca)	mg/l	150	-	-	-	0 - 80
Magnesium (Mg)	mg/l	100	-	-	-	0 - 70
Sodium (Na)	mg/l	200	-	200	-	<100
Potassium (K)	mg/l	-	-	-	-	<25
Chloride (Cl)	mg/l	200	-	300	-	< 100
Sulphate (SO ₄)	mg/l	200	-	250	-	0 - 200
Nitrate (NO ₃) as N	mg/l	10	-	11 - (Acute Health)	15	<6
Ammonia (NH ₃) as N	mg/l	-	1.00	1.5	6	0 - 1.0
Phosphate (PO ₄) as P	mg/l	-	0.125	-	10	-
Fluoride (F)	mg/l	1	0.75	< 1.5 - (Chronic Health)	1	<0.7
Aluminium (Al)	mg/l	-	5	0.3 (Operational)	-	0 - 0.15
Iron (Fe)	mg/l	-	0.5	0.3 - (Aesthetic) 2.0 - (Chronic Health)	0.3	0 - 0.5
Manganese (Mn)	mg/l	-	0.18	0.1 - (Aesthetic) 0.4 - (Chronic Health)	0.1	0 - 0.1
Cadmium (Cd)	mg/l	-	-	0.003	0.005	<0.003
Trivalent chromium (Cr ³⁺)	mg/l	-	-	0.05	-	-
Hexavalent chromium (Cr ⁶⁺)	mg/l	0.0049	0.0049	0.1	0.05	0 - 0.05
Copper (Cu)	mg/l	-	0.3	2	-	0 - 1.0
Nickel (Ni)	mg/l	-	-	0.07	-	-
Lead (Pb)	mg/l	-	-	0.01	0.01	0 - 0.01
Zinc (Zn)	mg/l	-	-	5	0.1	0 - 20
Arsenic (As)	mg/l	-	-	0.01	0.02	<0.01
Cyanide (CN)	mg/l	-	-	0.2	0.02	-
Mercury (Hg)	mg/l	-	-	0.006	0.005	-
Selenium (Se)	mg/l	-	-	0.04	0.02	-
Vanadium (V)	mg/l	-	-	-	-	-
Barium (Ba)	mg/l	-	-	0.7	-	-
Boron (B)	mg/l	-	-	2.4	0.5	-
SAR	mg/l	-	-	-	-	-
Free Chlorine (residual) Cl ₂	mg/l	-	-	5	0.25	0.3-0.6
E Coli counts / 100 ml	mg/l	-	-	0	1000	0
Total coliforms counts / 100 ml	mg/l	-	-	10	-	0
Het. Plate count / TVC	mg/l	-	-	1000*	-	-
Faecal coliforms counts / 100 ml	mg/l	-	-	0	1000	0
Turbidity (NTU)	mg/l	-	-	1 (Operational) 5 (Aesthetic)	-	< 0.1
Total Suspended Solids	mg/l	-	-	-	25	-
Soap, Oil, Grease	mg/l	-	-	-	2.5	-
Chemical Oxygen Demand	mg/l	-	-	-	75	-
Hydrocarbons	mg/l	-	-	-	-	-
Polycyclic aromatics	mg/l	-	-	-	-	-

3. LEGAL PERSPECTIVE AND MONITORING REQUIREMENTS

Mining operations are anticipated to pose a high risk for adverse environmental impacts. These impacts may occur slowly and unnoticed during the operational life cycle phase of the mine as mining activities progresses and/or during adverse weather conditions, or only emerge long after mining ceased. Possible impacts need to be prioritised in terms of a number of influencing factors such as the actual impact quantification, industry standards, applicable legislation, mitigation requirements, and mine management requirements (DWAF, 2006a).

The development of a site-specific efficient monitoring programme that complies with the requirements of mine management as well as regulatory requirements is of utmost importance. Water monitoring should be objective driven and purposefully utilised to achieve goals such as compliance auditing and reporting as summarised in the Figure 2.

Various environmentally related legislation require either directly or indirectly the monitoring of water resources, such as the Environment Conservation Act (Act 73 of 1989), the National Environmental Management Act (Act 107 of 1998), the Minerals and Petroleum Resources Development Act (Act 28 of 2002) (including Environmental Management Programme Reports (Section 39), Regulations relating to performance assessments (auditing) of EMPR's (Government Notice (GN) R801 of 25 June 1999) and Closure requirements (Section 12), as well as the National Water Act, 1998 (Act 36 of 1998).

Special emphasis should be placed on the National Water Act, 1998 regarding water resource monitoring. Subsequent to the implementation of the mentioned Act, the focus changed from concentrating on controlling pollution at source by means of regulatory standards, to a water resource management philosophy that concentrate also on resource management through maintaining the fitness for agreed or specified uses including the protection of aquatic ecosystems. The mentioned Act recognises that ecosystems form the resource base on which sustainable utilisation of water resources depend.

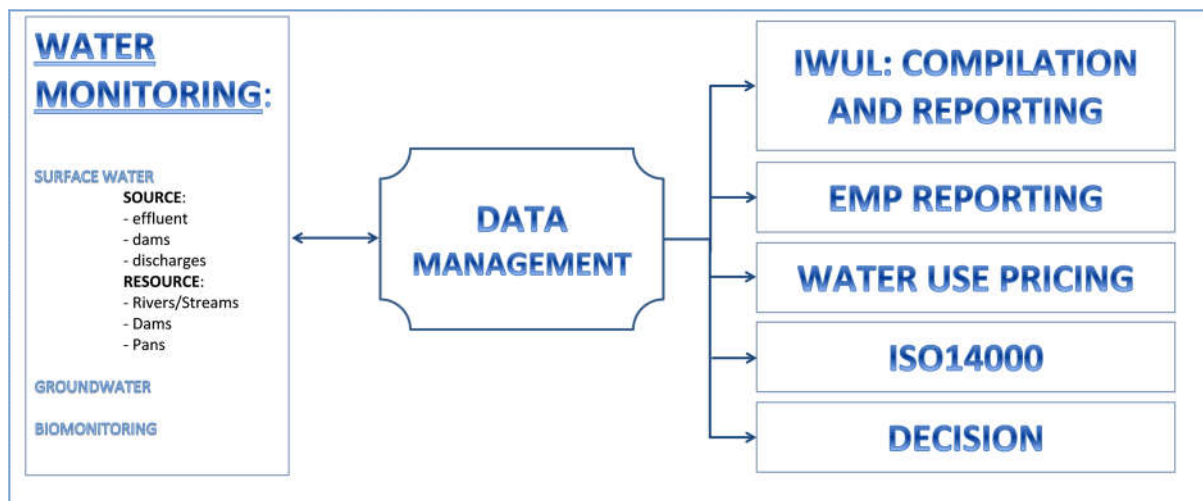


Figure 2: Diagrammatic presentation of the importance of environmental monitoring in Integrated Environmental Management, as adopted from BPG G3

Since the Department of Water Affairs (DWA) is the public trustee of South Africa's water resources it is the DWA's responsibility to ensure that water resources remain fit for use on a sustainable basis. DWA exercises the responsibility through the implementation of Regulations such as the regulations

on use of water for mining and related activities aimed at the protection of water resources (GN 704 dated June 1999), the Water use licensing process, including the determination of the “reserve” for the various water resources. Verification of the mining operation’s compliance with the applicable legislation (including the water use licences and requirements of the regulations) can only be illustrated through the implementation of a water resource monitoring plan.

The importance of a monitoring system can be emphasised through the following: “It is essential that any management system incorporate clearly defined monitoring systems to be implemented to measure the effectiveness of management strategies and mitigating actions and compliance with agreed targets and objectives. The responsibilities, reporting formats and frequencies must be defined, together with an auditing plan for both technical and compliance audits” (DWAF, 2008).

The DWA developed a series of Best Practice Guidelines (BPG’s) for water quality management in the South African mining industry. This series of BPG’s forms a component of the overall source directed water policy for mining and related activities implemented by the DWA. The following Best Practice Guideline are of importance to surface water monitoring; Integrated Mine Water Management (BPG G1; DWAF, 2006a), Water and salt balances (BPG G2; DWAF, 2006b) and Water Monitoring Systems (BPG G3; DWAF, 2007) make specific references to water monitoring requirements and was thus used as a guiding tool in this study and the subsequent development of a surface water monitoring programme for Anglo Platinum.

The BPG G3 guideline emphasise that the development and maintenance of a well-designed and effective monitoring programme is essential within any mine water management strategy. It deals with the following aspects of a monitoring strategy:

- Definition of the objectives of a monitoring strategy,
- Design of a monitoring strategy,
- Monitoring and sampling equipment and procedures,
- Procedures for implementation of monitoring programmes,
- Data management systems, and
- Audit and quality assurance of monitoring programmes.

It is stated in BPG G3, that accurate and reliable data forms a key component of many environmental management actions. Some of these actions may receive more focus from government officials, whilst others may be more important for the mine personnel or mine management. Water monitoring is a legal requirement and can be used in negotiations with authorities for licence applications. The most common environmental management actions that require data and thus the objectives of a water monitoring programme include, though not limited to the following (DWAF, 2007):

- Development of environmental and integrated mine water management plans based on impact and incident monitoring.
- Generation of baseline / background data before new project implementation.
- Identification of sources of pollution and extent of pollution.
- Monitoring of water usage by different users and thus maximising on water reuse.
- Calibration and verification of various prediction and assessment models.
- Identification and evaluation of appropriate water treatment technology.
- Control of unit processes such as water treatment plants or process plants.
- Evaluation and auditing of the success of implemented management actions (ISO14000, compliance monitoring).
- Assessment of compliance with set standards and legislation (EMPR’s, water use licences).

- Assessment of impact on receiving water environment.

Without reliable measurement of water resource quality and quantity, the above functions cannot be undertaken and hence the saying that "one cannot manage that which one cannot measure".

A typical monitoring process is summarised in Figure 3 and was added in order to describe the process where it states that it "must be recognised and understood that the successful development and implementation of an appropriate, accurate and reliable monitoring programme requires that a defined structured procedure be followed. Furthermore, it is important that this is done by a suitably qualified person. The requirements for the use of suitably qualified persons during various activities undertaken in the monitoring process as well as the definition of a suitably qualified person are also prescribed in the above-mentioned guideline. A suitably qualified person is defined as a person having a level of training, experience and the recognised skills in the type of work to be done.

The detailed features of monitoring programmes are required to be very site-specific. No single uniform procedure that can be followed when defining and implementing a monitoring programme was thus provided in BPG G3. The following procedural requirements that should however be considered are also indicated in BPG G3:

- Interested and affected parties should be consulted at the appropriate time during the development, implementation and operation of the monitoring programme. The monitoring programme should be able to address their concerns and provide answers to their questions.
- The objectives of the management actions that drive the monitoring programme must be clearly defined, together with the data and information requirements that support these objectives.
- A detailed design of the monitoring programme must be undertaken. This should define the location of all monitoring points (indicated on a map), the type of data to be collected, as well as the data collection (protocol/procedure/methodology, frequency of monitoring and parameters determined, quality control and assurance), management (database and assessment) and reporting procedures. The implemented programme should be able to deliver the data and information that are required to achieve the objectives of the programme.
- Linked to the company SHE policies.
- The results from the monitoring programme should be representative of the actual situation. This requires that the monitoring programme should cover the relevant area in sufficient detail with a sufficient amount of appropriate monitoring points. It also requires that the sampling and monitoring should be undertaken according to procedures that will ensure representative samples and data.
- To ensure that the monitoring programme functions properly, an operating and maintenance programme should be developed and implemented.
- A well-defined data management system is required to ensure that data is secure, used optimally and is accessible to all the relevant users.
- The monitoring programme must include quality control (QC) measures and audits to ensure that the collected data are meeting the defined objectives (DWAF, 2007).

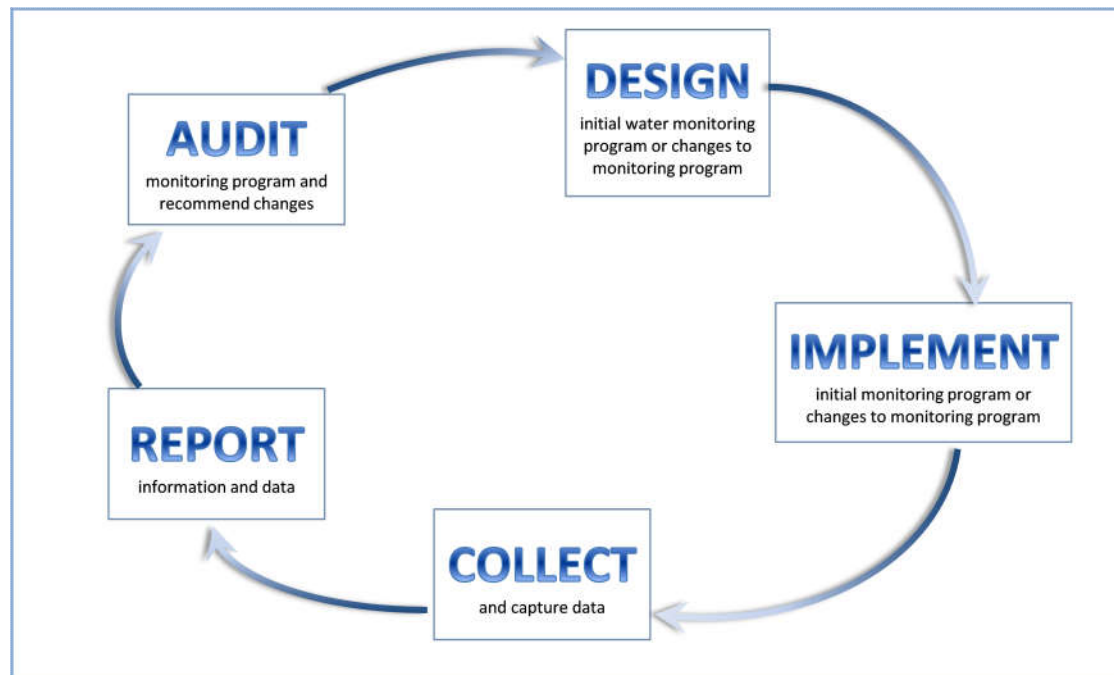


Figure 3: Water monitoring process as adopted from BPG G3

A water monitoring system on a mine should therefore consist of the following components:

- Surface and groundwater quality monitoring system.
- Surface and groundwater flow monitoring system.
- Bio-monitoring.
- Data and information management system.

Risk assessment needs to be built into any monitoring programme and it is important to determine the risk of water being polluted from different sources and its associated impact. The diversity of climates, ecosystems, land uses and topography are some Impacts that need to be considered in the design of a monitoring programme. Social factors have also become important elements in environmental management based on the Constitution of South Africa. The monitoring programme designed will thus be very site-specific and will need to consider regional physical and social factors.

The proposed procedure to develop a monitoring programme from the regulatory requirement point of view is described in detail in BPG G3 and summarised in Figure 4.

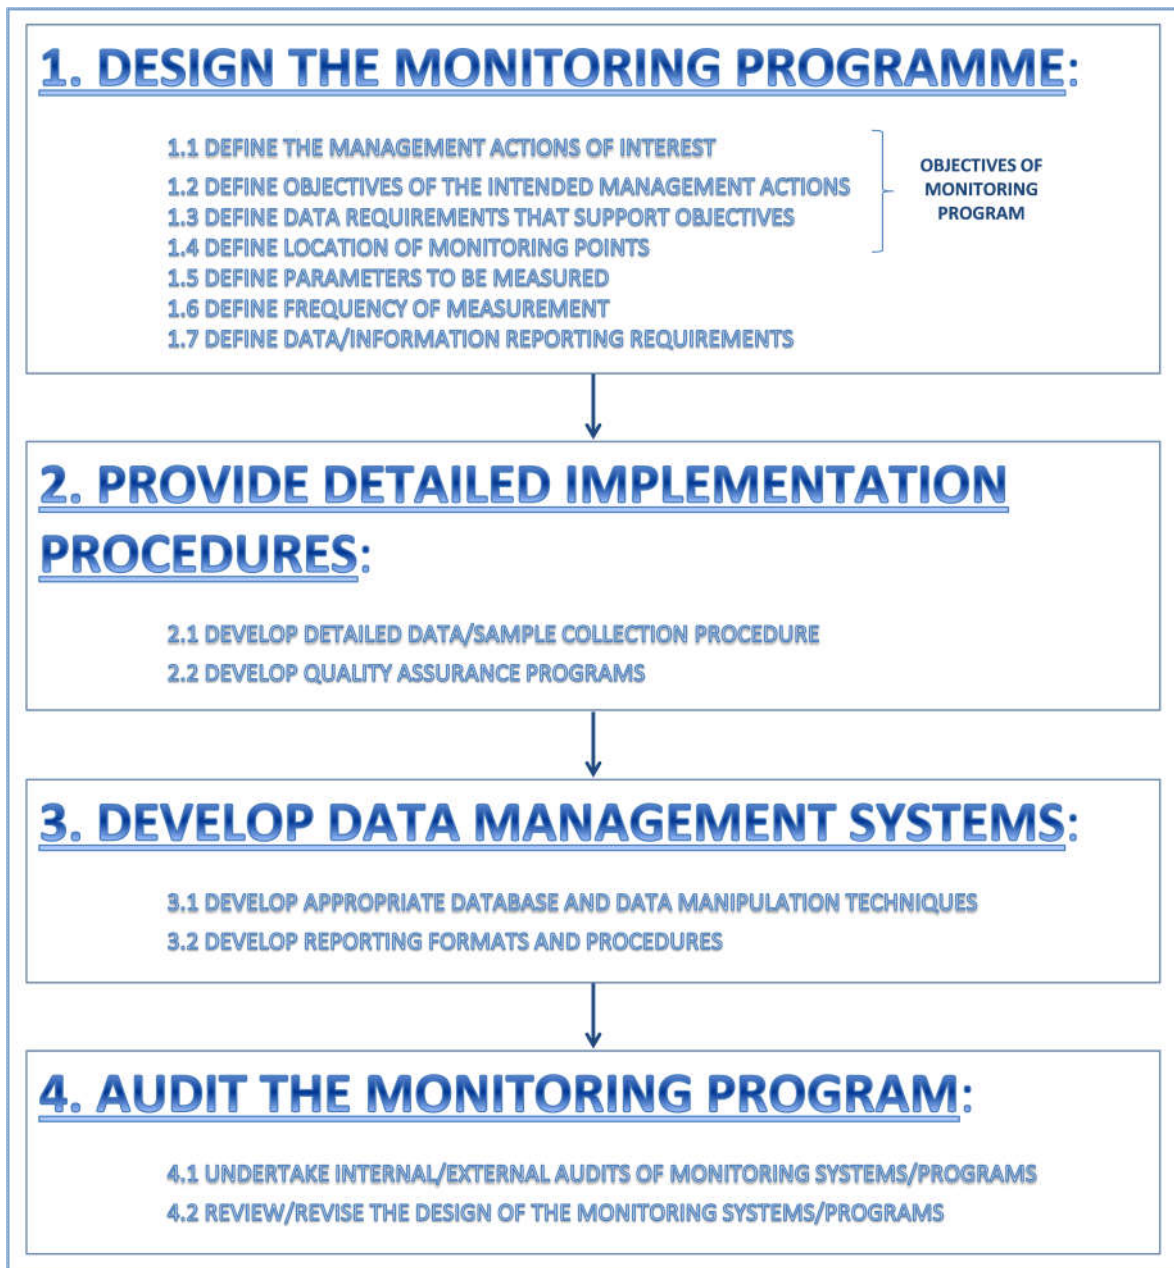


Figure 4: Procedure to develop a monitoring programme as adopted from BPG G3

The importance of data collection and implementation of a monitoring programme is also emphasised BPG G2. In the description and summary diagrams of the processes to develop water and salt balances, specific emphasis is given to “data collection and monitoring programme” as a specific and separate step in the development of such a water balance. This includes labelling of streams, collection and evaluation of existing data, identification of areas with insufficient data, development of a site-specific sufficient monitoring programme and the collection and assessment of new data.

It is stated in the above-mentioned guideline that to develop a water and salt balance, it is necessary to collect data of flow rates, dam volumes and water quality relevant to the identified water circuits. Existing data needs to be evaluated in order to determine where flow and quality data are not available, or where the data is out-dated, not reliable or insufficient. The areas in the water reticulation system where there are insufficient data must then be identified and a monitoring programme must be adapted or developed to collect sufficient data at these identified locations. The level of monitoring needs to take into consideration the significance of the point relative to the overall water and salt

balance, and the accuracy required at the point. The monitoring programme should also take into consideration whether the water and salt balance are to assess missing flows or for compliance monitoring, which may have different requirements for location and accuracy. It must be noted at this stage that the current water monitoring program implemented at Anglo Platinum was not designed to cater sufficiently for the development of a water and salt balance.

4. SITE DESCRIPTION AND BACKGROUND INFORMATION

4.1. Background

Anglo American Platinum sold its Rustenburg mining operations to Sibanye Platinum, effective 1 November 2016. The mining operations were located north and east of the town Rustenburg in the Critical Zone of the western lobe of the Bushveld Complex. In the centre of these mining operations remained the Anglo American Platinum Process Division (henceforth referred to as the Rustenburg Process Division), including the Precious Metal Refiners, Rustenburg Base Metal Refiners, Waterval Smelter, Anglo Converting Process (ACP) and the Waterval East Tailings Storing Facility.

The Process Division is situated within the Hex River catchment just upstream from the Bospoort Dam (Quaternary catchment A22H). Various continuous, seasonal or event-linked discharges of affected process water takes place into seasonal tributaries of the Hex River, which drains the processing areas. The tributaries affected by the process division that drain into the Hex River are the Klipfonteinspruit and Klipgatspruit.

Activities in a catchment affect both the physical attributes and the chemical constituents of the water body and therefore also affect the biotic community. The Target Water Quality Guideline Ranges (TWQGR) as developed by the then Department of Water Affairs and Forestry and published in 1996, aim to ensure that water quality variables are maintained within the “no effect” range, i.e. such that the aquatic environment is not detrimentally affected by the additions of effluents.

4.2. Operational Overview

The Rustenburg Process Division is owned and operated by Anglo American Platinum Limited. Processing (smelting and refining) operations include mainly the Platinum and Platinum Group Metals (PGMs). Anglo American Platinum Limited is the world's leading primary producer of Platinum and other PGMs including palladium, rhodium, ruthenium, iridium and osmium. Nickel, copper, other base metals and gold are also produced.

The process division is concerned with the beneficiation of ore into economical products and consists of the following operations:

Waterval Smelter:

The Smelter uses electric furnaces to smelt concentrate to produce a sulphur-rich matte with gangue impurities removed as slag. The slag is cleaned and converter slag is reduced in an electric furnace to recover PGMs and base metals for recycling back to the converter. Oxygen-enriched air is blown through a top-submerged lance converter to oxidise sulphur and iron contained in furnace matte to SO₂ gas and slag respectively.

Anglo Converting Process (ACP) and Acid Plant:

The ACP plant is designed to reduce sulphur dioxide emissions and increase converting capacity. The resulting converter matte is slow-cooled to concentrate PGMs into a metallic fraction. At the acid plant SO₂ gas is converted to SO₃ by passing it over catalytic beds and the subsequent addition of water produces 98% sulphuric acid which is sold to fertiliser manufacturers.

Rustenburg Base Metal Refiners (RBMR):

At the Magnetic Concentration Plant (MCP) crushed converter matte is milled and the PGM fraction is separated magnetically. This is pressure leached to yield a solid final concentrate that is sent to PMR. Base metal-rich non-magnetic solids and leach solution are processed further in the base metal refinery. The base metal-rich solids are leached in high pressure autoclaves and contacted with MCP leach solution to yield separate nickel and copper streams. The separate nickel and copper streams are purified. During this process cobalt sulphate is recovered. Nickel and copper metal cathodes are produced by passing an electrical current through the separate purified streams in a process called electro-winning. Excess sulphur in solution is neutralised with sodium hydroxide and crystallised to form a sodium sulphate product. The final economical products of the RBMR are cobalt sulphate, nickel, copper and sodium sulphate.

Precious Metal Refiners (PMR):

From the MCP Plant at the RBMR, final concentrate is dissolved using hydrochloric acid and chlorine gas. PGMs are sequentially separated and purified to yield platinum, palladium, iridium, ruthenium and gold. Osmium is precipitated as a salt.

5. WATER MONITORING PROGRAM

The Rustenburg Process Division Rustenburg Process Division water monitoring program in its current format, barring the addition or decommissioning of certain localities over time as operations change, has been running consistently since 1995. The monitoring programme was developed to include the following objectives:

- ◆ To document the determination and assessment of the impacts of the Rustenburg platinum operations on the receiving river systems. This includes monitoring of process water, discharges and effluents and receiving water up- and downstream from potential impacts to ultimately quantify and highlight impacts caused by the Rustenburg Process Division business units as well as other non-mining related impacts.
- ◆ To determine the usefulness of water for potential downstream users.
- ◆ The implementation of a well-designed and maintained monitoring programme and database which is considered essential within any mine water management strategy.
- ◆ Measuring of compliance towards the Water User License (WUL, 2018) under Chapter 4 of the National Water Act, 1998 (Act 36 of 1998).
- ◆ Aligning with the programs and guidelines of the Department of Water Affairs.

It is indicated as part of this annual monitoring report that:

- ◆ A detailed design of the monitoring programme was undertaken and that monitoring was undertaken in accordance with the monitoring programme.
- ◆ The monitoring programme is site specific as reflected in this annual monitoring report.
- ◆ The implemented programme delivered the data and information required to achieve the objectives of the programme.
- ◆ The results of the monitoring programme represent the actual situation on site.
- ◆ The data management system was used to ensure that data is optimally utilised.
- ◆ The monitoring programme is a dynamic system that changes as the mine and the mine water management system change. Recommendations are made as part of this annual report pertaining to such changes.

The current Rustenburg Process Division monitoring program's locality names, coordinates, relevant catchment descriptions and sampling frequencies are illustrated in Table 2 and Table 3. A total of 47 surface water monitoring localities and 33 groundwater monitoring localities are currently active in the Rustenburg Process Division water monitoring programme.

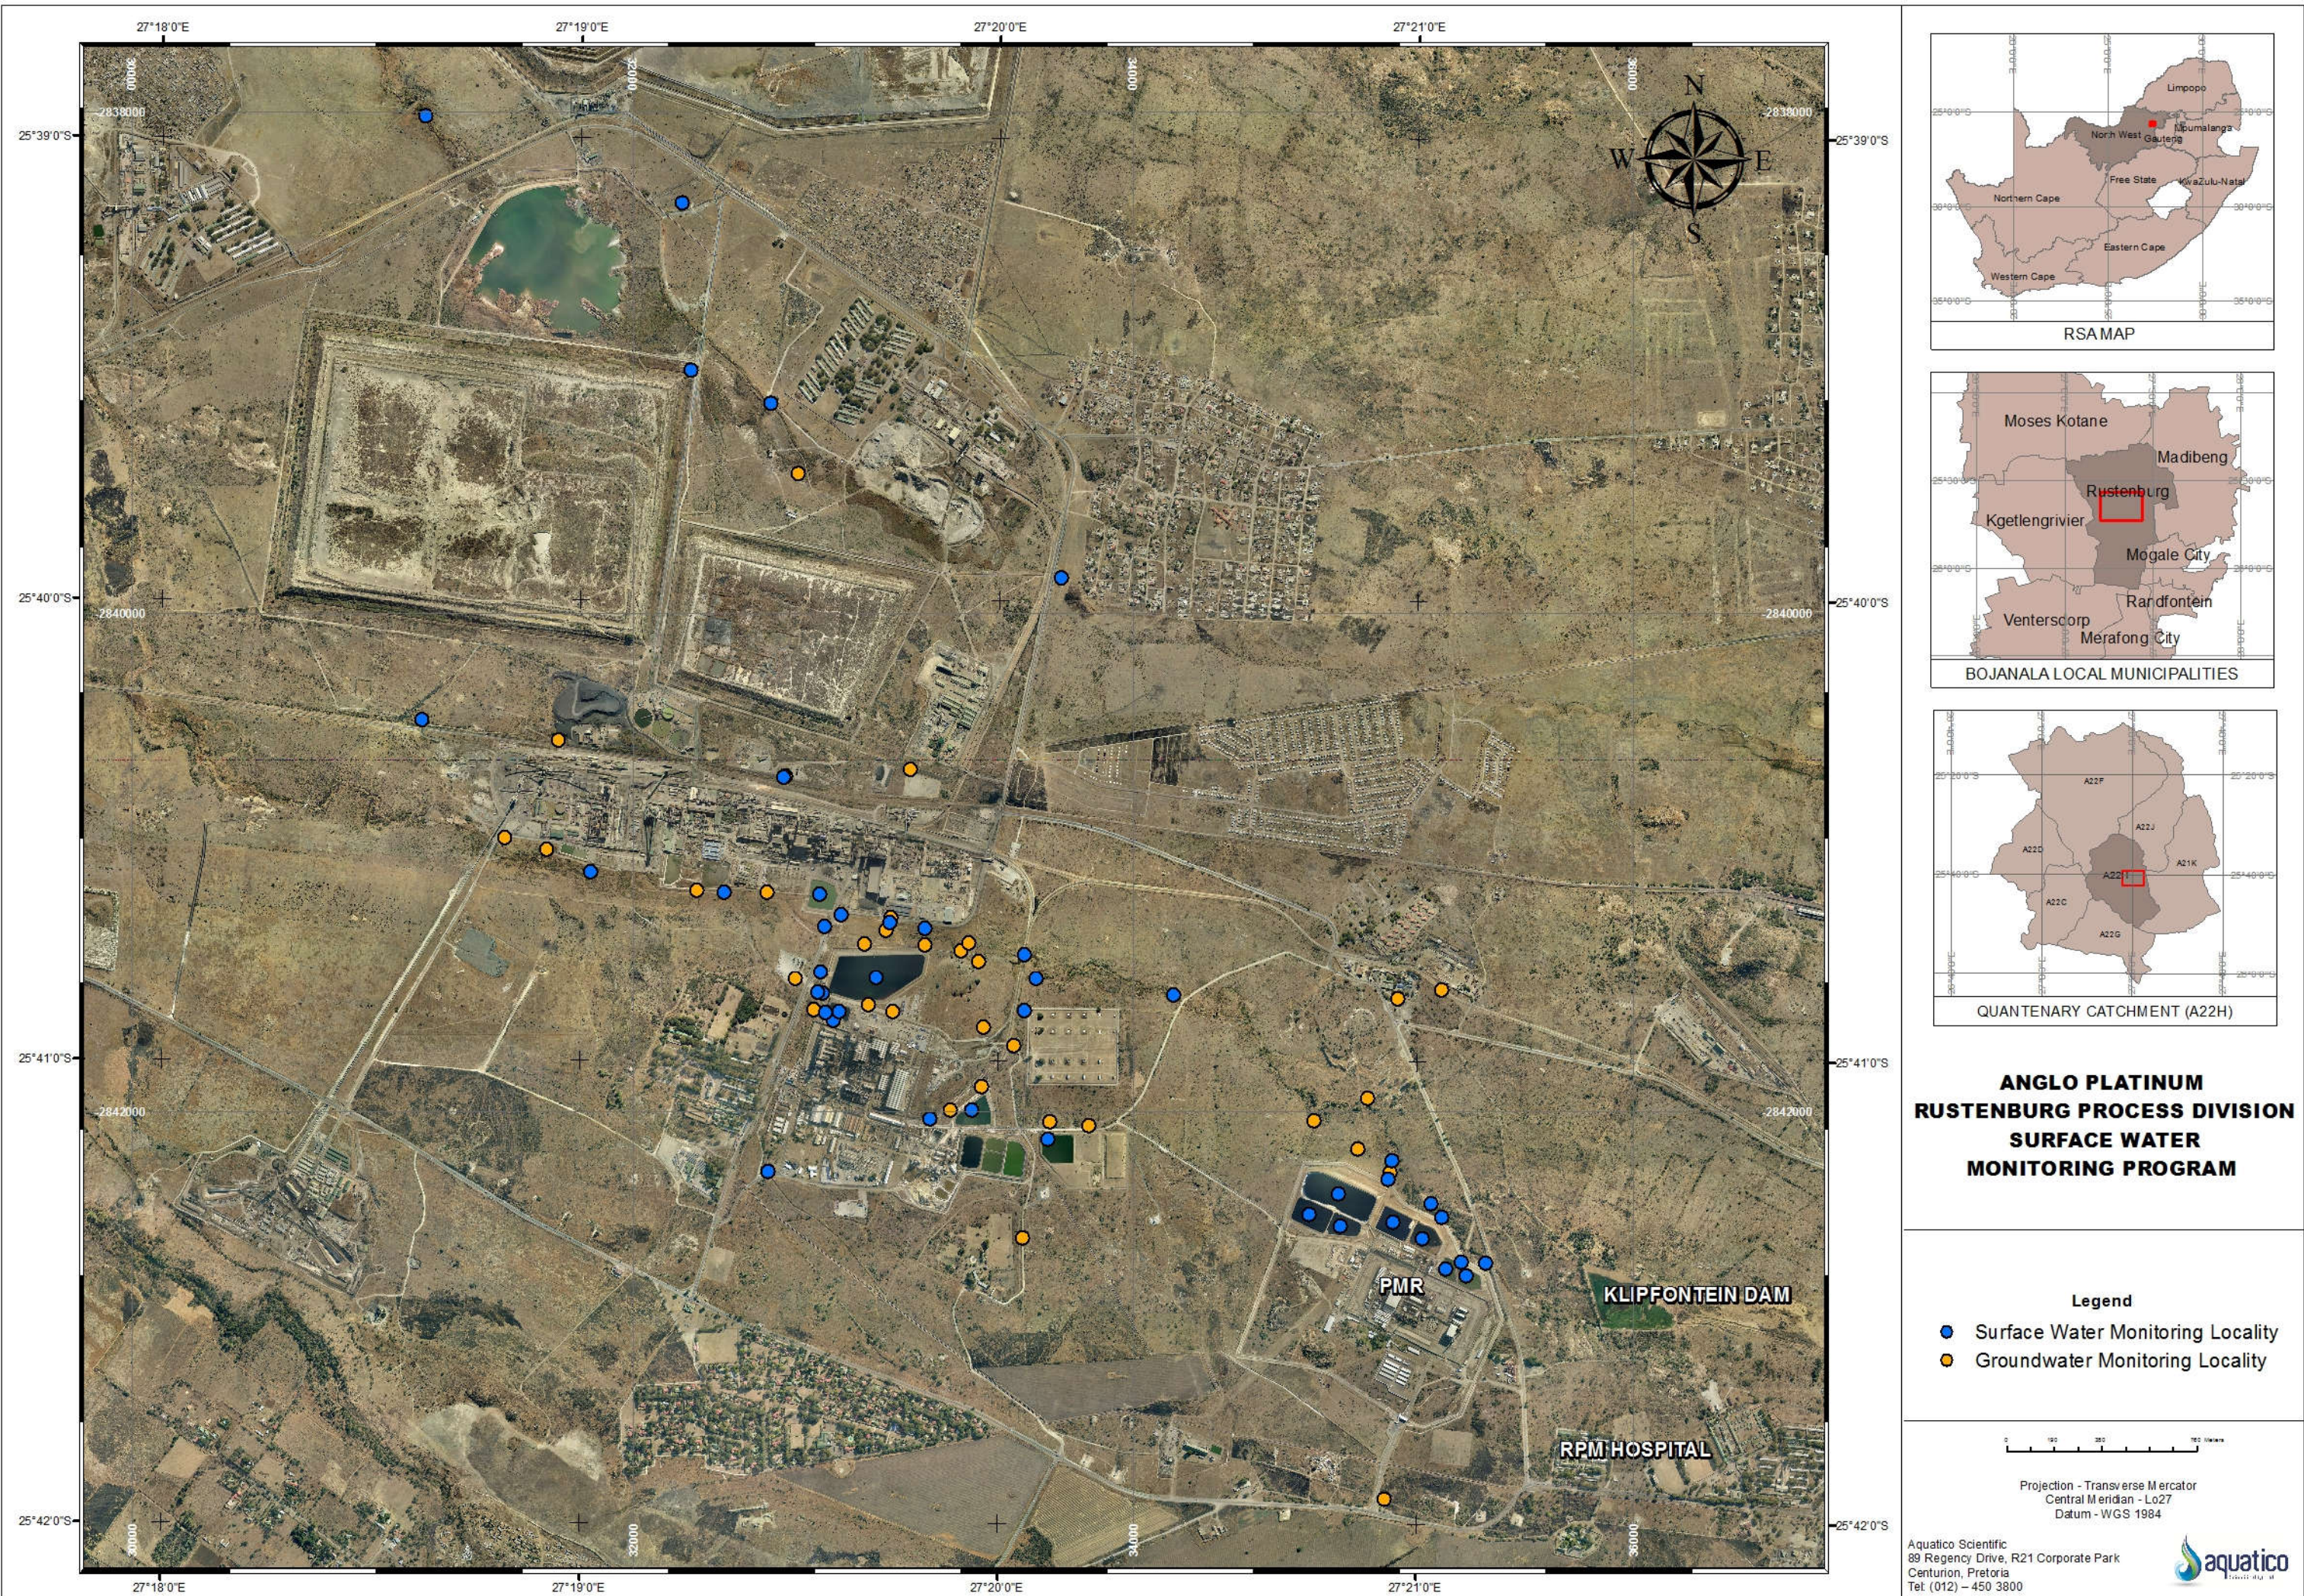


Figure 5: Anglo Platinum monitoring area

Table 2: Rustenburg Process Division surface water monitoring locality names and descriptions

Site Name	Site description	Y-coordinates	X-coordinates	Monitoring Frequency
K008	Klipfonteinspruit at PMR Bridge	-25.69061	27.35275	M
K009	PMR East rain water dam overflow	-25.68893	27.35098	M
K010	Klipfonteinspruit, downstream of K009	-25.68844	27.35057	M
K011	Discharge at PMR culvert at PMR bridge	-25.69056	27.35177	M
K012	Klipfonteinspruit between PMR and RBMR on old road to magazine	-25.68096	27.34029	M
K013	Culvert ditch going to Klipfonteinspruit halfway between PMR bridge and Waterval bridge parallel to old railway	-25.68152	27.33435	M
K014	Intersection of Klipfonteinspruit and rail line bridge (south side)	-25.6795	27.33434	M
K015	150 metres up from intersection of Klipfonteinspruit and rail line	-25.68036	27.33484	M
K023	Klipfonteinspruit at base of RBMR dump	-25.67855	27.33039	M
K024	Outflow of RBMR Dam 3 stormwater dam	-25.68091	27.32634	M
K025	Intersection between electric pylons & compressor air pipe between RBMR and lab. Storm water canal from ACP.	-25.67806	27.32706	M
K028	Klipfonteinspruit after confluence of RBMR west ditch system at Waterval smelter bridge	-25.67849	27.32638	M
K032	Klipfonteinspruit downstream of Waterval Smelter	-25.67655	27.31709	M
K035	Klipgat Return Water Dam of Waterval Tailings	-25.65237	27.32067	M
K036	Inflow into Klipgat return water dam from Waterval tailings dam 7-stream and Khomanani I Shaft sump canal	-25.65843	27.32103	M
K044	Trench to the west of the RBMR dam 3B	-25.68087	27.32612	M
K059	Culvert at railway entry to RBMR	-25.68543	27.3306	Q
K062	Spillway overflow RBMR stormwater dam 3B	-25.68015	27.32625	M
K063	Klipfonteinspruit at stormwater discharge from Waterval smelter and concentrator	-25.67728	27.3224	M
K080	Effluent and stormwater discharge west of PMR	-25.68759	27.34887	M
K098	ACP Pollution Control Dam	-25.677331	27.326189	M
K099	Klipfonteinspruit downstream of PMR	-25.68691	27.34901	M
K136	Klipgatspruit, downstream of Entabeni Hostel at Khomanani I Shaft (Frank I Shaft)	-25.65959	27.3242	M
K158	RBMR Dam 1	-25.68188	27.32676	Q
K159	RBMR Dam 2	-25.68163	27.32644	Q
K160	RBMR Dam 3A	-25.68157	27.32700	Q
K161	RBMR Dam 3B	-25.68034	27.32847	Q
K162	RBMR Triangular Dam	-25.68511	27.33229	Q
K163	RBMR SSSS Dam	-25.68618	27.33532	Q
K167	Cut-off trench north of Waterval concentrator just before discharge towards Klipfonteinspruit	-25.67106	27.31033	Q
K168	Cut off trench north of Waterval Smelter reverts area	-25.67312	27.32476	M
K169	Trench from PF Retief laboratory towards Klipfonteinspruit	-25.67835	27.32898	M
K187	Trench upstream of RBMR at culvert on access road to South gate	-25.68735	27.32416	M
K188	Klipgatspruit, downstream of Mfidikoe village, upstream of Khomanani I Shaft (Frank I Shaft), Frank Concentrator and Waterval Complex	-25.66587	27.33577	M
K190	Klipgatspruit, downstream of Klipgat Return Water Dam and Waterval Tailings	-25.64926	27.31044	M
K208	PMR Dam 1	-25.68972	27.350228	Q
K209	PMR Dam 2	-25.689142	27.349065	Q
K210	PMR Dam 3a	-25.690796	27.351136	Q
K211	PMR Dam 3b	-25.691052	27.35198	Q
K212	PMR Dam 4/5	-25.6881	27.346858	Q
K213	PMR Dam 6E	-25.689256	27.346964	Q
K214	PMR Dam 6W	-25.688854	27.345702	Q
K220	RBMR Effluent dam 1	-25.685799	27.331835	Q
K221	RBMR Effluent dam 2	-25.685799	27.331835	Q
K222	RBMR Effluent dam 3	-25.685799	27.331835	Q
K223	RBMR E&S feed dam 1	-25.687804	27.330812	Q
K224	RBMR E&S feed dam 2	-25.687661	27.330610	Q

*M – Monthly frequency

Q – Quarterly frequency

Table 3: Rustenburg Process Division groundwater monitoring locality names and descriptions

Site Name	Site description	Y-coordinates	X-coordinates	Monitoring Frequency
BMRWWTW	Downgradient of Waterval treatment works	-25.680378	27.325227	Q
EM01	UG2 complex downgradient south borehole	-25.675743	27.315343	Q
EM11	Central Deep borehole downgradient south-east of rock dump	-25.684665	27.348047	Q
EM16	Klipgatspruit borehole downgradient of Khomanani I Mine	-25.662122	27.325315	Q
NB01	UG2 complex upgradient north borehole	-25.671792	27.315785	Q
NB02	UG2 complex downgradient south-west borehole	-25.675300	27.313652	Q
NB03	Downstream South of ACP	-25.678150	27.329030	Q
NB04	PMR upgradient borehole	-25.699105	27.348748	Q
NB48	Waterval Tailings upgradient of Frank concentrator	-25.672808	27.329792	Q
NB52	BMR upgradient of SSS effluent dams	-25.689740	27.334303	Q
NB56	Central Deep borehole downgradient south of salvage yard	-25.680740	27.350972	Q
NB57	Central Deep borehole downgradient south of shaft	-25.681065	27.349220	Q
NBH07	Downgradient from PMR	-25.687347	27.348928	Q
S011	BMR downgradient west towards Klipfonteinspruit	-25.681508	27.325960	Q
S051	ACP downgradient south towards Klipfonteinspruit	-25.678628	27.328833	Q
S102	BMR downgradient north of north dump towards Klipfonteinspruit	-25.679347	27.331812	Q
S104	ACP downgradient south-east borehole	-25.679068	27.332142	Q
S120	BMR downgradient north of SSS effluent dams	-25.684282	27.332675	Q
S140	Downgradient south of Waterval Tailings - control towards WV Smelter	-25.673088	27.324837	Q
S160	BMR downgradient north-east of north dump towards Klipfonteinspruit	-25.679735	27.332518	Q
S230	BMR downgradient of SSS effluent dams	-25.685518	27.335377	Q
S373	PMR downgradient northwest borehole	-25.685472	27.345885	Q
S374	PMR downgradient north borehole	-25.686502	27.347647	Q
S386	BMR upgradient east of BMR rainwater dam	-25.681567	27.329112	Q
S388	Borehole west of BMR magazines	-25.682787	27.333922	Q
S389	BMR upgradient south of north dump	-25.682130	27.332737	Q
S400	Waterval Smelter downgradient borehole towards Klipfonteinspruit	-25.677258	27.324082	Q
S403	BMR downgradient east of SSS effluent dams	-25.685688	27.336937	Q
S405	BMR upgradient south of BMR rainwater dam	-25.681318	27.328167	Q
S407	Retrofit downgradient borehole towards Klipfonteinspruit	-25.677188	27.321320	Q
S409	BMR downgradient north towards Klipfonteinspruit	-25.679103	27.328003	Q
S410	BMR downgradient north-east towards Klipfonteinspruit	-25.679132	27.330390	Q
S418	BMR downgradient northwest of SSS effluent dams	-25.685108	27.331415	Q

*M – Monthly frequency

Q – Quarterly frequency

6. SAMPLING AND MONITORING PROCEDURES

6.1. Fieldwork

The Aquatico Fieldwork Division uses acknowledged methods for sampling as per Rustenburg Process Division Rustenburg Process Division WUL conditions.

Sampling is conducted by qualified Aquatico Field Technicians in order to obtain a representative sample as well as the highest possible scientific integrity. Incorrect sampling procedures and methods will affect the accuracy, reliability and credibility of analytical results and can lead to misleading information and conclusions. A representative water sample can be described as:

“A sample taken in the correct manner at a point that truly represents the water body at the time, at the specific locality of concern”

All fieldwork conducted are based on the protocols and specifications, and code of practice contained in the SABS ISO 5667:1-15. These international standards address all aspects from the monitoring programme design, sampling methods as well as sample preservation and many other aspects.

Applicable standards include:

- ISO 5667-1: 2006 Part 1: Guidance on the design of sampling programmes and sampling techniques
- ISO 5667-3: 2003 Part 3: Guidance on preservation and handling of samples
- ISO 5667-5: 2006 Part 5: Guidance on sampling of drinking water from treatment works and piped distribution systems
- ISO 5667-6: 2005 Part 6: Guidance on sampling of rivers and streams
- ISO 5667-11: 1993 Part 11: Guidance on sampling of groundwater
- DWAF Best Practice Guidelines Series G3: General Guidelines for Water Monitoring Systems

In certain cases, adhering to the norms as set out in the above SABS ISO standards is not possible due to certain practicalities. Two such cases, applicable to Anglo Platinum, are given below:

- Due to field conditions, no pH, EC, or temperature readings are taken *in situ*. As sampling takes place over different time periods in the field, temperature will vary from samples taken in the early morning to samples taken at midday, and late afternoon. These temperature variations will induce pH and EC fluctuations, and will ultimately make the data incomparable. Thus, pH and EC readings are taken under controlled laboratory conditions to ensure that data sets are more comparable and reliable. The Anglo Platinum water samples are delivered to the laboratory within a sufficient time period (less than 48 hours) to ensure freshness of the water samples for analysis.
- Boreholes at the Anglo Platinum are not purged before sampling. Purging is the practice of pumping a borehole up to a point of stable EC or when three volumes of water are removed from the borehole before collecting a sample for analysis. The ISO SABS 5667-11 guideline recommends that purging only be applied to boreholes being pumped, such as abstraction boreholes or water supply boreholes. The majority of the monitoring boreholes at Anglo Platinum are for observation/monitoring purposes. The ISO SABS 5667-11 stipulates “Depth sampling consists of lowering a sampling devise (bailer) into the borehole, allowing it to fill with water at a known depth, and retrieving the sample for transfer to an appropriate sampling container. This method of sampling is normally suitable for use in observation boreholes that are not being pumped”. For observation boreholes that are equipped with pumps, which limit accessibility of the

sampling device, a sample is collected from a tap installed on the line (where available). A second reason for deviating from the practice of purging boreholes before sampling is the high cost involved at the level of monitoring employed at Anglo Platinum (i.e. purging 100+ boreholes on a quarterly frequency will have a dramatic effect on monitoring cost).

Aquatico developed a custom-made data input system in accordance with SABS ISO guidelines 5667-1 to 5667-3, to assist the field technician in recording the physical and environmental information of the sampling locality. This information is needed to interpret water quality especially if the water quality results obtained by the laboratory indicate sudden changes at a specific locality.

The field data typically include the following information:

- ◆ Location, name and details of the sample site
- ◆ Method of collection
- ◆ Name of collector
- ◆ Nature of pre-treatment, if any
- ◆ Preservative or stabilizer added, if any
- ◆ Flow status or dam level
- ◆ GPS Co-ordinates
- ◆ Photographic evidence
- ◆ Water level of boreholes
- ◆ Other data gathered at this point

All of the above information is recorded on a handheld PDA device deployed to the field complete with GPS, bar-code scanner, camera and database-linked MONLIMS software. The water quality database is electronically updated with this information when the field technician returns from the field trip.

Sample collection and transport to the laboratory

- Prior to going to the field, all project info required for the successful monitoring is downloaded onto an electronic handheld field unit (Figure 6A). The field technician thus works solely on the orders given by the field unit. As soon as he arrives at a certain sample point, he is prompted to complete a set of pre-set observations – these can be customised by the programme manager, for example, flow of stream, water-level of borehole, meter reading on flow meter, odour/colour of water etc. The software will not allow the technician to continue to a next step without successfully entering the required information.
- Prior to taking any sample, the software will also require that a photo of the sampling point be taken. The photo is automatically named and filed, together with a time and date of sample and GPS coordinate as reference to the sample taken. This acts as conclusive proof that the technician actually visited the correct sampling point, providing an audit trail for field work.
- The GPS coordinates are also verified against a pre-programmed XY coordinate for that specific sampling point. As soon as the technician is not within a 30m radius (customisable parameter) of the programmed position for the specific monitoring locality, the software immediately prompts a warning on the screen that it is not the correct location. This warning can be ignored by the technician but a new GPS coordinate will be taken in the background and stored with the site info to keep log of any deviation from the sampling set-up. A full audit report can be generated showing actual sampling localities, date and time of sampling and deviations from programme.

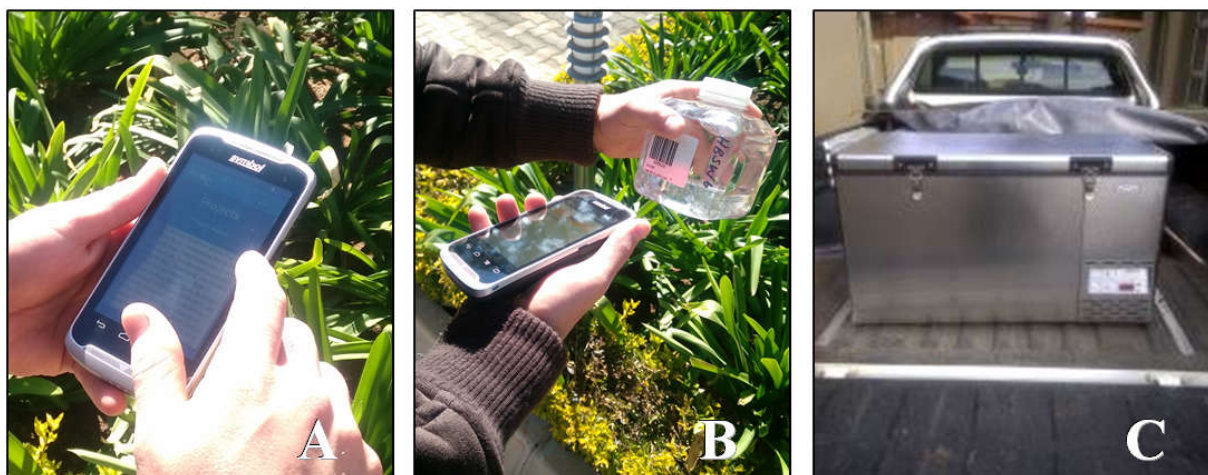


Figure 6: A –The field PDA units that are being used during sampling. B – Field technician scanning a bar-coded sampling container after the sample has been taken. C – National Luna cooling units fitted on all field vehicles to ensure proper sample transport to the laboratory (at 4C)

- At this point the technician will be prompted to take a specific sample type.
- All containers are pre-bar coded and the technician must scan the sampling container prior to taking the sample (Figure 6B); the reason for this step is twofold. Firstly, to ensure that it is the right sampling point and secondly to ensure that the correct sampling container type is used (i.e. organic samples in amber glass containers, microbiological samples in sterile containers etc.).
- Only at the point where all the requested tasks are completed will the software acknowledge that the function is completed and prompt the technician to proceed to the following locality.
- Once the field technician arrives back at the laboratory, all the samples are delivered to sample reception and the handheld unit is connected to the mainframe system via a docking station. All sampling info is downloaded into a SQL database.
- With the project set-up being completed and programmed at the start of the project (before fieldwork), all analytical requests are already in the database. As soon as the sample barcode is scanned at sample reception, the laboratory immediately knows what analyses need to be conducted on which samples.
- The fieldwork efficiency is also checked at this point to ensure that all samples taken in the field are actually being delivered to the laboratory; i.e. sample names and counts from field unit matches the laboratories submission worksheet or the system alarms should there be discrepancies in this regard. As example, a sample container may have been leaking in transit and although the sample container arrived at the laboratory, there is not sufficient volume of sample to be analysed, this will then be rectified immediately and the technician tasked for re-sampling.

Samples and sampling containers applicable to Anglo Platinum

Water samples for hydro-chemical or inorganic analysis are collected in new clean polyethylene bottles and stored in dust free thermo-isolated container. Samples for bacteriological analyses are sampled in sterile containers and kept cool (at around 4°C) in on-board fridge units (Figure 6C). Samples for hydrocarbon or organic analysis are sampled in clean, amber glass containers. Samples are not being preserved after sampling. As new and clean sampling bottles are used, cross-contamination is minimal. Water samples, which are not properly filtered, should never be preserved (acidified). This would lead to the re-suspension and remobilization of substances and could lead to “false-positive” results.

Water-level measurements of boreholes at Anglo Platinum

Accurate water-level measurements are critical in geo-hydrological studies and standard procedure when sampling a borehole/well. Depth to water measurements is conducted using the manual OTT KL010 Contact Gauge depth meter.

6.2. Laboratory Analysis

Approved laboratory analysing techniques are followed. Aquatico performs the hydro-chemical analyses as well as the bacteriological analyses.

Aquatico Laboratories is a state-of-the-art water testing laboratory in Irene, Centurion. This analytical laboratory is operational since July 2006. Aquatico Laboratories take part in the SANAS accredited SABS Proficiency Testing Scheme (PTS0003) for hydro-chemical analyses as well as the National Laboratory Association - South Africa Water Microbiology Proficiency Test Scheme. The Laboratory also took part in the non-accredited Anglo American Laboratory Proficiency Testing Programme (administrated by Thistle) and achieved an overall third place out of nine competing laboratories, based on z-score statistical results across the analytical suites. Further, Aquatico is an SANAS Accredited Testing Laboratory, No T0685. The SANAS accreditation certificate and schedule is provided in the Appendices.








Wherever current, analyses are carried out in accordance with methods prescribed by and obtainable from the South African Bureau of Standards, in terms of the Standards Act, Act 30 of 1982 as prescribed in the WUL. The routine laboratory analyses conducted on the Anglo Platinum samples is presented in Table 4 below.

Table 4: Analytical packages associated with the Anglo Platinum water monitoring localities

Anglo suite	Suite description	Analysis description
Anglo Salts and Nutrients (Suite A)	Chemical salts and nutrients	pH, EC, Alk, TDS, Hardness, Ca, Na, Mg, K, Cl, SO ₄ , F, NO ₃ , NH ₄ , PO ₄ , PO ₄ as PO ₄ , TIN, DO, Cr ⁶⁺
Anglo Comprehensive metals (Suite B)	Selected comprehensive metals	Al, Fe, Mn, Cr, Cu, Ni
Anglo env. bacteriological suite (Suite C)	Bacteriological variables	<i>E. coli</i> , Total coliforms
Anglo metal scan (suite D)	Selected broad metal scan	Ag, B, Ba, Be, Bi, Cd, Co, Ga, Li, Mo, Pb, Rb, Sr, Te, Tl, V, Zn
Anglo SOG (Suite E)	Total oil and grease (SOG)	SOG
Anglo Resource (Additional WUL Suite)	Anglo additional WUL requirements	DO, Pb, Zn, B, Phenol, Cr ⁶⁺ , As, Cd, Hg, Se, PO ₄ Calculated, TIN
Toxicity analysis	Toxicity analysis	Trophic level toxicity test

Different analytical suites are applied to different water monitoring locality types at different frequencies. Table 5 below presents an overview of the suites applied to the locality types.

Table 5: Analytical suites applied to the different types of surface water monitoring localities

Description	Anglo Salts and Nutrients (Suite A)	Anglo Comprehensive metals (Suite B)	Anglo env. bacteriological suite (Suite C)	Anglo metal scan (suite D)	Anglo SOG (Suite E)	Anglo Resource (WUL Suite)	Toxicity analysis
Applicable Bio-icon							
Rivers/streams	✓	✓	✓	✓		✓	✓
Stormwater dams	✓	✓		✓		✓	
Pollution Control Dams	✓	✓		✓		✓	✓
Effluents, discharges	✓	✓		✓	✓	✓	
Groundwater boreholes	✓	✓		✓		✓	

Laboratory set-up and workflow

The sample enters the laboratory in a stream-lined workflow with various elements enhancing the analyses process as well as turn-around time. After being logged on the Laboratory information management system, the samples are firstly being filtered through a 0.45µm membrane filter as prescribed by ISO17025. The filtrate is transferred to new clean bar-coded sampling tubes and now ready for chemical analysis. pH and EC is determined on unfiltered samples and fed into the management software to act as an initial QC process in providing information to the other instrumentation in the Laboratory in terms of the expected quality of water (clean/dirty), the necessity for dilutions, etc. A further QC measure is minimising sample transfer between tubes to a single bar-coded sample tube that is introduced to the various instruments for analyses. The bar-coding system drastically minimises the possibility of sample-swap and result mis-feed into the information management system.

All results from the automated analytical instruments are automatically populated into the database minimising human error with data capturing. In terms of QC procedures, being an ISO17025 laboratory, quality is one of the main drivers in the laboratory. With each sample batch various Certified Reference Materials (CRMs) and quality standards and/or duplicate samples are analysed. Should one of the QC values fail the pre-set criteria, the entire batch of samples are automatically rejected and re-run. All QC samples are tabled and graphically plotted on a daily basis to ensure continuous monitoring and improvement.

When all requested variables are analysed, the data is ready for verification. During this step a technical signatory (Analyst) will evaluate the results provided by the software interface. All analytical checks and balances are calculated by the system and must comply with strict pre-set criteria and conditions. Samples/Variables that fail this step are prompted for re-analyses. As a further QC point, whenever possible, a historical water quality profile for that specific sampling locality is presented onscreen to enable the Analyst to evaluate temporal variance. Should the new results not comply with the history profile of the sample the technical signatory is notified and prompted to investigate further to assess the possibility of environmental factor or spill event.

As soon as all the results for the batch are available and verified by the technical signatories, the results are released and made available on the SQL software database for reporting purposes by the Scientific Reporting Division.

Audit trail

All actions or samples can be tracked on the software platform indicating the precise stage of completion for each task or sample. Various reports are generated providing valuable management information, for example.

- Number samples collected for project or field trip.
- All samples not collected in project or field trip.
- Reasons why samples not collected.
- Deviation distance from sampling point (by GPS).
- Days in holding.
- Turnaround days in Laboratory.
- Distance travelled.
- Number of samples per variable.

The software application was designed in such a way that all the info is stored within the SQL database. Any report or query could thus be executed to provide the desired management report. The software is also compatible with Microsoft Excel and can therefore interact with any other database system (such as Pivot).

6.3. Water Quality Reporting

Water Quality Reporting is conducted by the Aquatico Scientific Reporting Division consisting of qualified scientists and water quality specialists. All final evaluations are conducted by experienced and SACNASP registered (*Pri. Sci. Nat*) scientists.

The fieldwork information and water quality data, following laboratory analysis and verification, are entered into the Aquatico water quality management programme from where various custom-made reports are produced.

Monthly Reporting:

On a monthly basis, the Anglo Platinum Environmental Department is provided with the monitoring field data and water quality results in a PDF report as well as a Microsoft Excel format (WDAT) that is fully compatible with the Anglo American Platinum Integrated Data Display System (IDDS).

Quarterly Reporting:

On a quarterly basis, a concise quarterly report is produced that includes time-series graphs and maps of the most relevant information. The report also highlights water quality results that may require urgent management actions from the mine. This report is considered to be a short information report and will include a brief evaluation of the monthly surface water results over the quarterly period. This report can also be submitted to the Department of Water Affairs in-line with the WUL requirements for quarterly reporting of water results to the Chief Director.

Annual Reporting:

The Annual Integrated Surface and Groundwater Quality, Biomonitoring and Toxicity report (this report) is extensive and includes a full evaluation of all the results obtained during the annual monitoring period. The report includes a statistical summary (temporal & spatial) of all the chemical variables for all the monitoring localities, time-series graphs (for the entire database period), linear trend determinations, performance analyses and compliance assessments, water quality thematic maps indicating pollution sources and impacts on the receiving water body as well as a discussion and recommendation section. This report is composed of three volumes as discussed in further details in the next section.

Additional information can be found in the Comprehensive Annual Water Management Report “Anglo Platinum Rustenburg Process Division: Annual DWA Compliance Report” submitted to DWA and compiled by Aquatico Scientific. Additional information referenced in this report includes:

- ◆ Operations and permit information;
- ◆ Production figures and water usage;
- ◆ Rainfall and evaporation data; and
- ◆ Flow data.

6.4. Data Presentation

6.4.1. Volume 1

Anglo American Platinum Water Quality Assessment Report

The main report of the Anglo Platinum water quality assessment (Volume 1, “Annual Integrated Surface and Groundwater Quality, Biomonitoring and Toxicity Testing Assessment Report”, No. **APPD/AR1.1/2018/WR**) is a detailed and descriptive report with an introduction outlining the purpose of water quality monitoring, a locality map with names and descriptions (surface water), a background and objectives section including interpretation of the results obtained for the specific annual period, which will include:

- Surface Water Quality Discussion;
- Anglo Platinum impact quantifications on the main catchment area of the Hex River;
 - Impact quantification (mg/l) = Average downstream value from an Anglo Platinum business unit (mg/l) – Average upstream value from an Anglo Platinum business unit (mg/l)
- Surface water quality risk assessment;

- Appendix A – Detailed Biomonitoring Report;
 - Appendix B – Detailed Toxicity Report;
- Appendix C – Detailed Groundwater Report 6.4.2. Volume 2

Volume 2 contains data collected for review purposes (Report Number: *APPD/AR1.2/2018/WR*).

This will include:

Locality Assessment Reports

The Locality Assessment Report aims to give the reader a short water quality evaluation and interpretation of a specific Anglo Platinum monitoring locality during a specific period and also provide relevant information regarding a given monitoring locality. A locality assessment report consists of the following:

- ◆ Locality
 - Reference ID, type, locality photograph and coordinates
- ◆ Locality description
 - Type of monitoring locality and description
 - Applicable Target Water Quality Guideline Ranges (TWQGR) and or Permit Conditions (DWAF)
- ◆ Locality status
- ◆ Scheduled sampled month, sampling status (yes/no), observations
 - Average Water Quality Description
 - Average quarterly/yearly water quality description
 - Exceedance of applicable TWQGR/Permit Conditions (DWAF)
 - Additional notes
- ◆ Additional Analyses
 - Additional scheduled analyses which may include – bacteriological, soap, oil and grease, chemical oxygen demand (COD), chromium (VI) (Cr^{6+}), and/or full metal analysis.

Site Reports

A comprehensive format (Site Report) has been designed for data evaluation at Anglo Platinum surface water monitoring localities. The Site Report aids in the interpretation process of data, as well as giving more relevant information regarding a given monitoring locality during a specific period and are arranged according to catchment. A site report consists of the following:

- ◆ General description
 - (Site name, description, and type)
- ◆ Data table
 - Variables
 - Guideline/Permit Condition value
 - Results
 - Statistical presentation: (average, previous average and graph average)
- ◆ Time-series graphs & long-term trends
- ◆ Selected variables plot on the graph to give an indication of the range and linear movement for the variable over the database period. Also indicated are long-term trends for a specific variable at a monitoring locality.
- ◆ STIFF diagram

- The STIFF diagram exhibits a quick visual indication of the major anions / cations recorded (based on the meq/l and does not indicate mg/l concentration of a variable). This diagram plots the equivalent concentrations of the major anions and cations on a horizontal scale on opposite sides of a vertical axis. The plot point on each parameter is linked to the adjacent one until a polygon is created around the y-axis. The result is a small figure of which the geometry typifies the water composition at that point. Water with similar major ion ratios will show the same geometry.

Locality Tables

Time-series data and statistical analysis for the monitoring period are presented in tabular format according to catchment. Statistical evaluation of monitoring results and recommendations regarding the suitability for the identified uses are based only on variables being analysed. The summary tables include the following statistics for each monitoring locality:

- ◆ number of records in database period (September 2017 to August 2018);
- ◆ average value and standard deviation for database period;
- ◆ minimum, maximum and median values;
- ◆ 5th, 50th and 95th percentile for the entire database period;

A percentile is the value of a variable below which a certain percentage of observations fall, so for example, the 50th percentile is the value below which 50 percent of the observations may be found.

6.4.3. Volume 3

Anglo Platinum Water Quality Executive Summary

The Executive Summary (Refer to Volume 3, “Annual Integrated Surface and Groundwater Quality, Biomonitoring and Toxicity Executive Summary”, No. **APPD/AR1.3/2018/WR**) aims to give the reader a short and basic summarization of the current status of water quality at the respective business units, to highlight environmental and human risks associated thereof and to raise awareness specifically developed for department heads (HOD’s).

6.5. Data evaluation

6.5.1. Water quality evaluation against applicable guidelines

The South African Water Quality Guidelines are used by the Department of Water Affairs as its primary source of information and decision-support to judge the fitness of water for use and for other water quality management purposes. Five broad categories of water use are recognised in the South African Water Act, namely the use of water for **domestic purposes, industrial purposes, agricultural purposes, aquatic ecosystems** and **recreational purposes**. Added to that is the DWA’s mandate to protect the health and integrity of the aquatic ecosystem, which is therefore also seen as a major water user. Given its regional setting and for the purposes of the Rustenburg Process Division water monitoring programme, focus is placed on three of the above water users, namely Aquatic Ecosystems, Domestic Use and Agricultural Use, specifically, water used as livestock watering. The target water quality guideline range (TWQGR) is defined as those values or concentrations where no impact is expected on the specific user group, i.e. it is the ‘No Effect Range’. These values and concentrations are used within the water quality database evaluation and are presented in Table 5

Another guideline that will be used in these discussions is the General Limit (Table 7). The General Limit Guideline refers to the wastewater limit values as contained in Schedule 3 of the General Authorisations (General Authorisations in terms of Section 39 of the National Water Act, as documented in the Government Gazette No 26187, Notice No 399, dated 26 March 2004) and applies to the discharge of waste or water containing waste into a water resource through a pipe, canal, sewer or other conduit and the disposing in any manner of water which contains waste from, or which has been heated in, any industrial or power generation process. It should however be noted that the General Authorisation is not applied to any category A mine (defined as any gold or coal mine, any mine with an extractive metallurgical process, or any mine where sulphate producing or acid generating material occurs) and it is thus used with caution. The General Limit is only applied as a comparative guideline and should not be interpreted for compliance purposes.

Table 6: SAWQG Target water quality guidelines

Variable	South African Water Quality Guidelines (DWAF, 1996)		
	Dom ¹	Aqua ²	Live ³
pH	6.0 –9.0	<5% variation	-
Electrical Conductivity (mS/m)	70	-	500
Sulphate (mg/l SO ₄)	<200	-	<1 000
Nitrate (mg/l NO ₃)	<6	-	<22
Chloride (mg/l Cl)	<100	-	<3 000
Fluoride (mg/l F)	<0.7	<0.75	<2
Ammonia (mg/l NH ₃)	<1	<0.007	-
Calcium (mg/l Ca)	<80	-	<1 000
Magnesium (mg/l Mg)	<70	-	<500
Sodium (mg/l Na)	<100	-	<2000
Aluminium (mg/l Al)	<0.15	<0.005	<5
Iron (mg/l Fe)	<0.5	-	<10
Manganese (mg/l Mn)	<0.1	<0.18	<10

¹ DWAF SAWQG TWQGR for Domestic use

² DWAF SAWQG TWQGR for Aquatic Ecosystems

³ DWAF SAWQG TWQGR for Agricultural Use - Livestock watering

Table 7: DWAF General Limit Guideline

Variable / Parameter	Unit	DWAF General Limit
pH	-	5.5 - 9.5
EC	mS/m	150
TDS	mg/l	(1000)*
TH	mg/l	-
M_Alk	mg/l	-
Cl	mg/l	-
SO ₄	mg/l	-
F	mg/l	1
NO ₃ _N	mg/l	15
NH ₄ _N	mg/l	6
PO ₄	mg/l	10
Ca	mg/l	-
Mg	mg/l	-
Na	mg/l	-
K	mg/l	-
Fe	mg/l	0.3
Al	mg/l	-
Mn	mg/l	0.1
SAR	-	-
SOG	mg/l	2.5

As mentioned previously in this report, Anglo American Platinum is also a registered water user in terms of Chapter 4 of the National Water Act, 1998 (Act No. 36 of 1998) with a Water Use Licence issued to the mining operation in January 2018. In terms of this WUL the water quality limits presented in Table 8 should be adhered to; but do refer to Section 2 above for a detailed discussion on the WUL limits.

Table 8: WUL Resource and Groundwater Quality Limits

VARIABLE	Units	Groundwater Quality Limits (WUL 2018)	Surface Water Quality Limits (WUL 2018)
pH	pH units	6.0 - 9.5	6.0 - 9.0
Electrical Conductivity (EC)	mS/m	150	85.00
Hardness (CaCO ₃)	mg/l	-	50
Calcium (Ca)	mg/l	150	-
Magnesium (Mg)	mg/l	100	-
Sodium (Na)	mg/l	200	-
Chloride (Cl)	mg/l	200	-
Sulphate (SO ₄)	mg/l	200	-
Nitrate (NO ₃) as N	mg/l	10	-
Ammonia (NH ₄) as N	mg/l	-	1.00
Phosphate (PO ₄) as P	mg/l	-	0.125
Fluoride (F)	mg/l	1	0.75
Aluminium (Al)	mg/l	-	5
Iron (Fe)	mg/l	-	0.5
Manganese (Mn)	mg/l	-	0.18
Hexavalent chromium (Cr ⁶⁺)	mg/l	0.0049	0.0049
Copper (Cu)	mg/l	-	0.3
Dissolved oxygen	mg/l	-	7-8

6.5.2. Water quality classification

In 1998, the Department of Water Affairs and Forestry (DWAf), in association with the Water Research Commission (WRC) and the Department of Health (DOH) published a useful colour coding system for evaluating the prevailing water quality of water used for domestic use. The system is based on the principle of assigning a colour to a specific concentration range of variables commonly found in water and that has a major effect on the suitability of water for domestic use.

Due to significance of using water for domestic purposes and the importance of effective water quality evaluation for the use, efficient data for a wide variety of variables are available. The colour coding system will specifically be used to assess the water quality of the identified monitoring localities sampled. When comparing data with the guidelines for domestic use, the worst substance class will determine the overall class of the water supply. Data can be interpreted as in Table 9:

- Water testing within the Blue or Green colour class may be used without reservation and is considered safe for all users.
- Water testing within the Yellow colour class is generally regarded as safe, however sensitive users should be identified and warned to take personal consumption precautions.
- Water testing within the Red colour class can be used as a short-term emergency supply, approximately seven days only, when other sources are unavailable.
- When water tests within the Purple colour class the public must be warned not to use the water, or to use emergency home treatment where possible. If this is not possible, alternative water supplies must be considered and made available

Table 9: Structure of the classification system describing the effects of the different classes of water on the various domestic uses of water (DWAF *et al*, 1998)

CLASS / COLOUR	DESCRIPTION	EFFECTS
Class 0 (Blue)	Ideal water quality	Drinking health: No effects, suitable for many generations
		Drinking aesthetic: Water is pleasing
		Food preparation: No effects
		Bathing: No effects
		Laundry: No effects
Class 1 (Green)	Good water quality	Drinking health: Suitable for lifetime use. Rare instances of sub-clinical effects
		Drinking aesthetic: Some aesthetic effects may be present
		Food preparation: Suitable for lifetime use
		Bathing: Minor effects on bathing or on bath fixtures
		Laundry: Minor effects on laundry or on fixtures
Class 2 (Yellow)	Marginal water quality	Drinking health: May be used without health effects by majority of individuals of all ages, but may cause effects in some individuals in sensitive groups. Some effects possible after lifetime use.
		Drinking aesthetic: Poor taste and appearance are noticeable
		Food preparation: May be used without health or aesthetic effects by the majority of individuals.
		Bathing: Slight effects on bathing or on bath fixtures
		Laundry: Slight effects on laundry or on fixtures
Class 3 (Red)	Poor water quality	Drinking health: Poses a risk of chronic health effects, especially in babies, children and the elderly
		Drinking aesthetic: Bad taste and appearance may lead to rejection of water
		Food preparation: Poses a risk of chronic health effects, especially in babies, children and the elderly
		Bathing: Significant effects on bathing or on bath fixtures
		Laundry: Significant effects on laundry or on fixtures
Class 4 (Purple)	Unacceptable water quality	Drinking health: Severe acute health effects, even with short-term use
		Drinking aesthetic: Taste and appearance will lead to rejection of water
		Food preparation: Severe acute health effects, even with short-term use
		Bathing: Serious effects on bathing or on bath fixtures
		Laundry: Serious effects on laundry or on fixtures

6.5.3. Water quality parameters

Physical Water Quality

This refers to the water quality properties such as temperature, electrical conductivity, pH and oxygen content that may be determined by physical methods. When referring to the physical quality of water at Anglo Platinum we refer to the three parameters namely pH, EC or TDS. The physical quality affects the aesthetic as well as chemical quality of the water.

Table 10: Physical Quality of Water Parameters

Physical quality

Parameter	Relevance
pH	Affects the corrosivity and taste of water
EC / TDS	Serves as a general indicator of change in water quality and affects the “freshness” taste of the water. Indicates the salinity and quantity of dissolved substances.

Chemical Water Quality

The chemical quality of the water refers to the nature and concentrations of dissolved substances such as organic or inorganic compounds, including metals, in the water body. Many chemicals in water are essential for the biotic community and may form an integral part of the nutritional requirements. However, elevated levels may be limiting for some of the downstream water users.

Table 11: Chemical Quality of Water

Chemical quality	
Parameter	Relevance
Alkalinity	Indicative of intrinsic buffering capacity against acidification.
Major anions	Typically, chloride, sulphate, fluoride and the nitrogen compounds, Impacts the salinity levels
Hardness	Mainly affected by Calcium and Magnesium and affects the scaling and foaming quality of the water
Major cations	Typically, Calcium, Magnesium and Sodium - Elevated levels could affect the taste of water
Heavy metals	Toxic at low concentrations

Bacteriological Water Quality

Generally, the microbiological quality of water refers to the presence of organisms that cannot be individually seen with the naked eye, such as protozoa, bacteria and viruses. Many of these microbes are associated with the transmission of infectious water-borne diseases such as gastro-enteritis and cholera. In order to determine the bacteriological status and safety of Anglo Platinum water, Aquatico specifically focuses on total coliforms and *E. coli* (indicator of faecal coliforms) bacteria.

Table 12: Bacteriological Quality of Water

Bacteriological quality	
Parameter	Relevance
Faecal coliforms	Indicates recent faecal pollution and the potential risk of contracting infectious diseases
Total coliforms	Indicates the general hygienic quality of the water

Parameters such as pH, hardness and salinity are used to describe the general quality of water. These are tabulated below (Table 13) and are based on the descriptions as proposed by DWA:

Table 13: General water quality description parameters

Acidity	
pH: > 8.5	Alkaline/Basic
pH: 6.0- 8.5	Neutral
pH: < 6	Acidic
Hardness	
Hardness < 50 mg/l	Soft
Hardness 50 - 100 mg/l	Moderately soft
Hardness 100 -150 mg/l	Slightly hard
Hardness 150 – 200 mg/l	Moderately hard
Hardness 200 – 300 mg/l	Hard
Hardness 300 – 600 mg/l	Very Hard
Salinity	
TDS < 450 mg/l	Non saline
TDS 450 – 1 000 mg/l	Saline
TDS 1 000 – 2 400 mg/l	Very saline
TDS 2 400 – 3 400 mg/l	Extremely saline

7. SURFACE WATER MONITORING SUMMARY PER BUSINESS UNIT

The data summary aims to give the reader a short and basic summarisation of the current water quality status of the relevant process areas at Anglo American Platinum Rustenburg. Each business unit will be discussed separately focusing on qualities of process and pollution dams, effluents and up- and downstream qualities of adjacent streams and rivers. Each section will include a map illustrating the relative positions of monitoring localities situated in a specific catchment, and the general quality thereof (physical, chemical, bacteriological and organic where applicable). Localities discussed include:

- Process water (including return water dams and pollution control dams);
- Discharges, effluents and seepages of mining and non-mining sources;
- Receiving environment (including natural streams and rivers).

An impact evaluation is ultimately discussed using a simplified diagram for the river catchments showing the relative positions of possible pollutant contributors on a particular system. Only localities upstream and downstream from potential impacts are included in the diagrams. Averages for a specific period of selected variables are plotted on histograms while estimated impacts are presented in tabular format. The impacts are discussed broadly as combined impacts observed between upstream and downstream localities and calculated using the following:

$$\text{Impact quantification (mg/l)} = \text{annual average downstream value (mg/l)} - \text{annual average upstream value (mg/l)}$$

Where a specific business unit has impacted negatively on a specific river or spruit the impact quantified is in red font and where a positive impact has been quantified the impact is in green.




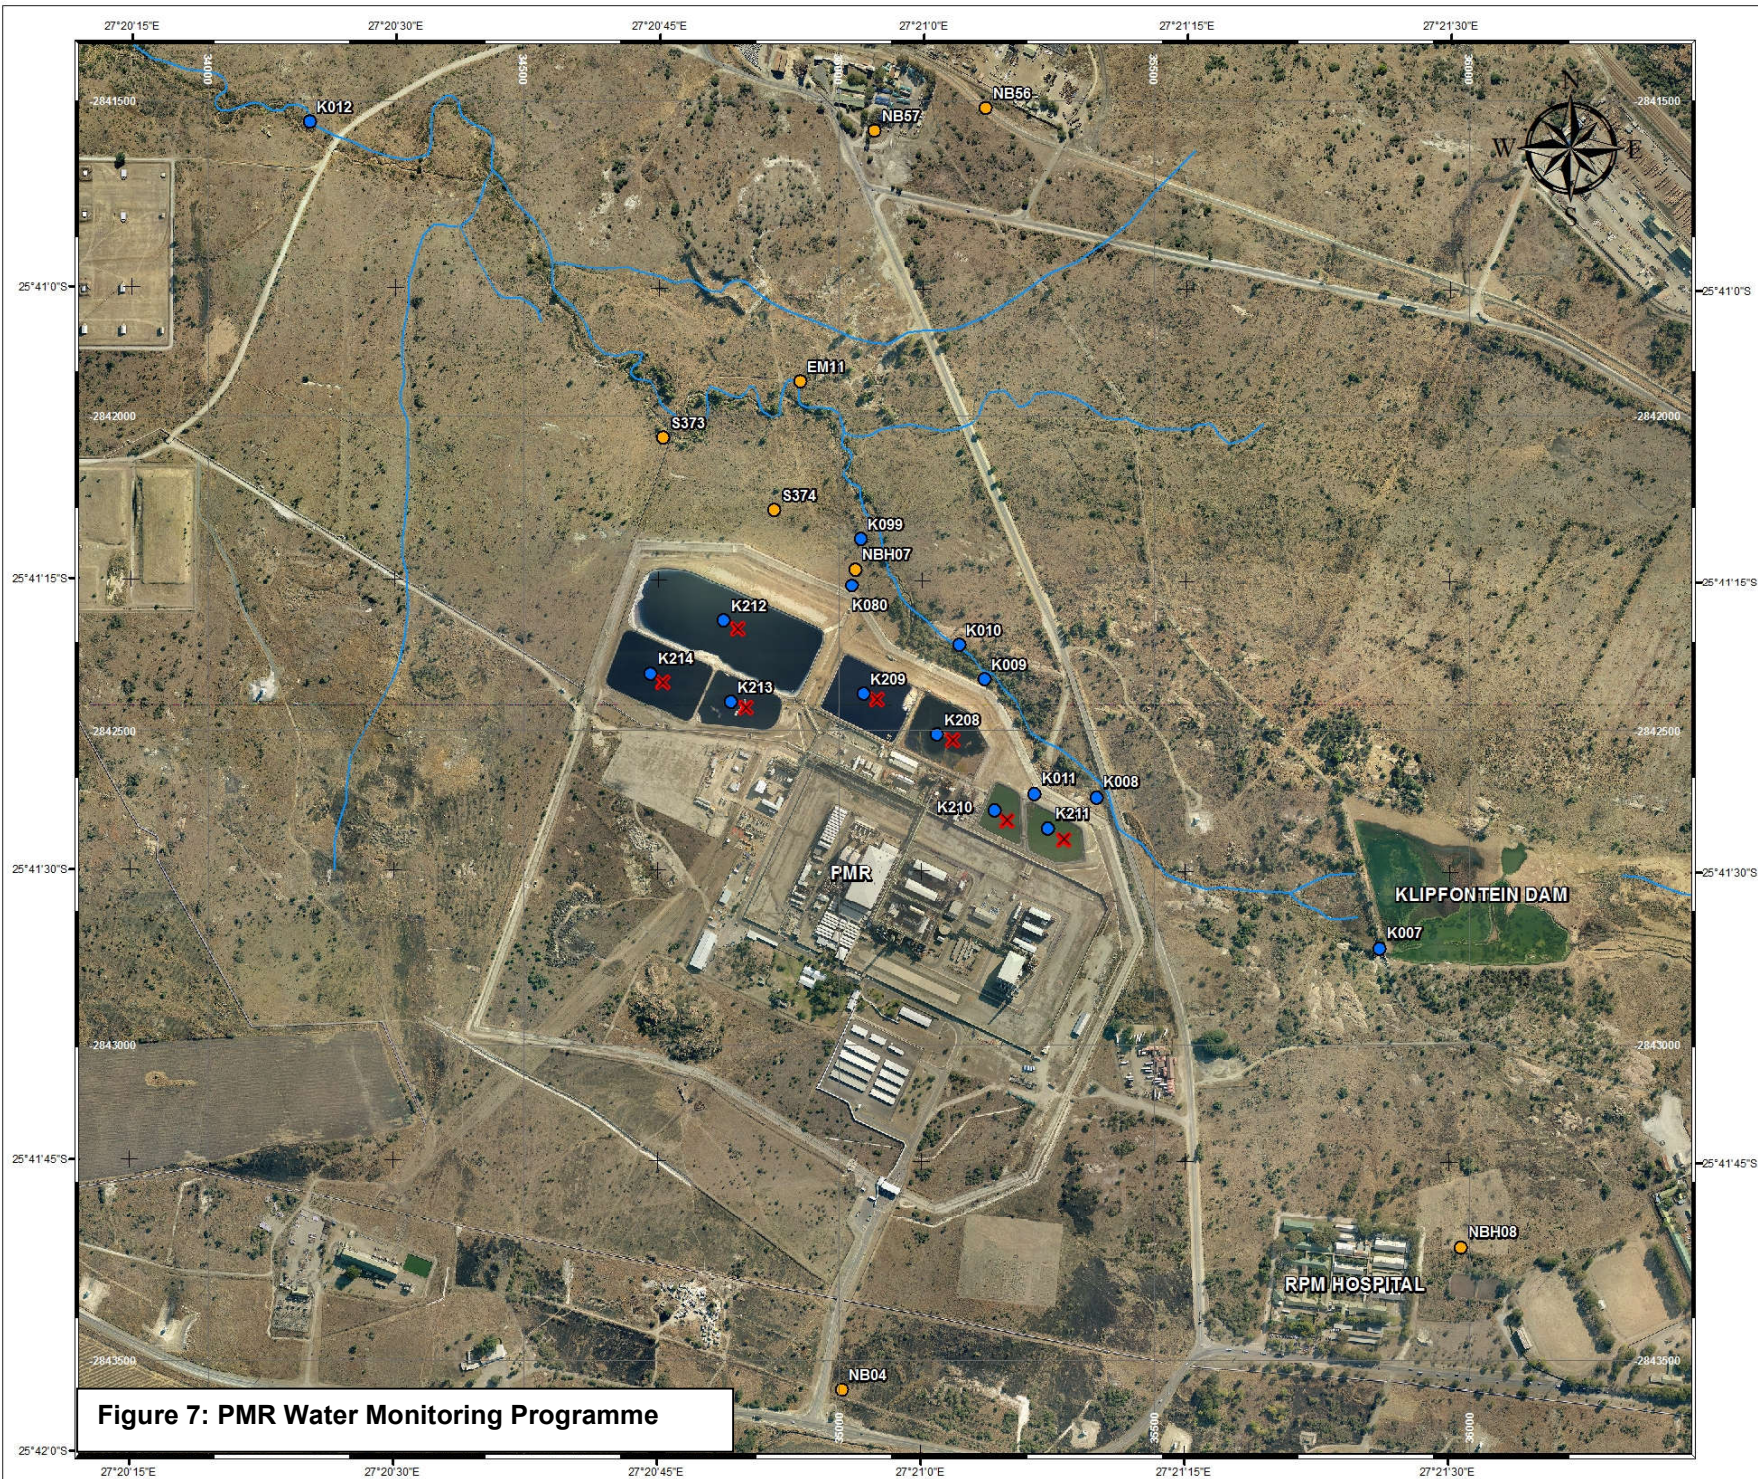


Figure 7: PMR Water Monitoring Programme

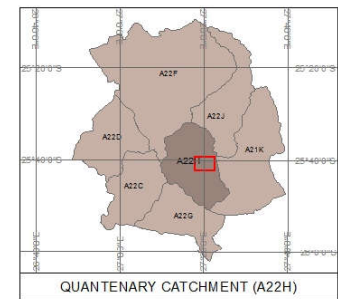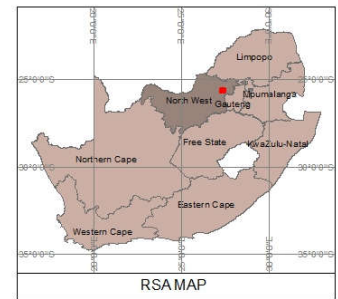

**ANGLO PLATINUM
RUSTENBURG PROCESS DIVISION
SURFACE WATER
MONITORING PROGRAM**

PMR

- Legend**
- Surface Water Monitoring Locality
 - Groundwater Monitoring Locality
 - ✗ Toxicity Monitoring Locality
 - River/Stream

Projection - Transverse Mercator
Spheroid - WGS 1984
Central Meridian - Lo27
Datum - WGS 1984

Table 14: PMR sampling register of the surface water monitoring conducted during the annual period

Anglo Rustenburg Surface water monitoring													
Effluent													
Monitoring Localities		Sep 2018	Oct 2018	Nov 2018	Dec 2018	Jan 2019	Feb 2019	Mar 2019	Apr 2019	May 2019	Jun 2019	Jul 2019	Aug 2019
K009	PMR East rain water dam overflow	Dry	Dry	Dry	Dry	Dry	Dry	Dry	Dry	Dry	Dry	Dry	Dry
K011	Discharge at PMR culvert at PMR bridge	Dry	Dry	Dry	Dry	Dry	Dry	Dry	Dry	Dry	Dry	Dry	Dry
K080	Effluent and stormwater discharge west of PMR	Dry	Dry	Stagnant	Stagnant	Dry	Dry	Dry	Dry	Stagnant	Stagnant	•	Dry
Pollution control dam													
Monitoring Localities		Sep 2018	Oct 2018	Nov 2018	Dec 2018	Jan 2019	Feb 2019	Mar 2019	Apr 2019	May 2019	Jun 2019	Jul 2019	Aug 2019
K208	PMR Dam 1	-	NS	-	-	NS	-	-	NS	-	-	NS	-
K209	PMR Dam 2	-	•	-	-	•	-	-	•	-	-	•	-
K210	PMR Dam 3A	-	NS	-	-	•	-	-	•	-	-	•	-
K211	PMR Dam 3B	-	•	-	-	•	-	-	•	-	-	•	-
K212	PMR Dam 4+5	-	•	-	-	•	-	-	•	-	-	•	-
K213	PMR Dam 6 East	-	•	-	-	•	-	-	•	-	-	•	-
K214	PMR Dam 6 West	-	•	-	-	•	-	-	•	-	-	•	-
River or stream													
Monitoring Localities		Sep 2018	Oct 2018	Nov 2018	Dec 2018	Jan 2019	Feb 2019	Mar 2019	Apr 2019	May 2019	Jun 2019	Jul 2019	Aug 2019
K007	Klipfontein Dam	-	-	-	-	-	-	-	•	Dry	Dry	•	•
K008	Klipfonteinspruit at PMR Bridge	Dry	Dry	Dry	Dry	•	Dry	Dry	Dry	Dry	Dry	Dry	Dry
K010	Klipfonteinspruit, downstream of K009	•	•	•	Stagnant	•	•	Dry	•	•	•	•	•
K012	Klipfonteinspruit between PMR and RBMR on old road to magazine	Dry	Dry	Dry	Dry	•	•	Dry	•	Dry	Dry	Dry	Dry
K099	Klipfonteinspruit downstream of PMR	Dry	Dry	•	Dry	Dry	•	Dry	•	•	Dry	•	Dry

*• – Sampled

NS – Not submitted

- – Not scheduled for sampling (quarterly sampling frequency in the case of pollution control dam localities)

7.1. PRECIOUS METAL REFINERS (PMR)

Presented in Table 14 is the frequency of sampling at each PMR monitoring locality during the annual period. Additionally, the average data tables are illustrated within Table 15 and Table 16, results are discussed separately according to the relevant sections below.

7.1.1. Process water

The PMR Pollution Control Dams (**K209**, **K211**, **K212**, **K213** and **K214**) were sampled on a quarterly basis throughout the annual period; **K210** was not submitted on one occasion. Locality **K208** was however not sampled and is currently under construction. Due to the high security area in PMR, these dams are sampled by PMR staff and samples are submitted to Aquatico for analysis. pH levels fluctuated quarterly, with average TDS concentrations of all the localities being recorded as extremely saline (average TDS concentrations exceeding 60000 to 100000 mg/l). The average hardness concentration of the water also indicated very hard water with high concentrations of salts, nutrients and metals. Chloride and sodium concentrations are dominant in the PMR dams and may be used as indicator variables.

Water quality profiles (STIFF diagrams) for each dam remained stable throughout the annum. The major contributing cation was sodium. Chloride was the major contributing anion for all these localities (STIFF diagram, Figure 8). A hazard is posed towards the integrity of the Klipfonteinspruit in the event of uncontrolled discharges and effluents from the PMR complex. Furthermore, a high risk also remains towards groundwater contamination if seepages or dam-liner failure occurs.

Compared with the General Authorisation limit guidelines, analysed variables from all five dams exceeded in terms of average EC, fluoride, ammonium, iron, manganese and copper concentrations (amongst others). Water quality limits are not stipulated in the WUL for process water storage localities.

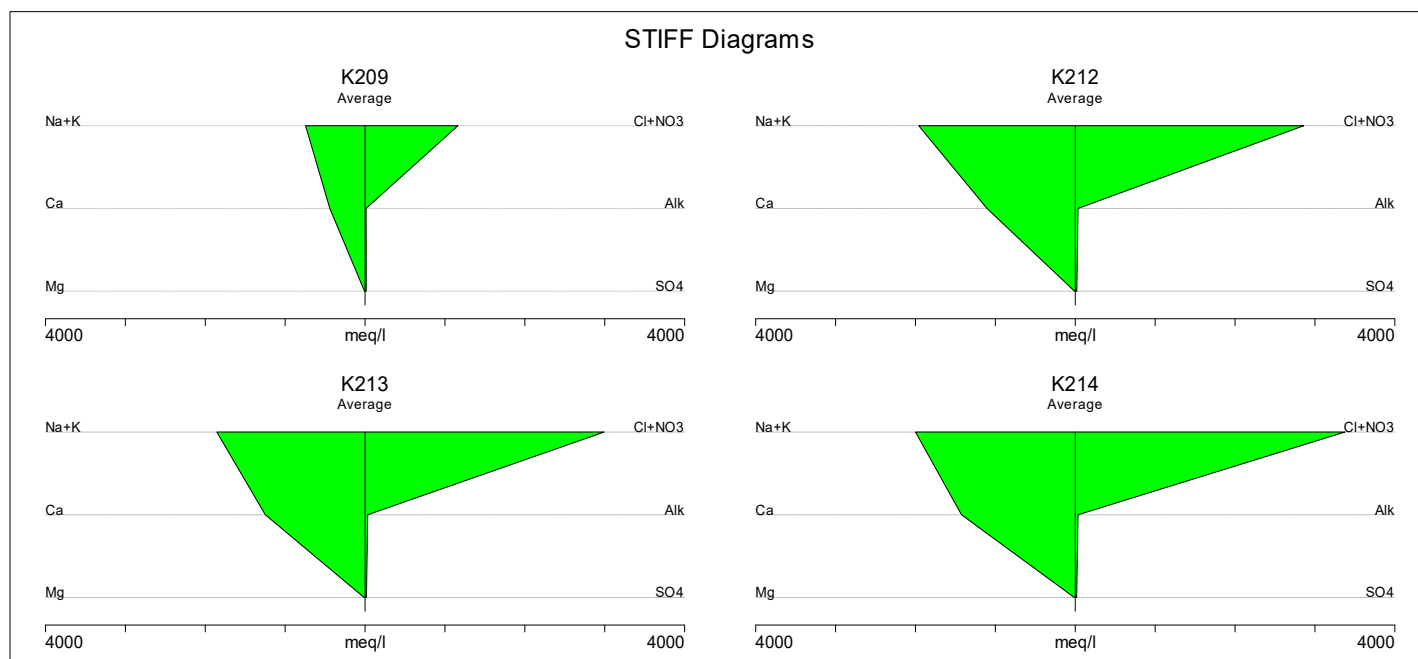


Figure 8: STIFF diagrams representing the water quality profile of the PMR Pollution control dams (K209, K212, K213 and K214)

Average water quality at the PMR stormwater dam localities **K210** and **K211** was alkaline, non-saline (average TDS concentrations of 320 mg/l and 357 mg/l respectively) and moderately soft with low salt concentrations and heavy metals mostly below detection limits. The major contributing cation for K210 and K211 was sodium while the major contributing anion was bicarbonate alkalinity (HCO_3) (STIFF diagram, Figure 9). Discharges from K210 and K211 in high rainfall situations should not cause significant deteriorating impacts on the Klipfonteinspruit.

K210 exceeded the General Authorisation limit guidelines in terms of average pH and copper concentrations while K211 exceeded in terms of average copper concentrations.

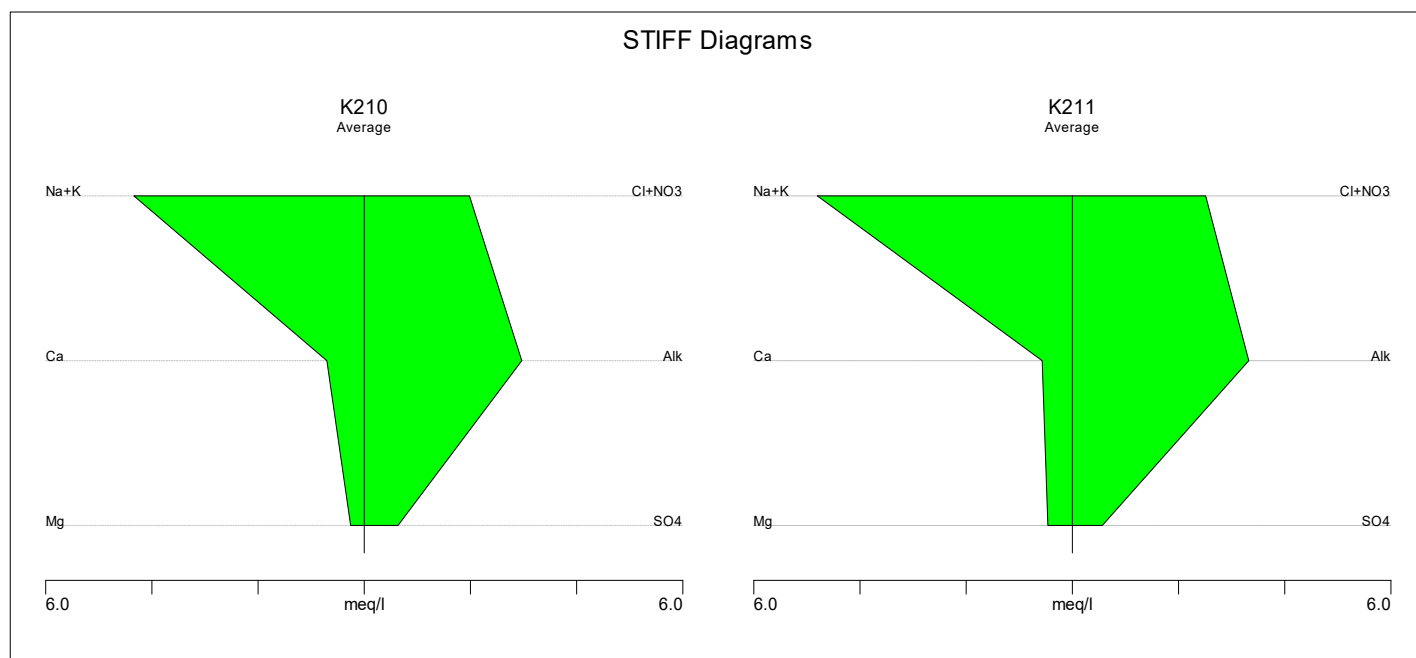


Figure 9: STIFF diagrams representing the water quality profile of the PMR Pollution control dams (K210 and K211)

The time-line graph Figure 10 indicates quarterly variances in terms of TDS (salinity) concentrations. A decrease over the indicated time period was noted at the pollution control dams and stormwater dams in relation to overall salinity concentrations. That being said, the average salinity of the pollution control dams remained high.

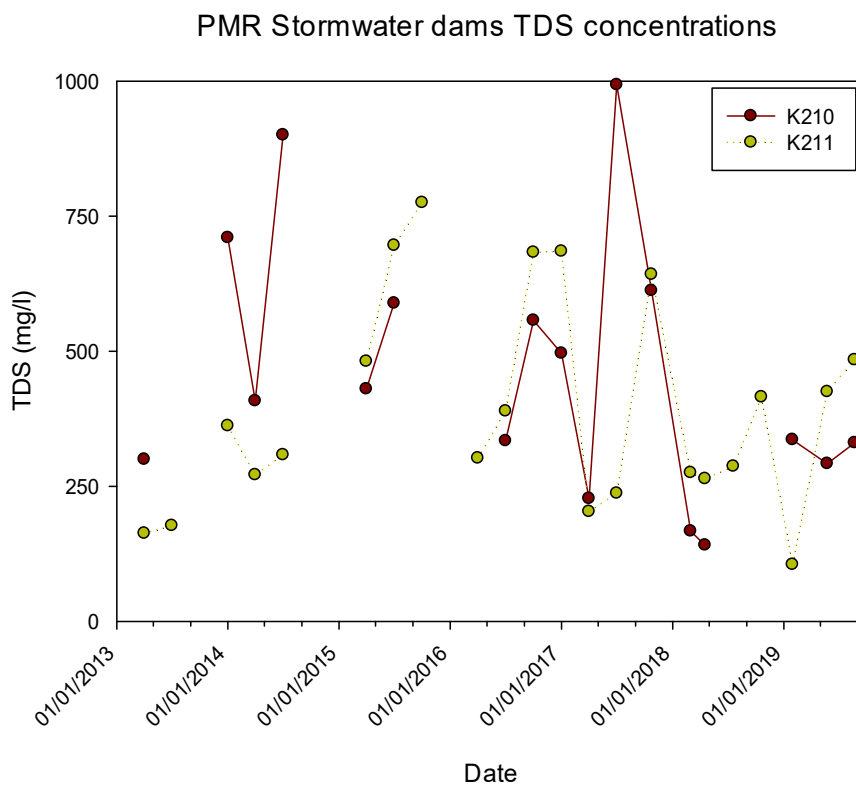
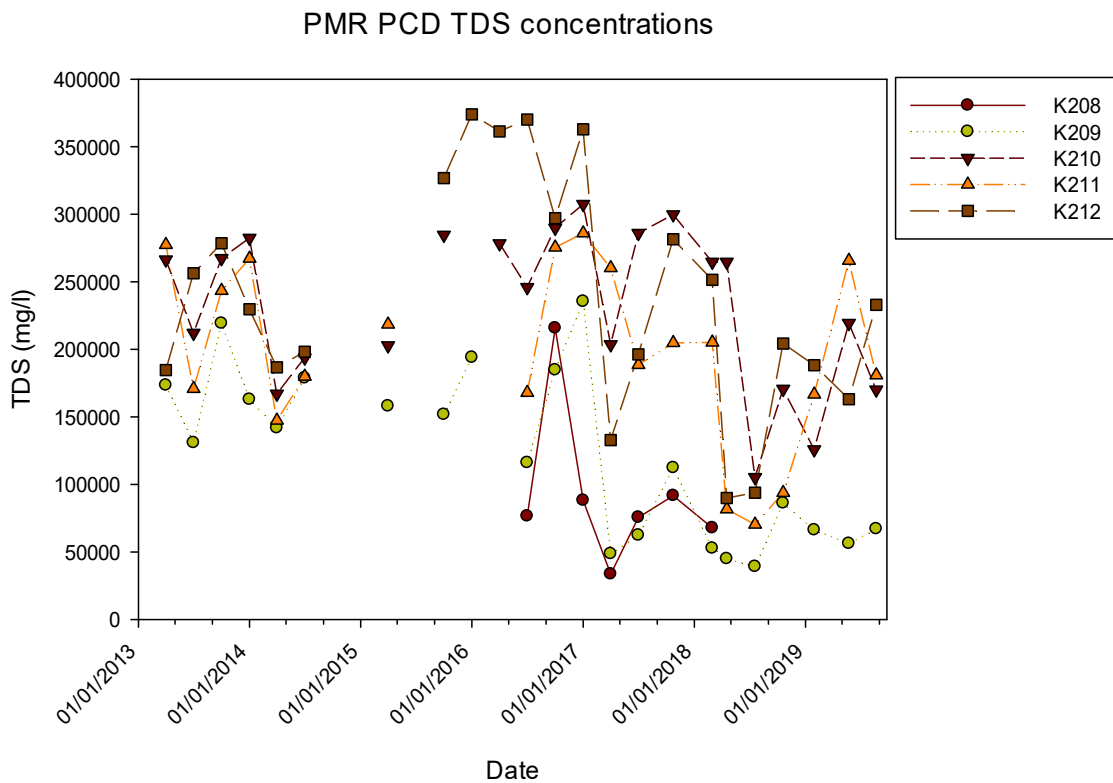


Figure 10: PMR pollution control dams and stormwater dams timeline graph

Table 15: Average PMR process dams data table for the annual monitoring period

AVERAGE DATA TABLE:										
PROJECT NAME		Anglo Rustenburg Surface water monitoring								
ASSESSMENT SET 1		General Authorisation Limit, Section 21f and h, 2013								
ASSESSMENT SET 2		AAP Rustenburg - Surface water WUL								
Value exceeds the assessment set 1										
VARIABLE	UNITS	ASSESSMENT 1	ASSESSMENT 2	MONITORING LOCALITIES						
				K208	K209	K210	K211	K212	K213	K214
pH @ 25°C	pH	5.5/9.5	6.0/9.0	-	3.75	9.86	9.5	6.06	6.07	5.59
Electrical conductivity (EC) @ 25°C	mS/m	150	85	-	10895	49.7	56.6	18888	18363	19470
Total dissolved solids (TDS)	mg/l	-	-	-	68868	320	357	171498	176689	197144
Total hardness	mg CaCO3/l	-	50	-	22449	48	51	55762	63046	71870
Calcium (Ca)	mg/l	-	-	-	8843	14.1	11.4	22142	25019	28542
Magnesium (Mg)	mg/l	-	-	-	89.5	3.13	5.61	115	139	146
Sodium (Na)	mg/l	-	-	-	16924	97.5	108	44375	41966	45211
Potassium (K)	mg/l	-	-	-	343	3.71	3.93	1138	1182	1296
Total alkalinity	mg CaCO3/l	-	-	-	668	148	166	1725	1688	1748
Chloride (Cl)	mg/l	-	-	-	41180	69.1	84.7	101324	106083	119582
Sulphate (SO ₄)	mg/l	-	-	-	708	30.6	27.1	941	857	841
Fluoride (F)	mg/l	1	0.75	-	103	0.697	0.645	96.3	117	130
Nitrate (NO ₃) as N	mg/l	15	-	-	8.98	0.334	1.66	19.2	14.2	18
Ammonium (NH ₄) as N	mg/l	6	1	-	175	4.65	4.64	175	176	189
Orthophosphate (PO ₄) as P	mg/l	10	0.125	-	0.797	0.033	0.003	1	2.63	2.82
Aluminium (Al)	mg/l	-	5	-	9.2	0.032	0.058	1.12	0.951	0.851
Iron (Fe)	mg/l	0.3	0.5	-	192	0.002	0.002	2.62	2.29	1.43
Manganese (Mn)	mg/l	0.1	0.18	-	40.3	0.001	0.001	23.9	25	30.1
Chromium (Cr)	mg/l	-	-	-	0.989	0.002	0.002	0.221	0.201	0.44
Copper (Cu)	mg/l	0.01	0.3	-	44	0.004	0.005	47.5	49.4	50.1
Nickel (Ni)	mg/l	-	-	-	188	0.059	0.121	160	169	183

7.1.2. Discharges, effluents and seepages

The Klipfontein dam (**K007**) was added to the monitoring programme to be used as an additional upstream locality. Three samples were collected between April and August 2019; average water quality depicted neutral, very saline and very hard water quality. Very high concentrations of nitrates were also detected.

K009 (PMR East rain water dam overflow) and **K011** (Discharge at PMR culvert at PMR Bridge) were recorded as dry throughout the annual period.

K080 (Effluent and stormwater discharge west of PMR) was sampled once during the annual period and was recorded as dry or stagnant throughout the rest of the annual period. Water quality was alkaline, very saline and moderately soft and may be indicative of stormwater run-off with moderate to high salinity.

7.1.3. Receiving environment

K012 is used as the downstream locality of PMR in the Klipfonteinspruit with **K008** as the upstream locality. An increase, especially in TDS, chloride and sodium was observed downstream of PMR with a significant reduction in sulphate concentrations.

The Klipfonteinspruit is discussed in greater detail under section 8.1.




Table 16: Average spatial assessment for PMR impacts on the Klipfonteinspruit

VARIABLE	UNIT	AAP Rustenburg - Surface water WUL	Locality		CALCULATED CHANGE
			Upstream	Downstream	
			K008	K012	
pH @ 25°C	pH	6.0/9.0	8.53	8.19	-0.34
Electrical conductivity (EC) @ 25°C	mS/m	85	67.8	162	94.2
Total dissolved solids (TDS)	mg/l	-	525	1007	482
Total hardness	mg CaCO ₃ /l	50	370	432	62
Total alkalinity	mg CaCO ₃ /l	-	369	142	-227
Chloride (Cl)	mg/l	-	25.2	523	498
Sulphate (SO ₄)	mg/l	-	73.3	29.3	-44
Fluoride (F)	mg/l	0.75	0.132	0.132	0
Nitrate (NO ₃) as N	mg/l	-	0.253	0.244	-0.009
Ammonium (NH ₄) as N	mg/l	1	0.089	0.099	0.01
Orthophosphate (PO ₄) as P	mg/l	0.125	0.003	0.007	0.004
Calcium (Ca)	mg/l	-	94.7	113	18.3
Magnesium (Mg)	mg/l	-	32.5	36	3.5
Sodium (Na)	mg/l	-	50	199	149
Potassium (K)	mg/l	-	12.8	6.43	-6.37
Aluminium (Al)	mg/l	5	0.001	0.001	0
Iron (Fe)	mg/l	0.5	0.002	0.002	0
Manganese (Mn)	mg/l	0.18	0.001	0.001	0
Chromium (Cr)	mg/l	-	0.002	0.002	0
Copper (Cu)	mg/l	0.3	0.001	0.017	0.016

Nickel (Ni)	mg/l	-	0.012	0.013	0.001
-------------	------	---	-------	-------	-------

Table 17: Average PMR receiving environment data table for the annual monitoring period

AVERAGE DATA TABLE:									
PROJECT NAME	Anglo Rustenburg Surface water monitoring								
ASSESSMENT SET 1	AAP Rustenburg - Surface water WUL								
ASSESSMENT SET 2	SANS 241-1:2015 Drinking Water Standard (SABS, 2015)								
Value exceeds the assessment set 1									
VARIABLE	UNITS	AAP Rustenburg - Surface water WUL	SANS 241-1:2015 Drinking Water Standard (SABS, 2015)	MONITORING LOCALITIES					
				K007	K008	K010	K012	K099	K080
pH @ 25°C	pH	6.0/9.0	5.0/9.7	8.02	8.53	7.89	8.19	9.31	9.61
Electrical conductivity (EC) @ 25°C	mS/m	85	170	199	67.8	2490	162	1072	286
Total dissolved solids (TDS)	mg/l	-	1200	1380	525	15548	1007	5341	1542
Total hardness	mg CaCO ₃ /l	50	-	830	370	6857	432	426	82
Calcium (Ca)	mg/l	-	-	191	94.7	1752	113	111	26.1
Magnesium (Mg)	mg/l	-	-	85.7	32.5	603	36	36.4	4.1
Sodium (Na)	mg/l	-	200	73.8	50	3380	199	1755	551
Potassium (K)	mg/l	-	-	13.9	12.8	25.7	6.43	179	24.7
Chloride (Cl)	mg/l	-	300	185	25.2	9375	523	2702	544
Sulphate (SO ₄)	mg/l	-	500	363	73.3	338	29.3	71.4	59
Fluoride (F)	mg/l	0.75	1.5	0.207	0.132	0.237	0.132	0.893	0.721
Nitrate (NO ₃) as N	mg/l	-	11	95.7	0.253	0.311	0.244	9.34	7.48
Ammonium (NH ₄) as N	mg/l	1	1.5	2.79	0.089	0.552	0.099	0.301	0.476
Orthophosphate (PO ₄) as P	mg/l	0.125	-	0.069	0.003	0.064	0.007	0.385	0.444
Ortophosphate as PO ₄	mg/l	0.234	-	0.211	0.008	0.196	0.02	1.18	1.36
Aluminium (Al)	mg/l	5	0.3	0.028	0.001	0.338	0.001	0.387	0.139
Iron (Fe)	mg/l	0.5	0.3	0.002	0.002	0.499	0.002	0.079	0.002
Manganese (Mn)	mg/l	0.18	0.1	0.024	0.001	2.86	0.001	0.018	0.001
Chromium (Cr)	mg/l	-	0.05	0.002	0.002	0.012	0.002	0.019	0.011
Copper (Cu)	mg/l	0.3	2	0.005	0.001	0.068	0.017	0.173	0.3
Nickel (Ni)	mg/l	-	0.07	0.011	0.012	0.053	0.013	0.112	0.078
Dissolved oxygen (DO)	mg/l	7.0/8.0	-	-	1.31	3.59	2.4	3.29	2.91
Lead (Pb)	mg/l	-	0.01	0.002	0.002	0.042	0.002	0.01	0.002
Zinc (Zn)	mg/l	-	5	0.155	0.001	1.11	0.001	0.004	0.001
Boron (B)	mg/l	-	2.4	-	0.644	0.098	0.026	0.059	0.035
Phenol	mg/l	-	0.01	-	0.005	0.032	0.008	0.007	0.005
Hexavalent chromium (Cr ⁶⁺)	mg/l	0.0049	-	0.001	0.001	0.001	0.001	0.008	0.004
Arsenic (As)	mg/l	-	0.01	-	0.003	0.003	0.003	0.028	0.03
Cadmium (Cd)	mg/l	-	0.003	0.001	0.001	0.022	0.001	0.001	0.001
Mercury (Hg)	mg/l	-	0.006	-	0.002	0.002	0.002	0.002	0.002
Selenium (Se)	mg/l	-	0.04	-	0.001	0.001	0.001	0.014	0.029
E.coli	CFU/100ml	-	0	450	10	-	-	-	-
Total coliform	CFU/100ml	-	10	695	14	-	-	-	-

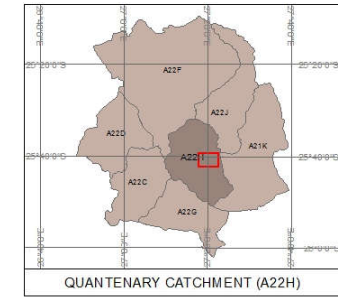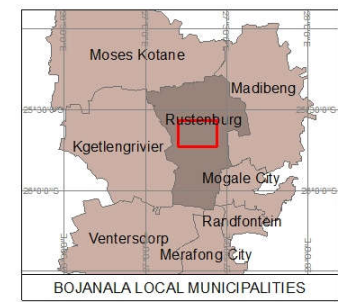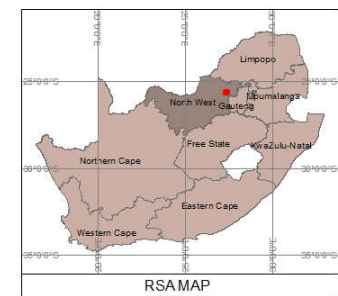

**ANGLO PLATINUM
RUSTENBURG PROCESS DIVISION
SURFACE WATER
MONITORING PROGRAM**
RBMR

- Legend**
- Surface Water Monitoring Locality
 - Gronudwater Monitoring Locality
 - ✗ Toxicity Monitoring Locality
 - River/Stream

0 20 40 60 80 100 meters

Projection - Transverse Mercator
Spheroid - WGS 1984
Central Meridian - Lo27
Datum - WGS 1984

Aquatico Scientific
89 Regency Drive, R21 Corporate Park
Centurion, Pretoria
Tel: (012) – 450 3800

Figure 11: RBMR Water Monitoring Programme

Table 18: RBMR sampling register of the surface water monitoring conducted during the annual period

Anglo Rustenburg Surface water monitoring													
Effluent													
Monitoring Localities		Sep 2018	Oct 2018	Nov 2018	Dec 2018	Jan 2019	Feb 2019	Mar 2019	Apr 2019	May 2019	Jun 2019	Jul 2019	Aug 2019
K013	Culvert ditch going to Klipfonteinspruit halfway between PMR bridge and Waterval bridge parallel to old railway	Dry	Dry	Dry	Dry	Dry	Dry	Dry	•	•	Dry	Dry	Dry
K024	Outflow of RBMR dam 3 rain catchment. RBMR rain water collection dam	Dry	Dry	Dry	Dry	Dry	Dry	Dry	Dry	Dry	Dry	Dry	Dry
K044	Trench to the west of the RBMR dam 3B	Dry	Dry	Dry	Dry	Dry	Dry	Dry	•	Dry	Dry	Dry	Dry
K062	Spillway overflow RBMR stormwater dam 3B	Dry	Dry	Dry	Dry	Dry	Dry	Dry	Dry	Dry	Dry	Dry	Dry
K187	Trench upstream of RBMR at culvert on access road to South gate	Dry	Dry	Dry	Dry	Dry	Dry	Dry	Dry	Dry	Dry	Dry	Dry
K059	Culvert at railway entry to RBMR	-	Dry	-	-	•	-	-	Dry	-	-	Dry	-
Pollution Control Dam													
Monitoring Localities		Sep 2018	Oct 2018	Nov 2018	Dec 2018	Jan 2019	Feb 2019	Mar 2019	Apr 2019	May 2019	Jun 2019	Jul 2019	Aug 2019
K158	RBMR Dam 1	-	NS	-	-	-	NS	-	-	NS	-	-	NS
K159	RBMR Dam 2	-	NS	-	-	-	NS	-	-	NS	-	-	NS
K160	RBMR Dam 3A	-	NS	-	-	-	•	-	-	•	-	-	NS
K161	RBMR Dam 3B	-	•	-	-	-	•	-	-	•	-	-	NS
K162	RBMR Triangular Dam - West section	-	•	-	-	-	•	-	-	•	-	-	•
K162 Duplicate	RBMR Triangular Dam - East section	-	-	-	-	-	-	-	-	-	-	-	•
K163	RBMR SSSS dams	-	Stagnant	-	-	-	NS	-	-	NS	-	-	NS
K220	RBMR Effluent dam 1	-	•	-	-	-	•	-	-	•	-	-	•
K221	RBMR Effluent dam 2	-	•	-	-	-	•	-	-	•	-	-	•
K222	RBMR Effluent dam 3	-	•	-	-	-	•	-	-	•	-	-	•
K223	RBMR E&S feed dam 1	-	•	-	-	-	•	-	-	•	-	-	•
K224	RBMR E&S feed dam 2	-	•	-	-	-	•	-	-	•	-	-	•
River or Stream													
Monitoring Localities		Sep 2018	Oct 2018	Nov 2018	Dec 2018	Jan 2019	Feb 2019	Mar 2019	Apr 2019	May 2019	Jun 2019	Jul 2019	Aug 2019
K012	Klipfonteinspruit between PMR and RBMR on old road to magazine	Dry	Dry	Dry	Dry	•	•	Dry	•	Dry	Dry	Dry	Dry
K014	Intersection of Klipfonteinspruit and rail line bridge (south side)	Dry	Dry	•	Dry	•	•	Dry	•	•	Too low	•	Dry
K015	150 metres up from intersection of Klipfonteinspruit and rail line	Dry	Dry	Dry	Dry	•	•	Dry	•	•	•	•	Dry
K023	Klipfonteinspruit at base of RBMR dump	Dry	Dry	Dry	Dry	•	•	•	•	•	•	•	•
K028	Klipfonteinspruit after confluence of RBMR west ditch system at Waterval smelter bridge	•	•	•	•	•	•	•	•	•	•	•	•

*• – Sampled

NS – Not submitted

- – Not scheduled for sampling (quarterly sampling frequency in the case of pollution control dam localities)

7.2. RUSTENBURG BASE METAL REFINERS (RBMR)

Presented in Table 18 is the frequency of sampling at each RBMR monitoring locality during the annual period. Additionally, the average data tables are illustrated within Table 19 and Table 20 below, results are discussed separately according to the relevant sections below.

7.2.1. Process water

The Process water dams at RBMR are sampled by RBMR staff and samples are then submitted to Aquatico for analysis. Most RBMR pollution control dam samples were submitted throughout the annual period on a quarterly basis; RBMR dams 1 and 2 have been demolished and were thus not sampled for the annual period. RBMR dam 3A was submitted on two occasions while the RBMR SSSS dam was not sampled on any occasion during the annual period. The effluent dams (K220, K221 and K222) and the E&S feed dams (K223 and K224) were submitted throughout the annum.

Water quality profiles (STIFF diagrams) for most of the sampled dams at RBMR are similar with Na+K as the main contributing cation and sulphate as the main contributing anion. The meq/l concentrations were however noted to differ between the dams. On average, acidic water quality was found at K160 and K161, while most other analysed dam samples had alkaline water quality. RBMR dams 3A and 3B (K160 and K161) recorded significantly high metal concentrations (copper, nickel, etc.).

Fluctuating concentrations of TDS and metals were recorded in all samples; Figure 13 displays the TDS trends from 2013. Dam operation water levels should be maintained at these dams to prevent discharge which will cause deteriorating conditions to the receiving natural environment.

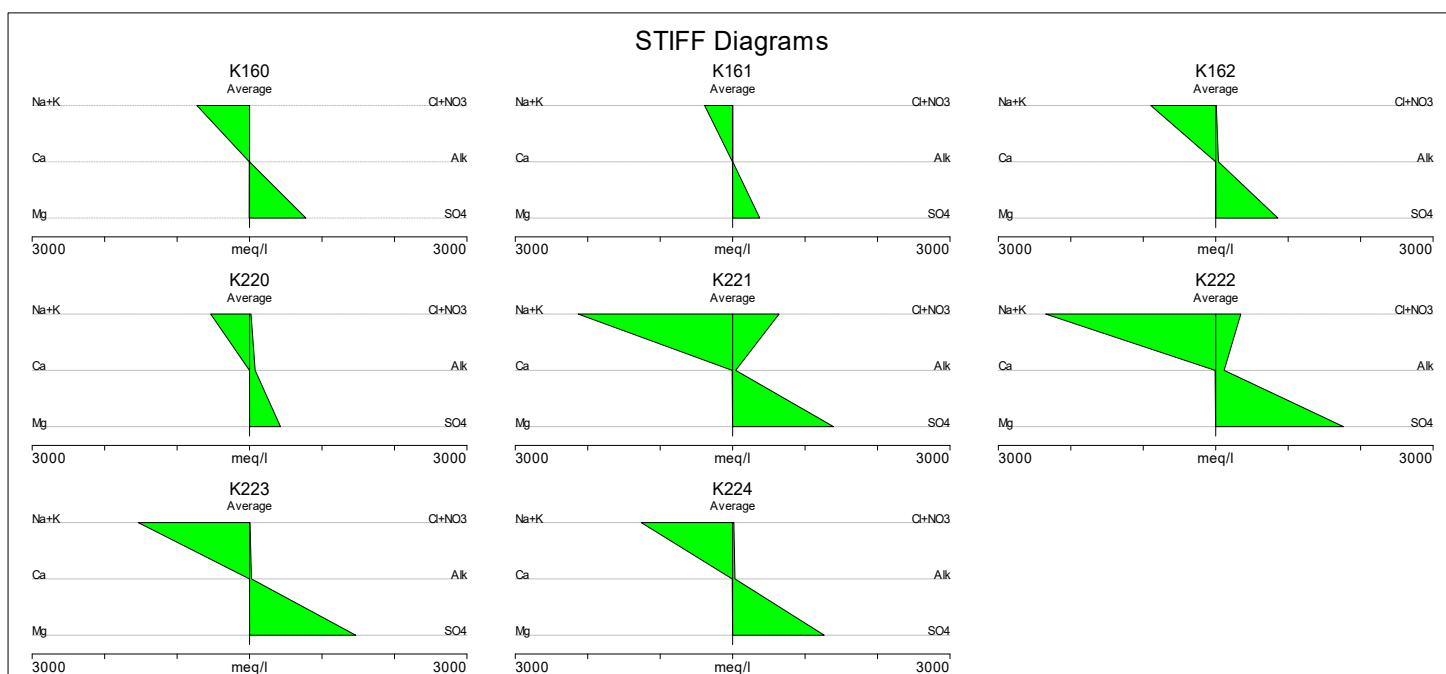


Figure 12: STIFF diagrams showing the water quality profiles of the RBMR pollution control dams

The new WUL (2018) does not include any guidelines for water to be stored in a process water dam. The general authorisation limit guidelines and the WUL limits for surface water are therefore used for comparative purposes; many of the analysed variables exceeded these guidelines due to the extreme salinity of these process water dams and concentrations of fluoride, base metals and heavy metals. A hazard is posed towards the integrity of the Klipfonteinspruit; a high risk also remains towards polluting groundwater if seepages and / or effluents are not controlled.

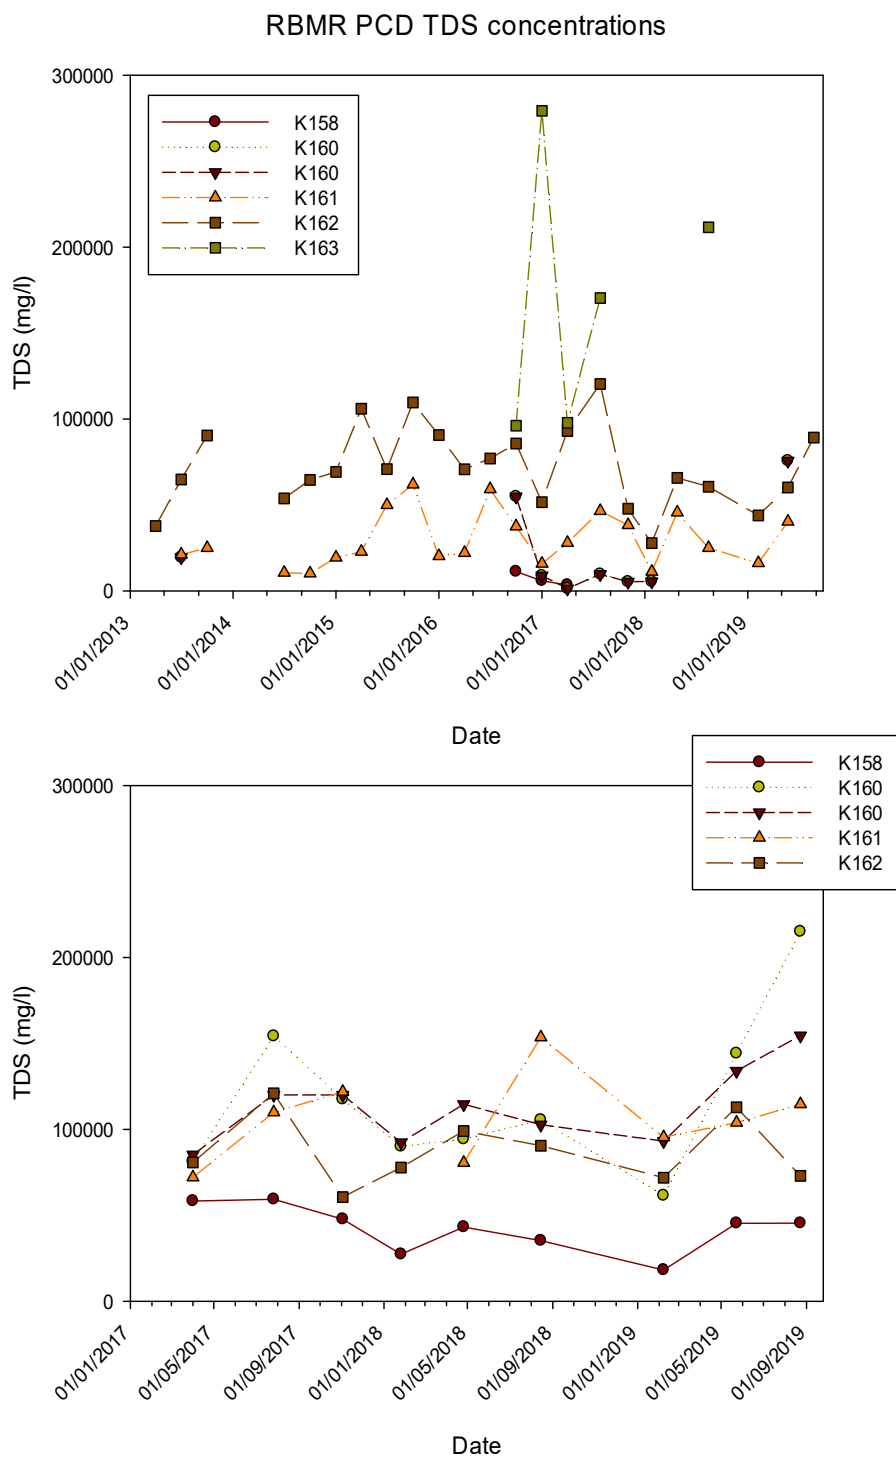


Figure 13: RBMR PCD TDS concentration trend line graph

Table 19: Average RBMR process dams data table for the annual monitoring period

PROJECT NAME		Anglo Rustenburg Surface water monitoring										
ASSESSMENT SET 1		General Authorisation Limit, Section 21f and h, 2013										
ASSESSMENT SET 2		AAP Rustenburg - Surface water WUL										
		Value exceeds the assessment set 1										
VARIABLE	UNITS	ASSESSMENT 1	ASSESSMENT 2	MONITORING LOCALITIES								
				K160	K161	K162	K162 duplicate	K220	K221	K222	K223	K224
pH @ 25°C	pH	5.5/9.5	6.0/9.0	2.91	5.73	10.3	10.2	10.2	9.68	9.72	8.7	9.14
Electrical conductivity (EC) @ 25°C	mS/m	150	85	5280	2759	6503	8550	3428	10098	10163	8695	7143
Total dissolved solids (TDS)	mg/l	-	-	54355	27115	63452	102629	36059	141017	155586	107064	92011
Total hardness	mg CaCO ₃ /l	-	50	548	167	105	111	113	434	555	123	325
Calcium (Ca)	mg/l	-	-	89.5	50.9	39.7	44.6	35.8	135	185	42.3	116
Magnesium (Mg)	mg/l	-	-	78.9	9.59	1.42	0.039	5.88	23.7	22.6	4.26	8.48
Sodium (Na)	mg/l	-	-	16715	8884	20552	35287	12322	47851	53000	35023	28346
Potassium (K)	mg/l	-	-	33.7	34.4	112	114	36.7	1999	1633	502	1125
Total alkalinity	mg CaCO ₃ /l	-	-	0.995	126	1896	1669	3883	2088	5831	1326	1627
Chloride (Cl)	mg/l	-	-	8.27	69	320	88	723	22734	12287	234	600
Sulphate (SO ₄)	mg/l	-	-	37378	17971	41214	66050	20516	66896	84701	70397	60735
Fluoride (F)	mg/l	1	0.75	0.653	3.96	36.2	22.8	35.9	97.7	188	11.2	29
Nitrate (NO ₃) as N	mg/l	15	-	0.68	1.02	2.46	0.665	1.05	0.45	0.553	5.67	2.08
Ammonium (NH ₄) as N	mg/l	6	1	1.1	3.21	0.957	0.718	2.61	0.066	0.027	1.03	0.175
Orthophosphate (PO ₄) as P	mg/l	10	0.125	1.61	0.045	13	8.84	17.2	21.1	15.6	4.69	3.7
Aluminium (Al)	mg/l	-	5	17.2	1.77	0.62	0.061	0.35	0.017	0.018	0.013	0.03
Iron (Fe)	mg/l	0.3	0.5	176	2.86	0.456	2.86	0.194	0.894	0.854	0.52	0.407
Manganese (Mn)	mg/l	0.1	0.18	10.7	1	0.001	0.001	0.001	0.005	0.001	0.001	0.001
Chromium (Cr)	mg/l	-	-	8.36	1.27	0.021	0.002	0.004	0.032	0.095	0.061	0.101
Copper (Cu)	mg/l	0.01	0.3	3139	186	1.07	0.237	0.046	0.257	0.177	0.146	0.155
Nickel (Ni)	mg/l	-	-	12591	2150	6.76	0.492	0.388	0.77	0.87	0.195	0.175

In August 2019, two samples were taken from the RBMR triangular dam (K162 west section and K162 duplicate east section). Slight differences in water quality may be seen between the two samples.

7.2.2. Discharges, effluents and seepages

Dry conditions persisted at **K013** (Culvert ditch going to Klipfonteinspruit halfway between PMR bridge and Waterval bridge parallel to old railway), **K024** (Outflow of RBMR rain water collection dam), **K062** (Spillway overflow RBMR storm water dam 3B) and **K187** (Trench upstream of RBMR at culvert on access road to South gate) throughout the annual period.

K044 (Trench to the west of the RBMR dam 3B) was sampled in April 2019. Water quality was neutral, saline and hard with moderate salts and nutrients. High concentrations of fluoride, copper and nickel were detected which would impact the Klipfonteinspruit.

K059 (Culvert at railway entry to RBMR) was sampled in January 2019, recording water quality that was alkaline, extremely saline and very hard with high concentrations of sodium and sulphate as well as fluoride.

7.2.3. Receiving environment

The upstream locality of RBMR, **K012** (Klipfonteinspruit between PMR and RBMR on old road to magazine) was sampled in January, February and April 2019, recording dry conditions throughout the rest of the annual period. **K028** is used as the downstream locality of RBMR and was sampled throughout the annum. The average water quality revealed significant deteriorating conditions from the upstream to the downstream locality at RBMR. Sulphate, fluoride and nickel concentrations revealed the most significant increases and may be as a direct result of process water from the RBMR dams which are dominated by these constituents.

Figure 14 shows the average water quality profiles of localities upstream (K012), midstream (K014 and K023) and downstream (K028) of RBMR in the Klipfonteinspruit. These water quality profiles may be compared with those in Figure 12 for the RBMR process water dams.

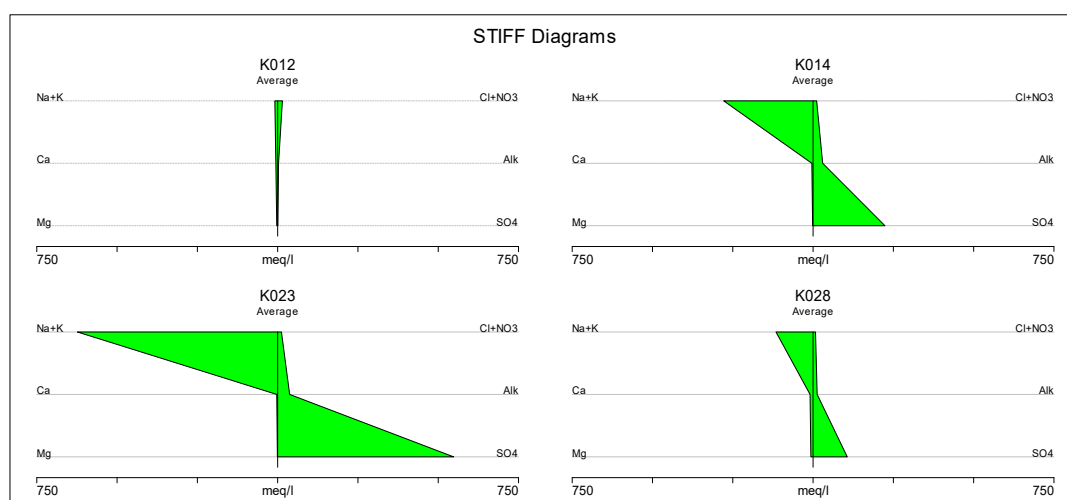


Figure 14: STIFF diagrams showing the water quality profiles of the Klipfonteinspruit, up-, mid- and downstream of RBMR.





The Klipfonteinspruit is discussed in greater detail under section 8.1.

Table 20: Average spatial assessment for the BMR impacts on the Klipfonteinspruit

VARIABLE	UNIT	AAP Rustenburg - Surface water WUL	Locality		CALCULATED CHANGE
			Upstream	Downstream	
			K012	K028	
pH @ 25°C	pH	6.0/9.0	8.19	8.74	0.55
Electrical conductivity (EC) @ 25°C	mS/m	85	162	1318	1156
Total dissolved solids (TDS)	mg/l	-	1007	8749	7742
Total hardness	mg CaCO ₃ /l	50	432	822	390
Total alkalinity	mg CaCO ₃ /l	-	142	637	495
Chloride (Cl)	mg/l	-	523	267	-256
Sulphate (SO ₄)	mg/l	-	29.3	5113	5084
Fluoride (F)	mg/l	0.75	0.132	11.3	11.2
Nitrate (NO ₃) as N	mg/l	-	0.244	0.692	0.448
Ammonium (NH ₄) as N	mg/l	1	0.099	0.235	0.136
Orthophosphate (PO ₄) as P	mg/l	0.125	0.007	1.95	1.94
Calcium (Ca)	mg/l	-	113	189	76
Magnesium (Mg)	mg/l	-	36	84.7	48.7
Sodium (Na)	mg/l	-	199	2631	2432
Potassium (K)	mg/l	-	6.43	41.3	34.9
Aluminium (Al)	mg/l	5	0.001	0.005	0.004
Iron (Fe)	mg/l	0.5	0.002	0.1	0.098
Manganese (Mn)	mg/l	0.18	0.001	0.48	0.479
Chromium (Cr)	mg/l	-	0.002	0.011	0.009
Copper (Cu)	mg/l	0.3	0.017	0.369	0.352
Nickel (Ni)	mg/l	-	0.013	11.4	11.4

Table 21: Average RBMR receiving environment data table for the annual monitoring period

AVERAGE DATA TABLE											
PROJECT NAME		Anglo Rustenburg Surface water monitoring									
ASSESSMENT SET 1		AAP Rustenburg - Surface water WUL									
ASSESSMENT SET 2		SANS 241-1:2015 Drinking Water Standard (SABS, 2015)									
		Value exceeds the assessment set 1									
VARIABLE	UNITS	ASSESSMENT 1	ASSESSMENT 2	MONITORING LOCALITIES							
				K012	K014	K015	K023	K028	K013	K044	K059
pH @ 25°C	pH	6.0/9.0	5.0/9.7	8.19	9.95	10.1	10.1	8.74	10.5	8.14	8.94
Electrical conductivity (EC) @ 25°C	mS/m	85	170	162	3421	4690	4840	1318	5025	225	509
Total dissolved solids (TDS)	mg/l	-	1200	1007	18619	33947	42350	8749	36903	1415	4358
Total hardness	mg CaCO ₃ /l	50	-	432	267	229	187	822	109	281	381
Calcium (Ca)	mg/l	-	-	113	76.8	67.3	56.5	189	34	82.2	114
Magnesium (Mg)	mg/l	-	-	36	18.3	14.8	11.1	84.7	5.76	18.3	23.2
Sodium (Na)	mg/l	-	200	199	6350	11205	14267	2631	12104	372	1177
Potassium (K)	mg/l	-	-	6.43	79.4	123	105	41.3	145	12.9	13.3
Chloride (Cl)	mg/l	-	300	523	393	438	416	267	320	146	38.3
Sulphate (SO ₄)	mg/l	-	500	29.3	10738	20877	26305	5113	22913	620	2807
Fluoride (F)	mg/l	0.75	1.5	0.132	23.1	36.4	31	11.3	25.5	15.3	1.32
Nitrate (NO ₃) as N	mg/l	-	11	0.244	1.63	0.919	1.15	0.692	1.23	1.47	0.437
Ammonium (NH ₄) as N	mg/l	1	1.5	0.099	0.378	0.185	0.099	0.235	0.066	1.74	0.223
Orthophosphate (PO ₄) as P	mg/l	0.125	-	0.007	6.73	11.7	15	1.95	11	0.08	0.589
Orthophosphate as PO ₄	mg/l	0.234	-	0.02	20.6	35.9	46	5.97	33.8	0.245	1.81
Aluminium (Al)	mg/l	5	0.3	0.001	0.445	0.638	0.301	0.005	0.531	0.077	0.001
Iron (Fe)	mg/l	0.5	0.3	0.002	0.171	0.262	0.472	0.1	0.403	0.13	0.002
Manganese (Mn)	mg/l	0.18	0.1	0.001	0.539	0.113	0.061	0.48	0.001	0.183	0.023
Chromium (Cr)	mg/l	-	0.05	0.002	0.037	0.038	0.07	0.011	0.054	0.002	0.033
Copper (Cu)	mg/l	0.3	2	0.017	0.192	0.195	0.2	0.369	0.543	1.85	0.037
Nickel (Ni)	mg/l	-	0.07	0.013	0.082	0.057	0.063	11.4	0.002	32.2	0.074
Dissolved oxygen (DO)	mg/l	7.0/8.0	-	2.4	3.05	1.92	1.95	3.58	3.07	1.79	-
Lead (Pb)	mg/l	-	0.01	0.002	0.019	0.033	0.043	0.018	0.064	0.076	0.002
Zinc (Zn)	mg/l	-	5	0.001	0.028	0.061	0.081	0.108	0.091	0.217	0.031
Boron (B)	mg/l	-	2.4	0.026	23.2	39.8	29.7	10.3	42.7	3.12	4.8
Phenol	mg/l	-	0.01	0.008	0.005	0.005	0.005	0.006	0.005	0.005	-
Hexavalent chromium (Cr ⁶⁺)	mg/l	0.0049	-	0.001	0.011	0.009	0.009	0.001	0.001	0.001	0.001
Arsenic (As)	mg/l	-	0.01	0.003	0.03	0.043	0.042	0.009	0.037	0.003	-
Cadmium (Cd)	mg/l	-	0.003	0.001	0.007	0.007	0.004	0.004	0.001	0.001	0.001
Mercury (Hg)	mg/l	-	0.006	0.002	0.002	0.002	0.002	0.002	0.002	0.002	-
Selenium (Se)	mg/l	-	0.04	0.001	0.021	0.027	0.024	0.013	0.032	0.001	-
E.coli	CFU/100ml	-	0	-	-	-	-	8.96	-	-	-
Total coliform	CFU/100ml	-	10	-	-	-	-	72.38	-	-	-

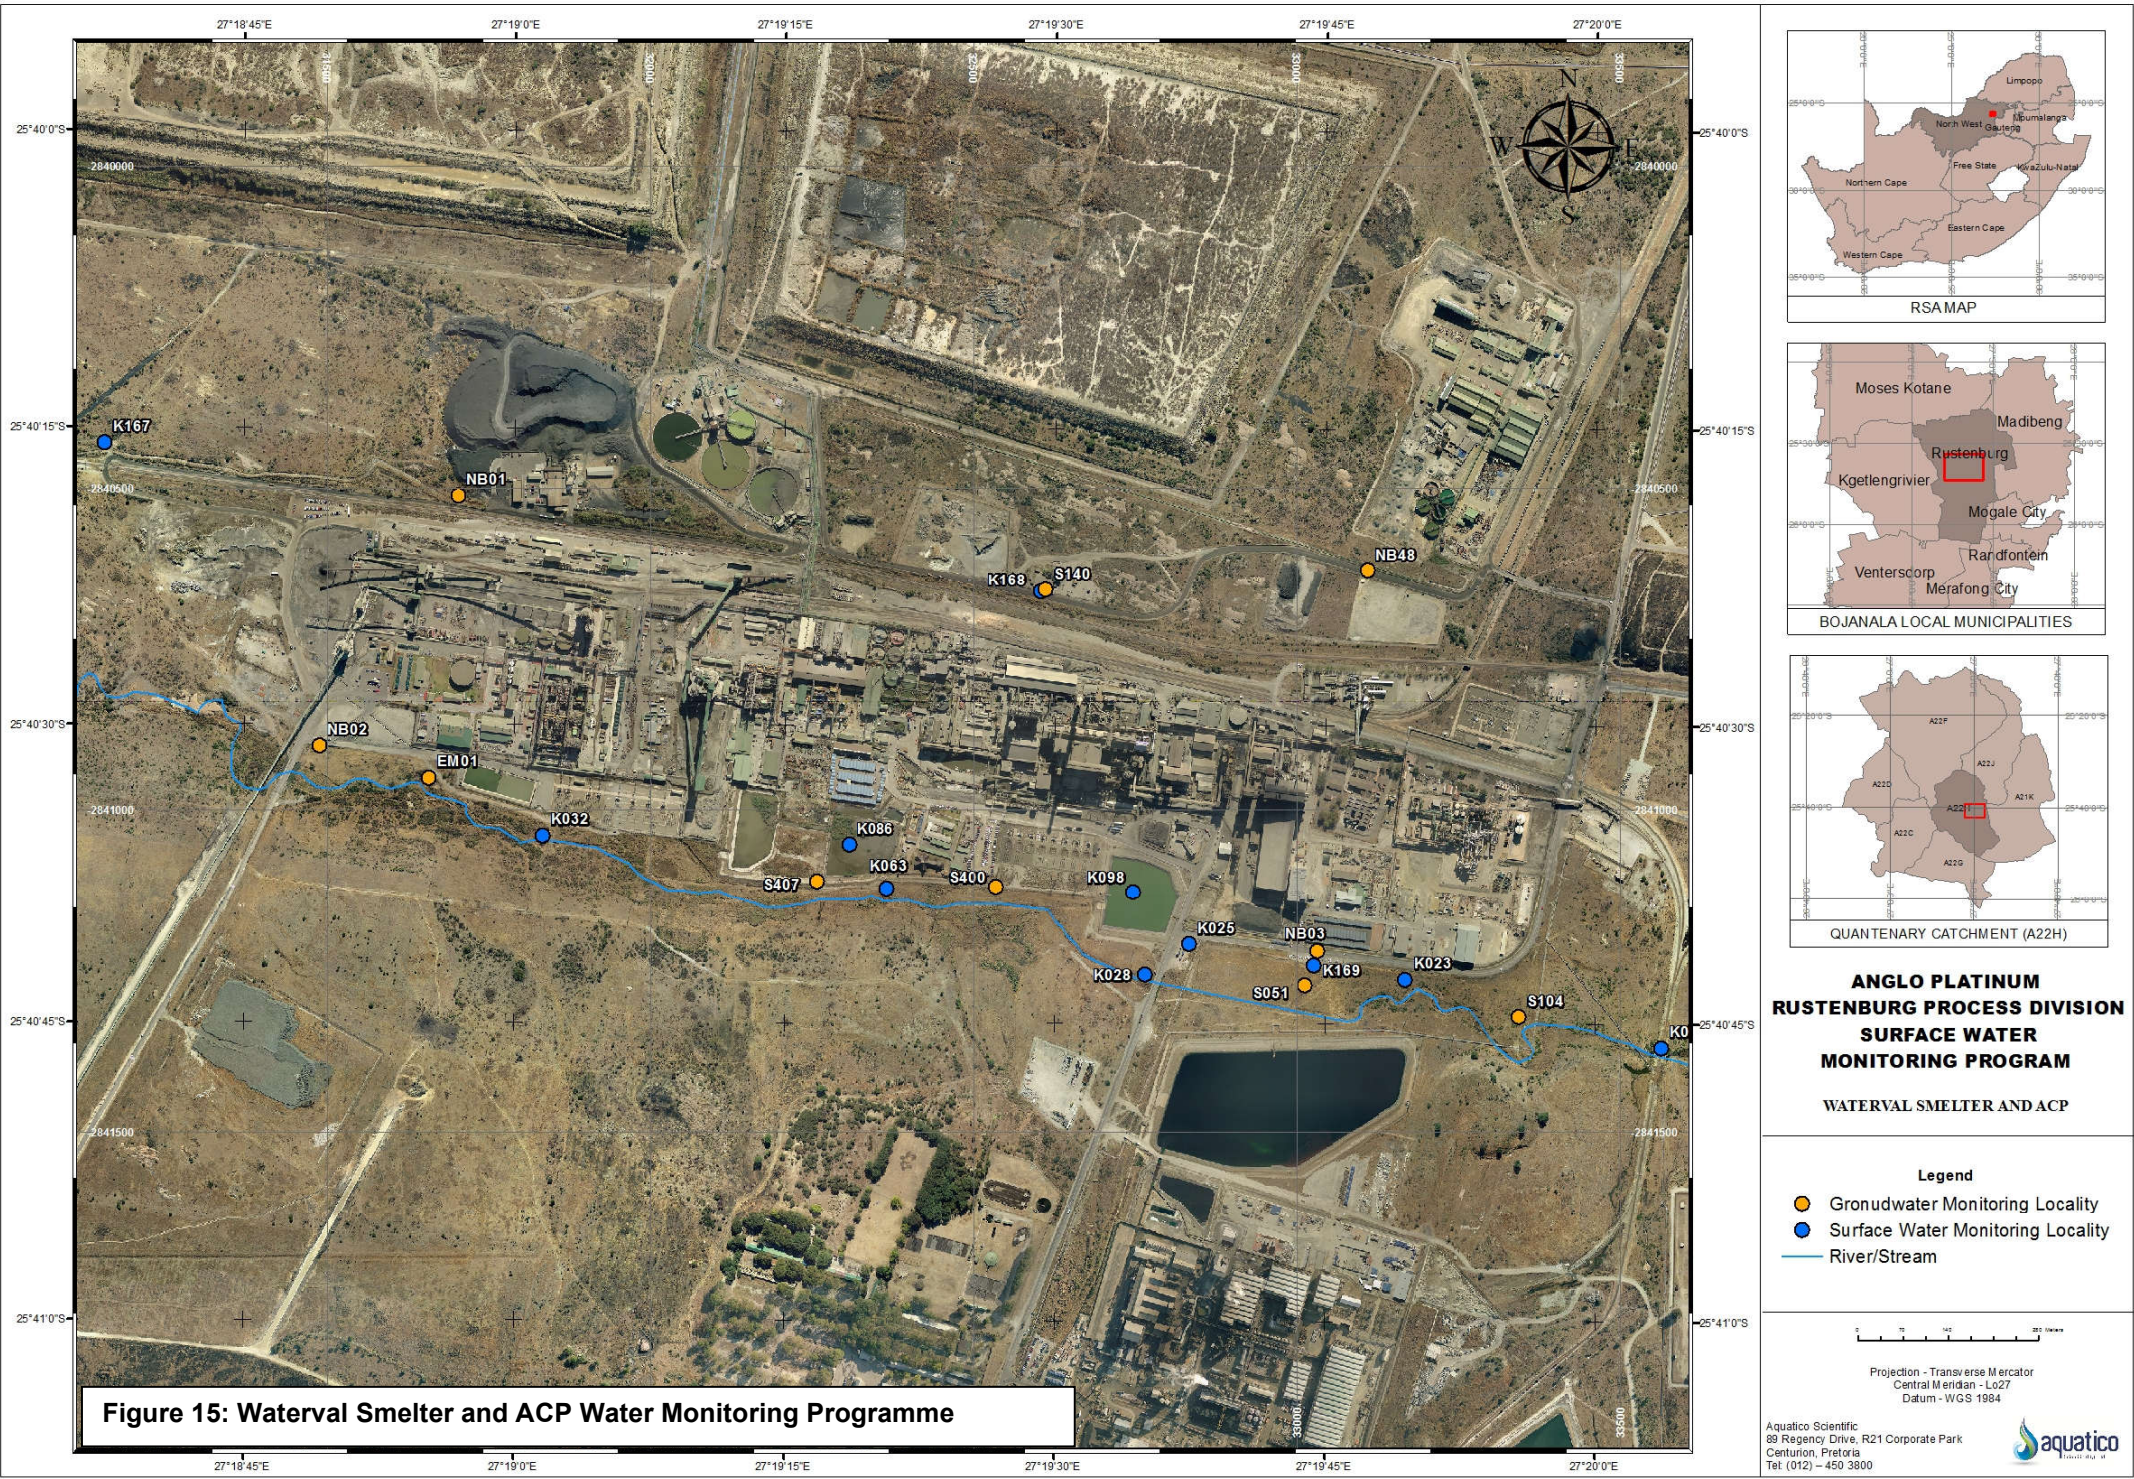

**ANGLO PLATINUM
RUSTENBURG PROCESS DIVISION
SURFACE WATER
MONITORING PROGRAM
WATERVAL SMELTER AND ACP**

- Legend**
- Groundwater Monitoring Locality
 - Surface Water Monitoring Locality
 - River/Stream

0 50 100 150 200 meters

Projection - Transverse Mercator
Central Meridian - L027
Datum - WGS 1984

Figure 15: Waterval Smelter and ACP Water Monitoring Programme

Table 22: Waterval Smelter and ACP sampling register of the surface water monitoring conducted during the annual period

Anglo Rustenburg Surface water monitoring													
Canal or trench													
Monitoring Localities		Sep 2018	Oct 2018	Nov 2018	Dec 2018	Jan 2019	Feb 2019	Mar 2019	Apr 2019	May 2019	Jun 2019	Jul 2019	Aug 2019
K025	Intersection between electric pylons & compressor air pipe between RBMR and lab. Storm water canal from ACP	Dry	Dry	Dry	Dry	•	Dry	Dry	Dry	Dry	Dry	Dry	Dry
K167	Cut-off trench north of Waterval concentrator just before discharge towards Klipfonteinspruit	•	•	•	•	•	•	•	•	•	•	Dry	Dry
K168	Cut off trench north of Waterval Smelter reverts area	Dry	Dry	Dry	Dry	•	•	•	•	•	Dry	Dry	Dry
K169	Trench from PF Retief laboratory towards Klipfonteinspruit	•	•	•	•	•	•	•	•	•	•	Not sampled	•
Pollution control dam													
Monitoring Localities		Sep 2018	Oct 2018	Nov 2018	Dec 2018	Jan 2019	Feb 2019	Mar 2019	Apr 2019	May 2019	Jun 2019	Jul 2019	Aug 2019
K098	ACP Pollution Control Dam	•	•	•	•	•	•	•	•	•	•	•	•
River or stream													
Monitoring Localities		Sep 2018	Oct 2018	Nov 2018	Dec 2018	Jan 2019	Feb 2019	Mar 2019	Apr 2019	May 2019	Jun 2019	Jul 2019	Aug 2019
K014	Intersection of Klipfonteinspruit and rail line bridge (south side)	Dry	Dry	•	Dry	•	•	Dry	•	•	Too low	•	Dry
K023	Klipfonteinspruit at base of RBMR dump	Dry	Dry	Dry	Dry	•	•	•	•	•	•	•	•
K028	Klipfonteinspruit after confluence of RBMR west ditch system at Waterval smelter bridge	•	•	•	•	•	•	•	•	•	•	•	•
K063	Klipfonteinspruit at stormwater discharge from Waterval smelter and concentrator	•	•	•	•	•	•	•	•	•	•	•	•

*• – Sampled

7.3. WATERVAL SMELTER AND ACP

Presented in Table 22 is the frequency of sampling at each Waterval Smelter and ACP monitoring locality during the annual period. Additionally, the average data tables are illustrated in Table 23 and Table 25, which are discussed separately according to the relevant sections below.

7.3.1. Process water

The ACP Pollution Control Dam (**K098**) was sampled throughout the annual period. Values of pH alternated between acidic to alkaline throughout the annum. The physical and chemical water quality fluctuated significantly throughout the annual period. Water quality was recorded as saline to extremely saline and very hard with moderate to high concentrations of inorganic salts and nutrients on average. Concentrations of fluoride and heavy metals (aluminium, iron, manganese, copper and nickel) were recorded when the pH was acidic. Increasing acidity (lowering of pH value) results in the mobilisation of suspended metals into solution, often resulting in an increase in recorded metal concentrations (if present in suspension). A graph showing increased EC and Ni concentrations when the pH decreases is shown in Figure 17. WUL, Domestic, irrigation and livestock watering guidelines are exceeded and freeboard should be managed to prevent overflows.

The new WUL (2018) does not include any guidelines for water to be stored in a process water dam or wastewater to be disposed of into a waste water facility. The general authorisation limit guidelines and the WUL limits for surface water are therefore used for comparative purposes in Table 23. The Stiff diagrams below also show how the physical and chemical water quality is altered over the annual period.

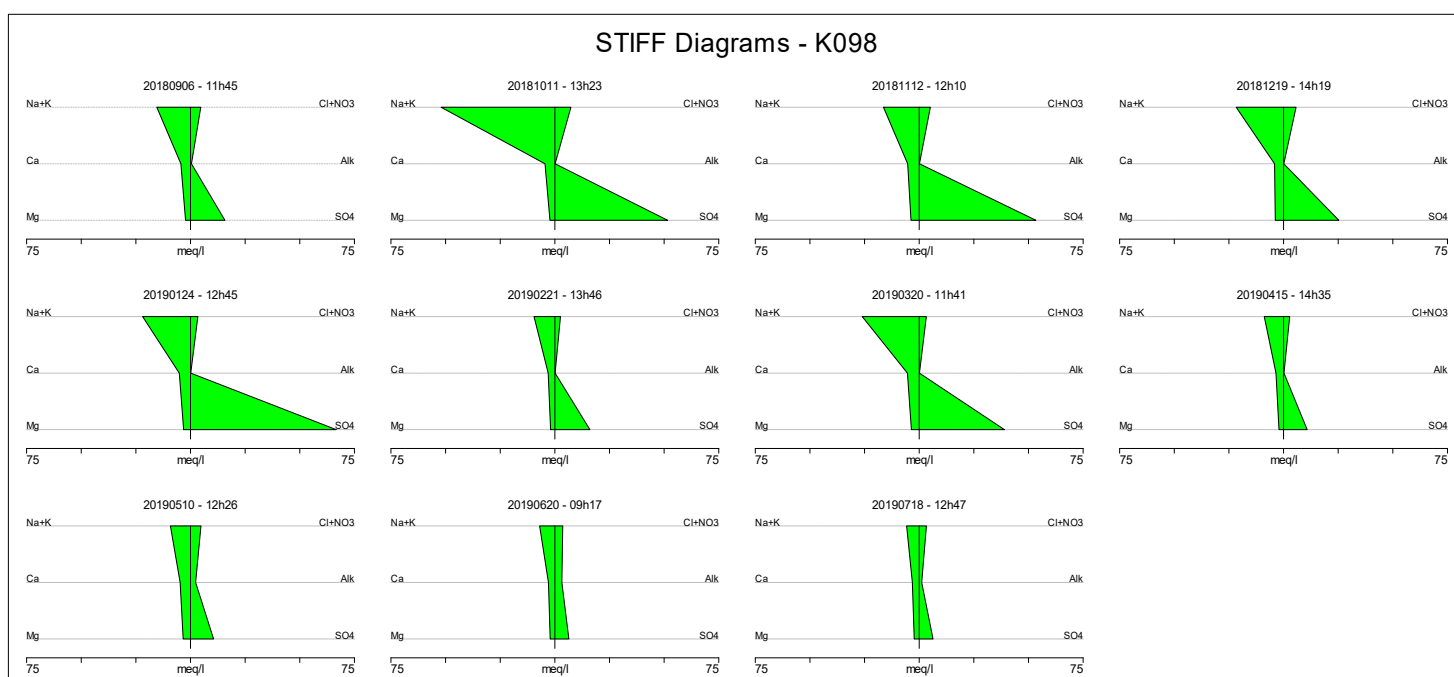


Figure 16: Time-series STIFF diagrams of the ACP Pollution Control Dam.

Table 23: Average Waterval Smelter and ACP process dam data table for the annual monitoring period

AVERAGE DATA TABLE:				
PROJECT NAME		Anglo Rustenburg Surface water monitoring		
ASSESSMENT SET 1		General Authorisation Limit, Section 21f and h, 2013		
ASSESSMENT SET 2		AAP Rustenburg - Surface water WUL		
Value exceeds the assessment set 1				
VARIABLE	UNITS	ASSESSMENT 1	ASSESSMENT 2	MONITORING LOCALITIES
				K098
pH @ 25°C	pH	5.5/9.5	6.0/9.0	4.62
Electrical conductivity (EC) @ 25°C	mS/m	150	85	432
Total dissolved solids (TDS)	mg/l	-	-	2068
Total hardness	mg CaCO3/l	-	50	350
Calcium (Ca)	mg/l	-	-	84.3
Magnesium (Mg)	mg/l	-	-	33.9
Sodium (Na)	mg/l	-	-	391
Potassium (K)	mg/l	-	-	24
Chloride (Cl)	mg/l	-	-	134
Sulphate (SO ₄)	mg/l	-	-	1318
Fluoride (F)	mg/l	1	0.75	1.27
Nitrate (NO ₃) as N	mg/l	15	-	6.51
Ammonium (NH ₄) as N	mg/l	6	1	1.09
Orthophosphate (PO ₄) as P	mg/l	10	0.125	0.758
Aluminium (Al)	mg/l	-	5	5.59
Iron (Fe)	mg/l	0.3	0.5	47.2
Manganese (Mn)	mg/l	0.1	0.18	0.407
Chromium (Cr)	mg/l	-	-	0.166
Copper (Cu)	mg/l	0.01	0.3	4.6
Nickel (Ni)	mg/l	-	-	10.1

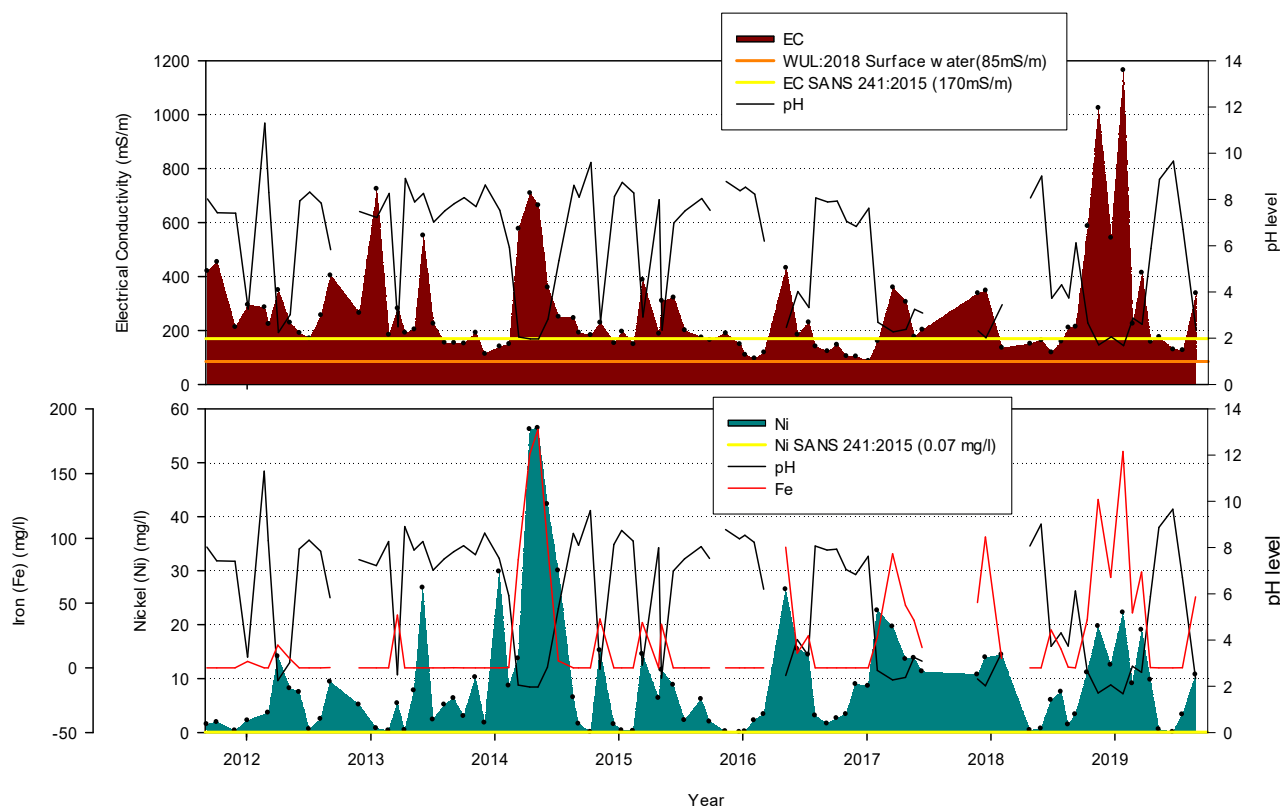


Figure 17: ACP pollution control dam (K098) time-series data for pH, EC, iron and nickel

7.3.2. Discharges, effluents and seepages

K025 (Stormwater from ACP into Klipfonteinspruit between K014 and K028) was sampled once throughout the annual period and recorded neutral, very saline and very hard water quality. High concentrations of fluoride and nickel was detected in the water sample.

K168 (Cut off trench north of Waterval Smelter into Klipfonteinspruit) will flow towards the Klipfonteinspruit during high flow events. This locality was sampled on five occasions during the annual period. The average water quality was recorded as neutral, extremely saline and very hard with high concentrations of inorganic salts. High average concentrations of fluoride, manganese, nickel, nitrate and ammonium were detected. This source is seen to be an important contributor to the water quality of the Klipfonteinspruit.

K167 (Cut off trench north of Waterval Smelter into Klipfonteinspruit) was sampled mostly throughout the annual period. Average water quality was similar to K168 with high salinity and hardness and concentrations of fluoride, manganese and nickel. Water discharged from this locality into the Klipfonteinspruit will contribute to negative effects on the water quality of the Klipfonteinspruit.

In the PF Retief culvert (**K169**) the average water quality may be described as neutral, very saline and very hard. Moderate inorganic salt concentrations and sporadic high nutrient and low heavy metal concentrations were detected.

7.3.3. Receiving environment





K023 and **K063** are used as the up- and downstream localities for the Waterval complex on the Klipfonteinspruit. The only significant increases in analysed variables detected were nitrate and nickel. The majority of the analysed variables revealed a noteworthy decrease in concentration which may be explained by the reed bed that the Klipfonteinspruit flows through next to the Waterval complex. The naturally growing reed bed creates an ecological water-filtration system that takes up inorganic salts, nutrients and metals from the water. The presence of the reed bed helps improve water quality in the Klipfonteinspruit. The Klipfonteinspruit as a whole is discussed in greater detail under section 8.1.

Table 24: Average smelter and ACP impacts on the Klipfonteinspruit

VARIABLE	UNIT	AAP Rustenburg - Surface water WUL	Locality		CALCULATED CHANGE
			Upstream	Downstream	
			K023	K063	
pH @ 25°C	pH	6.0/9.0	10.1	7.89	-2.21
Electrical conductivity (EC) @ 25°C	mS/m	85	4840	200	-4640
Total dissolved solids (TDS)	mg/l	-	42350	1382	-40968
Total hardness	mg CaCO ₃ /l	50	187	291	104
Total alkalinity	mg CaCO ₃ /l	-	1867	152	-1715
Chloride (Cl)	mg/l	-	416	138	-278
Sulphate (SO ₄)	mg/l	-	26305	636	-25669
Fluoride (F)	mg/l	0.75	31	0.997	-30
Nitrate (NO ₃) as N	mg/l	-	1.15	12.5	11.4
Ammonium (NH ₄) as N	mg/l	1	0.099	0.162	0.063
Orthophosphate (PO ₄) as P	mg/l	0.125	15	2.65	-12.4
Calcium (Ca)	mg/l	-	56.5	81.3	24.8
Magnesium (Mg)	mg/l	-	11.1	21.3	10.2
Sodium (Na)	mg/l	-	14267	325	-13942
Potassium (K)	mg/l	-	105	15.5	-89.5
Aluminium (Al)	mg/l	5	0.301	0.017	-0.284
Iron (Fe)	mg/l	0.5	0.472	0.002	-0.47
Manganese (Mn)	mg/l	0.18	0.061	0.095	0.034
Chromium (Cr)	mg/l	-	0.07	0.002	-0.068
Copper (Cu)	mg/l	0.3	0.2	0.114	-0.086
Nickel (Ni)	mg/l	-	0.063	1.24	1.18

Table 25: Average Waterval Smelter and ACP receiving environment data table for the annual monitoring period

AVERAGE DATA TABLE											
PROJECT NAME		Anglo Rustenburg Surface water monitoring									
ASSESSMENT SET 1		AAP Rustenburg - Surface water WUL									
ASSESSMENT SET 2		SANS 241-1:2015 Drinking Water Standard (SABS, 2015)									
		Value exceeds the assessment set 1									
VARIABLE	UNITS	ASSESSMENT 1	ASSESSMENT 2	MONITORING LOCALITIES							
				K025	K167	K168	K169	K014	K023	K028	K063
pH @ 25°C	pH	6.0/9.0	5.0/9.7	8.44	7.6	7.71	8.03	9.95	10.1	8.74	7.89
Electrical conductivity (EC) @ 25°C	mS/m	85	170	234	542	415	155	3421	4840	1318	200
Total dissolved solids (TDS)	mg/l	-	1200	1996	4222	3431	1203	18619	42350	8749	1382
Total hardness	mg CaCO3/l	50	-	1256	1572	1481	771	267	187	822	291
Calcium (Ca)	mg/l	-	-	305	478	390	166	76.8	56.5	189	81.3
Magnesium (Mg)	mg/l	-	-	120	91.7	123	86.8	18.3	11.1	84.7	21.3
Sodium (Na)	mg/l	-	200	139	733	493	105	6350	14267	2631	325
Potassium (K)	mg/l	-	-	17	54.7	44.1	7.12	79.4	105	41.3	15.5
Chloride (Cl)	mg/l	-	300	239	820	607	156	393	416	267	138
Sulphate (SO ₄)	mg/l	-	500	1000	1969	1631	506	10738	26305	5113	636
Fluoride (F)	mg/l	0.75	1.5	21.6	1.07	3.72	0.415	23.1	31	11.3	0.997
Nitrate (NO ₃) as N	mg/l	-	11	2.8	4.57	11.1	1.55	1.63	1.15	0.692	12.5
Ammonium (NH ₄) as N	mg/l	1	1.5	0.054	0.402	6.68	4.85	0.378	0.099	0.235	0.162
Orthophosphate (PO ₄) as P	mg/l	0.125	-	0.088	0.014	0.003	0.801	6.73	15	1.95	2.65
Orthophosphate as PO ₄	mg/l	0.234	-	0.27	0.043	0.008	2.46	20.6	46	5.97	8.13
Aluminium (Al)	mg/l	5	0.3	0.001	0.003	0.005	0.002	0.445	0.301	0.005	0.017
Iron (Fe)	mg/l	0.5	0.3	0.002	0.069	0.002	0.002	0.171	0.472	0.1	0.002
Manganese (Mn)	mg/l	0.18	0.1	0.418	0.208	1.12	0.097	0.539	0.061	0.48	0.095
Chromium (Cr)	mg/l	-	0.05	0.013	0.002	0.004	0.002	0.037	0.07	0.011	0.002
Copper (Cu)	mg/l	0.3	2	0.761	0.029	0.199	0.007	0.192	0.2	0.369	0.114
Nickel (Ni)	mg/l	-	0.07	40.1	1.27	19.8	0.487	0.082	0.063	11.4	1.24
Dissolved oxygen (DO)	mg/l	7.0/8.0	-	3.22	3.28	2.54	1.38	3.05	1.95	3.58	3.33
Lead (Pb)	mg/l	-	0.01	0.002	0.002	0.002	0.004	0.019	0.043	0.018	0.003
Zinc (Zn)	mg/l	-	5	0.27	0.045	0.11	0.089	0.028	0.081	0.108	0.01
Boron (B)	mg/l	-	2.4	0.16	0.852	0.619	0.18	23.2	29.7	10.3	0.868
Phenol	mg/l	-	0.01	0.005	0.005	0.005	0.005	0.005	0.005	0.006	0.005
Hexavalent chromium (Cr ⁶⁺)	mg/l	0.0049	-	0.001	0.001	0.001	0.001	0.011	0.009	0.001	0.001
Arsenic (As)	mg/l	-	0.01	0.003	0.003	0.003	0.003	0.03	0.042	0.009	0.003
Cadmium (Cd)	mg/l	-	0.003	0.001	0.003	0.002	0.001	0.007	0.004	0.004	0.001
Mercury (Hg)	mg/l	-	0.006	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002
Selenium (Se)	mg/l	-	0.04	0.001	0.001	0.001	0.001	0.021	0.024	0.013	0.001
Oil and grease (SOG)	mg/l	-	-	-	405	0.899	2.81	-	-	-	-
E.coli	CFU/100ml	-	0	-	-	-	-	-	-	8.96	659.67
Total coliform	CFU/100ml	-	10	-	-	-	-	-	-	72.38	2771.67

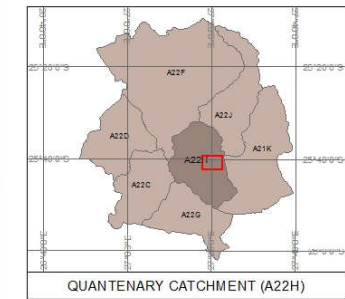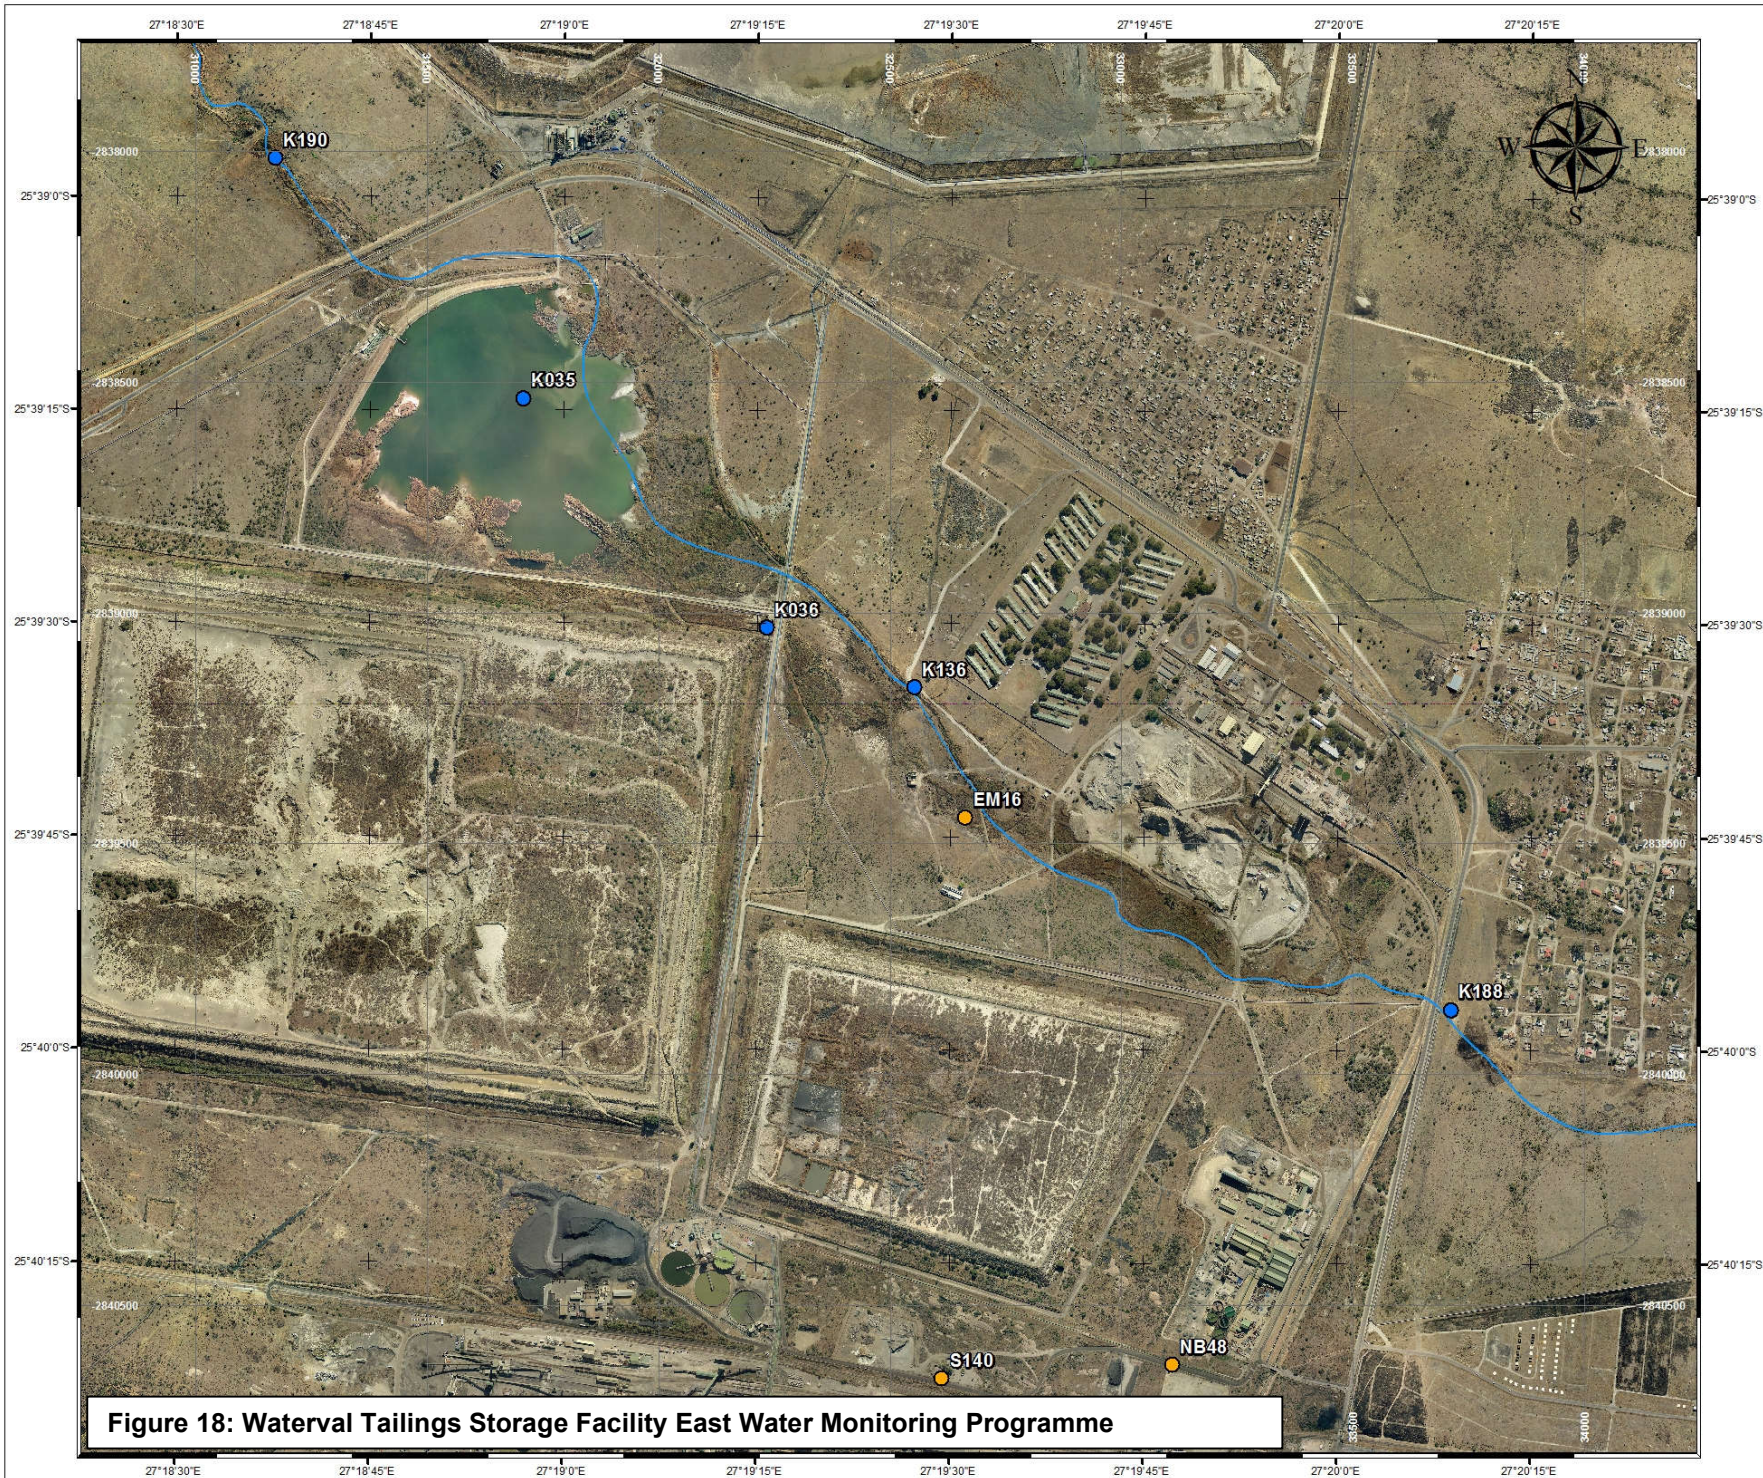

**ANGLO PLATINUM
RUSTENBURG PROCESS DIVISION
SURFACE WATER
MONITORING PROGRAM**

WATERVAL TSF EAST

- Legend**
- Surface Water Monitoring Locality
 - Groundwater Monitoring locality
 - River/Stream

0 50 100 200 meters

Projection - Transverse Mercator
Central Meridian - Lo27
Datum - WGS 1984

Table 26: WVE TSF sampling register of the surface water monitoring conducted during the annual period

Anglo Rustenburg Surface water monitoring													
Effluent													
Monitoring Localities		Sep 2018	Oct 2018	Nov 2018	Dec 2018	Jan 2019	Feb 2019	Mar 2019	Apr 2019	May 2019	Jun 2019	Jul 2019	Aug 2019
K036	Inflow into Klipgat return water dam from Waterval tailings dam 7-stream and Khomanani I Shaft sump canal	•	•	•	•	•	•	•	•	•	•	•	•
K034	Spillway overflow of Klipgat Return Water Dam	Dry	Dry	Dry	Dry	Dry	Dry	Dry	•	Dry	Dry	•	Dry
River or stream													
Monitoring Localities		Sep 2018	Oct 2018	Nov 2018	Dec 2018	Jan 2019	Feb 2019	Mar 2019	Apr 2019	May 2019	Jun 2019	Jul 2019	Aug 2019
K188	Klipgatspruit, downstream of Mfidikoe village, upstream of Khomanani I Shaft (Frank I Shaft), Frank Concentrator and Waterval Complex	Dry	Dry	Dry	Dry	Dry	Dry	Dry	•	Dry	Dry	•	•
K136	Klipgatspruit, downstream of Entabeni Hostel at Khomanani I Shaft (Frank I Shaft)	Dry	Dry	Dry	Dry	Dry	Dry	Dry	Dry	Dry	Dry	Dry	Dry
K190	Klipgatspruit, downstream of Klipgat Return Water Dam and Waterval Tailings	•	•	•	•	Dry	•	•	•	•	•	•	•
Return water dam													
Monitoring Localities		Sep 2018	Oct 2018	Nov 2018	Dec 2018	Jan 2019	Feb 2019	Mar 2019	Apr 2019	May 2019	Jun 2019	Jul 2019	Aug 2019
K035	Klipgat Return Water Dam of Waterval Tailings	•	•	•	•	•	•	•	•	•	•	•	•

*• – Sampled

7.4. WATERVAL-EAST TAILINGS STORAGE FACILITY

Presented in Table 26 is the frequency of sampling at each Waterval East TSF monitoring locality during the annual period. Additionally the average data tables are illustrated within Table 27 and Table 29, results are discussed separately according to the relevant sections below.

7.4.1. Process water

Klipgat RWD (**K035**), part of the Waterval Tailings Storage Facility, is characterised by elevated TDS/EC and total hardness dominated by the sulphate anion and sodium cation. Average TDS for the current annum measured 4420 mg/l, with an average total hardness of 1560 mg/l. Inorganic salt concentrations and nutrients in the form of nitrate and ammonium were high throughout the annum. Most metals were below detection limits while sporadic high concentrations of manganese, chrome and nickel were detected during the annual period. *E.coli* and total coliforms recorded high counts throughout the monitoring period. The water quality is classified as Unacceptable (class 04) for Domestic Use. Domestic, irrigation, aquatic ecosystems and livestock watering guidelines at the Klipgat Dam were exceeded. There are no WUL conditions for wastewater disposed of into the dams for the new 2018 WUL. The general authorisation limits and WUL for surface water limits were exceeded for multiple variables, including EC, nitrate, ammonium and SOG. The water quality profile remained stable throughout the annum, as indicated by the STIFF diagrams (Figure 19).

Water quality for the inflow into Klipgat dam (**K036**) also had elevated average TDS (4395 mg/l) and inorganic salt concentrations. This locality revealed similar STIFF diagrams (water quality) as compared to **K035**. Average nutrient concentrations (nitrate, ammonium and phosphate) were lower than those found at **K035**. **K036** also recorded high concentrations of manganese, copper and nickel which fluctuated throughout the annum.

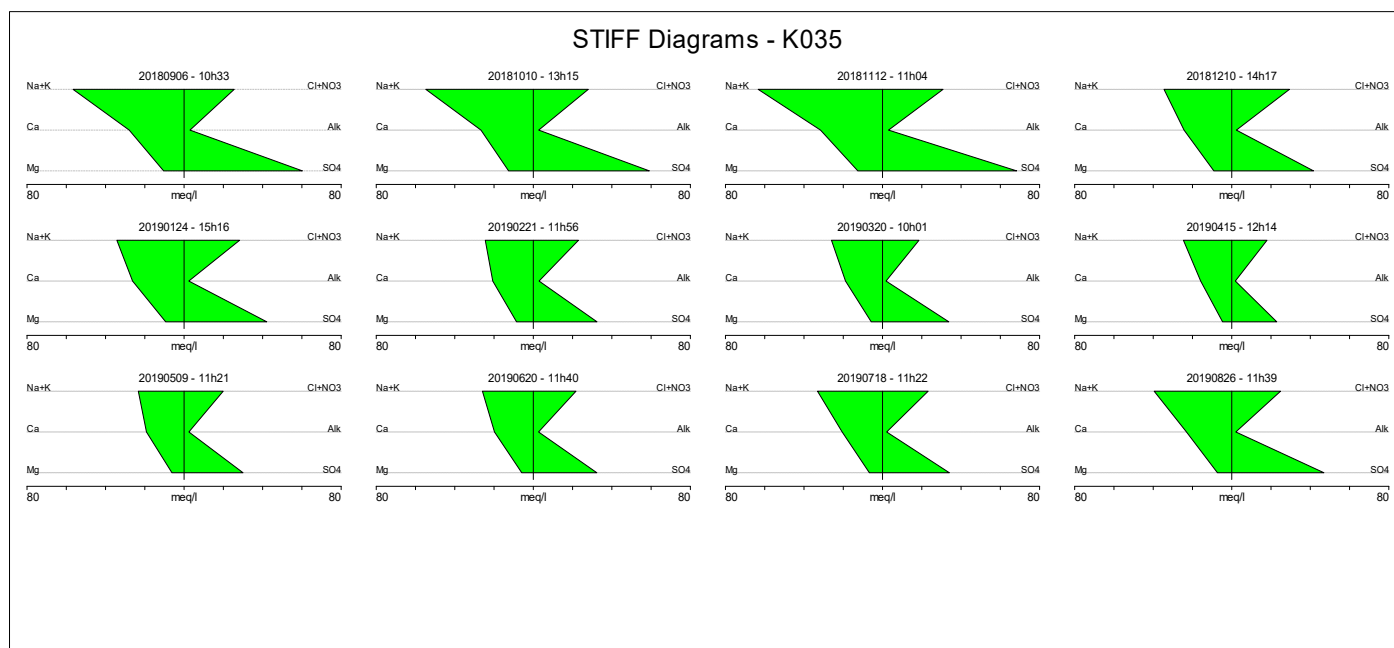


Figure 19: Time series STIFF diagrams representing the Klipgat RWD water quality for the past annual period

Table 27: Average WVE TSF process dams data table for the annual monitoring period

AVERAGE DATA TABLE:						
PROJECT NAME		Anglo Rustenburg Surface water monitoring				
ASSESSMENT SET 1		General Authorisation Limit, Section 21f and h, 2013				
ASSESSMENT SET 2		AAP Rustenburg - Surface water WUL				
VARIABLE	UNITS	ASSESSMENT 1	ASSESSMENT 2	MONITORING LOCALITIES		
				K034	K035	K036
pH @ 25°C	pH	5.5/9.5	6.0/9.0	8.01	7.98	7.95
Electrical conductivity (EC) @ 25°C	mS/m	150	85	639	571	584
Total dissolved solids (TDS)	mg/l	-	-	4437	4420	4395
Total hardness	mg CaCO ₃ /l	-	50	1443	1560	1713
Calcium (Ca)	mg/l	-	-	418	459	491
Magnesium (Mg)	mg/l	-	-	97.1	101	118
Sodium (Na)	mg/l	-	-	869	809	786
Potassium (K)	mg/l	-	-	56	58.7	53.7
Chloride (Cl)	mg/l	-	-	785	829	893
Sulphate (SO ₄)	mg/l	-	-	2063	2016	1916
Fluoride (F)	mg/l	1	0.75	0.621	0.524	0.416
Nitrate (NO ₃) as N	mg/l	15	-	4.9	12.6	2.48
Ammonium (NH ₄) as N	mg/l	6	1	6.32	6	0.68
Orthophosphate (PO ₄) as P	mg/l	10	0.125	0.011	0.062	0.081
Aluminium (Al)	mg/l	-	5	0.008	0.007	0.046
Iron (Fe)	mg/l	0.3	0.5	0.002	0.005	0.024
Manganese (Mn)	mg/l	0.1	0.18	1.1	0.046	0.305
Chromium (Cr)	mg/l	-	-	0.002	0.002	0.003
Copper (Cu)	mg/l	0.01	0.3	0.021	0.016	0.016
Nickel (Ni)	mg/l	-	-	1.2	0.953	0.793
Zinc (Zn)	mg/l	0.1	-	0.008	0.033	0.038
Hexavalent chromium (Cr ⁶⁺)	mg/l	0.05	0.0049	0.001	0.001	0.001
Oil and grease (SOG)	mg/l	2.5	-	-	6.65	-
E.coli	CFU/100ml	1000	-	-	18.21	-
Total coliform	CFU/100ml	-	-	-	52.67	-

7.4.2. Receiving environment

K188 (Klipgatspruit, downstream of Mfidikoe village, upstream of Waterval TSF) was sampled in April, July and August 2019, recording neutral, non-saline and hard water quality based on the average data with low salts, nutrients and metals. Water quality is typical of stormwater run-off.

K136 (Klipgatspruit downstream from the Entabeni Hostel) was recorded as dry throughout the annual period.

K190 (Klipgatspruit downstream of Klipgat Dam) was sampled for most of the annum; samples were however taken from pooled-up water and not necessarily from the flowing Klipgatspruit. Average water quality can be described as neutral, extremely saline and very hard, resembling process water from Klipgat dam. Inorganic salt concentrations were high, with sporadic high nitrate concentrations. Trace metals were detected on some occasions at low concentrations.

Water quality from the upstream locality **K188** to the downstream locality **K190** revealed an overall deterioration in water quality as may be seen in the table below; this is due to the tailings storage facilities and Klipgat dam situated between these two monitoring sites.

Table 28: Average Waterval TSF-East impacts on the Klipfonteinspruit

VARIABLE	UNIT	AAP Rustenburg - Surface water WUL	Locality		CALCULATED CHANGE
			Upstream	Downstream	
			K188	K190	
pH @ 25°C	pH	6.0/9.0	8.24	8.29	0.05
Electrical conductivity (EC) @ 25°C	mS/m	85	63.9	629	565
Total dissolved solids (TDS)	mg/l	-	371	4854	4483
Total hardness	mg CaCO ₃ /l	50	201	2359	2158
Total alkalinity	mg CaCO ₃ /l	-	218	269	51
Chloride (Cl)	mg/l	-	46.8	1334	1287
Sulphate (SO ₄)	mg/l	-	35.8	1733	1697
Fluoride (F)	mg/l	0.75	0.181	0.146	-0.035
Nitrate (NO ₃) as N	mg/l	-	1.74	10	8.26
Ammonium (NH ₄) as N	mg/l	1	5.59	0.993	-4.6
Orthophosphate (PO ₄) as P	mg/l	0.125	1.16	0.023	-1.14
Calcium (Ca)	mg/l	-	51.6	530	478
Magnesium (Mg)	mg/l	-	17.4	251	234
Sodium (Na)	mg/l	-	42.2	748	706
Potassium (K)	mg/l	-	11.8	20.2	8.4
Aluminium (Al)	mg/l	5	0.117	0.002	-0.115
Iron (Fe)	mg/l	0.5	0.018	0.002	-0.016
Manganese (Mn)	mg/l	0.18	0.006	0.201	0.195
Chromium (Cr)	mg/l	-	0.002	0.002	0
Copper (Cu)	mg/l	0.3	0.012	0.054	0.042
Nickel (Ni)	mg/l	-	0.027	0.087	0.06

Table 29: Average WVE TSF receiving environment data table for the annual monitoring period

AVERAGE DATA TABLE:						
PROJECT NAME		Anglo Rustenburg Surface water monitoring				
ASSESSMENT SET 1		AAP Rustenburg - Surface water WUL				
ASSESSMENT SET 2		SANS 241-1:2015 Drinking Water Standard (SABS, 2015)				
Value exceeds the assessment set 1						
VARIABLE	UNITS	ASSESSMENT 1	ASSESSMENT 2	MONITORING LOCALITIES		
				K188	K136	K190
pH @ 25°C	pH	6.0/9.0	5.0/9.7	8.24	-	8.29
Electrical conductivity (EC) @ 25°C	mS/m	85	170	63.9	-	629
Total dissolved solids (TDS)	mg/l	-	1200	371	-	4854
Total hardness	mg CaCO ₃ /l	50	-	201	-	2359
Calcium (Ca)	mg/l	-	-	51.6	-	530
Magnesium (Mg)	mg/l	-	-	17.4	-	251
Sodium (Na)	mg/l	-	200	42.2	-	748
Potassium (K)	mg/l	-	-	11.8	-	20.2
Chloride (Cl)	mg/l	-	300	46.8	-	1334
Sulphate (SO ₄)	mg/l	-	500	35.8	-	1733
Fluoride (F)	mg/l	0.75	1.5	0.181	-	0.146
Nitrate (NO ₃) as N	mg/l	-	11	1.74	-	10
Ammonium (NH ₄) as N	mg/l	1	1.5	5.59	-	0.993
Orthophosphate (PO ₄) as P	mg/l	0.125	-	1.16	-	0.023
Ortophosphate as PO ₄	mg/l	0.234	-	3.56	-	0.069
Aluminium (Al)	mg/l	5	0.3	0.117	-	0.002
Iron (Fe)	mg/l	0.5	0.3	0.018	-	0.002
Manganese (Mn)	mg/l	0.18	0.1	0.006	-	0.201
Chromium (Cr)	mg/l	-	0.05	0.002	-	0.002
Copper (Cu)	mg/l	0.3	2	0.012	-	0.054
Nickel (Ni)	mg/l	-	0.07	0.027	-	0.087
Dissolved oxygen (DO)	mg/l	7.0/8.0	-	2.53	-	4.2
Lead (Pb)	mg/l	-	0.01	0.002	-	0.003
Zinc (Zn)	mg/l	-	5	0.008	-	0.125
Boron (B)	mg/l	-	2.4	0.026	-	0.672
Phenol	mg/l	-	0.01	0.007	-	0.006
Hexavalent chromium (Cr ⁶⁺)	mg/l	0.0049	-	0.001	-	0.001
Arsenic (As)	mg/l	-	0.01	0.003	-	0.003
Cadmium (Cd)	mg/l	-	0.003	0.001	-	0.001
Mercury (Hg)	mg/l	-	0.006	0.002	-	0.002
Selenium (Se)	mg/l	-	0.04	0.001	-	0.001

8. RECEIVING ENVIRONMENT SUMMARY

8.1. Klipgatspruit

A schematic diagram showing selected sampling localities and relevant Rustenburg Process Division facilities relative to the Klipgatspruit is shown in Figure 21. The direction of flow of the Klipgatspruit towards the Hex river is also show. Please note that the diagram is not to scale and all other non-Rustenburg Process Division contributors are not indicated in the diagram.

Upstream from the Waterval tailings storage facilities, the Klipgatspruit water quality is seen to be fairly un-impacted; samples were also indicative of stormwater run-off. Downstream from the Waterval tailings storage facilities (including the Klipgat dam) water quality is seen to change significantly. As may be seen from Figure 20 water quality from Klipgat dam is the main contributor to the noted change. During high-flow events water flowing in the Klipgatspruit will eventually end up in the Hex River. Although no overflow was recorded at the Klipgat dam, it is evident that some seepage occurs, either from Klipgat dam or the tailings storage facility.

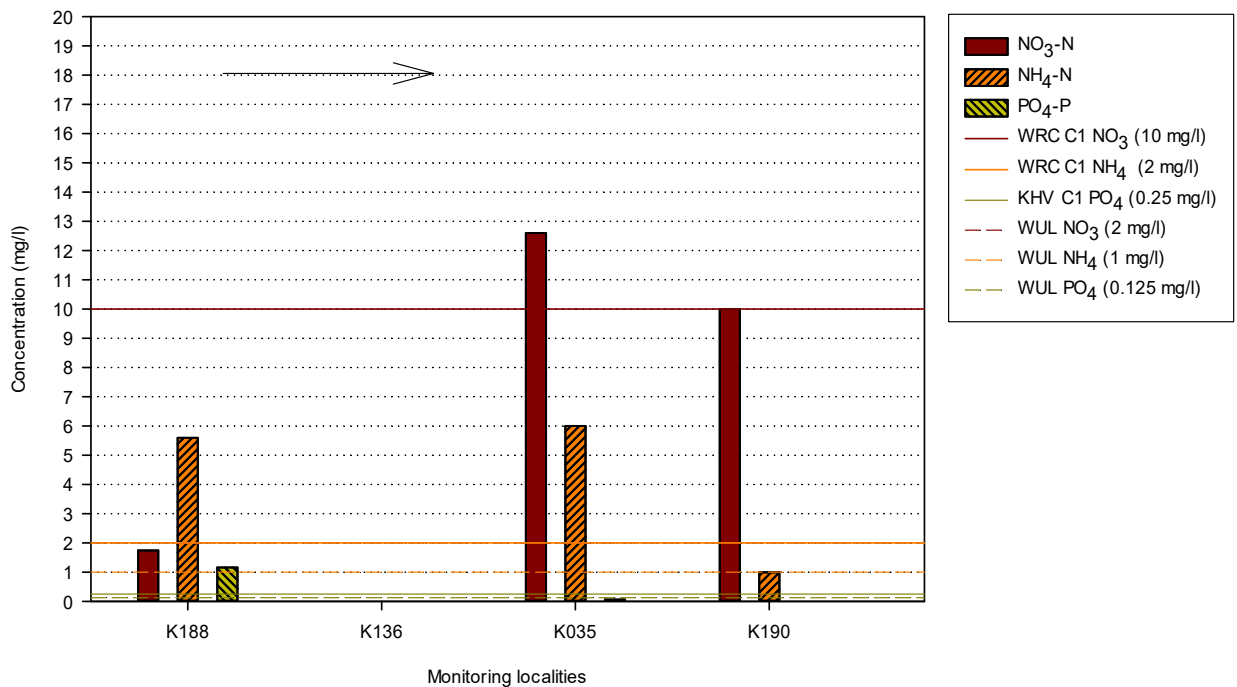
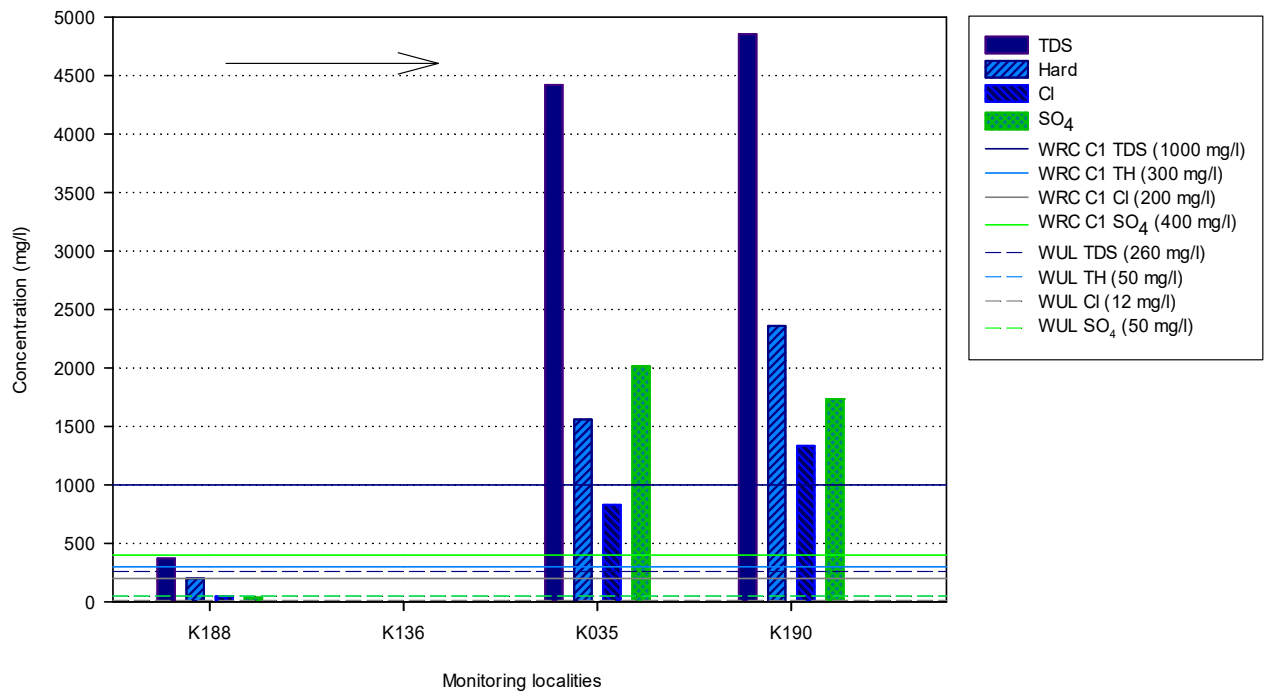


Figure 20: Average data for in-stream localities in the Klipgatspruit for the annual period September 2018 to August 2019

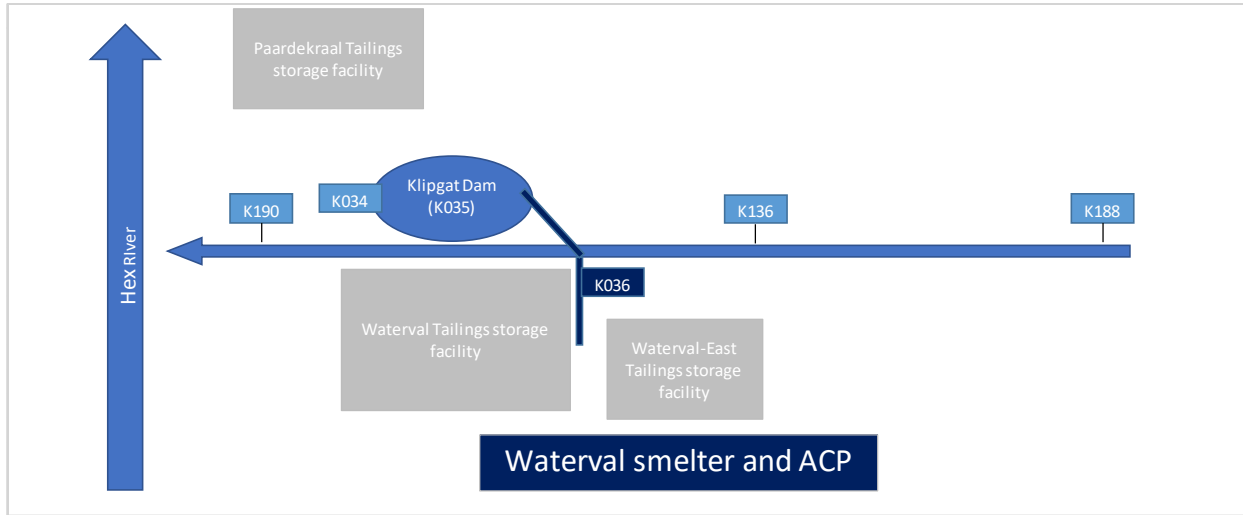


Figure 21: Schematic diagram of the Klipgatspruit relative to Rustenburg Process Division localities

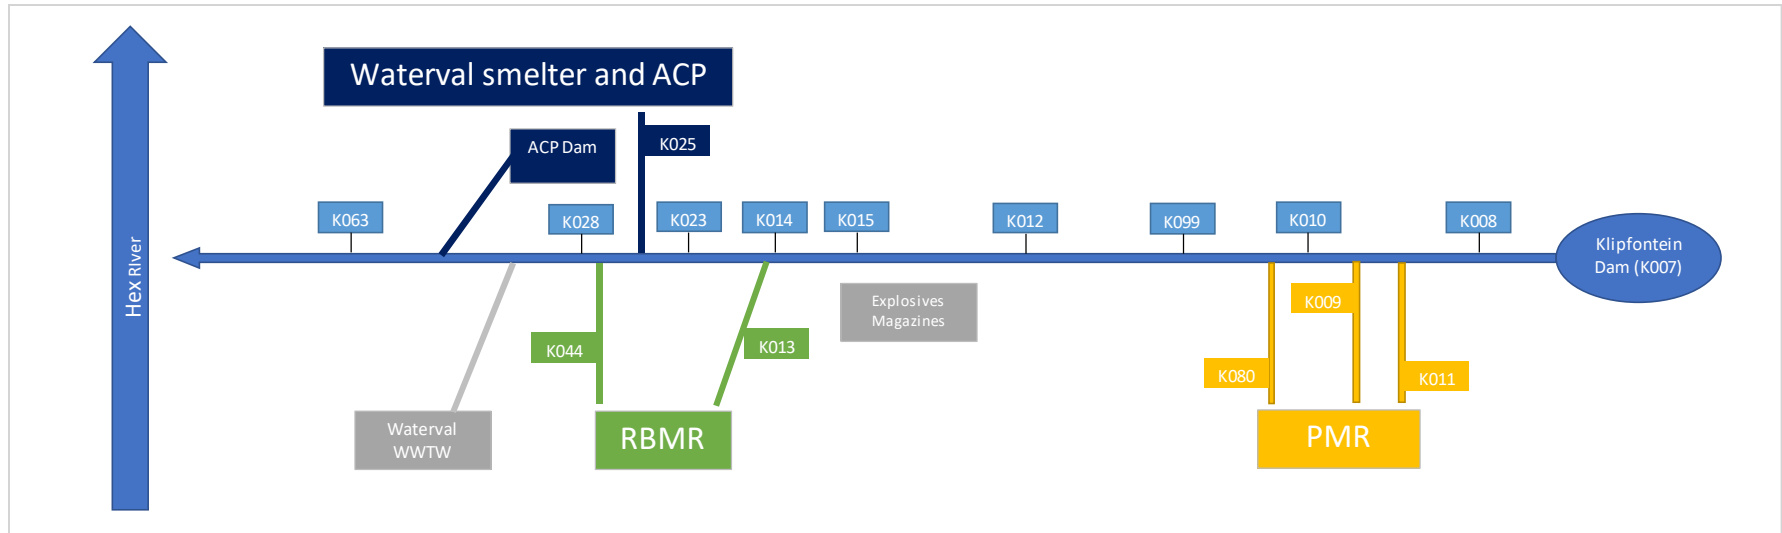


Figure 22: Schematic diagram of the Klipfonteinspruit relative to Rustenburg Process Division localities

8.2. Klipfonteinspruit

Various mining shafts, concentrators, smelters and waste rock dumps are situated within the Klipfontein catchment and have been identified as possible stressors on the Klipfonteinspruit. These include various Anglo process plants as well as other mining shafts and facilities (selected contributors are shown in Figure 22).

The Klipfontein dam (**K007**) was added to the monitoring programme to be used as an additional upstream locality at PMR, and therefore the whole Rustenburg Process Division. Three samples were collected between April and August 2019; average water quality being neutral, very saline and very hard. Very high concentrations of nitrates were also detected.

Locality **K008** (Klipfonteinspruit at PMR bridge) is an upstream locality in the Klipfonteinspruit for monitoring at PMR and was recorded as dry for most of the year. One sample was taken in January 2019 where physical water quality was neutral, saline and very hard with low nutrients and trace amounts of nickel detected.

K010 (downstream from K008 and K009) was sampled during most of the annual period. It must be noted however that this locality is thought to represent stagnant water as the upstream K008 was recorded as dry. This locality is seen to have fluctuating water qualities; a significant increase in salinity concentrations was seen from June 2019 where nutrient and metal concentrations also increased. On average sodium and chloride concentrations dominate this locality; water quality profiles resemble that of the PMR PCDs.

Further downstream at **K099** samples were taken a few times during the annual period; annual average water quality was recorded as extremely saline and very hard. Sporadic high concentrations of fluoride, nitrate and metals were detected.

Locality **K012** (downstream from PMR and upstream from RBMR) was sampled on three occasions and was recorded as dry during the remainder of the annual period. Moderate fluctuating salinity was noted at this locality.

K015 was sampled between January 2019 and July 2019, with the exception of March 2019. Water quality was alkaline, extremely saline and hard, dominated by sodium and sulphate concentrations. Very high concentrations of fluoride, phosphate and various metals were also detected. Water quality of this nature is indicative of process water seen at RBMR.

K014 was sampled on various occasions during the annual period. Water quality was similar to K015 and representative of RBMR process water.

Locality **K023** (upstream of the Waterval complex) was sampled between January 2019 and August 2019. Water quality was alkaline, extremely saline and hard, dominated by sodium and sulphate concentrations. Again, very high concentrations of fluoride, phosphate and various metals were detected, indicating seepage or discharge from RBMR process water.

Locality **K028** (mid-Waterval complex and downstream of RBMR) was sampled throughout the annum with water quality fluctuating constantly; this may be caused by several discharges entering the Klipfonteinspruit before K028. High concentrations of sulphate, fluoride and nickel reveal the impact of the RBMR dams (either by discharge or seepage) on the

Klipfonteinspruit. Long term data is presented in Figure 23. Water quality profiles (STIFF diagrams, Vol. II site reports) show that water quality remained relatively constant, a significant increase in salinity was however noted in May 2019.

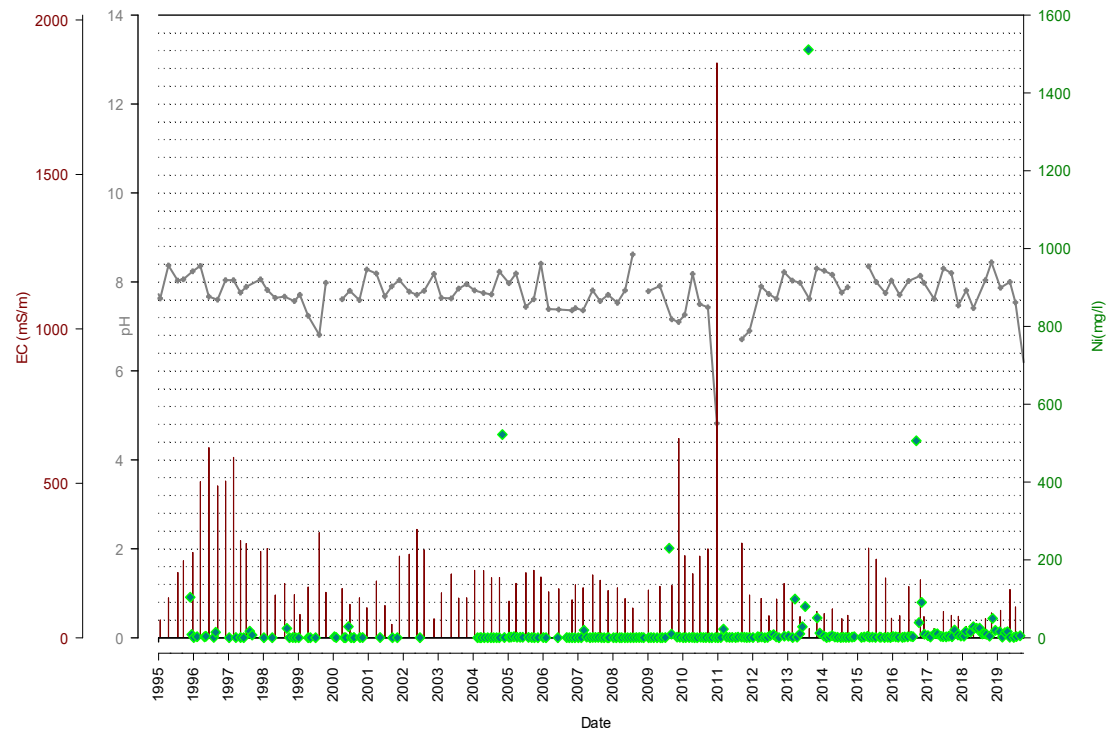


Figure 23: Time series data for pH, EC and Ni concentrations at K028 from 1995 to August 2019

K063 was sampled throughout the annual period and recorded an average water quality that could be described as neutral, saline and hard with moderate inorganic salt concentrations and high nutrients (nitrates and phosphates). Nickel concentrations remained high due to discharges or seepages from RBMR dams. Effluent from Waterval Sewage entering the Klipfonteinspruit between localities K028 and K063 explains the sudden increase in nitrate concentrations, as seen in Figure 24. High phosphate was already present upstream.

Water quality of the Klipfonteinspruit, relevant to the Rustenburg Process Division, is shown in Figure 24. The in-stream Klipfontein Dam is situated upstream from the Rustenburg Process Division and receives impacts from multiple sources (mining and settlements) before it reaches Anglo Platinum facilities. An increase in TDS and hardness concentrations was noted at K010, where after the concentration decreased in a downstream direction toward K012 and downstream from PMR. From K015 (after impacts from RBMR) TDS and sulphates increase significantly towards K028. Decreased salinity concentrations are seen at K063.

Nutrients fluctuated in the Klipfonteinspruit with a significant increase in nitrate concentration noted at K099. Nitrate decreased at K015 where phosphate concentrations increased significantly; this nitrate-phosphate ratio remains stable towards K063 where nitrate is increases and phosphate decreased. This nitrate increase is caused by the inflow of sewage-effluent from the nearby Waterval water treatment works flowing directly into the Klipfonteinspruit.

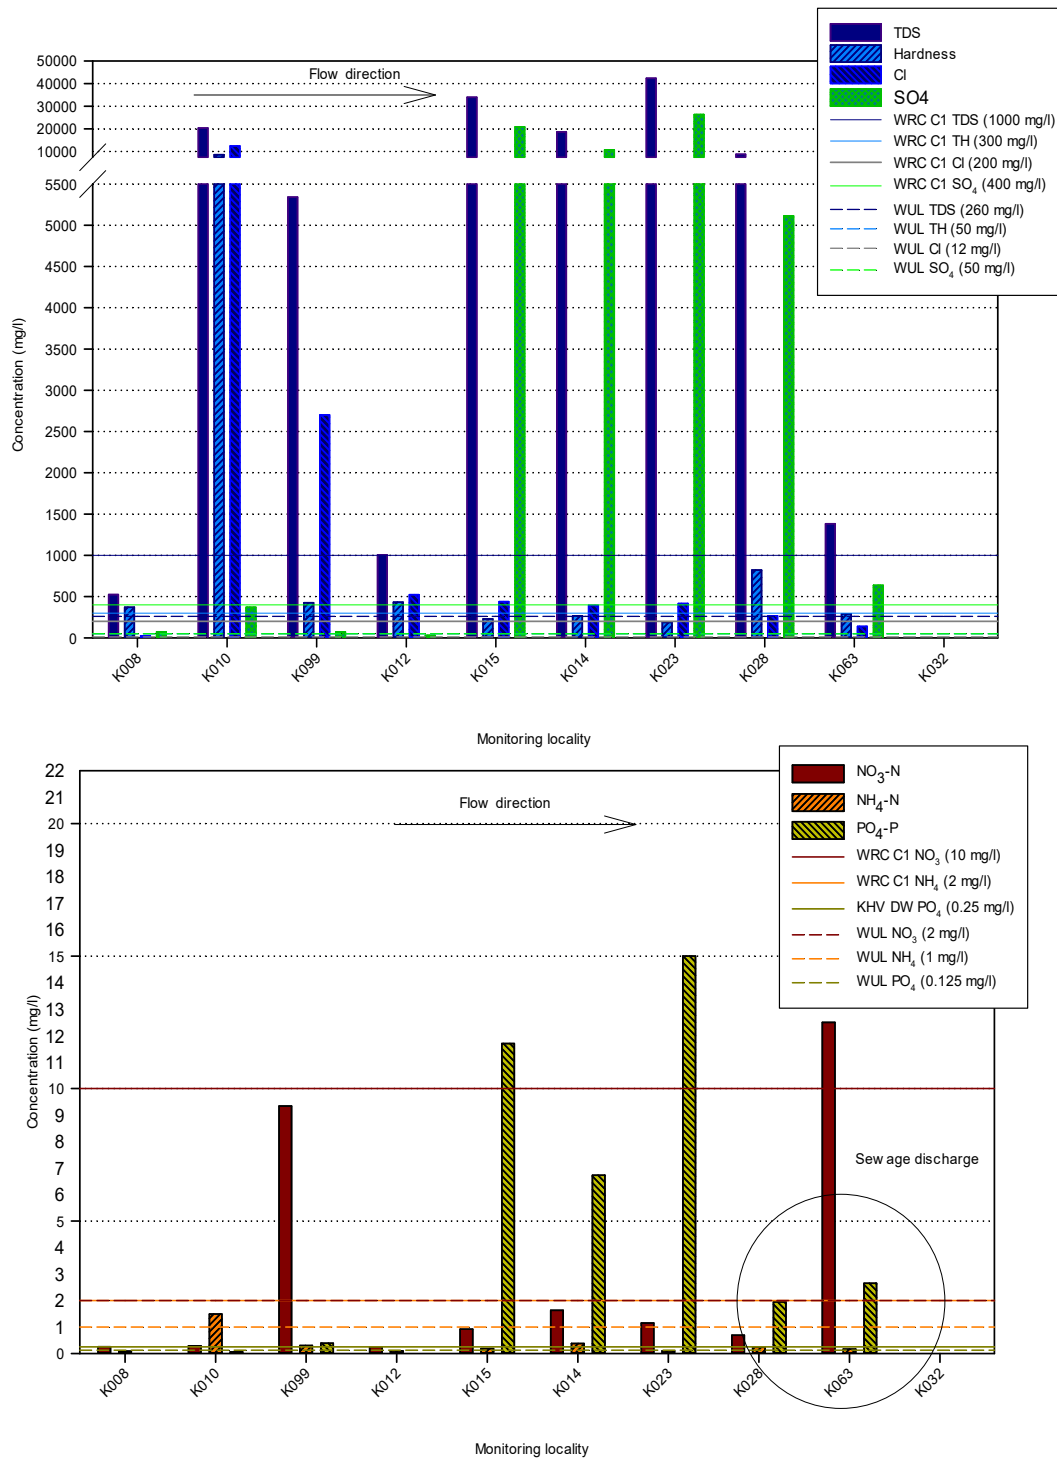


Figure 24: Average data for in-stream localities in the Klipfonteinspruit for the annual period September 2018 to August 2019

Nickel concentrations reached a maximum at locality K028 (11.4 mg/l annual average concentration) and remained in the Klipfonteinspruit further downstream (Figure 25). Various pollution control dams at PMR, RBMR and the Waterval complex contribute to the high nickel concentration.

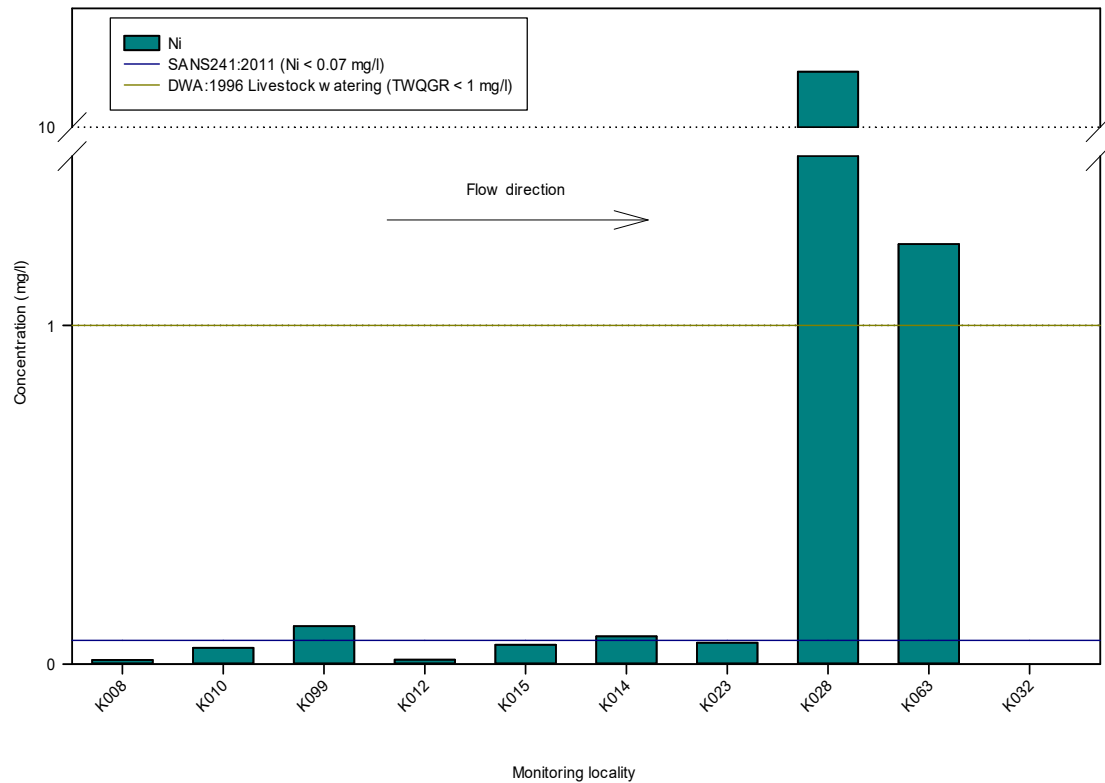


Figure 25: Annual average Nickel concentrations in the Klipfonteinspruit

Figure 25 indicates that nickel concentrations detected at most Klipfonteinspruit localities remained relatively stable throughout the monitoring period. Only locality K028 revealed a significant varying concentration of nickel (Figure 26). Nickel concentrations at K028 are seen to be strongly influenced by the nickel concentrations of the ACP dam (K098). The nickel content in the ACP dam is further seen to be a function of its pH value (also see Figure 17). Nickel concentrations further downstream at K063 follows the same trend as at K028, albeit at a much lower concentration, due to the absorption action of the natural reeds as well as possible oxidation and settling out.

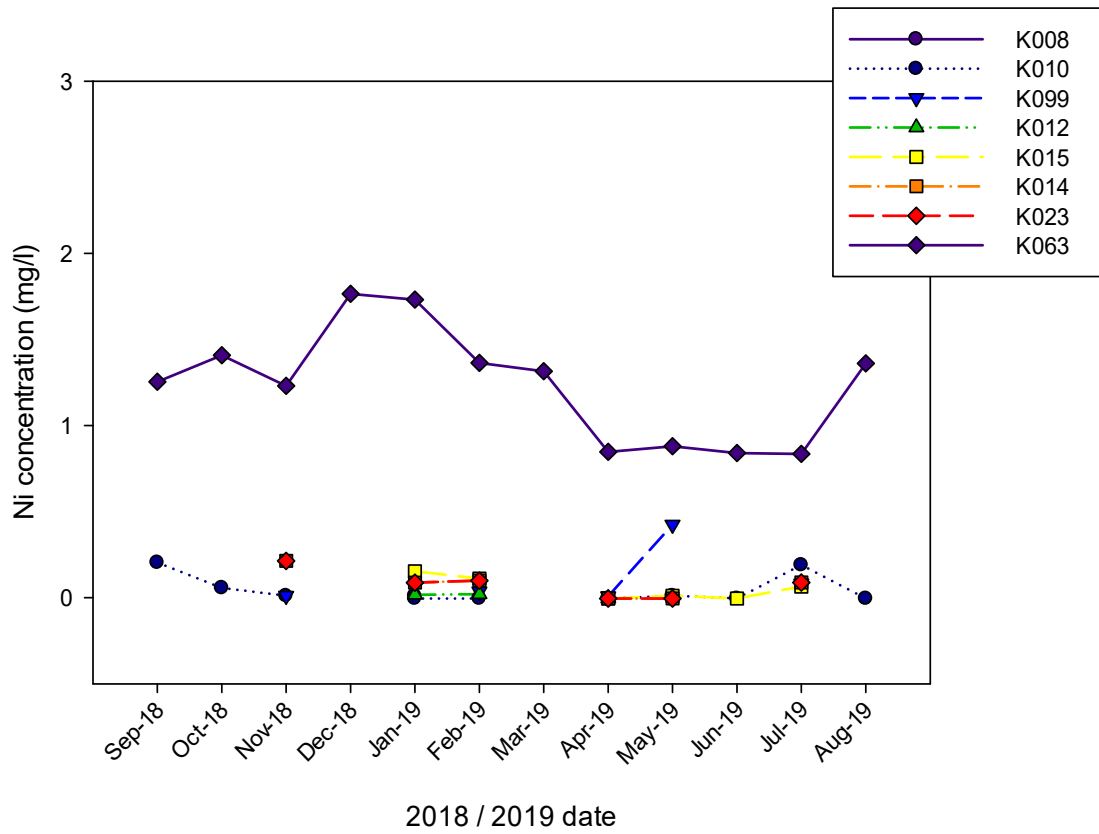


Figure 26: Nickel concentrations per selected localities over the monitoring period


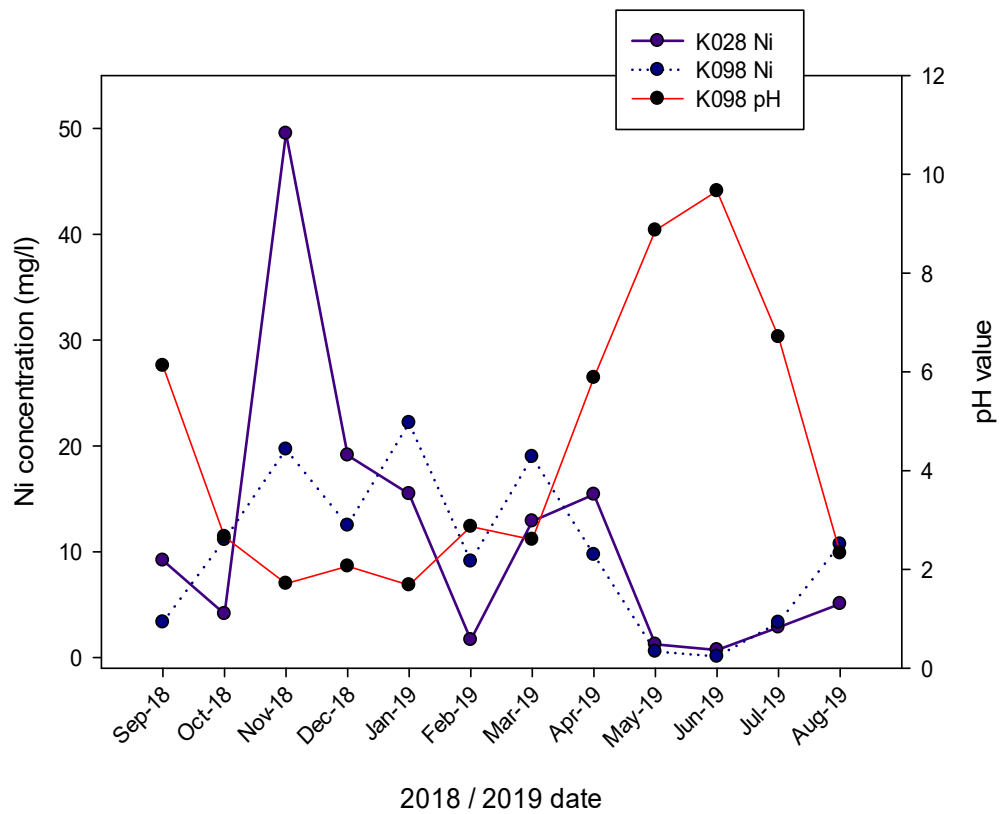


Figure 27: Nickel concentrations over time at localities K028 and K098

E. coli counts in the Klipfonteinspruit (relevant to the Anglo process division) are seen to vary over the time-frame and indicate an increasing trend (Figure 28). A spatial increase in counts is also noted at K063 in accordance with the nutrient load seen in Figure 24. This increase in bacterial count is due to the sewage effluent from the nearby Waterval sewage works

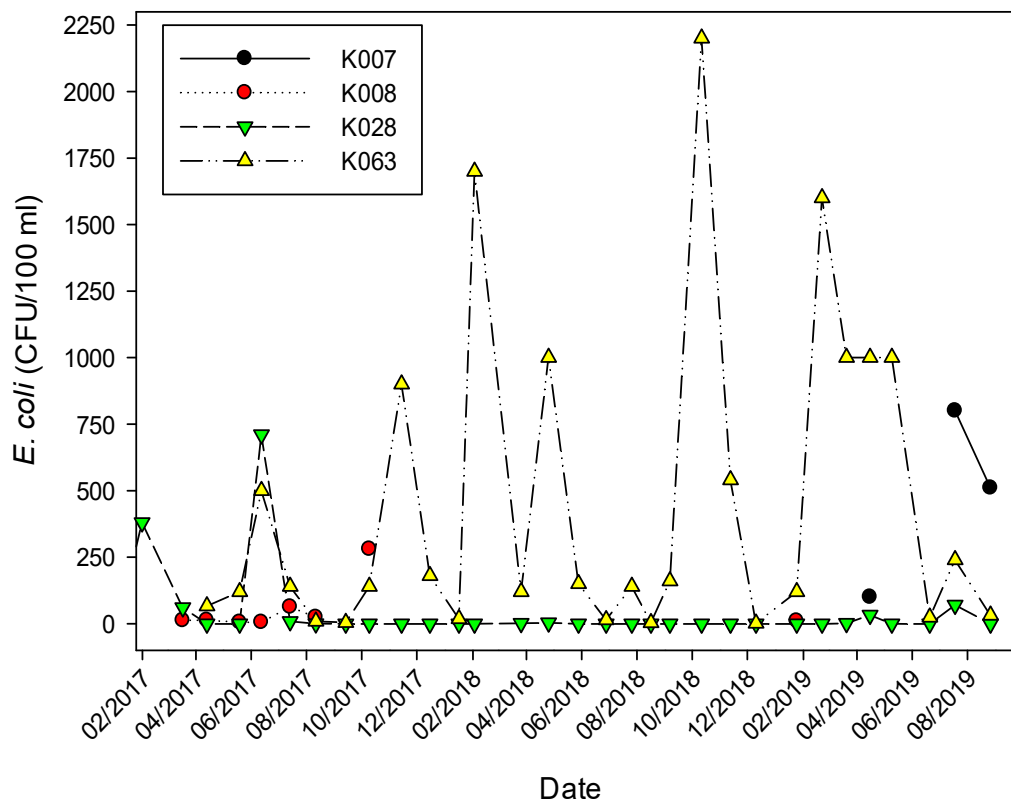

K007: Klipfontein dam
 K008: Klipfonteinspruit at PMR Bridge
 K028: Klipfonteinspruit d/s Waterval sewage & RBMR at bridge
 K063: Klipfonteinspruit at stormwater discharge from Waterval smelter

Figure 28: *E. coli* counts detected in the Klipfonteinspruit catchment for the annual period

The exceedance graphs below indicate the number of times the Klipfonteinspruit localities (average data) exceeded the Anglo surface water WUL limits and SANS 241-1:2015 drinking water standards respectively. The most prominent variables to exceed the Anglo surface water WUL limits were EC and hardness. Other variable that regularly exceeded were pH, fluoride, phosphate, manganese and copper concentrations.

The SANS 241-1:2015 drinking water standards were exceeded by variables including EC, sodium, chloride and nickel. The SANS241-1 :2015 standard is only for comparative purposes and should not be interpreted for compliance.

Table 30: Exceedance table for the Klipfonteinspruit measuring percentage non-compliance to the Anglo surface water WUL conditions

EXCEEDANCE TABLE													
PROJECT NAME		Anglo Rustenburg Surface water monitoring							DATE COMPILED		17 September 2019		
LOCALITY GROUP		Monitoring Localities							COMPILED BY		Werner Rossouw		
DATE RANGE		September 2018 to August 2019											
ASSESSMENT SET		AAP Rustenburg - Surface water WUL							Non-compliance		0% - 25%	25% - 75%	75% - 100%
VARIABLE	UNIT	ASSESSMENT VALUE	MONITORING LOCALITIES										
			K008	K010	K099	K012	K015	K014	K023	K028	K063	K188	K190
NUMBER OF RECORDS			1	10	5	3	6	6	8	12	12	3	11
pH @ 25°C	pH	6.0/9.0	0	0	40	0	100	83	100	33	0	0	0
Electrical conductivity (EC) @ 25°C	mS/m	85	0	90	100	100	100	100	100	100	75	0	100
Total dissolved solids (TDS)	mg/l	-	0	0	0	0	0	0	0	0	0	0	0
Total hardness	mg CaCO ₃ /l	50	100	100	80	100	100	100	100	100	100	100	100
Calcium (Ca)	mg/l	-	0	0	0	0	0	0	0	0	0	0	0
Magnesium (Mg)	mg/l	-	0	0	0	0	0	0	0	0	0	0	0
Sodium (Na)	mg/l	-	0	0	0	0	0	0	0	0	0	0	0
Potassium (K)	mg/l	-	0	0	0	0	0	0	0	0	0	0	0
Total alkalinity	mg CaCO ₃ /l	-	0	0	0	0	0	0	0	0	0	0	0
Chloride (Cl)	mg/l	-	0	0	0	0	0	0	0	0	0	0	0
Sulphate (SO ₄)	mg/l	-	0	0	0	0	0	0	0	0	0	0	0
Fluoride (F)	mg/l	0.75	0	0	60	0	100	83	100	100	25	0	0
Nitrate (NO ₃) as N	mg/l	-	0	0	0	0	0	0	0	0	0	0	0
Nitrite (NO ₂) as N	mg/l	-	0	0	0	0	0	0	0	0	0	0	0
Ammonium (NH ₄) as N	mg/l	1	0	30	0	0	0	17	0	8	0	33	18
Orthophosphate (PO ₄) as P	mg/l	0.125	0	10	40	0	100	83	100	58	100	100	9
Aluminium (Al)	mg/l	5	0	0	0	0	0	0	0	0	0	0	0
Iron (Fe)	mg/l	0.5	0	30	0	0	17	0	12	8	0	0	0
Manganese (Mn)	mg/l	0.18	0	60	0	0	17	17	12	58	8	0	18
Chromium (Cr)	mg/l	-	0	0	0	0	0	0	0	0	0	0	0
Copper (Cu)	mg/l	0.3	0	0	20	0	17	33	38	50	0	0	0
Nickel (Ni)	mg/l	-	0	0	0	0	0	0	0	0	0	0	0

Table 31: Exceedance table for the Klipfonteinspruit measuring percentage non-compliance to the SANS 241-1:2015 Drinking Water Standard

EXCEEDANCE TABLE													
PROJECT NAME		Anglo Rustenburg Surface water monitoring							DATE COMPILED		17 September 2019		
LOCALITY GROUP		Monitoring Localities							COMPILED BY		Werner Rossouw		
DATE RANGE		September 2018 to August 2019											
ASSESSMENT SET		SANS 241-1:2015 Drinking Water Standard (SABS, 2015)							Non-compliance		0% - 25%	25% - 75%	75% - 100%
VARIABLE	UNIT	ASSESSMENT VALUE	MONITORING LOCALITIES										
			K008	K010	K099	K012	K015	K014	K023	K028	K063	K188	K190
NUMBER OF RECORDS			1	10	5	3	6	6	8	12	12	3	11
pH @ 25°C	pH	5.0/9.7	0	0	20	0	67	50	62	25	0	0	0
Electrical conductivity (EC) @ 25°C	mS/m	170	0	70	100	67	100	100	100	100	17	0	100
Total dissolved solids (TDS)	mg/l	1200	0	60	100	33	100	100	100	100	17	0	91
Total hardness	mg CaCO3/l	-	0	0	0	0	0	0	0	0	0	0	0
Calcium (Ca)	mg/l	-	0	0	0	0	0	0	0	0	0	0	0
Magnesium (Mg)	mg/l	-	0	0	0	0	0	0	0	0	0	0	0
Sodium (Na)	mg/l	200	0	60	100	67	100	100	100	100	25	0	91
Potassium (K)	mg/l	-	0	0	0	0	0	0	0	0	0	0	0
Total alkalinity	mg CaCO3/l	-	0	0	0	0	0	0	0	0	0	0	0
Chloride (Cl)	mg/l	300	0	70	100	100	67	33	75	42	0	0	100
Sulphate (SO ₄)	mg/l	500	0	30	0	0	100	100	100	100	17	0	91
Fluoride (F)	mg/l	1.5	0	0	20	0	100	83	100	100	17	0	0
Nitrate (NO ₃) as N	mg/l	11	0	0	20	0	0	0	0	0	67	0	27
Nitrite (NO ₂) as N	mg/l	0.9	0	0	40	0	17	33	25	0	0	0	9
Ammonium (NH ₄) as N	mg/l	1.5	0	10	0	0	0	17	0	0	0	33	18
Orthophosphate (PO ₄) as P	mg/l	-	0	0	0	0	0	0	0	0	0	0	0
Aluminium (Al)	mg/l	0.3	0	30	40	0	17	50	25	0	0	0	0
Iron (Fe)	mg/l	0.3	0	40	0	0	17	17	25	8	0	0	0
Manganese (Mn)	mg/l	0.1	0	60	0	0	17	17	25	67	17	0	27
Chromium (Cr)	mg/l	0.05	0	10	20	0	17	50	50	8	0	0	0
Copper (Cu)	mg/l	2	0	0	0	0	0	0	0	0	0	0	0
Nickel (Ni)	mg/l	0.07	0	20	40	0	33	67	62	100	100	0	45

9. STANDARD ANGLO RISK RATING

Remediation is necessary where risks exist towards human health or health to the environment. These risks are assessed with relation to the current or intended use of the land and the wider environmental setting and the risk of contaminant spreading. Risk is commonly defined as the probability that a substance will produce harm (for example adverse health effects) under specified conditions. When dealing with contaminated land management, risks occur when the following three components are present: i) source, ii) receptor, and iii) pathway. Generally, remediation is carried out due to the following reasons:

- To protect human health or the environment;
- To enable redevelopment;
- To limit potential liabilities; and
- To repair or enhance previous remediation efforts.

Table 32 below tabulates the potential risks and quantified risks on the surface water regime resulting from Anglo Platinum process activities. The risks given are based on the ANGLO AMERICAN 5×5 RISK RATING MATRIX and the probability of the unwanted event occurring as shown on the next page.

Table 32: Anglo American Risk Matrix

ANGLO AMERICAN Plc RISK MATRIX		Hazard Effect/Consequence (Where an event has more than one Loss Type , choose the Consequence with the highest rating)				
Loss Type (Additional 'Loss Types' may exist for an event: identify and rate accordingly)		1. INSIGNIFICANT	2. MINOR	3. MODERATE	4. MAJOR	5. CATASTROPHIC
(E) Environmental Impact		Minimal environmental harm L1 incident	Material environmental harm L2 incident remediable short term	Serious environmental harm L2 incident remediable within LOM	Major environmental harm L2 incident remediable with post LOM	Extreme environmental harm L3 incident irreversible
Likelihood	Examples (Consider near hits as well as actual events)	RISK RATING				
5 (Almost Certain)	The unwanted event has occurred frequently; occurs in order of one or more times per year and is likely to reoccur within 1 year	11 (M)	16 (H)	20 (H)	23 (EX)	25 (EX)
4 (Likely)	The unwanted event has occurred infrequently; occurs in order of less than once per year and is likely to reoccur within 5 years.	7 (M)	12 (M)	17 (H)	21 (EX)	24 (EX)
3 (Possible)	The unwanted event has happened in the business at some time; or could happen within 10 years	4 (L)	8 (M)	13(H)	18 (H)	22 (EX)
2 (Unlikely)	The unwanted event has happened in the business at some time; or could happen within 20 years	2 (L)	5 (L)	9 (M)	14 (H)	19 (H)
1 (Rare)	The unwanted event has never been known to occur in the business; or it is highly unlikely it will occur within 20 years	1 (L)	3 (L)	6 (M)	10 (M)	15 (H)
RISK RATING	RISK LEVEL	GUIDELINES FOR RISK MATRIX				PRIORITY
21 to 25	(Ex) Extreme	Eliminate, avoid, implement specific actions plans/procedures to manage and monitor				1
13 to 20	(H) High	Proactively manage				2
6 to 12	(M) Medium	Actively manage				3
1 to 5	(L) Low	Monitor and manage as appropriate				4

Table 33: Environmental risk table for surface water regime at Anglo Platinum Process Division

Name of Facility	Potential Impact (pre-control)				
	Nature of Environmental Impact/Risk	Point sources of pollution	Distance from community	Potential Impact Ranking	Management plan
Tailings facilities					
Waterval Tailings	Waterval Tailings solution trench (K107N) and water from Waterval Tailings K036 discharges into Klipgat Dam which regularly overflows. Quality of these localities is of poor quality with high salinity, nitrate and nickel.	K034 (Klipgat Dam overflow) records irregular overflow	1000 m	High	Remediate TSF seepage. Prevent RWD discharge – closed circuit management.
Processing Units					
Waterval Smelter + Acid Plant	Klipfonteinspruit downstream from Waterval Complex is of Marginal to Poor quality with TDS, Ni, NO ₃ and <i>E.coli</i> exceeding acceptable domestic use guidelines.	K025 (ACP), K167 (Conc.), K168 (Conc.), K169 (PF Lab) & Waterval WWTW	2200 m	High	Closed circuit management, effective separation of clean and dirty water, prevent discharge of substandard water
RBMR	Impact in terms of salinity, nickel and nitrate on Klipfonteinspruit downstream from RBMR. Significant increases in Ni concentration in Klipfonteinspruit exceeding acceptable domestic standards	K015, K024, K044, K062	2000 m	High	Contain in dirty water circuit, prevention of discharge or dam overflows of substandard quality. Delineate groundwater pollution plume
PMR	Effluent and stormwater discharge E of PMR K080 is of Poor quality with elevated TDS, inorganic nitrogen, Ni and Cu. TDS and NO ₃ impacts on already impacted Klipfonteinspruit.	K010, K080	1000 m	High	Prevention of discharge, separate clean and dirty water, prevention of dam overflows

10. SURFACE WATER CONCLUSION

- Raised salinity (TDS and EC), total hardness, inorganic salts and heavy metals are indicative of the water type associated with the refining processes at the Rustenburg Process Division.
- The pollution control dams at PMR had (on average) significant concentrations of calcium, chloride and sodium while the dams at RBMR had significant concentrations of sodium and sulphate. PCD localities sampled at PMR, RBMR and the Waterval complex recorded very high concentrations of metals, these included iron, cobalt, copper, manganese and nickel. Spills at the dams should be prevented and precautions must be taken in times of heavy rains.
- Impact in the Klipfonteinspruit was seen from discharge or spillage from RBMR. The exact point source or sources should be established to prevent such occurrences.
- It is of utmost importance that impacted water and seepages at the Anglo process division's business units be contained within the mine's dirty water circuit to minimize the pollution potential towards the different streams and therefore ultimately to the Hex River.
- Discharge localities that may introduce process water to receiving environments (K044, K168, K169, etc.) recorded water qualities with high salinity and metals that may prove to be detrimental to the environment.
- Organic pollution probably deriving from sewage (introducing harmful bacteria, oils and greases and NH_4 and PO_4) is also a hazard, and enters the Klipfonteinspruit from the Waterval WWTW.
- Process and refinery complexes remain a high risk to the environment especially in terms of salt load, nutrient load and metals to the surrounding receiving environment, including the groundwater resources.
- Most localities had variables that exceeded the WUL conditions for surface water localities. These WUL conditions are however very stringent for the typical expected water qualities.

11. REFERENCES

DWAF *et al*, 1998. Quality of domestic water supplies. Volume 1: Assessment Guide. Second Edition. Water Research Commission Report No: TT 101/98.

Midgley, DC, Pitman, WV and Middleton, BJ, 1996. Water Research Commission report number 298/1/94. Surface Water Resources of South Africa 1990. (WR90)

Department of Water Affairs and Forestry, 1996a. South African Water Quality Guidelines, Volume 01: Domestic Use.

Department of Water Affairs and Forestry, 1996d. South African Water Quality Guidelines, Volume 04: Agriculture Use - Irrigation.

Department of Water Affairs and Forestry, 1996e. South African Water Quality Guidelines, Volume 05: Agriculture Use - Livestock watering.

Department of Water Affairs and Forestry, 1996g. South African Water Quality Guidelines, Volume 07: Aquatic Ecosystems.

Department of Water Affairs and Forestry, 1999. Government Notice No 704: Regulations on use of water for mining and related activities aimed at the protection of water resources. Government Gazette No 20119, published 4 June 1999.

Department of Water Affairs, 1999. Government Notice No 1191. General Authorisations in terms of Section 39 of the National Water Act, 1998 (Act 36 of 1998). Government Gazette No 20526 published 8 October 1999.

Department of Water Affairs and Forestry, 2006. Best Practice Guidelines Series G3: General Guidelines for Water Monitoring Systems.

Department of Water Affairs and Forestry, 2008. Best Practice Guidelines Series G4: General Guidelines for Impact Prediction

Department of Water Affairs and Forestry, 2008. Best Practice Guidelines Series H1: Hierarchy Guidelines for Integrated Mine Water Management.

Department of Water Affairs and Forestry, 2008. Licence in terms of Chapter 4 of the National Water Act, 1998 (Act 36 of 1998). Licence No. 03/A22H/ACGIJ/926.

ISO 5667-1: 2006 Part 1: Guidance on the design of sampling programs and sampling techniques.

ISO 5667-3: 2003 Part 3: Guidance on preservation and handling of samples.

ISO 5667-6: 2005 Part 6: Guidance on sampling of rivers and streams.

**Anglo American Platinum
Rustenburg Process Division**

**Annual Integrated Surface and
Groundwater Quality, Biomonitoring
and Toxicity Testing Assessment
Report, Vol I (Continued)**

September 2018 to August 2019



Appendix A

Annual report on groundwater monitoring

Anglo American Platinum – Rustenburg Operations
Annual integrated water monitoring report
Volume I





Groundwater Complete

ANGLO PLATINUM MINES RUSTENBURG SECTION

ANNUAL REPORT ON GROUNDWATER MONITORING RESULTS FOR 2018/2019

SEPTEMBER 2019

Contact Details:

Phone: 0844091429

Fax: 0866950191

P.O. Box 448

Riversdale

6670

gcomplete@outlook.com

Compiled by: Gerdes Steenekamp (B.Sc. Hons. Hydrology/Geohydrology)

Reviewed by: Gerhard Steenekamp (M.Sc. Geohydrology Pr.Sci.Nat.400385/04)

TABLE OF CONTENTS

1	Introduction	4
2	Interpretation of Monitoring Data.....	6
2.1	Waterval Smelter, Concentrator, and Acid Plant.....	11
2.2	The Rustenburg Base Metal Refinery (RBMR)	19
2.3	The Precious Metal Refinery (PMR) and Central Deeps Shaft.....	29
2.4	The Waterval Tailings Complex	37
3	Conclusions and Recommendations.....	41

LIST OF FIGURES

Figure 1:	Map of the RPM area with distribution of groundwater monitoring points during 2018/2019	5
Figure 2:	Layout of the Expanded Durov diagram.....	7
Figure 3:	Positions of monitoring boreholes in the Waterval Processing area.....	12
Figure 4:	Time-series plot of indicator chemical parameters in the Waterval Processing area – TDS and SO ₄	15
Figure 5:	Time-series plot of indicator chemical parameters in the Waterval Processing area – NO ₃ , Cl and Na.....	16
Figure 6:	EDD of groundwater chemistry in the Waterval Processing area.....	17
Figure 7:	Stiff diagrams of groundwater chemistry in the Waterval Processing area.....	17
Figure 8:	Time series plot of water levels for in the Waterval Processing area	18
Figure 9:	Positions of monitoring boreholes in the RBMR area.....	20
Figure 10:	Time-series plot of indicator chemical parameters in the RBMR area – TDS and SO ₄	24
Figure 11:	Time-series plot of indicator chemical parameters in the RBMR area – Na, NO ₃ and Cl.....	25
Figure 12:	EDD of groundwater chemistry in the RBMR area.....	26
Figure 13:	Stiff diagrams of groundwater chemistry in the RBMR area.....	27
Figure 14:	Time series plot of water levels for in the RBMR area	28
Figure 15:	Positions of monitoring boreholes in the PMR and Central Deeps Shaft areas	30
Figure 16:	Time-series plot of indicator chemical parameters in the PMR and Central Deeps Shaft areas – TDS and SO ₄	33
Figure 17:	Time-series plot of indicator chemical parameters in the PMR and Central Deeps Shaft areas – Na, NO ₃ and Cl.....	34
Figure 18:	EDD of groundwater chemistry in the PMR area.....	35
Figure 19:	Stiff diagrams of groundwater chemistry in the PMR area	35
Figure 20:	Time series plot of water levels for in the PMR area	36
Figure 21:	Positions of monitoring boreholes in the Waterval Tailings Complex area	38
Figure 22:	EDD of groundwater chemistry in the Waterval Tailings Complex area ..	40
Figure 23:	Stiff diagrams of groundwater chemistry in the Waterval Tailings Complex area.....	40

LIST OF TABLES

Table 1: Guideline concentrations according to RPM Water Use Licence	8
Table 2: South African National Standards for drinking water (SANS 241:2011)	8
Table 3: Average concentrations of indicator parameters for the 2018/2019 monitoring year	10

ANGLO PLATINUM MINES, RUSTENBURG SECTION: ANNUAL REPORT ON GROUNDWATER MONITORING RESULTS FOR 2018/2019, AUGUST 2019

1 INTRODUCTION

Groundwater Complete was contracted by Aquatico Scientific to evaluate the groundwater quality and water level monitoring results for Anglo Platinum's Rustenburg Section (herein after referred to as RPM) for the 2018/2019 monitoring year. This evaluation therefore focuses on the monitoring data from September 2018 to September 2019, but also correlates with earlier data where necessary.

The distribution of all the groundwater monitoring points that were actively sampled during the past year is presented on a regional map of the RPM operations area in **Figure 1. More detailed site maps on a larger scale are provided in each section with the discussion of the water quality properties in each area and are orientated with north at the top of all maps and figures.** The regional groundwater seepage directions (flow lines) are also indicated as blue arrows on each of the maps in the source areas.



Figure 1: Map of the RPM area with distribution of groundwater monitoring points during 2018/2019

2 INTERPRETATION OF MONITORING DATA

Five chemical parameters, namely Total Dissolved Solids (TDS), nitrate (NO₃), sulphate (SO₄), chloride (Cl) and sodium (Na) were chosen from the full list of analytes as indicators of the specific type of contamination commonly occurring at RPM:

- The **TDS** value provides a holistic measurement of the total inorganic ion content of the water.
- **Nitrate** content often increases in the vicinity of shafts, discard dumps and tailings facilities as a result of traces of nitrate-based explosives used in the mining process. As will be discussed frequently in this report, nitrate contamination is the most direct and prominent parameter that is influenced by the mining activities at RPM. Nitrate is affected because of remnants of explosives attached to run-of-mine rocks, including ore, waste and discard – wet or dry. These nitrates are very soluble in water and any contact with water of blasted rock results into dissolution in water or leachate formation when rainwater percolates through rock dumps, stockpiles or discard facilities. One of the areas where the most pronounced impacts of the nitrate contamination occur is discard rock dumps and settling dams at the shaft areas. Nitrate concentrations are also elevated in the tailings dam water but dilution with make-up water imported from outside source aid significantly in reducing the concentrations.
- **Sulphate** is a prominent and widespread contaminant in the base metal processing areas such as the concentrators, smelters and refineries. Most ore and gangue minerals occur in the form of metal sulphides. When liberated, crushed and washed in the mining process oxidation of these materials occurs and a reactions chain forms commonly referred to as acid-mine-drainage. Sulphuric acid forms in this process and sulphate levels increase significantly. Sulphate is therefore a common indicator of pollution resulting from the processing facilities and waste products.
- **Sodium** and **chloride** are usually present in high concentrations in connate water within the crystal structure or matrix of rocks. When blasted, crushed, smelted or processed in some other way, sodium and chloride are liberated and serve as a conservative indicator of the impact of mining and processing activities on the environment.

These parameters will be plotted for all the different areas and all boreholes where data exists. Although only the five parameters will be plotted in each case, all inorganic parameters will be assessed and anomalies will be discussed. Groundwater quality conditions are compared to the water quality objectives set by the RPM Water Use Licence (*WUL*) as well as the South African National Standards for drinking water (*SANS 241:2015*). The respective standards are provided in **Tables 1** and **2**.

The purpose with the time-series plots is not to show exact concentrations for each monitoring point and each parameter, but rather to present an overall impression of the trends over the past year.

One of the most appropriate ways to interpret the type of water at a sampling point is to assess the plot position of the water quality on different analytical diagrams like a Piper, Expanded Durov and Stiff diagrams. Of these three types, the Expanded Durov diagram probably gives the most holistic water quality signature. The characteristics of the different fields of the Expanded Durov diagram (EDD) are discussed briefly in **Figure 2**.

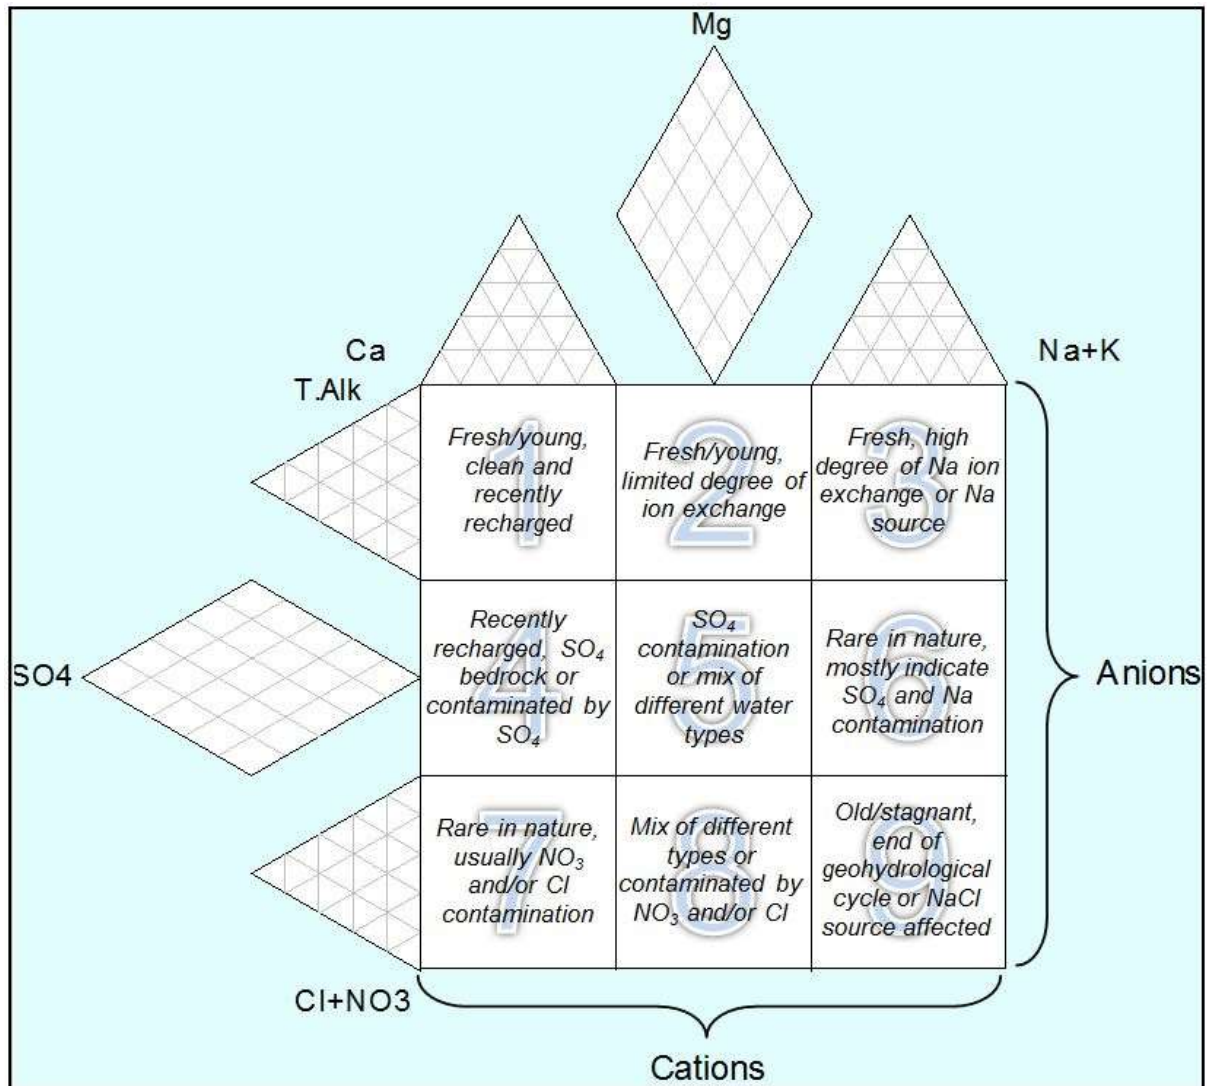


Figure 2: Layout of the Expanded Durov diagram

Another way of presenting the signature or water type distribution in an area is by means of Stiff diagrams. These diagrams plot the equivalent concentrations of the major cations and anions on a horizontal scale on opposite sides of a vertical axis. The plot point on each parameter is linked to the adjacent one resulting in a polygon around the cation and anion axes. The result is a small figure/diagram of which the geometry typifies the groundwater composition at the point. Ambient groundwater qualities in the same aquifer type and water polluted by the same source will for example display similar geometries.

Table 1: Guideline concentrations according to RPM Water Use Licence

Chemical Parameter	Unit	RPM WUL Guideline Concentration
Calcium	<i>mg/l</i>	34
Chloride	<i>mg/l</i>	14
EC	<i>mS/m</i>	45
Fluoride	<i>mg/l</i>	0.4
Magnesium	<i>mg/l</i>	16
Nitrate	<i>mg/l</i>	0.2
pH	<i>N/A</i>	6 - 9.5
Sodium	<i>mg/l</i>	22
Sulphate	<i>mg/l</i>	20

Table 2: South African National Standards for drinking water (SANS 241:2011)

Determinant	Risk	Unit	Standard limits
Physical and aesthetic determinants			
Free chlorine	Chronic health	<i>mg/L</i>	≤ 5
Monochloramine	Chronic health	<i>mg/L</i>	≤ 3
Conductivity at 25 °C	Aesthetic	<i>mS/m</i>	≤ 170
Total dissolved solids	Aesthetic	<i>mg/L</i>	≤ 1 200
Turbidity	Operational	<i>NTU</i>	≤ 1
	Aesthetic	<i>NTU</i>	≤ 5
pH at 25 C	Operational	<i>pH units</i>	≥ 5 to ≤ 9.7
Chemical determinants - macro-determinants			
Nitrate as N	Acute health – 1	<i>mg/L</i>	≤ 11
Nitrite as N	Acute health – 1	<i>mg/L</i>	≤ 0.9
Sulphate as SO ₄ ²⁻	Acute health – 1	<i>mg/L</i>	≤ 500
	Aesthetic	<i>mg/L</i>	≤ 250
Fluoride as F ⁻	Chronic health	<i>mg/L</i>	≤ 1.5
Ammonia as N	Aesthetic	<i>mg/L</i>	≤ 1.5
Chloride as Cl ⁻	Aesthetic	<i>mg/L</i>	≤ 300
Sodium as Na	Aesthetic	<i>mg/L</i>	≤ 200
Zinc as Zn	Aesthetic	<i>mg/L</i>	≤ 5
Chemical determinants - micro-determinants			
Aluminium as Al	Operational	<i>mg/L</i>	≤ 0.3
Antimony as Sb	Chronic health	<i>mg/L</i>	≤ 0.02
Arsenic as As	Chronic health	<i>mg/L</i>	≤ 0.01
Barium Ba	Chronic health	<i>mg/L</i>	≤ 0.7
Boron B	Chronic health	<i>mg/L</i>	≤ 2.4
Cadmium as Cd	Chronic health	<i>mg/L</i>	≤ 0.003
Total chromium as Cr	Chronic health	<i>mg/L</i>	≤ 0.05
Cobalt as Co	Chronic health	<i>mg/L</i>	≤ 0.5

Determinant	Risk	Unit	Standard limits
Copper as Cu	Chronic health	<i>mg/L</i>	≤ 2
Cyanide (recoverable) as CN ⁻	Acute health – 1	<i>mg/L</i>	≤ 0.07
Iron as Fe	Chronic health	<i>mg/L</i>	≤ 2
	Aesthetic	<i>mg/L</i>	≤ 0.3
Lead as Pb	Chronic health	<i>mg/L</i>	≤ 0.01
Manganese as Mn	Chronic health	<i>mg/L</i>	≤ 0.4
	Aesthetic	<i>mg/L</i>	≤ 0.1
Mercury as Hg	Chronic health	<i>mg/L</i>	≤ 0.006
Nickel as Ni	Chronic health	<i>mg/L</i>	≤ 0.07
Selenium as Se	Chronic health	<i>mg/L</i>	≤ 0.04
Uranium as U	Chronic health	<i>mg/L</i>	≤ 0.015
Vanadium as V	Chronic health	<i>mg/L</i>	≤ 0.2
Organic determinants			
Total organic carbon	Acute health – 1	<i>mg/L</i>	≤ 10

Table 3: Average concentrations of indicator parameters for the 2018/2019 monitoring year

Site Name	pH	TDS	Ca	Mg	Na	K	Cl	SO ⁴	NO ³	Fe	Mn
		mg/l	mg/l	mg/l	mg/l	mg/l	mg/l	mg/l	mg/l	mg/l	mg/l
BMRWWTW	8.4	951	99	60	135	2	23	460	3.016	-0.009	0.081
EM11	7.5	2179	264	236	223	12	886	331	0.692	0.263	0.888
EM16	8.1	3437	402	266	410	4	1083	1018	0.781	-0.009	3.525
NB01	-	-	-	-	-	-	-	-	-	-	-
NB03	8.3	1104	91	110	109	18	64	533	-0.459	-0.009	0.196
NB04	8.0	451	30	27	43	12	18	1	0.085	-0.009	0.166
NB48	-	-	-	-	-	-	-	-	-	-	-
NB52	7.9	1797	104	41	87	57	58	119	54.429	0.830	0.567
NB56	8.4	681	17	47	133	18	68	84	0.596	-0.009	0.080
NB57	8.4	775	13	50	138	18	61	114	0.152	-0.009	0.061
NBH07	7.4	25630	3332	824	4674	121	15538	1	0.097	0.505	53.760
S011	7.4	6664	565	203	1218	5	78	4074	10.480	0.017	4.873
S051	8.0	1406	117	133	158	7	104	594	2.249	-0.009	0.058
S102	8.2	6448	115	265	1822	15	1209	2567	-0.212	-0.002	0.091
S104	8.2	1123	93	63	197	4	43	466	1.222	0.038	0.243
S120	9.3	20319	29	185	6708	43	596	11796	-0.034	0.159	0.328
S160	8.2	2223	163	98	463	4	530	675	0.746	-0.009	0.024
S230	8.4	6175	142	74	1785	81	352	2395	-0.459	0.019	0.496
S373	8.1	2982	334	264	359	10	1198	380	0.696	0.000	0.050
S374	7.0	6781	778	512	915	47	3816	363	47.432	0.007	1.351
S386	7.8	4448	759	136	610	7	723	1927	-0.459	-0.009	0.138
S388	7.2	3333	480	174	365	26	56	1678	-0.459	1.930	1.920
S389	8.0	15305	422	430	4360	18	2235	7148	-0.459	0.126	0.331
S400	7.5	3055	281	208	461	2	299	1483	2.770	-0.009	0.188
S403	7.8	1471	119	60	298	8	33	744	1.688	-0.002	0.023
S405	-	-	-	-	-	-	-	-	-	-	-
S407	8.2	2756	213	184	479	4	287	1252	2.493	-0.009	0.057
S409	8.5	2749	146	151	481	18	99	1209	2.599	0.013	0.045
S410	8.3	2271	160	182	313	9	136	1025	3.370	-0.009	0.076
S418	7.2	56992	480	136	18210	66	481	36978	-0.264	18.306	27.906

***RED – Exceeds SANS maximum limit for drinking water**

2.1 WATERVAL SMELTER, CONCENTRATOR, AND ACID PLANT

Three boreholes were in use to monitor groundwater impacts at the Waterval Processing area during the 2006/07 monitoring year. Thirteen monitoring boreholes were added in order to sufficiently cover the area. Ten boreholes were monitored during the 2015/2016 monitoring year. In the 2018/2019 monitoring year, 7 boreholes remained as part of the monitoring plan of which 5 were sampled and their positions are indicated in **Figure 3**

This processing complex consists of a number of processing modules including the Waterval Concentrator, Waterval Smelter, UG2 Concentrator and the Acid Plant. The larger part of the surface area underlying the Waterval Processing area is lined by concrete surfaces and effluent dams like storm water control, settling and return water dams are lined with synthetic or clay liners. Seepage and leachate formation however still emanates from the Waterval Processing area.

The Waterval Processing area is situated to the south of an east-west trending surface water divide and groundwater flow will be in the same direction as surface flow, namely southwards. Groundwater seepage and mass transport will thus also occur southwards and then west in the direction of flow of the Klipfontein Spruit.



Figure 3: Positions of monitoring boreholes in the Waterval Processing area

Time-series plots of indicator chemical parameters for the Waterval Processing area are presented in **Figures 4 and 5**.

Average groundwater **TDS** concentrations for the 2018/2019 monitoring year in S104 and NB03 varied between ± 1100 mg/l and $1\,125$ mg/l, which are just below the permissible SANS value of $1\,200$ mg/l, however, they did on numerous sampling runs exceed the permissible levels. Groundwater salinity measured in monitoring boreholes S051, S400 and S407 exceeded the maximum concentration allowed in drinking water and displayed averages of between $\pm 1\,400$ mg/l and $3\,060$ mg/l. The highest concentration was measured in S407 and time-series graphs provided in **Figure 4** display an increasing trend for this borehole. **No guideline TDS value is specified by the Water Use License for RPM.**

The **sulphate** content measured in S051, S400, S407 and NB03 exceeded the SANS guideline value of 500 mg/l and displayed averages of between ± 530 mg/l and $1\,480$ mg/l. Again, the highest concentrations were measured in monitoring borehole 407, which also displayed a general increase in the groundwater sulphate content (**Figure 4**). An average of 466 mg/l was measured in borehole S104, which just falls short of the maximum concentration allowed in drinking water. **The groundwater sulphate content measured in all monitoring boreholes far exceeded the RPM WUL guideline concentration of 20 mg/l throughout the entire evaluation period.**

Groundwater **chloride** concentrations measured in the majority of monitoring boreholes remained below the permissible SANS value of 300 mg/l during the 2018/2019 monitoring period (**Figure 5**). The highest concentrations were once again measured in monitoring boreholes S400 and S407, which displayed an average ± 300 and 290 mg/l respectively. The downgradient monitoring borehole S407 also displayed an increasing concentration trend for chloride, not exceeding the maximum permissible limits for drinking water (300 mg/l). **The groundwater chloride content within the immediate vicinity of the Waterval Processing area exceeded the RPM WUL guideline concentration of 14 mg/l.**

Groundwater **sodium** concentrations measured in monitoring boreholes S400 and S407 exceeded the permissible SANS value of 200 mg/l during the past monitoring year and displayed averages of ± 460 mg/l and 480 mg/l respectively. Averages of between ± 110 mg/l and 200 mg/l were measured in the remainder of groundwater monitoring boreholes, which are within the maximum concentration allowed in drinking water. The groundwater sodium content in S140 seems to have decreased during the past monitoring year, while the concentrations in S407 and S102 increased (**Figure 5**). **The WUL guideline concentration of 22 mg/l was exceeded in all boreholes during the 2018/2019 monitoring year.**

Groundwater **nitrate** concentrations remained below the permissible SANS value of 11 mg/l throughout the entire monitoring period. Monitoring boreholes displayed averages from less than 1 mg/l to 2.8 mg/l. Higher than ambient nitrate concentrations were observed in S051, S400 and S407. Increasing nitrate concentration trends were also observed in both these boreholes over the monitoring period. **The nitrate content of groundwater within the immediate vicinity of the Waterval Processing area exceeded the RPM WUL guideline concentration of 0.2 mg/l in all boreholes, except for NB03.**

According to **Figures 6 and 7** the Waterval Processing area is mainly dominated by groundwater that is usually a mix of different types – either clean water from fields 1 and 2 of the Expanded Durov diagram (EDD) that has undergone sulphate and sodium chloride mixing/contamination or old stagnant sodium chloride dominated water that has mixed with clean water – groundwater is therefore dominated by **magnesium/sodium** cations, while **sulphate/chloride** dominates the anion content. This indicates that the groundwater has definitely experienced adverse effects from the Waterval processing area activities.

The dominant plot position in field 5 of the EDD confirms definite impacts of the Waterval Processing area on the natural groundwater environment.

Average **water levels** for the Smelter and ACP monitoring boreholes varied between 2 and 4 meters below surface (mbs). NB03 displayed a decreasing water level trend (**Figure 8**).

Summary:

- Definite impacts from the Waterval Processing area occur on the down gradient groundwater environment.
- Sulphate is especially of concern, as the majority of groundwater monitoring boreholes indicated elevated concentrations.
- Up gradient groundwater monitoring borehole S407 displayed the highest levels of pollution throughout the 2018/2019 monitoring year, however the pollution is unlikely to originate from the Waterval Processing area.
- S400 also had overall high borehole concentration levels, however it only had a single sample taken and its level of pollution can't be determined definitively.
- Increasing parameter concentrations in the downgradient monitoring borehole, S407 are often observed over the monitoring period.
- **Concentrations of indicator chemical parameters do not comply with the water quality objectives stated in the RPM Water Use License.**
- Water levels vary between 2 and 4 mbs.

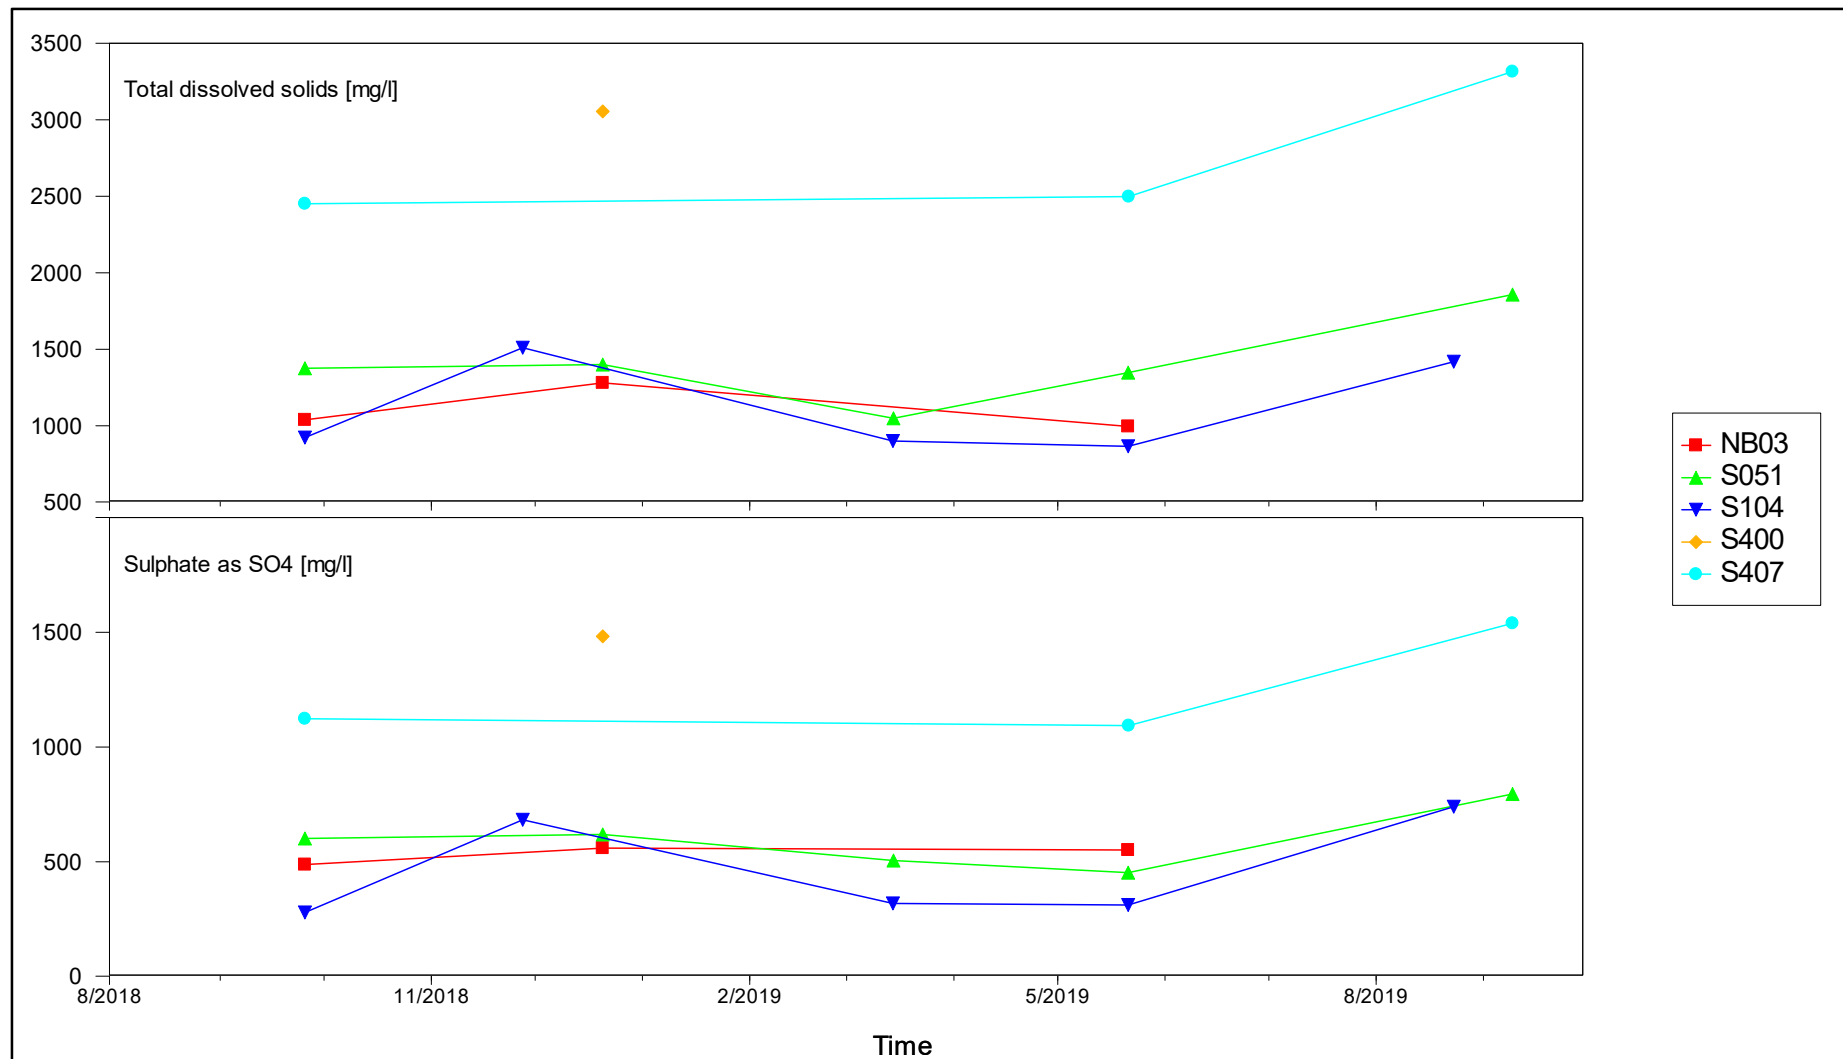


Figure 4: Time-series plot of indicator chemical parameters in the Waterval Processing area – TDS and SO₄

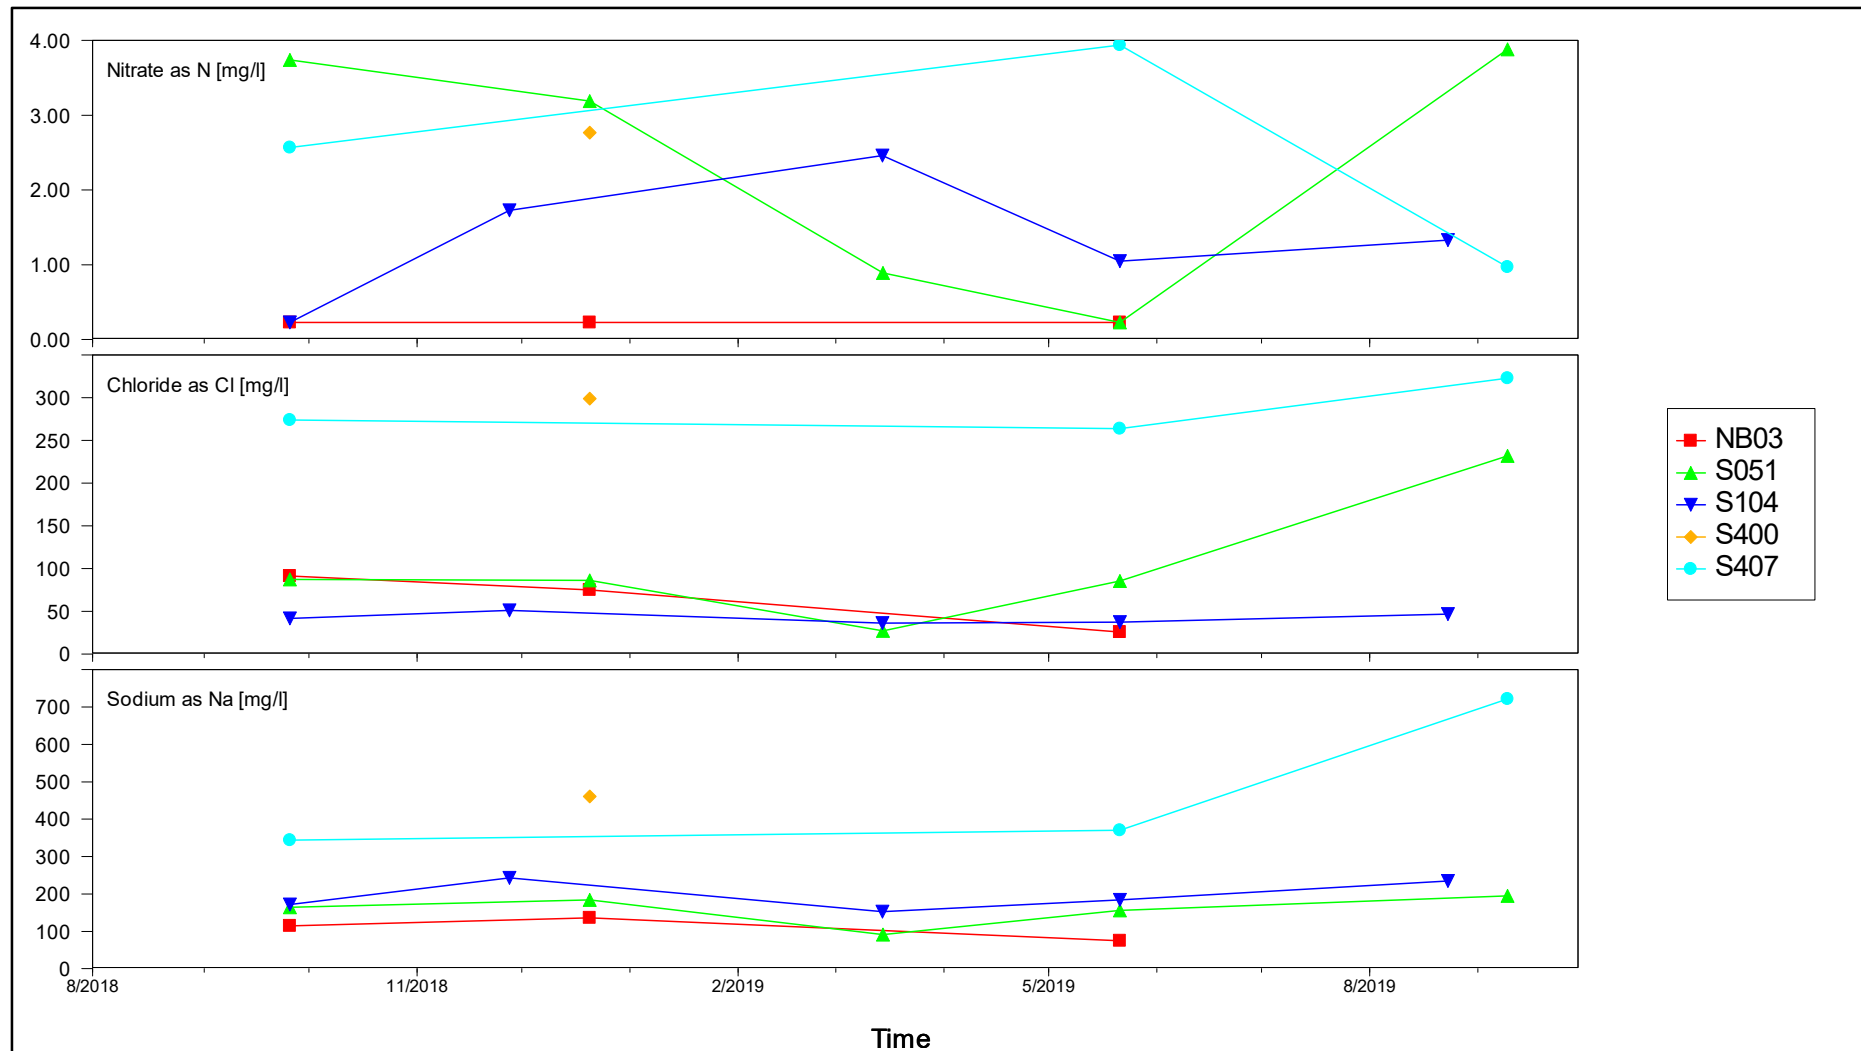


Figure 5: Time-series plot of indicator chemical parameters in the Waterval Processing area – NO₃, Cl and Na

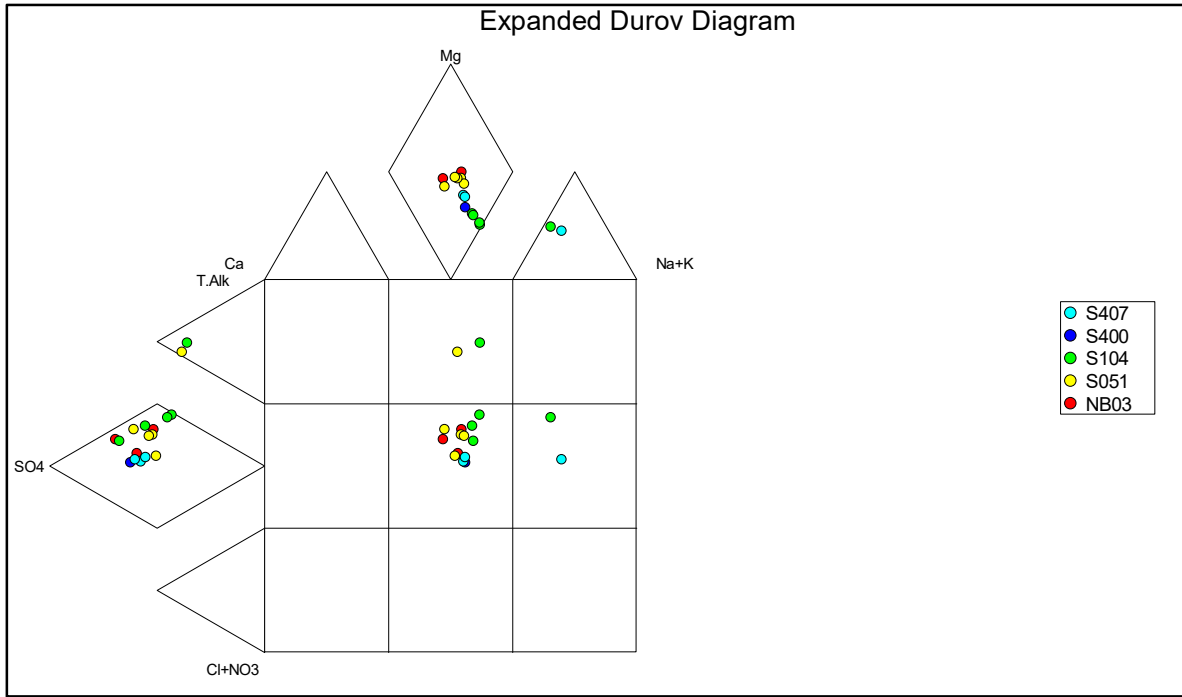


Figure 6: EDD of groundwater chemistry in the Waterval Processing area

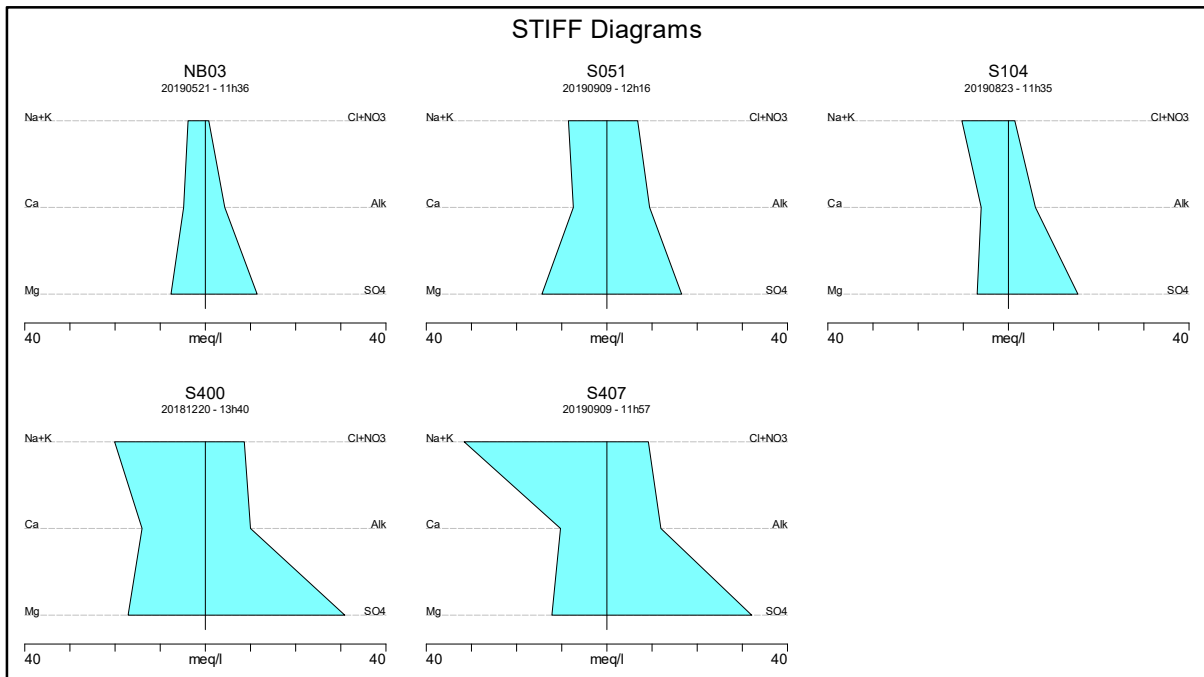


Figure 7: Stiff diagrams of groundwater chemistry in the Waterval Processing area

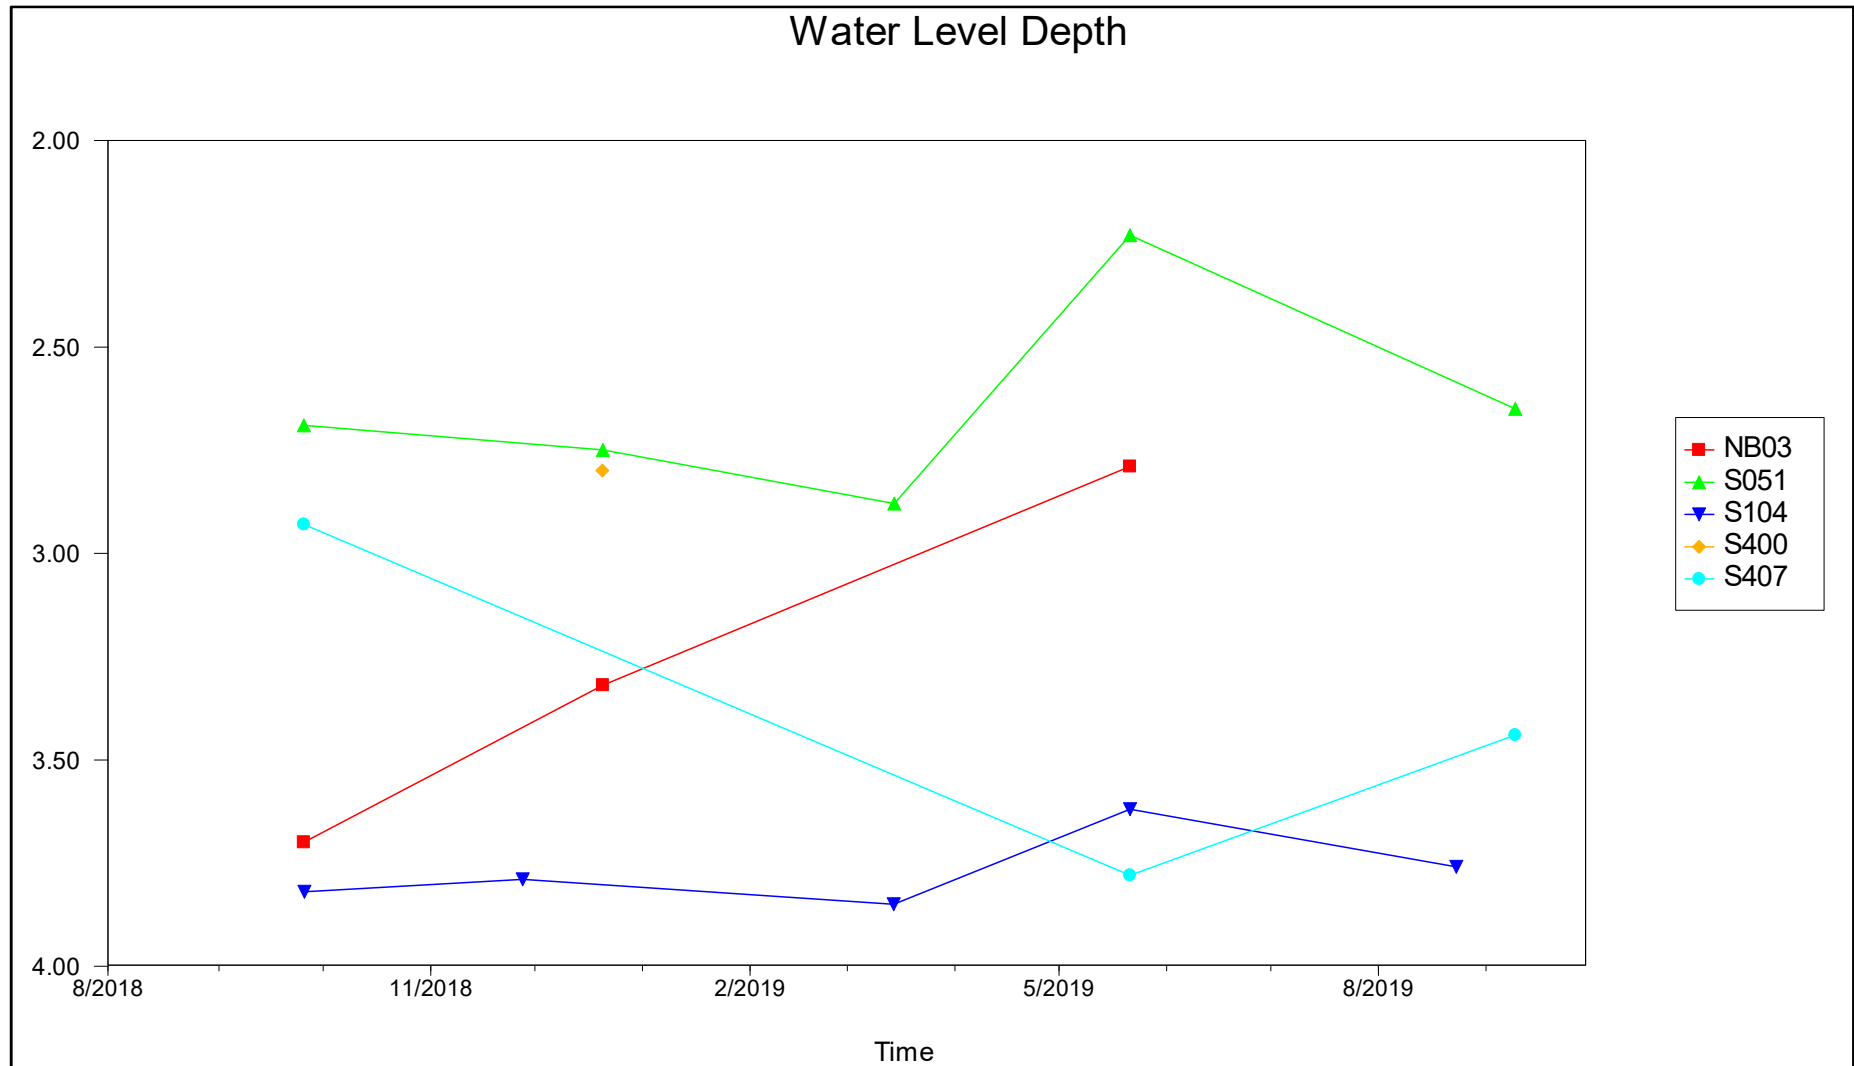


Figure 8: Time series plot of water levels for in the Waterval Processing area

2.2 THE RUSTENBURG BASE METAL REFINERY (RBMR)

Seven boreholes were historically used to monitor groundwater impacts at the Rustenburg Base Metal Refinery (RBMR). The distribution and number of monitoring boreholes were insufficient during previous monitoring years, after which boreholes were drilled and existing ones were added to the more extensive monitoring programme.

A total of 15 boreholes were monitored in the Rustenburg Base Metal Refinery area during the 2018/2019 monitoring period and their positions are indicated in **Figure 9**.

This processing complex consists of a large base metal refinery area with associated effluent dams for storage of process water. The most notable of these are the sodium sulphate solution area to the south-east of the refinery where highly concentrated sodium sulphate solution by-product is treated and dried. The groundwater pollution in this area is by far the dominant impact of the RBMR area as a result of leachate formation as well as seepage from effluent dams where historical liners were not fully impervious.

The larger part of the surface area underlying the actual refinery is lined by concrete surfaces, but historical leaks and dumping caused the formation of a large diffuse source area for contamination. Seepage and leachate formation thus still emanates from the RBMR area and remediation plans target the RBMR as the first priority area. The RBMR is situated on the southern banks of the Klipfontein Spruit directly opposite the Waterval Processing area. Groundwater flow and mass transport from the site is northwards in the direction of the Klipfontein Spruit (**Figure 9**).

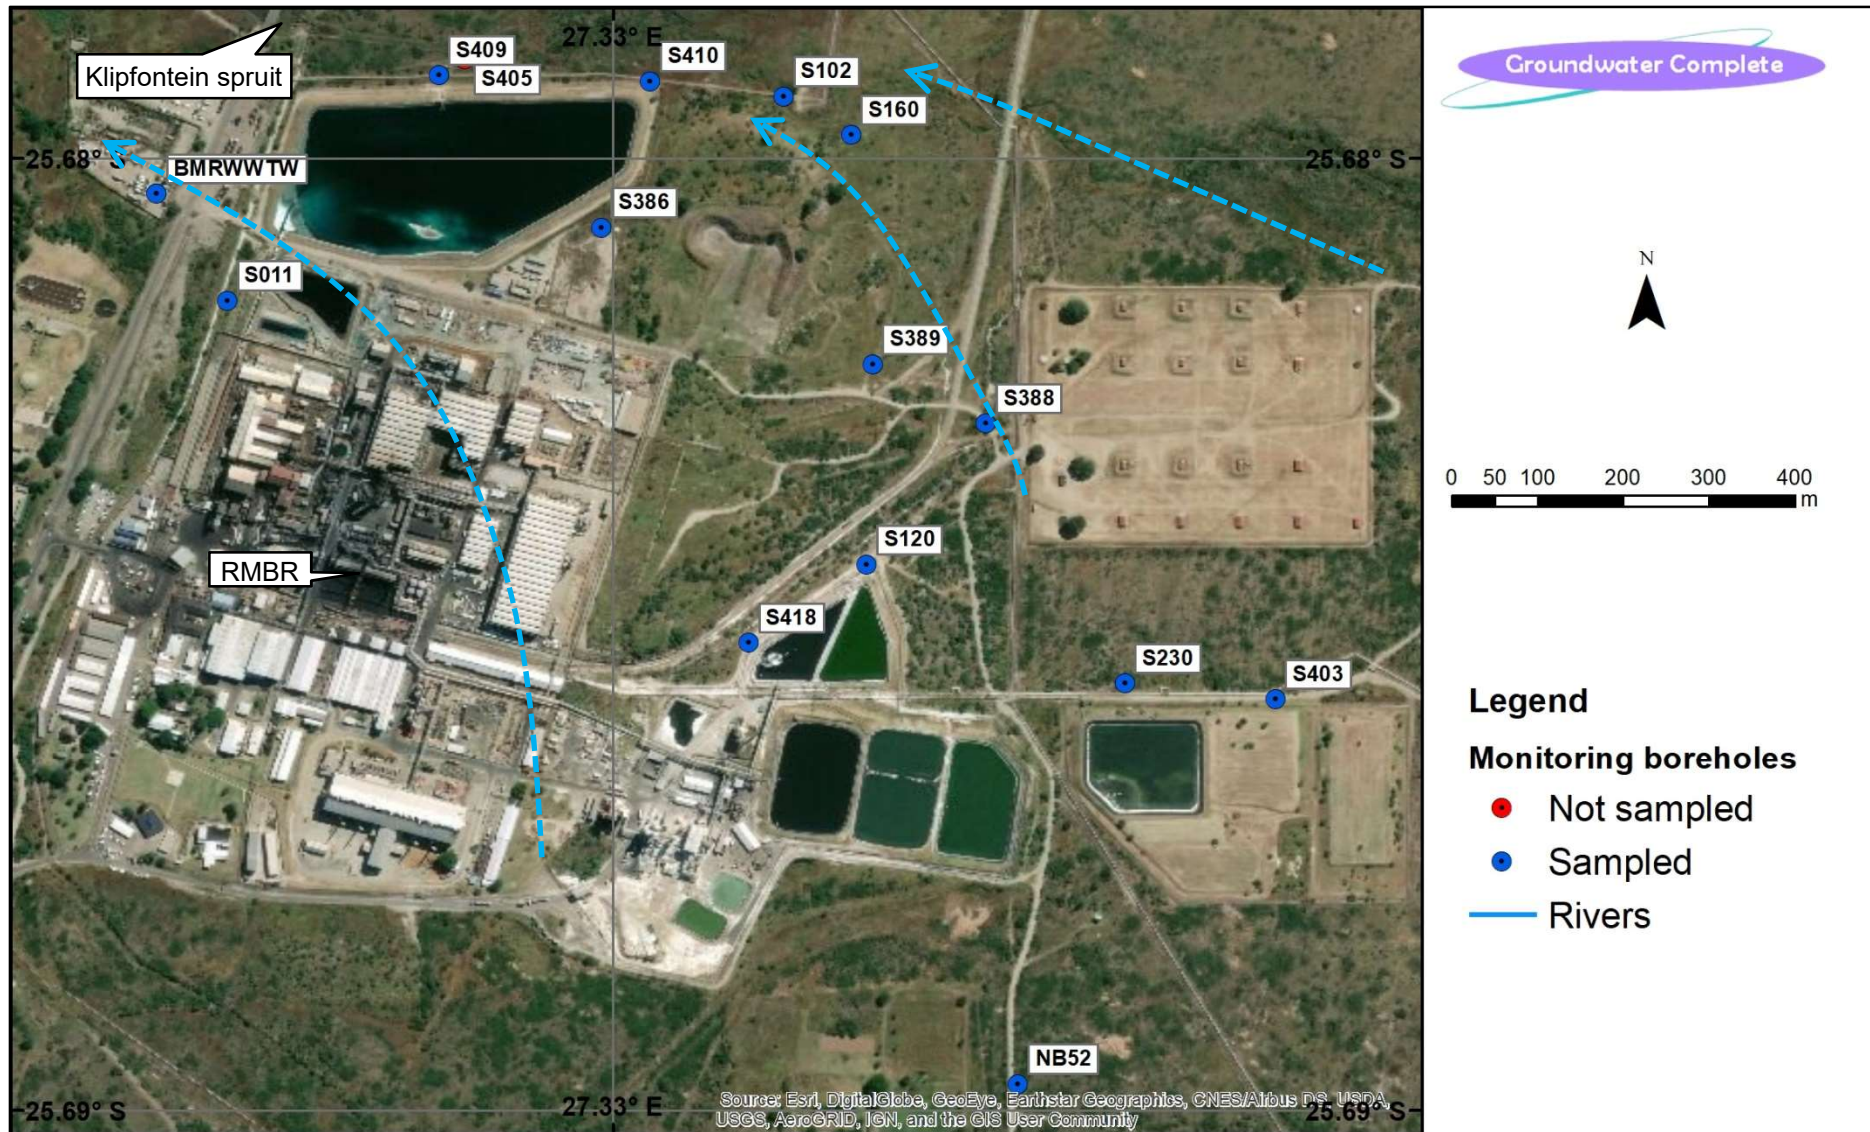


Figure 9: Positions of monitoring boreholes in the RBMR area

Time-series plots of the indicator chemical parameters for the RBMR area are presented in **Figures 10 and 11**.

The groundwater **TDS** concentrations for all the RBMR boreholes, except BMRWWTW, far exceeded the permissible SANS value of 1 200 mg/l during the 2018/2019 monitoring year. Averages in the down gradient groundwater flow direction varied between \pm 1 470 mg/l and 57 000 mg/l. The highest concentrations by far were measured down gradient from the sodium sulphate solution area in monitoring borehole S418. The TDS concentration in S418 increased further over the monitoring period with the highest concentration measured in May 2019 at 86 750 mg/l. The TDS concentrations in the remainder of the boreholes remained relatively constant over the monitoring period (**Figure 10**). Exceptions did occur and some boreholes displayed much lower salinities throughout the year. Variations within such short distances might indicate the presence of groundwater compartments created by low transmissivity dykes. **No guideline TDS value is specified by the Water Use License for RPM.**

Sulphate and sodium (**Figures 12 and 13**) make up most of the inorganic salinity in the groundwater. Average **sulphate** concentrations measured in the majority of groundwater monitoring boreholes varied between \pm 740 mg/l and 36 980 mg/l, which far exceed the permissible SANS value of 500 mg/l. The groundwater sulphate content measured in boreholes BMRWWTW and NB52 did however remain below the SANS acute health guideline value for drinking water throughout the evaluation period, with averages of 460 and 120 mg/l respectively. Borehole S418 is located directly down gradient from the sodium sulphate solution area and indicated the most profound sulphate pollution. Similar to groundwater salinity, the sulphate content in S418 have increased during the past monitoring year (**Figure 10**). A concentration exceeding 55 000 mg/l was measured in May 2019 in this borehole. **The RPM WUL guideline concentration of 20 mg/l was exceeded by all monitoring boreholes.**

Groundwater **sodium** and sulphate concentrations displayed much the same distribution and trends with the highest levels of pollution being measured down gradient from the sodium sulphate solution area in monitoring borehole S418. The groundwater sodium content measured in the majority of the monitoring boreholes far exceeded the permissible SANS concentration of 200 mg/l and displayed averages of between \pm 300 mg/l and 18 200 mg/l. Once again similar to groundwater salinity and sulphate, the sodium content in S418 has increased during the past monitoring year (**Figure 10**). **The groundwater sodium content measured in all monitoring boreholes exceeded the RPM WUL guideline concentration of 22 mg/l throughout most of the past monitoring year.**

Average **nitrate** concentrations measured in groundwater both up and down gradient from the RBMR area are below the permissible SANS value of 11 mg/l. Monitoring borehole S409 displayed an average concentration of 10 mg/l, which is higher than the surrounding monitoring boreholes. The remainder of the boreholes had average nitrate concentrations from below detection limit to 3.5 mg/l. Some fluctuation in concentrations were measured in

most boreholes throughout the past monitoring year (**Figure 11**). The nitrate concentration in NB52 increased significantly over the past monitoring year. The reason for the increase is unknown, but definitely not caused by the RBMR, as it is in the up-gradient direction of groundwater flow. **The RPM WUL guideline concentration of 0.2 mg/l was exceeded in all monitoring boreholes, except S386, S389, S388 and S230, of which the concentrations were all below detection level.**

Groundwater monitoring boreholes S102, S120, S160, S230, S386, S389 and S418 displayed average groundwater **chloride** concentrations of between \pm 350 mg/l and 2 230 mg/l, which exceed the permissible SANS value of 300 mg/l. Averages measured in the remainder of boreholes are within the maximum concentration allowed in drinking water. The highest concentrations were measured in S389, which, however, displayed a decreasing trend over the monitoring period (**Figure 11**). The concentration in S102 also decreased significantly over the monitoring period. **The chloride content of groundwater within the immediate vicinity of the RBMR operations exceeded the RPM WUL guideline concentration of 14 mg/l.**

The groundwater **iron** content measured in the majority of monitoring boreholes remained below the detection limit of 0.0045 mg/l throughout the past monitoring year. Monitoring borehole S418 was however the exception and displayed an average of \pm 18 mg/l, which far exceeds the permissible SANS concentration of 2 mg/l. Significant fluctuations in the groundwater iron content have been measured in S418 throughout the past 10 years, which is only possible under unstable groundwater pH conditions. **No guideline concentration is specified for iron in the Water Use License for RPM.**

According to **Figures 12 and 13** the following types of groundwater are predominant within the immediate vicinity of the RBMR area:

- Fresh, clean, relatively young groundwater – groundwater is therefore dominated by **calcium/magnesium/sodium** cations, while the anion content is dominated by **bicarbonate alkalinity**.
- Groundwater that is usually a mix of different types – either clean water from fields 1 and 2 of the EDD that has undergone sulphate and sodium chloride mixing/contamination or old stagnant sodium chloride dominated water that has mixed with clean water – groundwater is therefore dominated by **magnesium** cations and **sulphate** anions.
- Groundwater that has been in contact with a source rich in sodium or old stagnant sodium chloride dominated water that resides in sodium rich host rock/material – groundwater is therefore dominated by **sodium/potassium** cations, while **sulphate** dominates the anion content.

The plot positions in fields 5 and 6 of the EDD confirm definite impacts of the processing facilities on the natural groundwater environment.

From the stiff diagrams in **Figure 13** it is clear that S120, S389 and S418 are the most significantly impacted on by the processing facilities with sulphate and sodium being the dominant ions.

The average **water levels** of the RBMR area are between 3 and 15 mbs. No significant increasing or decreasing water level trends (**Figure 14**) occur.

Summary:

- Significant pollution impacts from the RBMR occur on the groundwater environment.
- Impacts are by far the most significant in the sodium sulphate solution area to the south-east of the refinery.
- Groundwater iron concentrations measured in monitoring borehole S418 fluctuated significantly throughout the year, which may be the result of varying groundwater pH conditions.
- The most significant impacts from the refinery were measured in groundwater from boreholes S120, S389 and S418.
- The main contaminants of concern are sodium and sulphate.
- The extent of impact (plume) is however limited to within a few meters of the sources due to poor aquifer hydraulic properties.
- **The indicator chemical parameters do not comply with the water quality objectives stated in the RPM Water Use License.**

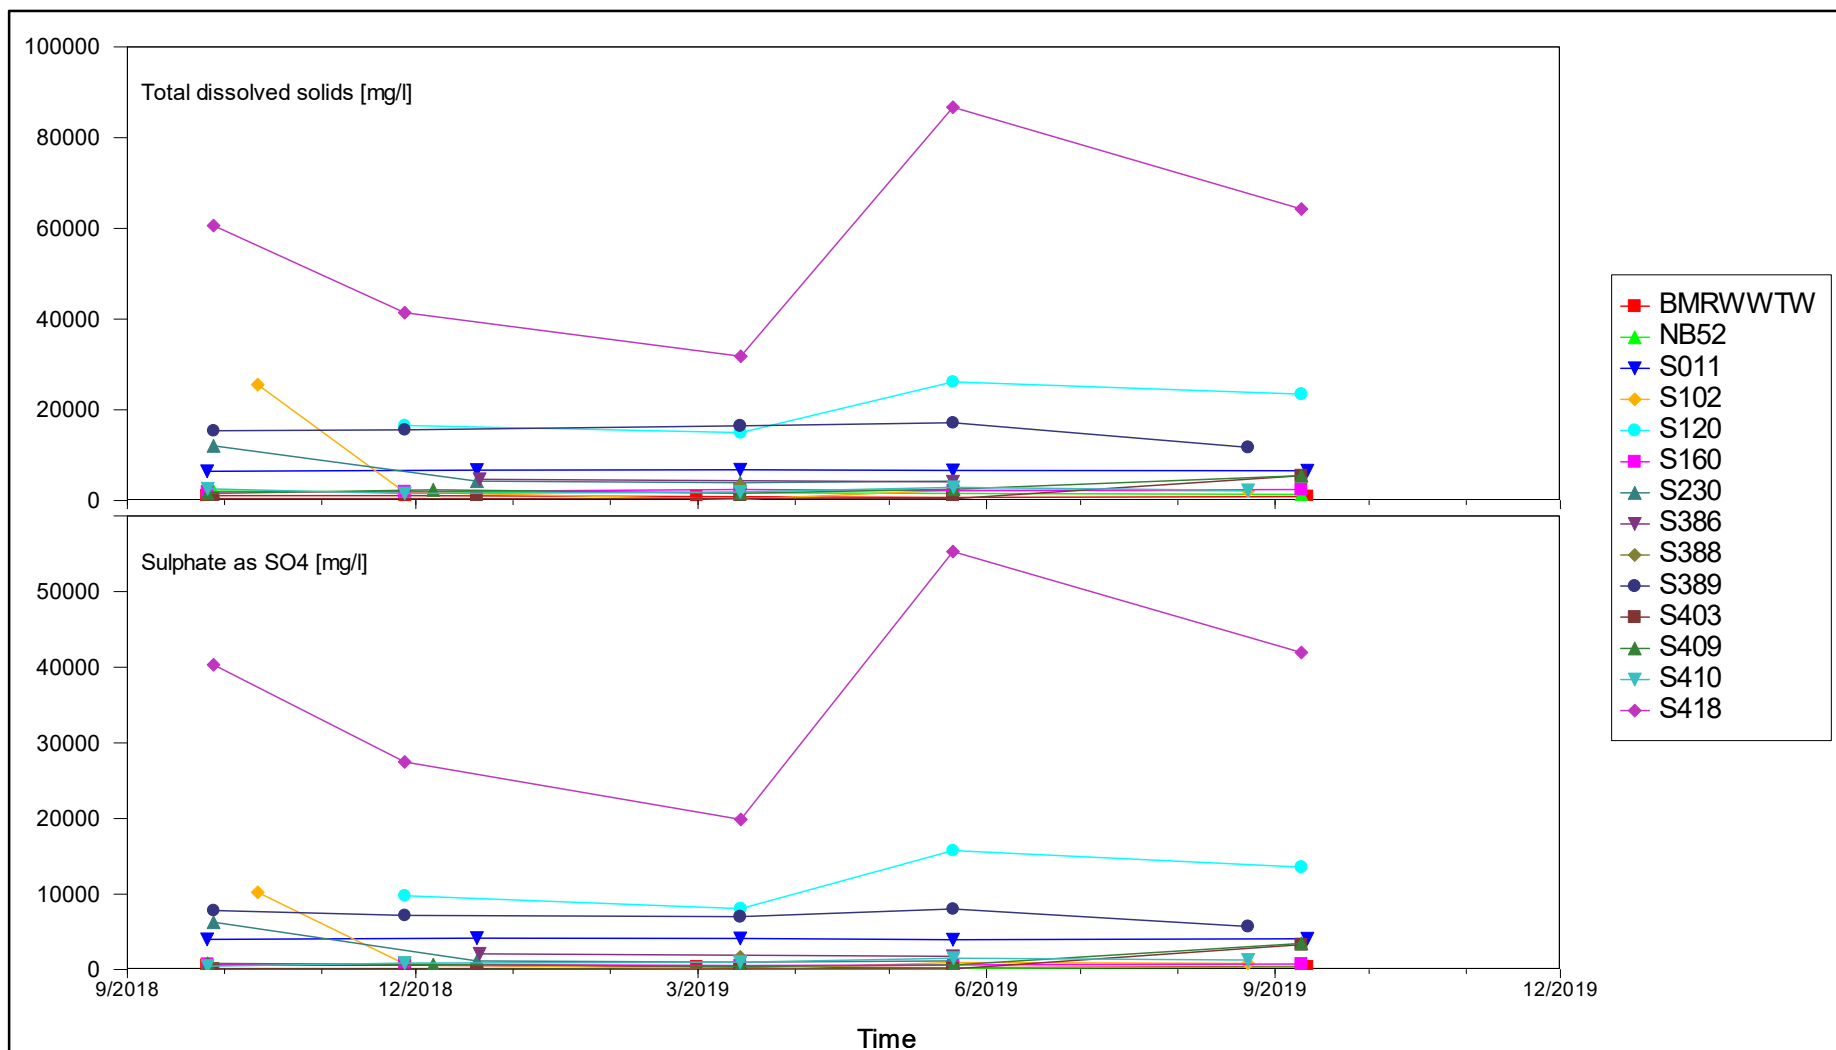


Figure 10: Time-series plot of indicator chemical parameters in the RBMR area – TDS and SO₄

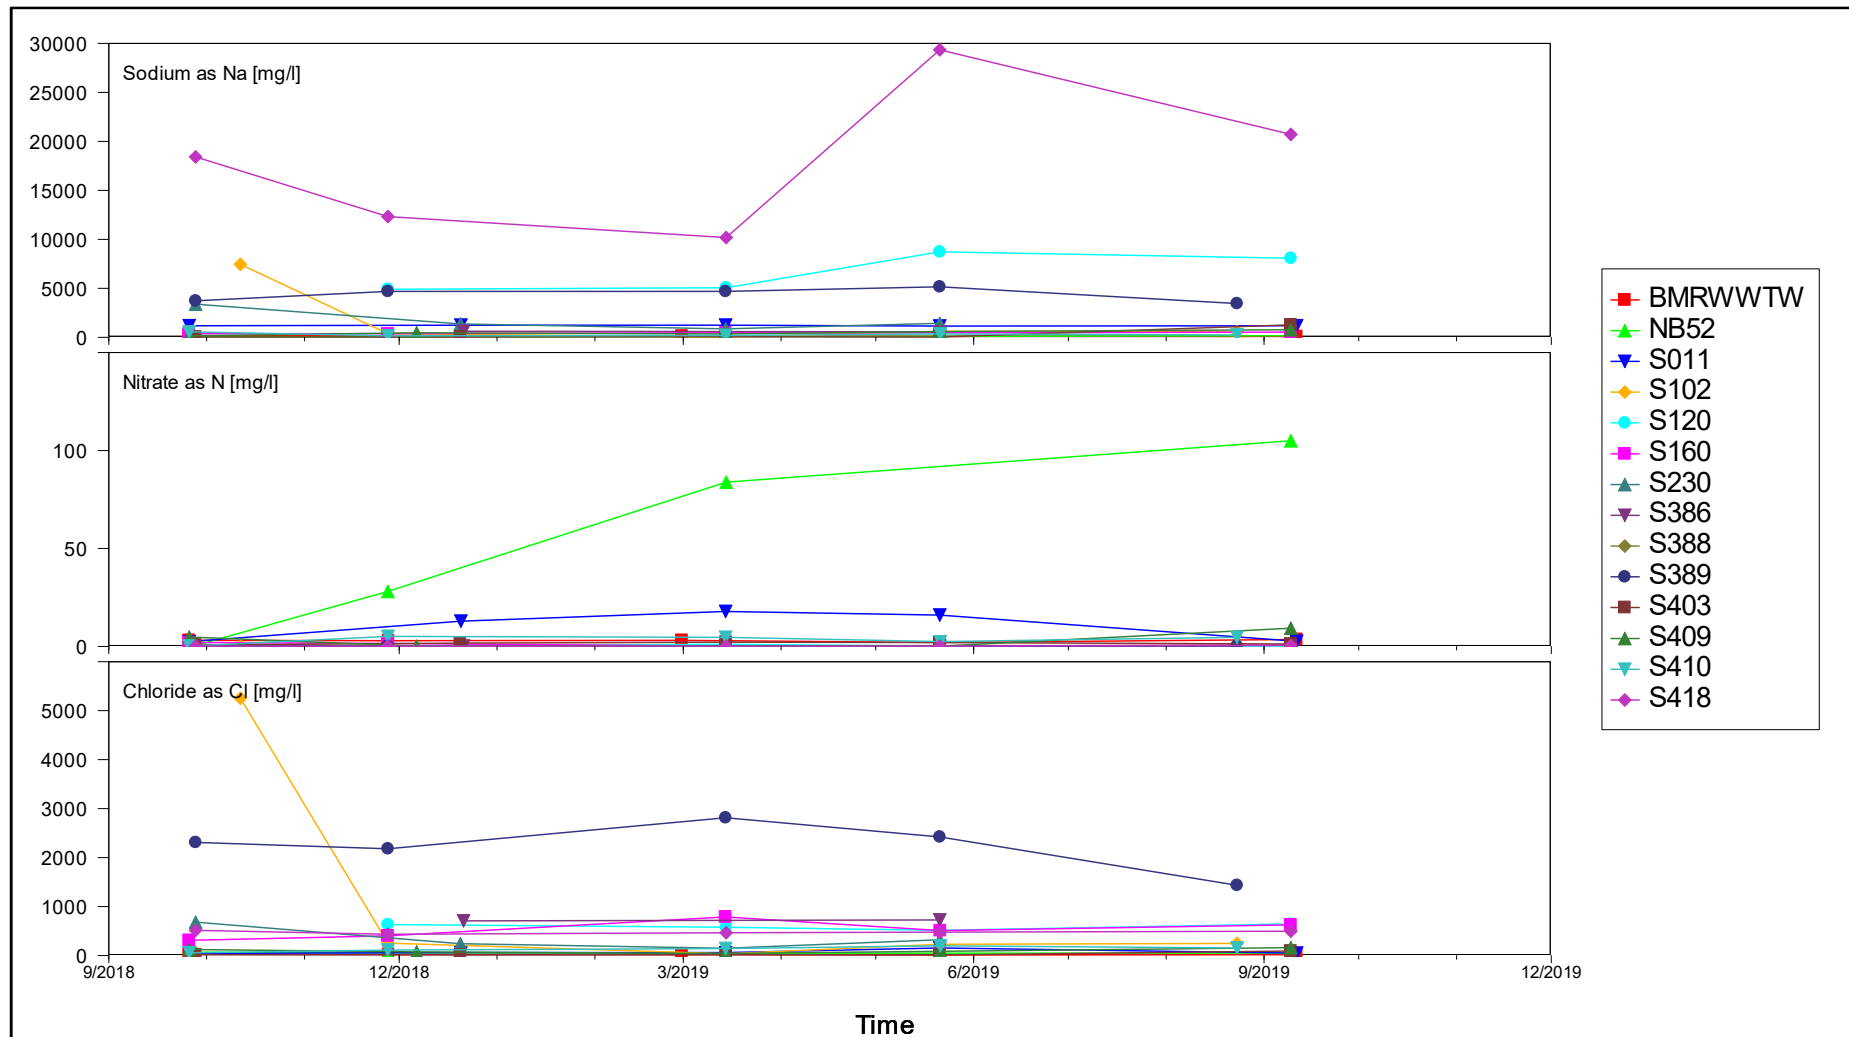


Figure 11: Time-series plot of indicator chemical parameters in the RBMR area – Na, NO₃ and Cl

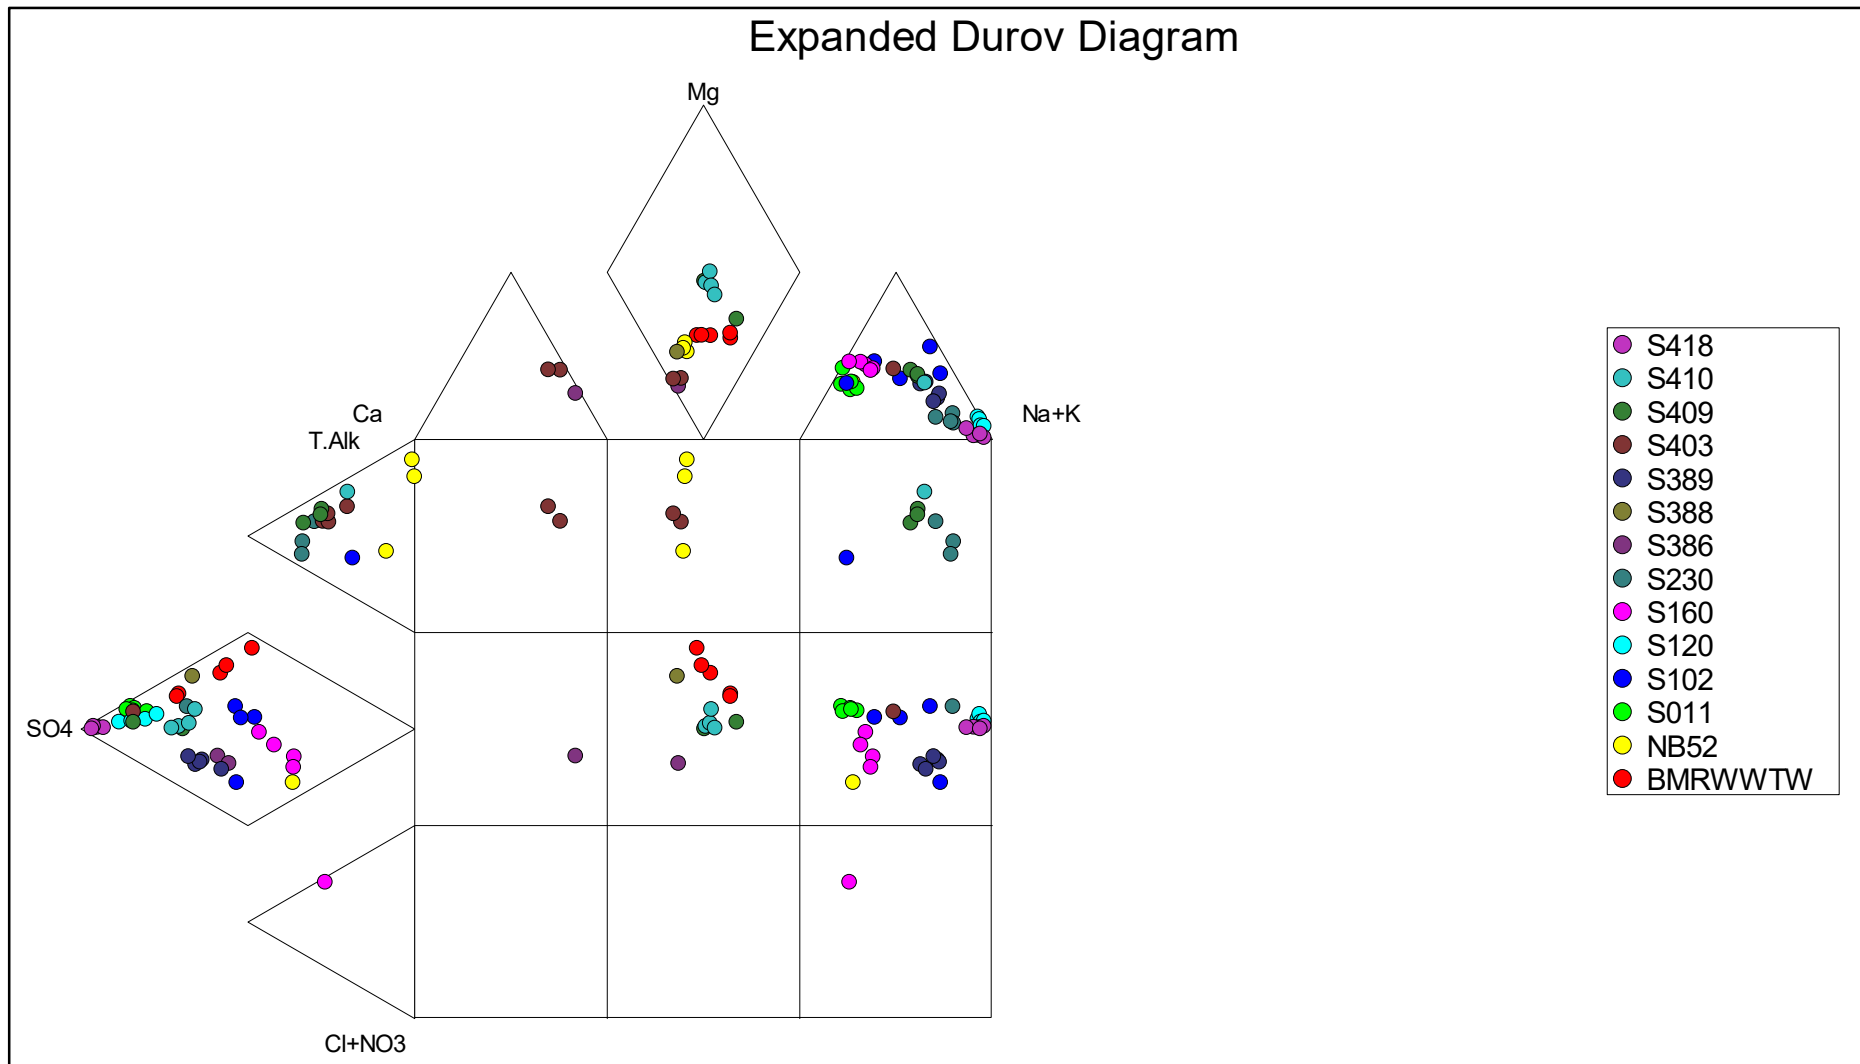


Figure 12: EDD of groundwater chemistry in the RBMR area

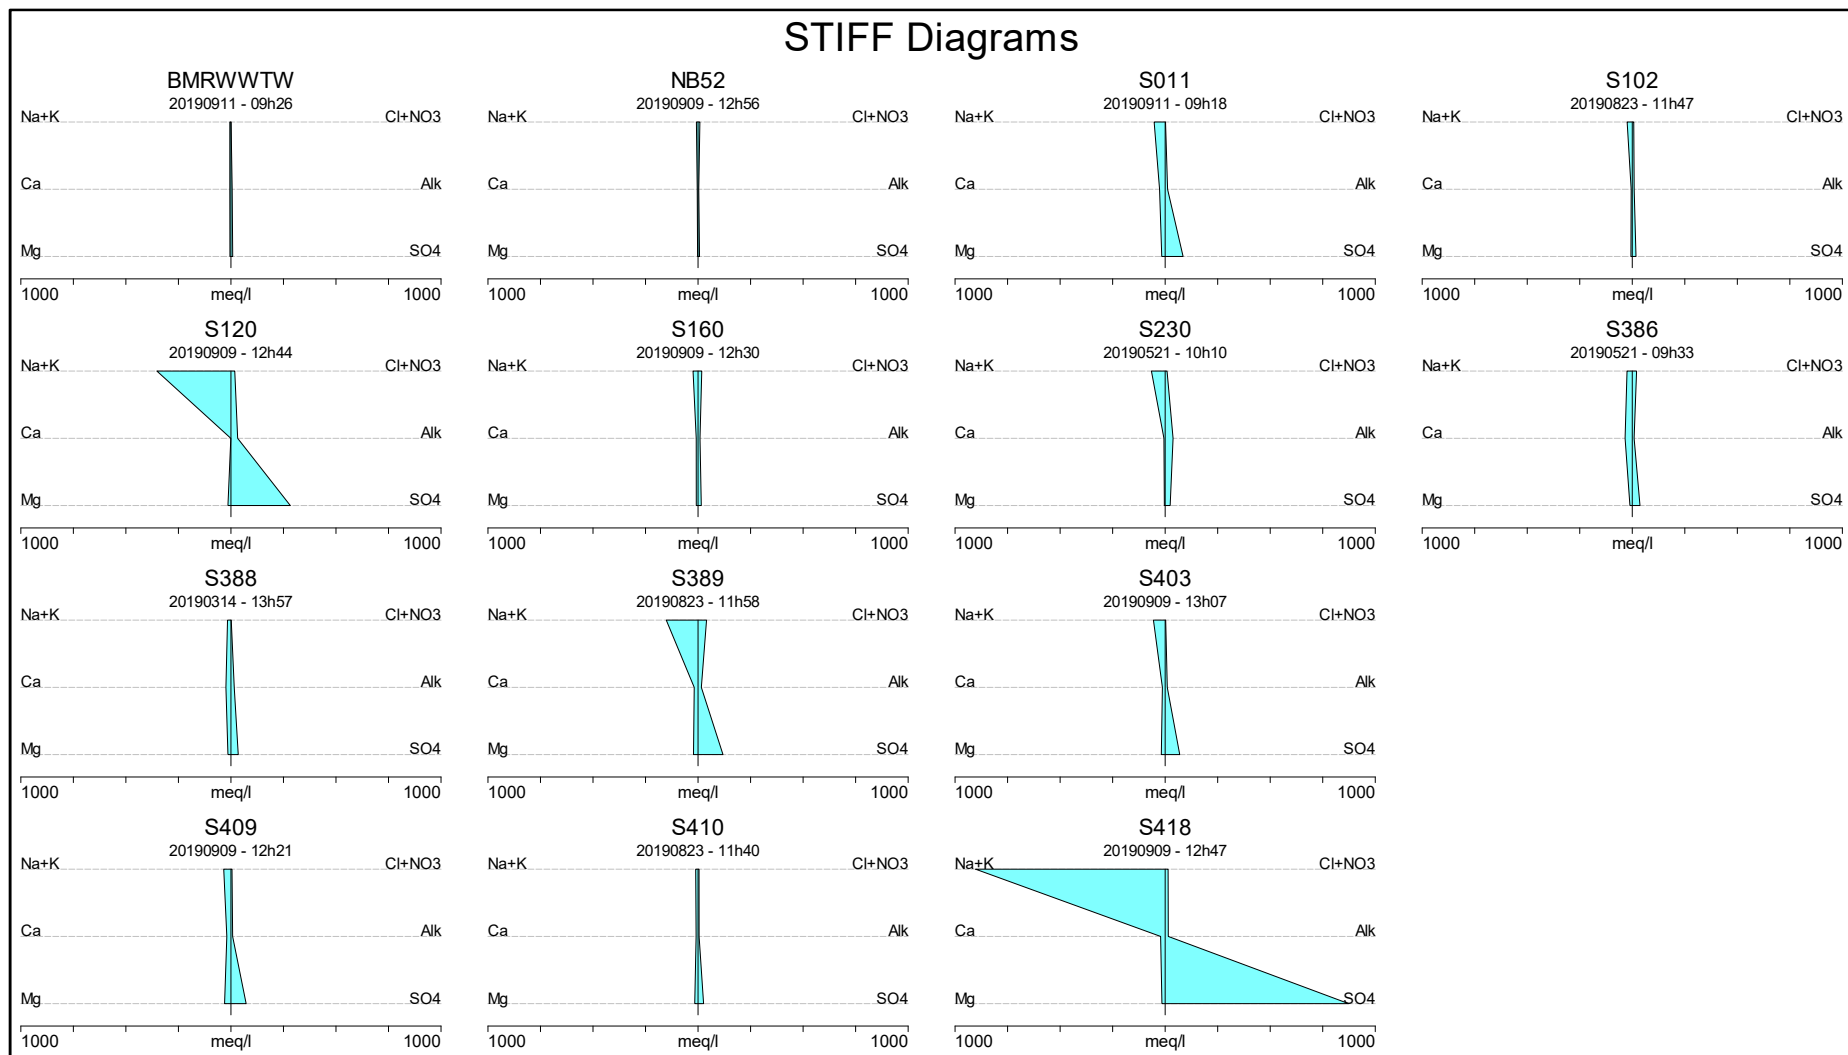


Figure 13: Stiff diagrams of groundwater chemistry in the RBMR area

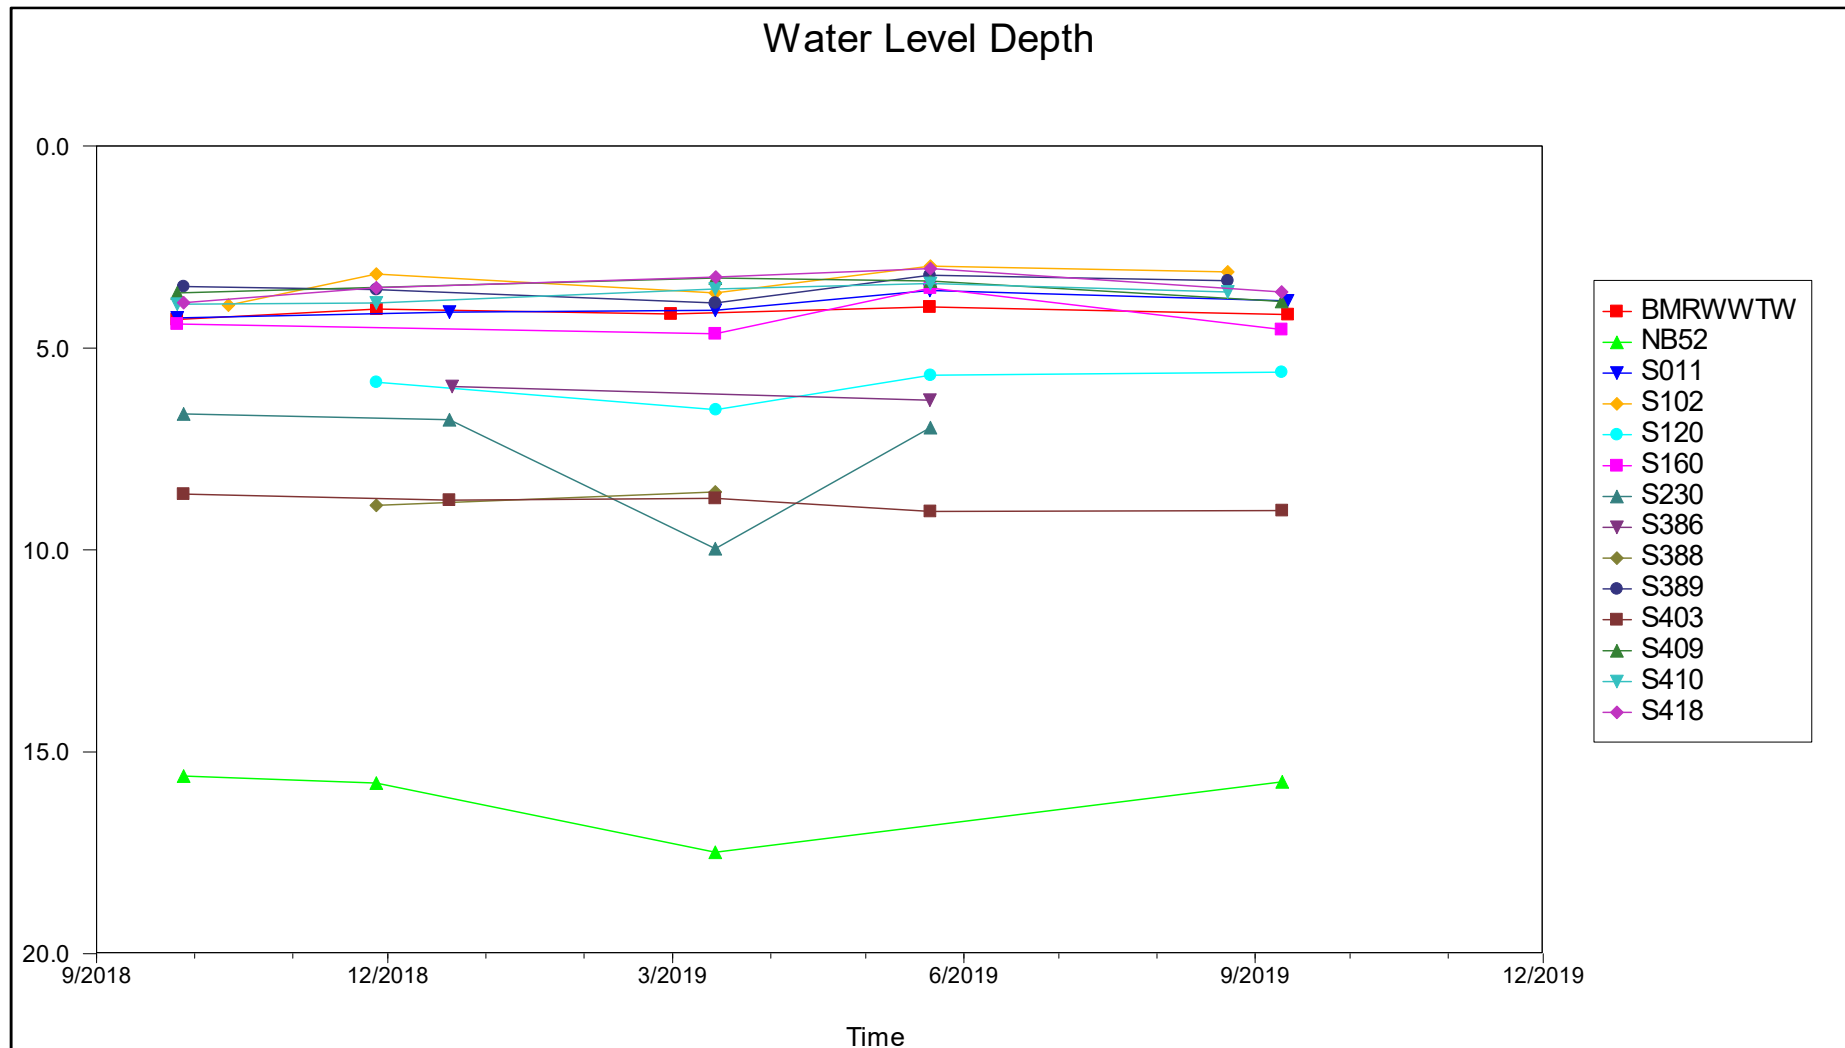


Figure 14: Time series plot of water levels for in the RBMR area

2.3 THE PRECIOUS METAL REFINERY (PMR) AND CENTRAL DEEPS SHAFT

Three boreholes were in use to monitor groundwater impacts at the Precious Metal Refinery (PMR) in 2006/2007. In an effort to increase the accuracy and efficiency of monitoring five existing boreholes were added to the monitoring program. Over the years boreholes became blocked and/or demolished and an additional source monitoring borehole, namely NBH07 was drilled approximately 60 meters down gradient from the refinery in 2013. The PMR consists of a refinery with a number of effluent dams for process water storage, settling and re-use. The precious platinum group metals are extracted at the PMR. The Central Deeps Shaft, which is located approximately 900 meters north of the PMR, is also included in this evaluation. A total of seven boreholes were monitored during the 2018/2019 monitoring year and their positions are indicated in **Figure 15**.

The PMR is a relatively new facility compared to other infrastructure at RPM and pollution control measures have been constructed according to more advanced pollution prevention technology. Leaking dam liners have however resulted in some groundwater contamination occurring in the area. The PMR is situated on the southern banks of the Klipfontein Spruit approximately 1.6 km east and up gradient from the RBMR. Groundwater flow and mass transport from the site is northwards in the direction of the Klipfontein Spruit (**Figure 15**).

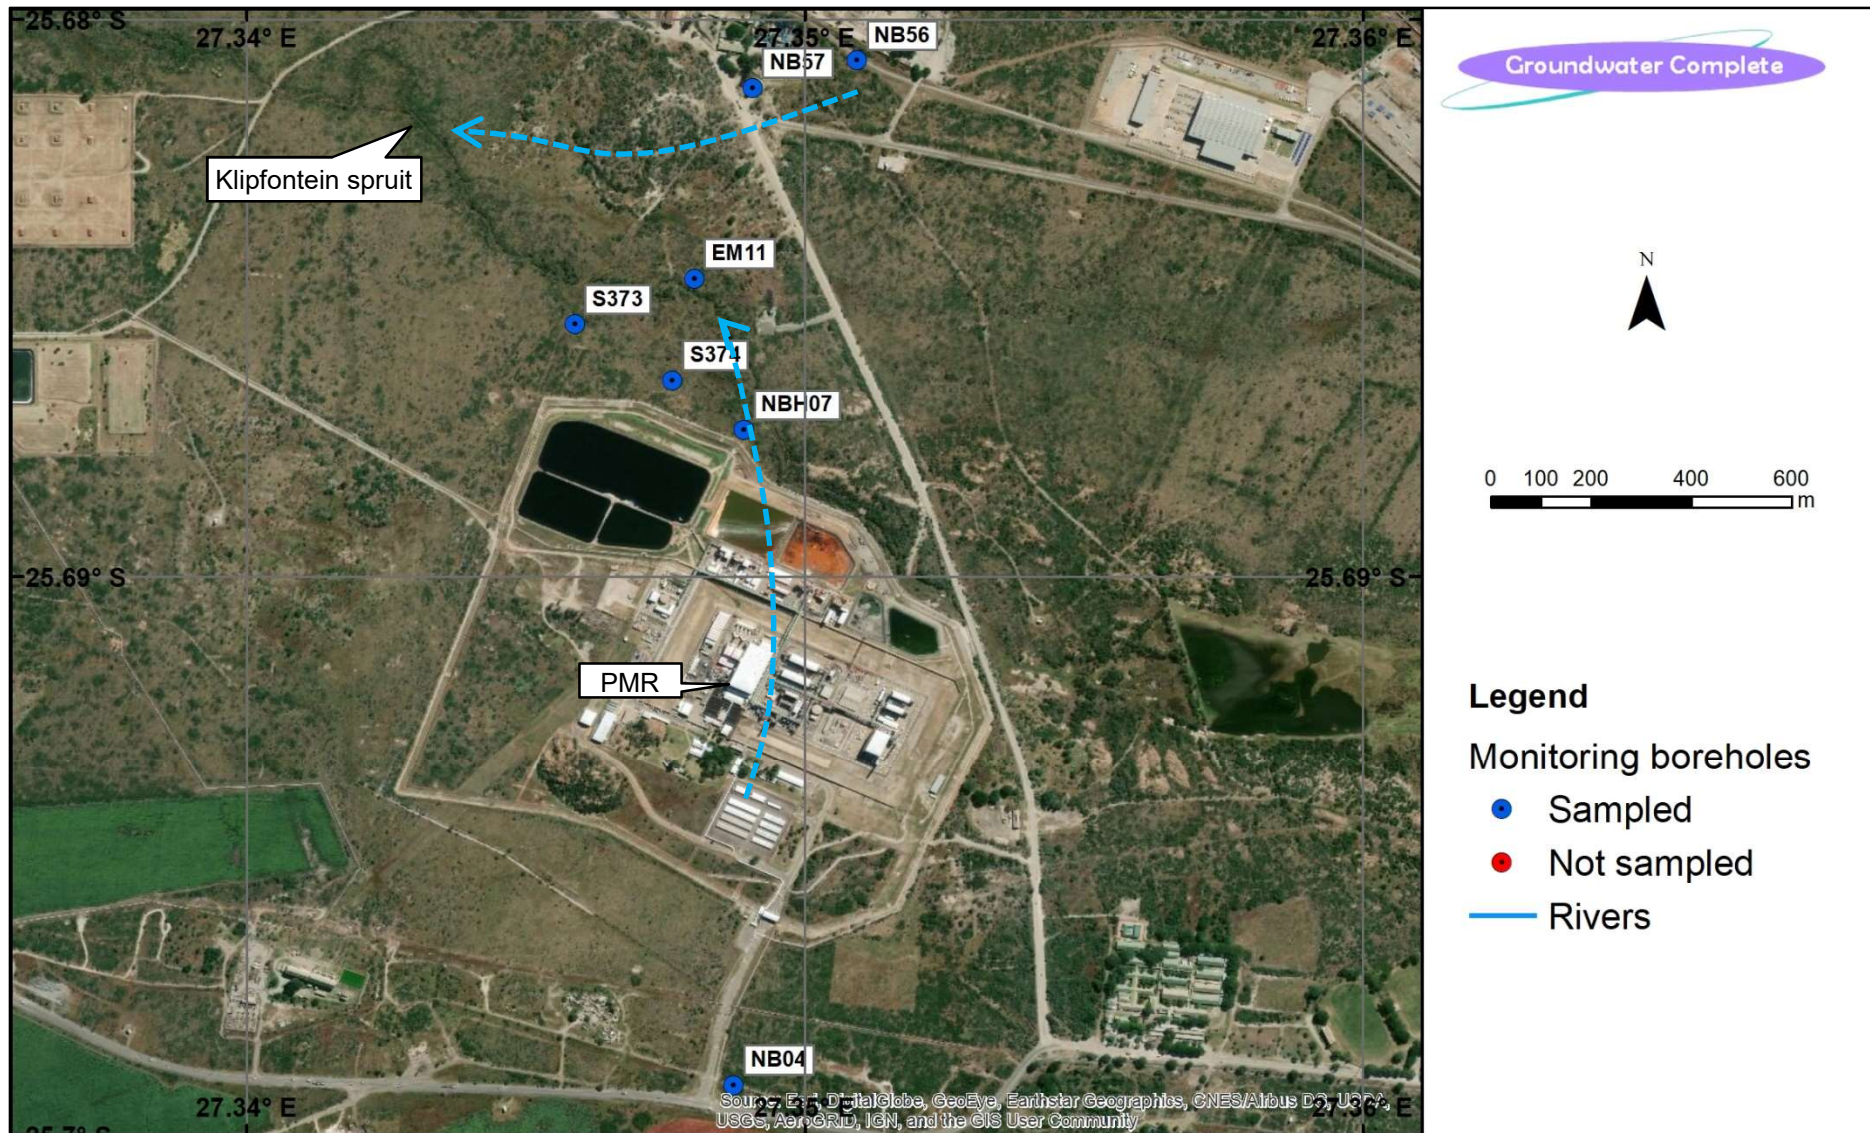


Figure 15: Positions of monitoring boreholes in the PMR and Central Deeps Shaft areas

Time-series plots of the indicator chemical parameters for the PMR and Central Deeps Shaft areas are presented in **Figures 16 and 17**.

Groundwater **TDS** concentrations directly down gradient from the refinery exceeded the permissible SANS value of 1 200 mg/l and displayed averages of between \pm 2180 mg/l and 25 630 mg/l. This indicates severe adverse impacts associated with polluted seepage from the refinery. Concentrations measured up gradient from the refinery and down gradient from the Central Deeps Shaft area remained below the SANS guideline value for drinking water purposes (**Figure 16**). **No guideline TDS value is specified by the Water Use License for RPM.**

The **sulphate** content of groundwater within the immediate vicinity of the PMR and Central Deeps Shaft remained below the permissible SANS concentration of 500 mg/l and displayed averages of between \pm 1 mg/l and 380 mg/l. The relatively low sulphate content measured in NBH07 suggests that sulphate is not the dominant anion in the polluted seepage from the refinery.

Elevated sulphate concentrations were however measured in monitoring boreholes EM11, S373, S374, NB56 and NB57 during the monitoring year, but the concentration decreased significantly over the period from exceeding maximum permissible limits to within acute health and aesthetic limits (**Figure 16**). **The RPM WUL guideline concentration of 20 mg/l was exceeded in all monitoring boreholes except NB04 and NBH07.**

Groundwater **sodium** concentrations measured down gradient from the PMR exceeded the permissible SANS value of 200 mg/l with average concentrations varying between \pm 220 mg/l and 4 670 mg/l. The sodium content in NBH07 has increased over the monitoring period (**Figure 17**). The sodium content of groundwater up gradient from the refinery and down gradient from the Central Deeps Shaft area remained well below the SANS guideline value for drinking water. **The RPM WUL guideline concentration of 22 mg/l was exceeded in all groundwater monitoring boreholes.**

Average groundwater **chloride** concentrations measured in boreholes EM11, S373 and S374 exceeded the permissible SANS value of 300 mg/l and displayed averages of between 890 mg/l and 3 800 mg/l. A much higher average concentration of approximately 15 540 mg/l was measured in monitoring borehole NBH07. Average concentrations measured in the remainder of boreholes were within the maximum concentration allowed for drinking water. Once again, the chloride concentration in NBH07 increased over the monitoring period (**Figure 17**). **The groundwater chloride content within the immediate vicinity of the PMR and Central Deeps Shaft areas exceeded the RPM WUL guideline concentration of 14 mg/l.**

The exceptionally high levels of sodium and chloride pollution that were measured in NBH07 are clear indications that both parameters are dominant ions in pollution emanating from the PMR.

Nitrate concentrations in most boreholes in the PMR and Central Deeps Shaft areas are not of concern and remained below the permissible SANS value of 11 mg/l/ during the past monitoring year. Monitoring borehole S374 was however the exception and displayed an average concentration of ± 47 mg/l. **The RPM WUL guideline concentration of 0.2 mg/l was exceeded in all groundwater monitoring boreholes.**

According to **Figures 18** and **19** the following types of groundwater are predominant within the immediate vicinity of the PMR and Central Deeps Shaft areas:

- Fresh, clean, relatively young groundwater that has started to undergo magnesium and sodium ion exchange – groundwater is therefore dominated by **magnesium/sodium** cations and **bicarbonate alkalinity**.
- Relatively old, stagnant groundwater that has undergone a significant degree of ion exchange reactions – groundwater is therefore dominated by **magnesium** cations and **chloride** anions.

The plot positions in fields 8 of the EDD confirm definite impacts of the processing facilities on the natural groundwater environment, especially with regards to sodium and chloride pollution.

Water levels for the PMR area range from 2 mbs to 20 mbs, of which none of the boreholes display increasing or decreasing concentration trends (**Figure 20**).

Summary:

- Monitoring borehole EM11 is affected by groundwater contamination, but the PMR is not considered to be the source.
- The Central Deeps Shaft and its discard area north of the Klipfontein Spruit are also not considered to be significant sources of groundwater contamination.
- Exceptionally high levels of sodium and chloride pollution were measured in all boreholes directly down gradient from the PMR, indicating clear impacts from PMR.
- **The majority of indicator chemical parameters do not comply with the water quality objectives stated in the RPM Water Use License.**

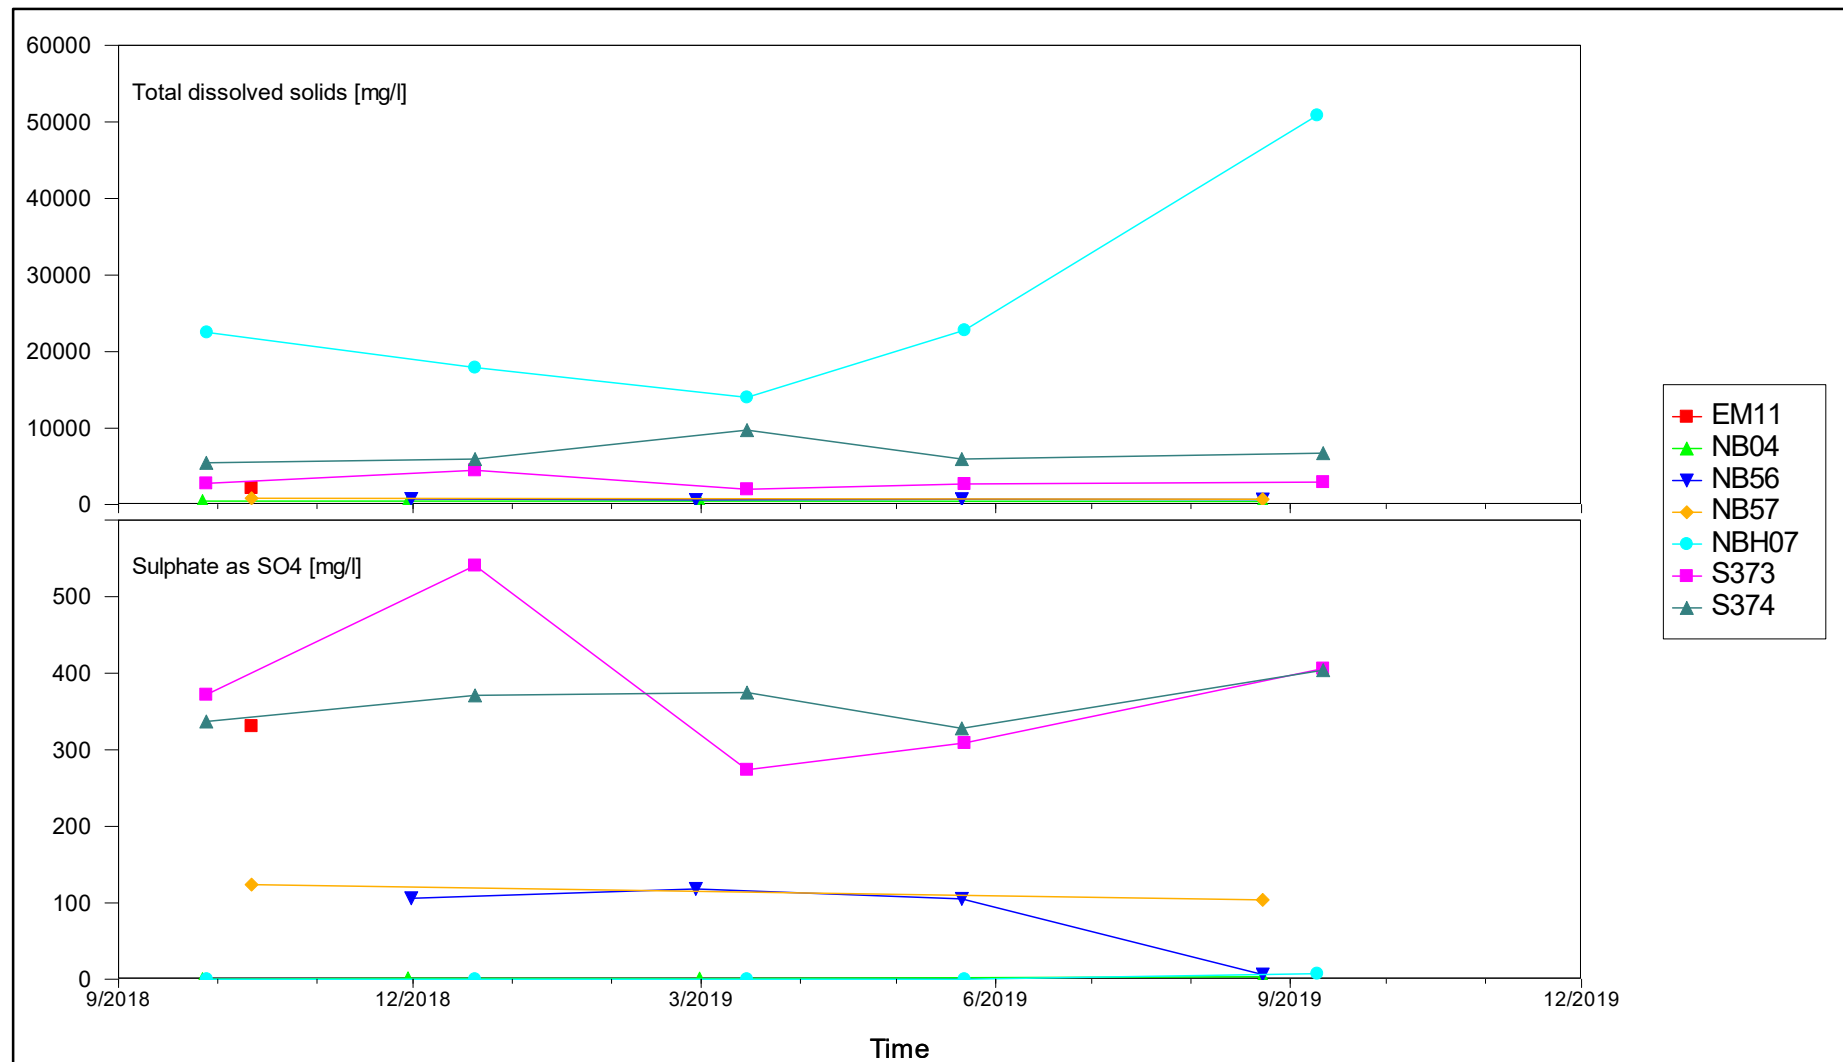


Figure 16: Time-series plot of indicator chemical parameters in the PMR and Central Deeps Shaft areas – TDS and SO₄

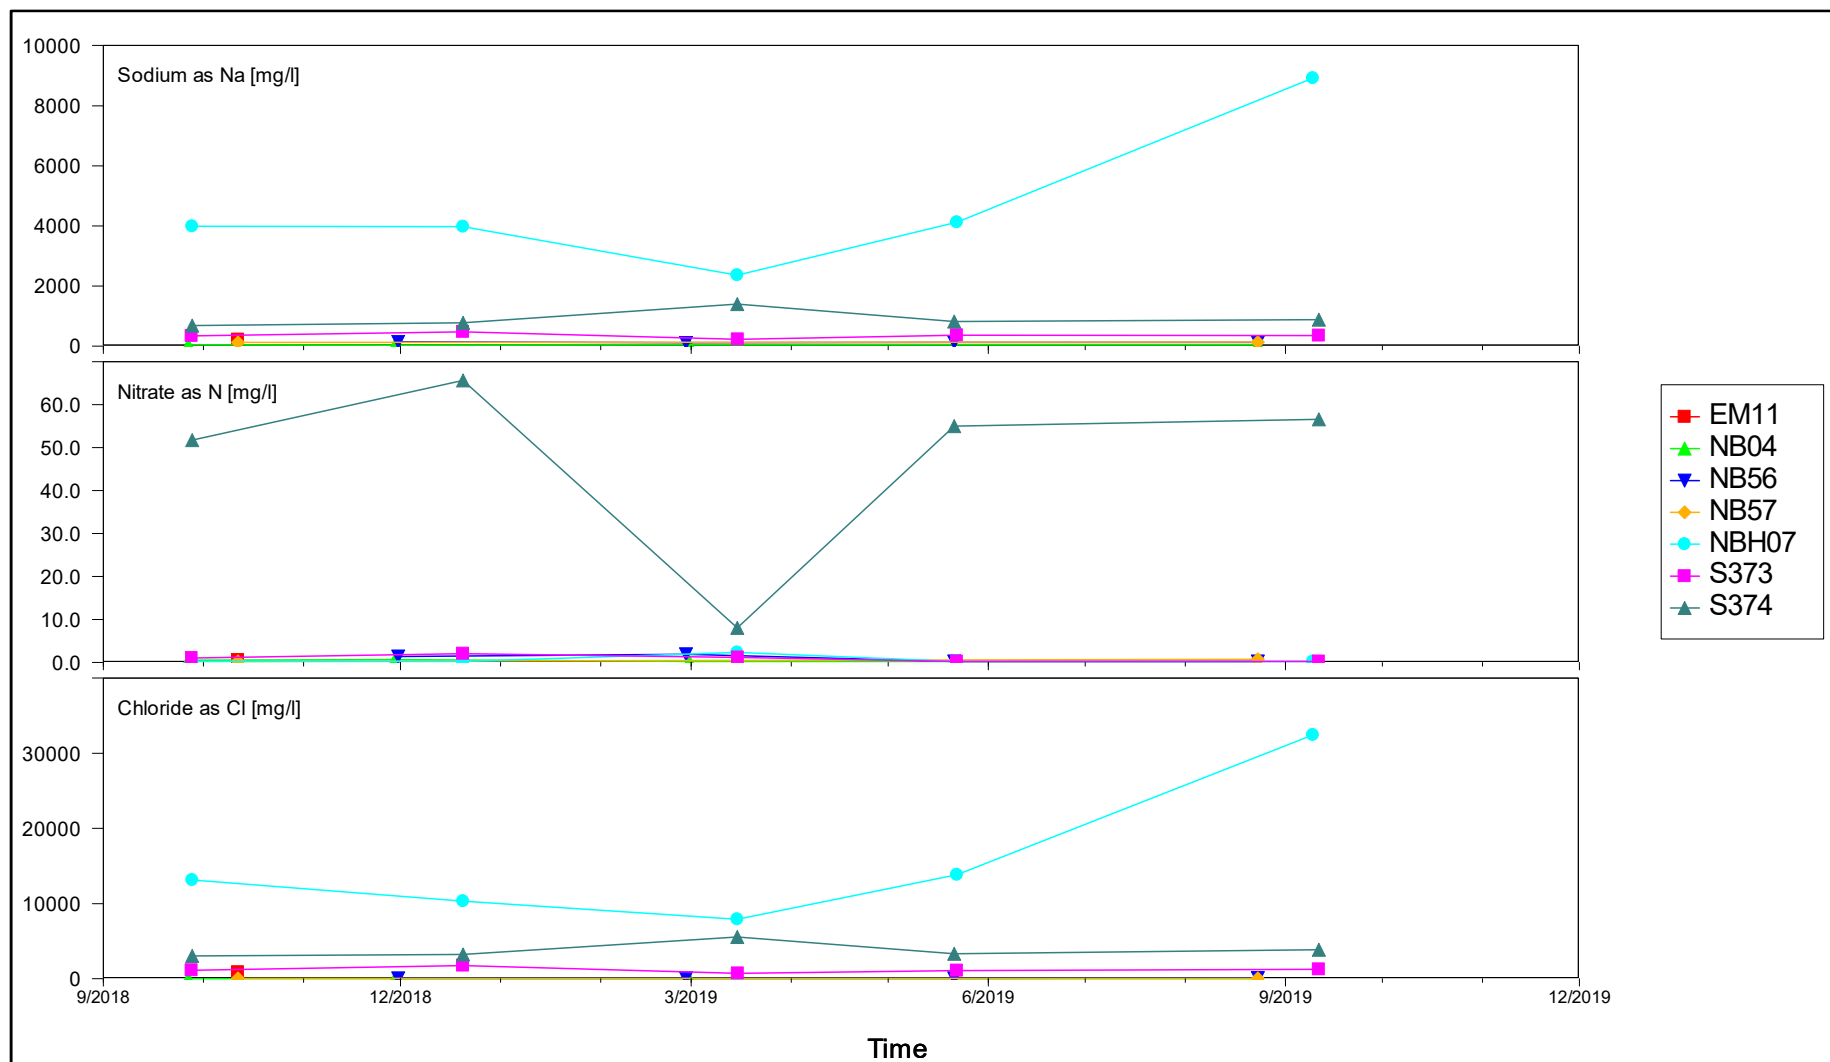


Figure 17: Time-series plot of indicator chemical parameters in the PMR and Central Deeps Shaft areas – Na, NO₃ and Cl

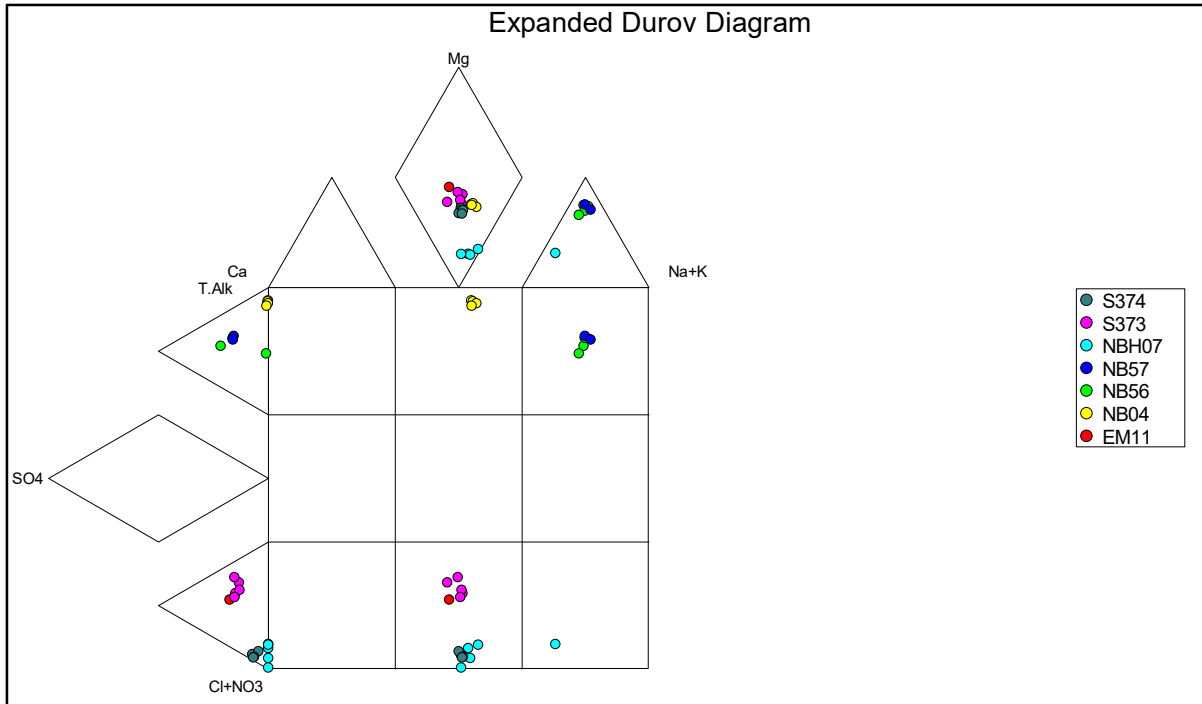


Figure 18: EDD of groundwater chemistry in the PMR area

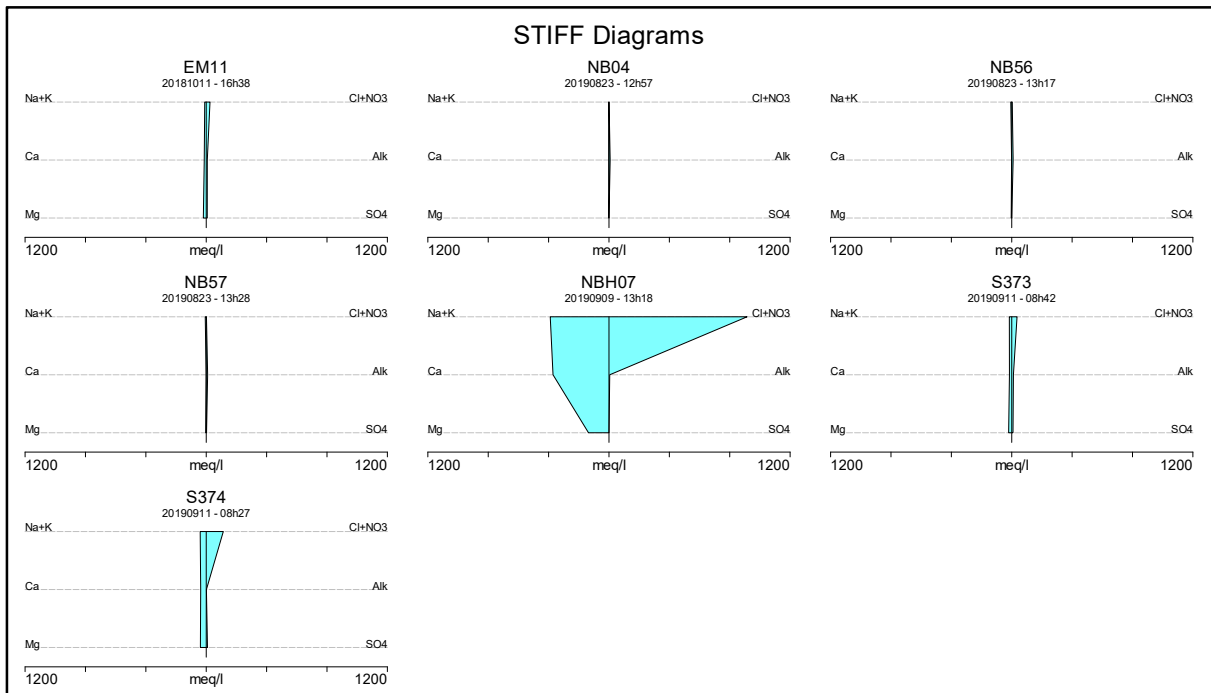


Figure 19: Stiff diagrams of groundwater chemistry in the PMR area

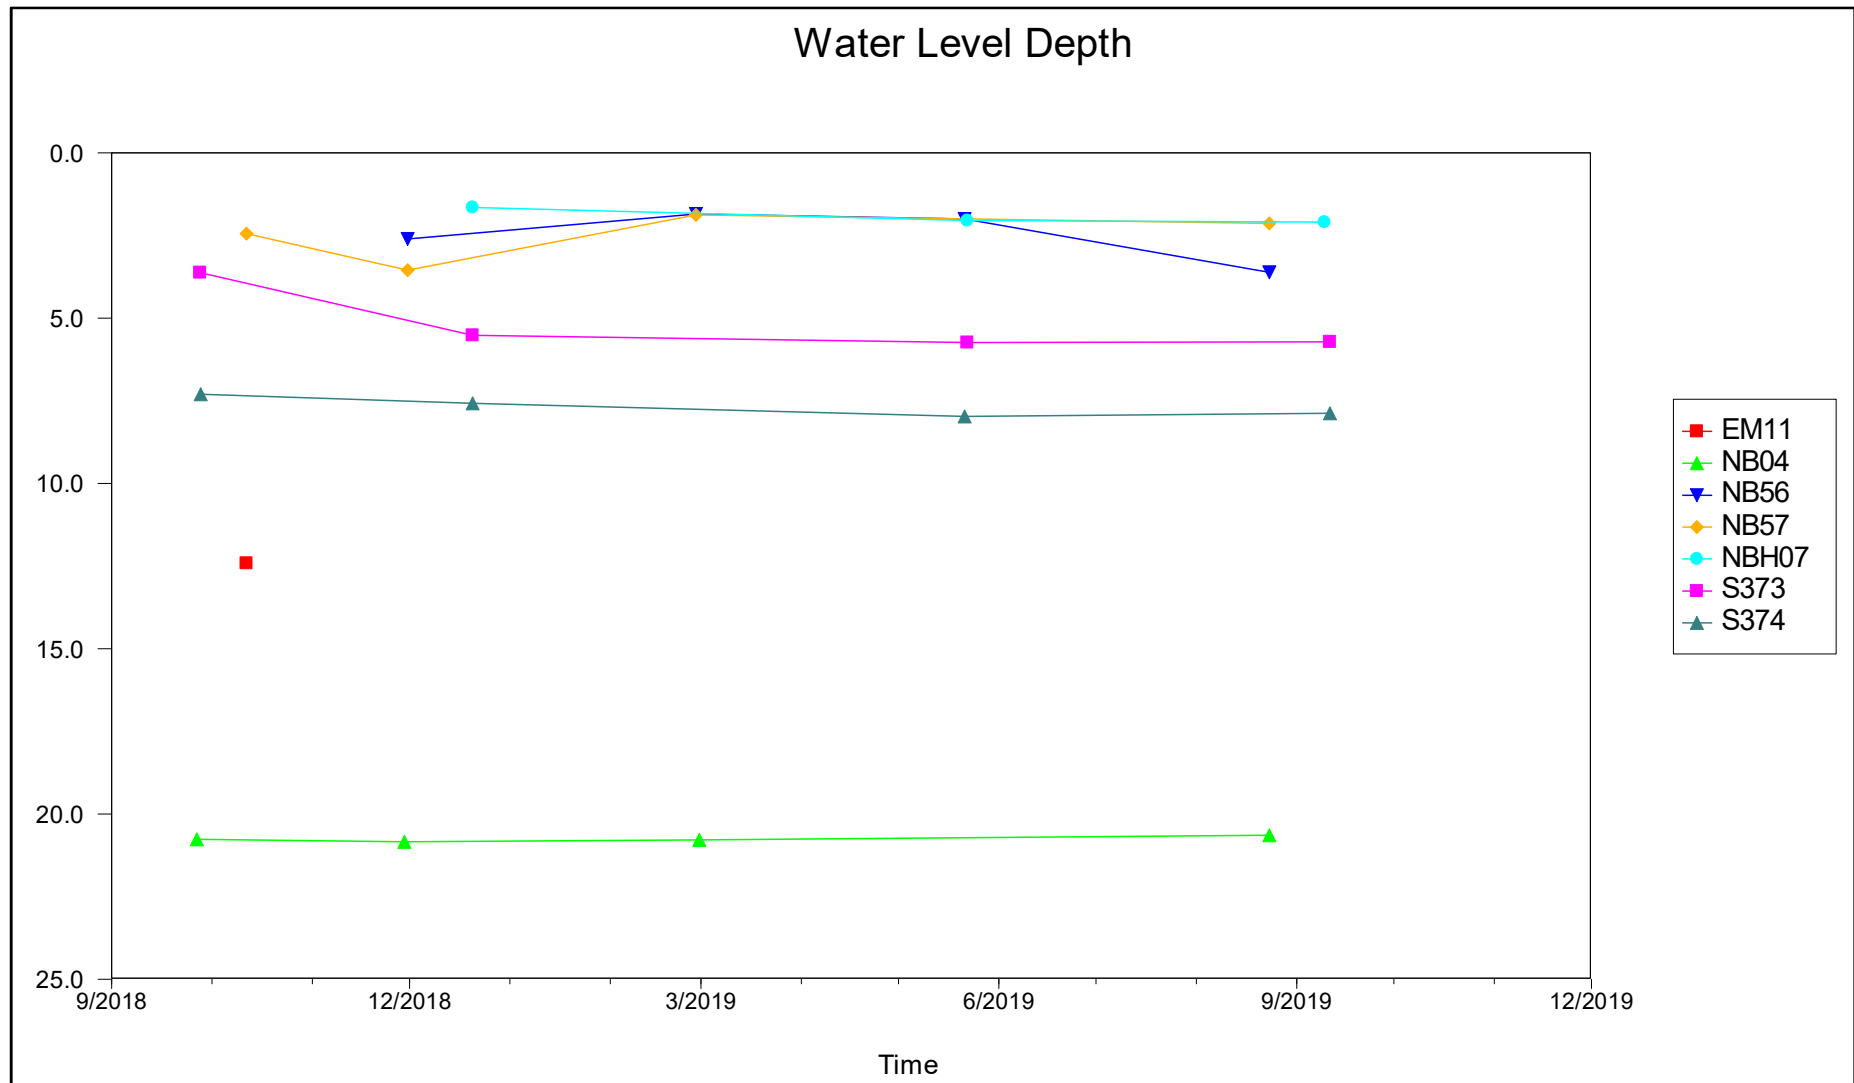


Figure 20: Time series plot of water levels for in the PMR area

2.4 THE WATERVAL TAILINGS COMPLEX

The Waterval Tailings Complex straddles a north-west trending groundwater divide and seepage from the tailings is towards the west/south-west and north-west in the direction of the Klipfontein Spruit and Klipgat Spruit respectively. Only one monitoring borehole was sampled during the 2018/2019 monitoring year and its position is indicated in **Figure 21**.

Due to the fact that only a single borehole was monitored for the Tailings complex and it was only sampled twice in the 2018/2019 monitoring year, no meaningful time series information can be gained. Therefore, no time series graphs will be included in this section.

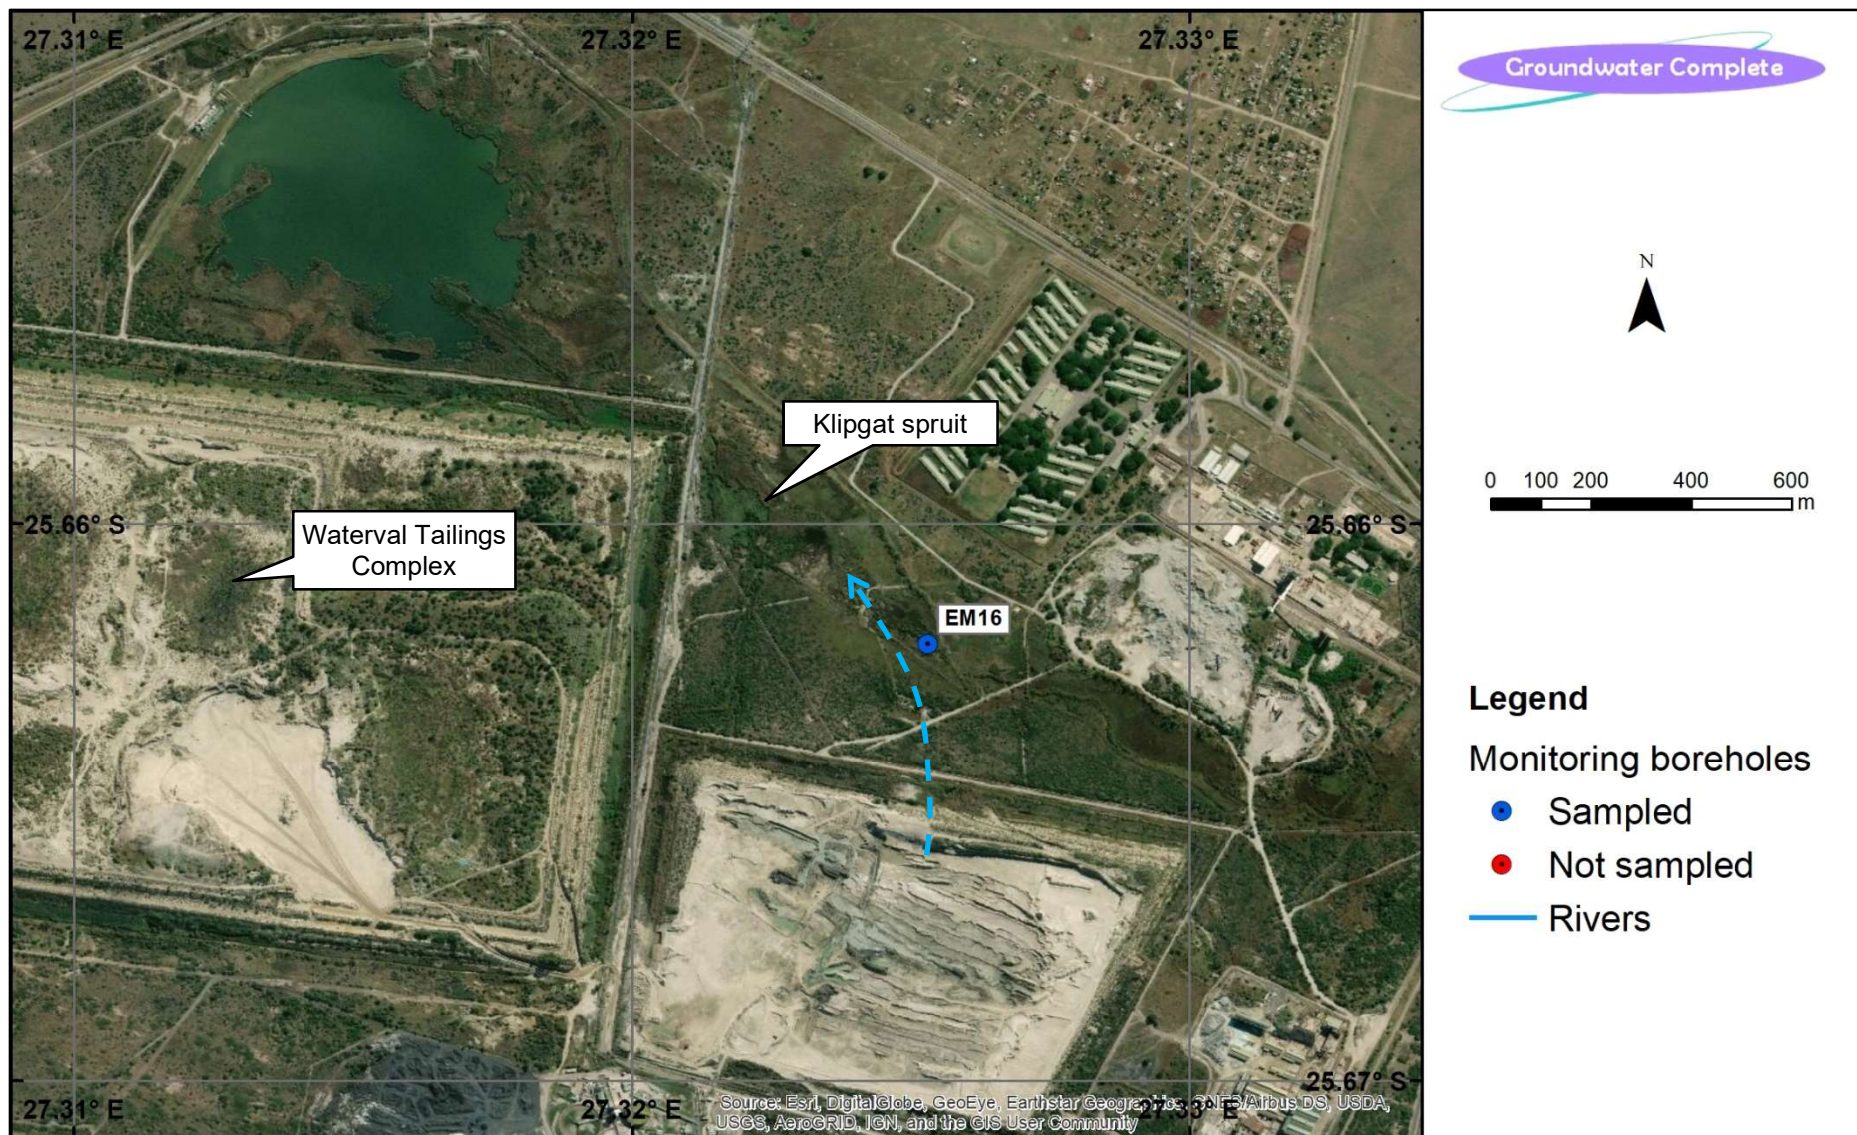


Figure 21: Positions of monitoring boreholes in the Waterval Tailings Complex area

Average groundwater **TDS** concentrations for borehole EM16 during the 2018/2019 monitoring year was 3 440 mg/l, which exceeds the permissible SANS value of 1 200 mg/l. **No guideline concentration is specified for TDS in the Water Use License for RPM.**

The groundwater **sulphate** content measured in the monitoring borehole exceeded the permissible SANS concentration of 500 mg/l and displayed an average of 1018 mg/l (**Table 3**). **The sulphate content of groundwater down gradient from the tailings facility exceeded the RPM WUL guideline concentration of 20 mg/l during the past monitoring year.**

Average groundwater **sodium** concentration for the past monitoring year was 410 mg/l, which exceeded the permissible SANS value of 200 mg/l. **The RPM WUL guideline concentration of 22 mg/l was exceeded in monitoring borehole EM16.**

Groundwater **nitrate** concentrations remained well below the permissible SANS value of 11 mg/l during the past monitoring year. Monitoring borehole EM16 displayed an average of ± 1.1 mg/l. **The RPM WUL guideline concentration of 0.2 mg/l was exceeded in EM16 during the evaluation period.**

Groundwater **chloride** concentrations measured in EM16 exceeded the permissible SANS value of 300 mg/l and displayed an average of 1083 mg/l. **The chloride content of groundwater within the immediate vicinity of the tailings complex exceeded the RPM WUL guideline concentration of 14 mg/l during the 2018/2019 monitoring year.**

According to **Figures 24 and 25** Relatively old, stagnant groundwater that has undergone a significant degree of ion exchange reactions - groundwater is therefore dominated by **magnesium** cations, while the anion content is dominated by **chloride** and **nitrate** is predominant within the immediate vicinity of the Waterval Tailings Complex area:

The dominant plot positions in field 8 of the EDD confirms definite impacts of the Waterval Tailings Complex on the natural groundwater environment.

The average **water level** in borehole EM16 is 2 mbs.

Summary:

- Significant groundwater pollution occurs in the down gradient direction with magnesium and sulphate/chloride being the dominant contaminants.
- Its is recommended that more boreholes be drilled to supplement the monitoring of the tailings complex.
- **The majority of indicator chemical parameters do not comply with the water quality objectives stated in the RPM Water Use License.**

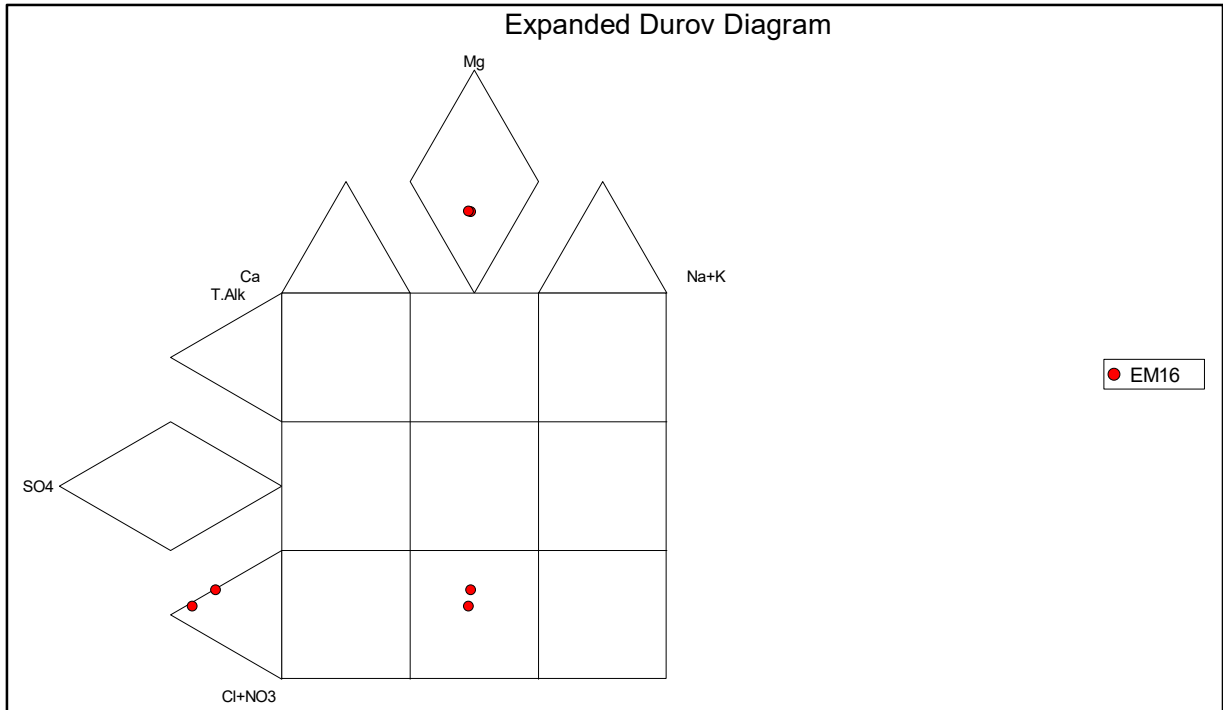


Figure 22: EDD of groundwater chemistry in the Waterval Tailings Complex area

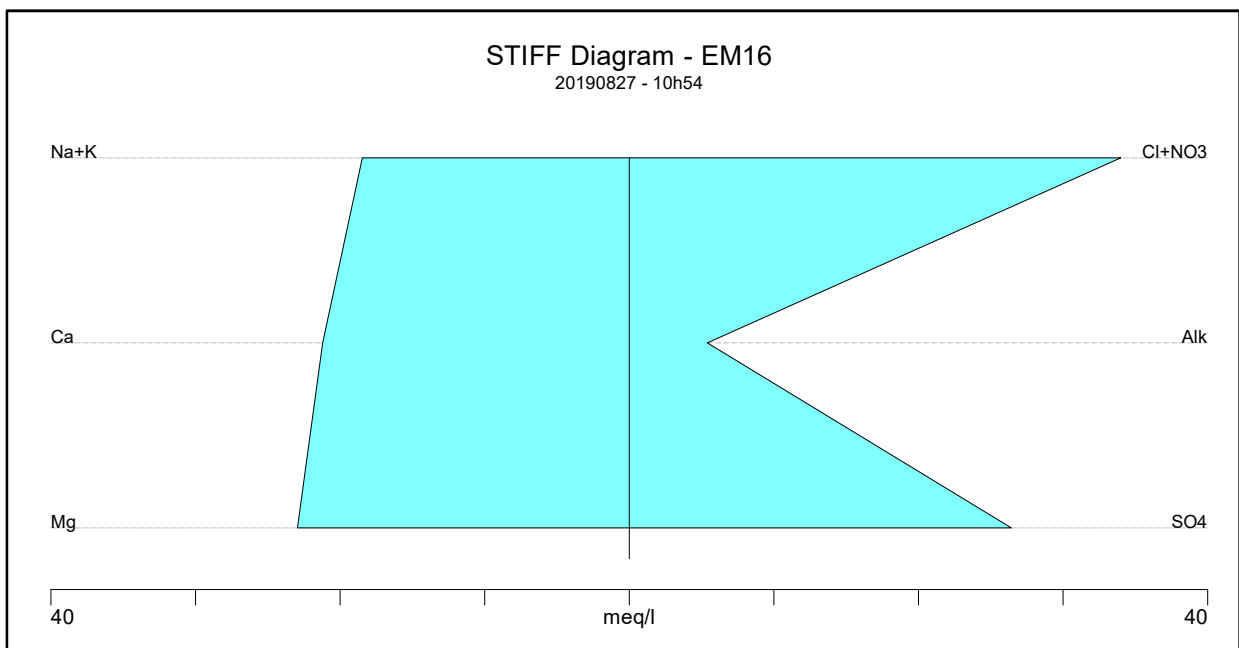


Figure 23: Stiff diagrams of groundwater chemistry in the Waterval Tailings Complex area

3 CONCLUSIONS AND RECOMMENDATIONS

The RPM area is a diverse mining and processing area with numerous source areas and varying degrees of impact on the groundwater regime.

- **Sulphate** is a prominent and widespread contaminant in the base metal processing areas such as the concentrators, smelters and refineries. The most significant sulphate pollution occurs at the RBMR, followed by the Waterval Processing Complex. Sulphate is also most commonly the pollutant at the tailings facilities.
- **Magnesium** is generally associated with sulphate-type pollution because magnesium exchanges calcium in the normal geohydrological cycle.
- **Sodium** and **chloride** are usually present in high concentrations in connate water within the crystal structure or matrix of rocks. When blasted, crushed, smelted or processed in some other way, sodium and chloride are liberated. Elevated chloride concentrations occur in groundwater at most of the processing areas like the RBMR and PMR but chloride pollution also occurs at the Waterval tailings facilities.
- **Nitrate** contamination occurs at most of the shaft areas as a result of traces of nitrate-based explosives used in the mining process and dissolving in process and mine water. Nitrate contamination is more prominent in the shaft areas.
- Where groundwater pollution has been confirmed, mitigation and remediation measures should be rolled out as evaluated in the groundwater management plan.
- Due to neutral or slightly basic pH conditions heavy and trace metals are present in very low concentrations in the groundwater of the entire RPM lease area due to the poor solubility.
- Distribution of groundwater monitoring points in the recent monitoring program is mostly adequate, but a number of areas occur where borehole distribution is inadequate for accurate impact characterisation.
- Several boreholes have been blocked or demolished and these boreholes should be reinstated in the monitoring program.
- Monitoring boreholes up gradient from sources are especially important as such monitoring data enables more accurate quantification and delineation of impacts related to specific sources.

Summary:

Waterval Smelter and Concentrator and Acid Plant

- Definite impacts from the Waterval Processing area occur on the down gradient groundwater environment.
- Sulphate is especially of concern, as the majority of groundwater monitoring boreholes indicated elevated concentrations.
- Up gradient groundwater monitoring borehole S407 displayed the highest levels of pollution throughout the 2018/2019 monitoring year, however the pollution is unlikely to originate from the Waterval Processing area.
- S400 also had overall high borehole concentration levels, however it only had a single sample taken and its level of pollution can't be determined definitively.
- Increasing parameter concentrations in the downgradient monitoring borehole, S407 are often observed over the monitoring period.
- **Concentrations of indicator chemical parameters do not comply with the water quality objectives stated in the RPM Water Use License.**
- Water levels vary between 2 and 4 mbs.

The Rustenburg Base Metal Refinery

- Significant pollution impacts from the RBMR occur on the groundwater environment.
- Impacts are by far the most significant in the sodium sulphate solution area to the south-east of the refinery.
- Groundwater iron concentrations measured in monitoring borehole S418 fluctuated significantly throughout the year, which may be the result of varying groundwater pH conditions.
- The most significant impacts from the refinery were measured in groundwater from boreholes S120, S389 and S418.
- The main contaminants of concern are sodium and sulphate.
- The extent of impact (plume) is however limited to within a few meters of the sources due to poor aquifer hydraulic properties.
- **The indicator chemical parameters do not comply with the water quality objectives stated in the RPM Water Use License.**

The Precious Metal Refinery (PMR) and Central Deeps Shaft

- Monitoring borehole EM11 is affected by groundwater contamination, but the PMR is not considered to be the source.
- The Central Deeps Shaft and its discard area north of the Klipfontein Spruit are also not considered to be significant sources of groundwater contamination.
- Exceptionally high levels of sodium and chloride pollution were measured in all boreholes directly down gradient from the PMR, indicating clear impacts from PMR.
- **The majority of indicator chemical parameters do not comply with the water quality objectives stated in the RPM Water Use License.**

The Waterval Tailings Complex

- Significant groundwater pollution occurs in the down gradient direction with magnesium and sulphate/chloride being the dominant contaminants.
- It is recommended that more boreholes be drilled to supplement the monitoring of the tailings complex. One monitoring borehole is not sufficient.

- **The majority of indicator chemical parameters do not comply with the water quality objectives stated in the RPM Water Use License.**

Appendix B

Biomonitoring report

Anglo American Platinum – Rustenburg Operations
Annual integrated water monitoring report
Volume I



Report reference: AAPL/A/18

Prepared by:

BH Niehaus
Pri.Sci.Nat. SACNASP 4000080/13
Clean Stream Biological Services



Report released:

2019-02-27

Tel: 012-753-2192/3

Fax: 086-535-7368

Email: brenton@cleanstream-bio.co.za

**AMGLO AMERICAN PLATINUM:
HEX RIVER CATCHMENT
BIOMONITORING PROGRAMME**

OCTOBER 2018 SURVEY

TABLE OF CONTENTS

1. INTRODUCTION.....	3
2. MATERIALS & METHODS	4
3. RESULTS & DISCUSSION.....	4
3.1 Study area	4
3.2 <i>In-situ</i> water quality (October 2018)	7
3.3 Toxicity testing.....	10
3.3.1 May 2018 and October 2018	11
3.3.2 Temporal variation of toxicity results (2008 to 2018).....	13
3.4 Aquatic invertebrate assessment: South African Scoring System 5.....	15
3.5 Fish Assessment.....	20
4 CONCLUSIONS AND RECOMMENDATIONS.....	26
5 REFERENCES	28
Appendix 1: Methodology applied during this biomonitoring assessment.....	29
Appendix 2: Site photos of biomonitoring sites (last two surveys)	32
Appendix 3: Tables.....	36
END OF REPORT	37
Addendum 1: Toxicity test report/s (Biotox Laboratory Services).....	38

LIST OF TABLES

Table 1: Biomonitoring surveys conducted and reports compiled in the period December 1999 to October 2018.	3
Table 2: Latitude/Longitude and sampling protocols of selected sampling sites for routine biomonitoring.	5
Table 3: <i>In-situ</i> water quality variables measured at the time of sampling at the selected biomonitoring sites	7
Table 4: Toxicity results and hazard classification for selected pollution facilities (May 2018).	12
Table 5: Toxicity results and hazard classification for selected Hex River tributary samples (October 2018).	13
Table 6: Integrated Habitat Assessment (IHAS) description of the different biomonitoring sites.	16
Table 7: SASS5, ASPT and habitat suitability/availability index scores for different monitoring sites (October 2018). .	17
Table 8: Fish species expected and observed during the last two surveys.....	21
Table 9: Relative FAIL scores calculated at different sampling sites (2017 to 2018).	22
Table 10: The relative tolerance of each species towards changes in the environment.	23
Table 11: Fish Response Assessment Index (FRAI) results for the Hex River reach (all sites) (2017/8 results).	24
Table 12: Descriptive categories used to describe the present ecological status (PES) of biotic components (adapted from Kleynhans, 1999).	25

LIST OF FIGURES

Figure 1: Google Earth image of study area, indicating Hex River and tributary biomonitoring sites.	6
Figure 2: Electrical conductivity levels (mS/m) at the time of sampling at the different biomonitoring sites.....	7
Figure 3: pH levels at the time of sampling at the different biomonitoring sites.	8
Figure 4: Dissolved oxygen levels (mg/l) at the time of sampling at the different biomonitoring sites.	9
Figure 5: Temporal trends of toxicity results (annually tested PCD's and selected streams).....	14
Figure 6: Temporal trends of toxicity results (bi-annually tested tributaries).	15
Figure 7: ASPT, SASS5 and total habitat suitability scores at biomonitoring sites during October 2018.	17
Figure 8: Linear regression of biotic integrity (as indicated by invertebrate ASPT scores) of the Hex River on a spatial scale (arranged sequentially in a downstream direction) during May 2018 (extended study area).	18
Figure 9: Linear regression of biotic integrity (as indicated by invertebrate ASPT scores) of the Hex River on a spatial scale (arranged sequentially in a downstream direction) during October 2018 (reduced study area).	18
Figure 10: Long-term trends of biotic integrity in terms of macro-invertebrates at biomonitoring sites.	19
Figure 11: Medium-term trends of biotic integrity in terms of macro-invertebrates at biomonitoring sites.	19
Figure 12: Relative FAIL scores, HCR's and SHI at the different biomonitoring sites.....	22

1. INTRODUCTION

This report is based on the results of the bi-annual biomonitoring survey conducted during October 2018 on the selected sites in the Hex River, Klipfonteinspruit and Klipgatspruit in the Anglo American Platinum (Rustenburg) mining area. Since the sale to Sibanye Stillwater, the study area assigned to Clean Stream Biological Services for biomonitoring has decreased considerably. To avoid confusion with areas tasked by Sibanye Stillwater to other consulting firm/s, the client for the purpose of this report will be referred to as Process Division Services. This long-term monitoring program commenced during December 1999. A comprehensive 20-year temporal database pertaining to the health of aquatic communities, as well as the water quality environment that may be affected by the RPM operations, has been amassed. This continuity of information will be invaluable for any future assessments of impacts to the receiving environment. RPM has thereby diligently maintained their biomonitoring programme on a twice-per-annum schedule (at least) since the inception of the program during 1999. See Table 1 below for a list of surveys performed, with their corresponding report numbers. Report naming will henceforth include the lettering sequence of "AAPL", referring to Anglo American Platinum and in specific the Process Division Services.

Table 1: Biomonitoring surveys conducted and reports compiled in the period December 1999 to October 2018.

Year	Month	Report numbers
1999	December	CS-A-2000
2000	April, July and November	CS-G-2000, CS-K-2000 and CS-A-2001
2001	May and September	CS-H-2001 and CS-L-2001
2002	February, May, August and November	CS-G-2002, CS-I-2002, CS-N-2002 and CS-E 2003
2003	Januaury and May	CS-G2003 and CS-O-2003
2004	April, August and October	CS-H-2004 and AMP-A-05
2005	February, April and November	AMP-B-05, AMP-C-05 and AMP-D-05
2006	April and November	AMP-A-06, AMP-C-06
2007	April and October	ANP-A-07 and ANP-A-08
2008	April and October	ANP-B-08 and ANP-A-09
2009	April and October	ANP-B-09 and RPM-A-09
2009	April and October	RPM-A-10 and RPM-B-10
2011	April and October	RPM-A-11 and RPM-B-11
2012	April and November	RPM-A-12 and RPM-A-13
2013	April and October	RPM-B-13 and RPM-C-13
2014	April and October	RPM-A-14 and RPM-B-14
2015	April and October	RPM-A-15 and RPM-C-15
2016	May and October	RPM-A-16-Ver2 and RPM-B-16
2017	June and November	RPM-A-17 and RPM-B-17
2018	May and October	RPM-A-18 and AAPL-A-18

Rivers are continuum systems, so a river reach can be influenced by activities both upstream and downstream. Pollution incidences upstream of a site will have a negative impact, not only locally, but on the entire ecosystem (depending on the extent of the pollution).

Biological communities reflect overall ecological integrity by integrating different stressors over time, thereby providing a broad measure of their aggregate impact. The monitoring of biological communities hence provides a reliable ecological measure of fluctuating environmental conditions. The biomonitoring protocols applied in this project should give a good reflection of the human impacts on the system under investigation.

The results contained in this report should firstly be interpreted as **spatial** impact monitoring. [Note that spatial impact monitoring in terms of the fish communities considers the last two fish surveys, and not only the last

survey, as in the case of macro-invertebrate communities]. **Temporal** (long- and medium-term trends) impact monitoring is also performed and considers all of the data since 2002 (after initial project design and refinement of the biomonitoring programme between 1999 and 2001).

2. MATERIALS & METHODS

Refer to appendix 1 for a description of methodology applied during this assessment.

3. RESULTS & DISCUSSION

3.1 Study area

Biomonitoring sites were selected to be easily accessible and representative of as many habitats as possible. Four biomonitoring sites were selected within the Hex River (receiving water body) and 3 sites were selected in Hex River tributaries.

The criteria for site selection are as follows:

- The locations should ideally be selected to be both upstream and downstream of potential pollution sources, and as far as possible, exclude other potential impacts not related to the biomonitoring programme (non-AAPL impacts).
- The habitat diversity should be representative of the river/stream being monitored and, as far as possible, be comparable between sites on a spatial scale.
- The habitats should, as far as possible, be suitable for the application of the selected biomonitoring protocols.
- The sampling sites should at least be accessible to off-road vehicle to enable the transport of the required sampling equipment.

Although sampling sites were previously selected to isolate potential and known RPM (Sibanye Stillwater) impacts and hence measure the effect of RPM impacts on the biotic integrity of the receiving water bodies, several additional sites were also selected to illustrate the potential impact of non-RPM related activities. This was done to gain an insight into other potential impacts on the Hex River, in the area upstream of RPM activities as well as up- and downstream of the Klipfonteinspruit (not including the Paardekraal Angling Dam) to isolate the potential impact/s from the Klipfonteinspruit and the Dorpspruit catchment. This approach has now been adapted (since 2018-10) to mainly focus on the possible impact of the AAPL Process Division Services, with possible impacts reaching the final receiving water body (Hex River), via the Klipfonteinspruit and the Klipgatspruit (Table 2; Figure 1).

Various sites/samples were selected for toxicity testing. These include pollution control dams and the Klipfonteinspruit and Klipgatspruit tributaries (included since April 2012, but narrowed down to the two mentioned tributaries since October 2018) joining the Hex River within the study area. Based on the historic electrical conductivity (EC) results (illustrating cumulative water quality deterioration from various sources) and spatial variation in biotic integrity, it is evident that the various tributaries of the Hex River, both upstream and within the newly-refined study area contribute significantly to the spatial variation in ecological integrity of the Hex River. It is therefore of great value for the biomonitoring programme to include DEEEP toxicity testing on all the key tributaries entering the Hex River.

See Table 2 below for sampling site description, its relation to AAPL Process Division Services activities and the frequency of different biomonitoring protocols applied.

Table 2: Latitude/Longitude and sampling protocols of selected sampling sites for routine biomonitoring.

Monitoring site	Description	Potential direct upstream impact	Biomonitoring protocols		GPS coordinates (degrees)	
			Protocol	Frequency per annum	Latitude (South)	Longitude (East)
H1	Hex River, most upstream site.	Not relevant	Discontinued from the Clean Stream Biological Services scope of work, since 2018-10		25.7269	27.3043
H-US-Sand	Hex River, upstream from the Sandspruit confluence.	Non-RPM			25.7148	27.2992
H-DS-Sand	Hex River, downstream from the Sandspruit confluence.	Non-RPM			25.7025	27.3105
Hex00	Hex River, upstream from RPM activities, adjacent to possible future mining activities.	Non-RPM			25.6966	27.3081
H4	Hex River, between sites Hex00 and Hex01, but downstream from H3.	RPM and non-RPM			25.6835	27.2813
Hex01	Hex River, upstream from Klipfonteinspruit.	RPM			25.6765	27.2778
H-US-KF	Hex River, upstream from the Klipfonteinspruit confluence but downstream from the Paardekraal Angling Dam.	AAPL and non-AAPL	*SASS5	Twice	25.6492	27.2906
KF	Klipfonteinspruit, downstream from Waterfall concentrator but upstream from Paardekraal shaft runoff.	AAPL	*SASS5	Twice	25.6578	27.2964
KFD	Klipfonteinspruit, downstream from site KF and the Paardekraal shaft runoff.	AAPL	*SASS5	Twice	25.6496	27.2926
H-DS-KF	Hex River, directly downstream from the Klipfonteinspruit confluence.	AAPL	*SASS5	Twice	25.6473	27.2913
Hex03	Hex River, upstream from Klipgatspruit.	Non-AAPL	*SASS5	Twice	25.6332	27.2903
			**FAIL	Once		
KGT	Klipgatspruit, downstream from tailings complex seepage.	AAPL	*SASS5	Twice	25.6319	27.2951
Hex3B	Hex River, downstream from Klipgatspruit confluence. Newly adopted site (since 2018-10)	AAPL	*SASS5	Twice	25.6237	27.2900
			**FAIL	Once		
DPS	Dorp Spruit, 100m before it confluence with the Hex River	Non-RPM	Discontinued from the Clean Stream Biological Services scope of work, since 2018-10		25.6228	27.2885
Hex04	Hex River, downstream from HEX03.	RPM			25.6081	27.2886
PDK	Paardekraal Spruit, just before confluence with Hex River.	RPM			25.5933	27.2983
Hex4B	Hex River, downstream from Paardekraal Spruit.	RPM			25.5916	27.2993
2	PMR Dam 2	To be confirmed as per AAPL Process Division requirements				
3A	PMR Dam 3A					
3B	PMR Dam 3B					
4&5	PMR Dams 4 and 5					
DPS	Dorpspruit, just upstream from confluence with Hex River					
K035	Klipgat RWD	To be confirmed as per AAPL Process Division requirements				
K048	Paardekraal Dam 1 RWD					
K064	Paardekraal Dam 3 RWD					
K086	Waterval PCD West					
K098	ACP PCD					
K105	Klipfontain Tailings RWD					
K125	Hoedspruit Tailings RWD					
K133	UG2 PCD					
K176	Paardekraal Phase 4 RWD					
PDKS	Paardekraalspruit just upstream from confluence with Hex River	RPM and non-RPM	Discontinued from the Clean Stream Biological Services scope of work, since 2018-10		25.5933	27.2983
SS	Sandspruit, just upstream from confluence with Hex River	Non-RPM			25.7115	27.3174

Key: * SASS5 = South African Scoring System, version5 (macro-invertebrate index and associated habitat assessment indices i.e. IHAS ver2 and biotope availability and suitability indices)

** FAIL = Fish Assemblage Integrity Index (and associated habitat indices i.e. SHI and HCR)

Site name shaded green = Hex River mainstem	Site name shaded blue = Tributary of Hex River	Site name shaded red = Toxicity testing
Impact shaded gray = Potential RPM and non-RPM impacts (directly upstream)	Impact shaded pink = Potentially impacted by RPM/AAPL (directly upstream)	Impact shaded yellow = No RPM/AAPL impacts (directly upstream)
Site name shaded Orange = Discontinued from Clean Stream Biological Services scope		



Figure 1: Google Earth image of study area, indicating Hex River and tributary biomonitoring sites.

3.2 In-situ water quality (October 2018)

Selected water quality variables were measured on-site at the time of biological sampling. The purpose of these measurements is to assist in the interpretation of biological results (refer to Aquatico Scientific’s Water Quality Report for a detailed water quality assessment of the Rustenburg Platinum mining area).

As recorded during most surveys, the EC increased from site H-US-KF to H-DS-KF in the Hex River (104.0 mS/m to 178.3 mS/m) (Table 3; Figure 2). The Klipfonteinspruit joins the Hex River between these sites and probably played a large role in the increased salinity during most preceding surveys (no perceptible surface flow was recorded from the Klipfonteinspruit during many surveys but a subsurface contribution of affected mine water cannot be ruled out). The EC value was relatively high in the Klipfonteinspruit (site KF) during most previous surveys and the latest dataset again confirms this tributary as a potential source of elevated salinity levels, especially during periods of flow (Table 3).

Table 3: In-situ water quality variables measured at the time of sampling at the selected biomonitoring sites

Monitoring site	EC (mS/m)	pH	Oxygen saturation (%)	Dissolved oxygen (mg/l)	Water temp (°C)	Turbidity (visual)	Flow (visual)
H-US-KF	104.0	7.8	79.5	5.2	21.2	Slightly turbid	Moderate
KF	509.0	7.6	84.2	5.5	22.3	Clear	Low
H-DS-KF	178.3	7.7	107.1	7.0	23.2	Slightly turbid	Moderate
Hex-03	195.2	7.5	48.6	3.2	20.9	Slightly turbid	Moderate
KGT	Dry						
Hex-03-B	189.4	7.7	79.9	5.1	21.7	Slightly turbid	Moderate

Key:
 Site name shaded in green = Hex River mainstem
 Site name shaded in blue = Tributary of the Hex River
 Values relatively high
 Values exceeding/below guidelines

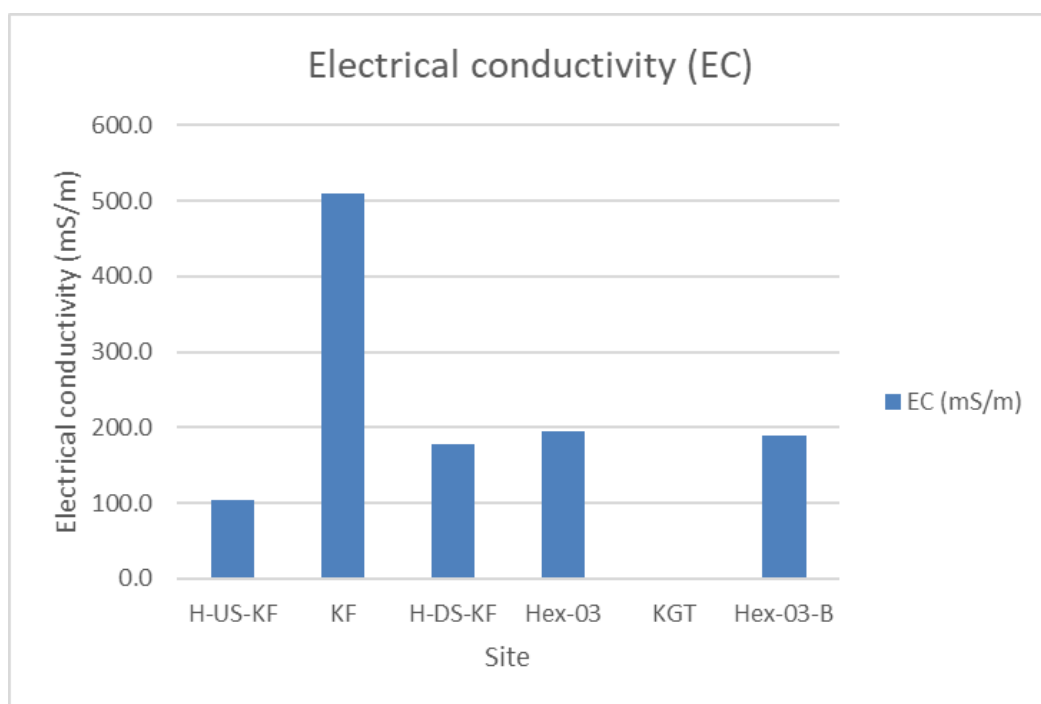


Figure 2: Electrical conductivity levels (mS/m) at the time of sampling at the different biomonitoring sites.

The EC level increased, from site H-DS-KF (178.3 mS/m) to Hex03 (195.2 mS/m). This is a clear indication of non-Anglo Platinum Process Division (APPD) activities impacting on the water quality of the Hex River.

From site Hex03 towards site Hex03B (the most downstream site), the EC values decreased slightly (195.2 mS/m to 189.4 mS/m), thus indicating that the contribution from the Klipgatspruit (dry at the time of sampling) did not affect the salinity of the receiving environment.

The pH fell within the target water quality ranges for fish health (Aquaculture), and marginally within the aquatic ecosystem guideline at all sites during the October 2018 survey (Table 3; Figure 3). The target for fish health is between 6.5 and 9.0. It is expected that most aquatic species will tolerate and reproduce successfully within this pH range (DWAF, 1996).

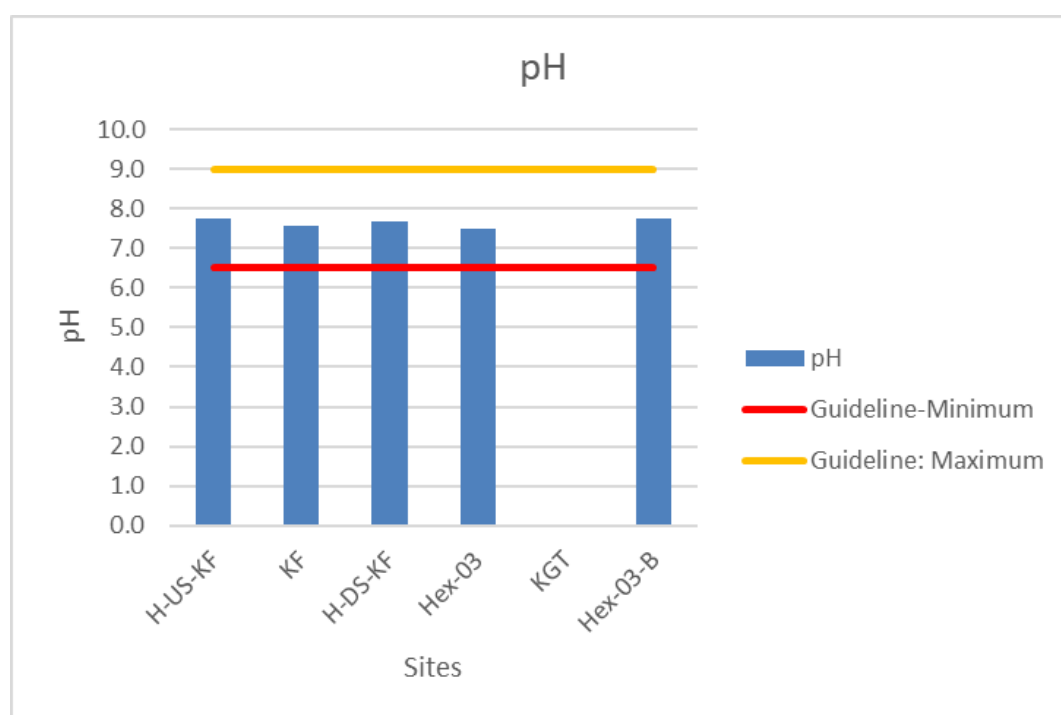


Figure 3: pH levels at the time of sampling at the different biomonitoring sites.

During October 2018, the dissolved oxygen level fell below the target range (> 5 mg/l, as set by Kempster *et.al.*, 1980) at site Hex03 (Table 3; Figure 4). This was also the case during the previous (May 2018) and many preceding surveys. The noted low oxygen levels could therefore possibly have posed a risk to aquatic biota and was probably related to a combination of factors including:

- Elevation and accumulation of organic loads,
- Aquatic vegetation and algal proliferation in response to eutrophication,
- Low flow (all affected sites).

It has to be noted that the cause of lowered dissolved oxygen levels is unlikely to be related to APPD activities because levels were within the guideline at site H-DS-KF and no further APPD activities take place toward site Hex03.

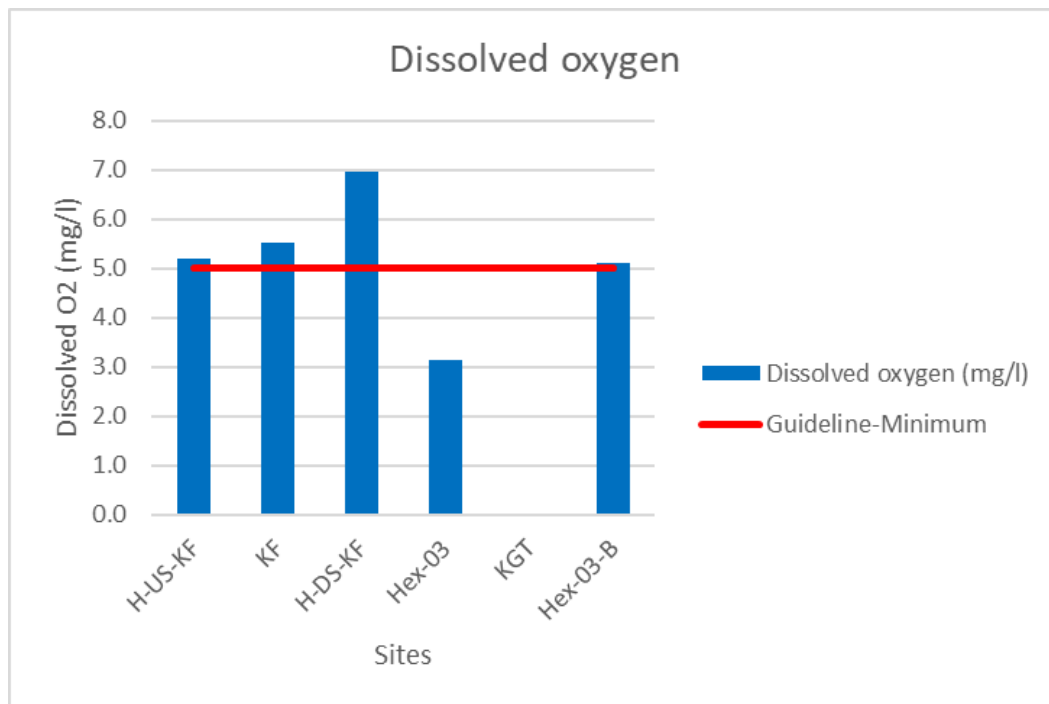


Figure 4: Dissolved oxygen levels (mg/l) at the time of sampling at the different biomonitoring sites.

As a standard management procedure, a full statistical evaluation of water quality data at these biomonitoring localities (as performed by Aquatico Scientific) will be required to conclude whether specific variables or a combination of variables, not included in the biota specific range, are impacting on the aquatic ecosystems.

3.3 Toxicity testing

At the time of compiling this biomonitoring report, the latest toxicity testing results for the Pollution Control Facilities available to Clean Stream Biological Services were based on the May 2018 dataset, as submitted as a separate toxicity testing report by Biotox Laboratory Services (Report no. RPM-A-18_TOX).

The latest tributary toxicity testing report, as performed in conjunction with the October 2018 biomonitoring survey, is also included and discussed in this biomonitoring report.

As per SANAS requirements, the above-mentioned toxicity testing reports were produced independently by Biotox Laboratory Services (Pty) Ltd. All results contained in this section are therefore sourced from the Biotox reports, which are included in Addendum 1.

Toxicity testing (as conducted in this biomonitoring programme) is applied by exposing biota under laboratory conditions to water sources (pollution control dams, effluent streams or streams/rivers) to accurately determine the risk of such water types to the biota of the receiving water bodies. Toxicity results indicate the risk posed to the Hex River and its tributaries in the event of release, seepage or overflow from possible sources of pollution. Up to four trophic levels (at least 3, including acute and chronic approaches) of biota, *i.e.*, vertebrates (*Poecilia reticulata*), invertebrates (*Daphnia magna*), bacteria (*Vibrio fischeri*) and primary producers (*Selenastrum capricornutum*) are exposed to the samples per standard procedures under laboratory conditions and thereafter a risk/hazard category is determined by application of the latest **DEEEP**¹ DWS recommended protocols and hazard classification. The final risk classification is expressed in terms of **acute**² and **chronic**³ toxicity risk. The *Poecilia reticulata* and *Daphnia magna* test results are based on mortality rates over a relatively short period of the lifespan of the organisms, hence allowing for acute interpretation. *Selenastrum capricornutum* and *Vibrio fischeri* individual test results are based on inhibition rates over relatively long periods of the lifespan of the organisms, hence allowing for short-chronic toxicity hazard interpretation.

Selected toxicity samples (Hex River tributaries) were tested on a twice per annum schedule, while the PCD (pollution control dam) samples are tested once per annum, on either a **screening**⁴ acute level or a **definitive**⁵ acute level, at this stage. The frequency of testing is informed by the level of toxicity. If toxicity levels increase, it may become relevant and useful to increase the frequency of testing. The frequency and type of toxicity testing required (screening vs. definitive) should be revised from time to time based on the outcome of the specific year's assessments.

Hazard classification for screening tests (undiluted samples)

After the determination of the percentage effect⁶ (EP), obtained with each of the **battery of toxicity screening** tests performed, the sample is ranked into one of the following five classes:

¹ DEEEP = Direct Estimation of Ecological Effect Potential. This is a battery of tests that can measure toxicity of complex mixtures based on a set of parameters stemming from the results of effects, even if all constituents are not known. Thereafter a hazard class is determined based on the resulting parameters of the battery of tests.

² Acute = Acute refers to an exposure over a relatively short period of the lifespan of biota, of which the result is generally based on mortality rates.

³ Chronic = Chronic refers to prolonged exposures over an extended period of the lifespan of test organisms, of which the results are generally based on growth inhibition rates.

⁴ Screening = A screening toxicity test refers to an undiluted (100% concentration) sample. This is usually performed on a sample from the biomonitoring sites in the receiving water bodies (river/streams) to determine if any toxicity is present. This is performed both up- and downstream of the potential impacts to enable the determination of downstream increases or decreases in toxicity.

⁵ Definitive = A definitive toxicity test refers to the exposure of test organisms to both the 100% concentration as well as a range of dilutions, generally used to determine the risk of a pollution source that may have a toxicity effect on the receiving water body (such as effluents and PCD's). The range of dilutions are therefore useful in the event that the 100% sample concentration presents acute toxicity, and allows for the determination of a safe dilution factor, to negate toxicity effects on the receiving water bodies.

⁶ EP (Percentage effect) = an effect measured either as a mortality rate or inhibition rate (depending on the type of test). A 10% effect is regarded as a slight acute toxicity for daphnia and guppies, while a 20% effect is regarded as a slight acute toxicity for algae and bacteria (vibrio). A 50% effect is regarded as an acute toxicity for all of the tests (daphnia, guppies, algae and bacteria)

Screening	Class I	No acute/chronic environmental hazard - none of the tests shows a toxic effect
	Class II	Slight acute/chronic environmental hazard - a statistically significant percentage effect is reached in at least one test, but the effect level is below 50%
	Class III	Acute/chronic environmental hazard - the percentage effect level is reached or exceeded in at least one test, but the effect level is below 100%
	Class IV	High acute/chronic environmental hazard - the 100% percentage effect is reached in at least one test
	Class V	Very high acute/chronic environmental hazard - the 100% percentage effect is reached in all the tests

Toxicity classification system definitive tests (undiluted samples plus range of dilutions)

The samples are classified into one of the following five classes on the basis of the highest toxicity unit (TUa) found in the **battery of toxicity definitive tests** performed. The toxicity unit is a function of the L(E)C50, where $(TUa) = 100/L(E)C50$. The 50% Lethal/Effective concentration (LC50 or LE50) is the linear calculated (derived) concentration at which a 50% mortality or inhibition rate can be expected. Hence, the lower this value is, the higher the acute toxicity level. Conversely, the higher the toxicity unit (TUa) is, the higher the acute toxicity level is. The conversion of L(E)C50 values to TUa values is therefore merely done to achieve a classification scale of increasing values related to increasing toxicity risk:

Definitive	Class I	No acute/chronic environmental hazard - none of the tests shows a toxic effect
	Class II	Slight acute/chronic environmental hazard - the percentage effect observed in at least one toxicity test is significantly higher than in the control, but the effect level is below 50% (TU is <1)
	Class III	Acute/chronic environmental hazard - the L(E)C50 is reached or exceeded in at least one test, but in the 10 fold dilution of the sample the effect level is below 50% (TU is between 1 and 10)
	Class IV	High acute/chronic environmental hazard - the L(E)C50 is reached in the 10 fold dilution for at least one test, but not in the 100 fold dilution (TU is between 10 and 100)
	Class V	Very high acute/chronic environmental hazard - the L(E)C50 is reached in the 100 fold dilution for at least one test (TU is >100)

Weighting: Each sample is furthermore weighed according to its relative toxicity levels (out of 100%). Higher values indicate that more of the individual tests indicated toxicity within a specific class.

3.3.1 May 2018 and October 2018

Toxicity testing of pollution control facilities (May 2018 only)

Various toxicity hazards were identified during the May 2018 survey, ranging from “slight hazard” (Class II) to “very high hazard” (Class III), implying that some effluents/potential effluents could pose a serious risk to the receiving water bodies if released (Table 4).

Sample K035, K086, K105, K125 and K176 showed “no acute/chronic environmental toxicity hazard” (Class I). As a result of macro-invertebrate mortality rates of 20% for samples K046 and K048; as well as 15% mortality recorded for sample K133, these samples were classified as having a “slight acute environmental toxicity hazard” (Class II). Sample K194 showed a “chronic environmental toxicity hazard” (Class II) based on the TU of 2.6.

Table 4: Toxicity results and hazard classification for selected pollution facilities (May 2018).

Results		K035	K046	K048	K086	K105	K125	K133	K176	K194
<i>W</i> ater quality	pH @ 25°C (A)	7,8	7,4	7,6	7,7	7,6	7,6	7,7	7,4	7,4
	EC (Electrical conductivity) (mS/m) @ 25°C (A)	584,0	612,0	654,0	537,0	296,0	360,0	209,3	608,0	562,0
	Dissolved oxygen (mg/l) (NA)	6,4	7,2	6,7	6,1	7,4	7,7	5,9	7,1	4,6
<i>V. fischeri</i> (bacteria) (A)	Test started on yy/mm/dd	18/05/17	18/05/17	18/05/17	18/05/17	18/05/17	18/05/17	18/05/17	18/05/17	18/05/18
	% 30min inhibition (-) / stimulation (+) (%)	6	8	2	1	2	-2	-7	-2	-87
	EC/LC20 (30 mins)	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	16
	EC/LC50 (30 mins)	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	39
	Toxicity unit (TU) / Description	<1	<1	<1	<1	<1	<1	<1	<1	2,6
<i>S. capricornutum</i> (micro-algae) (A)	Test started on yy/mm/dd	18/05/15	18/05/15	18/05/15	18/05/15	18/05/15	18/05/15	18/05/15	18/05/15	18/05/15
	% 72hour inhibition (-) / stimulation (+) (%)	1	0	-8	**	5	-7	-1	-7	-9
	EC/LC20 (72hours)	n.r.	n.r.	n.r.	**	n.r.	n.r.	n.r.	n.r.	n.r.
	EC/LC50 (72hours)	n.r.	n.r.	n.r.	**	n.r.	n.r.	n.r.	n.r.	n.r.
	Toxicity unit (TU) / Description	<1	<1	<1	**	<1	<1	<1	<1	<1
<i>D. magna</i> (water flea) (A)	Test started on yy/mm/dd	18/05/14	18/05/14	18/05/14	18/05/14	18/05/14	18/05/14	18/05/14	18/05/14	18/05/14
	% 48hour mortality rate (-%)	-10	-20	-20	0	0	0	-15	-10	-10
	EC/LC10 (48hours)	n.r.	50	50	n.r.	n.r.	n.r.	83	n.r.	n.r.
	EC/LC50 (48hours)	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.
	Toxicity unit (TU) / Description	<1	<1	<1	<1	<1	<1	<1	<1	<1
<i>P. reticulata</i> (uppy) (A)	Test started on yy/mm/dd	18/05/17	18/05/17	18/05/17	18/05/17	18/05/17	18/05/17	18/05/17	18/05/17	18/05/17
	% 96hour mortality rate (-%)	-8	0	0	0	0	-8	0	0	-8
	EC/LC10 (96hours)	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.
	EC/LC50 (96hours)	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.
	Toxicity unit (TU) / Description	<1	<1	<1	<1	<1	<1	<1	<1	<1
Estimated safe dilution factor (%) (for definitive testing only)	None required	50	50	None required	None required	None required	83	None required	16	
Overall classification - Hazard class***	Class I - No acute/chronic hazard	Class II - Slight acute hazard	Class II - Slight acute hazard	Class I - No acute/chronic hazard	Class I - No acute/chronic hazard	Class I - No acute/chronic hazard	Class II - Slight acute hazard	Class I - No acute/chronic hazard	Class III - Chronic hazard	
Weight (%)	0	25	25	0	0	0	25	0	25	

Key:
 WQ = Water quality at the time of starting the *Daphnia magna* testing.
 % = for definitive testing, only the 100% concentration (undiluted) sample mortality/inhibition/stimulation is reflected by this summary table. The dilution series results are considered for EC/LC values and Toxicity unit determinations.
 n.r. = not relevant, i.e. the 100% concentration caused less than 10/20/50% (effective concentration) mortalities or inhibition.
 ** = Algal test result inconclusive due to interference (caused either by precipitate forming in the sampling during testing). As the degree of inhibition/stimulation is unknown, individual test result was not used for overall hazard classification.
 *** = The overall hazard classification takes into account the full battery of tests and is not based on a single test result. Note that the overall hazard classification is expressed as acute/chronic level of toxicity, due to the fact that the *S. capricornutum* (micro-algae) and the *V. fischeri* tests are regarded as short-chronic levels of toxicity tests and the overall classification therefore contains a degree of chronic toxicity assessment.
 Weight (%) = relative toxicity levels (out of 100%), higher values indicate that more of the individual tests indicated toxicity within a specific class.
 site's sample name shaded in purple = screening test site's sample name shaded in orange = definitive test

Toxicity testing of Hex River tributaries (October 2018)

As noted earlier in the report, the electrical conductivity (EC) levels are almost always very high within the Klipfonteinspruit. EC is often an indication of reduced water quality but toxicity testing results revealed that no hazard (Class I) was observed at the Klipfonteinspruit sites (KF), before entering the Hex River (Table 5). This is an encouraging improvement since the October 2014 and April 2015 surveys, when a high hazard (Class IV) and a slight hazard (Class II) was presented by this tributary. It was noted that the Klipfonteinspruit was not flowing during the October 2014 survey and that contamination was therefore contained within isolated pools. It is important to note that APPD activities potentially contribute to this tributary.

It is now recommended to include both site KF and KFD for toxicity testing in the Klipfonteinspruit. The effect of different sources of pollution can then be distinguished more accurately.

Table 5: Toxicity results and hazard classification for selected Hex River tributary samples (October 2018).

	Results	KF
w _{Water} quality	pH @ 25°C (A)	7,7
	EC (Electrical conductivity) (mS/m) @ 25°C (A)	501,0
	Dissolved oxygen (mg/l) (NA)	7,6
V. fischeri (bacteria) (A)	Test started on yy/mm/dd	18/11/01
	%30min inhibition (-) / stimulation (+) (%)	44
	EC/LC20 (30 mins)	*
	EC/LC50 (30 mins)	*
	Toxicity unit (TU) / Description	no short-chronic hazard
D. magna (waterflea) (A)	Test started on yy/mm/dd	18/10/29
	%48hour mortality rate (-%)	0
	EC/LC10 (48hours)	*
	EC/LC50 (48hours)	*
	Toxicity unit (TU) / Description	no acute hazard
P. reticulata (guppy) (A)	Test started on yy/mm/dd	18/10/29
	%96hour mortality rate (-%)	0
	EC/LC10 (96hours)	*
	EC/LC50 (96hours)	*
	Toxicity unit (TU) / Description	no acute hazard
Overall classification - Hazard class***		Class I - No acute/short-chronic hazard
Weight (%)		0

Key:

* = EC/LC values not determined, definitive testing required if a hazard was observed and persists over subsequent sampling runs.

*** = The overall hazard classification takes into account the full battery of tests and is not based on a single test result. Note that the overall hazard classification is expressed as acute/chronic level of toxicity, due to the fact that the *S. capricornutum* (micro-algae) and the *V. fischeri* tests are regarded as short-chronic levels of toxicity tests and the overall classification therefore contains a degree of chronic toxicity assessment.

Weight (%) = relative toxicity levels (out of 100%), higher values indicate that more of the individual tests indicated toxicity within a specific class.

site/sample name shaded in purple = screening test

site/sample name shaded in orange = definitive test

3.3.2 Temporal variation of toxicity results (2008 to 2018)

To determine temporal (over time) trends of increasing/decreasing toxicity levels, the risk class for each sample was plotted for each survey. Thereafter, linear trends over time were determined for the risk class at each site (Figures 5 & 6). It is important to note that these trends were not based on the actual mortalities/inhibition or lethal concentrations, but on the derived risk class for each survey and is merely included to gain a general understanding of increased/decreased risk over time.

Annually tested PCD's and selected streams

From the temporal database, it is clear that most samples have varying degrees of toxicity and that almost all of the samples have fallen within the Class II or higher classes from time to time (Figure 5). Samples Dam2 and Dam 4/5 consistently fall into the higher hazard classes and are therefore never suitable for

undiluted release⁷ (including uncontrolled releases) to the environment. Some samples have, however, improved notably over time, such as sample K105, which has improved from an acute hazard (Class III) during 2008/2009 to no acute hazard (Class I) over the past five years. Environmental managers should take note of these hazard classes to plan licenced releases and/or contain hazardous water types at the appropriate times.

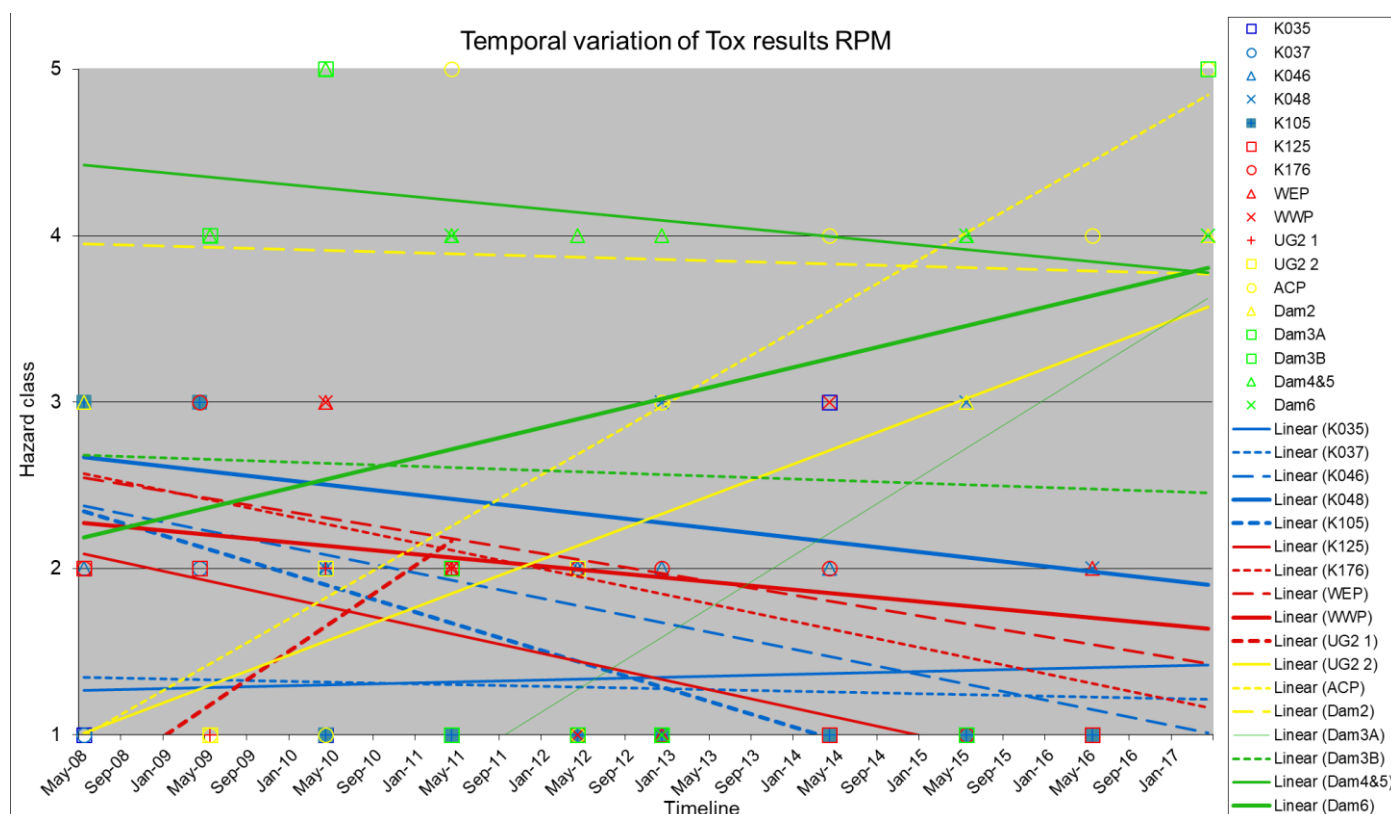


Figure 5: Temporal trends of toxicity results (annually tested PCD's and selected streams).

It is strongly recommended that definitive toxicity testing be continued for the samples that regularly display positive toxicity levels of Class III or higher. Definitive toxicity testing will allow for the estimation of safe dilution factors should the mine wish to apply for a water use licence to legally discharge such water types. These factors will also be essential for environmental managers to predict whether the toxicity of polluted water can be negated by natural dilution if accidentally released (e.g. spills, leaks or seepage) to the receiving environment. Definitive testing will furthermore assist in the suitable scheduling for planned releases (*i.e.* whether water could be released during the dry season and, if not, whether sufficient dilution is only likely to be achieved during the wet season/times of high river flow).

Bi-annually tested tributaries

From the temporal database, it is clear that the relevant tributaries (Klipfonteinspruit and Klipgatspruit) have displayed toxicity hazards at times (Figure 6). It is encouraging that both tributaries have recently displayed lower toxicity. The Klipfonteinspruit is therefore also displaying a decreasing trend (improved hazard over time) as noted in Figure 6.

⁷ Although theoretical predictions in terms of suitability for release are provided, releases remain bound by licensing conditions and are not prescribed/permitted by toxicity testing results.

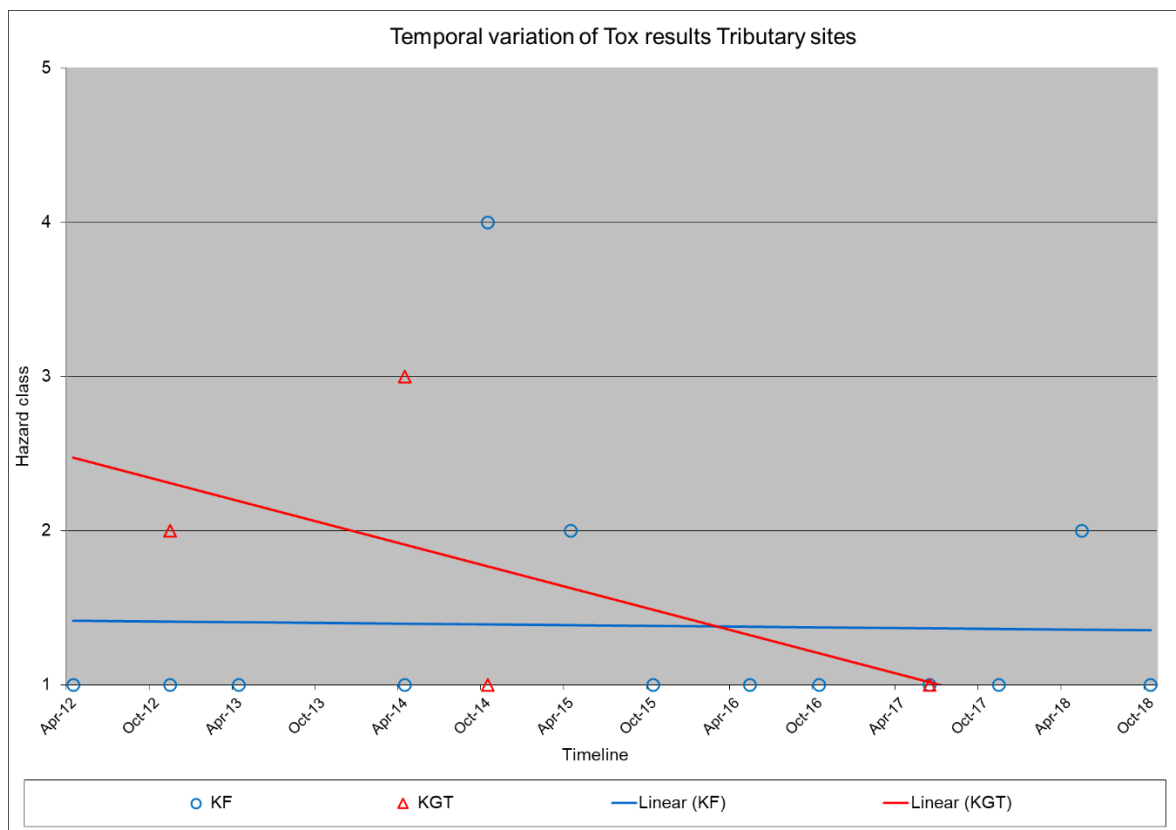


Figure 6: Temporal trends of toxicity results (bi-annually tested tributaries).

3.4 Aquatic invertebrate assessment: South African Scoring System 5

The South African Scoring System (Version 5) is a site-specific index which, together with associated habitat index (biotope suitability index), gives a general perspective of the biotic integrity (based on macro-invertebrates) and the impact of water quality on the biotic integrity of the specific sites (Thirion *et.al.*, 1995; Dickens and Graham, 2001). The biotope suitability index considers the suitability of the different sampled biotopes in terms of quality and availability. It thereby firstly assesses whether the total SASS5 scores of two sites are directly comparable by comparing the total biotope suitability scores. If the total biotope suitability scores are very different this would imply that the total SASS5 scores should not be compared, but instead the most comparable SASS biotope scores. The most comparable SASS biotope scores are identified by comparing the various individual biotope suitability scores. In addition to the biotope suitability index, the Integrated Habitat Assessment System version 2 (IHAS) was also applied and included to give the macro-invertebrate specific habitat descriptions (Table 6).

Average score per taxon (ASPT) values are also useful in the assessment and comparison of biotic conditions at different sites. Based on field trials assessed by Dickens and Graham (2001) the ASPT was less variable than total SASS5 scores when conducted within a given river reach by different operators, considering all biotopes. ASPT is therefore included in the discussion below.

Biotic conditions, based on the total SASS5 and ASPT scores, decreased slightly from site H-US-KF to site H-DS-KF (opposite spatial trend observed during the May 2018 survey) (Table 7; Figure 7). This is in contrast with most previous surveys when no spatial deterioration was observed. The most similar biotope⁸ between

⁸ To compare the effect of water quality on SASS scores on a spatial scale, habitat differences are considered. Therefore, the most comparable SASS_{biotope} scores, in terms of habitat are also contrasted to gain insight regarding the effect of water quality on the biotic conditions (biotic integrity)

the two sites was GSM, confirming the probability of downstream deterioration in water quality (Table 7). Although biotic conditions at site KF in the Klipfonteinspruit were relatively low, it appeared to be similar to the adjoining Hex River sites. Furthermore, SASS scores (and hence biotic conditions) are expected to be affected by an intermittent flow regime (as regularly observed in the seasonal Klipfonteinspruit).

Table 6: Integrated Habitat Assessment (IHAS) description of the different biomonitoring sites.

Sampling Habitat	H-US-KF		KF		H-DS-KF		Hex-03		Hex-03-B	
	Desc	Score	Desc	Score	Desc	Score	Desc	Score	Desc	Score
Stones In Current (SIC)										
Total length of white water rapids (ie: bubbling water) (in meters)	0-1	1	0-1	1	none	0	none	0	none	0
Total length of submerged stones in current (run) (in meters)	>2-5	2	>2-5	2	>2-5	2	>2-5	2	>2-5	2
Number of separate SIC area's kicked	2-3	2	6+	4	4-5	3	4-5	3	4-5	3
Average stone sizes kicked (in cm's)	11-20	3	11-20	3	11-20	3	11-20	3	11-20	3
Amount of stone surface clear (in %)	26-50	2	51-75	3	0-25	1	0-25	1	26-50	2
Protocol: time spent actually kicking SIC's (in mins)	2	3	2	3	2	3	2	3	2	3
SIC score (max 20)		13		16		12		12		13
Vegetation (VEG)										
Length of fringing vegetation sampled (banks) (in meters)	2	4	2	4	>1-2	3	2	4	2	4
Amount of aquatic vegetation/algae sampled (in square meters)	0-0.5	1	>0.5-1	2	0-0.5	1	>0.5-1	2	>0.5-1	2
Fringing vegetation sampled in	mix	5	mix	5	run	2	mix	5	mix	5
Type of veg. (percent leafy as apposed to stems/shoots)	26-50	3	26-50	3	26-50	3	26-50	3	26-50	3
Veg score (max 15)		13		14		9		14		14
Other Habitat / General (O.H.)										
Stones Out Of Current (SOOC) sampled (in square meters)	0-0.5	1	0-0.5	1	0-0.5	1	0-0.5	1	0-0.5	1
Sand sampled (in minutes)	none	0	none	0	none	0	0-0.5	2	0-0.5	2
Mud sampled (in minutes)	0.5	3	0.5	3	0.5	3	0-0.5	2	0-0.5	2
Gravel sampled (in minutes)	none	0	none	0	none	0	0-0.5	1	0-0.5	1
Bedrock sampled (all = no SIC, sand, gravel)	none	0	some	1	some	1	some	1	some	1
Algal presence (m ²)	>1sqm	3	>1-2sqm	2	rocks	1	>2sqm	0	>1-2sqm	2
Tray identification	correct	3	correct	3	correct	3	correct	3	correct	3
O.H. score (max 20)		10		10		9		10		12
Sampling habitat totals (max 55)		36		40		30		36		39
Stream Condition										
Physical										
River make up	2 mix	4	2 mix	4	run	2	2 mix	4	2 mix	4
Average width of stream (in meters)	1-2	4	>2-5	5	>5-10	2	>2-5	5	>2-5	5
Average depth of stream (in meters)	>0.5	5	0.5	4	>0.5	5	0.5	4	>0.5	5
Approximate velocity of stream	mix	5	mix	5	medium	3	mix	5	mix	5
Water colour	discoloured	3	discoloured	3	discoloured	3	discoloured	3	discoloured	3
Recent disturbances	none	5	none	5	none	5	none	5	none	5
Bank/Riparian vegetation	mix	4	mix	4	grass	2	mix	4	mix	4
Surrounding impacts	farming	1	other	3	erosion	0	farming	1	farming	1
Left bank cover (rocks and vegetation) (in %)	51-80	1	51-80	1	0-50	0	51-80	1	51-80	1
Right bank cover (rocks and vegetation) (in %)	51-80	1	51-80	1	0-50	0	51-80	1	51-80	1
Stream condition total (max 45)		33		35		22		33		34
Total IHAS score (%)		69		75		52		69		73

Biotic conditions, based on the total SASS5 scores and ASPT values, decreased largely from site H-DS-KF to Hex03 (Table 7; Figure 5). This was not habitat related as availability and suitability was better at the downstream site. A comparison of similar SASS-biotopes confirmed lowered biotic conditions, suggesting that the water quality was further affected between these sites, during October 2018. It has to be noted that organic enrichment and solid waste disposal appears extensively at this site and will likely affect biotic integrity if not mitigated (Plate 2). This was further supported by low dissolved oxygen levels (Refer to Section 3.2). It is again noted that the reason for lowered dissolved oxygen levels are unlikely to be related to APPD

activities because levels were within the guideline at site H-US-KF and no further APPD activities take place towards site Hex03.

Table 7: SASS5, ASPT and habitat suitability/availability index scores for different monitoring sites (October 2018).

Monitoring site	SASS5 score	ASPT	SASS5-score per biotope			Biotope availability and suitability (Scores)			
			SASS _{Stones}	SASS _{Vegetation}	SASS _{GSM}	Stones	Vegetation	GSM	Combined
H-US-KF	49	3.77	7	46	21	3	6	3	12
KF	46	3.54	19	45	6	5	11	3	19
H-DS-KF	37	3.70	19	22	10	6	5	3	14
Hex-03	14	2.80	11	14	11	4	9	6	19
KGT	Dry								
Hex-03-B	28	4.00	28	20	8	5	14	5	24

Key:

ASPT - Average Score Pre Taxon

S-Stones

Veg-Vegetation

GSM-Gravel, sand & mud

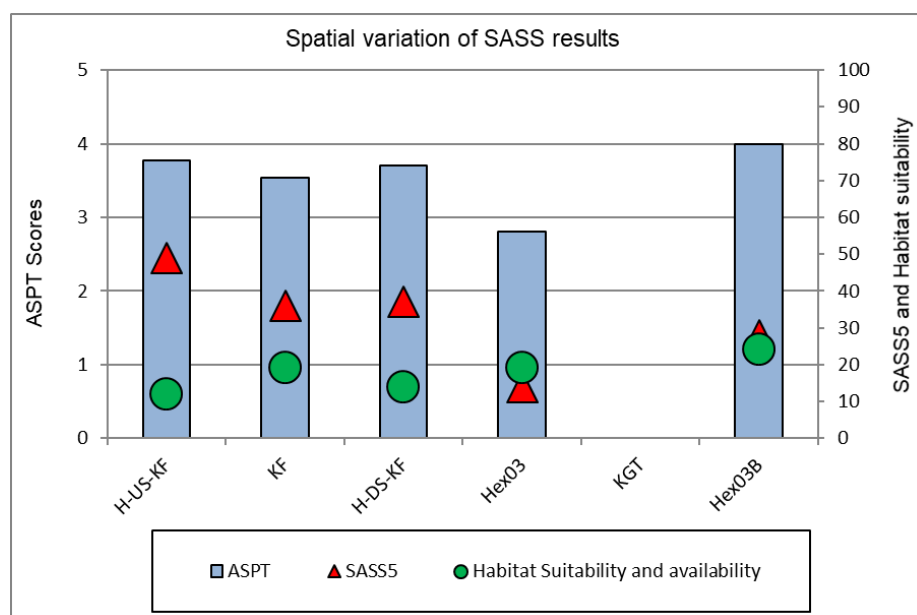


Figure 7: ASPT, SASS5 and total habitat suitability scores at biomonitoring sites during October 2018.

Biotic conditions, based on the total SASS5 scores and ASPT values, recovered largely from site Hex03 to Hex03-B (Table 7; Figure 5). This was at least partly habitat related as availability and suitability was better at the downstream site. Comparison of similar SASS-biotopes confirmed improved biotic conditions, suggesting that the water quality was not further affected between these sites, during October 2018. Site Hex03-B was included for the first time during the October 2018 survey. This was done to gauge the point-source effect, on the spatial integrity of the Hex River taking into consideration the Klipgatspruit. APPD is a potential contributor to pollution of the Klipgatspruit and continued monitoring (comparison of sites Hex03 and Hex03-B) will be essential to verify any possible impact and the severity thereof.

In conclusion, it can be stated that various sections of the Hex River within the study area show clear signs of reduced biotic integrity, based on macro-invertebrates. This was especially evident with the previous extended study area (now reduced due to Sibanye Stillwater sale and the complete scope no longer tasked to Clean Stream Biological Services). As such, a steady deterioration in biotic integrity in a downstream direction has consistently been recorded (Figure 8). However, the biotic integrity of the Hex River currently does improve on a spatial scale at certain sites (Figure 9) and appears to be more stable within the recently adopted reduction of the study area.



Plate 2: Indication of organic enrichment (algal proliferation) and solid waste disposal at site Hex03.

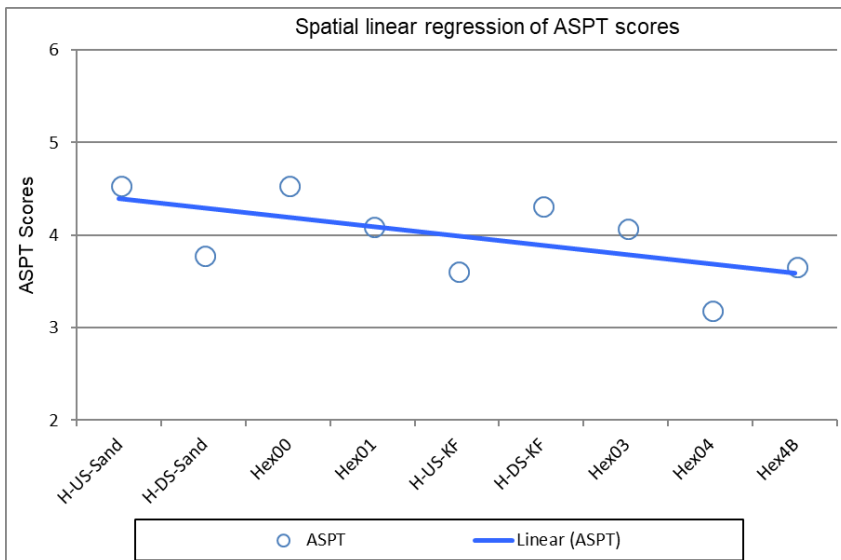


Figure 8: Linear regression of biotic integrity (as indicated by invertebrate ASPT scores) of the Hex River on a spatial scale (arranged sequentially in a downstream direction) during May 2018 (extended study area).

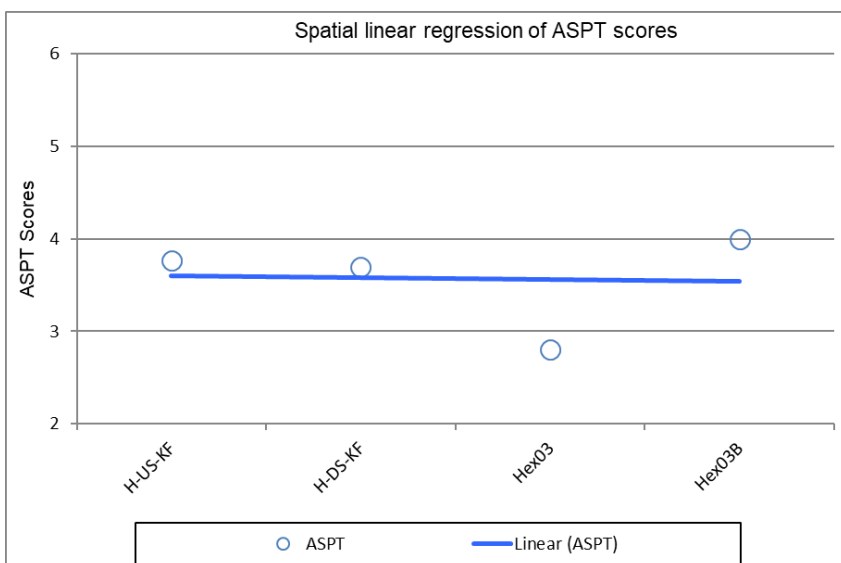


Figure 9: Linear regression of biotic integrity (as indicated by invertebrate ASPT scores) of the Hex River on a spatial scale (arranged sequentially in a downstream direction) during October 2018 (reduced study area).

Temporal (long- and medium-term) trends

All of the datasets collected since May 2002 were compared to evaluate long-term and medium-term temporal trends in the biotic condition of the Hex River (Figures 10 & 11). Linear regression of historic ASPT values were calculated and plotted in order to achieve this. For the purpose of this monitoring programme, temporal trends are differentiated into long-term (more than four years) and medium-term (last 4 years) trends. The long-term trend gives a perspective on whether the biotic integrity (at the different sites) has improved or deteriorated since the inception of the monitoring programme. The medium-term trend confirms whether observed long-term trends are likely to continue or are in the process of being reversed.

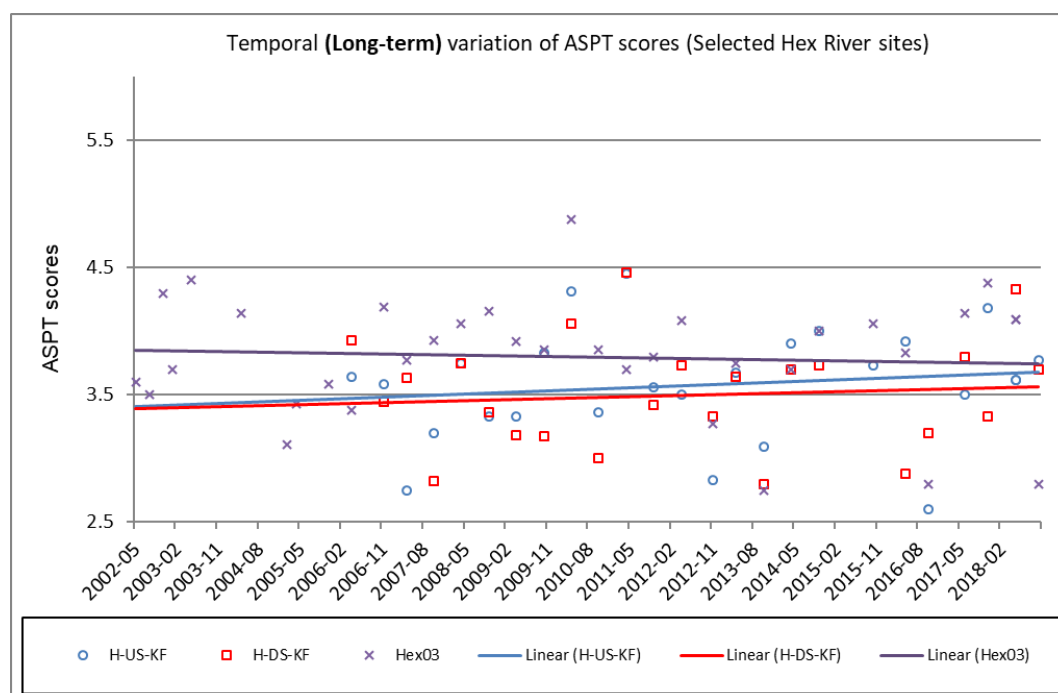


Figure 10: Long-term trends of biotic integrity in terms of macro-invertebrates at biomonitoring sites.

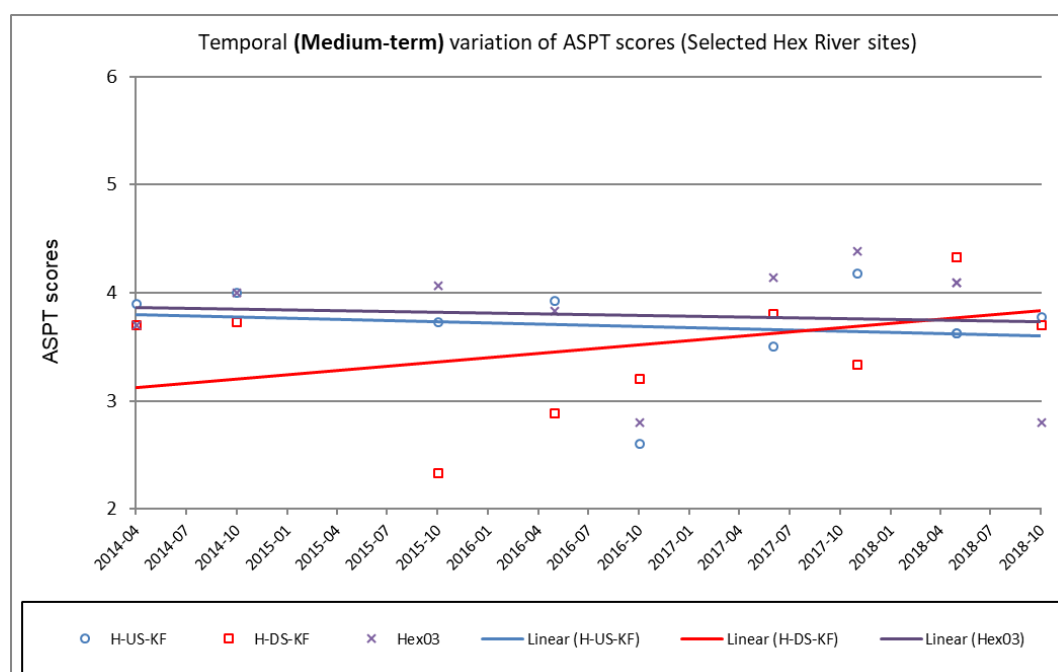


Figure 11: Medium-term trends of biotic integrity in terms of macro-invertebrates at biomonitoring sites.

Long-term trends indicated fair but stable biotic conditions at the three relevant Hex River sites (Figure 10). A slight improvement is in fact visible at sites H-US-KF and H-DS-KF. Medium term analyses (Figure 11) confirm generally lower biotic conditions at the latter site but, encouragingly, also eludes to recent improvement.

The long-term trend at site Hex03 is slightly negative as confirmed by the medium-term trends. The recently observed organic pollution is almost certainly the cause, being **unrelated** to APPD activities.

Continued monitoring will be essential to amass a database at the newly adopted downstream site (Hex03-B). This will serve to gauge the temporal effect of water users (including APPD) within the Klipgatspruit catchment, on the receiving environment (Hex River).

3.5 Fish Assessment

Fish sampling is only scheduled once per annum and was last performed during May 2018, based on the extended scope (prior to Sibanye Stillwater sale). The approach and study area will therefore change in future, taking into consideration the reduced scope of this specific study, as performed by Clean Stream Biological Services. The complete extract (report RPM-A-18) of the fish results, is again repeated below for reference value and the sake of comprehensiveness. It should be kept in mind that various sampled sites are no longer part of this scope of work (since October 2018).

The state and health of fish communities have been noted to give a reliable indication of short and long-term stress on aquatic systems. Fish communities possess various characteristics that render them important in the assessment of river health. They occupy positions throughout the aquatic food web, and are typically present in all but the most polluted of waters. Because fish often move over considerable distances, they have the potential to integrate diverse aspects of relatively large-scale habitats. Fish can therefore provide an integrated view of watershed conditions. Compared to other aquatic organisms, fish are furthermore relatively long-lived, and are therefore useful in providing a temporal dimension. They are also relatively easy to identify and after data is gathered, they can be released again. For the general public, fish are also the most well-known of aquatic organisms, and they are more likely to understand information about the condition of the fish community than about other taxa such as invertebrates. There are, however, some difficulties in using fish as biomonitoring indicators. Amongst these problems is the selective sampling attained by certain sampling equipment (for specific biotopes and for certain sizes and species of fish), the mobility of fish on spatial and temporal time scales, and the labour intensity of fish sampling.

Seven naturally occurring (native) fish species (*Barbus⁹ paludinosus*; *Barbus trimaculatus*; *Barbus unitaeniatus*; *Clarias gariepinus*; *Oreochromis mossambicus*; *Pseudocrenilabrus philander* and *Tilapia sparrmanii*) were sampled at the five sampling sites in the Hex River during the 2017 to 2018 period (Table 8). The diversity of observed fish species was lower than expected at all of the sampling sites, indicating lowered biotic integrity (when compared to natural expected conditions). Possible reasons for lowered species diversity are outlined in the paragraphs below, which deal with the Fish Assemblage Integrity Index (FAII) and Fish Response Assessment Index (FRAI) results.

⁹ Recent literature (Yang *et al.*, 2015) recommend a name change of the genus 'Barbus' to 'Enteromius'. This was however contested and rejected by various authors (i.e. Schmidt and Bart, 2015) and requires further verification. Skelton (2016) supports the recommended name change and started implementing this in recent studies and literature.

The Fish Assemblage Integrity Index (FAII) and Fish Response Assessment Index (FRAI)

For the purpose of this study, a simplified version of the FAII was used (presence / absence) to enable comparisons between each site (spatial analyses), while the FRAI was used to determine the estimated biotic integrity, based on fish, of the entire Hex River reach under investigation which would provide a valuable tool to provide an overall status of the reach under investigation and to determine long-term (temporal) changes.

Table 8: Fish species expected and observed during the last two surveys.

Species	Native/Exotic	Sites									
		Hex00		Hex01		Hex03		Hex04		Hex4B	
		Exp	Obs	Exp	Obs	Exp	Obs	Exp	Obs	Exp	Obs
<i>Amphillius uranoscopus</i>	Native										
<i>Enteromius[#] paludinosus</i>	Native		Obs		Obs		Obs		Obs		
<i>Enteromius[#] trimaculatus</i>	Native						Obs				
<i>Enteromius[#] unitaeniatus</i>	Native										
<i>Chiloglanis pretoriae</i>	Native										
<i>Clarias gariepinus</i>	Native		Obs				Obs		Obs		Obs
<i>Cyprinus carpio[*]</i>	Exotic										
<i>Labeobarbus marequensis</i>	Native										
<i>Labeo cylindricus</i>	Native										
<i>Labeo molybdinus</i>	Native										
<i>Mesobola brevianalis</i>	Native										
<i>Oreochromis mossambicus</i>	Native						Obs		Obs		Obs
<i>Pseudocrenilabrus philander</i>	Native		Obs		Obs		Obs		Obs		Obs
<i>Tilapia sparrmanii</i>	Native		Obs		Obs						
No. of naturally occurring species expected/present		9	4	10	3	10	5	13	4	13	3
% expected / observed		44		30		50		31		23	

Key: sampled previous survey, sampled this survey, sampled last two surveys

* Exotic species are by definition not expected to occur under natural conditions and therefore not taken into account for FAII calculations

Previous genus name: Barbus

Fish Assemblage Integrity Index (FAII)

Based on morphological characteristics and the limited number of sites, each sampling site was classified as a separate fish habitat segment. Therefore, the “frequency of occurrence of fish within segments” was omitted from FAII for separate monitoring sites. Comparison of relative FAII scores for different sites would firstly give a perspective on the relative condition of the fish community at different sites and secondly indicate the impact of various anthropogenic activities up- and downstream of the different sites. Scores should however be treated with circumspection because the *frequency of occurrence* criterion was not considered, and the FAII scores are therefore less accurate. The list of fish species expected to occur at the sites under investigation is based on information from Skelton (1993) and Le Roux & Steyn (1968), as well as experience from previous surveys (this biomonitoring programme as well as various other mining related biomonitoring programmes, research and Department of Water Affairs’ reserve determination studies). The expected species list is also updated with the knowledge gained from this biomonitoring programme. The species intolerance ratings used in the calculation of the FAII were taken from Kleynhans (2002) and were based on specialisation of preferences towards habitat, food, flowing water and water quality.

The composition of the fish community and the relative FAII (Fish Assemblage Integrity Index) are based on the last two surveys. This is done to increase the accuracy of the results and to avoid the incidental omission of a particular species at a particular site. Furthermore, fish generally take longer to react to stressors

(compared with macro-invertebrates) and are therefore more applicable as an indicator over a period of time (as opposed to a snapshot at any given time).

The biotic integrity (as reflected by the fish assemblage integrity index) increased slightly from site Hex00 (23%) to Hex01 (27%) (Table 9 & Appendix tables; Figure 12). This is an indication that the biotic integrity (based on the fish communities) was not recently deteriorated due to by impacts in the area between these two sites. This is a similar trend as observed with the macro-invertebrate results, which indicated stable biotic conditions between these sites.

Table 9: Relative FAIL scores calculated at different sampling sites (2017 to 2018).

Locality	Relative FAIL (%)
Hex00	23
Hex01	27
Hex03	46
Hex04	22
Hex4B	22

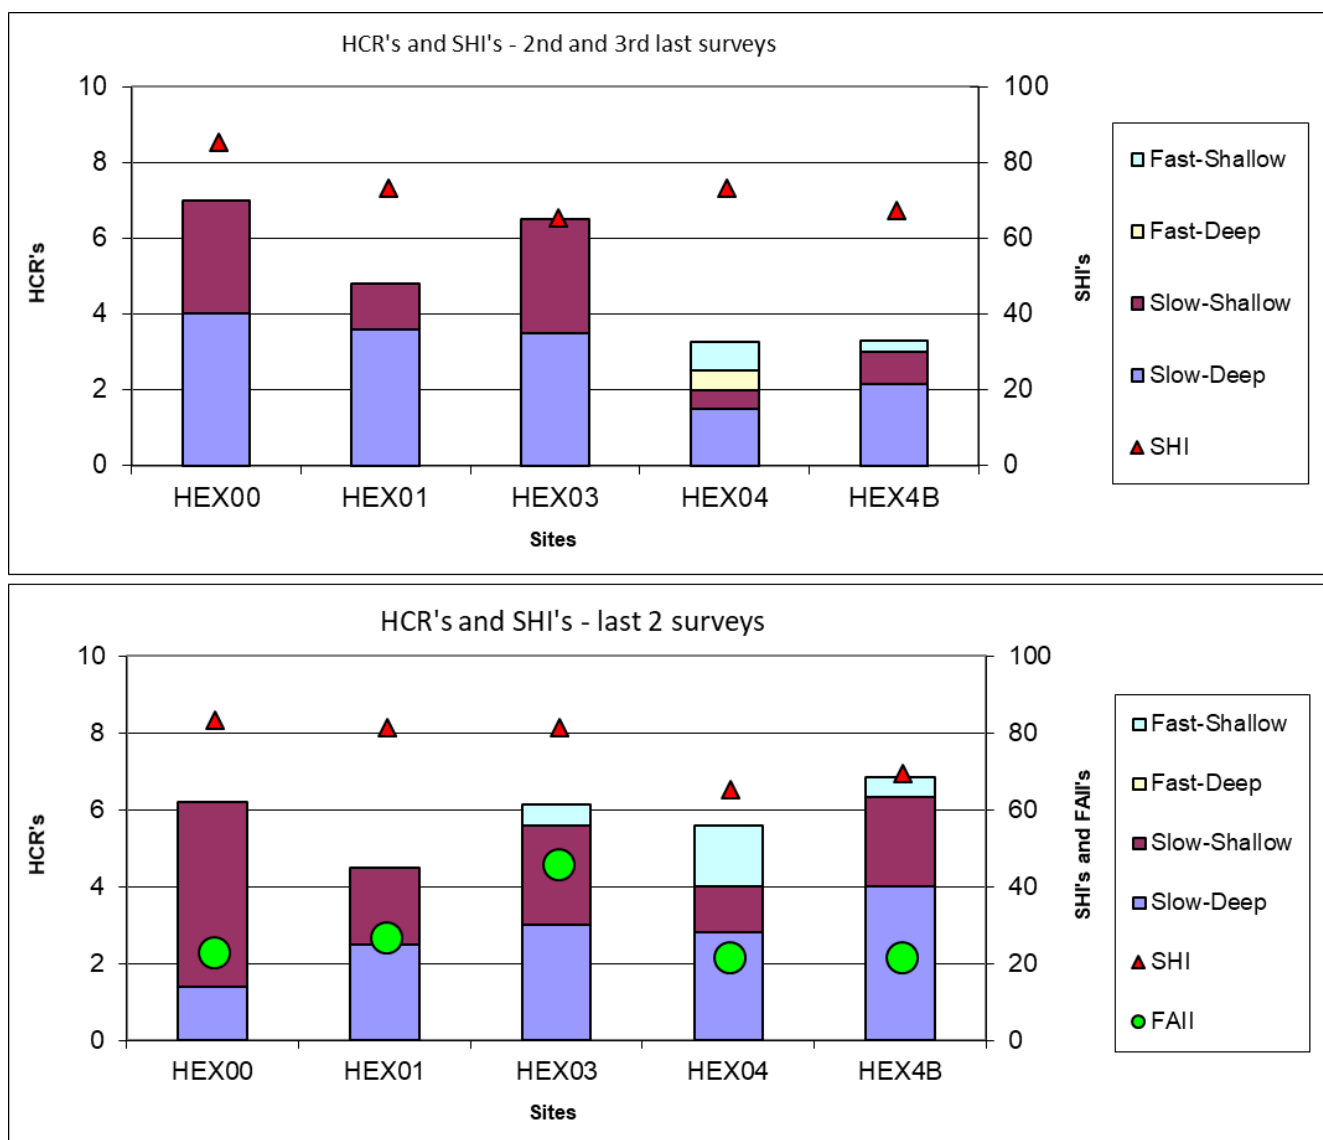


Figure 12: Relative FAIL scores, HCR's and SHI at the different biomonitoring sites.

A spatial improvement was observed from site Hex01 to Hex03, as shown by the FAIL scores increasing from 27% to 46% (Table 9; Figure 12). The spatial improvement was mainly attributed to the presence of *Enteromius trimaculatus* and *Enteromius unitaeniatus* at site Hex03. Both species are tolerant to moderately intolerant to water quality changes (Table 10) and their absence from site Hex01 is therefore not likely to be water quality related. Its absence from site Hex 00 during the 2017 to 2018 period is likely to be a response to lower habitat diversity and availability at this site. Based on these results, it appears that biotic integrity (based on fish) was probably not reduced by deteriorating water quality originating from the Klipfonteinspruit (possibly RPM-related) and/or from the sewage plant (non-RPM-related). This deduction is similar to the macro-invertebrate based deduction between these sites.

Table 10: The relative tolerance of each species towards changes in the environment.

SPECIES NAME	Common name	Trophic specialisation	Habitat specialisation	Flow dependance	Requirement for high water quality	Total intolerance ratings
<i>Amphilius uranoscopus</i>	Stargazer	4.7	4.9	4.8	4.8	4.8
<i>Chiloglanis pretoriae</i>	Shortspine suckermouth	4.4	4.8	4.8	4.5	4.6
<i>Labeo molybdinus</i>	Leadeo labeo	3.3	3.0	3.3	3.2	3.2
<i>Labeo cylindricus</i>	Redeye labeo	3.3	3.0	3.1	3.1	3.1
<i>Labeobarbus marequensis</i>	Largescale yellowfish	2.4	2.8	3.2	2.1	2.6
<i>Mesobola brevianalis</i>	River sardine	3.1	2.2	1.1	2.8	2.3
<i>Enteromius trimaculatus</i>	Threespot barb	3.1	1.4	2.7	1.8	2.2
<i>Enteromius paludinosus</i>	Straightfin barb	1.6	1.4	2.3	1.8	1.8
<i>Enteromius unitaeniatus</i>	Longbeard barb	1.1	1.3	2.3	2.2	1.7
<i>Oreochromis mossambicus</i>	Mazambique tilapia	1.2	1.9	0.9	1.3	1.3
<i>Pseudocrenilabrus philander</i>	Southern mouthbrooder	1.3	1.4	1.0	1.4	1.3
<i>Tilapia sparrmanii</i>	Banded tilapia	1.6	1.4	0.9	1.4	1.3
<i>Clarias gariepinus</i>	Sharptooth catfish	1.0	1.2	1.7	1.0	1.2

Key:

Intolerance ratings are colour shaded on a scale from green to red, with green being least intolerant and red being most intolerant

Species are sorted in descending order from most intolerant (total intolerance rating) to least intolerant

1-2 = Tolerant 2-3 = Moderate tolerant 3-4 = Moderately intolerant 4-5 = Intolerant

As also observed previously, the FAIL scores were largely reduced from site Hex03 towards site Hex04 (Table 9). The potential impact of water quality on the biotic integrity of the Hex River (as measured by the FAIL at site Hex04) should therefore not be disregarded as both macro-invertebrates (during 2016 and 2018) and fish (last 4 years) are now indicating as such. Potential sources of reduced water quality between sites Hex03 and Hex04 include the Klipgatspruit and the Dorpspruit (see also previous discussions regarding potential Dorpspruit impacts).

The biotic integrity (based on fish) was similar between site Hex04 to site Hex4B (Table 9 & Appendix tables; Figure 12), being very poor at both sites. The same poor conditions (albeit spatially increased) was indicated by the macro-invertebrate assessment for these sites.

Fish Response Assessment Index (FRAI)

As mentioned earlier, the Fish Response Assessment Index was adopted to assist in the classification of the Ecological Status, based on fish, of the entire Hex River reach under investigation. The results are therefore

pooled for all sites. The resulting classification is therefore not a reflection of RPM mining impacts, but rather a reflection of the overall cumulative impact/s derived from the catchment.

The section below shows the individual metric driver results (Velocity-Depth, Cover, Flow, Physico-chemical, Migration and Introduced species), as well as the overall FRAI categories and category descriptions for the Hex River (Table 11).

Table 11: Fish Response Assessment Index (FRAI) results for the Hex River reach (all sites) (2017/8 results).

METRIC GROUP	METRIC	*RATING (CHANGE)	METRIC GROUP WEIGHT (%)
VELOCITY-DEPTH CLASSES METRICS	Response of species with high to very high preference for FAST-DEEP conditions	-5	97
	Response of species with high to very high preference for FAST-SHALLOW conditions	-5	
	Response of species with high to very high preference for SLOW-DEEP conditions	-2.5	
	Response of species with high to very high preference for SLOW-SHALLOW conditions	-2	
COVER METRICS	Response of species with a very high to high preference for overhanging vegetation	-1.5	100
	Response of species with a very high to high preference for undercut banks and root wads	-0.5	
	Response of species with a high to very high preference for a particular substrate type	-5	
	Response of species with a high to very high preference for instream vegetation	-0.5	
	Response of species with a very high to high preference for the water column	-3	
FLOW DEPENDANCE METRICS	Response of species intolerant of no-flow conditions	-5	94
	Response of species moderately intolerant of no-flow conditions	-5	
	Response of species moderately tolerant of no-flow conditions	-2	
	Response of species tolerant of no-flow conditions	-1.5	
PHYSICO-CHEMICAL METRICS	Response of species intolerant of modified physico-chemical conditions	-5	64
	Response of species moderately intolerant of modified physico-chemical conditions	-5	
	Response of species moderately tolerant of modified physico-chemical conditions	-4	
	Response of species tolerant of modified physico-chemical conditions	-1	
MIGRATION METRICS	Response in terms of distribution/abundance of spp with catchment scale movements	0	61
	Response in terms of distribution/abundance of spp with requirement for movement between reaches or fish habitat segments	4	
	Response in terms of distribution/abundance of spp with requirement for movement within reach or fish habitat segment	2	
INTRODUCED SPECIES METRICS	The impact/potential impact of introduced competing/predaceous spp?	0	45
	How widespread (frequency of occurrence) are introduced competing/predaceous spp?	0	
	The impact/potential impact of introduced habitat modifying spp?	2	
	How widespread (frequency of occurrence) are habitat modifying spp?	1	
FRAI SCORE (%)		32.3	
FRAI CATEGORY		E	
FRAI CATEGORY DESCRIPTION		Seriously modified	

- Reduced flows and altered flooding regime of the river.
- Cover metrics: Seriously deterioration in substrate as cover, most probably associated with extensive algal growth (as described earlier in this report), flow modification (decreased riffle/rapid habitats) and sedimentation.
- Flow dependence metrics: Serious modification of fish species intolerant to moderately intolerant to no-flow conditions, again indicating on altered hydrological regime (altered flows and floods).
- Physico-chemical metrics: Seriously modified conditions indicated by fish species that are intolerant to moderately intolerant of modified water quality, indicating on seriously deteriorated water quality prevailing in this river reach.
- Migration metrics: Indicating seriously modified migratory impacts, associated with various physical and potentially also chemical migration barriers within this reach.
- Introduced species metrics: Slight impacts associated with the presence of the habitat modifying alien Common carp (*Cyprinus carpio*).

Table 12: Descriptive categories used to describe the present ecological status (PES) of biotic components (adapted from Kleynhans, 1999).

CATEGORY	BIOTIC INTEGRITY	DESCRIPTION OF GENERALLY EXPECTED CONDITIONS
A	Excellent	Unmodified, or approximates natural conditions closely. The biotic assemblages compares to that expected under natural, unperturbed conditions.
B	Good	Largely natural with few modifications. A change in community characteristics may have taken place but species richness and presence of intolerant species indicate little modifications. Most aspects of the biotic assemblage as expected under natural unperturbed conditions.
C	Fair	Moderately modified. A lower than expected species richness and presence of most intolerant species. Most of the characteristics of the biotic assemblages have been moderately modified from its naturally expected condition. Some impairment of health may be evident at the lower end of this class.
D	Poor	Largely modified. A clearly lower than expected species richness and absence or much lowered presence of intolerant and moderately intolerant species. Most characteristics of the biotic assemblages have been largely modified from its naturally expected condition. Impairment of health may become evident at the lower end of this class.
E	Very Poor	Seriously modified. A strikingly lower than expected species richness and general absence of intolerant and moderately tolerant species. Most of the characteristics of the biotic assemblages have been seriously modified from its naturally expected condition. Impairment of health may become very evident.
F	Critical	Critically modified. Extremely lowered species richness and an absence of intolerant and moderately tolerant species. Only intolerant species may be present with complete loss of species at the lower end of the class. Most of the characteristics of the biotic assemblages have been critically modified from its naturally expected conditions. Impairment of health generally very evident.

4 CONCLUSIONS AND RECOMMENDATIONS

The following conclusions are based on the aquatic macro-invertebrate assessments performed during October 2018. Reference is not made to fish based conclusions since the new scope of work (study area) has invalidated spatial and temporal findings, which will be refined when fish assessment are once again performed (scheduled once per annum).

The most important **spatial** conclusions are as follows:

- Biotic conditions, based on the total SASS5 and ASPT scores, **decreased slightly** from site H-US-KF to site H-DS-KF (opposite spatial trend observed during the May 2018 survey). This is in contrast with most previous surveys when no spatial deterioration was observed. The most similar biotope between the two sites was GSM, confirming the probability of downstream deterioration in water quality. Although biotic conditions at site KF in the Klipfonteinspruit were relatively low, it appeared to be similar to the adjoining Hex River sites. Furthermore, SASS scores (and hence biotic conditions) are expected to be affected by an intermittent flow regime (as regularly observed in the seasonal Klipfonteinspruit).
- Biotic conditions, based on the total SASS5 scores and ASPT values, **decreased largely from site H-DS-KF to Hex03**. This was not habitat related as availability and suitability was better at the downstream site. A comparison of similar SASS-biotopes confirmed lowered biotic conditions, suggesting that the water quality was further affected between these sites, during October 2018. It has to be noted that organic enrichment and solid waste disposal appears extensively at this site and will likely affect biotic integrity if not mitigated. This was further supported by low dissolved oxygen levels. It is again noted that the reason for lowered dissolved oxygen levels are unlikely to be related to APPD activities because levels were within the guideline at site H-DS-KF and no further APPD activities take place towards site Hex03.
- Biotic conditions, based on the total SASS5 scores and ASPT values, **recovered largely from site Hex03 to Hex03-B**. This was at least partly habitat related as availability and suitability was better at the downstream site. Comparison of similar SASS-biotopes confirmed improved biotic conditions, suggesting that the water quality was not further affected between these sites, during October 2018. Site Hex03-B was included for the first time during the October 2018 survey. This was done to gauge the point-source effect, on the spatial integrity of the Hex River taking into consideration the Klipgatspruit. APPD is a potential contributor to pollution of the Klipgatspruit and continued monitoring (comparison of sites Hex03 and Hex03-B) will be essential to verify any possible impact and the severity thereof.

The most important **temporal (long- and medium-term)** conclusions regarding the biotic integrity of the Hex River are as follows:

- Long-term trends indicated fair but **stable biotic conditions** at the three relevant Hex River sites. A slight improvement is in fact visible at sites H-US-KF and H-DS-KF. Medium term analyses confirm generally lower biotic conditions at the latter site but, encouragingly, also eludes to recent improvement.
- The long-term trend at site **Hex03 is slightly negative** as confirmed by the medium-term trends. The recently observed organic pollution is almost certainly the cause, being **unrelated** to APPD activities.
- Continued monitoring will be essential to amass a database at the newly adopted downstream site (Hex03-B). This will serve to gauge the temporal effect of water users (including APPD) within the Klipgatspruit catchment, on the receiving environment (Hex River).

General conclusions and recommendations

In conclusion, it can be stated that various sections of the Hex River within the study area show clear signs of reduced biotic integrity, based on macro-invertebrates. This was especially evident with the previous extended study area (now reduced due to Sibanye Stillwater sale and the complete scope no longer tasked

to Clean Stream Biological Services). As such, a steady deterioration in biotic integrity in a downstream direction has consistently been recorded. However, the biotic integrity of the Hex River currently does improve on a spatial scale at certain sites and appears to be more stable within the recently adopted reduction of the study area.

Future biomonitoring should be maintained on at least a biannual interval to gauge the trend of deterioration/improvement. This would facilitate the identification of possible impacts by APPD (and others) to this aquatic ecosystem. Early identification of impacts to the biota should prompt the identification of contaminants and the implementation of mitigation measures to reduce or prevent continued risk to the aquatic ecosystem.

It is strongly recommended that definitive toxicity testing be continued for the PCDs that regularly display toxicity levels of Class III or higher. Definitive toxicity testing will allow for the calculation of safe dilution ratios and will allow for the process of risk assessment. The risk assessment involves predicting the amount of a substrate that may enter the environment and comparing this with definitive toxicity results.

Calculated dilution ratios will be essential for environmental managers to predict whether the toxicity of polluted water will be negated if released or accidentally spilled into the receiving environment. Definitive testing will furthermore assist with scheduling planned licenced releases (*i.e.* whether water could be released during the dry season and, if not, whether sufficient dilution is likely to be achieved during the wet season/times of high river flow). All discharges should fall within the ambit of an approved water use licence, with biomonitoring and toxicity data being essential for the licensing process. In addition, increasing the frequency of testing of the pollution control facilities to at least twice a year should be considered. The confidence of results is relatively low if testing is only performed once a year, especially since toxicity hazards could conceivably change on a daily basis. More regular testing will therefore increase the confidence of results and lead to more informed management decisions.

It is now recommended to include both site KF and KFD (in the Klipfonteinspruit) for toxicity testing (in addition to the Klipgatspruit; site KGT). The effect of different sources of pollution can then be distinguished more accurately.

5 REFERENCES

- ABOATOX Oy. 2012. BO1243-500 BioTox™ Kit. Instructions for use. Savikuja 2. FIN-21250, Masku Finland. www.aboatox.com
- BARBOUR MT and STRIBLING JB (1994) A technique for assessing stream habitat structure. Pp. 156-178, In: Proceedings of the conference "Riparian Ecosystems of the Humid U.S. Management, functions, and Values". National Association of Conservation Districts. Washington, DC
- DEPARTMENT OF WATER AFFAIRS AND FORESTRY. 1996. South African Water Quality Guidelines (second edition). Volume 6: Agricultural water use: Aquaculture.
- DEPARTMENT OF WATER AFFAIRS AND FORESTRY, 2003. The Management of Complex Industrial Waste Water Discharges. Introducing the Direct Estimation of Ecological Effect Potential (DEEEP) approach, a discussion document. Institute of Water Quality Studies, Pretoria.
- DICKENS C and GRAHAM M (2001) South African Scoring System (SASS) Version 5 Rapid Bioassessment Method for Rivers. River Health Programme Web Page.
- EUROPEAN Standard, 1998. "Water quality – Determination of the inhibitory effect of water samples on the light emission of *Vibrio fischeri* (Luminescent bacteria test) – Part 3 for the method using freeze-dried bacteria", EN ISO 11348-3. European Committee for Standardization, Brussels.
- KEMPSTER, P. L. HATTINGH, W. H. J. & VAN VLIET, H. R. 1982. Summarised water quality criteria. Technical report NR. Tr 108. Department of Environmental Affairs.
- KILIAN V. 1996. Fish Pathology (FHA): A biomonitoring procedure for rapid evaluation of fish health and condition. Report used during Field biosurveys and Integrated ecological assessment course, Institute of Water Quality Studies, DWAF.
- KLEYNHANS, C. J. 1997. *An exploratory investigation of the Instream Biological Integrity of the Crocodile River, Mpumalanga, as based on the Assessment of Fish Communities*. Draft Report, Department of Water Affairs and Forestry, Institute for Water Quality Studies. 61 pp.
- KLEYNHANS, C. J. 1997. *An exploratory investigation of the Instream Biological Integrity of the Crocodile River, Mpumalanga, as based on the Assessment of Fish Communities*. Draft Report, Department of Water Affairs and Forestry, Institute for Water Quality Studies. 61 pp.
- KLEYNHANS, C.J. 2002. Fish Intolerance ratings. Personal electronic communication of proceedings resulting from the national fish workshop held at the WRC during 2001.
- LE ROUX, P & STEYN, S. 1968. Visse van Transvaal. Kaap & Transvaal Drukkers Beperk, Kaapstad. 108pp.
- McMILLAN, P. H. 1998. *An Integrated Habitat Assessment System (IHAS v2), for the Rapid Biological Assessment of Rivers and Streams*. A CSIR research project. Number ENV-P-I 98132 for the Water Resources Management Programme. CSIR. ii + 44 pp.
- MICROBIOTEST INC. 2012. DAPHTOXKIT F™ MAGNA. Crustacean Toxicity Screening Test for freshwater. Standard Operational Procedure. Kleimoer 15, 9030 Mariakerke (Gent), Belgium. www.microbiotest.be.
- ODUM EP (1971). Fundamentals of Ecology. Third Edition. W. B. Saunders Co. London.
- PERSOONE G, BLAHOŠLAV M, BLINOVA I, TÖRÖKNE A, ZARINA T, MANUSADZIANAS L, NALECZ-JAWECKI G, TOFAN L, STEPANOVA L, TOTHOVA L, KOLAR B. A practical and user-friendly toxicity classification system with Microbiotests for natural waters and wastewaters (personal communication).
- ROUX DJ (1999). Incorporating technologies for the monitoring and assessment of biological indicators into a holistic resource-based water quality management approach- conceptual models and some case studies. Ph.D Thesis. Rand Afrikaans University, JHB, SA.
- SKELTON P. H., 1993. A complete guide to freshwater fishes of Southern Africa. Southern Book Publishers (Pty) Ltd., Halfway House. 388pp.
- THIRION, C. A.; MOCKE, A & WOEST, R. 1995. Biological Monitoring of Streams and Rivers using SASS4: A User Manual. Final Report, No. N 000/00/REQ/1195. Institute of Water Quality Studies, Department of Water Affairs and Forestry.
- UNITED STATES ENVIRONMENTAL PROTECTION AGENCY (US EPA), 1996. Ecological effects test guidelines. Fish acute toxicity test – Freshwater and marine. OPPTS 850.1075. Report number EPA-712-c-96-118.
- UNITED STATES ENVIRONMENTAL PROTECTION AGENCY (US EPA), 1993. Method for measuring the acute toxicity of effluent and receiving waters to freshwater and marine organisms. EPA/600/4-90/027F, 4th edition. Office of Research and Development, Washington.
- YANG L, SADO T, HIRT MV, PASCO-VEIL E, ARUNACHALAM M, Li J, WANG X, FREYHOF J, SAOTOH K, SIMINS AM, MIYA M, He S, MAYDEN RL. 2015. Phylogeny and polypoidy: Resolving the classification of cyprinine fishes (Teleostei: Cypriniformes). Mol. Phylogenet. Evol. 85, 97 – 116.

Appendix 1: Methodology applied during this biomonitoring assessment.

1. In-situ water quality

The following surface water quality variables were measured on site: pH, Conductivity, water temperature, dissolved oxygen and oxygen saturation (Hach HQ40d Multimeter; Serial Number: 130300086148).

2. Habitat assessment

An evaluation of habitat quality and availability to biota is critical to any assessment of ecological integrity and should be conducted at each site at the time of biological sampling. On site habitat assessments were conducted by using existing habitat evaluation indices.

2.1 Habitat condition

The United States Environment Protection Agency Habitat Assessment Index (HAI) index was used to determine the general physical habitat condition at each site. Habitat parameters used by this index in this assessment of habitat integrity include the following: Epifaunal substrate/Available cover, Pool substrate characteristics, Pool variability, Channel alteration, Sediment deposition, Channel sinuosity, Channel flow status, Bank vegetative protection, Bank stability and Riparian vegetative zone width. Each of the above mentioned criteria was assessed and according to its condition, rated in one of the following classes, namely: Optimal/Excellent, Sub optimal/Good, Marginal/Fair or Poor. For each criterion, a score was given within the selected class. The sum of these scores gives a final score for this Index, and can be used in comparison to other sites or, if possible, to the baseline or reference condition to indicate its physical integrity (Barbour *et al.*, 1999).

2.2 Fish Habitat Assessment

This assessment is aimed at the determination of the potential of a site to provide habitat for fish (Fish habitat cover ratings) and to identify the potential human impact on the fish habitat (Site fish habitat integrity) (Kleynhans, 1997).

Fish Habitat Cover Rating (HCR)

This approach was developed to assess habitats according to different attributes that are surmised to satisfy the habitat requirements of various fish species (Kleynhans, 1997). At each site, the following depth-flow (df) classes are identified, namely:

Slow (<0.3m/s), shallow (<0.5m) - Shallow pools and backwaters.

Slow, deep (>0.5m) - Deep pools and backwaters.

Fast (>0.3m/s), shallow - Riffles, rapids and runs.

Fast, deep - Usually rapids and runs.

The relative contribution of each of the above mentioned classes at a site was estimated and indicated as:

0 = Absent

1 = Rare (<5%)

2 = Sparse (5-25%)

3 = Moderate (25-75%)

4 = Extensive (>75%)

For each depth-flow class, the following cover features (cf), considered to provide fish with the necessary cover to utilise a particular flow and depth class, were investigated:

- Overhanging vegetation
- Undercut banks and root wads
- Stream substrate
- Aquatic macrophytes

The amount of cover present at each of these cover features (cf) was noted as:

0 = absent

1 = Rare/very poor (<5%)

2 = Sparse/poor (5-25%)

3 = Moderate/good (25-75%)

4 = Extensive/excellent (>75%)

The fish habitat cover rating (HCR) was calculated as follows:

- The contribution of each depth-flow class at the site was calculated ($df/\Sigma df$).

- For each depth-flow class, the fish cover features (cf) were summed (Σcf).

$HCR = df/\Sigma df \times \Sigma cf$.

Site fish habitat integrity (SHI)

This approach is based on the assessment of physical habitat disturbance and is directed towards the indirect qualitative evaluation of fish habitat integrity, compared to the expected natural condition (Kleynhans, 1997). The following impacts (cause for fish habitat integrity degradation) is investigated, namely: Water abstraction, flow modification, bed modification, channel modification, inundation, exotic macrophytes, solid waste disposal, indigenous vegetation removal, exotic vegetation encroachment and bank erosion. Estimation of the impact of each of these modifications on the fish habitat integrity at a site is scored as follows:

No Impact = 0

Small impact = 1

Moderate Impact = 3

Large impact = 5

3. Aquatic invertebrate assessment: South African Scoring System, Version 5.

Benthic macro-invertebrate communities of the selected sites were investigated according to the South African Scoring System, version 5 (SASS5) approach (Dickens & Graham, 2001). This method is based on the British Biological Monitoring Working Party (BMWP) method and has been adapted for South

African conditions by Dr. F. M. Chutter (Thirion *et al.*, 1995). The SASS method is a rapid, simple and cost effective method, which has progressed through four different upgrades/versions. The current upgrade is Version 5, which is specifically designed to comply with international accreditation protocols.

Sample Collection

An invertebrate net (30 x 30cm square with 1mm mesh netting) was used for the collection of the organisms. The available biotopes at each site were identified on arrival. Each of the biotopes was sampled by different methods explained later (samples should not be collected when the river is in flood).

The biotopes were combined into three different groups, which were sampled and assessed separately:

a) Stone (S) Biotopes:

Stones in current (SIC) or any solid object: *Movable stones of at least cobble size (3 cm diameter) to approximately 20 cm in diameter, within the fast and slow flowing sections of the river.* Kicksampling is used to collect organisms in this biotope. This is done by putting the net on the bottom of the river, just downstream of the stones to be kicked, in a position where the current will carry the dislodged organisms into the net. The stones are then kicked over and against each other to dislodge the invertebrates (kicksampling) for ± 2 minutes.

Stones out of current (SOOC): *Where the river is still, such as behind a sandbank or ridge of stones or in backwaters.* Collection is again done by the method of kicksampling, but in this case the net is swept across the area sampled to catch the dislodged biota. Approximately 1 m² is sampled in this way.

Bedrock or other solid substrate: Bedrock includes stones greater than 30cm, which are generally immovable, including large sheets of rock, waterfalls and chutes. The surfaces are scraped with a boot or hand and the dislodged organisms collected. Sampling effort is included under SIC and SOOC above.

b) Vegetation (VG) Biotopes:

Marginal vegetation (MV): *This is the overhanging grasses, bushes, twigs and reeds growing on the edge of the stream, often emergent, both in current (MvegIC) and out of current (MvegOOC).* Sampling is done by holding the net perpendicular to the vegetation (half in and half out of the water) and sweeping back and forth in the vegetation (± 2 m of vegetation).

Submerged vegetation (AQV): *This vegetation is totally submerged and includes Filamentous algae and the roots of floating aquatics such as water hyacinth.* Sampled by pushing the net (under the water) against and amongst the vegetation in an area of approximately one square meter.

c) Gravel, Sand and Mud (GSM) biotopes:

Sand: *This includes sandbanks within the river, small patches of sand in hollows at the side of the river or sand between the stones at the side of the river.* This biotope is sampled by stirring the substrate by shuffling or scraping of the feet, which is done for half a minute, whilst the net is continuously swept over the disturbed area.

Gravel: *Gravel typically consists of smaller stones (2-3 mm up to 3 cm).* Sampling similar to that of sand.

Mud: *It consists of very fine particles, usually as dark-collared sediment.* Mud usually settles to the bottom in still or slow flowing areas of the river. Sampling similar to that of sand.

d) Hand picking and visual observation:

Before and after disturbing the site, approximately 1 minute of "hand-picking" for specimens that may have been missed by the sampling procedures was carried out.

Sample preparation

The organisms sampled in each biotope group were identified and their relative abundance also noted on the SASS5 datasheet.

SASS-Habitat Assessment

A SASS-habitat assessment index, according to the habitats sampled, was performed due to the fact that changes in habitat can be responsible for changes in SASS5 scores. This was done by the application of Integrated Habitat Assessment System (IHAS version 2) (McMillan, 1998).

4. Fish Assemblage Integrity Index (FAII) (Kleynhans, 1997)

Due to the difficulty of applying the generally used Index of Biotic Integrity (IBI) in rivers of South Africa, Kleynhans (1997) developed an alternative approach. The following procedures were used in the application of the FAII:

Species tolerance ratings

The species intolerance ratings used in the calculation of the FAII were taken from Kleynhans (2002). Four components are taken into account in estimating the intolerance of the relevant fish species, namely habitat preferences and specialisation (HS), food preference and specialisation (TS), requirements for flowing water during different life-stages (FW) and water quality requirements (WQ). Each of these aspects are scored for a species according to low requirement/specialisation (rating=1), moderate requirement/ specialisation (rating=3) and high requirement/specialisation (rating=5). The total intolerance (IT) of a fish species is estimated as follows:

$$IT = (HS+TS+FW+WQ)/4$$

Health

The percentage of fish with externally evident disease or other anomalies are used to score this metric. The following procedure is used to score the health of individual species:

Frequency of affected fish >5%, score = 1

Frequency of affected fish 2 - 5%, score = 3

Frequency of affected fish <2%, score = 5

The expected health for a species living under unperturbed conditions is assumed to be unimpaired and would score 5.

The FAII is calculated as follows:

The *expected index score* [FAII (exp.)] per segment:

$$FAII (exp.) = \Sigma(T \times H)$$

where: T = Tolerance rating for individual species

H = Expected health rating for individual species.

The *observed index score* [FAII (obs)] is calculated on a similar basis but is based on the information collected during the survey:

$$FAII (obs) = \Sigma(T \times H)$$

The observed fish assemblage index score for a segment is expressed as a percentage of the expected total FAII score to arrive at a relative FAII rating:

$$FAII (obs) / FAII (exp.) \times 100$$

Fish Response Assessment Index (FRAI)

The determination and description of the present ecological status (PES) of the aquatic ecosystems in the study area, in terms of fish, was done according to the methodology described for River EcoClassification during Reserve Determinations (Kleynhans & Louw, 2008) using the Fish Response Assessment Index (FRAI) (Kleynhans, 2008). The results were then used to classify the present state of the fish assemblage into a specific descriptive category (A to F) (Table A1).

The FRAI is not in its conventional form designed for the application per site, but rather to a reach with a few sites. Metrics are therefore based on spatial frequency of occurrence of a species within the reach.

Table A1: Descriptive categories used to describe the present ecological status (PES) of biotic components (adapted from Kleynhans, 1999).

CATEGORY	BIOTIC INTEGRITY	DESCRIPTION OF GENERALLY EXPECTED CONDITIONS
A	Excellent	Unmodified, or approximates natural conditions closely. The biotic assemblages compares to that expected under natural, unperturbed conditions.
B	Good	Largely natural with few modifications. A change in community characteristics may have taken place but species richness and presence of intolerant species indicate little modifications. Most aspects of the biotic assemblage as expected under natural unperturbed conditions.
C	Fair	Moderately modified. A lower than expected species richness and presence of most intolerant species. Most of the characteristics of the biotic assemblages have been moderately modified from its naturally expected condition. Some impairment of health may be evident at the lower end of this class.
D	Poor	Largely modified. A clearly lower than expected species richness and absence or much lowered presence of intolerant and moderately intolerant species. Most characteristics of the biotic assemblages have been largely modified from its naturally expected condition. Impairment of health may become evident at the lower end of this class.
E	Very Poor	Seriously modified. A strikingly lower than expected species richness and general absence of intolerant and moderately tolerant species. Most of the characteristics of the biotic assemblages have been seriously modified from its naturally expected condition. Impairment of health may become very evident.
F	Critical	Critically modified. Extremely lowered species richness and an absence of intolerant and moderately tolerant species. Only intolerant species may be present with complete loss of species at the lower end of the class. Most of the characteristics of the biotic assemblages have been critically modified from its naturally expected conditions. Impairment of health generally very evident.

It must be emphasized that the A→F scale represents a continuum, and that the boundaries between categories are notional, artificially-defined points along the continuum (as presented below). This situation falls within the concept of a fuzzy boundary, where a particular entity may potentially have membership of both classes (Robertson *et al.* 2004). For practical purposes, these situations are referred to as boundary categories and are denoted as B/C, C/D, and so on.



Appendix 2: Site photos of biomonitoring sites (last two surveys)



Plate 1: Upstream view of H-US-KF (2018-05)



Plate 2: Downstream view of H-US-KF (2018-05)



Plate 3: Upstream view of H-US-KF (2018-10)



Plate 4: Downstream view of H-US-KF (2018-10)



Plate 5: Upstream view of KF (2018-05)



Plate 6: Downstream view KF (2018-05)



Plate 7: Upstream view of kF (2018-10)



Plate 8: Downstream view KF (2018-10)



Plate 9: Upstream view of KFD (2018-05)



Plate 10: Downstream view of KFD (2018-05)

Not included in this survey

Plate 11: Upstream view of KFD (2018-10)

Plate 12: Downstream view of KFD (2018-10)



Plate 13: Upstream view of H-DS-KF (2018-05)



Plate 14: Downstream view of H-DS-KF (2018-05)



Plate 15: Upstream view of H-DS-KF (2018-10)



Plate 16: Downstream view of site H-DS-KF (2018-10)



Plate 16: Upstream view of Hex03 (2018-05)



Plate 17: Downstream view of Hex03 (2018-05)



Plate 18: Upstream view of Hex03 (2018-10)



Plate 19: Downstream view of site Hex03 (2018-10)



Plate 20: Upstream view of KGT (2018-05)



Plate 21: Downstream view of KGT (2018-05)



Plate 22: Upstream view of KGT (2018-10)



Plate 23: Downstream view of site KGT (2018-10)

Not included in this survey

Plate 24: Upstream view of Hex03B (2018-05)

Plate 25: Downstream view of Hex03B (2018-05)



Plate 26: Upstream view of Hex03B (2018-10)



Plate 27: Downstream view of site Hex03B (2018-10)

Appendix 3: Tables

Table A1: SASS5 analysis including macro-invertebrate families sampled and habitat suitability scores calculated for the various sites (December 2018).

Taxon	H-US-KF				KF				H-DS-KF				Hex-03				Hex-03-B			
	Stones	Veg	GSM	Total	Stones	Veg	GSM	Total	Stones	Veg	GSM	Total	Stones	Veg	GSM	Total	Stones	Veg	GSM	Total
TURBELLARIA	-	-	-	-	-	-	-	-	-	1	-	1	-	-	-	-	-	-	-	-
Oligochaeta	B	-	A	B	-	-	A	A	-	-	B	B	A	1	A	A	A	-	-	A
Leeches	A	A	A	B	-	-	-	-	-	-	-	-	-	1	-	1	A	-	-	A
Baetidae 1 sp.	-	1	A	A	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Coenagrionidae	-	1	-	1	A	B	-	B	-	A	1	A	-	-	-	-	A	B	-	B
Aeshnidae	-	-	-	-	-	A	-	A	-	-	-	-	-	-	-	-	-	-	-	-
Libellulidae	-	-	-	-	1	B	-	B	-	-	-	-	-	-	-	-	-	-	-	-
Belostomatidae*	-	-	-	-	-	B	-	B	-	-	-	-	-	-	-	-	-	-	-	-
Corixidae*	B	B	A	B	B	B	B	B	B	B	B	B	1	1	1	A	-	-	-	-
Gerridae*	-	-	-	-	-	1	-	1	-	-	-	-	-	-	-	-	-	-	-	-
Naucoridae*	-	1	-	1	-	-	-	-	-	A	-	A	-	-	-	-	-	-	-	-
Notonectidae*	-	-	-	-	-	-	-	-	-	A	-	A	-	-	-	-	-	-	-	-
Pleidae*	-	-	-	-	-	A	-	A	-	-	-	-	-	-	-	-	-	-	-	-
Veliidae*	-	-	-	-	-	A	-	A	-	-	-	-	-	-	-	-	-	-	-	-
Hydropsychidae 1sp.	-	B	-	B	-	-	-	-	B	-	-	B	-	-	-	-	A	-	-	A
Hydroptilidae	-	1	-	1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Leptoceridae	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	1	-	1
Dytiscidae (adults*)	-	-	-	-	-	-	-	-	1	-	-	1	-	-	-	-	-	-	-	-
Gyrinidae (adults*)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	1	-	-	1
Chironomidae	-	-	B	B	B	B	B	C	A	B	B	B	B	B	B	B	A	A	B	B
Culicidae*	-	1	-	1	-	A	-	A	-	-	-	-	-	-	-	-	-	-	-	-
Muscidae	-	-	-	-	1	A	-	A	-	-	-	-	-	-	-	-	1	-	-	1
Simuliidae	-	B	B	B	B	A	-	B	A	-	-	A	A	A	1	B	B	B	-	C
Ancylidae	-	A	-	A	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Physidae*	-	A	A	A	-	-	-	-	-	-	-	-	-	-	-	-	B	B	B	B
Total SASS5 score	7	46	21	49	19	45	6	46	19	22	10	37	11	14	11	14	28	20	8	34
No. of families	3	11	7	13	6	12	3	13	5	6	4	10	4	5	4	5	9	5	3	10
ASPT	2.33	4.18	3.00	3.77	3.17	3.75	2.00	3.54	3.80	3.67	2.50	3.70	2.75	2.80	2.75	2.80	3.11	4.00	2.67	3.40
Total IHAS				69				75				52				69				73
IHAS - Habs sampled				36				40				30				36				39
IHAS - Stream condition				33				35				22				33				34
Suitability score	3	6	3	12	5	11	3	19	6	5	3	14	4	9	6	19	0	0	0	0

Key: High requirement for unmodified water quality Veg=Vegetation

Moderate requirement for unmodified water quality

Low requirement for unmodified water quality

Very low requirement for unmodified water quality

A = 1-10 individuals; B = 11-100 individuals; C = 101-1000 individuals; ASPT = Average score per taxon.

Table A3: Fish Assemblage Integrity Index (FAII) scores calculated for the various sampling sites (2017-2018).

SPECIES	Intolerance rating					Health rating					SCORE				
	HEX00	HEX01	HEX03	HEX04	HEX4B	HEX00	HEX01	HEX03	HEX04	HEX4B	HEX00	HEX01	HEX03	HEX04	HEX4B
<i>Amphillius uranoscopus</i>	4.8	4.8	4.8	4.8	4.8	5	5	5	5	5	24.0	24.0	24.0	24.0	24.0
<i>Barbus paludinosus</i>	1.8	1.8	1.8	1.8	1.8	5	5	5	5	5	9.0	9.0	9.0	9.0	9.0
<i>Barbus trimaculatus</i>	2.2	2.2	2.2	2.2	2.2	5	5	5	5	5	11.0	11.0	11.0	11.0	11.0
<i>Barbus unitaeniatus</i>		1.7	1.7	1.7	1.7		5	5	5	5	0.0	8.5	8.5	8.5	8.5
<i>Chiloglanis pretoriae</i>				4.6	4.6				5	5	0.0	0.0	0.0	23.0	23.0
<i>Clarias gariepinus</i>	1.2	1.2	1.2	1.2	1.2	5	5	5	5	5	6.0	6.0	6.0	6.0	6.0
<i>Labeobarbus marequensis</i>	2.6	2.6	2.6	2.6	2.6	5	5	5	5	5	13.0	13.0	13.0	13.0	13.0
<i>Labeo cylindricus</i>				3.1	3.1				5	5	0.0	0.0	0.0	15.5	15.5
<i>Labeo molybdinus</i>				3.2	3.2				5	5	0.0	0.0	0.0	16.0	16.0
<i>Mesobola brevianalis</i>	2.3	2.3	2.3	2.3	2.3	5	5	5	5	5	11.5	11.5	11.5	11.5	11.5
<i>Oreochromis mossambicus</i>	1.3	1.3	1.3	1.3	1.3	5	5	5	5	5	6.5	6.5	6.5	6.5	6.5
<i>Pseudocrenilabrus philander</i>	1.3	1.3	1.3	1.3	1.3	5	5	5	5	5	6.5	6.5	6.5	6.5	6.5
<i>Tilapia sparrmanii</i>	1.3	1.3	1.3	1.3	1.3	5	5	5	5	5	6.5	6.5	6.5	6.5	6.5
	Total Expected										94.0	102.5	102.5	157.0	157.0
<i>Amphillius uranoscopus</i>											0.0	0.0	0.0	0.0	0.0
<i>Barbus paludinosus</i>	1.8	1.8	1.8	1.8	1.8	5	5	5	5	5	9.0	9.0	9.0	9.0	9.0
<i>Barbus trimaculatus</i>			2.2					5			0.0	0.0	11.0	0.0	0.0
<i>Barbus unitaeniatus</i>			1.7					5			0.0	0.0	8.5	0.0	0.0
<i>Chiloglanis pretoriae</i>											0.0	0.0	0.0	0.0	0.0
<i>Clarias gariepinus</i>		1.2	1.2	1.2	1.2		5	5	5	5	0.0	6.0	6.0	6.0	6.0
<i>Labeobarbus marequensis</i>											0.0	0.0	0.0	0.0	0.0
<i>Labeo cylindricus</i>											0.0	0.0	0.0	0.0	0.0
<i>Labeo molybdinus</i>											0.0	0.0	0.0	0.0	0.0
<i>Mesobola brevianalis</i>											0.0	0.0	0.0	0.0	0.0
<i>Oreochromis mossambicus</i>			1.3	1.3	1.3			5	5	5	0.0	0.0	6.5	6.5	6.5
<i>Pseudocrenilabrus philander</i>	1.3	1.3	1.3	1.3	1.3	5	5	5	5	5	6.5	6.5	6.5	6.5	6.5
<i>Tilapia sparrmanii</i>	1.3	1.3		1.3	1.3	5	5		5	5	6.5	6.5	0.0	6.5	6.5
	Total Observed										22.0	28.0	47.5	34.5	34.5
	Relative FAII (%)										23	27	46	22	22

END OF REPORT

Addendum 1: Toxicity test report/s (Biotox Laboratory Services)

Submitted as separate PDF document/s

Report reference: AAPL/A/19

Prepared by:

BH Niehaus
Pri.Sci.Nat. SACNASP 4000080/13
Clean Stream Biological Services



Report released:

2019-08-06

Tel: 012-753-2192/3

Fax: 086-535-7368

Email: brenton@cleanstream-bio.co.za

**AMGLO AMERICAN PLATINUM:
HEX RIVER CATCHMENT
BIOMONITORING PROGRAMME**

JUNE 2019 SURVEY

TABLE OF CONTENTS

1. INTRODUCTION.....	3
2. MATERIALS & METHODS	4
3. RESULTS & DISCUSSION.....	4
3.1 Study area	4
3.2 <i>In-situ</i> water quality (June 2019)	7
3.3 Toxicity testing	10
3.3.1 May 2019 and June 2019	12
3.3.2 Temporal variation of toxicity results (2008 to 2019)	14
3.4 Aquatic invertebrate assessment: South African Scoring System 5.....	16
3.5 Fish Assessment.....	22
4 CONCLUSIONS AND RECOMMENDATIONS.....	28
5 REFERENCES	30
Appendix 1: Methodology applied during this biomonitoring assessment.....	31
Appendix 2: Site photos of biomonitoring sites (last two surveys)	34
Appendix 3: Tables.....	38
END OF REPORT	39
Addendum 1: Toxicity test report/s (Biotox Laboratory Services)	40

LIST OF TABLES

Table 1: Biomonitoring surveys conducted and reports compiled in the period December 1999 to June 2019.	3
Table 2: Latitude/Longitude and sampling protocols of selected sampling sites for routine biomonitoring.	5
Table 3: <i>In-situ</i> water quality variables measured at the time of sampling at the selected biomonitoring sites	7
Table 4: Toxicity results and hazard classification for selected pollution facilities (May 2019).	13
Table 5: Toxicity results and hazard classification for selected Hex River tributary samples (June 2019).	14
Table 6: Integrated Habitat Assessment (IHAS) description of the different biomonitoring sites.	17
Table 7: SASS5, ASPT and habitat suitability/availability index scores for different monitoring sites (June 2019).	18
Table 8: Fish species expected and observed during the last two surveys.....	23
Table 9: Relative FAIL scores calculated at different sampling sites (2017 to 2018).	24
Table 10: The relative tolerance of each species towards changes in the environment.	25
Table 11: Fish Response Assessment Index (FRAI) results for the Hex River reach (all sites) (2017/8 results).	26
Table 12: Descriptive categories used to describe the present ecological status (PES) of biotic components (adapted from Kleynhans, 1999).	27

LIST OF FIGURES

Figure 1: Google Earth image of study area, indicating Hex River and tributary biomonitoring sites.	6
Figure 2: Electrical conductivity levels (mS/m) at the time of sampling at the different biomonitoring sites.....	7
Figure 3: pH levels at the time of sampling at the different biomonitoring sites.	8
Figure 4: Dissolved oxygen levels (mg/l) at the time of sampling at the different biomonitoring sites.	9
Figure 5: Temporal trends of toxicity results (annually tested PCD's and selected streams).....	15
Figure 6: Temporal trends of toxicity results (bi-annually tested tributaries).	16
Figure 7: ASPT, SASS5 and total habitat suitability scores at biomonitoring sites during June 2019.	18
Figure 8: Linear regression of biotic integrity (as indicated by invertebrate ASPT scores) of the Hex River on a spatial scale (arranged sequentially in a downstream direction) during May 2018 (extended study area).	20
Figure 9: Linear regression of biotic integrity (as indicated by invertebrate ASPT scores) of the Hex River on a spatial scale (arranged sequentially in a downstream direction) during June 2019 (reduced study area).	20
Figure 10: Long-term trends of biotic integrity in terms of macro-invertebrates at biomonitoring sites.	21
Figure 11: Medium-term trends of biotic integrity in terms of macro-invertebrates at biomonitoring sites.	21
Figure 12: Relative FAIL scores, HCR's and SHI at the different biomonitoring sites.....	24

1. INTRODUCTION

This report is based on the results of the bi-annual biomonitoring survey conducted during June 2019 on the selected sites in the Hex River, Klipfonteinspruit and Klipgatspruit in the Anglo American Platinum (Rustenburg) mining area. Since the sale to Sibanye Stillwater, the study area assigned to Clean Stream Biological Services for biomonitoring has decreased considerably. To avoid confusion with areas tasked by Sibanye Stillwater to other consulting firm/s, the client for the purpose of this report will be referred to as Process Division Services. This long-term monitoring program commenced during December 1999. A comprehensive 20-year temporal database pertaining to the health of aquatic communities, as well as the water quality environment that may be affected by the RPM operations, has been amassed. This continuity of information will be invaluable for any future assessments of impacts to the receiving environment. RPM has thereby diligently maintained their biomonitoring programme on a twice-per-annum schedule (at least) since the inception of the program during 1999. See Table 1 below for a list of surveys performed, with their corresponding report numbers. Report naming will henceforth include the lettering sequence of "AAPL", referring to Anglo American Platinum and in specific the Process Division Services.

Table 1: Biomonitoring surveys conducted and reports compiled in the period December 1999 to June 2019.

Year	Month	Report numbers
1999	December	CS-A-2000
2000	April, July and November	CS-G-2000, CS-K-2000 and CS-A-2001
2001	May and September	CS-H-2001 and CS-L-2001
2002	February, May, August and November	CS-G-2002, CS-I-2002, CS-N-2002 and CS-E 2003
2003	Januaury and May	CS-G2003 and CS-O-2003
2004	April, August and October	CS-H-2004 and AMP-A-05
2005	February, April and November	AMP-B-05, AMP-C-05 and AMP-D-05
2006	April and November	AMP-A-06, AMP-C-06
2007	April and October	ANP-A-07 and ANP-A-08
2008	April and October	ANP-B-08 and ANP-A-09
2009	April and October	ANP-B-09 and RPM-A-09
2009	April and October	RPM-A-10 and RPM-B-10
2011	April and October	RPM-A-11 and RPM-B-11
2012	April and November	RPM-A-12 and RPM-A-13
2013	April and October	RPM-B-13 and RPM-C-13
2014	April and October	RPM-A-14 and RPM-B-14
2015	April and October	RPM-A-15 and RPM-C-15
2016	May and October	RPM-A-16-Ver2 and RPM-B-16
2017	June and November	RPM-A-17 and RPM-B-17
2018	May and October	RPM-A-18 and AAPL-A-18
2019	June	AAPL-A-19

Rivers are continuum systems, so a river reach can be influenced by activities both upstream and downstream. Pollution incidences upstream of a site will have a negative impact, not only locally, but on the entire ecosystem (depending on the extent of the pollution).

Biological communities reflect overall ecological integrity by integrating different stressors over time, thereby providing a broad measure of their aggregate impact. The monitoring of biological communities hence

provides a reliable ecological measure of fluctuating environmental conditions. The biomonitoring protocols applied in this project should give a good reflection of the human impacts on the system under investigation.

The results contained in this report should firstly be interpreted as **spatial** impact monitoring. [Note that spatial impact monitoring in terms of the fish communities considers the last two fish surveys, and not only the last survey, as in the case of macro-invertebrate communities]. **Temporal** (long- and medium-term trends) impact monitoring is also performed and considers all of the data since 2002 (after initial project design and refinement of the biomonitoring programme between 1999 and 2001).

2. MATERIALS & METHODS

Refer to appendix 1 for a description of methodology applied during this assessment.

3. RESULTS & DISCUSSION

3.1 Study area

Biomonitoring sites were selected to be easily accessible and representative of as many habitats as possible. Four biomonitoring sites were selected within the Hex River.

The criteria for site selection are as follows:

- The locations should ideally be selected to be both upstream and downstream of potential pollution sources, and as far as possible, exclude other potential impacts not related to the biomonitoring programme (non-AAPL impacts).
- The habitat diversity should be representative of the river/stream being monitored and, as far as possible, be comparable between sites on a spatial scale.
- The habitats should, as far as possible, be suitable for the application of the selected biomonitoring protocols.
- The sampling sites should at least be accessible to off-road vehicle to enable the transport of the required sampling equipment.

Although sampling sites were previously selected to isolate potential and known RPM (Sibanye Stillwater) impacts and hence measure the effect of RPM impacts on the biotic integrity of the receiving water bodies, several additional sites were also selected to illustrate the potential impact of non-RPM related activities. This was done to gain an insight into other potential impacts on the Hex River, in the area upstream of RPM activities as well as up- and downstream of the Klipfonteinspruit (not including the Paardekraal Angling Dam) to isolate the potential impact/s from the Klipfonteinspruit and the Dorpspruit catchment. This approach has now been adapted (since 2018-10) to mainly focus on the possible impact of the AAPL Process Division Services, with possible impacts reaching the final receiving water body (Hex River), via the Klipfonteinspruit and the Klipgatspruit (Table 2; Figure 1).

Various sites/samples were selected for toxicity testing. These include pollution control dams and the Klipfonteinspruit and Klipgatspruit tributaries (included since April 2012 but narrowed down to the two mentioned tributaries since October 2018) joining the Hex River within the study area. Based on the historic electrical conductivity (EC) results (illustrating cumulative water quality deterioration from various sources) and spatial variation in biotic integrity, it is evident that the various tributaries of the Hex River, both upstream and within the newly-refined study area contribute significantly to the spatial variation in ecological integrity of the Hex River. It is therefore of great value for the biomonitoring programme to include DEEEP toxicity testing on all the key tributaries entering the Hex River.

See Table 2 below for sampling site description, its relation to AAPL Process Division Services activities and the frequency of different biomonitoring protocols applied.

Table 2: Latitude/Longitude and sampling protocols of selected sampling sites for routine biomonitoring.

Monitoring site	Description	Potential direct upstream impact	Biomonitoring protocols		GPS coordinates (degrees)	
			Protocol	Frequency per annum	Latitude (South)	Longitude (East)
H-US-KF	Hex River, upstream from the Klipfonteinspruit confluence but downstream from the Paardekraal Angling Dam.	AAPL and non-AAPL	*SASS5	Twice	25.6492	27.2906
KF	Klipfonteinspruit, downstream from Waterfall concentrator but upstream from Paardekraal shaft runoff.	AAPL	Toxicity testing	Twice	25.6578	27.2964
KFD	Klipfonteinspruit, downstream from site KF and the Paardekraal shaft runoff.	AAPL	Toxicity testing	Twice	25.6496	27.2926
H-DS-KF	Hex River, directly downstream from the Klipfonteinspruit confluence.	AAPL	*SASS5	Twice	25.6473	27.2913
Hex03	Hex River, upstream from Klipgatspruit.	Non-AAPL	*SASS5	Twice	25.6332	27.2903
			**FAII	Once		
KGT	Klipgatspruit, downstream from tailings complex seepage.	AAPL	Toxicity testing	Twice	25.6319	27.2951
Hex3B	Hex River, downstream from Klipgatspruit confluence. Newly adopted site (since 2018-10)	AAPL	*SASS5	Twice	25.6237	27.2900
			**FAII	Once		
K209	PMR Dam 2	To be confirmed as per AAPL Process Division requirements				
K210	PMR Dam 3A					
K211	PMR Dam 3B					
K212	PMR Dams 4 and 5					
K213	PMR Dam 6					
K194						
K160	RBMR Dam 3A					
K161	RBMR Dam 3B					
K162	RBMR Triangular Dam					
K035	Klipgat RWD					
K098	ACP PCD					

Key: * SASS5 = South African Scoring System, version5 (macro-invertebrate index and associated habitat assessment indices i.e. IHAS ver2 and biotope availability and suitability indices)

** FAII = Fish Assemblage Integrity Index (and associated habitat indices i.e. SHI and HCR)

Site name shaded green = Hex River mainstem	Site name shaded blue = Tributary of Hex River	Site name shaded red = Toxicity testing
Impact shaded gray = Potential RPM and non-RPM impacts (directly upstream)	Impact shaded pink = Potentially impacted by RPM/AAPL (directly upstream)	Impact shaded yellow = No RPM/AAPL impacts (directly upstream)
Site name shaded Orange = Discontinued from Clean Stream Biological Services scope		

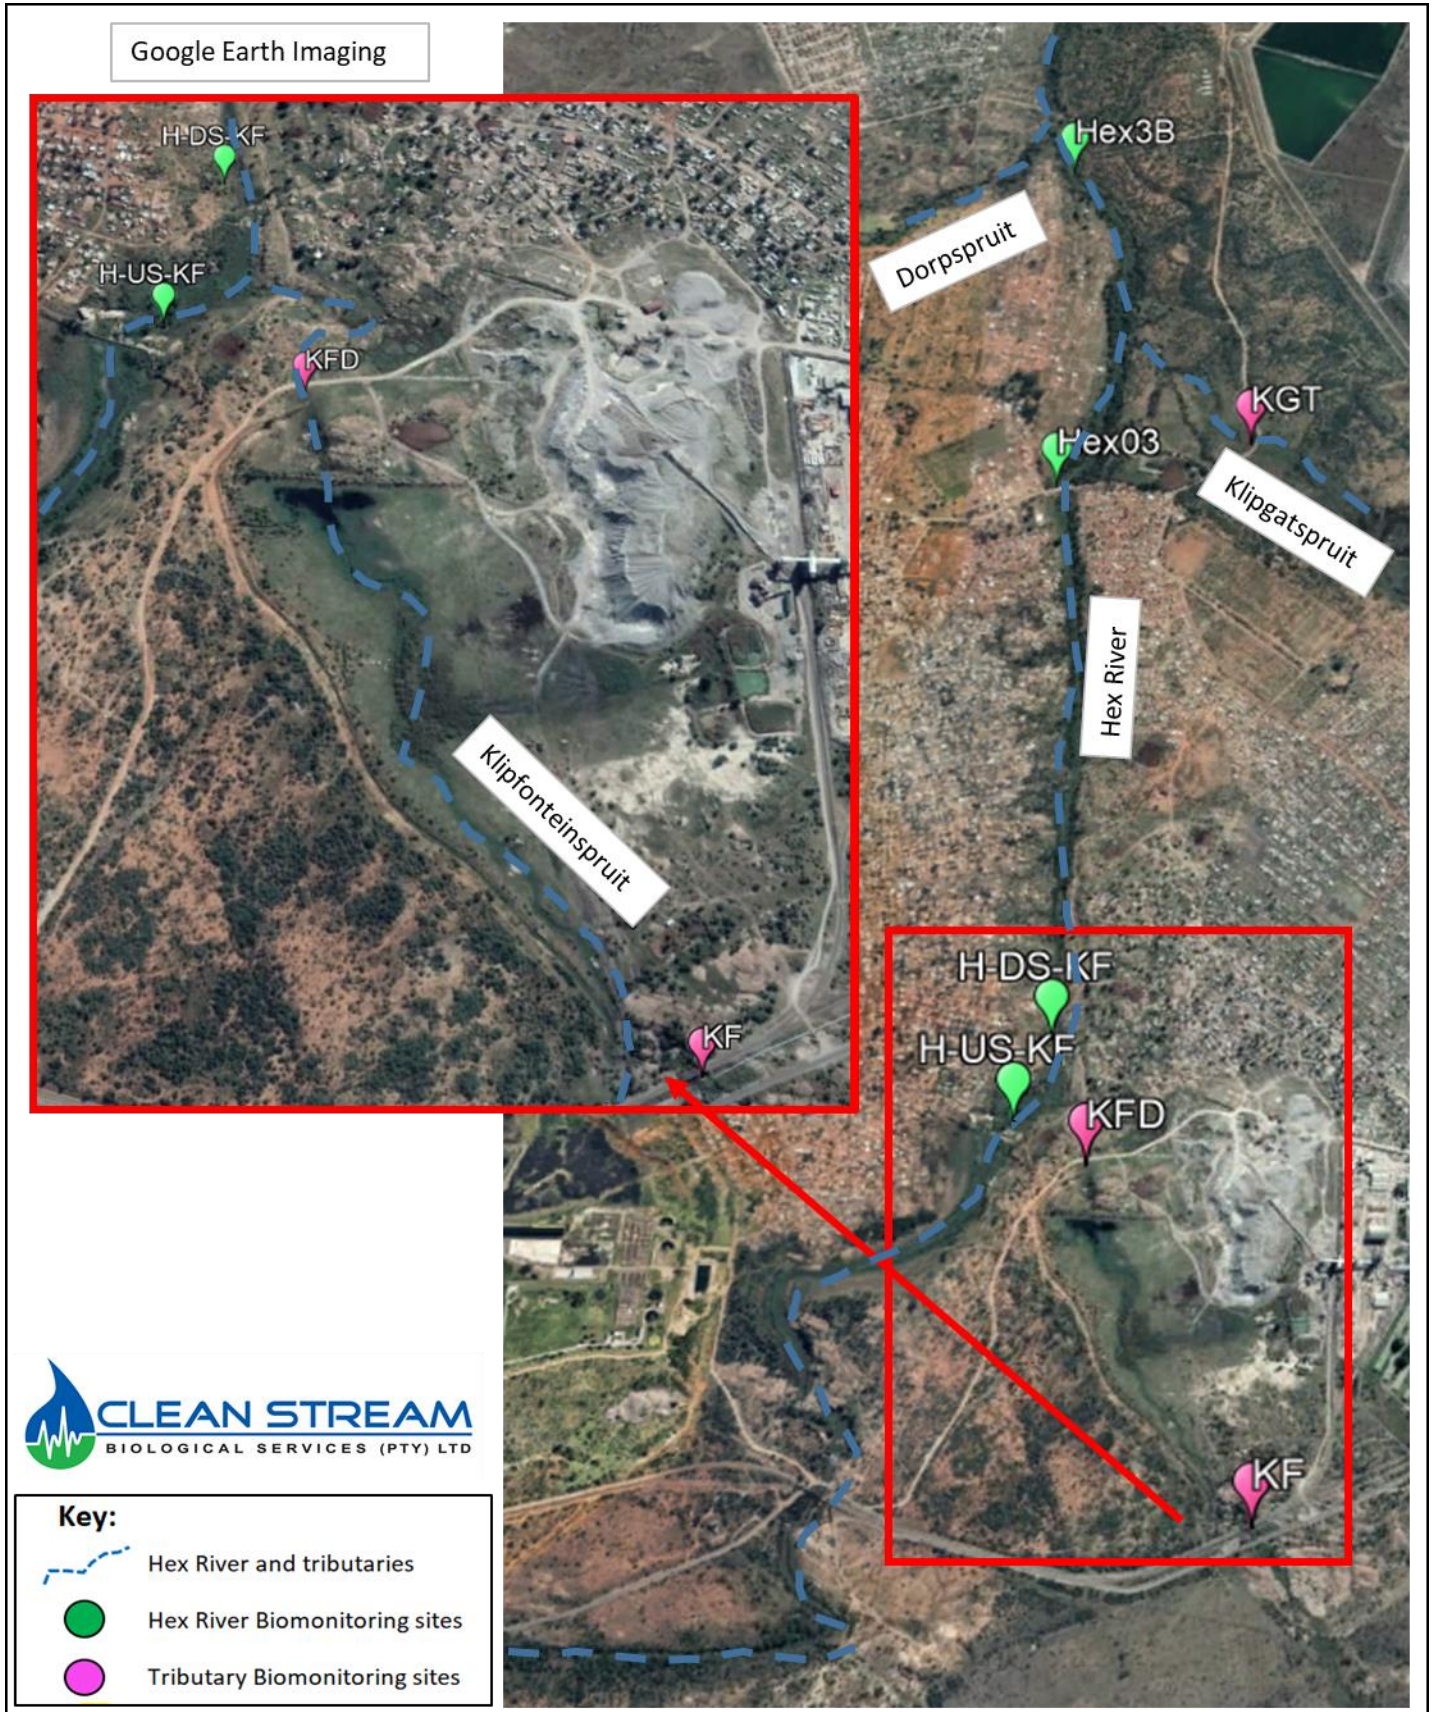


Figure 1: Google Earth image of study area, indicating Hex River and tributary biomonitoring sites.

3.2 In-situ water quality (June 2019)

Selected water quality variables were measured on-site at the time of biological sampling. The purpose of these measurements is to assist in the interpretation of biological results (refer to Aquatico Scientific's Water Quality Report for a detailed water quality assessment of the Rustenburg Platinum mining area).

As recorded during most surveys, the EC increased from site H-US-KF to H-DS-KF in the Hex River (119.4 mS/m to 142.0 mS/m) (Table 3; Figure 2). The Klipfonteinspruit joins the Hex River between these sites and probably played a large role in the increased salinity during most preceding surveys (no perceptible surface flow was recorded from the Klipfonteinspruit during many surveys, but a subsurface contribution of affected mine water cannot be ruled out). The EC value was high in the Klipfonteinspruit sites KF (565.0 mS/m) and KFD (765.0 mS/m), as during most previous surveys, again confirming this tributary as a potential source of elevated salinity levels, especially during periods of flow (see section 3.3).

Table 3: In-situ water quality variables measured at the time of sampling at the selected biomonitoring sites

Monitoring site	EC (mS/m)	pH	Oxygen saturation (%)	Dissolved oxygen (mg/l)	Water temp (°C)	Turbidity (visual)	Flow (visual)	Time	Date
H-US-KF	119.4	7.2	40.5	3.3	14.8	Slightly turbid	Moderate	15:30	18/06/2019
H-DS-KF	142.0	7.4	73.9	6.0	14.5	Clear	Moderate	12:45	19/06/2019
HEX03	139.5	7.4	53.4	4.5	13.1	Slightly turbid	Low	10:30	19/06/2019
HEX3B	26.4	7.1	63.5	5.5	12.7	Slightly turbid	Moderate	10:02	19/06/2019

Value outside general guideline.

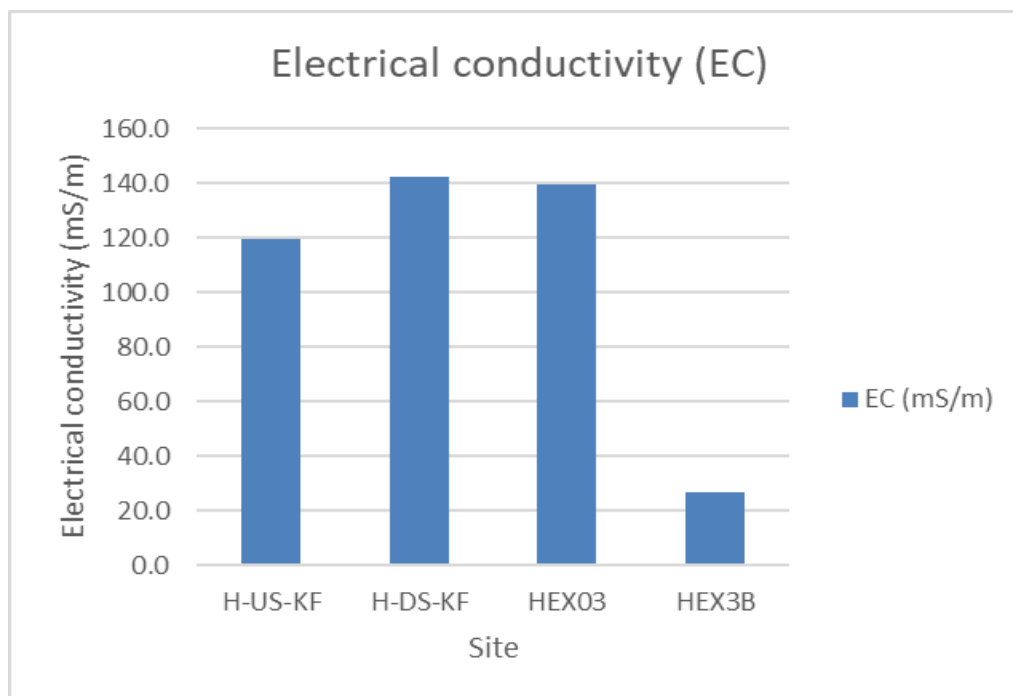


Figure 2: Electrical conductivity levels (mS/m) at the time of sampling at the different biomonitoring sites.

The EC level remained stable from site H-DS-KF (142.0 mS/m) to Hex03 (139.5 mS/m) (Table 3; Figure 2), therefore not indicating on impacts from non-Anglo Platinum Process Division (APPD) activities on the salinity of the Hex River at the time of sampling. This contrasts with the previous survey that showed an increase in salinity from site H-DS-KF to Hex03 (see report AAPL-A-18).

From site Hex03 towards site Hex03B (the most downstream site), the EC values decreased notably (195.2 mS/m to 26.4 mS/m) (Table 3; Figure 2), thus indicating that the contribution from the Klipgatspruit (dry at the time of sampling) did not lead to an increase in the salinity of the receiving environment.

The pH fell within the target water quality ranges for fish health (Aquaculture), which is between 6.5 and 9.0, at all sites during June 2019. It is expected that most aquatic species will tolerate and reproduce successfully within this pH range (DWAF, 1996), and the pH values recorded should therefore not be limiting to aquatic biota.

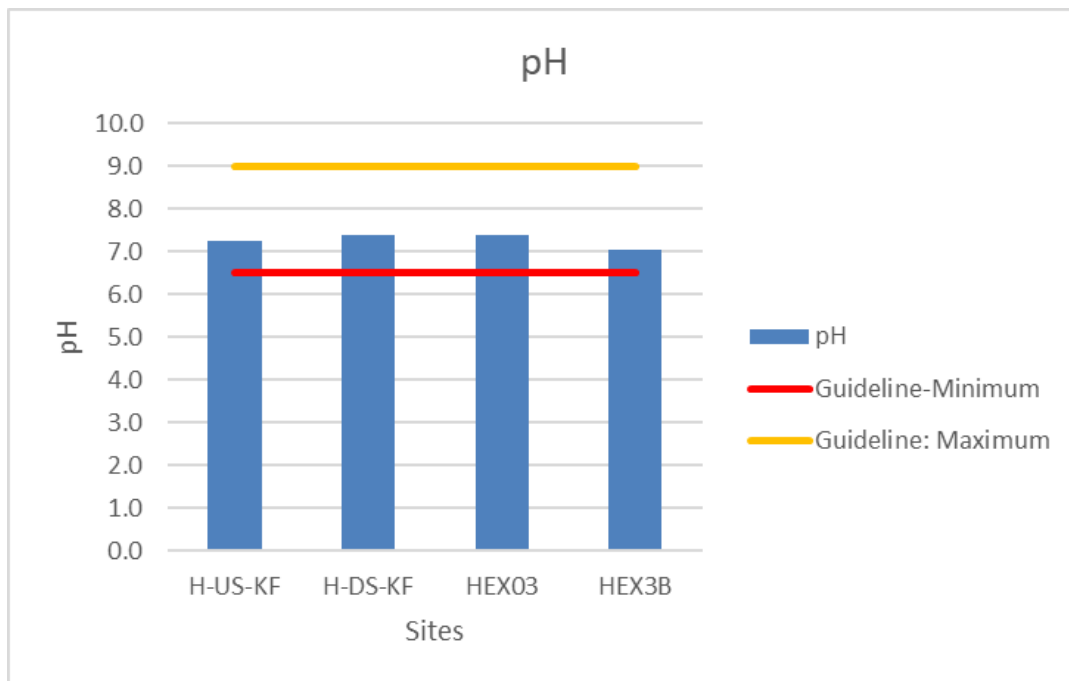


Figure 3: pH levels at the time of sampling at the different biomonitoring sites.

During June 2019, the dissolved oxygen level fell below the target range (> 5 mg/l, as set by Kempster *et.al.*, 1980) at site H-US-KF (3.3 mg/l) (Table 3; Figure 4). These low levels of dissolved oxygen will be limiting to aquatic biota, particularly if persistent or frequently occurring.

As during the previous (October 2018) and many preceding surveys, dissolved oxygen levels were again below the target range at site Hex03 (4.5 mg/l) during the present survey (Table 3; Figure 4). The noted low oxygen levels could therefore possibly have posed a risk to aquatic biota and was probably related to a combination of factors including:

- Elevation and accumulation of organic loads,
- Aquatic vegetation and algal proliferation in response to eutrophication,
- Low flow (all affected sites).

It has to be noted that the cause of lowered dissolved oxygen levels is unlikely to be related to APPD activities because levels were within the guideline at site H-DS-KF and no further APPD activities take place toward site Hex03. Dissolved oxygen levels improved to above the target range towards site Hex03B (5.5 mg/l) (Table 3; Figure 4) and should therefore not be limiting to aquatic biota at this site.

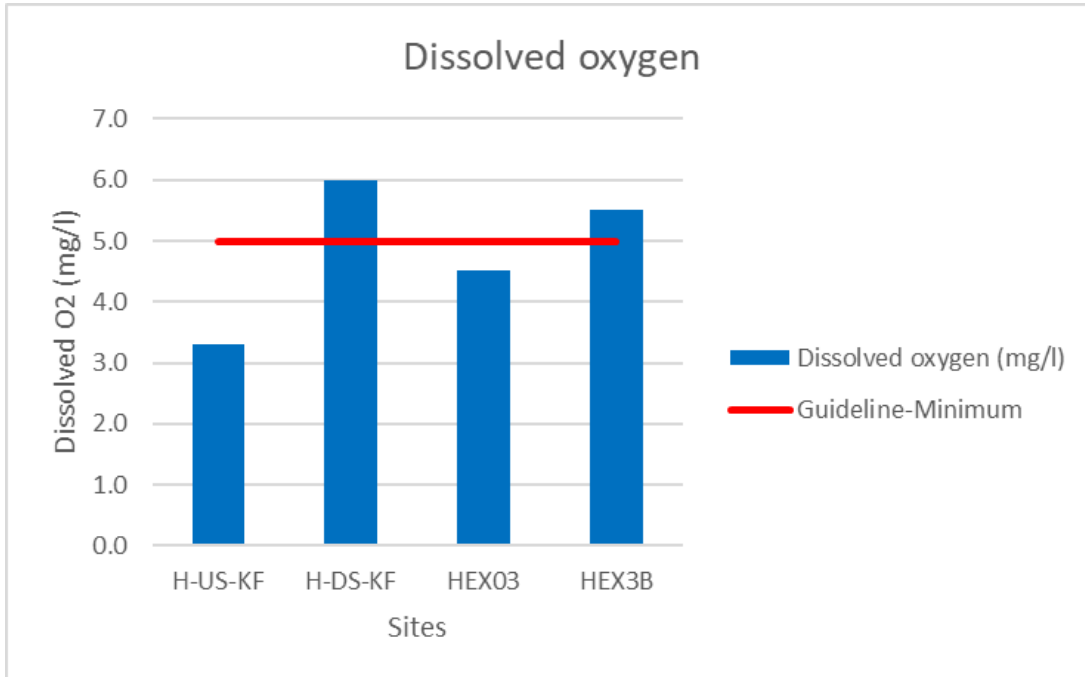


Figure 4: Dissolved oxygen levels (mg/l) at the time of sampling at the different biomonitoring sites.

As a standard management procedure, a full statistical evaluation of water quality data at these biomonitoring localities (as performed by Aquatico Scientific) will be required to conclude whether specific variables or a combination of variables, not included in the biota specific range, are impacting on the aquatic ecosystems.

3.3 Toxicity testing

At the time of compiling this biomonitoring report, the latest toxicity testing results for the Pollution Control Facilities available to Clean Stream Biological Services were based on the May 2019 dataset, as submitted as a separate toxicity testing report by Biotox Laboratory Services (Report no. RPM-A-19_TOX).

The latest tributary toxicity testing report, as performed in conjunction with the June 2019 biomonitoring survey, is also included and discussed in this biomonitoring report.

As per SANAS requirements, the above-mentioned toxicity testing reports were produced independently by Biotox Laboratory Services (Pty) Ltd. All results contained in this section are therefore sourced from the Biotox reports, which are included in Addendum 1.

Toxicity testing (as conducted in this biomonitoring programme) is applied by exposing biota under laboratory conditions to water sources (pollution control dams, effluent streams or streams/rivers) to accurately determine the risk of such water types to the biota of the receiving water bodies. Toxicity results indicate the risk posed to the Hex River and its tributaries in the event of release, seepage or overflow from possible sources of pollution. Up to four trophic levels (at least 3, including acute and chronic approaches) of biota, *i.e.*, vertebrates (*Poecilia reticulata*), invertebrates (*Daphnia magna*), bacteria (*Allivibrio fischeri*) and primary producers (*Selenastrum capricornutum*) are exposed to the samples per standard procedures under laboratory conditions and thereafter a risk/hazard category is determined by application of the latest **DEEEP**¹ DWS recommended protocols and hazard classification. The final risk classification is expressed in terms of **acute**² and **chronic**³ toxicity risk. The *Poecilia reticulata* and *Daphnia magna* test results are based on mortality rates over a relatively short period of the lifespan of the organisms, hence allowing for acute interpretation. *Selenastrum capricornutum* and *Vibrio fischeri* individual test results are based on inhibition rates over relatively long periods of the lifespan of the organisms, hence allowing for short-chronic toxicity hazard interpretation.

Selected toxicity samples (Hex River tributaries) were tested on a twice per annum schedule, while the PCD (pollution control dam) samples are tested once per annum, on either a **screening**⁴ acute level or a **definitive**⁵ acute level, at this stage. The frequency of testing is informed by the level of toxicity. If toxicity levels increase, it may become relevant and useful to increase the frequency of testing. The frequency and type of toxicity testing required (screening vs. definitive) should be revised from time to time based on the outcome of the specific year's assessments.

¹ DEEEP = Direct Estimation of Ecological Effect Potential. This is a battery of tests that can measure toxicity of complex mixtures based on a set of parameters stemming from the results of effects, even if all constituents are not known. Thereafter a hazard class is determined based on the resulting parameters of the battery of tests.

² Acute = Acute refers to an exposure over a relatively short period of the lifespan of biota, of which the result is generally based on mortality rates.

³ Chronic = Chronic refers to prolonged exposures over an extended period of the lifespan of test organisms, of which the results are generally based on growth inhibition rates.

⁴ Screening = A screening toxicity test refers to an undiluted (100% concentration) sample. This is usually performed on a sample from the biomonitoring sites in the receiving water bodies (river/streams) to determine if any toxicity is present. This is performed both up- and downstream of the potential impacts to enable the determination of downstream increases or decreases in toxicity.

⁵ Definitive = A definitive toxicity test refers to the exposure of test organisms to both the 100% concentration as well as a range of dilutions, generally used to determine the risk of a pollution source that may have a toxicity effect on the receiving water body (such as effluents and PCD's). The range of dilutions are therefore useful in the event that the 100% sample concentration presents acute toxicity, and allows for the determination of a safe dilution factor, to negate toxicity effects on the receiving water bodies.

Hazard classification for screening tests (undiluted samples)

After the determination of the percentage effect⁶ (EP), obtained with each of the **battery of toxicity screening** tests performed, the sample is ranked into one of the following five classes:

Hazard classification system for screening tests

Class I	No acute/short-chronic environmental toxicity hazard - none of the tests shows a toxic effect (i.e. an effect value significantly higher than that in the control)
Class II	Slight acute/short-chronic environmental toxicity hazard - a statistically significant ($P < 0,05$) percentage effect is reached in at least one test, but the effect level is below 50%
Class III	Acute/short-chronic environmental toxicity hazard - the percentage effect level is reached or exceeded in at least one test, but the effect level is 50-99%
Class IV	High acute/short-chronic environmental toxicity hazard - the 100% percentage effect is reached in at least one test
Class V	Very high acute/short-chronic environmental toxicity hazard - the 100% percentage effect is reached in all the tests

Weighting: Each sample is furthermore weighted according to its relative toxicity levels (out of 100%). Higher values indicate that more of the individual tests indicated toxicity within a specific class.

Toxicity classification system definitive tests (undiluted samples plus range of dilutions)

The samples are classified into one of the following five classes on the basis of the highest toxicity unit (TUa) found in the **battery of toxicity definitive tests** performed. The toxicity unit is a function of the L(E)C50, where $(TUa) = 100/L(E)C50$. The 50% Lethal/Effective concentration (LC50 or LE50) is the linear calculated (derived) concentration at which a 50% mortality or inhibition rate can be expected. Hence, the lower this value is, the higher the acute toxicity level. Conversely, the higher the toxicity unit (TUa) is, the higher the acute toxicity level is. The conversion of L(E)C50 values to TUa values is therefore merely done to achieve a classification scale of increasing values related to increasing toxicity risk:

Hazard classification system for definitive tests

Class I	No acute/short-chronic environmental toxicity hazard - none of the tests shows a toxic effect (i.e. an effect value significantly higher than that in the control)
Class II	Slight acute/short-chronic environmental toxicity hazard - the percentage effect observed in at least one toxicity test is significantly higher than in the control, but the effect level is below 50% ($TU < 1$)
Class III	Acute/short-chronic environmental toxicity hazard - the L(E)C50 is reached or exceeded in at least one test, but in the 10 fold dilution of the sample the effect level is less than 50% ($1 \leq TU \leq 9,99$)
Class IV	High acute/short-chronic environmental toxicity hazard - the L(E)C50 is reached in the 10 fold dilution for at least one test, but not in the 100 fold dilution ($10 \leq TU \leq 99,99$)
Class V	Very high acute/short-chronic environmental toxicity hazard - the L(E)C50 is reached in the 100 fold dilution for at least one test ($TU \geq 100$)

Note:

The samples are classified into one of the above five classes on the basis of the highest toxicity unit (TU) found in the battery of toxicity definitive tests performed

Weighting: Each sample is furthermore weighted according to its relative toxicity levels (out of 100%). Higher values indicate that more of the individual tests indicated toxicity within a specific class.

⁶ EP (Percentage effect) = an effect measured either as a mortality rate or inhibition rate (depending on the type of test). A 10% effect is regarded as a slight acute toxicity for daphnia and guppies, while a 20% effect is regarded as a slight acute toxicity for algae and bacteria (vibrio). A 50% effect is regarded as an acute toxicity for all of the tests (daphnia, guppies, algae and bacteria)

3.3.1 May 2019 and June 2019

Toxicity testing of pollution control facilities (May 2019 only)

Various toxicity hazards were identified during the May 2019 survey, ranging from “no acute/short-chronic environmental toxicity hazard” (Class I) to “very high acute/short-chronic environmental toxicity hazard” (Class V), implying that some effluents/potential effluents could pose a serious risk to the receiving water bodies if released (Table 4).

Sample K035 (Klipgat Dam) was tested as posing “no acute/short-chronic environmental toxicity hazard” (Class I) using the normal range of dilutions at a macro-invertebrate level (Table 4). **However, from a 0.1% dilution level, significant mortalities (100%) were noted potentially indicating sources of pollution affecting organisms more severely at lower concentration, e.g. nano materials, and further testing is recommended (see Addendum 1).**

Sample K211 (PMR Dam 3B) displayed a “slight acute/short-chronic hazard” (Class II) based on the 31% bacterial light emission inhibition effect noted during testing (Table 4). A safe dilution factor of 89% (ratio of 89 parts K211 water to 11 parts unpolluted water) was calculated for this sample. Sample K210 (PMR Dam 3A) showed an “acute/short chronic hazard” (Class III) based on the highest toxicity unit (2.2) calculated on a bacterial testing level (Table 4). A safe dilution factor of 36% was estimated for this sample.

Samples K098 (ACP Dam), K162 (RBMR Triangular Dam), K212 (PMR Dam 4+5), and K213 (PMR Dam 6E) showed a “high acute/short-chronic hazard” (Class IV), based on the 100% mortality effects on at least one trophic level test and toxicity units ranging from 5.4 - >100 (Table 4). A safe dilution factor of 2% was calculated for samples K098 (ACP Dam) and K162 (RBMR Triangular Dam). Very low safe dilution factors (<1%) were calculated for samples K212 (PMR Dam 4+5), and K213 (PMR Dam 6E) and **water from these facilities should not be allowed to reach the natural environment.**

Samples K160 (RBMR Dam 3A), K161 (RBMR Dam 3B) and K209 (PMR Dam 2) showed a “very high acute/short-chronic environmental toxicity hazard” (Class V) based on the toxicity units >100 calculated for these samples during testing at all 3 trophic levels (Table 4). Very low safe dilution factors (<1%) were calculated for these samples and **water from these facilities should not be allowed to reach the natural environment.** The toxicity effects observed for sample K160 (RBMR Dam 3A) were particularly severe and could not be diluted out (tested to dilutions of 0.195% of original sample).

Table 4: Toxicity results and hazard classification for selected pollution facilities (May 2019).

Results		K035 (Klipgat Dam)	K098 (ACP Dam)	K160 (RBMR Dam 3A)	K161 (RBMR Dam 3B)	K162 (RBMR Triangular Dam)	K209 (PMR Dam 2)	K210 (PMR Dam 3A)	K211 (PMR Dam 3B)	K212 (PMR Dam 4+5)	K213 (PMR Dam 6E)
w _o Water quality	pH @ 25°C (A)	7.3	2.7	3.2	5.2	10.5	1.2	9.8	9.4	5.5	5.6
	EC (Electrical conductivity) (mS/m) @ 25°C (A)	539.0	186.9	6340.0	3880.0	6090.0	10650.0	42.4	63.7	18940.0	24000.0
	Dissolved oxygen (mg/l) (NA)	9.4	7.5	7.4	7.5	7.3	7.6	8.6	7.8	7.6	7.5
A. fischeri (bacterial) (A)	Test started on yy/mm/dd	19/05/29	19/05/29	19/05/29	19/05/29	19/05/30	19/05/30	19/06/05	19/06/05	19/06/05	19/06/06
	%30min inhibition (-) / stimulation (+) (%)	55	-100	-100	-100	-100	-100	-97	-31	-100	-100
	EC/LC20 (30 mins)	n.r	2	n.c	n.c.	2	n.c	36	89	n.c	n.c
	EC/LC50 (30 mins)	n.r	9	n.c	0.5	3	n.c	45	n.r.	4	3
	Toxicity unit (TU) / Description	<1	11.8	>100	25.6	29.5	>100	2.2	<1	27.1	30.6
D. magna (waterflea) (A)	Test started on yy/mm/dd	19/05/27	19/05/27	19/05/27	19/05/27	19/05/27	19/05/27	19/05/27	19/05/27	19/05/27	19/05/27
	%48hour mortality rate (-%)	-5	-100	-100	-100	-100	-100	-5	0	-100	-100
	EC/LC10 (48hours)	n.r	10	n.c	n.c	2	n.c	n.r	n.r	n.c	n.c
	EC/LC50 (48hours)	n.r	19	n.c	n.c	8	0.3	n.r	n.r	4	3
	Toxicity unit (TU) / Description	<1	5.4	>100	>100	12.9	>100	<1	<1	28.0	32.5
P. reticulata (snail) (A)	Test started on yy/mm/dd	19/05/30	19/05/30	19/05/30	19/05/30	19/05/30	19/05/30	19/05/30	19/05/30	19/05/30	19/05/30
	%96hour mortality rate (-%)	0	-100	-100	-100	-100	-100	-25	0	-100	-100
	EC/LC10 (96hours)	n.r	12	n.c	n.c	10	2	70	n.r	5	2
	EC/LC50 (96hours)	n.r	18	n.c	0.3	17	6	n.r.	n.r	7	6
	Toxicity unit (TU) / Description	<1	5.7	>100	>100	5.9	18.2	<1	<1	14.3	18.2
Estimated safe dilution factor (%) [for definitive testing only]	None required	2	<1	<1	2	<1	36	89	<1	<1	
Overall classification - Hazard class***	Class I - No acute/short-chronic hazard	Class IV - High acute/short-chronic hazard	Class V - Very high acute/short-chronic hazard	Class V - Very high acute/short-chronic hazard	Class IV - High acute/short-chronic hazard	Class V - Very high acute/short-chronic hazard	Class III - Acute/short-chronic hazard	Class II - Slight short-chronic hazard	Class IV - High acute/short-chronic hazard	Class IV - High acute/short-chronic hazard	
Weight (%)	0	78	100	100	89	100	67	33	100	100	

Key:
 % = for definitive testing, only the 100% concentration (undiluted) sample mortality/inhibition/stimulation is reflected by this summary table. The dilution series results are considered for EC/LC values and Toxicity unit determinations
 n.r. = not relevant, i.e. the 100% concentration caused less than 10/20/50% (effective concentration) mortalities or inhibition
 n.c. = not calculable, although the 100% concentration led to more than 10/20/50% mortalities/inhibition, the 10/20/50% mortality/inhibition rate was exceeded throughout the test
 *** = The overall hazard classification takes into account the full battery of tests and is not based on a single test result. Note that the overall hazard classification is expressed as acute/short-chronic level of toxicity, due to the fact that the A. fischeri test is regarded as short-chronic level of toxicity test and the overall classification therefore contains a degree of short-chronic toxicity assessment.
Weight (%) = relative toxicity levels (out of 100%), higher values indicate that more of the individual tests indicated toxicity within a specific class
 site/sample name shaded in purple = screening test
 site/sample name shaded in orange = definitive test

Toxicity testing of Hex River tributaries (June 2019)

Toxicity testing was scheduled for the Hex River tributaries of the Klipfonteinspruit (samples KF and KFD) and the Klipgatspruit (sample KGT) for the June 2019 survey. The Klipgatspruit site was however dry at time of the survey precluding sampling.

As noted earlier in the report, the electrical conductivity (EC) levels are almost always very high within the Klipfonteinspruit. EC is often an indication of reduced water quality, but toxicity testing results revealed that no hazard (**Class I**) was observed at the Klipfonteinspruit sites (KF and KFD), before entering the Hex River (Table 5). This is an encouraging improvement since the October 2014 and April 2015 surveys, when a high hazard (Class IV) and a slight hazard (Class II) was presented by this tributary. It was noted that the Klipfonteinspruit was not flowing during the October 2014 survey and that contamination was therefore contained within isolated pools. It is important to note that APPD activities potentially contribute to this tributary.

Table 5: Toxicity results and hazard classification for selected Hex River tributary samples (June 2019).

	Results	KF	KFD
w ₀ Water quality	pH @ 25°C (A)	8.4	8.4
	EC (Electrical conductivity) (mS/m) @ 25°C (A)	565.0	765.0
	Dissolved oxygen (mg/l) (NA)	7.8	8.1
A. fischeri (bacteria) (A)	Test started on yy/mm/dd	19/06/28	19/06/28
	%30min inhibition (-) / stimulation (+) (%)	21	33
	EC/LC20 (30 mins)	*	*
	EC/LC50 (30 mins)	*	*
	Toxicity unit (TU) / Description	no short-chronic hazard	no short-chronic hazard
D. magna (waterflea) (A)	Test started on yy/mm/dd	19/07/01	19/07/01
	%48hour mortality rate (-%)	-5	0
	EC/LC10 (48hours)	*	*
	EC/LC50 (48hours)	*	*
	Toxicity unit (TU) / Description	no acute hazard	no acute hazard
P. reticulata (guppy) (A)	Test started on yy/mm/dd	19/06/24	19/06/24
	%96hour mortality rate (-%)	0	0
	EC/LC10 (96hours)	*	*
	EC/LC50 (96hours)	*	*
	Toxicity unit (TU) / Description	no acute hazard	no acute hazard
Overall classification - Hazard class***	Class I - No acute/short-chronic hazard	Class I - No acute/short-chronic hazard	
Weight (%)	0	0	

Key:

* = EC/LC values not determined, definitive testing required if a hazard was observed and persists over subsequent sampling runs
 *** = The overall hazard classification takes into account the full battery of tests and is not based on a single test result. Note that the overall hazard classification is expressed as acute/short-chronic level of toxicity, due to the fact that the *A. fischeri* test is regarded as a short-chronic level of toxicity test and the overall classification therefore contains a degree of short-chronic toxicity assessment.
 Weight (%) = relative toxicity levels (out of 100%), higher values indicate that more of the individual tests indicated toxicity within a specific class
 site/sample name shaded in purple = screening test
 site/sample name shaded in orange = definitive test

3.3.2 Temporal variation of toxicity results (2008 to 2019)

To determine temporal (over time) trends of increasing/decreasing toxicity levels, the risk class for each sample was plotted for each survey. Thereafter, linear trends over time were determined for the risk class at each site (Figures 5 & 6). It is important to note that these trends were not based on the actual mortalities/inhibition or lethal concentrations, but on the derived risk class for each survey and is merely included to gain a general understanding of increased/decreased risk over time.

Annually tested PCD's and selected streams

From the temporal database, most samples show varying degrees of toxicity and almost all the samples have fallen within the Class II or higher classes from time to time (Figure 5). Samples Dam2 and Dam 4/5

consistently fall into the higher hazard classes and are therefore never suitable for undiluted release⁷ (including uncontrolled releases) to the environment. Some samples have, however, improved notably over time, such as sample K105, which has improved from an acute hazard (Class III) during 2008/2009 to no acute hazard (Class I) over the past five years. Samples from Dam6 and ACP have shown notably increasing trends in toxicity hazard over time. Environmental managers should take note of these hazard classes to plan licensed releases and/or contain hazardous water types at the appropriate times.

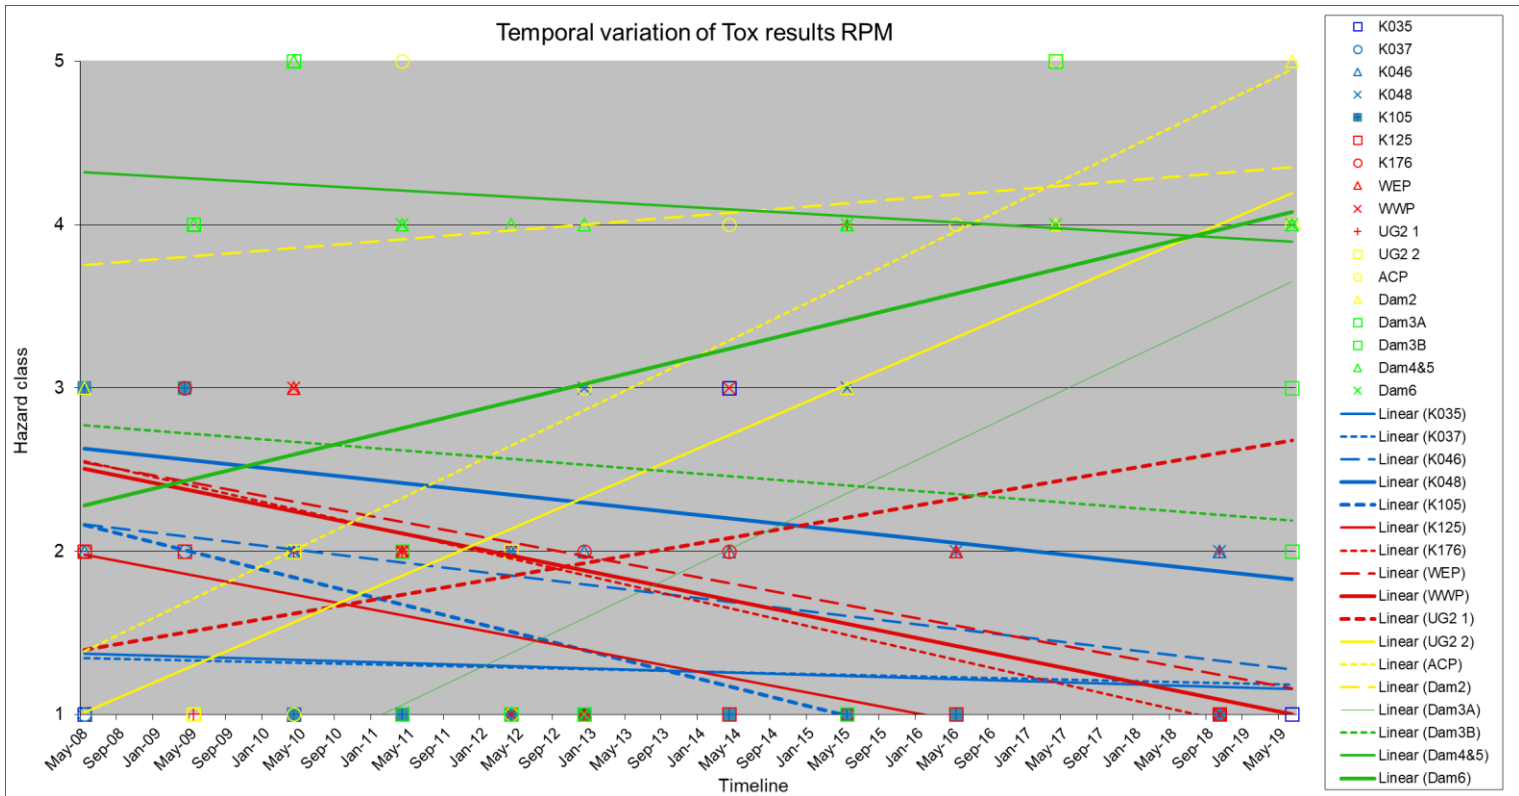


Figure 5: Temporal trends of toxicity results (annually tested PCD's and selected streams).

It is strongly recommended that definitive toxicity testing be continued for the samples that regularly display positive toxicity levels of Class III or higher. Definitive toxicity testing will allow for the estimation of safe dilution factors should the mine wish to apply for a water use licence to legally discharge such water types. These factors will also be essential for environmental managers to predict whether the toxicity of polluted water can be negated by natural dilution if accidentally released (e.g. spills, leaks or seepage) to the receiving environment. Definitive testing will furthermore assist in the suitable scheduling for planned releases (*i.e.* whether water could be released during the dry season and, if not, whether sufficient dilution is only likely to be achieved during the wet season/times of high river flow).

⁷ Although theoretical predictions in terms of suitability for release are provided, releases remain bound by licensing conditions and are not prescribed/permitted by toxicity testing results.

Bi-annually tested tributaries

From the temporal database, it is clear that the relevant tributaries (Klipfonteinspruit and Klipgatspruit) have displayed toxicity hazards at times (Figure 6). It is encouraging that both tributaries have recently displayed lower toxicity. The Klipfonteinspruit is therefore also displaying a decreasing trend (improved hazard over time) as noted in Figure 6.

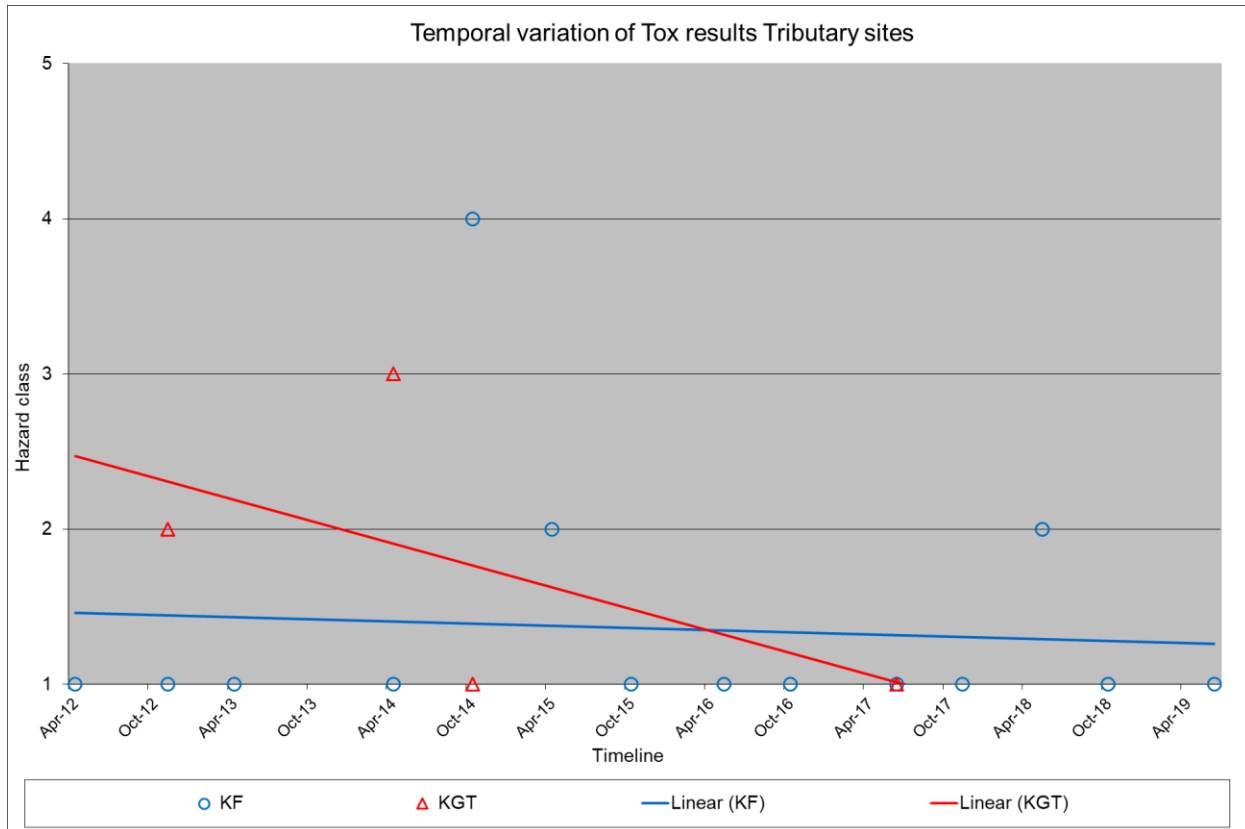


Figure 6: Temporal trends of toxicity results (bi-annually tested tributaries).

3.4 Aquatic invertebrate assessment: South African Scoring System 5

The South African Scoring System (Version 5) is a site-specific index which, together with associated habitat index (biotope suitability index), gives a general perspective of the biotic integrity (based on macro-invertebrates) and the impact of water quality on the biotic integrity of the specific sites (Thirion *et.al.*, 1995; Dickens and Graham, 2001). The biotope suitability index considers the suitability of the different sampled biotopes in terms of quality and availability. It thereby firstly assesses whether the total SASS5 scores of two sites are directly comparable by comparing the total biotope suitability scores. If the total biotope suitability scores are very different this would imply that the total SASS5 scores should not be compared, but instead the most comparable SASS biotope scores. The most comparable SASS biotope scores are identified by comparing the various individual biotope suitability scores. In addition to the biotope suitability index, the Integrated Habitat Assessment System version 2 (IHAS) was also applied and included to give the macro-invertebrate specific habitat descriptions (Table 6).

Average score per taxon (ASPT) values are also useful in the assessment and comparison of biotic conditions at different sites. Based on field trials assessed by Dickens and Graham (2001) the ASPT was less variable than total SASS5 scores when conducted within a given river reach by different operators, considering all biotopes. ASPT is therefore included in the discussion below.

Table 6: Integrated Habitat Assessment (IHAS) description of the different biomonitoring sites.

Sampling Habitat	H-US-KF		H-DS-KF		HEX03		HEX3B	
	Desc	Score	Desc	Score	Desc	Score	Desc	Score
Stones In Current (SIC)								
Total length of white water rapids (ie: bubbling water) (in meters)	0-1	1	0-1	1	none	0	none	0
Total length of submerged stones in current (run) (in meters)	0-2	1	>2-5	2	none	0	>2-5	2
Number of separate SIC area's kicked	2-3	2	2-3	2	0	0	1	1
Average stone sizes kicked (in cm's)	11-20	3	11-20	3	none	0	>2-10	2
Amount of stone surface clear (in %)	0-25	1	0-25	1	n/a	0	0-25	1
Protocol: time spent actually kicking SIC's (in mins)	2	3	2	3	none	0	>1-2	2
SIC score (max 20)		11		12		0		8
Vegetation (VEG)								
Length of fringing vegetation sampled (banks) (in meters)	2	4	2	4	2	4	2	4
Amount of aquatic vegetation/algae sampled (in square meters)	>1	3	none	0	0-0.5	1	>1	3
Fringing vegetation sampled in	mix	5	mix	5	pool	3	mix	5
Type of veg. (percent leafy as apposed to stems/shoots)	26-50	3	1-25	2	1-25	2	26-50	3
Veg score (max 15)		15		11		10		15
Other Habitat / General (O.H.)								
Stones Out Of Current (SOOC) sampled (in square meters)	>0.5-1	2	>0.5-1	2	none	0	0-0.5	1
Sand sampled (in minutes)	0-0.5	2	0-0.5	2	none	0	0-0.5	2
Mud sampled (in minutes)	0-0.5	2	0-0.5	2	0.5	3	0-0.5	2
Gravel sampled (in minutes)	0.5	2	none	0	none	0	none	0
Bedrock sampled (all = no SIC, sand, gravel)	some	1	some	1	none	0	none	0
Algal presence (m ²)	isolated	4	>1sqm	3	>1sqm	3	>1-2sqm	2
Tray identification	correct	3	correct	3	correct	3	correct	3
O.H. score (max 20)		16		13		9		10
Sampling habitat totals (max 55)		42		36		19		33
Stream Condition								
Physical								
River make up	2 mix	4	run	2	pool	0	2 mix	4
Average width of stream (in meters)	1-2	4	>2-5	5	1-2	4	1-2	4
Average depth of stream (in meters)	>0.5-1	3	0.5	4	>0.5-1	3	1-2	1
Approximate velocity of stream	medium	3	medium	3	medium	3	mix	5
Water colour	discoloured	3	discoloured	3	discoloured	3	discoloured	3
Recent disturbances	other	3	other	3	other	3	other	3
Bank/Riparian vegetation	mix	4	mix	4	mix	4	mix	4
Surrounding impacts	other	3	other	3	other	3	other	3
Left bank cover (rocks and vegetation) (in %)	51-80	1	51-80	1	51-80	1	51-80	1
Right bank cover (rocks and vegetation) (in %)	51-80	1	51-80	1	51-80	1	51-80	1
Stream condition total (max 45)		29		29		25		29
Total IHAS score (%)		71		65		44		62

Biotic conditions, based on the total SASS5 and ASPT scores, remained fairly stable from site H-US-KF to site H-DS-KF (Table 7; Figure 7), in contrast to the October 2018 survey when a clear downstream deterioration was observed. The findings are in line with most previous surveys when no spatial deterioration was observed. The two most similar biotopes⁸ between the two sites (GSM and Vegetation), showed contrasting results therefore no conclusions on water quality related differences in biotic integrity could be

⁸ To compare the effect of water quality on SASS scores on a spatial scale, habitat differences are considered. Therefore, the most comparable SASS_{biotope} scores, in terms of habitat are also contrasted to gain insight regarding the effect of water quality on the biotic conditions (biotic integrity)

made. *In-situ* water quality measures showed improvement in terms of dissolved oxygen levels towards site H-US-KF, but deterioration in terms of salinity (see section 3.2). Overall, macroinvertebrate-based biotic integrity in the Hex River did not appear to deteriorate after the inflow of the Klipfonteinspruit tributary (and potentially associated APPD impacts).

As in the October 2018 survey, biotic conditions, based on the total SASS5 scores and ASPT values, decreased from site H-US-KF to Hex03 (Table 7; Figure 7). Habitat likely played a role, with site Hex03 having lower biotope availability and suitability (no stones biotope), and IHAS scores. Comparison of the most similar SASS-biotope (Vegetation) however indicated that water quality deterioration likely also contributed to the reduction in biotic integrity (Tables 6 and 7), and *in-situ* water quality measures likewise showed downstream deterioration in dissolved oxygen levels with levels below the median guideline recorded at site Hex03 (see section 3.2). It must be noted that organic enrichment and solid waste disposal appears extensively at this site and will likely affect biotic integrity if not mitigated (Plate 2). It is again noted that the reason for lowered dissolved oxygen levels are unlikely to be related to APPD activities because levels were within the guideline at site H-US-KF and no further APPD activities take place towards site Hex03.

Table 7: SASS5, ASPT and habitat suitability/availability index scores for different monitoring sites (June 2019).

Monitoring site	SASS5 score	ASPT	SASS5-score per biotope			Biotope availability and suitability (Scores)			
			SASS _{Stones}	SASS _{Vegetation}	SASS _{GSM}	Stones	Vegetation	GSM	Combined
H-US-KF	50	3.85	31	42	13	3	4	3	10
H-DS-KF	46	3.83	28	30	20	5	4	3	12
HEX03	22	3.14	0	21	3	0	3	1	4
HEX3B	26	3.25	2	23	8	1	4	2	7

Key:

ASPT - Average Score Pre Taxon S-Stones Veg-Vegetation GSM-Gravel, sand & mud

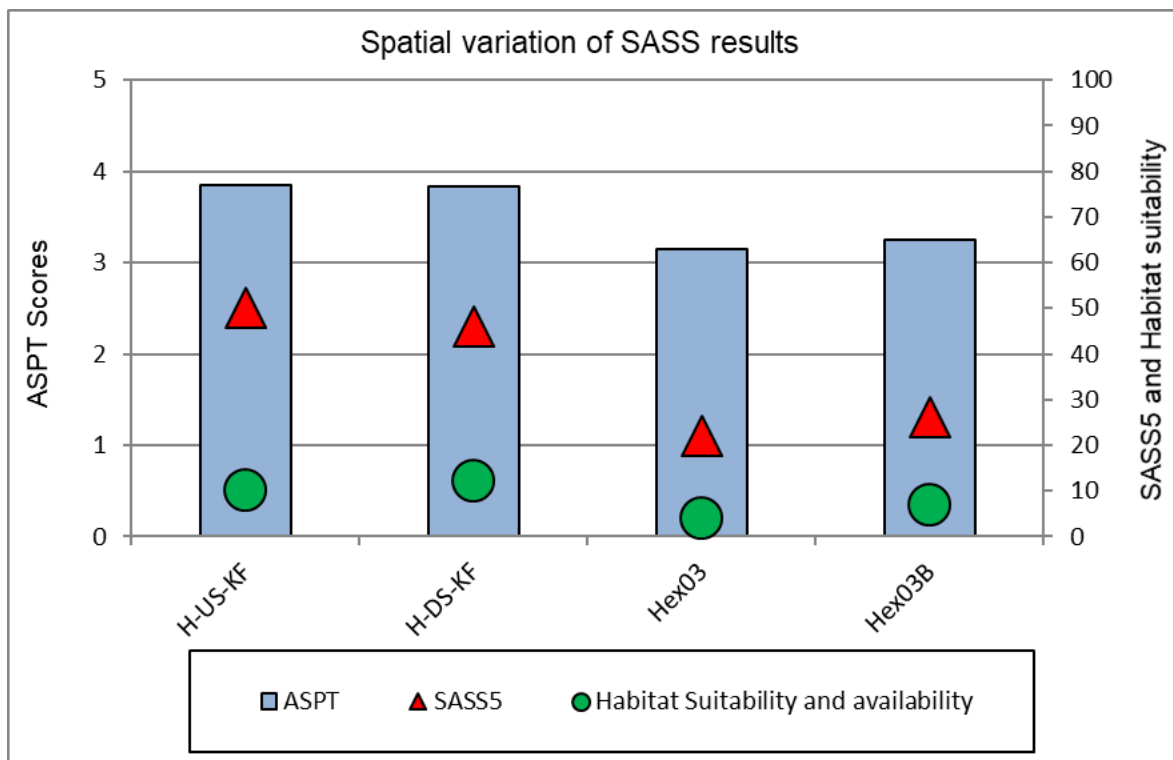


Figure 7: ASPT, SASS5 and total habitat suitability scores at biomonitoring sites during June 2019.

Biotic conditions, based on the total SASS5 scores and ASPT values, were stable to slightly improved from site Hex03 to Hex03-B (Table 7; Figure 7). This was at least partly habitat related as availability and suitability, and IHAS scores were better at the downstream site (Tables 6 and 7). None of the biotopes were directly comparable but all showed stable to improving scores, potentially indicating improved water quality towards the downstream site. *In-situ* water quality measures indicated considerable water quality improvements with a reduction in salinity and increase in dissolved oxygen levels, supporting the notion of improved water quality contributing to increased biotic integrity (see section 3.2). Comparisons between sites Hex03 and Hex03B were done to gauge the point-source effect, on the spatial integrity of the Hex River taking into consideration the Klipgatspruit. APPD is a potential contributor to pollution of the Klipgatspruit and continued monitoring (comparison of sites Hex03 and Hex03-B) will be essential to verify any possible impact and the severity thereof. The Klipgatspruit was dry at the time of sampling in June 2019 (although subsurface flow and impacts cannot be excluded), precluding water quality and toxicity testing, but did not appear to cause a deterioration in biotic integrity of the Hex River.



Plate 2: Indication of organic enrichment (algal proliferation) and solid waste disposal at site Hex03.

In conclusion, various sections of the Hex River within the study area show clear signs of reduced biotic integrity, based on macroinvertebrates. This was especially evident with the previous extended study area (now reduced due to Sibanye Stillwater sale and the complete scope no longer tasked to Clean Stream Biological Services). As such, a steady deterioration in biotic integrity in a downstream direction has consistently been recorded (Figure 8). However, the biotic integrity of the Hex River currently does improve on a spatial scale at certain sites and appears to be more stable within the recently adopted reduction of the study area (Figure 9).

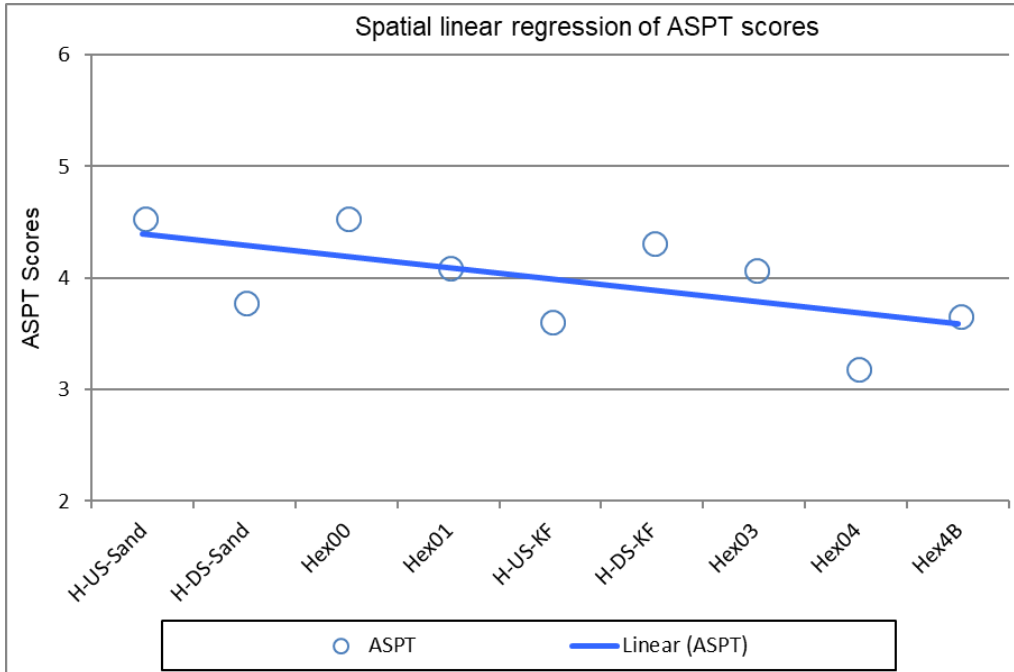


Figure 8: Linear regression of biotic integrity (as indicated by invertebrate ASPT scores) of the Hex River on a spatial scale (arranged sequentially in a downstream direction) during May 2018 (extended study area).

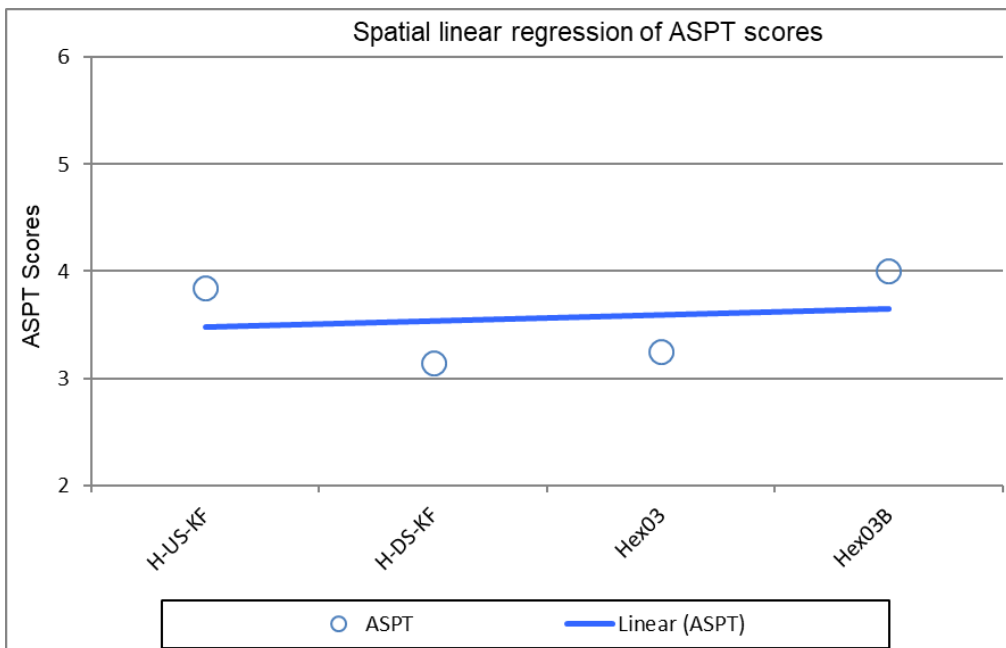


Figure 9: Linear regression of biotic integrity (as indicated by invertebrate ASPT scores) of the Hex River on a spatial scale (arranged sequentially in a downstream direction) during June 2019 (reduced study area).

Temporal (long- and medium-term) trends

All of the datasets collected since May 2002 were compared to evaluate long-term and medium-term temporal trends in the biotic condition of the Hex River (Figures 10 & 11). Linear regression of historic ASPT values were calculated and plotted in order to achieve this. For the purpose of this monitoring programme, temporal

trends are differentiated into long-term (more than four years) and medium-term (last 4 years) trends. The long-term trend gives a perspective on whether the biotic integrity (at the different sites) has improved or deteriorated since the inception of the monitoring programme. The medium-term trend confirms whether observed long-term trends are likely to continue or are in the process of being reversed.

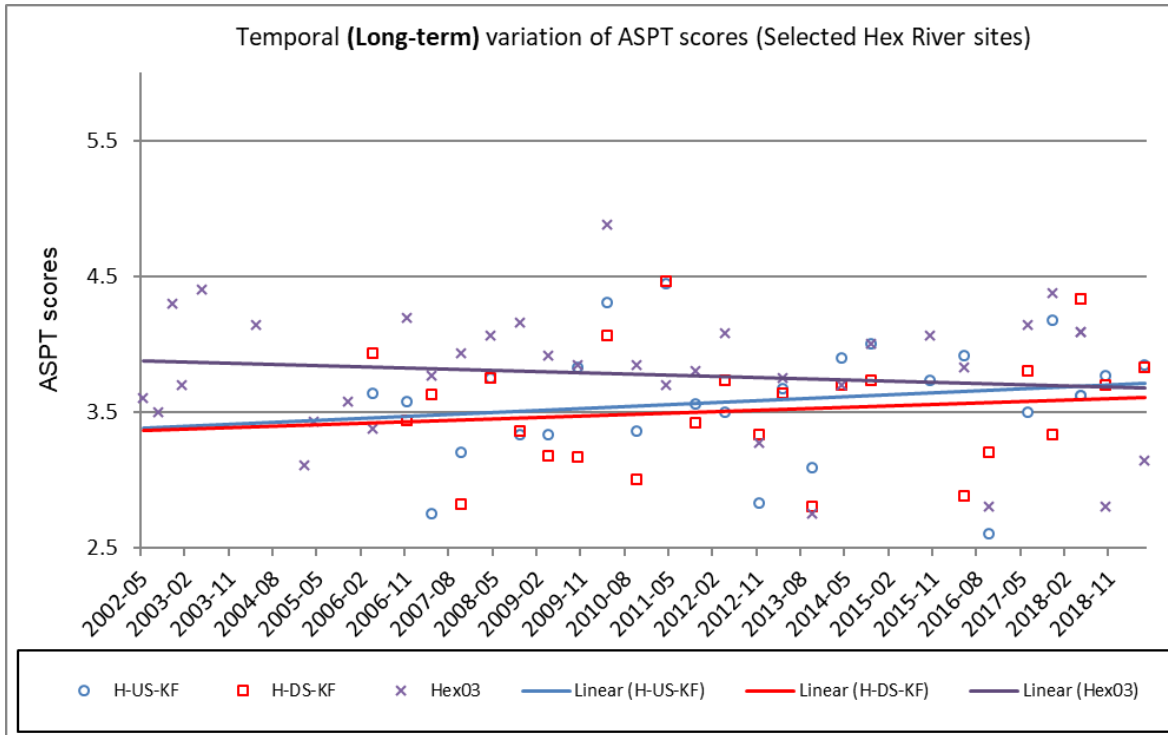


Figure 10: Long-term trends of biotic integrity in terms of macro-invertebrates at biomonitoring sites.

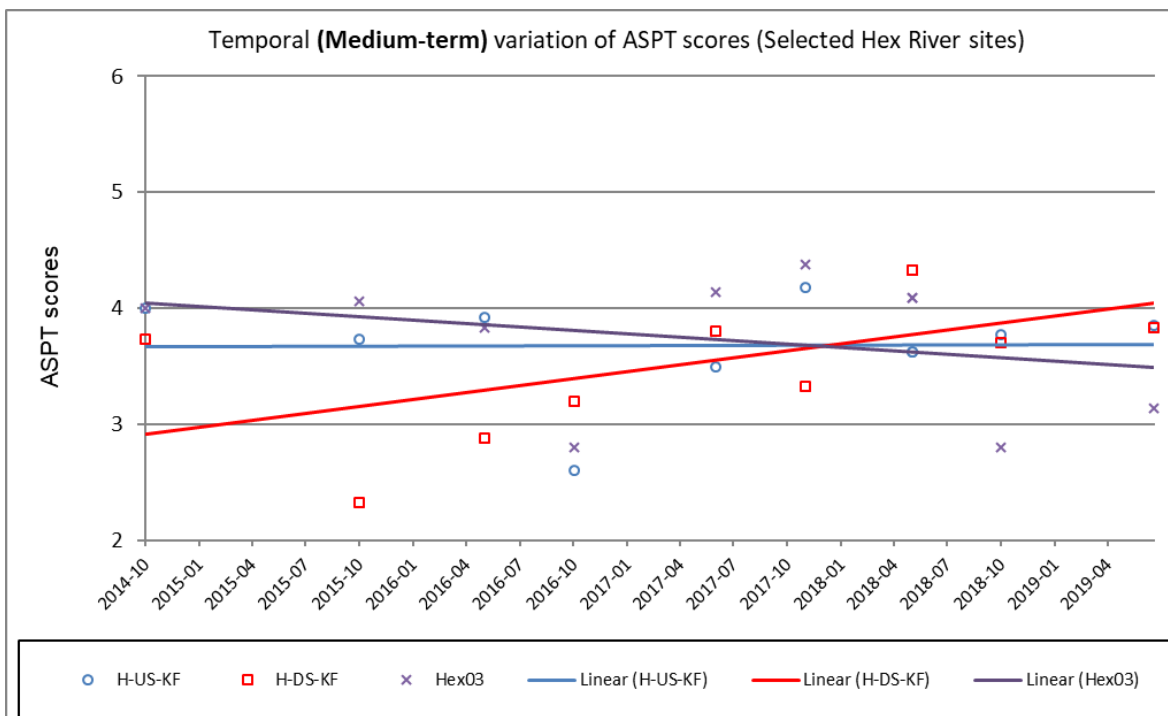


Figure 11: Medium-term trends of biotic integrity in terms of macro-invertebrates at biomonitoring sites.

Long-term trends indicated fair but stable (to slightly improving) biotic conditions at sites H-US-KF and H-DS-KF (Figure 10). However, long-term and medium-term trends at site Hex03 show a steady deterioration in biotic integrity (Figures 10 and 11). The recently observed organic pollution is almost certainly the cause, being **unrelated** to APPD activities.

Medium-term analyses confirm initially lower biotic conditions at site H-DS-KF (downstream of potential APPD impacts) but, encouragingly, biotic conditions at this site has improved at a faster rate than at the upstream site, with biotic integrity now being better at site H-DS-KF than at site H-US-KF (Figure 11). The inflow of the Klipfonteinspruit (and potential associated APPD impacts), therefore do not appear to have affected the macroinvertebrate-based biotic integrity of this reach of the Hex River over the medium to long term.

Continued monitoring will be essential to amass a database at the newly adopted downstream site (Hex03-B). This will serve to gauge the temporal effect of water users (including APPD) within the Klipgatspruit catchment, on the receiving environment (Hex River).

3.5 Fish Assessment

Fish sampling was scheduled for the present survey but, due to safety risks posed to samplers (hostile behaviour from a crowd in the vicinity), could not be performed and sampling will again be attempted during the next scheduled survey.

Fish sampling is only scheduled once per annum and was last performed during May 2018, based on the extended scope (prior to Sibanye Stillwater sale). The approach and study area will therefore change in future, taking into consideration the reduced scope of this specific study, as performed by Clean Stream Biological Services. The complete extract (report RPM-A-18) of the fish results, is again repeated below for reference value and the sake of comprehensiveness. It should be kept in mind that various sampled sites are no longer part of this scope of work (since October 2018).

The state and health of fish communities have been noted to give a reliable indication of short and long-term stress on aquatic systems. Fish communities possess various characteristics that render them important in the assessment of river health. They occupy positions throughout the aquatic food web, and are typically present in all but the most polluted of waters. Because fish often move over considerable distances, they have the potential to integrate diverse aspects of relatively large-scale habitats. Fish can therefore provide an integrated view of watershed conditions. Compared to other aquatic organisms, fish are furthermore relatively long-lived, and are therefore useful in providing a temporal dimension. They are also relatively easy to identify and after data is gathered, they can be released again. For the general public, fish are also the most well-known of aquatic organisms, and they are more likely to understand information about the condition of the fish community than about other taxa such as invertebrates. There are, however, some difficulties in using fish as biomonitoring indicators. Amongst these problems is the selective sampling attained by certain sampling equipment (for specific biotopes and for certain sizes and species of fish), the mobility of fish on spatial and temporal time scales, and the labour intensity of fish sampling.

Seven naturally occurring (native) fish species (*Barbus*⁹ *paludinosus*; *Barbus trimaculatus*; *Barbus unitaeniatus*; *Clarias gariepinus*; *Oreochromis mossambicus*; *Pseudocrenilabrus philander* and *Tilapia sparrmanii*) were sampled at the five sampling sites in the Hex River during the 2017 to 2018 period (Table 8). The diversity of observed fish species was lower than expected at all of the sampling sites, indicating

⁹ Recent literature (Yang *et al.*, 2015) recommend a name change of the genus '*Barbus*' to '*Enteromius*'. This was however contested and rejected by various authors (i.e. Schmidt and Bart, 2015) and requires further verification. Skelton (2016) supports the recommended name change and started implementing this in recent studies and literature.

lowered biotic integrity (when compared to natural expected conditions). Possible reasons for lowered species diversity are outlined in the paragraphs below, which deal with the Fish Assemblage Integrity Index (FAI) and Fish Response Assessment Index (FRAI) results.

The Fish Assemblage Integrity Index (FAI) and Fish Response Assessment Index (FRAI)

For the purpose of this study, a simplified version of the FAI was used (presence / absence) to enable comparisons between each site (spatial analyses), while the FRAI was used to determine the estimated biotic integrity, based on fish, of the entire Hex River reach under investigation which would provide a valuable tool to provide an overall status of the reach under investigation and to determine long-term (temporal) changes.

Table 8: Fish species expected and observed during the last two surveys.

Species	Native/Exotic	Sites										
		Hex00		Hex01		Hex03		Hex04		Hex4B		
		Exp	Obs	Exp	Obs	Exp	Obs	Exp	Obs	Exp	Obs	
<i>Amphillius uranoscopus</i>	Native											
<i>Enteromius</i> [#] <i>paludinosus</i>	Native											
<i>Enteromius</i> [#] <i>trimaculatus</i>	Native											
<i>Enteromius</i> [#] <i>unitaeniatus</i>	Native											
<i>Chiloglanis pretoriae</i>	Native											
<i>Clarias gariepinus</i>	Native											
<i>Cyprinus carpio</i> [*]	Exotic											
<i>Labeobarbus marequensis</i>	Native											
<i>Labeo cylindricus</i>	Native											
<i>Labeo molybdinus</i>	Native											
<i>Mesobola brevianalis</i>	Native											
<i>Oreochromis mossambicus</i>	Native											
<i>Pseudocrenilabrus philander</i>	Native											
<i>Tilapia sparrmanii</i>	Native											
No. of naturally occurring species expected/present		9	4	10	3	10	5	13	4	13	3	
% expected / observed		44		30		50		31		23		

Key: sampled previous survey, sampled this survey, sampled last two surveys

* Exotic species are by definition not expected to occur under natural conditions and therefore not taken into account for FAI calculations

Previous genus name: Barbus

Fish Assemblage Integrity Index (FAI)

Based on morphological characteristics and the limited number of sites, each sampling site was classified as a separate fish habitat segment. Therefore, the "frequency of occurrence of fish within segments" was omitted from FAI for separate monitoring sites. Comparison of relative FAI scores for different sites would firstly give a perspective on the relative condition of the fish community at different sites and secondly indicate the impact of various anthropogenic activities up- and downstream of the different sites. Scores should however be treated with circumspection because the *frequency of occurrence* criterion was not considered, and the FAI scores are therefore less accurate. The list of fish species expected to occur at the sites under investigation is based on information from Skelton (1993) and Le Roux & Steyn (1968), as well as experience from previous surveys (this biomonitoring programme as well as various other mining related biomonitoring programmes, research and Department of Water Affairs' reserve determination studies). The expected species list is also updated with the knowledge gained from this biomonitoring programme. The species intolerance ratings used in the calculation of the FAI were taken from Kleynhans (2002) and were based on specialisation of preferences towards habitat, food, flowing water and water quality.

The composition of the fish community and the relative FAIL (Fish Assemblage Integrity Index) are based on the last two surveys. This is done to increase the accuracy of the results and to avoid the incidental omission of a particular species at a particular site. Furthermore, fish generally take longer to react to stressors (compared with macro-invertebrates) and are therefore more applicable as an indicator over a period of time (as opposed to a snapshot at any given time).

The biotic integrity (as reflected by the fish assemblage integrity index) increased slightly from site Hex00 (23%) to Hex01 (27%) (Table 9 & Appendix tables; Figure 12). This is an indication that the biotic integrity (based on the fish communities) was not recently deteriorated due to by impacts in the area between these two sites. This is a similar trend as observed with the macro-invertebrate results, which indicated stable biotic conditions between these sites.

Table 9: Relative FAIL scores calculated at different sampling sites (2017 to 2018).

Locality	Relative FAIL (%)
Hex00	23
Hex01	27
Hex03	46
Hex04	22
Hex4B	22

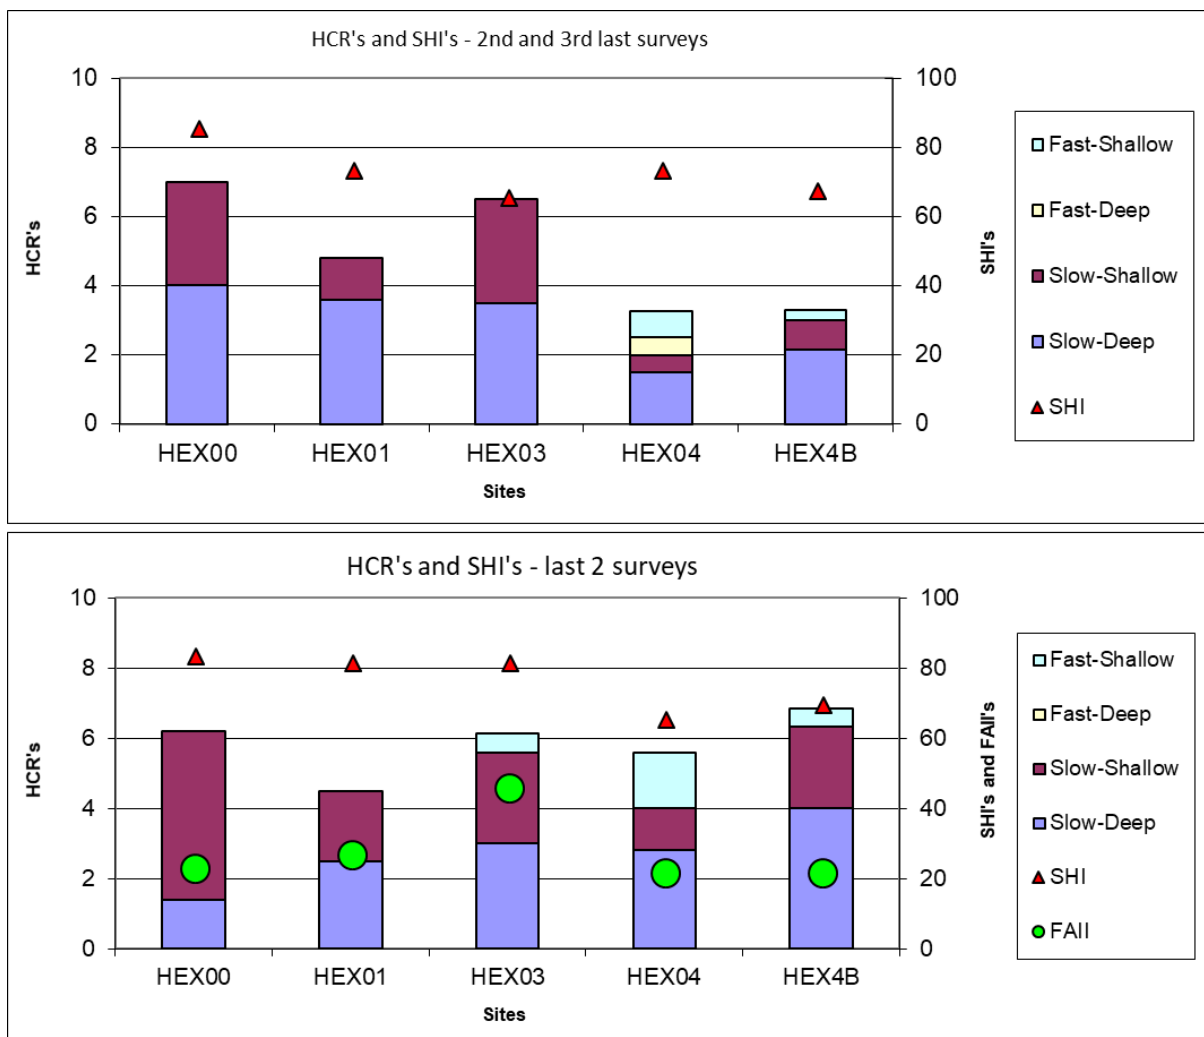


Figure 12: Relative FAIL scores, HCR's and SHI at the different biomonitoring sites.

A spatial improvement was observed from site Hex01 to Hex03, as shown by the FAIL scores increasing from 27% to 46% (Table 9; Figure 12). The spatial improvement was mainly attributed to the presence of *Enteromius trimaculatus* and *Enteromius unitaeniatus* at site Hex03. Both species are tolerant to moderately intolerant to water quality changes (Table 10) and their absence from site Hex01 is therefore not likely to be water quality related. Its absence from site Hex 00 during the 2017 to 2018 period is likely to be a response to lower habitat diversity and availability at this site. Based on these results, it appears that biotic integrity (based on fish) was probably not reduced by deteriorating water quality originating from the Klipfonteinspruit (possibly RPM-related) and/or from the sewage plant (non-RPM-related). This deduction is similar to the macro-invertebrate based deduction between these sites.

Table 10: The relative tolerance of each species towards changes in the environment.

SPECIES NAME	Common name	Trophic specialisation	Habitat specialisation	Flow dependance	Requirement for high water quality	Total intolerance ratings
<i>Amphilius uranoscopus</i>	Stargazer	4.7	4.9	4.8	4.8	4.8
<i>Chiloglanis pretoriae</i>	Shortspine suckermouth	4.4	4.8	4.8	4.5	4.6
<i>Labeo molybdinus</i>	Leaden labeo	3.3	3.0	3.3	3.2	3.2
<i>Labeo cylindricus</i>	Redeye labeo	3.3	3.0	3.1	3.1	3.1
<i>Labeobarbus marequensis</i>	Largescale yellowfish	2.4	2.8	3.2	2.1	2.6
<i>Mesobola brevianalis</i>	River sardine	3.1	2.2	1.1	2.8	2.3
<i>Enteromius trimaculatus</i>	Threespot barb	3.1	1.4	2.7	1.8	2.2
<i>Enteromius paludinosus</i>	Straightfin barb	1.6	1.4	2.3	1.8	1.8
<i>Enteromius unitaeniatus</i>	Longbeard barb	1.1	1.3	2.3	2.2	1.7
<i>Oreochromis mossambicus</i>	Mazambique tilapia	1.2	1.9	0.9	1.3	1.3
<i>Pseudocrenilabrus philander</i>	Southern mouthbrooder	1.3	1.4	1.0	1.4	1.3
<i>Tilapia sparrmanii</i>	Banded tilapia	1.6	1.4	0.9	1.4	1.3
<i>Clarias gariepinus</i>	Sharptooth catfish	1.0	1.2	1.7	1.0	1.2

Key:

Intolerance ratings are colour shaded on a scale from green to red, with green being least intolerant and red being most intolerant

Species are sorted in descending order from most intolerant (total intolerance rating) to least intolerant

1-2 = Tolerant 2-3 = Moderate tolerant 3-4 = Moderately intolerant 4-5 = Intolerant

As also observed previously, the FAIL scores were largely reduced from site Hex03 towards site Hex04 (Table 9). The potential impact of water quality on the biotic integrity of the Hex River (as measured by the FAIL at site Hex04) should therefore not be disregarded as both macro-invertebrates (during 2016 and 2018) and fish (last 4 years) are now indicating as such. Potential sources of reduced water quality between sites Hex03 and Hex04 include the Klipgatspruit and the Dorpspruit (see also previous discussions regarding potential Dorpspruit impacts).

The biotic integrity (based on fish) was similar between site Hex04 to site Hex4B (Table 9 & Appendix tables; Figure 12), being very poor at both sites. The same poor conditions (albeit spatially increased) was indicated by the macro-invertebrate assessment for these sites.

Fish Response Assessment Index (FRAI)

As mentioned earlier, the Fish Response Assessment Index was adopted to assist in the classification of the Ecological Status, based on fish, of the entire Hex River reach under investigation. The results are therefore pooled for all sites. The resulting classification is therefore not a reflection of RPM mining impacts, but rather a reflection of the overall cumulative impact/s derived from the catchment.

The section below shows the individual metric driver results (Velocity-Depth, Cover, Flow, Physico-chemical, Migration and Introduced species), as well as the overall FRAI categories and category descriptions for the Hex River (Table 11).

Table 11: Fish Response Assessment Index (FRAI) results for the Hex River reach (all sites) (2017/8 results).

METRIC GROUP	METRIC	*RATING (CHANGE)	METRIC GROUP WEIGHT (%)
VELOCITY-DEPTH CLASSES METRICS	Response of species with high to very high preference for FAST-DEEP conditions	-5	97
	Response of species with high to very high preference for FAST-SHALLOW conditions	-5	
	Response of species with high to very high preference for SLOW-DEEP conditions	-2.5	
	Response of species with high to very high preference for SLOW-SHALLOW conditions	-2	
COVER METRICS	Response of species with a very high to high preference for overhanging vegetation	-1.5	100
	Response of species with a very high to high preference for undercut banks and root wads	-0.5	
	Response of species with a high to very high preference for a particular substrate type	-5	
	Response of species with a high to very high preference for instream vegetation	-0.5	
	Response of species with a very high to high preference for the water column	-3	
FLOW DEPENDANCE METRICS	Response of species intolerant of no-flow conditions	-5	94
	Response of species moderately intolerant of no-flow conditions	-5	
	Response of species moderately tolerant of no-flow conditions	-2	
	Response of species tolerant of no-flow conditions	-1.5	
PHYSICO-CHEMICAL METRICS	Response of species intolerant of modified physico-chemical conditions	-5	64
	Response of species moderately intolerant of modified physico-chemical conditions	-5	
	Response of species moderately tolerant of modified physico-chemical conditions	-4	
	Response of species tolerant of modified physico-chemical conditions	-1	
MIGRATION METRICS	Response in terms of distribution/abundance of spp with catchment scale movements	0	61
	Response in terms of distribution/abundance of spp with requirement for movement between reaches or fish habitat segments	4	
	Response in terms of distribution/abundance of spp with requirement for movement within reach or fish habitat segment	2	
INTRODUCED SPECIES METRICS	The impact/potential impact of introduced competing/predaceous spp?	0	45
	How widespread (frequency of occurrence) are introduced competing/predaceous spp?	0	
	The impact/potential impact of introduced habitat modifying spp?	2	
	How widespread (frequency of occurrence) are habitat modifying spp?	1	
FRAI SCORE (%)		32.3	
FRAI CATEGORY		E	
FRAI CATEGORY DESCRIPTION		Seriously modified	

- Reduced flows and altered flooding regime of the river.
- Cover metrics: Seriously deterioration in substrate as cover, most probably associated with extensive algal growth (as described earlier in this report), flow modification (decreased riffle/rapid habitats) and sedimentation.
- Flow dependence metrics: Serious modification of fish species intolerant to moderately intolerant to no-flow conditions, again indicating on altered hydrological regime (altered flows and floods).
- Physico-chemical metrics: Seriously modified conditions indicated by fish species that are intolerant to moderately intolerant of modified water quality, indicating on seriously deteriorated water quality prevailing in this river reach.

- Migration metrics: Indicating seriously modified migratory impacts, associated with various physical and potentially also chemical migration barriers within this reach.
- Introduced species metrics: Slight impacts associated with the presence of the habitat modifying alien Common carp (*Cyprinus carpio*).

Table 12: Descriptive categories used to describe the present ecological status (PES) of biotic components (adapted from Kleynhans, 1999).

CATEGORY	BIOTIC INTEGRITY	DESCRIPTION OF GENERALLY EXPECTED CONDITIONS
A	Excellent	Unmodified, or approximates natural conditions closely. The biotic assemblages compares to that expected under natural, unperturbed conditions.
B	Good	Largely natural with few modifications. A change in community characteristics may have taken place but species richness and presence of intolerant species indicate little modifications. Most aspects of the biotic assemblage as expected under natural unperturbed conditions.
C	Fair	Moderately modified. A lower than expected species richness and presence of most intolerant species. Most of the characteristics of the biotic assemblages have been moderately modified from its naturally expected condition. Some impairment of health may be evident at the lower end of this class.
D	Poor	Largely modified. A clearly lower than expected species richness and absence or much lowered presence of intolerant and moderately intolerant species. Most characteristics of the biotic assemblages have been largely modified from its naturally expected condition. Impairment of health may become evident at the lower end of this class.
E	Very Poor	Seriously modified. A strikingly lower than expected species richness and general absence of intolerant and moderately tolerant species. Most of the characteristics of the biotic assemblages have been seriously modified from its naturally expected condition. Impairment of health may become very evident.
F	Critical	Critically modified. Extremely lowered species richness and an absence of intolerant and moderately tolerant species. Only intolerant species may be present with complete loss of species at the lower end of the class. Most of the characteristics of the biotic assemblages have been critically modified from its naturally expected conditions. Impairment of health generally very evident.

4 CONCLUSIONS AND RECOMMENDATIONS

The following conclusions are based on the aquatic macroinvertebrate assessments performed during June 2019. Reference is not made to fish-based conclusions since the new scope of work (study area) has invalidated spatial and temporal findings, which will be refined when fish assessments are once again performed (scheduled once per annum). Fish sampling was scheduled for the June 2019 survey, but could not be conducted due to safety risks and will again be attempted during the next scheduled survey.

The most important **spatial** conclusions are as follows:

- Biotic conditions, based on the total SASS5 and ASPT scores, **remained stable from site H-US-KF to site H-DS-KF** (in contrast to the downstream deterioration observed during the October 2018 survey). This is in line with most previous surveys when no spatial deterioration was observed. The most similar biotopes (GSM and Vegetation) showed contrasting results, and *in-situ* water quality measures indicated downstream improvement in dissolved oxygen levels, but deterioration in salinity. Overall the inflow from the Klipfonteinspruit did not appear to impact on the macroinvertebrate-based biotic integrity of the Hex River at the time of sampling.
- Biotic conditions, based on the total SASS5 scores and ASPT values, **deteriorated from site H-DS-KF to Hex03**. Lowered habitat availability and suitability at site Hex03 likely contributed to this deterioration, however comparison of the most similar biotope indicate that reduced water quality also played a role. Low dissolved oxygen levels measured at site Hex03 further supported reductions in water quality. It must be noted that organic enrichment and solid waste disposal appears extensively at this site and will likely affect biotic integrity if not mitigated. It is again noted that the reason for lowered dissolved oxygen levels are unlikely to be related to APPD activities because levels were within the guideline at site H-DS-KF and no further APPD activities take place towards site Hex03.
- Biotic conditions, based on the total SASS5 scores and ASPT values, **were stable to slightly improved from site Hex03 to Hex03-B**. Better habitat availability and suitability at Hex03B likely played a part, but *in-situ* measures also showed considerable improvement in water quality towards site Hex03B. None of the biotopes were directly comparable but all showed indicated downstream improvement. Site Hex03-B was included for the first time during the October 2018 survey. This was done to gauge the point-source effect, on the spatial integrity of the Hex River taking into consideration the Klipgatspruit. APPD is a potential contributor to pollution of the Klipgatspruit and continued monitoring (comparison of sites Hex03 and Hex03-B) will be essential to verify any possible impact and the severity thereof.

The most important **temporal (long- and medium-term)** conclusions regarding the biotic integrity of the Hex River are as follows:

- Long-term trends indicated **fair but stable (to slightly improving)** biotic conditions at sites H-US-KF and H-DS-KF, with site H-US-KF generally displaying slightly better conditions. Medium-term analyses confirm initially lower biotic conditions at site H-DS-KF (downstream of potential APPD impacts) but, encouragingly, **biotic conditions have improved** to such an extent that biotic integrity is now better at site H-DS-KF than at site H-US-KF. The inflow of the Klipfonteinspruit (and potential associated APPD impacts), therefore do not appear to have affected the macroinvertebrate-based biotic integrity of this reach of the Hex River over the medium to long term.
- Long- and medium-term trends at site Hex03 show a **steady deterioration** in biotic integrity. The recently observed organic pollution is almost certainly the cause, being **unrelated** to APPD activities.
- Continued monitoring will be essential to amass a database at the newly adopted downstream site (Hex03-B). This will serve to gauge the temporal effect of water users (including APPD) within the Klipgatspruit catchment, on the receiving environment (Hex River).

General conclusions and recommendations

In conclusion, it can be stated that various sections of the Hex River within the study area show clear signs of reduced biotic integrity, based on macroinvertebrates. This was especially evident with the previous extended study area (now reduced due to Sibanye Stillwater sale and the complete scope no longer tasked to Clean Stream Biological Services). As such, a steady deterioration in biotic integrity in a downstream direction has consistently been recorded. However, the biotic integrity of the Hex River currently does improve on a spatial scale at certain sites and appears to be more stable within the recently adopted reduction of the study area.

Future biomonitoring should be maintained on at least a biannual interval to gauge the trend of deterioration/improvement. This would facilitate the identification of possible impacts by APPD (and others) to this aquatic ecosystem. Early identification of impacts to the biota should prompt the identification of contaminants and the implementation of mitigation measures to reduce or prevent continued risk to the aquatic ecosystem.

It is strongly recommended that definitive toxicity testing be continued for the PCDs that regularly display toxicity levels of Class III or higher. Definitive toxicity testing will allow for the calculation of safe dilution ratios and will allow for the process of risk assessment. The risk assessment involves predicting the amount of a substrate that may enter the environment and comparing this with definitive toxicity results.

Calculated dilution ratios will be essential for environmental managers to predict whether the toxicity of polluted water will be negated if released or accidentally spilled into the receiving environment. Definitive testing will furthermore assist with scheduling planned licenced releases (*i.e.* whether water could be released during the dry season and, if not, whether sufficient dilution is likely to be achieved during the wet season/times of high river flow). All discharges should fall within the ambit of an approved water use licence, with biomonitoring and toxicity data being essential for the licensing process. In addition, increasing the frequency of testing of the pollution control facilities to at least twice a year should be considered. The confidence of results is relatively low if testing is only performed once a year, especially since toxicity hazards could conceivably change on a daily basis. More regular testing will therefore increase the confidence of results and lead to more informed management decisions.

It is recommended to continue including both site KF and KFD (in the Klipfonteinspruit) for toxicity testing (in addition to the Klipgatspruit; site KGT). The effect of different sources of pollution can then be distinguished more accurately.

5 REFERENCES

- ABOATOX Oy. 2012. BO1243-500 BioTox™ Kit. Instructions for use. Savikuja 2. FIN-21250, Masku Finland. www.aboatox.com
- BARBOUR MT and STRIBLING JB (1994) A technique for assessing stream habitat structure. Pp. 156-178, In: Proceedings of the conference "Riparian Ecosystems of the Humid U.S. Management, functions, and Values". National Association of Conservation Districts. Washington, DC
- DEPARTMENT OF WATER AFFAIRS AND FORESTRY. 1996. South African Water Quality Guidelines (second edition). Volume 6: Agricultural water use: Aquaculture.
- DEPARTMENT OF WATER AFFAIRS AND FORESTRY, 2003. The Management of Complex Industrial Waste Water Discharges. Introducing the Direct Estimation of Ecological Effect Potential (DEEEP) approach, a discussion document. Institute of Water Quality Studies, Pretoria.
- DICKENS C and GRAHAM M (2001) South African Scoring System (SASS) Version 5 Rapid Bioassessment Method for Rivers. River Health Programme Web Page.
- EUROPEAN Standard, 1998. "Water quality – Determination of the inhibitory effect of water samples on the light emission of *Vibrio fischeri* (Luminescent bacteria test) – Part 3 for the method using freeze-dried bacteria", EN ISO 11348-3. European Committee for Standardization, Brussels.
- KEMPSTER, P. L. HATTINGH, W. H. J. & VAN VLIET, H. R. 1982. Summarised water quality criteria. Technical report NR. Tr 108. Department of Environmental Affairs.
- KILIAN V. 1996. Fish Pathology (FHA): A biomonitoring procedure for rapid evaluation of fish health and condition. Report used during Field biosurveys and Integrated ecological assessment course, Institute of Water Quality Studies, DWAF.
- KLEYNHANS, C. J. 1997. *An exploratory investigation of the Instream Biological Integrity of the Crocodile River, Mpumalanga, as based on the Assessment of Fish Communities*. Draft Report, Department of Water Affairs and Forestry, Institute for Water Quality Studies. 61 pp.
- KLEYNHANS, C. J. 1997. *An exploratory investigation of the Instream Biological Integrity of the Crocodile River, Mpumalanga, as based on the Assessment of Fish Communities*. Draft Report, Department of Water Affairs and Forestry, Institute for Water Quality Studies. 61 pp.
- KLEYNHANS, C.J. 2002. Fish Intolerance ratings. Personal electronic communication of proceedings resulting from the national fish workshop held at the WRC during 2001.
- LE ROUX, P & STEYN, S. 1968. *Visse van Transvaal*. Kaap & Transvaal Drukkers Beperk, Kaapstad. 108pp.
- McMILLAN, P. H. 1998. *An Integrated Habitat Assessment System (IHAS v2), for the Rapid Biological Assessment of Rivers and Streams*. A CSIR research project. Number ENV-P-I 98132 for the Water Resources Management Programme. CSIR. ii + 44 pp.
- MICROBIOTEST INC. 2012. DAPHTOXKIT F™ MAGNA. Crustacean Toxicity Screening Test for freshwater. Standard Operational Procedure. Kleimoer 15, 9030 Mariakerke (Gent), Belgium. www.microbiotest.be.
- ODUM EP (1971). *Fundamentals of Ecology*. Third Edition. W. B. Saunders Co. London.
- PERSOONE G, BLAHOŠLAV M, BLINOVA I, TÖRÖKNE A, ZARINA T, MANUSADZIANAS L, NALECZ-JAWECKI G, TOFAN L, STEPANOVA L, TOTHOVA L, KOLAR B. A practical and user-friendly toxicity classification system with Microbiotests for natural waters and wastewaters (personal communication).
- ROUX DJ (1999). Incorporating technologies for the monitoring and assessment of biological indicators into a holistic resource-based water quality management approach- conceptual models and some case studies. Ph.D Thesis. Rand Afrikaans University, JHB, SA.
- SKELTON P. H., 1993. *A complete guide to freshwater fishes of Southern Africa*. Southern Book Publishers (Pty) Ltd., Halfway House. 388pp.
- THIRION, C. A.; MOCKE, A & WOEST, R. 1995. *Biological Monitoring of Streams and Rivers using SASS4: A User Manual*. Final Report, No. N 000/00/REQ/1195. Institute of Water Quality Studies, Department of Water Affairs and Forestry.
- UNITED STATES ENVIRONMENTAL PROTECTION AGENCY (US EPA), 1996. *Ecological effects test guidelines. Fish acute toxicity test – Freshwater and marine*. OPPTS 850.1075. Report number EPA-712-c-96-118.
- UNITED STATES ENVIRONMENTAL PROTECTION AGENCY (US EPA), 1993. *Method for measuring the acute toxicity of effluent and receiving waters to freshwater and marine organisms*. EPA/600/4-90/027F, 4th edition. Office of Research and Development, Washington.
- YANG L, SADO T, HIRT MV, PASCO-VEIL E, ARUNACHALAM M, Li J, WANG X, FREYHOF J, SAOTOH K, SIMINS AM, MIYA M, He S, MAYDEN RL. 2015. Phylogeny and polypoidy: Resolving the classification of cyprinine fishes (Teleostei: Cypriniformes). *Mol. Phylogenet. Evol.* 85, 97 – 116.

Appendix 1: Methodology applied during this biomonitoring assessment.

1. *In-situ* water quality

The following surface water quality variables were measured on site: pH, Conductivity, water temperature, dissolved oxygen and oxygen saturation (Hach HQ40d Multimeter; Serial Number: 130300086148).

2. Habitat assessment

An evaluation of habitat quality and availability to biota is critical to any assessment of ecological integrity and should be conducted at each site at the time of biological sampling. On site habitat assessments were conducted by using existing habitat evaluation indices.

2.1 Habitat condition

The United States Environment Protection Agency Habitat Assessment Index (HAI) index was used to determine the general physical habitat condition at each site. Habitat parameters used by this index in this assessment of habitat integrity include the following: Epifaunal substrate/Available cover, Pool substrate characteristics, Pool variability, Channel alteration, Sediment deposition, Channel sinuosity, Channel flow status, Bank vegetative protection, Bank stability and Riparian vegetative zone width. Each of the above mentioned criteria was assessed and according to its condition, rated in one of the following classes, namely: Optimal/Excellent, Sub optimal/Good, Marginal/Fair or Poor. For each criterion, a score was given within the selected class. The sum of these scores gives a final score for this Index, and can be used in comparison to other sites or, if possible, to the baseline or reference condition to indicate its physical integrity (Barbour *et al.*, 1999).

2.2 Fish Habitat Assessment

This assessment is aimed at the determination of the potential of a site to provide habitat for fish (Fish habitat cover ratings) and to identify the potential human impact on the fish habitat (Site fish habitat integrity) (Kleynhans, 1997).

Fish Habitat Cover Rating (HCR)

This approach was developed to assess habitats according to different attributes that are surmised to satisfy the habitat requirements of various fish species (Kleynhans, 1997). At each site, the following depth-flow (df) classes are identified, namely:

Slow (<0.3m/s), shallow (<0.5m) - Shallow pools and backwaters.

Slow, deep (>0.5m) - Deep pools and backwaters.

Fast (>0.3m/s), shallow - Riffles, rapids and runs.

Fast, deep - Usually rapids and runs.

The relative contribution of each of the above mentioned classes at a site was estimated and indicated as:

0 = Absent

1 = Rare (<5%)

2 = Sparse (5-25%)

3 = Moderate (25-75%)

4 = Extensive (>75%)

For each depth-flow class, the following cover features (cf), considered to provide fish with the necessary cover to utilise a particular flow and depth class, were investigated:

- Overhanging vegetation
- Undercut banks and root wads
- Stream substrate
- Aquatic macrophytes

The amount of cover present at each of these cover features (cf) was noted as:

0 = absent

1 = Rare/very poor (<5%)

2 = Sparse/poor (5-25%)

3 = Moderate/good (25-75%)

4 = Extensive/excellent (>75%)

The fish habitat cover rating (HCR) was calculated as follows:

- The contribution of each depth-flow class at the site was calculated ($df/\Sigma df$).

- For each depth-flow class, the fish cover features (cf) were summed (Σcf).

$HCR = df/\Sigma df \times \Sigma cf$.

Site fish habitat integrity (SHI)

This approach is based on the assessment of physical habitat disturbance and is directed towards the indirect qualitative evaluation of fish habitat integrity, compared to the expected natural condition (Kleynhans, 1997). The following impacts (cause for fish habitat integrity degradation) is investigated, namely: Water abstraction, flow modification, bed modification, channel modification, inundation, exotic macrophytes, solid waste disposal, indigenous vegetation removal, exotic vegetation encroachment and bank erosion. Estimation of the impact of each of these modifications on the fish habitat integrity at a site is scored as follows:

No Impact = 0

Small impact = 1

Moderate Impact = 3

Large impact = 5

3. Aquatic invertebrate assessment: South African Scoring System, Version 5.

Benthic macro-invertebrate communities of the selected sites were investigated according to the South African Scoring System, version 5 (SASS5) approach (Dickens & Graham, 2001). This method is based on the British Biological Monitoring Working Party (BMWP) method and has been adapted for South

African conditions by Dr. F. M. Chutter (Thirion *et al.*, 1995). The SASS method is a rapid, simple and cost effective method, which has progressed through four different upgrades/versions. The current upgrade is Version 5, which is specifically designed to comply with international accreditation protocols.

Sample Collection

An invertebrate net (30 x 30cm square with 1mm mesh netting) was used for the collection of the organisms. The available biotopes at each site were identified on arrival. Each of the biotopes was sampled by different methods explained later (samples should not be collected when the river is in flood).

The biotopes were combined into three different groups, which were sampled and assessed separately:

a) Stone (S) Biotopes:

Stones in current (SIC) or any solid object: *Movable stones of at least cobble size (3 cm diameter) to approximately 20 cm in diameter, within the fast and slow flowing sections of the river.* Kicksampling is used to collect organisms in this biotope. This is done by putting the net on the bottom of the river, just downstream of the stones to be kicked, in a position where the current will carry the dislodged organisms into the net. The stones are then kicked over and against each other to dislodge the invertebrates (kicksampling) for ± 2 minutes.

Stones out of current (SOOC): *Where the river is still, such as behind a sandbank or ridge of stones or in backwaters.* Collection is again done by the method of kicksampling, but in this case the net is swept across the area sampled to catch the dislodged biota. Approximately 1 m² is sampled in this way.

Bedrock or other solid substrate: Bedrock includes stones greater than 30cm, which are generally immovable, including large sheets of rock, waterfalls and chutes. The surfaces are scraped with a boot or hand and the dislodged organisms collected. Sampling effort is included under SIC and SOOC above.

b) Vegetation (VG) Biotopes:

Marginal vegetation (MV): *This is the overhanging grasses, bushes, twigs and reeds growing on the edge of the stream, often emergent, both in current (MvegIC) and out of current (MvegOOC).* Sampling is done by holding the net perpendicular to the vegetation (half in and half out of the water) and sweeping back and forth in the vegetation (± 2 m of vegetation).

Submerged vegetation (AQV): *This vegetation is totally submerged and includes Filamentous algae and the roots of floating aquatics such as water hyacinth.* Sampled by pushing the net (under the water) against and amongst the vegetation in an area of approximately one square meter.

c) Gravel, Sand and Mud (GSM) biotopes:

Sand: *This includes sandbanks within the river, small patches of sand in hollows at the side of the river or sand between the stones at the side of the river.* This biotope is sampled by stirring the substrate by shuffling or scraping of the feet, which is done for half a minute, whilst the net is continuously swept over the disturbed area.

Gravel: *Gravel typically consists of smaller stones (2-3 mm up to 3 cm).* Sampling similar to that of sand.

Mud: *It consists of very fine particles, usually as dark-collared sediment.* Mud usually settles to the bottom in still or slow flowing areas of the river. Sampling similar to that of sand.

d) Hand picking and visual observation:

Before and after disturbing the site, approximately 1 minute of "hand-picking" for specimens that may have been missed by the sampling procedures was carried out.

Sample preparation

The organisms sampled in each biotope group were identified and their relative abundance also noted on the SASS5 datasheet.

SASS-Habitat Assessment

A SASS-habitat assessment index, according to the habitats sampled, was performed due to the fact that changes in habitat can be responsible for changes in SASS5 scores. This was done by the application of Integrated Habitat Assessment System (IHAS version 2) (McMillan, 1998).

4. Fish Assemblage Integrity Index (FAIL) (Kleynhans, 1997)

Due to the difficulty of applying the generally used Index of Biotic Integrity (IBI) in rivers of South Africa, Kleynhans (1997) developed an alternative approach. The following procedures were used in the application of the FAIL:

Species tolerance ratings

The species intolerance ratings used in the calculation of the FAIL were taken from Kleynhans (2002). Four components are taken into account in estimating the intolerance of the relevant fish species, namely habitat preferences and specialisation (HS), food preference and specialisation (TS), requirements for flowing water during different life-stages (FW) and water quality requirements (WQ). Each of these aspects are scored for a species according to low requirement/specialisation (rating=1), moderate requirement/ specialisation (rating=3) and high requirement/specialisation (rating=5). The total intolerance (IT) of a fish species is estimated as follows:

$$IT = (HS+TS+FW+WQ)/4$$

Health

The percentage of fish with externally evident disease or other anomalies are used to score this metric. The following procedure is used to score the health of individual species:

Frequency of affected fish >5%, score = 1

Frequency of affected fish 2 - 5%, score = 3

Frequency of affected fish <2%, score = 5

The expected health for a species living under unperturbed conditions is assumed to be unimpaired and would score 5.

The FAIL is calculated as follows:

The *expected index score* [FAIL (exp.)] per segment:

$$FAIL (exp.) = \sum(T \times H)$$

where: T = Tolerance rating for individual species

H = Expected health rating for individual species.

The *observed index score* [FAIL (obs)] is calculated on a similar basis but is based on the information collected during the survey:

$$FAIL (obs) = \sum(T \times H)$$

The observed fish assemblage index score for a segment is expressed as a percentage of the expected total FAIL score to arrive at a relative FAIL rating:

$$FAIL (obs) / FAIL (exp.) \times 100$$

Fish Response Assessment Index (FRAI)

The determination and description of the present ecological status (PES) of the aquatic ecosystems in the study area, in terms of fish, was done according to the methodology described for River EcoClassification during Reserve Determinations (Kleynhans & Louw, 2008) using the Fish Response Assessment Index (FRAI) (Kleynhans, 2008). The results were then used to classify the present state of the fish assemblage into a specific descriptive category (A to F) (Table A1).

The FRAI is not in its conventional form designed for the application per site, but rather to a reach with a few sites. Metrics are therefore based on spatial frequency of occurrence of a species within the reach.

Table A1: Descriptive categories used to describe the present ecological status (PES) of biotic components (adapted from Kleynhans, 1999).

CATEGORY	BIOTIC INTEGRITY	DESCRIPTION OF GENERALLY EXPECTED CONDITIONS
A	Excellent	Unmodified, or approximates natural conditions closely. The biotic assemblages compares to that expected under natural, unperturbed conditions.
B	Good	Largely natural with few modifications. A change in community characteristics may have taken place but species richness and presence of intolerant species indicate little modifications. Most aspects of the biotic assemblage as expected under natural unperturbed conditions.
C	Fair	Moderately modified. A lower than expected species richness and presence of most intolerant species. Most of the characteristics of the biotic assemblages have been moderately modified from its naturally expected condition. Some impairment of health may be evident at the lower end of this class.
D	Poor	Largely modified. A clearly lower than expected species richness and absence or much lowered presence of intolerant and moderately intolerant species. Most characteristics of the biotic assemblages have been largely modified from its naturally expected condition. Impairment of health may become evident at the lower end of this class.
E	Very Poor	Seriously modified. A strikingly lower than expected species richness and general absence of intolerant and moderately tolerant species. Most of the characteristics of the biotic assemblages have been seriously modified from its naturally expected condition. Impairment of health may become very evident.
F	Critical	Critically modified. Extremely lowered species richness and an absence of intolerant and moderately tolerant species. Only intolerant species may be present with complete loss of species at the lower end of the class. Most of the characteristics of the biotic assemblages have been critically modified from its naturally expected conditions. Impairment of health generally very evident.

It must be emphasized that the A→F scale represents a continuum, and that the boundaries between categories are notional, artificially-defined points along the continuum (as presented below). This situation falls within the concept of a fuzzy boundary, where a particular entity may potentially have membership of both classes (Robertson *et al.* 2004). For practical purposes, these situations are referred to as boundary categories and are denoted as B/C, C/D, and so on.



Appendix 2: Site photos of biomonitoring sites (last two surveys)



Plate 1: Upstream view of H-US-KF (2019-06)



Plate 2: Downstream view of H-US-KF (2019-06)



Plate 3: Upstream view of H-US-KF (2018-10)



Plate 4: Downstream view of H-US-KF (2018-10)



Plate 5: Upstream view of KF (2019-06)

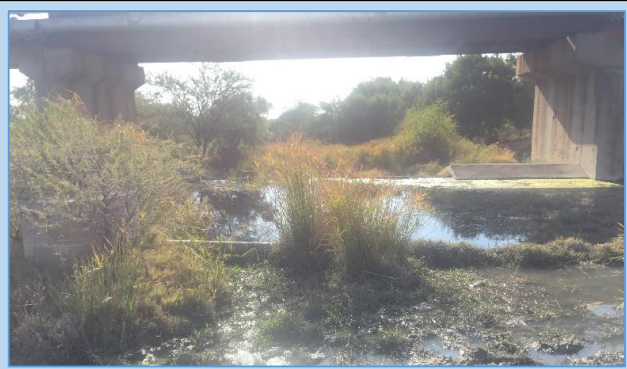


Plate 6: Downstream view KF (2019-06)



Plate 7: Upstream view of kF (2018-10)



Plate 8: Downstream view KF (2018-10)



Plate 9: Upstream view of KFD (2019-06)



Plate 10: Downstream view of KFD (2019-06)

Not included in survey

Plate 11: Upstream view of KFD (2018-10)

Plate 12: Downstream view of KFD (2018-10)



Plate 13: Upstream view of H-DS-KF (2019-06)

Photo not available

Plate 14: Downstream view of H-DS-KF (2019-06)



Plate 15: Upstream view of H-DS-KF (2018-10)



Plate 16: Downstream view of site H-DS-KF (2018-10)



Plate 16: Upstream view of Hex03 (2019-06)



Plate 17: Downstream view of Hex03 (2019-06)



Plate 18: Upstream view of Hex03 (2018-10)



Plate 19: Downstream view of site Hex03 (2018-10)



Plate 20: Upstream view of KGT (2019-06)



Plate 21: Downstream view of KGT (2019-06)



Plate 22: Upstream view of KGT (2018-10)



Plate 23: Downstream view of site KGT (2018-10)

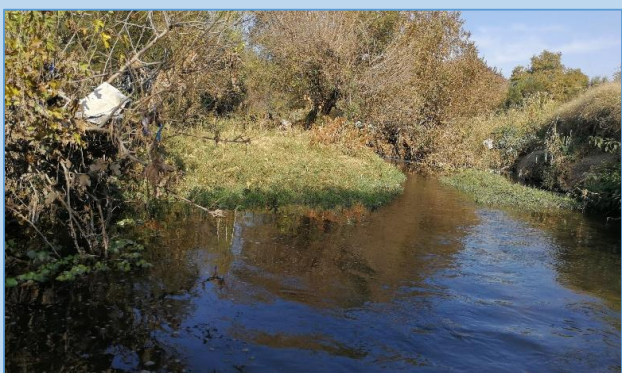


Plate 24: Upstream view of Hex03B (2019-06)



Plate 25: Downstream view of Hex03B (2019-06)



Plate 26: Upstream view of Hex03B (2018-10)



Plate 27: Downstream view of site Hex03B (2018-10)

Appendix 3: Tables

Table A1: SASS5 analysis including macro-invertebrate families sampled and habitat suitability scores calculated for the various sites (June 2019).

Taxon	Common name	H-US-KF				H-DS-KF				HEX03				HEX3B			
		Stones	Veg	GSM	Total	Stones	Veg	GSM	Total	Stones	Veg	GSM	Total	Stones	Veg	GSM	Total
Oligochaeta	Aquatic earthworms	B	A	A	B	A	-	-	A	-	-	A	A	-	-	-	-
Leeches	Leeches	A	B	B	B	-	-	1	1	-	B	-	B	-	-	-	-
Potamonautidae*	Crabs	1	-	-	1	-	-	-	-	-	-	-	-	-	-	1	1
Baetidae 1 sp.	Small minnow flies	A	-	-	A	-	-	-	-	-	-	-	-	-	-	-	-
Coenagrionidae	Damselflies	-	-	-	-	-	A	-	A	-	-	-	-	-	B	-	B
Belostomatidae*	Giant water bug	1	A	-	A	-	-	-	-	-	A	-	A	-	A	-	A
Corixidae*	Water boatmen	A	A	A	B	-	A	1	A	-	-	-	-	-	-	-	-
Gerridae*	Pond skater	-	-	-	-	-	A	-	A	-	-	-	-	-	-	-	-
Naucoridae*	Creeping water bugs	A	A	-	A	A	A	1	A	-	-	-	-	-	1	-	1
Nepidae*	Water scorpions	-	-	-	-	-	-	-	-	-	-	-	-	-	1	-	1
Veliidae*	Broad-shouldered water strid	-	1	-	1	-	-	-	-	-	-	-	-	-	-	-	-
Ecnomidae	Caseless caddisflies	-	-	-	-	A	-	-	A	-	-	-	-	-	-	-	-
Hydropsychidae 1sp.	Caseless caddisflies	-	-	-	-	B	-	-	B	-	-	-	-	-	-	-	-
Dytiscidae (adults*)	Predacious diving beetles	-	-	-	-	-	-	-	-	-	1	-	1	-	-	-	-
Hydraenidae (adults*)	Minute moss beetles	-	1	-	1	-	-	-	-	-	-	-	-	-	-	-	-
Ceratopogonidae	Biting midges	-	A	-	A	-	-	-	-	-	-	-	-	-	-	-	-
Chironomidae	Midges	B	B	-	B	B	A	A	B	-	A	B	B	C	B	C	C
Culicidae*	Mosquitoes	-	-	B	B	-	-	-	-	-	-	-	-	-	A	-	A
Muscidae	House flies	-	-	-	-	1	1	-	A	-	-	-	-	-	-	-	-
Simuliidae	Black flies	A	B	A	B	B	A	1	B	-	A	-	A	-	-	-	-
Physidae*	Pouch snails	-	-	-	-	-	A	-	A	-	A	-	A	-	B	A	B
Total SASS5 score		31	42	13	50	28	30	20	46	0	21	3	22	2	23	8	26
No. of families		9	10	5	13	7	8	5	12	0	6	2	7	1	7	3	8
ASPT		3.44	4.20	2.60	3.85	4.00	3.75	4.00	3.83	#DIV/0!	3.50	1.50	3.14	2.00	3.29	2.67	3.25
Total IHAS					71				65				44				62
IHAS - Habs sampled					42				36				19				33
IHAS - Stream condition					29				29				25				29
Suitability score		3	4	3	10	5	4	3	12	0	3	1	4	1	4	2	7

Key: High requirement for unmodified water quality Veg=Vegetation

Moderate requirement for unmodified water quality

Low requirement for unmodified water quality

Very low requirement for unmodified water quality

A = 1-10 individuals; B = 11-100 individuals; C = 101-1000 individuals; ASPT = Average score per taxon.

Table A3: Fish Assemblage Integrity Index (FAII) scores calculated for the various sampling sites (2017-2018).

SPECIES	Intolerance rating					Health rating					SCORE				
	HEX00	HEX01	HEX03	HEX04	HEX4B	HEX00	HEX01	HEX03	HEX04	HEX4B	HEX00	HEX01	HEX03	HEX04	HEX4B
<i>Amphillius uranoscopus</i>	4.8	4.8	4.8	4.8	4.8	5	5	5	5	5	24.0	24.0	24.0	24.0	24.0
<i>Barbus paludinosus</i>	1.8	1.8	1.8	1.8	1.8	5	5	5	5	5	9.0	9.0	9.0	9.0	9.0
<i>Barbus trimaculatus</i>	2.2	2.2	2.2	2.2	2.2	5	5	5	5	5	11.0	11.0	11.0	11.0	11.0
<i>Barbus unitaeniatus</i>		1.7	1.7	1.7	1.7		5	5	5	5	0.0	8.5	8.5	8.5	8.5
<i>Chiloglanis pretoriae</i>				4.6	4.6				5	5	0.0	0.0	0.0	23.0	23.0
<i>Clarias gariepinus</i>	1.2	1.2	1.2	1.2	1.2	5	5	5	5	5	6.0	6.0	6.0	6.0	6.0
<i>Labeobarbus marequensis</i>	2.6	2.6	2.6	2.6	2.6	5	5	5	5	5	13.0	13.0	13.0	13.0	13.0
<i>Labeo cylindricus</i>				3.1	3.1				5	5	0.0	0.0	0.0	15.5	15.5
<i>Labeo molybdinus</i>				3.2	3.2				5	5	0.0	0.0	0.0	16.0	16.0
<i>Mesobola brevianalis</i>	2.3	2.3	2.3	2.3	2.3	5	5	5	5	5	11.5	11.5	11.5	11.5	11.5
<i>Oreochromis mossambicus</i>	1.3	1.3	1.3	1.3	1.3	5	5	5	5	5	6.5	6.5	6.5	6.5	6.5
<i>Pseudocrenilabrus philander</i>	1.3	1.3	1.3	1.3	1.3	5	5	5	5	5	6.5	6.5	6.5	6.5	6.5
<i>Tilapia sparrmanii</i>	1.3	1.3	1.3	1.3	1.3	5	5	5	5	5	6.5	6.5	6.5	6.5	6.5
	Total Expected										94.0	102.5	102.5	157.0	157.0
<i>Amphillius uranoscopus</i>											0.0	0.0	0.0	0.0	0.0
<i>Barbus paludinosus</i>	1.8	1.8	1.8	1.8	1.8	5	5	5	5	5	9.0	9.0	9.0	9.0	9.0
<i>Barbus trimaculatus</i>			2.2					5			0.0	0.0	11.0	0.0	0.0
<i>Barbus unitaeniatus</i>			1.7					5			0.0	0.0	8.5	0.0	0.0
<i>Chiloglanis pretoriae</i>											0.0	0.0	0.0	0.0	0.0
<i>Clarias gariepinus</i>		1.2	1.2	1.2	1.2		5	5	5	5	0.0	6.0	6.0	6.0	6.0
<i>Labeobarbus marequensis</i>											0.0	0.0	0.0	0.0	0.0
<i>Labeo cylindricus</i>											0.0	0.0	0.0	0.0	0.0
<i>Labeo molybdinus</i>											0.0	0.0	0.0	0.0	0.0
<i>Mesobola brevianalis</i>											0.0	0.0	0.0	0.0	0.0
<i>Oreochromis mossambicus</i>			1.3	1.3	1.3			5	5	5	0.0	0.0	6.5	6.5	6.5
<i>Pseudocrenilabrus philander</i>	1.3	1.3	1.3	1.3	1.3	5	5	5	5	5	6.5	6.5	6.5	6.5	6.5
<i>Tilapia sparrmanii</i>	1.3	1.3		1.3	1.3	5	5		5	5	6.5	6.5	0.0	6.5	6.5
	Total Observed										22.0	28.0	47.5	34.5	34.5
	Relative FAII (%)										23	27	46	22	22

END OF REPORT

Addendum 1: Toxicity test report/s (Biotox Laboratory Services)

Submitted as separate PDF document/s

Appendix C

Toxicity test report

Anglo American Platinum – Rustenburg Operations
Annual integrated water monitoring report
Volume I



TOXICITY TEST REPORT

For:

Aquatico Scientific (Pty) Ltd

89 Regency Drive, Route 21 Corporate Park, Irene
PO Box 905008, Garsfontein, 0042

Survey:
2018-10

Report reference:
RPM-B-18_TOX

Revision:
0

Project:
Anglo Rustenburg (RPM)

Samples:
KF, KGT (Klipgat)

Tests performed by: Marrilize Bylsma (Technical Manager); Marlise Brown (Junior Analyst)
Inputs and results verified by: Marrilize Bylsma (Technical Manager)
Classification (DEEEP) performed by: Lizet Moore (Quality Manager)

Report authorized by: Technical Signatory

Lizet Moore

Marrilize Bylsma

27 November 2018
Report Date

Table of contents

1. Analyses requested and sample description	3
2. Methodology	3
2.1 Sampling and sample handling	3
2.2 Bio-toxicity assessments	3
2.3 Toxicity test results classification system	5
3. Results and discussion	6
3.1 2018-10 survey - water	6
4. Literature references	7
END OF REPORT	7

List of Tables

Table 1: Analyses requested and description for the different samples, including sampling and delivery dates.....	3
Table 2: Test results and risk classification for water samples during October 2018.....	6

1. Analyses requested and sample description

Table 1: Analyses requested and description for the different samples, including sampling and delivery dates.

Sample name	Sampling date	Sampled by	Delivery date	Delivered by	Additional comments (sample description or deviations)	Tests requested - Marked with X							
						Screening	Definitive	Water				Sediment	
								<i>Daphnia magna</i>	<i>Poecilia reticulata</i>	<i>Vibrio fischeri</i>	<i>Selenastrum capricornutum</i>	Phyto seeds	Ostracod
KF	2018/10/25	CSBS	2018/10/25	CSBS	None	X		X	X	X			
KGT	DRY												

Screening = 100% (undiluted) sample tested only

Definitive = Series of sample dilutions tested to enhance classification accuracy and to determine safe dilution

CSBS - Clean Stream Biological Services

2. Methodology

2.1 Sampling and sample handling

Refer to Technical Standard Operating procedures 05 & 06 (SOP05 & SOP06). These documents are available on request.

2.2 Bio-toxicity assessments

Acute (and short-chronic) toxicity testing (as applied for this assessment) is applied by exposing biota to water sources in order to determine the potential risk of such waters to the biota/biological integrity of the receiving water bodies. A risk category is determined based on the percentage of mortalities (or inhibition-stimulation) of the exposed biota. It is important to note that the hazard classification is based on the standardised battery of selected test biota and therefore represents the risk/hazard towards similar biota in the receiving aquatic environment. The **toxicity** hazard is therefore in terms of the aquatic biotic integrity and does in no way represent **toxicology** towards humans or other mammals.

Standard, internationally accepted methods and materials were applied in order to conduct acute and short-chronic toxicity testing and hazard classification based on 3 trophic levels (3 taxonomic groups, namely *Vibrio fischeri* (bacteria), *Daphnia magna* (crustaceans) and *Poecilia reticulata* (fish)) at each of the selected sites/samples, as specifically requested by Aquatico.

All tests were conducted in environmental controlled rooms using the following internationally standardized methods:

2.2.1 *Vibrio fischeri* bioluminescent test (A)

Standard method: SANS 11348-3:2013

Deviation from standard method: None

Test species: *Vibrio fischeri* (NRRL B-11177)

Exposure period: 15 and 30 minutes

Test sample volume: 500 µl

Number of replicates: 2

Measurement equipment: Luminoscan TL, Hygiene Monitoring System

Test endpoint: Screening test - % growth inhibition or stimulation relative to control; Definitive test - EC20 and EC50 - values

Statistical method used: Biotox software (from supplier)/Manual plotting – Normalized regression of relevant data points

Batch numbers/expiry dates: VF 180328 / 2020-10; RD 180328 / 2020-10; SD 171214 / 2020-7

The percentage uncertainty for this test is 11.07% at a coverage factor of 2.36 and a level of confidence of 95%

Correction factor (validity of test): 0.79 (valid if between 0,6 & 1,8)

2.2.2 *Daphnia magna* acute toxicity test (A)

Standard method: SANS 6341:2015
 Deviation from standard method: None
 Test species: *Daphnia magna*
 Test species age: Less than 24h old
 Exposure period: 24 and 48h
 Test sample volume: 25 ml
 Number of test organisms per well: 5
 Replicate number of wells per sample: 4
 Test temperature: 21 ± 2°C
 Test endpoint: Screening test - % mortality. Definitive test – LC₁₀ and LC₅₀ values
 Statistical method used: Trimmed Spearman Karber (TSK)/ Graphical interpolation calculated by linear regression of relevant data points, EXCEL spread sheet
 Batch numbers: Ehippia - 310518; ISO control medium – 080618
 The percentage uncertainty for this test is 17.61% at a coverage factor of 2.05 and a level of confidence of 95%
 Control mortality/immobility rate (validity of test): 0% (valid if ≤10%)

2.2.3 *Poecilia reticulata* acute toxicity test (A)

Standard method: OECD guide 203
 Deviation from standard method: None
 Test species: *Poecilia reticulata*
 Test species age: Less than 21 days
 Exposure period: 96h
 Test sample volume: 200 ml
 Number of test organisms per beaker: 6
 Replicate number beakers per sample: 2
 Test temperature: 21±2°C
 Test endpoint: Screening test - %mortality; Definitive test – LC₁₀ and LC₅₀ values
 Statistical method used: Trimmed Spearman Karber (TSK)/ Graphical interpolation calculated by linear regression of relevant data points, EXCEL spread sheet
 Batch numbers: Control medium –080618
 The percentage uncertainty for this test is 28.28% at a coverage factor of 2.36 and a level of confidence of 95%
 Test validation: 0% control mortalities (valid if ≤10%)

2.2.4 pH (A)

Biotox Method 05
 Test temperature: 25°C±3°C
 Instrument used: HQ440D multimeter
 The percentage uncertainty for this test is 0.01%(pH 2), 0.03% (pH 4), 0.01% (pH 7) and 0.10% (pH 10) at a coverage factor of 2 and a level of confidence of 95%
 Batch numbers of buffers: pH4 – A7214 pH7 – A7222 pH10 – A7234

2.2.5 *Electrical conductivity* (A)

Biotox Method 06
 Test temperature: 25°C±3°C
 Instrument used: HQ440D multimeter
 The percentage uncertainty for this test is 3.3% (1413µS/cm) and 0.23% (147µS/cm) at a coverage factor of 2 and a level of confidence of 95%
 Batch numbers of buffers: 1413µS/cm - A8109

Quality assurance

The following quality assurance information would be made available on request:

- In-house reference toxicant test data and control charts.
- Additional lot, batch numbers and raw test data.
- Participation in proficiency testing scheme (SABS, NLA)

2.3 Toxicity test results classification system

A risk/hazard category was determined by application of the DEEEP¹ DWA recommended protocols and hazard classification. This risk category equates to the level of acute/chronic risk posed by the selected potential pollution source (water sample).

After the determination of the percentage effect¹ (EP), obtained with each of the battery of toxicity tests performed, the sample is ranked into one of the following five classes, based on screening testing protocols:

Hazard classification system for screening tests

Class I	No acute/short-chronic environmental toxicity hazard - none of the tests shows a toxic effect
Class II	Slight acute/short-chronic environmental toxicity hazard - a statistically significant percentage effect is reached in at least one test, but the effect level is below 50%
Class III	Acute/short-chronic environmental toxicity hazard - the percentage effect level is reached or exceeded in at least one test, but the effect level is below 100%
Class IV	High acute/short-chronic environmental toxicity hazard - the 100% percentage effect is reached in at least one test
Class V	Very high acute/short-chronic environmental toxicity hazard - the 100% percentage effect is reached in all the tests

Weighting: Each sample is furthermore weighted according to its relative toxicity levels (out of 100%). Higher values indicate that more of the individual tests indicated toxicity within a specific class.

¹ DEEEP = Direct Estimation of Ecological Effect Potential. This is a battery of tests that can measure toxicity of complex mixtures based on a set of parameters stemming from the results of effects, even if all constituents are not known. A hazard class is determined based on the resulting parameters of the battery of tests

¹ EP (Percentage effect) = an effect measured either as a mortality rate or inhibition rate (depending on the type of test). A 10% effect is regarded as slight acute toxicity for *Daphnia* and *Poecilia*, while a 20% effect is regarded as slight short-chronic toxicity for *Vibrio*. A 50% effect is regarded as an acute/short-chronic toxicity for all of the tests (*Daphnia*, *Poecilia* and *Vibrio*)

3. Results and discussion

3.1 2018-10 survey - water

Refer to table 2 and table 3 below for individual test results and overall hazard classification of the different samples.

Table 2: Test results and risk classification for water samples during October 2018.

	Results	KF
w _o Water quality	pH @ 25°C (A)	7,7
	EC (Electrical conductivity) (mS/m) @ 25°C (A)	501,0
	Dissolved oxygen (mg/l) (NA)	7,6
V. fischeri (bacteria) (A)	Test started on yy/mm/dd	18/11/01
	%30min inhibition (-) / stimulation (+) (%)	44
	EC/LC20 (30 mins)	*
	EC/LC50 (30 mins)	*
	Toxicity unit (TU) / Description	no short-chronic hazard
D. magna (waterflea) (A)	Test started on yy/mm/dd	18/10/29
	%48hour mortality rate (-%)	0
	EC/LC10 (48hours)	*
	EC/LC50 (48hours)	*
	Toxicity unit (TU) / Description	no acute hazard
P. reticulata (guppy) (A)	Test started on yy/mm/dd	18/10/29
	%96hour mortality rate (-%)	0
	EC/LC10 (96hours)	*
	EC/LC50 (96hours)	*
	Toxicity unit (TU) / Description	no acute hazard
Overall classification - Hazard class***		Class I - No acute/short-chronic hazard
Weight (%)		0

Key:

* = EC/LC values not determined, definitive testing required if a hazard was observed and persists over subsequent sampling runs.

*** = The overall hazard classification takes into account the full battery of tests and is not based on a single test result. Note that the overall hazard classification is expressed as acute/chronic level of toxicity, due to the fact that the *S. capricornutum* (micro-algae) and the *V. fischeri* tests are regarded as short-chronic levels of toxicity tests and the overall classification therefore contains a degree of chronic toxicity assessment.

Weight (%) = relative toxicity levels (out of 100%), higher values indicate that more of the individual tests indicated toxicity within a specific class.

site/sample name shaded in purple = screening test

site/sample name shaded in orange = definitive test

4. Literature references

- ABOATOX Oy. 2012. BO1243-500 BioTox™ Kit. Instructions for use. Savikuja 2. FIN-21250, Masku Finland. www.aboatox.com
- DEPARTMENT OF WATER AFFAIRS AND FORESTRY, 2003. The Management of Complex Industrial Waste Water Discharges. Introducing the Direct Estimation of Ecological Effect Potential (DEEEP) approach, a discussion document. Institute of Water Quality Studies, Pretoria.
- EUROPEAN Standard, 1998. "Water quality – Determination of the inhibitory effect of water samples on the light emission of *Vibrio fischeri* (Luminescent bacteria test) – Part 3 for the method using freeze-dried bacteria", EN ISO 11348-3. European Committee for Standardization, Brussels.
- MICROBIOTEST INC. 2012. DAPHTOXKIT F™ MAGNA. Crustacean Toxicity Screening Test for freshwater. Standard Operational Procedure. Kleimoer 15, 9030 Mariakerke (Gent), Belgium. www.microbiotest.be.
- PERSOONE G, BLAHOSLAV M, BLINOVA I, TörökNE A, ZARINA T, MANUSADZIANAS L, NALECZ-JAWECKI G, TOFAN L, STEPANOVA L, TOTHOVA L, KOLAR B. A practical and user-friendly toxicity classification system with Microbiotests for natural waters and wastewaters (personal communication).
- UNITED STATES ENVIRONMENTAL PROTECTION AGENCY (US EPA), 1996. Ecological effects test guidelines. Fish acute toxicity test – Freshwater and marine. OPPTS 850.1075. Report number EPA-712-c-96-118.
- UNITED STATES ENVIRONMENTAL PROTECTION AGENCY (US EPA), 1993. Method for measuring the acute toxicity of effluent and receiving waters to freshwater and marine organisms. EPA/600/4-90/027F, 4th edition. Office of Research and Development, Washington.

END OF REPORT

TOXICITY TEST REPORT

For:
Aquatico Scientific Services

Route 21, Corporate Park, 89 Regency Drive, Irene
PO Box 905008, Garsfontein, 0042

Survey:
2019-05

Report reference:
RPM-A-19_TOX

Revision:
0

Project:
Anglo Rustenburg Process

Samples:
K035 (Klipgat Dam), K098 (ACP Dam),
K160 (RBMR Dam 3A), K161 (RBMR Dam 3B),
K162 (RBMR Triangular Dam), K209 (PMR Dam 2),
K210 (PMR Dam 3A), K211 (PMR Dam 3B),
K212 (PMR Dam 4+5), K213 (PMR Dam 6E)

Tests performed by: Marrilize Bylsma (Technical Manager), Marlise Brown (Senior Analyst)
Inputs and results verified by: Marrilize Bylsma (Technical Manager), Marlise Brown (Senior Analyst)
Classification (DEEEP) performed by: Marrilize Bylsma (Technical Manager)

Report authorized by: Technical Signatory

Lizet Moore

Marrilize Bylsma

12 June 2019
Report Date

Table of contents

1. Analyses requested and sample description		3
2. Methodology		3
2.1 Sampling and sample handling		3
2.2 Bio-toxicity assessments		3
2.3 Toxicity test results classification system		6
3. Results and discussion		7
3.1 2019-05 survey - water		7
4. Literature references		8
END OF REPORT		8

List of Tables

Table 1:	Analyses requested and description for the different samples, including sampling and delivery dates.....	3
Table 2:	Test results and risk classification for water samples during May 2019.	7

1. Analyses requested and sample description

Table 1: Analyses requested and description for the different samples, including sampling and delivery dates.

Sample nameB2:015	Sampling date	Sampled by	Delivery date	Delivered by	Additional comments (sample description or deviations)	Tests requested - Marked with X								
						Screening	Definitive	Water					Sediment	
								<i>Daphnia magna</i>	<i>Poecilia reticulata</i>	<i>Allivibrio fischeri</i>	<i>Selenastrum capricornutum</i>	Phyto seeds	Ostracod	
K035(Klipgat Dam)	2019/05/23	Aquatico	2019/05/24	Aquatico	None		X	X	X	X				
K098 (ACP Dam)	2019/05/23	Aquatico	2019/05/24	Aquatico	None		X	X	X	X				
K160 (RBMR Dam3A)	2019/05/23	Aquatico	2019/05/24	Aquatico	None		X	X	X	X				
K161 (RBMR Dam 3B)	2019/05/23	Aquatico	2019/05/24	Aquatico	None		X	X	X	X				
K162 (RBMR Triangular Dam)	2019/05/23	Aquatico	2019/05/24	Aquatico	None		X	X	X	X				
K209 (PMR Dam2)	2019/05/23	Aquatico	2019/05/24	Aquatico	None		X	X	X	X				
K210 (PMR Dam 3A)	2019/05/23	Aquatico	2019/05/24	Aquatico	None		X	X	X	X				
K211 (PMR Dam 3B)	2019/05/23	Aquatico	2019/05/24	Aquatico	None		X	X	X	X				
K212 (PMR Dam 4+5)	2019/05/23	Aquatico	2019/05/24	Aquatico	None		X	X	X	X				
K213 (PMR Dam 6E)	2019/05/23	Aquatico	2019/05/24	Aquatico	None		X	X	X	X				

2. Methodology

2.1 Sampling and sample handling

Refer to Technical Standard Operating procedures 05 & 06 (SOP05 & SOP06). These documents are available on request.

2.2 Bio-toxicity assessments

Acute (and short-chronic) toxicity testing (as applied for this assessment) is applied by exposing biota to water sources in order to determine the potential risk of such waters to the biota/biological integrity of the receiving water bodies. A risk category is determined based on the percentage of mortalities (or inhibition-stimulation) of the exposed biota. It is important to note that the hazard classification is based on the standardised battery of selected test biota and therefore represents the risk/hazard towards similar biota in the receiving aquatic environment. The **toxicity** hazard is therefore in terms of the aquatic biotic integrity and does in no way represent **toxicology** towards humans or other mammals.

Standard, internationally accepted methods and materials were applied in order to conduct acute and short-chronic toxicity testing and hazard classification based on 3 trophic levels (3 taxonomic groups, namely *Allivibrio fischeri* (bacteria), *Daphnia magna* (crustaceans) and *Poecilia reticulata* (fish)) at each of the selected sites/samples specifically requested by Aquatico.

All tests were conducted in environmental controlled rooms using the following internationally standardized methods:

2.2.1 *Allivibrio fischeri* bioluminescent test (A)

Standard method: SANS 11348-3:2013

Deviation from standard method: None

Exposure period: 15 and 30 minutes

Test sample volume: 500 µl

Number of replicates: 2

Measurement equipment: Luminoscan TL, Hygiene Monitoring System

Test endpoint: Screening test - % growth inhibition or stimulation relative to control; Definitive test - EC20 and EC50 - values

Statistical method used: Biotox software (from supplier)/Manual plotting – Normalized regression of relevant data points

Batch numbers/expiry dates: VF 181212 / 2021-04; RD 181212 / 2021-04; SD 181212 / 2021-01

The percentage uncertainty for this test is 11.07% at a coverage factor of 2.36 and a level of confidence of 95%

Correction factor (validity of test): 1.3/1.6/1.2/1.1/1.5/0.9/1.7 (valid if between 0,6 & 1,8)

2.2.2 *Daphnia magna* acute toxicity test (A)

Standard method: SANS 6341:2015

Deviation from standard method: None

Test species: *Daphnia magna*

Test species age: Less than 24h old

Exposure period: 24 and 48h

Test sample volume: 25 ml

Number of test organisms per well: 5

Replicate number of wells per sample: 4

Test temperature: 21 ± 2°C

Test endpoint: Screening test - % mortality. Definitive test – LC₁₀ and LC₅₀ values

Statistical method used: Trimmed Spearman Karber (TSK)/ Graphical interpolation calculated by linear regression of relevant data points, EXCEL spread sheet

Batch numbers: Ehippia - 131218; ISO control medium – 080119

The percentage uncertainty for this test is 17.61% at a coverage factor of 2.05 and a level of confidence of 95%

Control mortality/immobility rate (validity of test): 0% (valid if ≤10%)

2.2.3 *Poecilia reticulata* acute toxicity test (A)

Standard method: OECD guide 203

Deviation from standard method: None

Test species: *Poecilia reticulata*

Test species age: Less than 21 days

Exposure period: 96h

Test sample volume: 200 ml

Number of test organisms per beaker: 6

Replicate number beakers per sample: 2

Test temperature: 21±2°C

Test endpoint: Screening test - %mortality; Definitive test – LC₁₀ and LC₅₀ values

Statistical method used: Trimmed Spearman Karber (TSK)/ Graphical interpolation calculated by linear regression of relevant data points, EXCEL spread sheet

Batch numbers: Control medium –080119

The percentage uncertainty for this test is 28.28% at a coverage factor of 2.36 and a level of confidence of 95%

Test validation: 0% control mortalities (valid if ≤10%)

2.2.4 pH (A)

Biotox Method 05

Test temperature: 25°C±3°C

Instrument used: HQ440D multimeter

The percentage uncertainty for this test is 0.01% (pH 2), 0.03% (pH 4), 0.01% (pH 7) and 0.10% (pH 10) at a coverage factor of 2 and a level of confidence of 95%

Batch numbers of buffers: pH4 – A6124

pH7 – A8087

pH10 – A8317

2.2.5 Electrical conductivity (A)

Biotox Method 06

Test temperature: 25°C±3°C

Instrument used: HQ440D multimeter

The percentage uncertainty for this test is 3.3% (1413µS/cm) and 0.23% (147µS/cm) at a coverage factor of 2 and a level of confidence of 95%

Batch numbers of buffers: 1413µS/cm - A8275

Quality assurance

The following quality assurance information would be made available on request:

- In-house reference toxicant test data and control charts.
- Additional lot, batch numbers and raw test data.
- Participation in proficiency testing scheme (SABS, NLA)

2.3 Toxicity test results classification system

A risk/hazard category was determined by application of the DEEEP¹ DWA recommended protocols and is broadly based on the hazard classification system of Persoone *et.al.* (2003). This risk category equates to the level of acute/chronic risk posed by the selected potential pollution source (water sample).

After the determination of the percentage effect¹ (EP), obtained with each of the battery of toxicity tests performed, the sample is ranked into one of the following five classes, based on definitive testing protocols:

Hazard classification system for definitive tests

Class I	No acute/short-chronic environmental toxicity hazard - none of the tests shows a toxic effect (i.e. an effect value significantly higher than that in the control)
Class II	Slight acute/short-chronic environmental toxicity hazard - the percentage effect observed in at least one toxicity test is significantly higher than in the control, but the effect level is below 50% (TU is <1)
Class III	Acute/short-chronic environmental toxicity hazard - the L(E)C50 is reached or exceeded in at least one test, but in the 10 fold dilution of the sample the effect level is less than 50% ($1 \leq TU \leq 9,99$)
Class IV	High acute/short-chronic environmental toxicity hazard - the L(E)C50 is reached in the 10 fold dilution for at least one test, but not in the 100 fold dilution ($10 \leq TU \leq 99,99$)
Class V	Very high acute/short-chronic environmental toxicity hazard - the L(E)C50 is reached in the 100 fold dilution for at least one test (TU is ≥ 100)

Note:
The samples are classified into one of the above five classes on the basis of the highest toxicity unit (TU) found in the battery of toxicity definitive tests performed

Weighting: Each sample is furthermore weighted according to its relative toxicity levels (out of 100%). Higher values indicate that more of the individual tests indicated toxicity within a specific class.

¹ DEEEP = Direct Estimation of Ecological Effect Potential. This is a battery of tests that can measure toxicity of complex mixtures based on a set of parameters stemming from the results of effects, even if all constituents are not known. A hazard class is determined based on the resulting parameters of the battery of tests

¹ EP (Percentage effect) = an effect measured either as a mortality rate or inhibition rate (depending on the type of test). A >10% effect is regarded as slight acute toxicity for *Daphnia* and *Poecilia*, while a >20% effect is regarded as slight short-chronic toxicity for *Allivibrio*. A 50% effect is regarded as an acute/short-chronic toxicity for all of the tests (*Daphnia*, *Poecilia* and *Allivibrio*)

3. Results and discussion

3.1 2019-05 survey - water

Refer to table 2 below for individual test results and overall hazard classification of the different samples.

Table 2: Test results and risk classification for water samples during May 2019.

Results		K035 (Klipgat Dam)	K098 (ACP Dam)	K160 (RBMR Dam 3A)	K161 (RBMR Dam 3B)	K162 (RBMR Triangular Dam)	K209 (PMR Dam 2)	K210 (PMR Dam 3A)	K211 (PMR Dam 3B)	K212 (PMR Dam 4+5)	K213 (PMR Dam 6E)
Water quality	pH @ 25°C (A)	7.3	2.7	3.2	5.2	10.5	1.2	9.8	9.4	5.5	5.6
	EC (Electrical conductivity) (mS/m) @ 25°C (A)	539.0	186.9	6340.0	3880.0	6090.0	10650.0	42.4	63.7	18940.0	24000.0
	Dissolved oxygen (mg/l) (NA)	9.4	7.5	7.4	7.5	7.3	7.6	8.6	7.8	7.6	7.5
<i>A. fischeri</i> (bacteria) (A)	Test started on yy/mm/dd	19/05/29	19/05/29	19/05/29	19/05/29	19/05/30	19/05/30	19/06/05	19/06/05	19/06/05	19/06/06
	%30min inhibition (-) / stimulation (+) (%)	55	-100	-100	-100	-100	-100	-97	-31	-100	-100
	EC/LC20 (30 mins)	n.r	2	n.c	n.c	n.c	2	n.c	36	89	n.c
	EC/LC50 (30 mins)	n.r	9	n.c	0.5	3	n.c	45	n.r.	4	3
	Toxicity unit (TU) / Description	<1	11.8	>100	25.6	29.5	>100	2.2	<1	27.1	30.6
<i>D. magna</i> (waterflea) (A)	Test started on yy/mm/dd	19/05/27	19/05/27	19/05/27	19/05/27	19/05/27	19/05/27	19/05/27	19/05/27	19/05/27	19/05/27
	%48hour mortality rate (-%)	-5	-100	-100	-100	-100	-100	-5	0	-100	-100
	EC/LC10 (48hours)	n.r	10	n.c	n.c	n.c	2	n.c	n.r	n.c	n.c
	EC/LC50 (48hours)	n.r	19	n.c	n.c	8	0.3	n.r	n.r	4	3
	Toxicity unit (TU) / Description	<1	5.4	>100	>100	12.9	>100	<1	<1	28.0	32.5
<i>P. reticulata</i> (guppy) (A)	Test started on yy/mm/dd	19/05/30	19/05/30	19/05/30	19/05/30	19/05/30	19/05/30	19/05/30	19/05/30	19/05/30	19/05/30
	%96hour mortality rate (-%)	0	-100	-100	-100	-100	-100	-25	0	-100	-100
	EC/LC10 (96hours)	n.r	12	n.c	n.c	10	2	70	n.r	5	2
	EC/LC50 (96hours)	n.r	18	n.c	0.3	17	6	n.r.	n.r	7	6
	Toxicity unit (TU) / Description	<1	5.7	>100	>100	5.9	18.2	<1	<1	14.3	18.2
Estimated safe dilution factor (%) [for definitive testing only]	None required	2	<1	<1	2	<1	36	89	<1	<1	
Overall classification - Hazard class***	Class I - No acute/short-chronic hazard	Class IV - High acute/short-chronic hazard	Class V - Very high acute/short-chronic hazard	Class V - Very high acute/short-chronic hazard	Class IV - High acute/short-chronic hazard	Class V - Very high acute/short-chronic hazard	Class III - Acute/short-chronic hazard	Class II - Slight short-chronic hazard	Class IV - High acute/short-chronic hazard	Class IV - High acute/short-chronic hazard	
Weight (%)	0	78	100	100	89	100	67	33	100	100	

Key:
 % = for definitive testing, only the 100% concentration (undiluted) sample mortality/inhibition/stimulation is reflected by this summary table. The dilution series results are considered for EC/LC values and Toxicity unit determinations
 n.r. = not relevant, i.e. the 100% concentration caused less than 10/20/50% (effective concentration) mortalities or inhibition
 n.c. = not calculable, although the 100% concentration led to more than 10/20/50% mortalities/inhibition, the 10/20/50% mortality/inhibition rate was exceeded throughout the test
 *** = The overall hazard classification takes into account the full battery of tests and is not based on a single test result. Note that the overall hazard classification is expressed as acute/short-chronic level of toxicity, due to the fact that the *A. fischeri* test is regarded as short-chronic level of toxicity test and the overall classification therefore contains a degree of short-chronic toxicity assessment.
 Weight (%) = relative toxicity levels (out of 100%), higher values indicate that more of the individual tests indicated toxicity within a specific class
 site/sample name shaded in purple = screening test
 site/sample name shaded in orange = definitive test

Sample **K035 (Klipgat Dam)** showed “no acute/short-chronic environmental toxicity hazard” (Class I). Sample **K211 (PMR Dam 3B)** showed a “slight short-chronic environmental toxicity hazard” (Class II) based on the 31% bacterial light emission inhibition effect noted during testing (highest toxicity unit <1). Sample **K210 (PMR Dam 3A)** showed an “acute/short-chronic environmental toxicity hazard” (Class III) based on the highest toxicity unit (2.2) calculated on a bacterial level of testing. Samples **K098 (ACP Dam)**, **K162 (RBMR Triangular Dam)**, **K212 (PMR Dam 4+5)** and **K213 (PMR Dam 6E)** showed a “high acute/short-chronic environmental toxicity hazard” (Class IV) based on the 100% effect reached in at least one test for each of the samples with toxicity units ranging from 5.4 - >100. Samples **K160 (RBMR Dam 3A)**, **K161 (RBMR Dam 3B)** and **K209 (PMR Dam 2)** showed a “very high acute/short-chronic environmental toxicity hazard” (Class V) based on the toxicity units >100 calculated for these samples during testing at all 3 trophic levels. It should also be noted that the toxicity effects noted for K160 was so severe, that neither the LC/EC50 or the LC10/EC20 values could be calculated (thus the toxicity effect could not be diluted out up to a very low dilution concentration (0.195% of the original sample) . Refer to section 2.3 for details on hazard classification.

Very low safe dilution factors (<1) were calculated for samples K160, K161, K209, K212 and K213 and therefore water from these facilities should not be allowed to reach the natural environment. Safe dilution factors ranging between 2% and 89% were calculated for K035, K162, K210 and K211 (e.g. 2 parts of K098 water diluted with 98 parts ‘unpolluted’ water should be sufficient to negate toxicity effects at these trophic levels should these waters reach the natural environment).

IMPORTANT: Although sample K035(Klipgat Dam) was classified as Class I using the normal range of dilutions at a macro-invertebrate level, for dilutions 100% to 1% (dilutions from original sample) a normal decreasing toxicity effect trend was noted (resulting in the Class I classification). However from a 0.1% dilution level, significant mortalities was noted at this level of testing (100%). It is suggested that the facility investigates probable causes e.g. nano-materials affecting organisms more severely at lower concentrations. This can also be achieved by performing toxicity investigation evaluations (TIE). Even though K098 (ACP Dam) showed mortalities from the highest concentration (100% effect) and also following a normal decreasing trend up to 1% dilution (50% effect), the same significant increasing mortality effect was noted as for sample K035 (Klipgat Dam) at the 0.1% dilution level.

4. Literature references

DEPARTMENT OF WATER AFFAIRS AND FORESTRY, 2003. The Management of Complex Industrial Waste Water Discharges. Introducing the Direct Estimation of Ecological Effect Potential (DEEEP) approach, a discussion document. Institute of Water Quality Studies, Pretoria.

OECD GUIDELINE FOR TESTING OF CHEMICALS (1992). Fish Acute toxicity test.

PERSOONE G, BLAHOSLAV M, BLINOVA I, TÖRÖKNE A, ZARINA T, MANUSADZIANAS L, NALECZ-JAWECKI G, TOFAN L, STEPANOVA L, TOTHOVA L, KOLAR B (2003). A practical and user-friendly toxicity classification system with Microbiotests for natural waters and wastewaters (personal communication).

SOUTH AFRICAN NATIONAL STANDARD, 2015. “Water quality – Determination of the inhibition of the mobility of *Daphnia magna* Straus (*Cladocera*, *Crustacea*) – Acute toxicity test.

SOUTH AFRICAN NATIONAL STANDARD, 2013. “Water quality – Determination of the inhibitory effect of water samples on the light emission of *Vibrio fischeri* (Luminescent bacteria test). Part 3: Method using freeze-dried bacteria

END OF REPORT

TOXICITY TEST REPORT

For:

Aquatico Scientific (Pty) Ltd

89 Regency Drive, Route 21 Corporate Park, Irene
PO Box 905008, Garsfontein, 0042

Survey:
2019-06

Report reference:
RPM-B-19_TOX

Revision:
0

Project:
Anglo Platinum Process Division (RPM)

Samples:
KF, KFD, KGT

Tests performed by: Marlise Brown (Senior Analyst), Praise Manyenga (Junior Analyst)
Inputs and results verified by: Marrilize Bylsma (Technical Manager), Marlise Brown (Senior Analyst)
Classification (DEEEP) performed by: Marrilize Bylsma (Technical Manager)

Report authorized by: Technical Signatory

Lizet Moore

Marrilize Bylsma

08 July 2019
Report Date

Table of contents

1. Analyses requested and sample description		3
2. Methodology		3
2.1 Sampling and sample handling		3
2.2 Bio-toxicity assessments		3
2.3 Toxicity test results classification system		5
3. Results and discussion		6
3.1 2019-06 survey - water		6
4. Literature references		7
END OF REPORT		7

List of Tables

Table 1:	Analyses requested and description for the different samples, including sampling and delivery dates.....	3
Table 2:	Test results and risk classification for water samples during June 2019.	6

1. Analyses requested and sample description

Table 1: Analyses requested and description for the different samples, including sampling and delivery dates.

Sample name	Sampling date	Sampled by	Delivery date	Delivered by	Additional comments (sample description or deviations)	Tests requested - Marked with X							
						Screening	Definitive	Water				Sediment	
								<i>Daphnia magna</i>	<i>Poecilia reticulata</i>	<i>Allivibrio fischeri</i>	<i>Selenastrum capricornutum</i>	Phyto seeds	Ostracod
KF	2019/06/18	CSBS	2019/06/20	CSBS	None	X		X	X	X			
KFD	2019/06/18	CSBS	2019/06/20	CSBS	None	X		X	X	X			
KGT	DRY												

Key:

Screening = 100% (undiluted) sample tested only

Definitive = Series of sample dilutions tested to enhance classification accuracy and to determine safe dilution

2. Methodology

2.1 Sampling and sample handling

Samples were analysed as received from the Client. Refer to QM7.3/SOP-09.

2.2 Bio-toxicity assessments

Acute (and short-chronic) toxicity testing (as applied for this assessment) is applied by exposing biota to water sources in order to determine the potential risk of such waters to the biota/biological integrity of the receiving water bodies. A risk category is determined based on the percentage of mortalities (or inhibition-stimulation) of the exposed biota. It is important to note that the hazard classification is based on the standardised battery of selected test biota and therefore represents the risk/hazard towards similar biota in the receiving aquatic environment. The **toxicity** hazard is therefore in terms of the aquatic biotic integrity and does in no way represent **toxicology** towards humans or other mammals.

Standard, internationally accepted methods and materials were applied in order to conduct acute and short-chronic toxicity testing and hazard classification based on 3 trophic levels (3 taxonomic groups, namely *Allivibrio fischeri* (bacteria), *Daphnia magna* (crustaceans) and *Poecilia reticulata* (fish)) at each of the selected sites/samples as specifically requested by Clean Stream.

All tests were conducted in environmental controlled rooms using the following internationally standardized methods:

2.2.1 *Allivibrio fischeri* bioluminescent test (A)

Standard method: SANS 11348-3:2013

Deviation from standard method: None

Exposure period: 15 and 30 minutes

Test sample volume: 500 µl

Number of replicates: 2

Measurement equipment: Luminoscan TL, Hygiene Monitoring System

Test endpoint: Screening test - % growth inhibition or stimulation relative to control; Definitive test - EC20 and EC50 - values

Statistical method used: Biotox software (from supplier)/Manual plotting – Normalized regression of relevant data points

Batch numbers/expiry dates: VF 181212 / 2021-04; RD 181212 / 2021-04; SD 181212 / 2021-01

The percentage uncertainty for this test is 11.07% at a coverage factor of 2.36 and a level of confidence of 95%

Correction factor (validity of test): 1.1 (valid if between 0,6 & 1,8)

2.2.2 *Daphnia magna* acute toxicity test (A)

Standard method: SANS 6341:2015
 Deviation from standard method: None
 Test species: *Daphnia magna*
 Test species age: Less than 24h old
 Exposure period: 24 and 48h
 Test sample volume: 25 ml
 Number of test organisms per well: 5
 Replicate number of wells per sample: 4
 Test temperature: 21 ± 2°C
 Test endpoint: Screening test - % mortality. Definitive test – LC₁₀ and LC₅₀ values
 Statistical method used: Trimmed Spearman Karber (TSK)/ Graphical interpolation calculated by linear regression of relevant data points, EXCEL spread sheet
 Batch numbers: Ehippia - 280219; ISO control medium – 070319
 The percentage uncertainty for this test is 17.61% at a coverage factor of 2.05 and a level of confidence of 95%
 Control mortality/immobility rate (validity of test): 5% (valid if ≤10%)

2.2.3 *Poecilia reticulata* acute toxicity test (A)

Standard method: OECD guide 203
 Deviation from standard method: None
 Test species: *Poecilia reticulata*
 Test species age: Less than 21 days
 Exposure period: 96h
 Test sample volume: 200 ml
 Number of test organisms per beaker: 6
 Replicate number beakers per sample: 2
 Test temperature: 21±2°C
 Test endpoint: Screening test - %mortality; Definitive test – LC₁₀ and LC₅₀ values
 Statistical method used: Trimmed Spearman Karber (TSK)/ Graphical interpolation calculated by linear regression of relevant data points, EXCEL spread sheet
 Batch numbers: Control medium –070319
 The percentage uncertainty for this test is 28.28% at a coverage factor of 2.36 and a level of confidence of 95%
 Test validation: 0% control mortalities (valid if ≤10%)

2.2.4 pH (A)

Biotox Method 05
 Test temperature: 25°C±3°C
 Instrument used: HQ440D multimeter
 The percentage uncertainty for this test is 0.01%(pH 2), 0.03% (pH 4), 0.01% (pH 7) and 0.10% (pH 10) at a coverage factor of 2 and a level of confidence of 95%
 Batch numbers of buffers: pH4 – A6124 pH7 – A8219A pH10 – A8150

2.2.5 *Electrical conductivity* (A)

Biotox Method 06
 Test temperature: 25°C±3°C
 Instrument used: HQ440D multimeter
 The percentage uncertainty for this test is 3.3% (1413µS/cm) and 0.23% (147µS/cm) at a coverage factor of 2 and a level of confidence of 95%
 Batch numbers of buffers: 1413µS/cm - A8261

Quality assurance

The following quality assurance information would be made available on request:

- In-house reference toxicant test data and control charts.
- Additional lot, batch numbers and raw test data.
- Participation in proficiency testing scheme (SABS, NLA)

2.3 Toxicity test results classification system

A risk/hazard category was determined by application of the DEEEP¹ DWA recommended protocols and is broadly based on the hazard classification system of Persoone *et.al.* (2003). This risk category equates to the level of acute/chronic risk posed by the selected potential pollution source (water sample).

After the determination of the percentage effect¹ (EP), obtained with each of the battery of toxicity tests performed, the sample is ranked into one of the following five classes, based on screening testing protocols:

Hazard classification system for screening tests

Class I	No acute/short-chronic environmental toxicity hazard - none of the tests shows a toxic effect (i.e. an effect value significantly higher than that in the control)
Class II	Slight acute/short-chronic environmental toxicity hazard - a statistically significant (P<0,05) percentage effect is reached in at least one test, but the effect level is below 50%
Class III	Acute/short-chronic environmental toxicity hazard - the percentage effect level is reached or exceeded in at least one test, but the effect level is 50-99%
Class IV	High acute/short-chronic environmental toxicity hazard - the 100% percentage effect is reached in at least one test
Class V	Very high acute/short-chronic environmental toxicity hazard - the 100% percentage effect is reached in all the tests

Weighting: Each sample is furthermore weighted according to its relative toxicity levels (out of 100%). Higher values indicate that more of the individual tests indicated toxicity within a specific class.

¹ DEEEP = Direct Estimation of Ecological Effect Potential. This is a battery of tests that can measure toxicity of complex mixtures based on a set of parameters stemming from the results of effects, even if all constituents are not known. A hazard class is determined based on the resulting parameters of the battery of tests

¹ EP (Percentage effect) = an effect measured either as a mortality rate or inhibition rate (depending on the type of test). A >10% effect is regarded as slight acute toxicity for *Daphnia* and *Poecilia*, while a >20% effect is regarded as slight short-chronic toxicity for *Allivibrio*. A 50% effect is regarded as an acute/short-chronic toxicity for all of the tests (*Daphnia*, *Poecilia* and *Allivibrio*)

3. Results and discussion

3.1 2019-06 survey - water

Refer to table 2 below for individual test results and overall hazard classification of the different samples.

Table 2: Test results and risk classification for water samples during June 2019.

	Results	KF	KFD
w ₀ Water quality	pH @ 25°C (A)	8.4	8.4
	EC (Electrical conductivity) (mS/m) @ 25°C (A)	565.0	765.0
	Dissolved oxygen (mg/l) (NA)	7.8	8.1
A. fischeri (bacteria) (A)	Test started on yy/mm/dd	19/06/28	19/06/28
	%30min inhibition (-) / stimulation (+) (%)	21	33
	EC/LC20 (30 mins)	*	*
	EC/LC50 (30 mins)	*	*
	Toxicity unit (TU) / Description	no short-chronic hazard	no short-chronic hazard
D. magna (waterflea) (A)	Test started on yy/mm/dd	19/07/01	19/07/01
	%48hour mortality rate (-%)	-5	0
	EC/LC10 (48hours)	*	*
	EC/LC50 (48hours)	*	*
	Toxicity unit (TU) / Description	no acute hazard	no acute hazard
P. reticulata (guppy) (A)	Test started on yy/mm/dd	19/06/24	19/06/24
	%96hour mortality rate (-%)	0	0
	EC/LC10 (96hours)	*	*
	EC/LC50 (96hours)	*	*
	Toxicity unit (TU) / Description	no acute hazard	no acute hazard
Overall classification - Hazard class***	Class I - No acute/short-chronic hazard	Class I - No acute/short-chronic hazard	
Weight (%)	0	0	

Key:

* = EC/LC values not determined, definitive testing required if a hazard was observed and persists over subsequent sampling runs
 *** = The overall hazard classification takes into account the full battery of tests and is not based on a single test result. Note that the overall hazard classification is expressed as acute/short-chronic level of toxicity, due to the fact that the *A. fischeri* test is regarded as a short-chronic level of toxicity test and the overall classification therefore contains a degree of short-chronic toxicity assessment.
Weight (%) = relative toxicity levels (out of 100%), higher values indicate that more of the individual tests indicated toxicity within a specific class
 site/sample name shaded in purple = screening test
 site/sample name shaded in orange = definitive test

Samples **KF** and **KFD** showed “no acute/short-chronic environmental toxicity hazard” (Class I).

4. Literature references

DEPARTMENT OF WATER AFFAIRS AND FORESTRY, 2003. The Management of Complex Industrial Waste Water Discharges. Introducing the Direct Estimation of Ecological Effect Potential (DEEEP) approach, a discussion document. Institute of Water Quality Studies, Pretoria.

OECD GUIDELINE FOR TESTING OF CHEMICALS (1992). Fish Acute toxicity test.

PERSOONE G, BLAHOSLAV M, BLINOVA I, TÖRÖKNE A, ZARINA T, MANUSADZIANAS L, NALECZ-JAWECKI G, TOFAN L, STEPANOVA L, TOTHOVA L, KOLAR B (2003). A practical and user-friendly toxicity classification system with Microbiotests for natural waters and wastewaters (personal communication).

SOUTH AFRICAN NATIONAL STANDARD, 2015. "Water quality – Determination of the inhibition of the mobility of *Daphnia magna* Straus (*Cladocera*, *Crustacea*) – Acute toxicity test.

SOUTH AFRICAN NATIONAL STANDARD, 2013. "Water quality – Determination of the inhibitory effect of water samples on the light emission of *Vibrio fischeri* (Luminescent bacteria test). Part 3: Method using freeze-dried bacteria

END OF REPORT