COMPARATIVE VISUAL IMPACT ASSESSMENT FOR THE ENVIRONMENTAL AUTHORISATION (EA) EXTENSION APPLICATION FOR THE 100 MW LOERIESFONTEIN 3 PHOTOVOLTAIC (PV) SOLAR ENERGY FACILITY (SEF), NEAR LOERIESFONTEIN, NORTHERN CAPE - DFFE REFERENCE NUMBER: 12/12/20/2321/2/1



PREPARED BY: Nuleaf Planning and Environmental (Pty) Ltd

PREPARED FOR: NALA Environmental Consulting Firm

> DATE: January 2023



TABLE OF CONTENTS

DOCU	MENT CONTROL	ii
DECLA	ARATION	iii
LIST O	F TABLES	iv
LIST O	F MAPS	iv
LIST O	F FIGURES	iv
1. B	ACKGROUND	1
2. S	COPE OF WORK	2
3. IN	ITRODUCTION	3
3.1.	QUALIFICATION AND EXPERIENCE OF THE PROFESSIONAL TEAM	3
3.2.	LEGAL FRAMEWORK	
3.3.	INFORMATION BASE	3
3.4.	ASSUMPTIONS AND LIMITATIONS	
3.5.	LEVEL OF CONFIDENCE	
	ETHODOLOGY	
5. S	TATUS OF THE AFFECTED ENVIRONMENT	5
5.1.	INITIAL ASSESSMENT - STATUS OF THE ENVIRONMENT (2012)	
5.2.	CURscreeningRENT ASSESSMENT - STATUS OF THE ENVIRONMENT (2023)	
5.3.	COMPARATIVE ASSESSMENT – CHANGES TO STATUS OF THE ENVIRONMENT BETWE 13	
6. V	ISUAL IMPACT ASSESSMENT	13
6.1.	POTENTIAL VISUAL EXPOSURE - 2012	13
6.2.	POTENTIAL VISUAL EXPOSURE - 2023	14
6.3.	IMPACT RATINGS - 2012	
6.4.	IMPACT RATINGS - 2023	17
6.5.	SUMMARY OF THE IMPACT RATINGS FINDINGS	21
7. P	OTENTIAL CUMULATIVE VISUAL EXPOSURE	
7.1.	CUMULATIVE IMPACTS - GENERAL	21
7.2.	CUMULATIVE IMPACTS - 2012	
7.3.	CUMULATIVE IMPACTS - 2023	
7.4.		
	ITIGATIONS	
9. C	ONCLUSION AND RECOMMENDATIONS	25
10.	REFERENCES	



DOCUMENT CONTROL

Report Name:	Comparative Visual Impact Assessment for the Environmental				
	Authorisation (EA) Extension Application for the 100 MW Loeriesfontein 3				
	Photovoltaic (PV) Solar Energy Facility (SEF), Near Loeriesfontein,				
	Northern Cape - DFFE Reference Number: 12/12/20/2321/2/1				
VIA Specialists:	Nuleaf Planning and Environmental (Pty) Ltd				
-	8A Trevor Street, Murrayfield, Pretoria, 0184				
	Contact Person:				
	Peter Velcich				
	Tel: 082 442 0220				
	Email: peter@nuleafsa.co.za				
Report compiled by:	Contact Person:				
Report complica by:	Tosca de Villiers				
	Tel: 072 478 8856				
	Email: tosca@nuleafsa.co.za				
	Email: <u>tosca@nuleaisa.co.za</u> Expertise:				
	MLARCH				
	EAPASA Reg no: 2019/1582				
	SACLAP Reg. no: 20421				
Reviewer:	Contact Person:				
	Bryony van Niekerk				
	Tel: 074 818 9788				
	Email: <u>bryony@nuleafsa.co.za</u>				
	Expertise:				
	BSc Hons. EMA				
	EAPASA Reg no: 2019/655				
GIS Consultant:	LOGIS				
	531A Witogie Street, Die Wilgers, Pretoria				
	Contact Person:				
	Lourens du Plessis				
	Tel: 082 922 9019				
	Email: lourens@logis.co.za				
	Expertise:				
	GPr GISc				
	SAGC Reg no: GPr GISc 0147.				
EAP:	Nala Environmental Consulting Firm				
·	Contact Person:				
	Arlene Singh				
	Tel: 084 277 7074				
	Email: arlene@veersgroupcom				
Report date:					
	13 January 2023				
Report number:	01				



DECLARATION

I, **Tosca de Villiers**, as an independent consultant compiled this Visual Impact Assessment and declare that it correctly reflects the findings made at the time of the report's compilation. I further declare that I, act as an independent consultant in terms of the following:

- Do not have any financial interest in the undertaking of the activity, other than remuneration for the work performed in terms of the National Environmental Management Act, 1998 (Act107 of 1998);
- Undertake to disclose, to the competent authority, any material information that has or may have the potential to
 influence the decision of the competent authority or the objectivity of any report, plan or document required in terms
 of the National Environmental Management Act, 1998 (Act 107 of 1998);
- Based on information provided to me by the project proponent, and in addition to information obtained during the course of this study, will present the results and conclusion within the associated document to the best of my professional judgement.

t Mulliers

Tosca de Villiers Landscape Architect & Environmental Assessment Practitioner SACLAP Reg nr: 20421 EAPASA Reg nr: 2019/1582



LIST OF TABLES

Table 1: Roles and responsibilities outlined for each applicable party on site	
Table 2: Potential sensitive visual receptors as identified by SiVEST in 2012	13
Table 3: Impact table summarising the significance ratings on identified sensitive visual receptors in close proximity f	to the
proposed infrastructure in 2012	16
Table 4: Impact table summarising the significance ratings as determined in 2012	
Table 5: Impact table summarising the significance of sensitive visual receptors in close proximity to the prop infrastructure	
Table 6: Impact table summarising the significance of visual impacts on sensitive visual receptors within the region	19
Table 7: Impact table summarising the significance of the visual impacts of associated infrastructure on sensitive v receptors in close proximity	
Table 8: Impact table summarising the significance of visual impact of operational lightening at night on visual rece within the region during construction	ptors
Table 9: Impact table summarising the significance of visual impact of operational lightening at night on visual rece within the region during the operational phase	eptors
Table 10: Impact table summarising the significance ratings as determined in 2023	
Table 11: Large-scale renewable energy developments proposed in close proximity to the PV plant as assessed in	
Table 12: Impact table summarising the significance of the cumulative visual impact of the proposed Loeriesfontein Facility when considered with other development in the area on sensitive visual receptors within the region	
Table 13: Matrix to determine overall visual sensitivity for the proposed Loeriesfontein 3 PV Facility	26

LIST OF MAPS

Map 1: Topography within the study area as per the initial VIA undertaken by SiVEST in 2012	6
Map 2: Map showing land use within the study area as per the initial VIA undertaken by SiVEST in 2012	7
Map 3: Current shaded relief map of the study area	10
Map 4: Current land cover / broad land use map of the study area	
Map 5: Approved/authorised EIA Applications and operational Renewable Energy Facilities within the study area	12
Map 6: Visual receptors potentially sensitive to the PV plant (SiVEST, 2012)	14
Map 7: Viewshed analysis of the proposed Loeriesfontein 3 PV Facility	15
Map 8: Relative landscape (solar) theme sensitivity as per the DFFE Screening Tool for the proposed Loeriesfontein 3	
Facility	

LIST OF FIGURES

Figure 1: Regional locality of the study area	. 2
Figure 2: Typical natural visual character in the study area in 2012 (SiVEST, 2012)	
Figure 3: Views toward the development site from near the old farmhouse on Kareedoorn Pan Farm (SiVEST, 2012)	
Figure 4: Long distance view of the Dwaggas Salt Pan from the north (Photo credit: Google Earth - Rehan Opperman)	. 8
Figure 5: View of the expansive Bushmanland landscape (Photo credit: Google Earth – Rehan Opperman).	. 9

1. BACKGROUND

In 2012, a full scoping and environmental impact report, inclusive of specialist studies, was undertaken for the proposed Loeriesfontein 3 Phototvoltaic (PV) Solar Energy Facility (SEF), near Loeriesfontein in the Northern Cape. The impact assessment entailed the construction of a 100 megawatt (MW) PV SEF with a panel height of between 5-10m, covering an area of up to approximately 405.77 Ha. The visual impact assessment (VIA) for the Environmental Impact Assessment (EIA) process was originally undertaken by SiVEST in February 2012. An Environmental Authorisation (EA) for the SEF and grid connection infrastructure was received on 29 October 2012 (DFFE Ref: 12/12/20/2321/2), with further amendments being issued on 10 July 2014 (DFFE Ref: 12/12/20/2321/2/A1), 27 October 2015 (DFFE Ref: 12/12/20/2321/2/AM2), 04 October 2017 (DFFE Ref: 12/12/20/2321/2/AM3) and 24 September 2019 (DFFE Ref: 12/12/20/2321/2/AM4). In addition, following the 2019 amendment, the EA was subsequently split into two separate EAs (1 for the 100MW Loeriesfontein PV SEF and 1 for the grid connection infrastructure), both dated 21 May 2021, as follows:

- 1) EA for the 100MW Loeriesfontein 3 PV SEF, 33/132kV IPP portion of the shared on-site substation (including Transformer) and associated infrastructure (DFFE Ref: 12/12/20/2321/2/1); and
- 2) EA for the 132kV Grid Alignment and 132kV Eskom Portion of the shared on-site substation to service the 100 MW Loeriesfontein 3 PV SEF (DFFE Ref: 12/12/20/2321/2/2).

It should be noted that the split EAs for the Loeriesfontein 3 PV SEF (DFFE Ref:.12/12/20/2321/2/1) and Grid Connection infrastructure (DFFE Ref: 12/12/20/2321/2/2), dated 21 May 2021 respectively, replaced the original EA dated 29 October 2012, as well as the subsequent amendments.

Subsequently, the above-mentioned SEF and Grid Connection EAs issued in 2021 lapsed on 29 October 2022. Part 1 EA Amendment applications to extend the validity of the EAs by 5 years (i.e., EAs lapse on 29 October 2027) were however submitted to the Department of Forestry, Fisheries and the Environment (DFFE) on 26 October 2022, and receipt of the SEF and Grid Connection applications was acknowledged by the DFFE on 07 and 09 November 2022 respectively. It is important to note that according to Regulation 28(1B) of the National Environmental Management Act (NEMA) Environmental Impact Assessment (EIA) Regulations of 2014 (as amended), "an environmental authorisation which is the subject of an amendment application contemplated in this Chapter remains valid pending the finalisation of such amendment application."

Since the extension to the validity period of the EAs applied for extends beyond the 10-year period of the original assessment (originally assessed in 2012), the DFFE has requested that additional requirements be submitted in order for them to consider extending the validity of these EAs further.

No additional properties will be affected by the amendment as the proposed amendments are within the original authorised development footprint.

Nuleaf Planning and Environmental (Pty) Ltd have been appointed to undertake a review and comparative assessment of the initial VIA. This report addresses the Loeriesfontein 3 PV SEF EA extension application specifically, and the EA extension application for the Grid Connection infrastructure has been assessed and reported on as part of a separate standalone report. Please note that this report should be read in conjunction with the original VIA undertaken by SiVEST in 2012.



Comparative Visual Impact Assessment for the Environmental Authorisation (EA) Extension Application for the 100 MW Loeriesfontein 3 Photovoltaic (PV) Solar Energy Facility (SEF), Near Loeriesfontein, Northern Cape - DFFE Reference Number: 12/12/20/2321/2/1

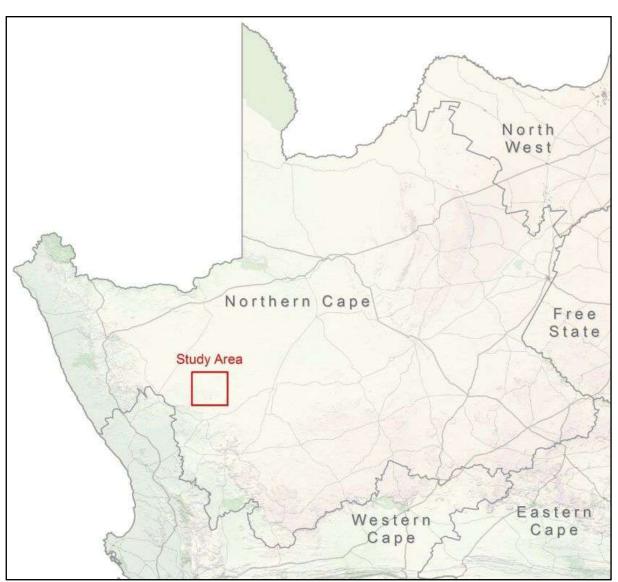


Figure 1: Regional locality of the study area

2. SCOPE OF WORK

The scope of work includes a review and comparative assessment of the previous VIA as undertaken by SiVEST in 2012. This is done in order to determine:

- The status (baseline) of the environment (social and biophysical) that was assessed during the initial assessment;
- The current status of the assessed environment (social and biophysical)
- A description and an assessment of any changes to the environment (social and biophysical) that has occurred since the initial EA was issued;
- A review of the previous specialist study undertaken, and a detailed assessment of their findings, including the following;
 - o Indicating if the impact rating as provided in the initial assessment remains valid;
 - o If the mitigation measures provided in the initial assessment are still applicable;
 - Or if there are any new mitigation measures which need to be included into the EA, should the request to extend the commencement period be granted by the Department;
- A description and an assessment of the surrounding environment, in relation to new developments or changes in land use which might impact on the authorised project, the assessment must consider the following:
 - o Similar developments within the study area;
 - Clearly define identified cumulative impacts, and where possible quantify and indicate the size of the identified impacts;



- The cumulative impacts significance rating must also inform the need and desirability of the proposed development.
- Include a site verification providing an indication of the status of the receiving environment;
- A visual impact statement on whether the proposed development can proceed.

3. INTRODUCTION

3.1. QUALIFICATION AND EXPERIENCE OF THE PROFESSIONAL TEAM

Nuleaf Planning and Environmental (Pty) Ltd, specialising in Visual Impact Assessments, undertook the review and subsequent comparative assessment to the Visual Impact Assessment.

The team undertaking the review and comparative assessment to the Visual Impact Assessment has extensive practical knowledge in spatial analysis, environmental modelling, and digital mapping, and applies this knowledge in various scientific fields and disciplines. The expertise of these practitioners is often utilised in Environmental Impact Assessments, State of the Environment Reports and Environmental Management Plans.

The visual assessment team is familiar with the "Guidelines for Involving Visual and Aesthetic Specialists in EIA Processes" (Provincial Government of the Western Cape: Department of Environmental Affairs and Development Planning) and utilises the principles and recommendations stated therein to successfully undertake visual impact assessments. Although the guidelines have been developed with specific reference to the Western Cape Province of South Africa, the core elements are more widely applicable.

Nuleaf Planning and Environmental have been appointed as an independent specialist consultant to undertake a review and comparative assessment of the original VIA as undertaken by SiVEST in 2012. Neither the author, nor Nuleaf Planning and Environmental will benefit from the outcome of the projects decision-making.

3.2. LEGAL FRAMEWORK

The following legislation and guidelines have been considered in the preparation of this report:

- The National Environmental Management Act, 1998 (Act No. 107 of 1998) (NEMA): This report is in line with Appendix 6 of NEMA: Environmental Impact Assessment (EIA) Regulations (2014, as amended) which details the minimum requirements a specialist report must contain for an Environmental Impact Assessment.
- Guideline for Involving Visual and Aesthetic Specialists in EIA Processes (DEADP, Provincial Government
 of the Western Cape, 2005): This guideline was developed for use in the Western Cape, however, in the absence
 of the development of any other guideline, this provides input for the preparation of visual specialist input into EIA
 processes. The guideline documents the requirements for visual impact assessment, typical issues that trigger the
 need for specialist visual input, the scope and extent of a visual assessment, information required, as well as the
 assessment ad reporting of visual impacts and management actions.
- Screening Tool as per Regulation 16 (1)(v) of the Environmental Impact Assessment Regulations, 2014 as amended: A Screening report was generated for this proposed project, whereby a visual impact assessment was identified as one of the specialist studies that would be required.

3.3. INFORMATION BASE

This assessment was based on information from the following sources:

- The initial visual assessment conducted in February 2012 by SiVEST;
- Topographical maps and GIS generated data were sourced from the Surveyor General, Surveys and Mapping in Mowbray, Cape Town;
- Professional judgement based on experience gained from similar projects; and
- Literature research on similar projects.

3.4. ASSUMPTIONS AND LIMITATIONS

This Report has been prepared by Nuleaf on behalf, and at the request, of Nala Environmental to provide them with an independent specialist assessment and review. Unless otherwise agreed by Nuleaf in writing, Nuleaf does not accept



responsibility or legal liability to any person other than the Nala Environmental for the contents of, or any omissions from, this Report.

To prepare this Report, Nuleaf utilised only the documents and information provided by Nala Environmental or any third parties directed to provide information and documents by Nala Environmental. Nuleaf has not consulted any other documents or information in relation to this Report, except where otherwise indicated.

The findings, recommendations and conclusions given in this report are based on the author's best scientific and professional knowledge, as well as, the available information. This report is based on survey and assessment techniques which are limited by time and budgetary constraints relevant to the type and level of investigation undertaken. Nuleaf and its staff reserve the right to modify aspects of the report including the recommendations if and when new information may become available from on-going research or further work in this field, or pertaining to this investigation.

Although Nuleaf exercises due care and diligence in rendering services and preparing documents, Nuleaf accepts no liability, and Nala Environmental, by receiving this document, indemnifies Nuleaf and its directors, managers, agents and employees against all actions, claims, demands, losses, liabilities, costs, damages and expenses arising from or in connection with the services rendered, directly or indirectly by the use of the information contained in this document.

This report must not be altered or added to without the prior written consent of the author. This also refers to electronic copies of this report which are supplied for the purposes of inclusion as part of other reports. Similarly, any recommendations, statements or conclusions drawn from or based on this report must make reference to this report. If this report is used as part of a main report, the report in its entirety must be included as an appendix or separate section to the main report.

This report should be read in conjunction with the original VIA complied by SiVEST in February 2012. This assessment was undertaken during the planning stage of the project and is based on information available at that time.

This assessment was undertaken during the planning stage of the project and is based on information available at that time. It is assumed that all information regarding the project details provided by Nala Environmental and the Applicant is correct and relevant to the proposed project. No public participation had been undertaken at the time of the writing of this report.

This assessment and all associated mapping have been undertaken according to the worst-case scenario.

3.5. LEVEL OF CONFIDENCE

Level of confidence¹ is determined as a function of:

- The information available, and understanding of the study area by the practitioner:
 - **3**: A high level of information is available of the study area and a thorough knowledge base could be established during site visits, surveys etc. The study area was readily accessible.
 - 2: A moderate level of information is available of the study area and a moderate knowledge base could be established during site visits, surveys etc. Accessibility to the study area was acceptable for the level of assessment.
 - **1**: Limited information is available of the study area and a poor knowledge base could be established during site visits and/or surveys, or no site visit and/or surveys were carried out.
- The information available, understanding of the project and experience of this type of project by the practitioner:
 - **3**: A high level of information and knowledge is available of the project and the visual impact assessor is well experienced in this type of project and level of assessment.
 - **2**: A moderate level of information and knowledge is available of the project and the visual impact assessor is moderately experienced in this type of project and level of assessment.
 - 1: Limited information and knowledge is available of the project and the visual impact assessor has a low experience level in this type of project and level of assessment.

These values are applied as follows:

¹ Adapted from Oberholzer (2005).

Table 1: Roles and responsibilities outlined for each applicable party on site

	Information on the project & experience of the practitioner						
Information on the		3	2	1			
study area	3	9	6	3			
	2	6	4	2			
	1	3	2	1			

The level of confidence for this assessment is determined to be **9** and indicates that the author's confidence in the accuracy of the findings is Moderate to High:

- The information available, and understanding of the study area by the practitioner is rated as 3
- The information available, understanding and experience of this type of project by the practitioner is rated as 3

4. METHODOLOGY

The study was undertaken using Geographic Information Systems (GIS) software as a tool to generate viewshed analyses and to apply relevant spatial criteria to the proposed development. A detailed Digital Terrain Model (DTM) for the study area was created from 5m interval contours from the National Geo-spatial Information data supplied by the Department: Rural Development and Land Reform.

The approach utilised to determine the status of the environment (past and present), as well as, identify any potential additional issues related to the visual impact in comparison to what was originally assessed included the following activities:

- The creation of a detailed digital terrain model (DTM) of the potentially affected environment;
- The sourcing of relevant spatial data. This includes cadastral features, vegetation types, land use activities, topographical features, site placement, etc.;
- The creation of a preliminary viewshed analyses from the proposed area in order to determine the potential visual exposure and the topography's potential to absorb the potential visual impact in comparison to what was originally assessed. The viewshed analysis takes into account the dimensions of the proposed structures in their proposed locations as per the layout provided by the applicant.
- The identification of sensitive receptors upon which the proposed Loeriesfontein 3 PV SEF could have a potential visual impact.

5. STATUS OF THE AFFECTED ENVIRONMENT


5.1. INITIAL ASSESSMENT - STATUS OF THE ENVIRONMENT (2012)

As part of the original Visual Impact Assessment undertaken by SiVEST in 2012, a visual characterisation was undertaken. This consisted of the description of the physical landscape characteristics in terms the prevailing topography, vegetation cover and land use in the study area. A summary of these findings as per the original VIA report undertaken in 2012 is as follows:

Topography

The topography was characterised by a flat to gently undulating landscape (typical of much of the Karoo). In the wider area, the Klein and Groot Rooiberg and Leeuberg koppies formed an area of localised hilly topography to the south and southwest of the site. Immediately north of the site the presence of several large pans signalled that the topography is very flat and poorly drained. It was concluded that there would be very little shielding to lessen the impact of the PV arrays from any locally-occurring receptor locations. Refer to **Map 1** (SiVEST, 2012).



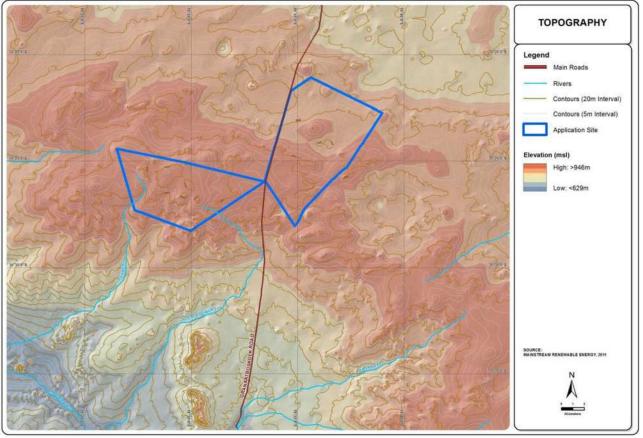

Map 1: Topography within the study area as per the initial VIA undertaken by SiVEST in 2012

Vegetation

The site was reported to be covered by natural short *Bushmanland Basin Shrubland*. Due to the aridity of the area the vegetation consisted of low shrubs around 30-40 cm in height, distributed uniformly across the landscape, except in areas of disturbance where patches of bare earth occurred. In certain areas, man had an impact on the natural vegetation, especially around farmsteads, where tall exotic trees and other typical garden vegetation had been established. The natural short vegetation cover was reported to offer no visual screening. Tall exotic trees were concluded effectively screen the proposed development from farmhouses, where these trees occurred near the farmhouse and were located directly in the way of views to the site.



Figure 2: Typical natural visual character in the study area in 2012 (SiVEST, 2012)



Land Use


The land use in the wider study area was classified natural or undeveloped with sheep farming activities dominating the area. The sheep were noted to graze on the natural vegetation. Activities related to gypsum mining were reported to be occurring along the railway line. The nature of the arid climate entailed that stocking densities for the sheep was low which resulted in the properties being relatively large across the area. Therefore, the area was noted to be very sparsely populated, with little human-related infrastructure. Some infrastructure was reported to be present in the vicinity of the site in the form of gravel access roads, a railway (the railway linking Sishen with Saldanha Bay), and associated railway works warehousing and offices. An electricity transmission substation (Helios Substation) was also present to the south of the site, as well as power lines that run to and from this. A very tall microwave tower (communication tower) was also located on the proposed site.

It was reported that except for two farmhouses the site of the proposed development was mostly vacant and the surrounding area largely uninhabited. The closest built-up area was the small town of Loeriesfontein approximately 60km to the south of the site.

Additionally, it was noted that several renewable energy facilities were being proposed within relatively close proximity to the proposed PV plant. EIAs were underway and a number of them were reported to already be at advanced stages, or have already received environmental authorisation. The renewable energy developments that were being proposed in the surrounding area at that stage (2012), included, CPV/PV Plant on the Farm Kaalspruit (approximately 12km north of Loeriesfontein), Hantam PV Solar Energy Facility (just east of Helios Substation) and PV Plant on Klein Rooiberg Farm (10km south of Helios Substation).

No formal protected areas or leisure / nature-based tourism activities were noted to be taking place within the study area.

It was concluded that the general lack of human habitation and associated human infrastructure, had an obvious impact on the sense of place, thus giving the area a largely natural, rural feel. Refer to **Map 2** (SiVEST, 2012).

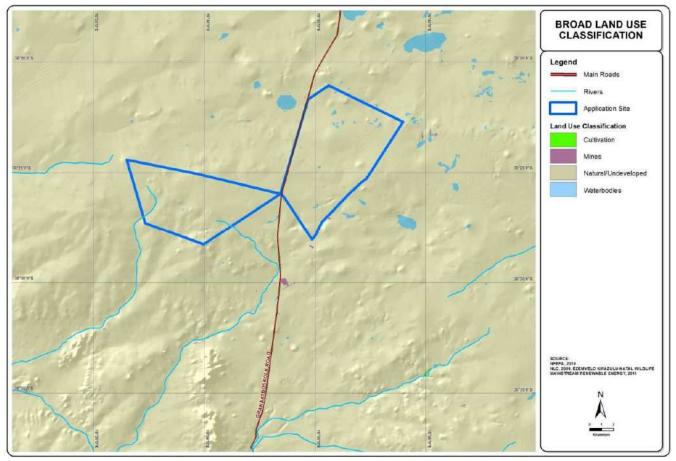

Map 2: Map showing land use within the study area as per the initial VIA undertaken by SiVEST in 2012





Figure 3: Views toward the development site from near the old farmhouse on Kareedoorn Pan Farm (SiVEST, 2012)

5.2. CURRENT ASSESSMENT - STATUS OF THE ENVIRONMENT (2023)

A desktop assessment of the current affected environment was undertaken in January 2023 to determine the status of the physical landscape characteristics now. As per the previous VIA undertaken in 2012, this consisted of describing the current physical landscape characteristics in terms of the prevailing topography, vegetation cover and land use within the study area. These findings are described below:

Topography

The topography of the study area is relatively flat and homogenous, described predominantly as slightly irregular plains and pans to the north and east, and plains to the south-west. The elevation ranges from 850m above sea level (a.s.l.) in the south-west (along the Klein_Rooiberg River floodplain) to 1010m a.s.l. at the top of the hills located south of the Khobab Wind Energy Facility (WEF). Refer to **Map 3** for a current topographical map of the study area.

The Loeriesfontein 3 PV site itself is located at an average elevation of 935m a.s.l. and has an even slope to the south towards the Klein-Rooiberg River. This non-perennial river flows into the Kroms River located further afield to the south west of the site. These rivers are only occasionally flooded during infrequent rainfall periods and are therefore dry riverbeds for most of the year. Other hydrological features in the study area are non-perennial pans to the north. Some of the larger pans include:

- Boegoefontein Pan
- Bitterputs Pan
- Kareedoring Pan
- Brakpan
- Dwaggas Salt Pan (located just beyond the extent of the study area to the north east of Boegoefontein Pan)



Figure 4: Long distance view of the Dwaggas Salt Pan from the north (Photo credit: Google Earth – Rehan Opperman).



Vegetation

Regionally, the site is located some 60km north of the little town of Loeriesfontein (at the closest) within the Northern Cape Province, within a region commonly referred to as the Bushmanland. The Bushmanland falls within the arid Nama-Karoo Biome; a biome characterised by its dry semi-dessert climate and associated dessert-like vegetation. The vegetation cover of most of the study area, to the north and east, is identified as Bushmanland Basin Shrubland, interspersed with non-perennial pans (Bushmanland Vloere).



Figure 5: View of the expansive Bushmanland landscape (Photo credit: Google Earth – Rehan Opperman).

Land Use

The dominant land use (at present) within the region is sheep farming. There is very limited agricultural activity (dryland cultivation) due to the limited rainfall (less than 300mm per annum) and arid climate. The predominant land cover types include seasonal grassland, bare sand surfaces and Low Shrubland, mainly to the south. Refer to **Map 4** for the current land cover and broad land use patterns within the study area.

Some of the non-perennial pans previously mentioned are home to limited industrial activities within the region, namely salt mining, e.g. at Boegoefontein Pan and further afield at Dwaggas Pan. Other than these relatively small salt mining operations, other industrial infrastructure within the study area includes the Sishen to Saldanha iron ore railway line (south east of the site), the Helios Substation located to the south, and the Aries to Helios 400kV power line.


Despite the limited industrial activity, it should be noted that the region has, over the years, attracted a large number of renewable energy applications (both wind and solar), most of which have been authorised. Refer to **Map 5** for the approved/authorised EIA Applications and operational Renewable Energy Facilities within the study area.

The site itself is located immediately north and north east of the operational Loeriesfontein and Khobab WEFs respectively. These WEFs respectively have 61 and 58 operational wind turbines, each connected (from their collector substations) to the Eskom Helios Main Transmission Substation, located to the south of the site.

Other authorised but not yet constructed Renewable Energy Facilities within the study area include the Dwarsrug WEF, as well as, the Kokerboom 1 and 3 WEF's.


Overall, the region has a predominantly undeveloped, rural and natural character, with scattered isolated homesteads or farm settlements occurring within the study area. These are generally located at great distances from each other. The region has a population density of less the 1 person per km².



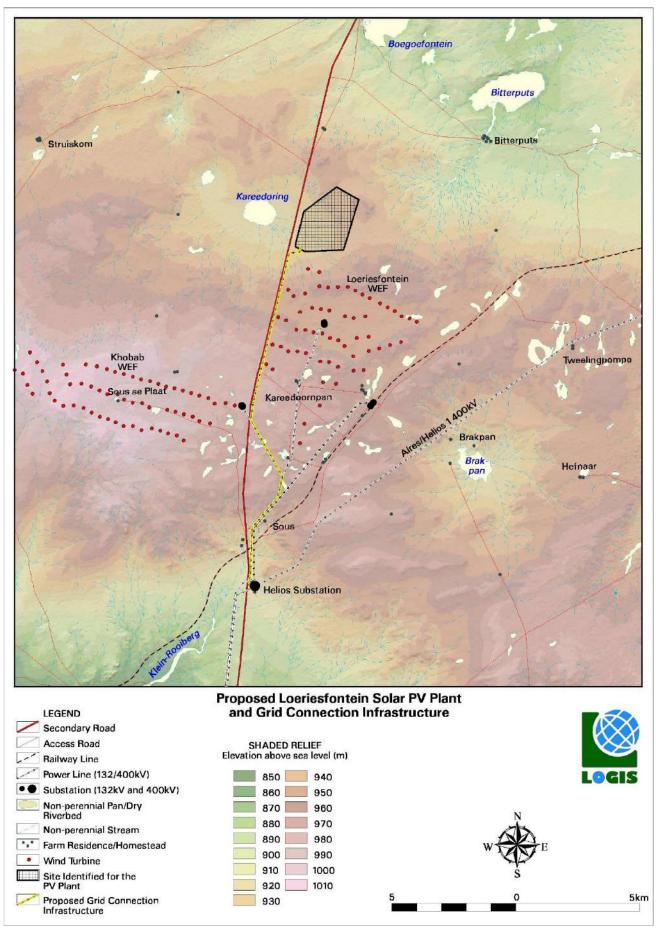


Map 3: Current shaded relief map of the study area



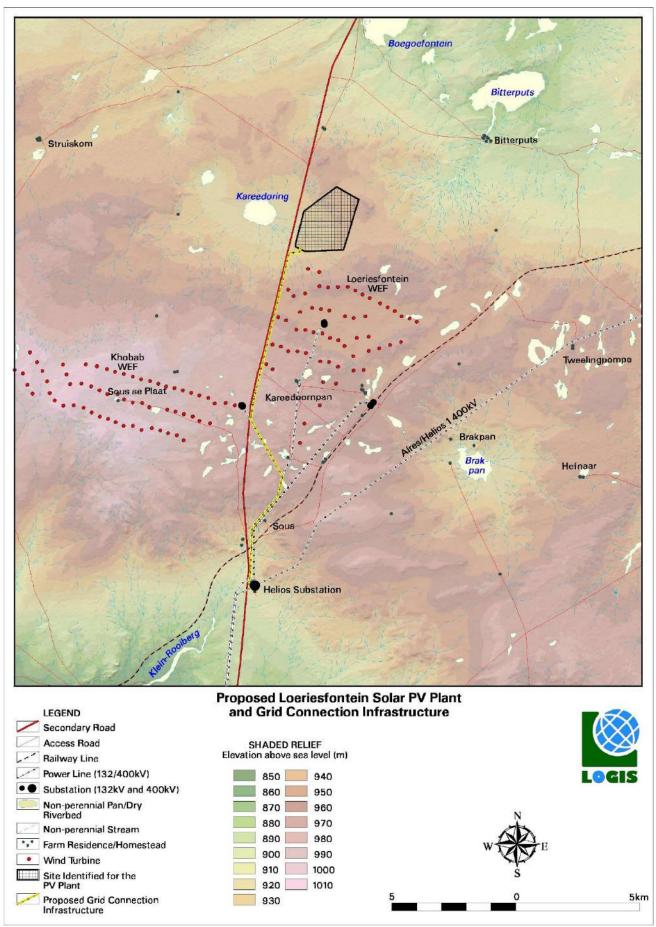

Map 4: Current land cover / broad land use map of the study area



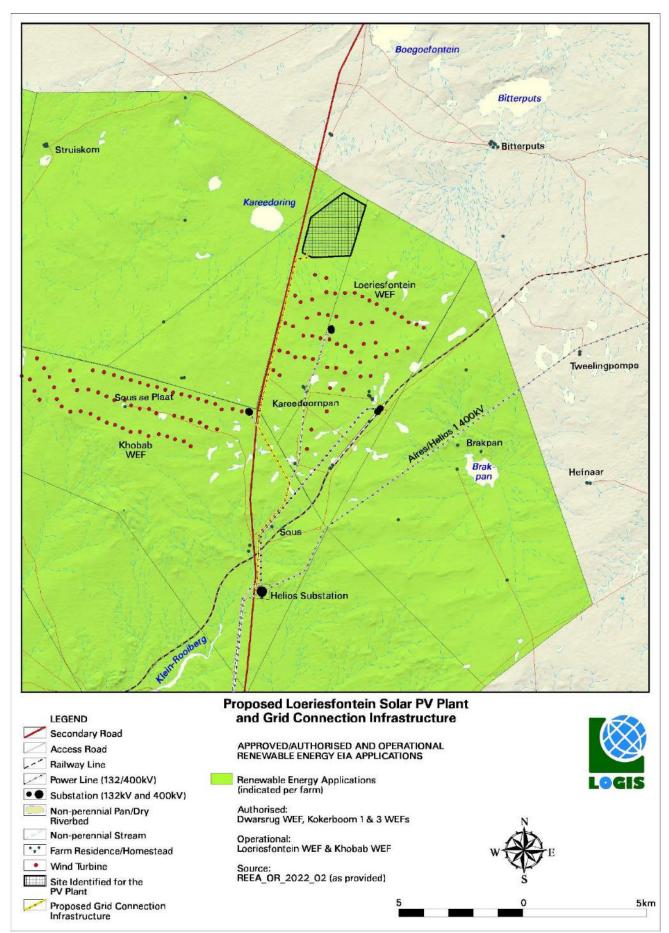

Map 5: Approved/authorised EIA Applications and operational Renewable Energy Facilities within the study area

5.3. COMPARATIVE ASSESSMENT – CHANGES TO STATUS OF THE ENVIRONMENT BETWEEN 2012 - 2023

Since the initial VIA undertaken by SiVEST in 2012, the landscape characteristics comprising the topography and vegetation of the study area have remained unchanged. However, in terms of the land use, while the majority of the land uses noted in 2012 have remained the same (i.e. sheep farming, etc.), some changes have subsequently taken place as detailed below:

- In 2012, gypsum mining was noted to have taken place along the railway line within the study area. While these areas of disturbance are still noted on the current land cover / broad land use map (Map 4) and updated Google Earth aerial imagery, a comparison of current aerial imagery to historical aerial imagery take in 2012 indicates that these areas have largely remained unchanged in size and are therefore assumed to be inactive mines.
- The most significant changes in land use noted between 2012 and present day (2023) is the presence of the two operational Wind Energy Facilities (i.e. Loeriesfontein and Khobab WEFs) located to the south and south west of the site. However, it must be noted that while these activities are new land uses within the study area currently, this change in land use was anticipated already in the initial 2012 study undertaken. Therefore, as predicted in the initial assessment, this change in land use is in line with the noted trends in the region at that time.
- Salt mining activities are noted to now be taking place at Boegoefontein Pan and further afield at Dwaggas Pan. These activities were not noted to be taking place in 2012, however, subsequently as of 2017, EIA applications were submitted for these activities.

Overall, despite the above-mentioned changes in land use, the study area has retained its predominately undeveloped, rural and natural character, as well as, low population density. Therefore, in the opinion of the author, the **status of the environment has largely remained the same**.

6. VISUAL IMPACT ASSESSMENT

6.1. POTENTIAL VISUAL EXPOSURE - 2012

No viewsheds were generated during the initial visual study was undertaken by SiVEST in 2012. The reason given is that since detailed digital data was not available and the topography within the study area was relatively flat, generating viewsheds from coarse- grained DTMs would only take the large-scale topographical variations into account and not minor topographical features, vegetative screening, or man-made structures which are important factors influencing the severity of visual impacts in this context.

Instead, 'distance bands' were assigned for the PV Facility. These bands were assigned to each facility largely based on the height of the structures and the fact that very few receptors were spread over a large distance in the study area. The methodology followed applied the concept that the proposed development will be more visible to receptors located within a short distance and these receptors will experience a higher adverse visual impact than those located at a moderate or long distance from the proposed development. The distance of the potentially sensitive receptors from the development area of the PV Facility was then considered when rating the visual impact of the development on these receptors. Refer to **Map 6** (SiVEST, 2012).

The distance radii chosen was as follows:

- 0 1km (Short distance)
- >1km 2km (Moderate distance)
- >2km 5km (Long distance)


Based on the application of these 'distance bands', the following visual receptors potentially sensitive to the proposed PV Facility were identified:

Table 2: Potential sensitive visual receptors as identified by SiVEST in 2013

Name	Current Use	Coordinates	Distance from the proposed site
Main dwelling on Kareedoorn Pan Farm	Residential dwelling	30°25'40.47"S 19°36'19.62"E	Within proposed site
Old farmhouse on Kareedoorn Pan Farm	Storeroom (will house farm worker in the near	30°25'28.59"S	Within proposed site

Comparative Visual Impact Assessment for the Environmental Authorisation (EA) Extension Application for the 100 MW Loeriesfontein 3 Photovoltaic (PV) Solar Energy Facility (SEF), Near Loeriesfontein, Northern Cape - DFFE Reference Number: 12/12/20/2321/2/1

	future)	19°34'38.99"E	
Dwelling on Sous Farm	Farm workers dwelling	30°28'32.58"S 19°33'52.36"E	Moderate distance

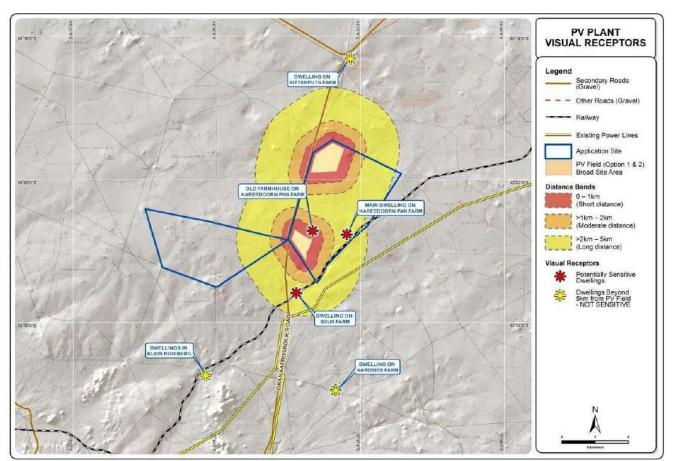

Map 6: Visual receptors potentially sensitive to the PV plant (SiVEST, 2012)

It must be noted that during the initial VIA undertaken by SiVEST in 2012, two site alternatives for the proposed PV Facility were assessed concurrently. As such, the above map and identified receptors, as well as the receptors' distance from the proposed site, are based on their proximity to both alternatives. EA was only granted for Alternative 1 (Option 1, as labelled on the map), which is the layout and PV site under investigation currently.


6.2. POTENTIAL VISUAL EXPOSURE - 2023

Subsequently, access to detailed digital data has made visual exposure modelling possible and, as such a viewshed analysis for the proposed Loeriesfontein 3 PV Facility was undertaken in order to determine the validity of the results of the previous VIA undertaken in 2012. The result of the viewshed analyses for the proposed Loeriesfontein 3 PV Facility is shown on **Map 7** that follows. An analysis has been undertaken within the proposed development area in order to determine the general visual exposure (visibility) of the area under investigation. A generic height of 5m was used in order to illustrate the anticipated visual exposure of the solar energy facility. Typically, structures of this height (i.e. 5m) may be visible from up to 6km away. In this respect, the anticipated Zone of Visual Influence for this facility as calculated from the development footprint has been indicated at 6km. The extent of visual exposure within this zone is low.

The viewshed analysis does not include the effect of vegetation cover or existing structures on the exposure of the proposed facility, therefore signifying a worst-case scenario.

Map 7 indicates areas from which any number of the proposed infrastructure could potentially be visible, as well as, proximity offsets from the proposed facility. These proximity offsets are based on the anticipated visual experience of the observer over varying distances. The distances are adjusted upwards for larger facilities and downwards for smaller facilities (i.e., depending on the size and nature of the proposed infrastructure).

NuLeaf

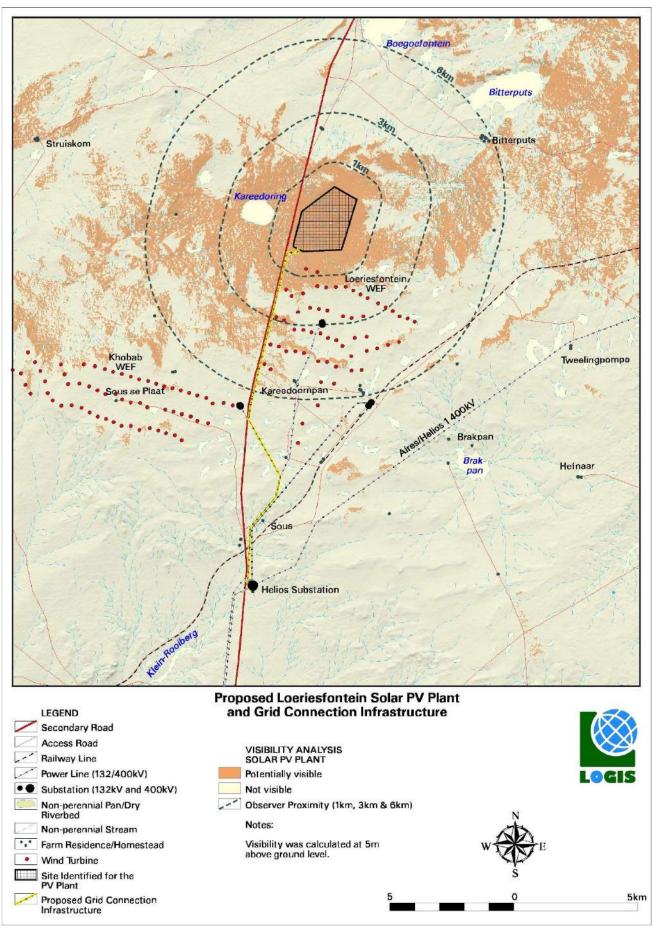

Map 7: Viewshed analysis of the proposed Loeriesfontein 3 PV Facility

WuLeaf

Therefore, for the purpose of this study, proximity offsets have been calculated from the expected boundary of the site, as indicated on **Map 7** and as follows:

- <u>0 1km</u>. Short distance view where the facility would dominate the frame of vision and constitute a very high visual prominence.
- <u>1 3km</u>. Short to medium distance view where the structures would be easily and comfortably visible and constitute a high to moderate visual prominence.
- <u>3 6km</u>. Medium to long distance view where the facility would become part of the visual environment, but would still be visible and recognisable. This zone constitutes a moderate visual prominence.
- <u>> 6km</u>. Long distance view of the facility where the structures are not expected to be immediately visible and not easily recognisable. This zone constitutes a lower visual prominence for the facility.

The following is an overview of the findings of the viewshed based on the layout illustrated on the Map provided:

- The potential visual exposure of the facility is contained to a core area on the site itself and within a 1 km radius thereof. Sensitive visual receptors are observers travelling along the secondary road.
- Potential visual exposure in the short to medium distance (i.e., between 1 and 3km), is scattered throughout with scattered visually screened areas to the north, east and south. Sensitive visual receptors are observers travelling along the secondary road, as well as, the operators of the Loeriesfontein WEF.
- In the medium to long distance (i.e. between 3 and 6km offset), the extent of potential visual exposure is fragmented throughout the area with large visually screened areas lying to the south east and north of the site. Sensitive visual receptors include residents of Bitterputs, as well as, observers travelling along the secondary road.

Of note is that while the homestead Kareedoornpan (including the old farmhouse and the main residential dwelling) falls within this zone, no visual exposure is expected based on the viewshed analysis modelling.

 Beyond the 6km offset from the proposed facility, potential visual exposure becomes extremely scattered and very low. Sensitive visual receptors are not likely to be visually exposed to the proposed facility, despite lying within the viewshed.

In general, as a result of the scattered and lower population density of the study area, the Loeriesfontein PV 3 Facility may constitute a visual prominence, potentially resulting in a moderate - low visual impact.

6.3. IMPACT RATINGS - 2012

In order to assess the impact of the proposed PV facility on the potentially sensitive receptor locations listed above, the VIA undertaken by SiVEST in 2012 utilised a matrix that took into account a number of factors which was then applied to each receptor location. The matrix adopted was based on the factors as listed below:

- Distance of receptor away from the proposed development area (distance banding)
- Primary focus / orientation of the receptor
- Presence of screening factors (topography, vegetation etc.)

Based on the application of this matrix, it was determined that the impact of the Loeriesfontein 3 PV Facility (Alternative 1) would be as follows on the identified visual receptors:

Table 3: Impact table summarising the significance ratings on identified sensitive visual receptors in close proximity to the proposed infrastructure in 2012

	Receptor Location	Distance	Primary	Screening	Total Score	Visual	Visual
			Focus			Impact	Impact
						Score	Rating
						Average	
ſ	Main dwelling on Kareedoorn	1	1	2	4	1.3	Low
	Pan Farm						

Old farmhouse on Kareedoorn	1	4	4	9	3	Medium	
Pan Farm							
Dwelling on	Beyond 5km from the development area therefore not considered to be visual receptor if the PV plant were developed at field alternative 1.						
Sous Farm						native 1.	

As indicated in the table above, it was determined that the proposed Loeriesfontein 3 PV Facility would only impact on two visual receptors, which are both located on the farm Kareedoorn Pan, for which the visual impact is likely to be offset by the fact that the farm owner had signed a lease agreement with the Applicant, indicating his willingness to lease his property to them should the project receive an EA and License. The farm owner would therefore benefit from the development, as he would receive revenue from this lease agreement. This is likely to offset the visual impact experienced by the landowner by reducing any negative sentiments that he may have towards the development. This low to medium visual impact rating is therefore not regarded as a realistic representation of the actual impacts likely to be experienced at the receptor location.

Impact ratings for the following were also undertaken and the significance rating determined as below:

Table 4: Impact table summaris	ina the	significance	ratings as	determined in 2012

Significance Ratings Summary (2012)				
Pre-mitigation impact Post mit rating impact				
Day-time visual impacts of the PV plant during construction	-20 (negative low)	-10 (negative low)		
Day-time visual impacts of the PV plant during operation	-34 (negative medium impact)	-28 (negative low impact)		
Night-time visual impacts of the PV plant during construction	-7 (negative low)	-6 (negative low)		
Night-time visual impacts of the PV plant during operation	-28 (negative low)	-26 (negative low)		

The impact ratings as determined in 2012 were expected to be contained to low to medium for the proposed Loeriesfontein 3 PV Facility.

6.4. IMPACT RATINGS - 2023

The previous section of this report identified the impact ratings determined in the previous VIA undertaken by SiVEST in 2012 with regards to specific areas where likely visual impacts would occur. This section will attempt to quantify these potential visual impacts within today's context, taking into consideration the established changes in land use (status of the environment) within their respective geographical locations in relation to the proposed Loeriesfontein 3 PV Facility and in terms of the identified issues related to the visual impact, in order to determine if the significance ratings as assessed in the VIA undertaken in 2012 are still valid.

The methodology for the assessment of potential visual impacts states the nature of the potential visual impact (e.g., the visual impact on identified sensitive receptors in the vicinity of the proposed infrastructure) and includes a table quantifying the potential visual impact according to the following criteria:

<u>Extent</u> - How far the visual impact is going to extend and to what extent it will have the highest impact. In the case of this type of development the extent of the visual impact is most likely to have a higher impact on receptors closer to the development and decrease as the distance increases.

- (1) Very low: Long distance > 6 Km
- (2) Low: Medium to long 3-6 Km
- (3) Medium: Short distance 1-3 Km
- (4) High: Very Short < 1 Km

<u>Duration</u> - The timeframe over which the effects of the impact will be felt.

- (1) Very short: 0-1 years
- (2) Short: 2-5 years
- (3) Medium: 5-15 years
- (4) Long: >15 years
- (5) Permanent



<u>Magnitude</u> - The severity or size of the impact. This value is read off the Visual Impact Index maps.

- (0) None
- (2) Minor
- (4) Low
- (6) Moderate
- (8) High
- (10) Very High

Probability - The likelihood of the impact actually occurring.

- (1) Very improbable: Less than 20% sure of the likelihood of an impact occurring
- (2) Improbable: 20-40% sure of the likelihood of an impact occurring
- (3) Probable: 40-60% sure of the likelihood of an impact occurring
- (4) Highly probable: 60-80% sure of the likelihood of that impact occurring
- (5) Definite: More than 80% sure of the likelihood of that impact occurring

<u>Significance</u> - The significance weighting for each potential visual impact (as calculated above) is as follows:

(0-12) Negligible:

Where the impact would have no direct influence on the decision to develop in the area. The impact would be of a very low order. In the case of negative impacts, almost no mitigation and or remedial activity would be needed, and any minor steps, which might be needed, would be easy, cheap, and simple.

• <u>(13-30) Low</u>:

Where the impact would have a very limited direct influence on the decision to develop in the area. The impact would be of a low order and with little real effect. In the case of negative impacts, mitigation and / or remedial activity would be either easily achieved or little would be required, or both.

• (31-60) Moderate:

Where the impact could influence the decision to develop in the area. The impact would be real but not substantial. In the case of negative impacts, mitigation and / or remedial activity would be both feasible and fairly easily possible.

• <u>(61-80) High</u>:

Where the impact must have an influence on the decision to develop in the area. The impacts are of a substantial order. In the case of negative impacts, mitigation and / or remedial activity would be feasible but difficult, expensive, time-consuming or some combination of these.

<u>(81-100) Very High</u>:

Where the impact will definitely have an influence on the decision to develop in the area. The impacts are of the highest order possible. In the case of negative impacts, there would be no possible mitigation and / or remedial activity possible.

The **significance** of the potential visual impact is equal to the **consequence** multiplied by the **probability** of the impact occurring, where the consequence is determined by the sum of the individual scores for magnitude, duration and extent (i.e., **significance = consequence (magnitude + duration + extent) x probability**).

<u>Status</u> – The perception of Interested and Affected Parties towards the proposed development.

- Positive
- Negative
- Neutral

Reversibility – The possibility of visual recovery of the impact following the decommissioning of the proposed development

- (1) Reversible
- (3) Recoverable
- (5) Irreversible



6.4.1. POTENTIAL VISUAL IMPACT ON SENSITIVE VISUAL RECEPTORS IN CLOSE PROXIMITY TO THE FACILITY DURING THE OPERATIONAL PHASE

The visual impact on sensitive visual receptors (i.e. users of secondary roads) in close proximity to the proposed infrastructure (i.e. within 1 km) is expected to be of **moderate** significance.

A mitigating factor within this scenario is the very low occurrence of receptors within the receiving environment. Additionally, observers traveling along the secondary road will only be exposed to the visual intrusion for a short period of time. This reduces the probability of this impact occurring.

No mitigation is possible within this environment and for a facility of this scale. Of note is that the visual impact on the secondary road users was not initially assessed as part of the VIA undertaken by SiVEST in 2012. The table below illustrates this impact assessment.

Table 5: Impact table summarising the significance of sensitive visual receptors in close proximity to the proposed infrastructure

Nature of Impact: Visual impact on the users of secondary infrastructure.	roads and residents of homeste	eads in close proximity to the propose	
	No mitigation	Mitigation considered	
Extent	High (4)	N/A	
Duration	Long term (4)	N/A	
Magnitude	Very High (10)	N/A	
Probability	Probable (3)	N/A	
Significance	Moderate (54)	N/A	
Status (positive or negative)	Negative	N/A	
Reversibility	Recoverable (3)	N/A	
Irreplaceable loss of resources?	No	N/A	
Can impacts be mitigated?	No		

6.4.2. POTENTIAL VISUAL IMPACT ON SENSITIVE VISUAL RECEPTORS WITHIN THE AREA DURING THE OPERATIONAL PHASE

The visual impact on sensitive visual receptors (i.e. residents of homesteads and users of secondary roads) within the region (i.e. between 1 - 6km offset) is expected to be of **low** significance.

The original VIA (SiVEST, 2012) identified the homesteads located on Kareedoornpan (including the old farmhouse and the main residential dwelling) as the predominate sensitive receptors within this zone, however, **based on the viewshed analysis undertaken it was determined that no visual exposure is expected on the residents of these homesteads, thereby negating the potential of this visual impact occurring**. However, the residents of Bitterputs (located almost 6km away) are likely to be visually exposed to some extent to the proposed facility (as determined by the viewshed analysis) and therefore the visual impact significance for these sensitive receptors is determined below.

No mitigation is possible within this environment and for a facility of this scale, but the very low occurrence of visual receptors within the area reduces the probability of this impact occurring. The table below illustrates this impact assessment.

Table 6: Impact table summarising the significance of visual impacts on sensitive visual receptors within the region

Viewel increase and the second encoder and real dents of home stands on the meride encoder of the dimension	
Visual impact on the users of secondary roads and residents of homesteads on the periphery of the 1km offset	
and within the region beyond	ļ

	No mitigation	Mitigation considered
Extent	Low (2)	N/A
Duration	Long (4)	N/A
Magnitude	Moderate (6)	N/A
Probability	Improbable (2)	N/A
Significance	Low (24)	N/A



Status (positive or negative)	Negative	N/A	
Reversibility	Recoverable (3)	N/A	
Irreplaceable loss of resources?	No	N/A	
Can impacts be mitigated?	Yes		

6.4.3. POTENTIAL VISUAL IMPACT OF CONSTRUCTION ON SENSITIVE VISUAL RECEPTORS IN CLOSE PROXIMITY TO THE PROPOSED FACILITY

During the construction period, there will be an increase in heavy vehicles utilising the roads to the construction sites that may cause, at the very least, a visual nuisance to other road users and landowners in the area in close proximity.

Within the region, dust as a result of construction activities may be visible, especially in this receiving environment, and as such will result in visual impact during construction. This impact is likely to be of **moderate** significance pre mitigation and **low** significance post mitigation.

Mitigation entails proper planning, management and rehabilitation of all construction sites to forego visual impacts.

The low occurrence of visual receptors reduces the probability of this impact occurring. The table below illustrates the assessment of this anticipated impact.

Table 7: Impact table summarising the significance of the visual impacts of associated infrastructure on sensitive visual receptors in close proximity

Nature of Impact:				
Visual impact of construction on sensitive visual receptors in close proximity to the proposed facility				
	No mitigation Mitigation consider			
Extent	High (4)	High (4)		
Duration	Short term (1)	Short term (1)		
Magnitude	Very High (10)	Low (4)		
Probability	Probable (3)	Improbable (2)		
Significance	Moderate (45)	Low (18)		
Status (positive or negative)	Negative	Negative		
Reversibility	Recoverable (3)	Recoverable (3)		
Irreplaceable loss of resources?	No	No		
Can impacts be mitigated?	Yes			

6.4.4. POTENTIAL VISUAL IMPACT OF OPERATIONAL LIGHTING AT NIGHT ON SENSITIVE VISUAL RECEPTORS DURING CONSTRUCTION AND THE OPERATIONAL PHASE

The receiving environment has a relatively small number of populated places, and it can be expected that any light trespass and glare from the security and after-hours operational lighting for the facility will have some significance. In addition, the remote sense of place and rural ambiance of the local area increases its sensitivity to such lighting intrusions.

The potential lighting impact is known as sky glow. Sky glow is the condition where the night sky is illuminated when light reflects off particles in the atmosphere such as moisture, dust or smog. The sky glow intensifies with the increase in the number of light sources. Each new light source, especially upwardly directed lighting, contributes to the increase in sky glow. The general lighting of the facility may contribute to the effect of sky glow in an otherwise dark environment.

The visual impacts as a result of lighting at night on sensitive visual receptors in the region is likely to be of **moderate** significance and may be mitigated to **low**, for both the construction and the operational phase. Best practice guidelines for general site lighting that may occur on the site has been taken into consideration. The table below illustrates this impact assessment.

Table 8: Impact table summarising the significance of visual impact of operational lightening at night on visual receptors within the region during construction

Nature of Impact:					
Visual impact of lighting at night on sensitive visual receptors in close proximity to the proposed facility					
No mitigation Mitigation considered					
Extent	High (4)	High (4)			
Duration	Short term (1)	Short term (1)			
Magnitude	High (8)	Low (4)			



Probability	Probable (3)	Improbable (2)	
Significance	Moderate (39)	Low (18)	
Status (positive or negative)	Negative	Negative	
Reversibility	Recoverable (3)	Recoverable (3)	
Irreplaceable loss of resources?	No	No	
Can impacts be mitigated?	Yes		

Table 9: Impact table summarising the significance of visual impact of operational lightening at night on visual receptors within the region during the operational phase

	No mitigation	Mitigation considered
Extent	High (4)	High (4)
Duration	Long term (4)	Long term (4)
Magnitude	High (8)	Low (4)
Probability	Probable (3)	Improbable (2)
Significance	Moderate (48)	Low (24)
Status (positive or negative)	Negative	Negative
Reversibility	Recoverable (3)	Recoverable (3)
Irreplaceable loss of resources?	No	No
Can impacts be mitigated?	Yes	

6.5. SUMMARY OF THE IMPACT RATINGS FINDINGS

In light of the results and findings of the Visual Impact Assessment undertaken for the proposed Loeriesfontein 3 PV Facility, it is acknowledged that the receiving environment will be significantly visually transformed for the entire operational lifespan of the infrastructure. The below table indicates a summary of the impact ratings as determined for the development based on the viewshed modelled, as well as, present day land uses:

Table 10: Impact table summarising	a the significanci	e ratings as deterr	nined in 2023
	g uno orginnouno	0 1001190 00 001011	

Significance Ratings Summary (2023)				
Pre-mitigation impact Post m rating impac				
Potential visual impact on sensitive visual receptors in close	Moderate (54)	N/A		
proximity to the facility during the operational phase	(negative)			
Potential visual impact on sensitive visual receptors within the area	Low (24)	N/A		
(between 1 – 6km) during the operational phase	(negative)			
Potential visual impact of construction on sensitive visual receptors	Moderate (45)	Low (18)		
in close proximity to the facility	(negative)	(negative)		
Potential visual impact of operational lighting at night on sensitive	Moderate (39)	Low (18)		
visual receptors during construction	(negative)	(negative)		
Potential visual impact of operational lighting at night on sensitive	Moderate (48)	Low (24)		
visual receptors during the operational phase	(negative)	(negative)		

The impact ratings as determined in 2012 were expected to be **contained to low to medium** for the proposed Loeriesfontein 3 PV Facility. In comparison, it is expected that the **impact ratings will also be medium to low considering the present-day land uses and expected visual exposure**. Therefore, **no increase in the visual impact is anticipated**.

7. POTENTIAL CUMULATIVE VISUAL EXPOSURE

7.1. CUMULATIVE IMPACTS - GENERAL

Cumulative visual impacts can be defined as the additional changes caused by a proposed development in conjunction with other similar developments or as the combined effect of a set of developments. In this case, the 'development' would be a new Solar PV Facility as seen in conjunction with the existing (or proposed/authorised) renewable energy facilities and infrastructure in close proximity.

Cumulative visual impacts may be:

<u>Combined</u>, where facilities are within the observer's arc of vision at the same time;

- <u>Successive</u>, where the observer has to turn his or her head to see the various structures of a renewable energy facility; and
- <u>Sequential</u>, when the observer has to move to another viewpoint to see different renewable energy facilities, or different views of the same facility (such as when travelling along a route).

The visual impact assessor is required (by the competent authority) to identify and quantify the cumulative visual impacts and to propose potential mitigating measures. This is often problematic as most regulatory bodies do not have specific rules, regulations or standards for completing a cumulative visual assessment, nor do they offer meaningful guidance regarding appropriate assessment methods. There are also not any authoritative thresholds or restrictions related to the capacity of certain landscapes to absorb the cumulative visual impacts of the renewable energy infrastructure.

To complicate matters even further, cumulative visual impact is not just the sum of the impacts of two developments. The combined effect of both may be much greater than the sum of the two individual effects, or even less.

The cumulative impact of the proposed Loeriesfontein 3 PV Facility on the landscape and visual amenity is a product of:

- The distance between the renewable energy facilities;
- The distance over which the structures are visible;
- The overall character of the landscape and its sensitivity to the structures;
- The siting and design of the facility; and
- The way in which the landscape is experienced.

The specialist is required to conclude if the proposed 'development' will result in any unacceptable loss of visual resource considering the infrastructure proposed in the area.

7.2. CUMULATIVE IMPACTS - 2012

The cumulative impacts as assessed by SiVEST in the original VIA undertaken in 2012 stated that several renewable energy facilities were proposed within relatively close proximity to the proposed development. These facilities were either in the advanced stages of the EIA process or had already received environmental authorisation. The renewable energy developments that were being proposed at that stage (2012) in the surrounding area, are indicated in the table below.

Proposed	Status		Proposed Capacity	Approximate	Current Status of
Development	of EIA (2012)	Proponent		Location	EIA (2023) ²
CPV/PV Plant on	Environmental	Mainstream		Approximately 12km	Approved
the Farm	Authorisation	Renewable	50MW	north of Loeriesfontein	(Not constructed)
Kaalspruit	Issued by DEA	Power			
Hantam PV	Draft	Solar Capital	Up to	Approximately 47km	
Solar Energy	Environmental	(Pty) Ltd	525MW	north of Loeriesfontein	
Facility	Impact Report			(just east of Helios	In Process
	(comment period			Substation).	
	ended 17 Feb				
	2012)				
PV Plant on	Draft Scoping	Orlight SA	Up to	Approximately 41km	
Klein Rooiberg	Report –	(Pty) Ltd	150MW	north of Loeriesfontein	Approved (Not constructed)
Farm	comment period			(10km south of Helios	、/
				Substation).	

Table 11: Large-scale renewable energy developments proposed in close proximity to the PV plant as assessed in 2012

The potential for large scale visual impacts as a result of the above proposed developments in 2012 was deemed to significantly alter the sense of place and visual character of the study area, if constructed. The cumulative visual impacts of each visual receptor were then assessed and it was found that the greatest cumulative impact would be experienced by the dwelling on Narosies Farm and the dwellings in Klein Rooiberg as they would be visually exposed to the Hantam PV Solar

² As per the latest released Renewable Energy EIA Applications Database (REEA) Quarter 3 2022



Energy Facility and the PV Plant on Klein Rooiberg Farm. None of the receptors were found to be visually exposed to the CPV/PV Plant on the Farm Kaalspruit as this proposed development was too far away.

No quantification of the impacts in terms of an impact rating were made.

7.3. CUMULATIVE IMPACTS - 2023

Over the years many EIA applications for renewable energy facilities have been undertaken within the study area and greater region. The proposed PV Facility infrastructure is currently located adjacent to existing power lines, and wind energy facilities (i.e. Loeriesfontein and Khobab WEF). The proposed Loeriesfontein 3 PV Facility, although in line with current development and land use trends in the region, will certainly contribute to the increased cumulative visual impact of Solar PV Facilities in the region.

Additionally, **Map 5** illustrates that it will contribute to the increased cumulative visual impact of renewable energy facilities in the region in general, assuming that all approved renewable energy applications (i.e. Dwarsrug, Kekerboom 1 and 3 WEFs) are constructed.

It is a requirement that a visual specialist identify and quantify the cumulative visual impacts of a proposed development, propose potential mitigating measures and conclude if the proposed development will result in any acceptable loss of visual resources taking into consideration the other proposed and operational projects in the area.

The table below illustrates the assessment of the anticipated cumulative visual impact of infrastructure on sensitive visual receptors within the region.

Table 12: Impact table summarising the significance of the cumulative visual impact of the proposed Loeriesfontein 3 PV Facility when considered with other development in the area on sensitive visual receptors within the region

Nature of Impact:							
The potential cumulative visual impact of the proposed Loeriesfontein 3 PV Facility when considered with other development in the area on sensitive visual receptors within the region							
	Overall impact of the	Cumulative impact of the					
	proposed project considered	project and other projects in					
	in isolation	the area					
Extent	Very low (1)	Very low (1)					
Duration	Long (4)	Long (4)					
Magnitude	Moderate (6)	High (8)					
Probability	Probable (3)	Highly Probable (4)					
Significance	Moderate (33)	Moderate (52)					
Status (positive or negative)	Negative	Negative					
Reversibility	Reversible (1)	Reversible (1)					
Irreplaceable loss of resources?	No	No					
Can impacts be mitigated?	No						
Mitigation potential	Very Difficult						

The cumulative visual impacts of the proposed Loeriesfontein 3 PV Facility is ultimately expected to be of **moderate** significance, when considered with other development in the area on sensitive visual receptors within the region. Particularly when considering its remote location and the general low occurrence of potential sensitive visual receptors.

7.4. COMPARATIVE FINDINGS

According to the latest released Renewable Energy EIA Applications Database (REEA) Quarter 3 2022³, majority of the renewable energy facility EIA applications undertaken fall within the general region surrounding the proposed Loeriesfontein 3 PV SEF.

Comparatively since 2012 many more EIA applications for renewable energy facilities have taken place within the study area, as well as, the general region and none of the proposed facilities as outlined in 2012 (refer to **Table 11**) have been constructed, to date. Subsequently, two WEFs not accounted for in the 2012 assessment, have been constructed within the

³ It must be noted that this database is not always updated regularly and therefore some projects listed may no longer be considered for development, or no longer have valid Environmental Authorisations. The data is displayed as provided and the author does not accept responsibility for the accuracy thereof.



study area, namely, the Loeriesfontein and Khobab WEF. Additionally, no specific cumulative impact ratings were undertaken in the original 2012 VIA undertaken by SiVEST. These variations in data therefore make it difficult to comparatively compare the cumulative impacts expected in 2012 and what can be expected to date (2023). It can however, be stated that cumulatively the construction of these facilities has altered the sense of place and visual character of the study area as predicted in the original 2012 assessment.

However, while the construction of these facilities has already altered the sense of place and visual character of the study area (as predicted in 2012 by SiVEST), from a visual perspective it is preferrable that the visual impact of renewable energy facilities be consolidated in one area in order to contain the visual impact to select areas as opposed to being scattered throughout the country.

Taking into account all the above findings, the potential cumulative visual impact is therefore expected to be **within acceptable limits**, considering the approved and existing Wind Energy Facilities in the area and the existing power lines within the region.

8. MITIGATIONS

The primary visual impact, namely the presence of the proposed Loeriesfontein 3 PV Facility, is not possible to mitigate, especially in this receiving environment. Low lying vegetation, the undeveloped nature of the study area, and the high contrast of the infrastructure within the surrounding receiving environment results in a low VAC.

The following is, however, possible and was recommended as general good practice in the VIA undertaken by SiVEST in 2012:

- Carefully plan to reduce the construction period.
- Minimise vegetation clearing and rehabilitate cleared areas as soon as possible.
- Maintain a neat construction site by removing rubble and waste materials regularly.
- Make use of existing gravel access roads where possible.
- Ensure that dust suppression techniques are implemented on all access roads.
- Bury cables under the ground where possible.
- New overhead power lines should be aligned to follow exiting power lines or other infrastructure, such as roads.
- Buildings should be painted with natural tones that fit with the surrounding environment.
- Limit construction activities to day-time hours in order to prevent night lighting during construction.
- Make use of fittings that focus the light and prevent light spill.
- Direct perimeter lighting in a downward direction toward the site.
- Limit the use of flood lighting where possible.

In addition, it is recommended that the following best practice mitigation measure also be included (over and above those already provided as part of the 2012 VIA):

- Retain / re-establish and maintain natural vegetation in all areas outside of the development footprint.
- Wherever possible, use materials, coatings, or paints that have little or no reflectivity.
- Commercial messages, symbols and/logos are not permitted on structures.
- Use slight variations in topography to screen PV panels, where possible. Design linear features to follow natural land contours rather than straight lines.
- Plan ancillary infrastructure in such a way and in such a location that clearing of vegetation is minimised. Consolidate existing infrastructure as much as possible, and make use of already disturbed areas rather than pristine sites wherever possible.
- Use existing roads wherever possible. Where new roads are required, these should be planned carefully, taking
 due cognisance of the local topography. All efforts should be employed to try and align roads along the landscape
 contours wherever possible. Construction of roads should be undertaken properly, with adequate drainage
 structures in place to forego potential erosion problems.
- Some mitigation of primary and secondary impacts may be achieved by ensuring that the preservation and/or reintroduction of carefully placed vegetation be allowed for in the planning and implementation of the development. This measure will help to soften the appearance of the facility within its context and assist in breaking up the visual intrusion. Such mitigation includes the following:
 - If possible, keep the construction period to a minimum.

- Plan the placement of lay-down areas and any potential temporary construction camps in order to minimise vegetation clearing (i.e. in already disturbed areas) wherever possible.
- Restrict the activities and movement of construction workers and vehicles to the immediate construction site and existing access roads.
- Ensure that rubble, litter, and disused construction materials are appropriately stored and then disposed regularly at licensed waste facilities.
- Rehabilitate all disturbed areas, construction areas, roads, slopes etc. immediately after the completion of construction works. If necessary, an ecologist should be consulted to assist or give input into rehabilitation specifications.
- > Access roads, which are not required post-construction, should be ripped and rehabilitated.
- Monitor all rehabilitated areas for at least a year for rehabilitation failure and implement remedial action as required. If necessary, an ecologist should be consulted to assist or give input into rehabilitation specifications.
- Mitigation of other lighting impacts includes the pro-active design, planning and specification lighting for the facility. The correct specification and placement of lighting and light fixtures will go far to contain rather than spread the light. Additional measures include the following:
 - Shielding the sources of light by physical barriers (walls, vegetation, or the structure itself);
 - > Limiting mounting heights of lighting fixtures, or alternatively using foot-lights or bollard level lights;
 - > Making use of minimum lumen or wattage in fixtures;
 - > Making use of down-lighters, or shielded fixtures;
 - > Making use of Low-Pressure Sodium lighting or other types of low impact lighting.
 - > Making use of motion detectors on security lighting. This will allow the site to remain in relative darkness, until lighting is required for security or maintenance purposes.
- During Operations, monitor the general appearance of the facility, as well as, all rehabilitated areas.
 - The maintenance of the buildings and ancillary structures and infrastructure will ensure that the facility does not degrade, thus aggravating visual impact. Implement remedial action where required.
 - Roads must be maintained to forego erosion and to suppress dust, and rehabilitated areas must be monitored for rehabilitation failure. Remedial actions must be implemented as a when required.
- After decommissioning, all infrastructure should be removed and all disturbed areas appropriately rehabilitated. Monitor rehabilitated areas post-decommissioning and implement remedial actions and consult an ecologist regarding rehabilitation specifications if necessary.

The possible mitigation of both primary and secondary visual impacts as listed above should be implemented and maintained on an on-going basis.

9. CONCLUSION AND RECOMMENDATIONS

Since the initial VIA undertaken by SiVEST in 2012, the landscape characteristics comprising the topography and vegetation of the study area have remained unchanged. However, in terms of the land use, while the majority of the land uses noted in 2012 have remained the same (i.e. sheep farming, etc.), some changes have been noted and are as follows:

- In 2012, gypsum mining was noted to have taken place along the railway line within the study area. While
 these areas of disturbance are still noted on the current land cover / broad land use map (Map 4) and updated
 Google Earth aerial imagery, a comparison of current aerial imagery to historical aerial imagery take in 2012
 indicates that these areas have largely remained unchanged in size and are therefore assumed to be inactive
 mines.
- The most significant changes in land use noted between 2012 and present day (2023) is the presence of the two operational Wind Energy Facilities (i.e. Loeriesfontein and Khobab WEFs) located to the south and south west of the site. However, it must be noted that while these activities are new land uses within the study area currently, this change in land use was anticipated already in the initial 2012 study undertaken. Therefore, as predicted in the initial assessment, this change in land use is in line with the noted trends in the region at that time.
- Salt mining activities are noted to now be taking place at Boegoefontein Pan and further afield at Dwaggas Pan. These activities were not noted to be taking place in 2012, however, subsequently as of 2017 EIA applications were submitted for these activities.




Overall, despite these changes in land use, the study area has retained its predominately undeveloped, rural and natural character, as well as, low population density. Therefore, in the opinion of the author, the status of the environment has largely remained the same.

The impact ratings as determined in 2012 were expected to be contained to **low to medium** for the proposed Loeriesfontein 3 PV Facility. In comparison, it expected that the impact ratings will also be **medium to low** considering the present-day land uses and expected visual exposure. Therefore, **no increase in the visual impact is anticipated**.

The cumulative visual impacts of the proposed Loeriesfontein 3 PV Facility are ultimately expected to be of **moderate** significance, when considered with other development in the area on sensitive visual receptors within the region. Particularly when considering its remote location and the general low occurrence of potential sensitive visual receptors. The potential cumulative visual impact is therefore expected to be **within acceptable limits**, considering the approved and existing Wind Energy Facilities in the area and the existing power lines within the region

Additionally, the DFFE screening tool generated for Loeriesfontein 3 PV Facility indicates that the site has a **very high** sensitivity for landscape owing to the fact that the site is located on top of mountains/high ridges. Refer to **Map 8**.

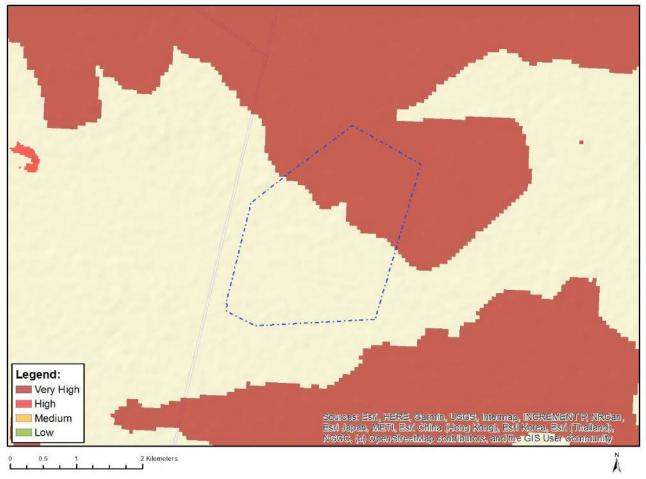

Map 8: Relative landscape (solar) theme sensitivity as per the DFFE Screening Tool for the proposed Loeriesfontein 3 PV Facility

In order to verify the overall visual sensitivity of the proposed site (as proposed by the DFFE's screening tool) in the absence of any mitigation, the following matrix was utilized:

Table 13: Matrix to determine overall visual sensitivity for the proposed Loeriesfontein 3 PV Facility

Sensitive Receptor	Very High Sensitivity 4	High Sensitivity 3	Moderate Sensitivity 2	Low Sensitivity 1
Topographic features, including mountain ridges	On topographical feature	Within 250m from base	Within 250 - 500m from base	> 500m from base



Home/farmsteads	Within 500m	Within 500m - 1km	Within 1-2 km	>2 km		
Provincial/arterial/	Within 1km	Within 1-3km	Within 3-6 Km	>6 Km		
secondary roads						
VAC	Low VAC	Moderate VAC	High VAC	Very High VAC		
Visual Quality	Natural environment intact with no built infrastructure	Natural environment intact with limited built infrastructure	Natural environment somewhat intact with fair amount of built infrastructure	Built infrastructure is dominant with little to no natural environment remaining		
Presence of existing	Absent	Very low densities	Present in moderate	High densities		
infrastructure			quantities			
Total	High (16)					

Overall visual sensitivity rating:

- Low (0-6)
- Moderate (7-12)
- High (13-18)
- Very High (19-24)

Therefore, it can be concluded that the landscape visual sensitivity of the site is actually **high**, due to the fact that no PV structures are located on mountain tops or ridges and and the general low occurrence of potential sensitive visual receptors.

Based on the above assessment, there has been no changes in the land cover and minimal changes in land uses. Additionally, the impacts as assessed today will be moderate. Therefore, it is recommended that the **proposed Part 1 Amendment extending the validity of the EA for the Loeriesfontein 3 PV SEF be supported, subject to the conditions and recommendations as stipulated in the current EA, and according to the Environmental Management Programme (EMPr), as well as, the suggested mitigation measures, as provided in this and the original Visual Impact Assessment report compiled in 2012**.

10. REFERENCES

Council for Scientific and Industrial Research (CSIR), 2015. The Strategic Environmental Assessment for wind and solar photovoltaic energy in South Africa.

DEADP, Provincial Government of the Western Cape, 2011. Guideline on Generic Terms of Reference for EAPS and Project Schedules.

Oberholzer, B. (2005). Guideline for involving visual and aesthetic specialists in EIA processes: Edition 1.

DEA, 2021. South African Renewable Energy EIA Application (REEA) Database.

SiVEST, 2012. Proposed Construction of a Wind Farm and Photovoltaic (PV) Plant near Loeriesfontein, Northern Cape Province of South Africa. Visual Impact Assessment Report – Impact Phase