





SOUTH AFRICA MAINSTREAM RENEWABLE POWER DEVELOPMENTS (PTY) LTD

Proposed Construction of the Xha! Boom Wind Farm near Loeriesfontein, Northern Cape Province Final Scoping Report

DEA Reference: Issue Date:	14/12/16/3/3/2/1018 04 August 2017
Version No.:	1
Project No.:	13622

Date:	04 August 2017
Document Title:	Proposed Construction of the Xha! Boom Wind Farm near Loeriesfontein,
	Northern Cape Province: Final Scoping Report
	Stephan Jacobs
Authors:	B.Sc. (Hons) Environmental Management & Analysis (UP)
	B.Sc. Environmental Sciences (UP)
Version Number:	1
Checked by:	Andrea Gibb
Approved:	Tarryn Curtis
Signature:	Terty
For:	SiVEST Environmental Division

COPYRIGHT IS VESTED IN SIVEST IN TERMS OF THE COPYRIGHT ACT (ACT 98 OF 1978) AND NO USE OR REPRODUCTION OR DUPLICATION THEREOF MAY OCCUR WITHOUT THE WRITTEN CONSENT OF THE AUTHOR

KEY PROJECT INFORMATION

FARM DESCRIPTION	21 DIGIT SURVEYOR GENERAL CODE
Entire part of Portion 2 of the Farm Georg's Vley No. 217	C0150000000021700002

XHA! BOOM WIND FARM: APPLICATION SITE			
	CORNER POINT COORDINATES		
POINT	SOUTH	EAST	
XW_01 (NW)	S30° 16' 50.056"	E19° 13' 55.084"	
XW_02 (NE)	S30° 15' 14.650"	E19° 17' 53.313"	
XW_03 (SE)	S30° 21' 22.040"	E19° 16' 8.738"	
XW_04 (SW)	S30° 19' 30.216"	E19° 14' 19.283"	
CENTRE POINT COORDINATES			
POINT	SOUTH	EAST	
XW_05	S30° 18' 2.587"	E19° 15' 47.612"	

Refer to **Appendix 8A** for the full list of coordinates.

TITLE DEEDS: These will be included in the Draft Environmental Impact Assessment Report (DEIAr) in **Appendix 8B**.

PHOTOGRAPHS OF SITE:





TYPE OF TECHNOLOGY: Wind Turbines and associated infrastructure


STRUCTURE HEIGHT: Hub height up to 160m, and rotor diameter up to 160m¹.

SURFACE AREA TO BE COVERED: The total area of the application site is 3804 hectares. The total buildable area for the proposed Xha! Boom Wind Farm is approximately 1897.20 hectares. The area occupied by each wind turbine will be up to 0.5 hectares (85m x 60m). This includes the hard standing area / platform of approximately 2 400m² (60m x 40m) per turbine that will be required for turbine crane usage. The temporary construction lay-down / staging area will be approximately 10 000m² and will include an access road and contractor's site office area of up to 5 000m². The administration and warehouse buildings will have a footprint of approximately 5 000m². Internal access roads with a maximum width of 20m are initially being proposed for the construction phase. This is however only temporary as the width of the proposed internal access roads will be reduced to approximately 6-8m for maintenance purposes during the operational phase. In addition, the internal access roads will include the net load carrying surface excluding any V drains that might be required. The final design details are yet to be confirmed. These details will become available during the detailed design phase of the project, after the project has been selected

¹ The AW125/3000 wind turbine generator which has a hub height of 100m, a rotor diameter of 125m and an output of 3MW was used to assess the EMI and RFI. Forty seven (47) turbines with a hub height of 150m was used during the calculations as requested by Mainstream. It should be noted that a more suitable turbine with different specifications may be available once the proposed wind farm is ready for construction. As such, turbines with a hub height of up to 160m and a rotor diameter of up to 160m will need to be authorised. A more accurate path loss and risk assessment cannot be re-done until the turbine has been selected and the layout finalised. Prior to construction a new path loss and risk assessment will be undertaken based on a final layout, using a worst case scenario turbine and approved by the SKA before any turbines are installed on the proposed site. A letter from ICT to confirming this has been included in this Final Scoping Report (FSR) in **Appendix 8C**.

SOUTH AFRICA MAINSTREAM RENEWABLE POWER DEVELOPMENTS (PTY) LTD prepared by: SiVEST Environmental Proposed Xha! Boom Wind Farm - Final Scoping Report

as a Preferred Bidder project under the Department of Energy's (DoE) Renewable Energy Independent Power Producers Procurement Programme (REIPPPP)

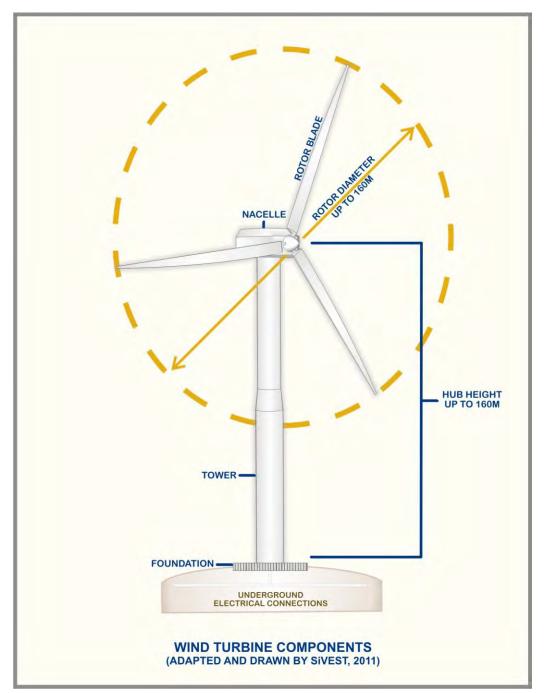

TURBINE DESIGN: The final design is not available but average specifications are presented below:

Figure i. Example of a Wind Turbine.

STRUCTURE ORIENTATION: Wind Turbines - The turbine blades will not be fixed and will be able to rotate in order to catch the prevailing winds.

FOUNDATION DIMENSIONS: Each wind turbine, depending on geotechnical conditions, will have a foundation diameter of up to 25m, and will be approximately 3m deep. The area occupied by each wind turbine will be up to 0.5 hectares ($85m \times 60m$). The excavation area, depending on geotechnical conditions, will be approximately 1 000m² in sandy soils due to access requirements and safe slope stability requirements. A hard standing area / platform of approximately 2 400m² ($60m \times 40m$) per turbine will be required for turbine crane usage.

EXPORT CAPACITY: The project will have a maximum export capacity of up to 235MW. The proposed wind farm will consist of up to 70 turbines, each with a generation capacity between 3 and 5MW.

A3 Maps of all smaller maps included in the report are included in **Appendix 5**.

SOUTH AFRICA MAINSTREAM RENEWABLE POWER DEVELOPMENTS (PTY) LTD

PROPOSED CONSTRUCTION OF THE XHA! BOOM WIND FARM NEAR LOERIESFONTEIN, NORTHERN CAPE PROVINCE

FINAL SCOPING REPORT

Executive Summary

South Africa Mainstream Renewable Power Developments (Pty) Ltd (hereafter referred to as Mainstream) are proposing to construct a wind farm and associated infrastructure near Loeriesfontein in the Northern Cape Province of South Africa (hereafter referred to as the 'proposed development'). The proposed development will consist of a 235MW maximum export capacity wind farm referred to as Xha! Boom Wind Farm. The overall objective of the proposed development is to generate electricity to feed into the National Grid. SiVEST Environmental Division has subsequently been appointed by Mainstream as the independent Environmental Assessment Practitioner (EAP) to undertake the Environmental Impact Assessment (EIA) for the proposed construction of the Xha! Boom Wind Farm and associated infrastructure.

Additionally, Mainstream are proposing to develop the associated on-site Xha! Boom substation and power line to Helios transmission substation, both with a capacity of up to 132kV. This associated electrical infrastructure will however require a separate Environmental Authorisation (EA) and is being conducted as a part of a separate Basic Assessment (BA) process. The 132kV Xha! Boom power line has been included in the wind farm EIA for background information but will be authorised under a separate BA to allow for handover to Eskom. The proposed 132kV on-site Xha! Boom substation has been included in the wind farm EIA and in the on-site substation and power line BA to allow for handover to Eskom. Although the wind farm and associated electrical infrastructure will be assessed separately, a single public participation process is being undertaken to consider both of the proposed developments. The potential environmental impacts associated with both developments will be assessed as part of the cumulative impact assessment. The DEA reference number allocated for the proposed 132kV on-site Xha! Boom substation and associated 132kV power line has not yet been allocated by the DEA. This will be provided in the Final Environmental Impact Assessment Report (FEIAr).

The proposed development requires Environmental Authorisation (EA) from the Department of Environmental Affairs (DEA). However, the provincial authority will also be consulted (i.e. Northern Cape Department of Environment and Nature Conservation (NC DENC)). The EIA for the proposed development will be conducted in terms of the EIA Regulations promulgated in terms of Chapter 5 of the National Environmental Management Act (NEMA), which came into effect on the 8th of December 2014, and as amended on 7th April 2017. In terms of these regulations, a full EIA is required for the proposed

development. All relevant legislations and guidelines (including Equator Principles) will be consulted during the EIA process and will be complied with at all times.

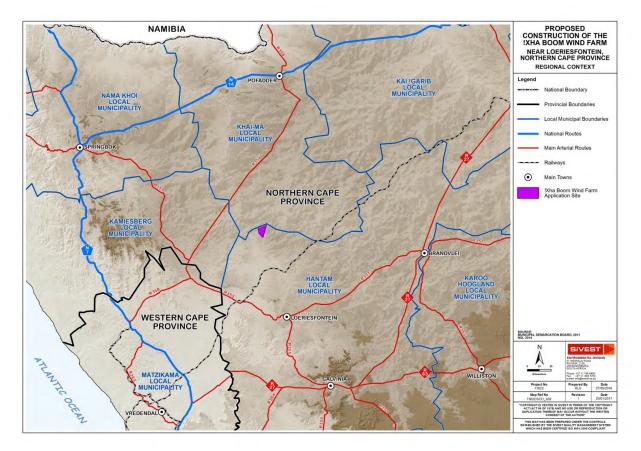


Figure ii: Regional context for the proposed Xha! Boom Wind Farm

Xha! BOOM WIND FARM: APPLICATION SITE			
	CORNER POINT COORDINATES		
POINT	SOUTH	EAST	
XW_01 (NW)	S30° 16' 50.056"	E19° 13' 55.084"	
XW_02 (NE)	S30° 15' 14.650"	E19° 17' 53.313"	
XW_03 (SE)	S30° 21' 22.040"	E19° 16' 8.738"	
XW_04 (SW)	S30° 19' 30.216"	E19° 14' 19.283"	
	CENTRE POINT COOF	RDINATES	
POINT	SOUTH	EAST	
XW_05	S30° 18' 2.587"	E19° 15' 47.612"	

Refer to Appendix 8A for the full project coordinates.

The following assessments were conducted during the Scoping Phase to identify and assess the issues associated with the proposed development:

- Biodiversity Assessment;
- Avifauna Assessment (including pre-construction monitoring);
- Bat Assessment (including pre-construction monitoring);
- Surface Water Impact Assessment;
- Soils and Agricultural Potential Assessment;
- Noise Assessment;
- Visual Impact Assessment;
- Heritage Assessment;
- Socio-economic Impact Assessment;
- Geotechnical Assessment;
- Traffic Impact Assessment; and
- Path Loss and Risk Assessment to the Square Kilometre Array (SKA)

It should be noted that the specialists originally assessed a hub height of up to 150m and rotor diameter of up to 150m. Prior to submission of the application form the hub height was amended to be up to 160m and a rotor diameter of up to 160m. Some of the specialists also assessed a 47 turbine layout which has subsequently been amended to be up to 70 turbines. Therefore the specialist reports have been updated based on the updated specifications or addendum letters addressing the change in impact have been drafted.

These studies will also be undertaken to inform the impact assessment to take place in the EIA phase of the proposed development. In the Scoping Phase the specialists assessed the entire proposed development area (Entire part of Portion 2 of the Farm Georg's Vley No. 217), during the EIA phase the specialist reports will assess specific impacts of the proposed turbine locations and wind farm infrastructure in detail.

Based on the scoping studies which were conducted, a few potentially sensitive sites have been identified within the study area. These have informed the preliminary assessment of layout alternatives which are included in **Chapter 7** and will be further assessed during the EIA phase. The table below summarises the specialist findings of the Scoping Report for the entire project.

Biodiversity	The Xha! Boom Wind Farm consists largely of arid grassland or low open shrubland
	on flat plains and gently sloping hills that are low sensitivity, with few species of
	conservation concern. Development in these areas would generate low impacts of
	local significance only. The only sensitive feature present at the site are some minor
	drainage lines in the south and some rocky outcrops along the transitional area
	between the grasslands of the east and the arid shrubland of the west. These

	however occupy a small proportion of the site and these can easily be avoided by the
	final layout of the development.
	Cumulative impacts as a result of the development are likely to be relatively low as the footprint of the development is quite low and the intensity of development in the wider area is still low despite the fact that a node of renewable energy is developing around the Helios substation. In addition, there are no specific features of the Xha! Boom development area which would indicate that it is more important than the surrounding area for faunal movement or landscape connectivity. The contribution of the Xha! Boom development to cumulative impact is thus likely to be relatively low and would operate at a local scale only.
	With the application of relatively simple mitigation and avoidance measures, the impact of the Xha! Boom Wind Farm can be reduced to a low overall level. There are no specific long-term impacts likely to be associated with the wind farm that cannot be reduced to an acceptable level through mitigation and avoidance. As such, there are no fatal flaws associated with the development and no apparent reasons
A 16	that it should not proceed to the EIA phase.
Avifauna	Information on the micro habitat level was obtained through a pre-construction monitoring programme which was conducted over four seasons between November 2015 and December 2016. The proposed Mainstream Xha! Boom Wind Farm will have a variety of impacts on avifauna which range from low to high. Displacement of priority species due to disturbance during construction phase is likely to be a temporary medium negative impact, but can be reduced to low with the application of mitigation measures. Displacement of priority species due to habitat destruction during construction phase is likely to be a medium negative impact and will remain so, despite the application of mitigation measures. Displacement of priority species due to disturbance during the operational phase is likely to be of low significance and it could be further reduced through the application of mitigation measures, namely the restriction of operational activities to the plant area and no access to other parts of the property unless it is necessary for wind farm related work. Collisions of priority species with the turbines in the operational phase are likely to be a high negative impact but it could be reduced to medium negative through the application of mitigation measures. The electrocution of priority species on the internal MV power lines is rated as a potentially medium impact which could be reduced to low through the use of bird friendly designs. Finally, it is concluded that, after taking into account the expected impact of proposed renewable energy projects within a 40km radius around Helios Main Transmission Substation (MTS) that the cumulative impact of the proposed Xha! Boom Wind Farm on priority avifauna, if appropriate mitigation is implemented, will range from minor to insignificant.

	It should be noted that an addendum report was compiled by the Avifauna specialist in order to assess whether the conclusions and recommendations of the Bird Impact Assessment Report compiled in December 2016 will be affected by a change in the proposed turbine dimensions from a hub height of up to 150m and rotor diameter of up to 150m, to a hub height of up to 160m and a rotor diameter of up to 160m. Assuming a 160m blade diameter and a 160m hub height, it means maximum height of the blade will be 240m (previously 225m) and minimum height will be 80m (previously 75m).
	 The conclusions and recommendations of the original Bird Impact Assessment Report remains unchanged by the proposed change in turbine dimensions. The reason for that are as follows: While the risk rating for Martial Eagle has increased with the new turbine dimensions, it is still below the average risk rating for priority species; The overall risk rating for priority species has increased by only 7.45%; and
	 The weight of published findings indicate that rotor swept area as a stand- alone issue is not a key factor in determining collision risk.
Bats	The site was visited over the period of November 2015 to December 2016 wherein data was collected from the five 10m mast and one meteorological mast, where after the systems were decommissioned. The long-term data was analysed by means of identifying the bat species detected by the monitoring systems and the periods of high bat activity. A number of technical failures occurred with the monitoring systems. The failures should not compromise the study since an adequate amount of data was recorded during the 12 months.
	<i>Tadarida aegyptiaca</i> is the most abundant bat species recorded by all systems. Common and abundant species, such as <i>Neoromicia capensis</i> , <i>Tadarida aegyptiaca</i> and <i>Miniopterus natalensis</i> , are of a larger value to the local ecosystems as they provide a greater contribution to most ecological services than the rarer species due to their higher numbers. <i>Miniopterus natalensis</i> is the only migratory species detected on site. It was detected by all the monitoring systems, with Short Mast 3 detecting the highest number of passes. The results of the full 12 months monitoring study were analysed for the presence of a migratory event in order to determine whether the site is located within a migratory route. There were no signs and activity levels indicative of a migratory event however, an event may occur in the future and the Operational Phase Bat Monitoring Study must be designed such that a migratory event would be detected if it occurred. Met Mast monitoring system indicates the highest amount of bat passes, followed by Short Mast 3.
	Short Mast 2 shows a low sum of bat passes over the first three-month monitoring period due to a fault with the detector software causing the system to freeze and not

record for the full monitoring period. Short Mast 1 had no data for the months of April, June, and July 2016 due to system failures.

The average nightly bat passes per month is used to show the general trend in bat activity across the different month of the year. All the masts show higher bat activity from January to April with predominant peaks for the month of March, except for Short Mast 4 which has a peak in January 2016, and except for Short Mast 2 which was not recording during January as explained above. Bat activity decreased as the seasons changed into winter. An increase in bat activity, for all the monitoring systems, occurred again from August to November as the seasons changed from winter to spring.

A sensitivity map was drawn up indicating potential roosting and foraging habitat, which is included in **Chapter 5.8.3 Section 5.9.4** of this report. The Moderate bat sensitivity areas and associated buffer zones must be prioritised during operational monitoring and preferably be avoided during turbine placement, if another feasible option is available. There are however no turbines located within moderate sensitivity areas. The High Bat Sensitivity areas are expected to have elevated levels of bat activity and support greater bat diversity. High Bat Sensitivity areas are 'no – go' areas due to expected elevated rates of bat fatalities due to wind turbines. Turbines located within high sensitivity areas and their buffers must be moved out of high sensitivity areas and buffers or removed from the layout.

Peak activity times across the night and monitoring period were identified, as well as wind speed and temperature parameters during which most bat activity was detected. Mitigation is expected to be implemented, if necessary, once the turbines become operational. The proposed mitigation measures include, but are not limited to the following:

- Adhere to the sensitivity map during turbine placement. Blasting should be minimised and used only when necessary. A Bat Specialist should be consulted before blasting of a rocky cliff face or rocky cavernous area. The mitigation measures will reduce the impact that blasting and earthworks will have on the environmental parameter, through avoiding sensitive areas.
- Avoid areas of moderate and high bat sensitivity and their buffers. Adhere to
 operational mitigation measures described in Section 7 of this report. An
 operational phase bat monitoring study must be implemented as soon as the
 facility has been constructed.
- Utilize lights with wavelengths that attract less insects (low thermal/infrared signature). Unless required for safety or security purposes, lights should be switched off when not in use or equipped with passive motion sensors. This mitigation measure will reduce the likelihood of certain bat species being favoured.

r	
	 Keep to designated areas when storing building materials, resources, turbine components and/or large vehicles and keep to designated roads with all large vehicles. Damaged areas not required after decommissioning should be rehabilitated by an experienced vegetation succession specialist. This mitigation measure will reduce the degree of habitat loss.
	The proposed mitigation described above and in Section 6.3.3 of this report, follows the precautionary approach strongly and therefore the mitigations will be adjusted and refined during a post-construction bat monitoring study.
	It should be noted that an amendment letter has been compiled by the Bat specialist in order to assess whether the proposed amendments (a change in the proposed turbine dimensions from a hub height of up to 150m and rotor diameter of up to 150m, to a hub height of up to 160m and a rotor diameter of up to 160m) will affect the larger outcomes, conclusions and impact assessment as assessed during the bat EIA and long-term preconstruction study, as well as to determine whether the amendments are acceptable from a bat sensitivity perspective.
	It was deemed that the proposed increase in rotor diameter, in combination with the proposed increased hub height will result in an increase of 5m for the minimum rotor swept ground clearance. In other words the lowest rotor swept height will be further away from the ground. Such a difference is minimal but still beneficial for bat conservation as bat activity and diversity decreased with height from ground level. However, the larger rotor diameter will result in a larger airspace occupied per turbine which will slightly increase the probability of impacting bats. These two effects can be considered as cancelling each other out.
	Therefore, considering all factors, the proposed amendments will not affect the larger outcomes, conclusions and impact assessment as assessed during the bat EIA and long-term preconstruction study, and is therefore still acceptable from a bat sensitivity perspective.
Surface water	Findings from the database assessment showed that there is only one (1) natural depression wetland. This wetland is not considered to be a Wetland Freshwater Ecosystem Priority Area (WETFEPA). Aside from the wetland, two (2) non-perennial watercourses were identified in the Northern Cape ENPAT (2000) database. No other watercourses were identified from the NFEPA (2011) database. No other surface water resources were identified from the available databases.
	 In terms of the desktop delineation exercise, the following surface water resources were identified: Two (2) Depression Wetlands; Three (3) Major Drainage Line (drainage lines with channel width >5m);

Two hundred and thirty, six (236) Drainage Lines (drainage lines with a channel width <5m).

Between the database findings and the desktop delineation information, the identified features are to be earmarked for groundtruthing in the fieldwork phase. A refinement of the surface water resources will be undertaken in the impact phase pending the fieldwork findings. A provisional buffer zone of 50m has been implemented at this stage for all surface water resources. Pending the results of the in-field groundtruthing and verification exercise, the buffer zone may be increased or decreased depending on the assessment findings.

A comparative assessment was undertaken to determine the environmentally preferred alternative (from a surface water perspective) for the proposed substation. Based on the comparative assessment, the preferred alternative site for the proposed substation was Substation Option 1.

In terms of NEMA (1998) and the EIA Regulations (2014), as no specific layout is available at this time, it is provisionally identified that Activities 12 and 19 of Government Notice 983 Listing Notice 1 are identified that may be triggered thereby requiring Environmental Authorisation (EA). In terms of the National Water Act (NWA) (1998), it has been identified that there are a number of surface water resources which may be affected and it is therefore possible that water uses (c) and (i) may be applicable, thereby requiring a water use license. The applicability of these environmental activities and water uses can ultimately only be confirmed once a more detailed layout is available.

Potential cumulative impacts were assessed given that numerous proposed and currently constructed renewable energy developments can be found in the surrounding area. As such, it was found that from a direct cumulative potential impact perspective, where there is no direct impact to surface water resources on the proposed project site, there will be no direct cumulative impact to surface water resources from a project site specific level. The nearest surrounding development that could potentially be impacted as a result of the proposed development from an indirect perspective is the Kokerboom 2 Wind Farm. The considerable distance (9km) and separation by two watersheds between the proposed development and the Kokerboom 2 Wind Farm mean that it is therefore highly unlikely that the proposed development will affect the Kokerboom 2 Wind Farm. Over and above the negligible potential cumulative impact to Kokerboom 2 Wind Farm, the potential cumulative impact on the remaining surrounding renewable energy developments is negligible for the same reasons as stated above. The negligible cumulative impact is compounded by the fact that there is an increased distance to the remaining surrounding proposed renewable energy developments.

Soils and	The key findings of the Soils and Agricultural Potential scoping study are:
Agricultural	 Soils across the site are predominantly shallow, sandy soils on underlying rock
Potential	or hard-pan carbonate, of the Coega, Mispah, Glenrosa and Askham soil forms.
	The major limitations to agriculture are the extremely limited climatic moisture
	availability and the poor soils.
	• As a result of these limitations, the site is unsuitable for cultivation and
	agricultural land use is limited to low intensity grazing.
	The land capability is classified as Class 7 - non-arable, low potential grazing
	land. The site has a very low grazing capacity of 45 hectares per large stock unit.
	There are no agriculturally sensitive areas and no parts of the site need to be
	avoided by the development.
	The significance of all agricultural impacts is kept low by two important factors.
	The first is that the actual footprint of disturbance of the wind farm is very small
	in relation to the available grazing land. The second is the fact that the proposed
	site is on land of extremely limited agricultural potential that is only viable for low
	intensity grazing.
	 Six potential negative impacts of the development on agricultural resources and
	productivity were identified as:
	• Loss of agricultural land use caused by direct occupation of land by the
	energy facilities' footprint.
	 Soil Erosion caused by alteration of the surface characteristics.
	 Generation of dust caused by alteration of the surface characteristics.
	 Loss of topsoil in disturbed areas, causing a decline in soil fertility.
	 Degradation of surrounding grazing land due to vehicle trampling.
	 Soil contamination from hydrocarbon spills during construction.
	Two potential positive impacts of the development on agricultural resources and
	productivity were identified as:
	• Generation of additional land use income through renting land for energy
	generation which makes a positive contribution to farming cash flow and
	thereby improves the financial sustainability of farming on site.
	• Increased security against stock theft due to the presence of the energy
	facility.
	 All impacts were assessed as having low significance.
	Because of the low agricultural potential, and the consequent low agricultural
	impact, there are no restrictions relating to agriculture which would preclude
	authorisation of the proposed development.
	 Despite any cumulative regional impact that may occur, it is preferable to incur a
	loss of agricultural land in such a region, without cultivation potential, than to lose
	agricultural land that has a higher potential, to renewable energy development
	elsewhere in the country.
	There are no conditions resulting from this assessment that need to be included
	in the environmental authorisation.

	- There is no difference and therefore no preference between the
	 There is no difference and therefore no preference between the proposed alternatives, in terms of agricultural impacts.
Noise	The Noise Scoping Assessment indicates that the proposed project could have a noise impact on the surrounding area, as there are noise-sensitive developments within the (potential) area of acoustical influence of the construction activities and operating wind turbines.
	The construction of access roads as well as construction traffic may increase the noise levels sufficiently to result in noise impacts of medium significance. Mitigation measures are available and easy to implement to reduce the potential significance of the noise impact to low.
	The potential noise impact of operational activities is of a low significance, similarly the potential cumulative noise effect when all the surrounding wind turbines are operating is of low significance.
	There is a high confidence in the finding of this report, and with the implementation of the mitigation measures there exists a low potential for a noise impact. An additional noise impact assessment is not required for the EIA phase, as it will not provide additional information, however the turbine layout put forward in the plan of study will need to be reassessed and the cumulative impacts will need to be further investigated.
	During the Environmental Impact Assessment (EIA) phase the noise models will be redone based on the revised turbine layout that takes the sensitive areas into account. Based on the layout assessed in the Scoping Phase it was concluded that the project can be authorised (subject to the implementation of the mitigation measures agreeable with the identified receptors) from a noise perspective.
Visual	A scoping-level study has been conducted to identify the potential visual impact and issues related to the development of the Xha! Boom Wind Farm near Loeriesfontein, in the Northern Cape Province. The study area has a largely natural, untransformed visual character although there are several renewable energy developments (solar and wind) proposed within relatively close proximity to the proposed wind farm. These facilities and their associated infrastructure, will significantly alter the visual character and baseline in the study area once constructed and make it appear to have a more industrial-type visual character. The proposed wind farm development is likely to visually influence only one (1) farmstead / homestead identified within the visual assessment zone, therefore this is regarded as a potentially sensitive visual receptor location. The sensitivity of the receptor locations will need to be confirmed through further assessment in the next phase of the study. The nature of the visual impacts associated with a development of this size on the receptors in the study area could
	be significant.

	An overall impact rating was also conducted as part of the Scoping Phase in order to allow the visual impact to be assessed alongside other environmental parameters. The assessment revealed that overall the proposed Xha! Boom Wind Farm is expected to have a low visual impact during construction and a medium visual impact during operation, with relatively few mitigation measures available. In addition, the infrastructure associated with the proposed Xha! Boom Wind Farm would have a low
	visual impact during construction and a low visual impact during operation. There is no preference between the two (2) proposed 132kV onsite IPP Substation alternatives from a visual perspective. The close proximity of the substation locations and the flat nature of the topography are expected to result in equal visual impacts.
	Further assessment will however be required in the EIA-phase to investigate the sensitivity of the receptor locations to visual impacts associated with the proposed development and to quantify the impacts that would result.
Heritage	The Heritage Scoping Report (HSR) completed in October 2016 has shown that the proposed Xha! Boom site to be developed as a Wind Farm may have heritage resources present on the property. This has been confirmed through archival research, evaluation of aerial photography of the sites and field work.
	The subsequent field work completed for the October 2016, has confirmed the presence of 3 heritage resources as well as several areas with existing infrastructure such as fenced off camps, windmills and reservoirs.
	The design process and methodology followed by the developer for this project will enable the heritage assessment to provide input into the proposed layouts before the impact assessment. This resulted in cognisance being taken of the positions of the heritage resources and thus the reduction of impacts at an early design phase.
	The mitigation measures proposed is a follows:
	 <u>Pre-Construction</u> 1. A detailed walk down of the final approved layout will be required before construction commence;
	 Any heritage features of significance identified during this walk down will require formal mitigation or where possible a slight change in design could accommodate such resources. A management plan for the baritage resources peeds then to be compiled and
	 A management plan for the heritage resources needs then to be compiled and approved for implementation during construction and operations.
	Palaeontology

	The proposed Xha! Boom wind farm development is unlikely to pose a substantial threat to local fossil heritage. In Palaeontological terms the significance is rated as LOW (negative). Consequently, pending the discovery of significant new fossil material here, no further specialist studies are considered to be necessary.
	However, should fossil remains be discovered during any phase of construction, either on the surface or exposed by fresh excavations, the Environmental Control Officer (ECO) responsible for these developments should be alerted immediately. Such discoveries ought to be protected (preferably <i>in situ</i>) and the ECO should alert South African Heritage Research Agency (SAHRA) so that appropriate mitigation (e.g. recording, sampling or collection) can be taken by a professional palaeontologist.
	The specialist involved would require a collection permit from SAHRA. Fossil material must be curated in an approved collection (<i>e.g.</i> museum or university collection) and all fieldwork and reports should meet the minimum standards for palaeontological impact studies developed by SAHRA.
	Comparative Assessment of Alternatives A comparative assessment of the preferred substation position has shown that from a heritage perspective both area considered as good options. Substation Option 1 is however preferred as Substation Option 2 will impact on a low significance heritage find.
	<u>Cumulative Impact</u> It is the Heritage Specialist's considered opinion that this additional load on the overall impact on heritage resources will be low. With a detailed and comprehensive regional dataset this rating could possibly be adjusted and more accurate.
Socio-economic	 Relevant national, provincial and local government policies reveal that the development of Renewable Energy (RE) technologies is strongly supported both: At the national level, developing an RE sector is supported with respect to the need to diversify and expand energy supply At the provincial and local level, RE sector development support is premised on the prioritisation of regional economic stimulation as well as the creation of employment opportunities for the benefit of local people.
	 The socio-economic impacts associated with the proposed development include, but are not limited to the following: Increased production and temporary stimulation of GDP-R; Skills development due to the creation of new employment opportunities; Increased household income and improved standard of living;

	 Investment in the local community and economic development projects as part of a Social Economic Development (SED) and Enterprise Development Plan (EDP); Increase in government revenue due to the capital investment; Change in demographics due to migration of workers from other areas and influx of jobseekers; Increase in social pathologies associated with the influx of migrant labourers and job-seekers to the area; Added pressure on basic services and social and economic infrastructure; Establishment of the informal hospitality industry due to increased demand for accommodation; Sustainable increase in GDP of the national and local economies through operation and maintenance activities; Sustainable increase in government revenue stream; Creation of long term employment in local and national economies through operation and maintenance activities; Skills development due to the creation of new sustainable employment opportunities; Increased household income; Improved standard of living of households directly or indirectly benefiting from created employment opportunities; and
	The overall consideration of the favourable alignment of local, regional and national policy with the proposed project as well as the complementary nature of wind farms and the current land use of the project site is evidence that no fatal flaws are present from the socio-economic perspective. Considering all the potential socio-economic impacts for both the construction and operational phase, with respect to the substation, there is no differentiation that can be made regarding the potentially ensued socio-economic effects as they will remain the same regardless of the substation site alternative chosen.
Geotechnical	From a geotechnical perspective, the major findings suggest that the site is relatively flat with local ridges associated with dolerite intrusions. The only prominent hill is Groot Rooiberg, on the southern site boundary. The water table is 10m below the ground level during the winter months and consequently the site is dry throughout the year.
	Greening interventions are recommended during construction of the wind farm. These include water and energy related interventions, material re-use and solid waste management. The site, being vacant, currently generates no solid waste and it is proposed that onsite composting, sorting and recycling will reduce the overall volume of waste being collected and removed from the site.

Traffic	Both the abnormal and legal vehicles were reviewed in terms of their type of activity;
	i.e. construction traffic, traffic associated with the transportation of the wind turbine
	components, or traffic associated with the transportation of materials, equipment and
	people. The key issues associated with the construction and operational phases of
	the project that will be assessed as part of the transport study are:
	 Increase in traffic generation throughout the lifetime of the project;
	 Increase in road maintenance required; and Ability to transport wind turbing components to gits opticly and officiently.
	 Ability to transport wind turbine components to site safely and efficiently.
	With regards to transport, an assessment was undertaken to determine the impact
	that the proposed wind farm will have on the operation of the existing road network,
	both during construction and post completion. It is anticipated that during construction
	up to 100 vehicles will travel to the site in the morning peak hour, the majority
	travelling from the proposed construction camp along the R358. In addition, other
	transportation aspects relating to the proposed project, including access, internal
	circulation and abnormal vehicle transportation were investigated and form part of
	this report. The report recommends the primary access to the site to be via the R358
	which links directly to the N7. This route is appropriate for both standard vehicles as
	well as abnormal vehicles carrying the wind turbine components.
Radiation	In order to determine whether the planned wind farm development could have any
Emissions (SKA)	influence on the Square Kilometre Array (SKA), Mainstream requested a risk
	evaluation of the planned development to SKA activities. This risk assessment
	assumes the use of 47 Acciona AW 125 TH100A turbines within the Xha! Boom
	development and will be compared to known radiated emission data from the AW125
	TH100A Acciona WTG as presented in the Acciona Control Plan. The Acciona AW
	125 TH 100A is the model within the AW 3000 platform that will be evaluated for this
	project. This assessment will be updated based on additional measurement results
	and design information as it becomes available.
	The intent of this evaluation is to ensure that the Xha! Boom facility poses a low risk
	of detrimental impact on the SKA by using known radiated emission amplitudes of
	the Acciona AW3000/125 TH100 50Hz wind turbine. Specific mitigation measures to
	be implemented on the AW3000/125 TH100 50Hz wind turbine in order to achieve
	40 dB of attenuation has been reviewed and agreed by SKA South Africa as
	described in the Acciona Control Plan.
	The current Emission Control Plan for the AW125 TH100A WTG provides for a 40dB
	reduction in radiated emissions to ensure the cumulative emission level of previously
	assessed wind farms where the Acciona AW 125 TH100A WTG will be used is within
	the requirements of SKA. This requirement is based on measurements on the
	Acciona AW 125 TH100A WTG at the Gouda facility in South Africa and Barosoain
	wind farm, Navarra, Spain. Two WTG locations (WTG 1 and WTG 36) and two SKA

installations (Rem Opt 7 and SKA 2377) were used for the evaluation. Due to natural
terrain barriers and the 52.6km distance between Xha! Boom and Rem-opt 7, the
closest SKA unit, no degradation of performance is expected when the mitigated AW
125 TH100A Acciona turbines are installed ² . This shown by the 10dB to 20dB higher
path loss for Xha! Boom compared to Garob.
The Karoo area is ideally suited for the installation and commissioning of renewable
energy projects, but is also host to the Department of Science and Technology's SKA
radio telescope project. Due to the sensitivity of the telescope receivers, there is a
risk that unintentional emissions from the systems and associated equipment
associated with renewable energy projects will desensitize or saturate the SKA
receivers resulting in interference to celestial observations and/or data loss. Such
interference is typically referred to as 'Radio Frequency Interference' (or 'RFI'). The
NITIA TM-89-139 calculation of 17.9dB (REM OPT 7 location) and 18.4dB (SKA ID
2377 location) to be added to the emissions from a single unit to allow for the
cumulative effect of 500 units appears to be conservative when compare to general
man-made noise data (<10dB increase measured at various locations). The >60
degree beamwidth assumed during the NITIA TM-89-139 calculations will result in
over estimation of the cumulative effect due to a higher number of emitters in the
beamwidth. The 40dB mitigation is a border line figure when considering all the
adjacent projects resulting in a relatively high emitter density.
The second se
To verify overall wind farm emissions, ambient measurements should be done at the
new site before construction starts. Tests points should be carefully selected based
on test equipment sensitivity with the objective to observe the increase in ambient
emissions as construction progresses. Final site tests will be done on completion of
the project to confirm the radiated emission levels. Although not anticipated, proper
mitigation measures on identified emitters will be studied and implemented if final test
shows emissions exceeding the SKA threshold.
It should be noted that the encodedict was requested to compile a letter which details
It should be noted that the specialist was requested to compile a letter which details
the impacts associated with the change in the proposed turbine dimensions from a
hub height of up to 150m and rotor diameter of up to 150m, to a hub height of up to
160m and a rotor diameter of up to 160m from an SKA perspective.
According to the specialist, the risk of interference between wind turbines and the
SKA radio telescope is primarily a function of the following factors:
 Radiated emission amplitude from turbine;

² Please note that the EMI and RFI studies were based on worst case scenario turbines. Due to technology improvements a different turbine may be used for the proposed development. However this would be subject to the same EMI and RFI studies.

 Turbine hub height; Number of turbines; Distance between turbine and SKA infrastructure; and Terrain between the turbine and the SKA infrastructure (line of sight or natural barriers between the installations).
The dB increase in the electromagnetic noise by increasing the number of turbines from 47 units to 70 units can be estimated with the standard 10 x Log (N), where N is the number of turbines, formula as a reasonable assumption. Changing the number of turbines from 47 to 70 will therefor result in a 13.6dB increase in electromagnetic noise.
Increasing the turbine hub height could result in the nacelle being elevated above the natural terrain barriers that provided a shield between the turbine and the SKA infrastructure at a lower hub height. The change in interference risk profile will have to be re-evaluated if the nacelle height is different from the initial proposed height to verify the line of sight/ terrain shielding conditions.
Further studies would in any case be required at a later stage once a final turbine type has been confirmed, at this stage all these uncertainties would be clarified.

Based on the above mentioned studies, the Scoping Report has identified several aspects that warrant further investigation in the EIA Phase. These are as follows:

- Biodiversity Assessment;
- Avifauna Assessment;
- Bat Assessment;
- Surface Water Impact Assessment;
- Soils and Agricultural Potential Assessment;
- Noise Assessment
- Visual Impact Assessment;
- Heritage Assessment; and
- Socio-economic Impact Assessment.

SOUTH AFRICA MAINSTREAM RENEWABLE POWER DEVELOPMENTS (PTY) LTD

PROPOSED CONSTRUCTION OF THE XHA! BOOM WIND FARM NEAR LOERIESFONTEIN, NORTHERN CAPE PROVINCE

FINAL SCOPING REPORT

Contents

Page

1	INTR	ODUCTION	.18
	1.1	Objectives of the Scoping Phase	1
		Applicable Documentation	
		Specialist Studies	
	1.4	Decision-Making Authority Consultation	6
	1.5	Expertise of Environmental Assessment Practitioner	9
	1.6	FinalScoping Report Structure	.10
2	TECH	INICAL DESCRIPTION	.11
	2.1	Project Location	.11
	2.2	Wind Farm Technical details	.12
	2.2.1	Turbines	-
	2.2.2	Electrical Connections	. 15
	2.2.3	Roads	
	2.2.4	Temporary Construction Lay Down Area	
	2.2.5	Operation and Maintenance Buildings	
		Alternatives	
	2.3.1	The property on which or location where it is proposed to undertake the activity;	
	2.3.2	The type of activity to be undertaken;	
	2.3.3	The design or layout of the activity;	
	2.3.4	The technology to be used in the activity;	
	2.3.5	The operational aspects of the activity;	
	2.4	The option of not implementing the activity	. 18
3		AL REQUIREMENTS AND GUIDELINES	
		Key Legal and Administrative Requirements Relating to the Proposed Developmer 19	nt
	3.1.1	National Environmental Management Act No. 107 of 1998 – NEMA EIA Requirements	-10
	3.1.2	NEMA EIA Regulations (2014), as amended	
	3.1.3	Environmental Impact Assessment Guideline for Renewable Energy Projects. DEA	. 15
		e 989 of 2015	22
	3.1.4	National Energy Act No. 34 of 2008	
	3.1.5	National Heritage Resources Act No. 25 of 1999	
	3.1.6	National Water Act No. 36 of 1998, as amended	
	3.1.7	National Environmental Management: Biodiversity Act, 2004 (Act No. 10 of 2004 as	
	amen	ded)	. 24
	3.1.8	National Environmental Management: Protected Areas Act, 2003 (Act No. 57 of 2003	as
	amen	ded)	
	3.1.9		
	3.1.10		. 26
	3.1.1		
	3.1.12	,	
	3.1.1		. 27
SC	OUTH AFRI	CA MAINSTREAM RENEWABLE POWER (PTY) LTD prepared by: SiVEST Environmental	

	3.1.1		. 27
	3.1.1		. 28
	3.1.1		. 29
	3.2	Key Development Strategies and Guidelines	
	3.2.1		
	3.2.2		
	3.2.3		. 32
	3.2.4	Renewable Energy Independent Power Producer Procurement Program (REIPPPP)	. 34
	3.2.5	Department of Energy White Paper on Renewable Energy, 2003	. 36
	3.2.6	The Northern Cape Provincial Growth and Development Strategy (NC PGDS)	. 36
	3.2.7	The Northern Cape Provincial Spatial Development Framework (SDF)	. 36
			~ 7
4	PRO	JECT NEED AND DESIRABILITY	
	4.1	National Renewable Energy Requirement	. 37
	4.2	National Renewable Energy Commitment	.37
	4.3	Wind Power Potential in South Africa and Internationally	
	4.4	Site Specific Suitability	
	4.5	Local Need	
_			
5	DES	CRIPTION OF THE RECEIVING ENVIRONMENT	.41
	5.1	Regional Locality	.41
	5.2	Study Site Description	
	5.3	Topography	
	5.4	Geology	
	5.5	Land Use	
	5.6	Climate	
	5.7	Biodiversity	
	5.7.1		
	5.7.2		
	5.7.3		
	5.7.4		
	5.7.5		
	5.7.6		
	5.8	Avifauna	
	5.8.1		
	5.8.2		
	5.8.2		
		Bats	
	5.9		
	5.9.1		. 00
	5.9.2		. 70 d
			u
	Farm 5.9.4		75
	5.9.4	• ·	
		ty and the impacts on Bats	
	5.10	Surface Water	
	5.10		
	5.10.		. 70
	5.11 5.11.	Soils and Agricultural Potential	
	5.11.		. o2
	5.11.		
	5.11.		. ø2
	5.11.		
	5.11.		
	5.12.		
	5.12.		
	5.12.		. 85
		ICA MAINSTREAM RENEWABLE POWER (PTY) LTD prepared by: SiVEST Environmental a! Boom Wind Farm - Final Scoping Report	

5.12.4	Ambient Sound Levels – Summary	
5.12.5	Current Sound Levels	
••••	al	
5.13.1	Topography	
5.13.2	Vegetation	
5.13.3	Land Use	
5.13.4	Visual Character	
5.13.5	Visual Sensitivity	
5.13.6	Visually Sensitive Areas on the Site	
5.13.7	Sensitive Visual Receptors	
	tage	
5.14.1	Palaeontology	
5.14.2	Archaeology	
5.14.3	Historical structures and history	. 102
5.14.4	Heritage sensitivities	. 102
5.14.5	Possible finds	
5.15 Soci	io-economic Environment	. 103
5.15.1	Baseline Information	
5.15.2	Sense of Place, History and Cultural Aspects	
5.15.3	Demographic Profile	. 105
5.15.4	Economy	. 107
5.15.5	Labour Force and Employment Structure	. 108
5.15.6	Income	. 111
5.15.7	Education	. 112
5.15.8	Access to Services and State of Local Built Environment	. 113
5.15.9	Profile of the Zone of Influence	. 115
5.15.10	Resources and land capability	. 117
5.15.11	Access to infrastructure	. 118
5.16 Prel	iminary Geotechnical Assessment	
5.16.1	Existing Conditions	
5.16.2	Seismicity	
5.16.3	Geology	
5.16.4	General Ground Conditions	. 121
5.16.5	Geotechnical Evaluation	. 122
5.16.6	Further Geotechnical Investigations	
5.16.7	Conclusion	. 124
5.17 Traf	fic Impact Assessment	
5.17.1	Existing Traffic Conditions	
5.18 Path	Loss and Risk Assessment	
5.18.1	EMC Requirements	. 127
5.18.2	EMC Analysis	
5.18.3	Impacts associated with change in turbine dimension from a SKA perspective	. 129
	IMENTAL ISSUES, POTENTIAL IMPACTS AND CUMULATIVE IMPACTS	
	nodology for Assessing Impacts	
	etermination of Significance of Impacts	
	npact Rating System	
	tification of Potential Impacts	
	iodiversity Impacts	
	vifauna Impacts	
	at Impacts	
	urface Water Impacts	
	oils and Agricultural Potential Impacts	
	oise Impacts	
	isual Impacts	. 183
6.2.8 H	eritage Impacts	. 188
	ocio-economic Impacts	
	tification of Mitigation Measures	
	iodiversity	. 211
	IAINSTREAM RENEWABLE POWER (PTY) LTD prepared by: SiVEST Environmental om Wind Farm - Final Scoping Report prepared by: SiVEST Environmental	

	6.3.2	Avifauna	
	6.3.3	Bats	
	6.3.4	Surface Water	
	6.3.5 6.3.6	Soils and Agricultural Potential Noise	
	6.3.0 6.3.7	Noise Visual	
	6.3.8	Heritage	
	6.3.9	Socio-Economic	
	6.3.10	Geotechnical	
	6.3.11	Traffic	
	6.4 As	ssessment of Cumulative Impacts	. 222
	6.4.1	Biodiversity	
	6.4.2	Avifauna	
	6.4.3	Bats	
	6.4.4	Surface Water	
	6.4.5 6.4.6	Soils and Agricultural Potential Noise	
	6.4.7	Noise Visual	
	6.4.8	Heritage	
	6.4.9	Socio-Economic	
	6.4.10	Path Loss and Risk Assessment	
	6.4.11	Overall Cumulative Impact Assessment Significance Rating	
7			
7			
8	PUBLIC	C PARTICIPATION PROCESS	. 249
	8.1 O	ojectives of Public Participation	.250
		verview of the Public Participation Process to date	
		onsultation and Public Involvement	
		akeholders and I&APs	
		nouncing the Opportunity to Participate	
		otification of the Potential Interested and Affected Parties	
	8.6.1	Summary of comments received	
		oof of Notification ocus Group Meetings	
		ne-on-One Consultation	
		omments and Response Report	
		omments on Draft Scoping Report	
			.258
9		Ithority Review of the Draft Scoping Report	
9	ACCEC	Ithority Review of the Draft Scoping Report	. 258
		SMENT IN TERMS OF EQUATOR PRINCIPLES	.258 .267
			.258 .267
10	9.1 As	SMENT IN TERMS OF EQUATOR PRINCIPLES	.258 .267 .269
10	9.1 As CONCL	SMENT IN TERMS OF EQUATOR PRINCIPLES ssessment Results	.258 .267 .269 .273
10	9.1 As CONCL 10.1 Co	SMENT IN TERMS OF EQUATOR PRINCIPLES ssessment Results USIONS AND RECOMMENDATIONS	.258 .267 .269 .273 .273
10	9.1 As CONCL 10.1 Co 10.1.1	SMENT IN TERMS OF EQUATOR PRINCIPLES ssessment Results	.258 .267 .269 .273 .273 .273
	9.1 As CONCL 10.1 Co <i>10.1.1</i> 10.2 Re	SMENT IN TERMS OF EQUATOR PRINCIPLES Seessment Results	.258 .267 .269 .273 .273 .273 .286
10	9.1 As CONCL 10.1 Co <i>10.1.1</i> 10.2 Re	SMENT IN TERMS OF EQUATOR PRINCIPLES ssessment Results	.258 .267 .269 .273 .273 .273 .286
	9.1 As CONCL 10.1 Ca <i>10.1.1</i> 10.2 Ra I PLAN (SMENT IN TERMS OF EQUATOR PRINCIPLES seessment Results	.258 .267 .269 .273 .273 .273 .273 .286 .292
	9.1 As CONCL 10.1 Co <i>10.1.1</i> 10.2 Ro PLAN (11.1 Ai 11.2 Do	SMENT IN TERMS OF EQUATOR PRINCIPLES. Seessment Results. USIONS AND RECOMMENDATIONS	.258 .267 .269 .273 .273 .273 .286 .292 .292 .293
	9.1 As 0 CONCL 10.1 Co 10.1.1 10.2 Ro I PLAN (11.1 Ai 11.2 Do 11.3 Pr	SMENT IN TERMS OF EQUATOR PRINCIPLES. Seessment Results. USIONS AND RECOMMENDATIONS	.258 .267 .269 .273 .273 .273 .286 .292 .292 .293 .293
	9.1 As 0 CONCL 10.1 Co 10.1.1 10.2 Ro 1 PLAN (11.1 Ai 11.2 Do 11.3 Pi 11.3.1	SMENT IN TERMS OF EQUATOR PRINCIPLES. Sessment Results	.258 .267 .269 .273 .273 .273 .273 .286 .292 .292 .293 .293 .293
	9.1 As 0 CONCL 10.1 Co 10.2 Ro 1 PLAN (11.1 Ai 11.2 Do 11.3 Pr 11.3.1 11.3.2	SMENT IN TERMS OF EQUATOR PRINCIPLES. Sessessment Results. USIONS AND RECOMMENDATIONS	.258 .267 .269 .273 .273 .273 .286 .292 .292 .293 .293 .293 .294
	9.1 As 0 CONCL 10.1 Co 10.2 Ro 1 PLAN (11.1 Ai 11.2 Do 11.3 Pr 11.3.1 11.3.2 11.3.3	SMENT IN TERMS OF EQUATOR PRINCIPLES. Sessessment Results. USIONS AND RECOMMENDATIONS	.258 .267 .269 .273 .273 .273 .273 .286 .292 .293 .293 .293 .294 .296
	9.1 As 0 CONCL 10.1 Co 10.1.1 10.2 Ro 1 PLAN (11.1 Ai 11.2 Do 11.3 Pr 11.3.1 11.3.2 11.3.3 11.3.4	SMENT IN TERMS OF EQUATOR PRINCIPLES. sessment Results	.258 .267 .269 .273 .273 .273 .273 .286 .292 .293 .293 .293 .294 .296 .300
	9.1 As 0 CONCL 10.1 Co 10.1.1 10.2 Ro 1 PLAN (C 11.1 Ai 11.2 Do 11.3 Pi 11.3.1 11.3.2 11.3.3 11.3.4 11.3.5	SMENT IN TERMS OF EQUATOR PRINCIPLES. Sessessment Results. USIONS AND RECOMMENDATIONS	.258 .267 .269 .273 .273 .273 .273 .273 .286 .292 .293 .293 .293 .294 .296 .300 .300
	9.1 As 0 CONCL 10.1 Co 10.1.1 10.2 Ro 1 PLAN (11.1 Ai 11.2 Do 11.3 Pr 11.3.1 11.3.2 11.3.3 11.3.4	SMENT IN TERMS OF EQUATOR PRINCIPLES. sessment Results	.258 .267 .269 .273 .273 .273 .273 .273 .273 .286 .292 .293 .293 .293 .294 .296 .300 .300 .301

11.3.	8 Noise Assessment	
11.3.	9 Socio-economic Impact Assessment	
11.3.	10 Geotechnical and Traffic Impact Assessment	
11.4	Cumulative Impact Assessment	
	Determination of Significance of Impacts	
11.6	Impact Rating System	
11.6.	1 Rating System Used to Classify Impacts	
11.7	Environmental Management Programme (EMPr)	
11.8	Alternative Assessment	
11.9	Recommendations	
11.10	Public Participation	
11.11	Proposed Project Schedule going forward	315
12 REFE	RENCES	

List of Tables

Table 1: Content requirements for a Scoping Report	1
Table 2: Compliance with the DEA requirements detailed in the DSR comment letter	6
Table 3: Project Team	9
Table 4: Expertise of the EAP	9
Table 5: Xha! Boom Wind Farm summary	12
Table 6: Listed activities in terms of the NEMA Regulations, as amended	20
Table 7: Government Energy Plans up until 2050 in terms of the updated IRP 2016	34
Table 8: Application Site Location	42
Table 9: The classification of moisture availability climate classes for summer rainfall areas a	cross
South Africa (Agricultural Research Council, Undated)	50
Table 10: Priority species (Retief et al. 2012) potentially occurring at the development area. Sp	ecies
recorded in the development areas are shaded.	63
Table 11: Potential of the vegetation to serve as suitable roosting and foraging spaces for bats.	69
Table 12: Table of species that may be roosting or foraging on the study area, the possible site sp	oecific
roosts, and their probability of occurrence based on literature (Monadjem et al. 2010)	71
Table 13: Description of sensitivity categories utilised in the sensitivity map	76
Table 14: Status of identified potential noise-sensitive developments	84
Table 15: Results of ambient sound level monitoring (Datum type: WGS 84, Decimal Degrees)	85
Table 16: Summary of singular noise measurement	88
Table 17: Environmental factors used to define visual sensitivity of the study area	95
Table 18: Visual receptor locations potentially sensitive to the proposed Xha! Boom Wind Farm.	98
Table 19: Landform to heritage matrix	102
Table 20: Population, HIV positive, AIDS and other deaths (2015)	106
Table 21: Crimes reported by crime type (2015)	107
Table 22: National, Provincial & Regional Labour Force Profile	109
Table 23: Employment sector and compensation by skill level (2015)	110
Table 24: Employment by economic services (2015)	110

Table 25: Household per monthly income groups (2011)	112
Table 26: Population density of Hantam and Khai Ma LM (2011)	113
Table 27: Directly and indirectly affected farm portions across zone of influence	116
Table 28: General Subsurface Profiles	121
Table 29: Road Segments Affected by LWEF	125
Table 30: Existing Traffic Volumes (2013)	126
Table 31: Xha! Boom layout distance from SKA infrastructure	129
Table 32: Description of terms	131
Table 33: Impacts on vegetation and protected plant species	135
Table 34: Impacts on fauna during construction and operation	136
Table 35: Impacts on increased soil erosion risk	137
Table 36: Loss of Alien Plant Invasion	137
Table 37: Impacts associated with displacement of priority avifauna due to disturbance d	uring
construction phase	139
Table 38: Impacts associated with the displacement of priority species due to habitat destruction d	uring
construction phase	141
Table 39: Impacts associated with the Avifauna displacement of priority species due to disturb	ance
during operational phase	142
Table 40: Impacts associated with collisions of priority species with the turbines in the operat	tional
phase	143
Table 41: Impacts associated with mortality of priority species due to electrocution on the interna	al MV
lines in the operational phase.	145
Table 42: Impacts on destruction of bats roots due to earthworks and blasting	146
Table 43: Impacts on loss of foraging habitat	147
Table 44: Impacts of bat mortalities due to direct blade impact or barotrauma during foraging acti	vities
(not migration)	149
Table 45: Impacts of artificial lighting	150
Table 46: Impacts of loss of foraging habitat	151
Table 47: Impacts associated with the Construction Lay-down Area directly in or in close proxim	ity to
Surface Water Resources	153
Table 48: Impact Rating for Construction Vehicle and Machinery Degradation Impacts to Surface V	Vater
Resources	154
Table 49: Impact Rating for Human Degradation of Flora and Fauna associated with Surface V	Vater
Resources	156
Table 50: Impact Rating for Degradation and Removal of Vegetation and Soils associated with Su	rface
Water Resources	158
Table 51: Impact Rating for Increased Storm Water Run-off, Erosion and Sedimentation Impacts	161
Table 52: Impact of Vehicle Damage to Surface Water Resources	162
Table 53: Storm-water Run-off Impacts to Surface Water Resources	164

Table 54: Summary of Loss of agricultural land use	
Table 55: Summary of Generation of additional land use income impacts	
Table 56: Summary of Erosion due to alteration of the land surface run-off characteristic imp	pacts167
Table 57: Summary of farm security risk	
Table 58: Summary of Loss of topsoil caused by poor topsoil management construction pha	se impacts
Table 59: Summary of degradation of veld impacts	
Table 60: Summary of dust generation impacts	171
Table 61: Summary of soil contamination impacts	
Table 62: Noise Impact Assessment - Daytime Construction (and upgrade) of access roads	and other
infrastructure	
Table 63: Noise Impact Assessment - Night-time Construction (and upgrade) of access	roads and
other infrastructure	
Table 64: Noise Impact Assessment – Daytime Construction Traffic	
Table 65: Noise Impact Assessment – Night-time Construction Traffic	
Table 66: Noise Impact Assessment - Daytime Construction of Wind Turbines and other inf	rastructure
Table 67: Noise Impact Assessment – Night-time Construction of Wind Turbines	and other
infrastructure	
Table 68: Impact Assessment: Operation of Wind Farm – Daytime	
Table 69: Impact Assessment: Operation of Wind Farm – Night-time	
Table 70: Rating of visual impacts of the proposed Xha! Boom Wind Farm during constructi	on 183
Table 71: Rating of visual impacts of the infrastructure associated with the proposed Xha! E	oom Wind
Farm during construction	
Table 72: Rating of visual impacts of the proposed Xha! Boom Wind Farm during operation	
Table 73: Rating of visual impacts of the infrastructure associated with the proposed Xha! E	oom Wind
Farm during operation	
Table 74: Impact rating - Palaeontology	
Table 75: Impact rating – Archaeological resources	
Table 76: Impact rating – chance finds	
Table 77: Increased production and temporary stimulation of GDP-R	
Table 78: Employment creation during construction phase	
Table 79: Impact of skills development due to the creation of new employment opportunities	3 195
Table 80: Impact of Increased household income and improved standard of living	
Table 81: Impact of investment in the local community and economic development projects	as part of
a Social Economic Development (SED) and Enterprise Development Plan (ED)	
Table 82: Impact of Increase in government revenue due to the capital investment	
Table 83: Change in demographics due to migration of workers from other areas and	d influx of
jobseekers	

Table 84: Impact of Increase in social pathologies associated with the influx of migrant labourers and	d
job-seekers to the area	D
Table 85: Impact of added pressure on basic services and social and economic infrastructure20	1
Table 86: Establishment of informal hospitality industry due to increased demand for accommodation	n
	2
Table 87: Impact of sustainable increase in GDP of the national and local economies through operation	n
and maintenance activities	3
Table 88: Sustainable increase in government revenue stream	4
Table 89: Impact of creation of long term employment in local and national economies through	h
operation and maintenance activities	5
Table 90: Impact of skills development due to the creation of new sustainable employment opportunitie	s
Table 91: Increased household income 20	
Table 92: Impact of Investment in the local community and economic development projects as part of	
a Social Economic Development (SED) and Enterprise Development Plan (ED)	7
Table 93: Impact of Improved standard of living of households directly or indirectly benefiting from	n
created employment opportunities	8
Table 94: Impact of improved access to basic services and community services	9
Table 95: Renewable energy developments proposed within a 55km radius of the Xha! Boom Wind	d
Farm study site	2
Table 96: Cumulative biodiversity impacts and loss of broad-scale connectivity	5
Table 97: Systematic exposition of the expected cumulative impacts on avifauna. 226	8
Table 98: Cumulative bat mortalities due to direct blade impact or barotrauma during foraging (resider	ıt
and migrating bats affected)	D
Table 99: Impact Assessment: Cumulative noise levels for the Leeuwberg Wind Energy Facility – Night	t-
time	2
Table 100: Impact rating – Cumulative	4
Table 101: Wind farm capacity and number of turbines	9
Table 102: Overall Significance Rating of Cumulative Impacts Associated with the Proposed	d
Development	2
Table 103: Alternatives Assessment summarising the impacts, highlighting issues/concerns and	d
indicating the preference associated with each alternative24	6
Table 104: Summary of specialist Alternatives Assessment indicating the preference associated with	h
each alternative	8
Table 105: Authorities follow-up consultation	9
Table 106: Wind farm Compliance Level in terms of Equator Principles and Related Performance	е
Standards	9
Table 107: Summary of environmental issues identified in Specialist Studies. 273	3
Table 108: Conclusions of Specialist Studies. 270	6

Table 109: Outcomes and Recommendations of Specialist Studies	. 286
Table 110: Site Visits Information	. 297
Table 111: Site significance classification standards as prescribed by SAHRA	. 303
Table 112: Description of terms.	. 307
Table 113: Rating of impacts.	.311
Table 114: Summary of specialist Alternatives Assessment indicating the preference associated	with
each alternative	. 312
Table 115: Public Participation activities still to take place.	. 314
Table 116: Proposed Project Schedule	.316

List of Figures

Figure 1: Regional context for the proposed Xha! Boom Wind Farm and associated infrastructure1
Figure 2: Proposed Xha! Boom Wind Farm site locality map
Figure 3: Typical Components of a Wind Turbine14
Figure 4: Conceptual Wind Farm Electricity Generation Process showing Electrical Connections 15
Figure 5: Regional Study Area
Figure 6: Site locality
Figure 7: Topography of the study area
Figure 8: Degree of slope in region of the study area45
Figure 9: Loeriesfontein 3018 Geological Map for the study area
Figure 10: Land use in the region of the study area
Figure 11: Typical view of the sheep farming activities which are dominant within the study area48
Figure 12: Example of typical pastoral elements which can be found within parts of the study area,
especially in areas where sheep farming is taking place
Figure 13: Average monthly temperature and rainfall for the site from 1990-2012 (The World Bank
Climate Change Knowledge Portal, undated)50
Figure 14: The national vegetation map (Mucina & Rutherford, 2006) for the study area. Rivers and
wetlands (pans) delineated by the National Freshwater Ecosystem Priority Areas Assessment (Nel et
al. 2011) are also depicted
Figure 15: Typical vegetation of the Xha! Boom site, which consist of Western Bushmanland Klipveld
has very low cover and consists of bare, open areas alternating with shrubby or grassy areas with
deeper soils or which accumulate more soil moisture53
Figure 16: The eastern margin of the Xha! Boom site consists of open plains of Bushmandland Arid
Grassland, interspersed with more shrubby areas of Bushmanland Basin Shrubland. These areas are
not considered sensitive as the diversity is low and there are few species of concern present
Figure 17: The transional areas between the grassy plains in the east of the Xha! Boom site and the
Western Bushmanland Klipveld consists of a low ridge with sporadic rocky outcrops. Such features are
not common in the area and are important habitats for fauna and flora54

Figure 18: Extract of the Northern Cape Conservation Plan for the study area, showing that there are
no CBAs within the Xha! Boom site
Figure 19: The Karoo Girdled Lizard is common on small rocky outcrops which occur scattered
throughout the Xha! Boom site
Figure 20: Draft sensitivity map for the Xha! Boom study area and the larger Leeuwberg site. The
majority of the site is arid grassland or low open shrublands of low sensitivity
Figure 21: Vegetation types in the greater study area, indicating the homogenous character of the
habitat at the proposed Xha! Boom Wind farms (Mucina & Rutherford 2006)60
Figure 22: Location of water points and raptor nests in the greater area
Figure 23: Bat sensitivity map of the study area 77
Figure 24: Database Surface Water Occurrence Map79
Figure 25: Desktop Delineation Map80
Figure 26: Satellite image map of the site showing the development area
Figure 27: Photograph showing typical landscape and veld conditions on the site
Figure 28: Aerial Image indicating identified potential Noise-sensitive developments identified during
scoping
Figure 29: Generally wide-ranging vistas found throughout the study area as a result of the flat terrain
that occurs over most of the site
Figure 30: Typical natural or rural visual character found within the study area
Figure 31: View of the Loeriesfontein Wind Farm which has been constructed approximately 29km to
the east of the proposed Xha! Boom Wind Farm application site. This wind farm is however located
outside of the visual assessment zone and is shown here as a representation of what the visual
character of the proposed Wind Farm will look like once construction is completed
Figure 32: View of the district road that connects the town of Loeriesfontein with Granaatboskolk to the
north. This district road is however found well outside the visual impact zone
Figure 33: Potentially Sensitive Visual Receptors within the Study Area
Figure 34: The surface geology of the proposed Xha! Boom Wind Farm near Loeriesfontein in the
Northern Cape Province. The development footprint is underlain by Karoo Dolerite as well as the Prince
Albert Formation of the Ecca Group101
Figure 35: Possible heritage sensitive areas
Figure 36: General aerial view (During dry season)119
Figure 37: Seismic Hazard map of South Africa
Figure 38: Extract from Loeriesfontein 3018 Geological Map121
Figure 39: Area map showing Xha! Boom locations relative to SKA
Figure 40: Local map showing nearest two SKA locations
Figure 41: Renewable energy facilities proposed within a 55km radius of the Xha! Boom Wind Farm
application site
Figure 42: Renewable energy facilities proposed within a 55km radius of the Xha! Boom Wind Farm
application site

Figure 43: Wind farm areas considered for REM OPT 7 evaluation	238
Figure 44: Wind farm areas considered for SKA ID 2377 evaluation	239
Figure 45: Man-made noise measured results (ITU-R P.372-13 Table 3 and Table 4, Hagn ed	q 8 and 9)
	241
Figure 46: Sensitive areas as pertaining to biodiversity, avifaunal, bats, visual, heritage, surfa	ace water
and noise	245
Figure 47: EIA and Public Participation Process	251
Figure 48: Short mast monitoring system	297
Figure 49: SM2BAT+ detector and supporting hardware	297
Figure 50: Proposed Layout Alternatives to be assessed in the EIA phase in relation to the	Sensitive
Areas	314

List of Appendices

Appendix 1: IFC Handbook

Appendix 2: Expertise of the EAP and Project Team

Appendix 3: Declaration of Interest Forms and the EAP Affirmation

Appendix 4: Authority Consultation

Appendix 5: Maps

Appendix 6: Specialist Studies

Appendix 6A: Biodiversity Assessment

Appendix 6B: Avifauna Assessment (including addendum report)

Appendix 6C: Bat Assessment (including amendment letter)

Appendix 6D: Surface Water

Appendix 6E: Soils and Agricultural Potential Assessment

Appendix 6F: Noise Assessment

Appendix 6G: Visual Assessment

Appendix 6H: Heritage Assessment

Appendix 6I: Socio-Economic Assessment

Appendix 7: Public Participation

Appendix 7A: Proof of site notices

Appendix 7B: Written Notices

Appendix 7C: Proof of advertisements

Appendix 7D: Correspondence

Appendix 7E: Comments and Response Report

Appendix 7F: I&AP Database

Appendix 7G: Minutes of Meetings – To be included in the DEIAr

Appendix 7H: Landowner Notifications and Consent

Appendix 7I: Distribution to Organs of State

Appendix 8: Additional Information

Appendix 8A: Project Coordinates

Appendix 8B: Title Deeds

Appendix 8C: SKA Studies (Path Loss and Risk Assessment)

Appendix 8D: Preliminary Engineering Services Report - Engineering services, transportation and geotechnical

Appendix 8E: Preliminary Engineering Services Report – Transportation

Glossary of Terms

Alluvial: Resulting from the action of rivers, whereby sedimentary deposits are laid down in river channels, floodplains, lakes, depressions etc.

Biodiversity: The variety of life in an area, including the number of different species, the genetic wealth within each species, and the natural areas where they are found.

Cultural Significance: This means aesthetic, architectural, historical, scientific, social, spiritual, linguistic or technological value or significance.

Cumulative Impact: In relation to an activity, cumulative impact means the impact of an activity that in itself may not be significant, but may become significant when added to the existing and potential impacts eventuating from similar or diverse activities or undertakings in the area.

"Equator Principles": A financial industry benchmark for determining, assessing and managing social & environmental risk in project financing.

Environmental Impact Assessment: In relation to an application, to which Scoping must be applied, means the process of collecting, organising, analysing, interpreting and communicating information that is relevant to the consideration of the application.

Environmental Impact Report: In-depth assessment of impacts associated with a proposed development. This forms the second phase of an Environmental Impact Assessment and follows on from the Scoping Report.

Environmental Management Programme: A legally binding working document, which stipulates environmental and socio-economic mitigation measures which must be implemented by several responsible parties throughout the duration of the proposed project.

Heritage Significance Grades:

a) Grade I: Heritage resources with qualities so exceptional that they are of special national significance;
(b) Grade II: Heritage resources which, although forming part of the national estate, can be considered to have special qualities which make them significant within the context of a province or a region; and
(c) Grade III: Other heritage resources worthy of conservation.

Heritage Resources: This means any place or object of cultural significance. See also archaeological resources above.

Historical Period: Since the arrival of the white settlers - c. AD 1840 - in this part of the country

Iron Age: Period covering the last 1800 years, when new people brought a new way of life to southern Africa. They established settled villages, cultivated domestic crops such as sorghum, millet and beans, and they herded cattle as well as sheep and goats. These people, according to archaeological evidence,

spoke early variations of the Bantu Language. Because they produced their own iron tools, archaeologists call this the Iron Age. Early Iron Age AD 200 - AD 900 Middle Iron Age AD 900 - AD 1300 Late Iron Age AD 1300 - AD 1830

Kilovolt (kV): a unit of electric potential equal to a thousand volts (a volt being the standard unit of electric potential. It is defined as the amount of electrical potential between two points on a conductor carrying a current of one ampere while one watt of power is dissipated between the two points).

Precipitation: Any form of water, such as rain, snow, sleet, or hail that falls to the earth's surface.

Red Data Species: All those species included in the categories of endangered, vulnerable or rare, as defined by the International Union for the Conservation of Nature and Natural Resources.

Riparian: The area of land adjacent to a stream or river that is influenced by stream induced or related processes.

Scoping Report: An "issues-based" report which forms the first phase of an Environmental Impact Assessment process.

Stone Age: The first and longest part of human history is the Stone Age, which began with the appearance of early humans between 3-2 million years ago. Stone Age people were hunters, gatherers and scavengers who did not live in permanently settled communities. Their stone tools preserve well and are found in most places in South Africa and elsewhere. Early Stone Age 2 000 000 - 150 000 Before Present

Middle Stone Age 150 000 - 30 000 BP

Late Stone Age 30 000 - until c. AD 200

AP	- Action Plan
ATNS	- Air Traffic and Navigation Services Company Limited
AIA	 Archaeological Impact Assessment
ADT	- Average Daily Traffic
ADTT	- Average Daily Truck Traffic
BA	- Basic Assessment
BID	- Background Information Document
CARA	- Conservation of Agricultural Resources Act
CBA	- Critical Biodiversity Area
CISPR	- International Special Committee of Radio Interferences
CSW	- Continuous Surface Wave
DEA	- Department of Environmental Affairs
DDD	- Data Deficient
DDT	- Taxonomically uncertain
DM	- District Municipality
DEIAr	- Draft Environmental Impact Assessment Report
DSR	- Draft Scoping Report
DoE	- Department of Energy
DM	- District Municipality
DWS	- Department of Water and Sanitation
EAP	- Environmental Assessment Practitioner
ECA	- Environmental Conservation Act No 73 of 1989
ECO	- Environmental Control Officer
ED	- Economic Development
EHS	- Environmental, Health, and Safety
EIA	- Environmental Impact Assessment
EIR	- Environmental Impact Report
EMPr	- Environmental Management Programme
EMI	- Electromagnetic Interference
EP	- Equator Principles
EPFI	- Equator Principles Financial Institutions
ERA	- The Electricity Regulation Act No. 4 of 2006
ESA	- Ecological Support Area
EAS	- Early Stone Ages
ESMP	- Environmental and Social Management Plan
ESMS	- Environmental and Social Management System
FEIAr	- Final Environmental Impact Assessment Report
EHS	- Environmental, Health, and Safety
FGM	- Focus Group Meeting
FSR	- Final Scoping Report
GDP	- Gross Domestic Product
GHG	- Green House Gases
GIIP	- Good International Industry Practice
GIS	- Geographic Information System
	-

List of Abbreviations

GW	- Gigawatts
HIA	- Heritage Impact Assessment
HSR	- Heritage Scoping Report
I&AP(s)	- Interested and Affected Parties
IBA(s)	- Important Bird Area(s)
IDP	- Integrated Development Plan
IEP	- Integrated Energy Plan
IFC	- International Finance Corporation
IPP(s)	- Independent Power Producers
IRP	- Integrated Resource Plan
IUCN	- International Union for the Conservation of Nature and Natural Resources
KSW	- Key Stakeholder Workshop
kV	- Kilo Volt
LM	- Local Municipality
LED	-Local Economic Development
LSA	- Late Stone Age
LWEF	- Leeuwberg Wind Energy Facility
MSA	- Middle Stone Age
MTS	- Main Transmission Substation
MLL	- Minimum Living Level
MW	- Megawatt
NC DENC	- Northern Cape Department of Environment and Nature Conservation
NC PGDS	- Northern Cape Provincial Growth and Development Strategy
NEA	- The National Energy Act No. 34 of 2008
NEMA	- National Environmental Management Act No. 107 of 1998
NEMBA	- National Environmental Management: Biodiversity Act No. 10 of 2004
NFA	- The National Forest Act No. 84 of 1998
NHRA	- National Heritage Resources Act No. 25 of 1999
NSBA	- National Spatial Biodiversity Assessment
NWA	- National Water Act No. 36 of 1998
NEMAA	- National Environmental Management: Air Quality Act of 2004
NPAES	- National Parks Area Expansion Strategy
NRTA	- The National Road Traffic Act No. 93 of 1996
OHL	- Overhead Line
OHSA	- Occupational Health and Safety Act No. 85 of 1993
PoS	- Plan of Study
PM	- Public Meeting
PPA	- Power Purchase Agreement
PPP	- Public Participation Process
PV	- Photovoltaic
RBS	- Revised Balanced Scenario
REIPPP	- Renewable Energy Independent Power Producer Procurement Programme
RE	- Renewable Energy
RFI	- Radio Frequency Interference
RFP	- Request for Proposals

SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD Proposed Xha! Boom Wind Farm - Final Scoping Report

RFQ	- Request for Qualifications
SA	- South Africa
SAHRA	- South African Heritage Resources Agency
SALT	- Southern African Large Telescope
SANBI	- South African National Biodiversity Institute
SDF	- Spatial Development Framework
SKA	- Square Kilometre Array
SPVs	- Special Purpose Vehicles
TL	- Terrain Loss
WETFEPA	- Wetland Freshwater Priority Areas
WF	- Wind Farm
WMA	- Water Management Area
WTG	- Wind Turbine Generator

SOUTH AFRICA MAINSTREAM RENEWABLE POWER DEVELOPMENTS (PTY) LTD

PROPOSED CONSTRUCTION OF THE XHA! BOOM WIND FARM NEAR LOERIESFONTEIN, NORTHERN CAPE PROVINCE

FINAL SCOPING REPORT

1 INTRODUCTION

South Africa Mainstream Renewable Power Developments (Pty) Ltd (hereafter referred to as Mainstream) are proposing to construct a wind farm and associated infrastructure near Loeriesfontein in the Northern Cape Province of South Africa (**Figure 1**). The proposed development will consist of a 235MW maximum export capacity wind farm referred to as Xha! Boom Wind Farm. In addition, the overall objective of the project is to generate electricity to feed into the National Grid. SiVEST Environmental Division have subsequently been appointed as the independent Environmental Assessment Practitioner (EAP) to undertake the Environmental Impact Assessment (EIA) for the proposed construction of the Xha! Boom Wind Farm and associated infrastructure.

Additionally, Mainstream are proposing to construct the associated on-site Xha! Boom substation and power line, both with a capacity of up to 132kV. This associated electrical infrastructure will require a separate Environmental Authorisation (EA) and is being conducted as a part of a separate Basic Assessment (BA) process. The 132kV Xha! Boom power line has been included in the wind farm EIA for background information but will be authorised under a separate BA to allow for handover to Eskom. The proposed 132kV on-site Xha! Boom substation will include an Eskom portion and an Independent Power Producer (IPP) portion, hence the substation has been included in the wind farm EIA and in the on-site substation and power line BA to allow for handover to Eskom. Although the wind farm and associated electrical infrastructure will be assessed separately, a single public participation process is being undertaken to consider both of the proposed 132kV on-site Xha! Boom substation and associated with both developments will be assessed as part of the cumulative impact assessment. The DEA reference number allocated for the proposed 132kV on-site Xha! Boom substation and associated 132kV power line has not yet been allocated by the DEA. This will be provided in the Final Environmental Impact Assessment Report (FEIAr).

The proposed development requires EA from the Department of Environmental Affairs (DEA). However, the provincial authority will also be consulted (i.e. Northern Cape Department of Environment and Nature Conservation (NC DENC)). The EIA for the proposed development will be conducted in terms of the EIA Regulations promulgated in terms of Chapter 5 National Environmental Management Act (NEMA), which came into effect on the 8th of December 2014, and as amended on 7th April 2017. In terms of these regulations, a full EIA is required for the proposed development. All relevant legislations and guidelines (including Equator Principles) will be consulted during the EIA process and will be complied with at all times.

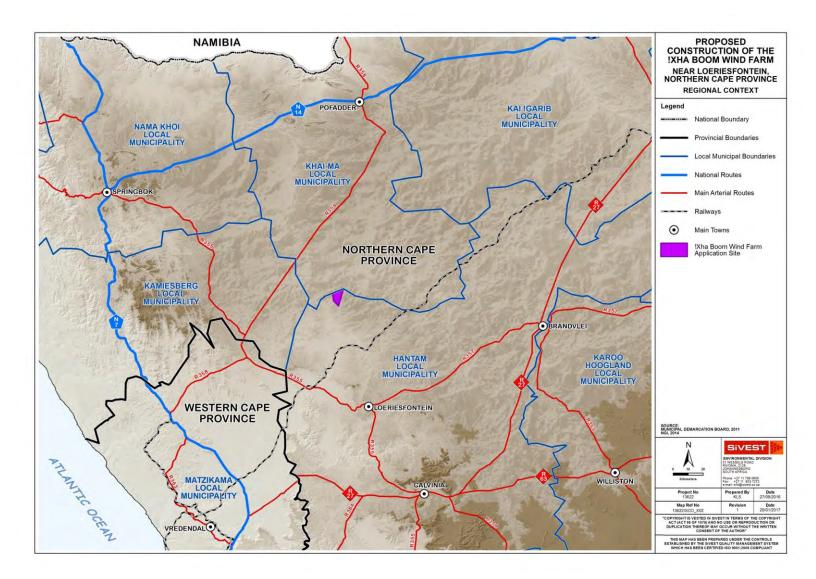


Figure 1: Regional context for the proposed Xha! Boom Wind Farm and associated infrastructure.

1.1 Objectives of the Scoping Phase

The NEMA EIA Regulations (GN. R. 982) state that the objective of the Scoping Phase is to:

- (a) identify the relevant policies and legislation relevant to the activity;
- (b) motivate the need and desirability of the proposed activity, including the need and desirability of the activity in the context of the preferred location;
- (c) identify and confirm the preferred activity and technology alternative through an impact and risk assessment and ranking process;
- (d) identify and confirm the preferred site, through a detailed site selection process, which includes an impact and risk assessment process inclusive of cumulative impacts and a ranking process of all the identified alternatives focusing on the geographical, physical, biological, social, economic, and cultural aspects of the environment;
- (e) identify the key issues to be addressed in the assessment phase;
- (f) agree on the level of assessment to be undertaken, including the methodology to be applied, the expertise required as well as the extent of further consultation to be undertaken to determine the impacts and risks the activity will impose on the preferred site through the life of the activity, including the nature, significance, consequence, extent, duration and probability of the impacts to inform the location of the development footprint within the preferred site; and
- (g) identify suitable measures to avoid, manage or mitigate identified impacts and to determine the extent of the residual risks that need to be managed and monitored.

A Scoping Report must contain the information that is necessary for a proper understanding of the process, informing all preferred alternatives, including location alternatives, the scope of the assessment, and the consultation process to be undertaken through the environmental impact assessment process. The content requirements for a Scoping Report (as provided in Appendix 2 of the EIA Regulations 2014), as well as details of which section of the report fulfils these requirements, are shown in **Table 1** below.

Content Requirements	Applicable Section
(a) details of-	Details of the EAP and full project
(i) the EAP who prepared the report; and	team are included in section 1.5
(ii) the expertise of the EAP, including a curriculum vitae;	on page 9 . The expertise
	(including curriculum vitae) of the
	EAP and full project team are
	include in Appendix 2.
(b) the location of the activity, including-	The location (including 21 digit
(i) the 21 digit Surveyor General code of each cadastral	Surveyor General codes) of the
land parcel;	proposed project is detailed on
(ii) where available, the physical address and farm name;	page <i>i</i> of the report, as well as in
	section 5.2 on page 42.

(iii) where the required information in items (i) and (ii) is	
(iii) where the required information in items (i) and (ii) is	
not available, the coordinates of the boundary of the	
property or properties;	
(c) a plan which locates the proposed activity or activities	A map of the regional locality is
applied for at an appropriate scale, or, if it is-	shown in section 5.1 on page 41 ,
(i) a linear activity, a description and coordinates of the	and the site locality is shown in
corridor in which the proposed activity or activities is to be	section 5.2 on page 42.
undertaken; or	Additionally, all project maps are
(ii) on land where the property has not been defined, the	included in Appendix 5 .
coordinates within which the activity is to be undertaken;	Coordinates are shown on page i
	of the report, as well as in section
	5.2 on page 42. Additionally, all
	coordinates are included in
	Appendix 8A.
(d) a depaription of the same of the propagat activity	••
(d) a description of the scope of the proposed activity,	The listed and specified activities
including-	triggered as per NEMA are detailed
(i) all listed and specified activities triggered;	in section 3.1.2 on page 19. The
(ii) a description of the activities to be undertaken,	technical project description is
including associated structures and infrastructure;	included in section 2 on page 11.
	This includes a description of
	activities to be undertaken,
	including associated structures
	and infrastructure.
(e) a description of the policy and legislative context within	A description of all legal
which the development is proposed including an identification	requirements and guidelines is
of all legislation, policies, plans, guidelines, spatial tools,	provided in section 3 on page 19.
municipal development planning frameworks and instruments	This includes key legal and
that are applicable to this activity and are to be considered in	administrative requirements as
the assessment process;	well as key development strategies
	and guidelines.
(f) a motivation for the need and desirability for the proposed	The need and desirability of the
development including the need and desirability of the activity	proposed project is discussed in
in the context of the preferred location;	section 4 on page 37.
(h) a full description of the process followed to reach the	A description of the alternatives
	•
proposed preferred activity, site and location within the site,	
including -	Regulations is included in section
(i) details of all the alternatives considered;	2.3 on page 16. A preliminary
(ii) details of the public participation process undertaken	assessment of layout alternatives
in terms of regulation 41 of the Regulations, including	is included in section 7 on
copies of the supporting documents and inputs;	page244 . The public participation
(iii) a summary of the issues raised by interested and	process followed is detailed in
affected parties, and an indication of the manner in which	section 8 on page 249.
the issues were incorporated, or the reasons for not	Additionally, all public participation
including them;	documents are included in
	Appendix 7. This will include a

SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD Proposed Xha! Boom Wind Farm - Final Scoping Report Version No: 1 04 August 2017

prepared by: SiVEST Environmental

Page 2

(iv) the environmental attributes associated with the	summary of issues raised by
alternatives focusing on the geographical, physical,	I&AP's, and the responses to their
biological, social, economic, heritage and cultural	comments. A full description of the
aspects;	environmental attributes within the
(v) the impacts and risks identified for each alternative,	application site is included in
including the nature, significance, consequence, extent,	section 5 on page 41. The impacts
duration and probability of the impacts, including the	and risks associated with each
degree to which these impacts-	alternative are assessed in
(aa) can be reversed;	section 0 on page 225. The
(bb) may cause irreplaceable loss of resources; and	methodology used in identifying
(cc) can be avoided, managed or mitigated;	the impacts and risks associated
(vi) the methodology used in determining and ranking the	with each alternative is included in
nature, significance, consequences, extent, duration and	section 6.1 on page130 . The
probability of potential environmental impacts and risks	positive and negative impacts that
associated with the alternatives;	the proposed activity will have on
	the environment are discussed in
(vii) positive and negative impacts that the proposed	
activity and alternatives will have on the environment and	section 6.2 on page 134. Potential
on the community that may be affected focusing on the	mitigation measures are included
geographical, physical, biological, social, economic,	in section 6.3 on page 211. The
heritage and cultural aspects;	outcome of the site selection matrix
(viii) the possible mitigation measures that could be	is included in section 4.4 on page
applied and level of residual risk;	38 . The inclusion of alternatives is
(ix) the outcome of the site selection matrix;	discussed in section 2.3 on page
(x) if no alternatives, including alternative locations for the	16, and in section 7 on page 244.
activity were investigated, the motivation for not	A concluding statement indicating
considering such and	the preferred alternatives is
(xi) a concluding statement indicating the preferred	contained in section 11.8 on page
alternatives, including preferred location of the activity;	312.
(i) a plan of study for undertaking the environmental impact	The plan of study for the EIA phase
assessment process to be undertaken, including-	is included in section 11 on page
(i) a description of the alternatives to be considered and	292. A description of alternatives to
assessed within the preferred site, including the option of	be considered is included in
not proceeding with the activity;	section 11.8 on page 312. A
(ii) a description of the aspects to be assessed as part of	summary of the aspects to be
the environmental impact assessment process;	assessed is included in section
(iii) aspects to be assessed by specialists;	11.1 on page 292 and in section
(iv) a description of the proposed method of assessing the	11.3 on page 293. The description
environmental aspects, including a description of the	of the proposed EIA phase
proposed method of assessing the environmental aspects	methodology is in section 11.3 on
including aspects to be assessed by specialists;	page 293. An indication of planned
(v) a description of the proposed method of assessing	authority consultation is contained
duration and significance;	in section 11.2 on page 293. The
(vi) an indication of the stages at which the competent	particulars of the planned public
authority will be consulted;	participation process are included
	in section 11.10 on page 314. All

 (vii) particulars of the public participation process that will be conducted during the environmental impact assessment process; and (viii) a description of the tasks that will be undertaken as part of the environmental impact assessment process; (ix) identify suitable measures to avoid, reverse, mitigate or manage identified impacts and to determine the extent of the residual risks that need to be managed and monitored. 	tasks to be undertaken during the EIA phase are described in section 11 on page 292. Detailed mitigation measures will be included in the EIA phase of the project, following detailed specialist studies, as indicated in section 11.9 on page 314.
 (j) an undertaking under oath or affirmation by the EAP in relation to- (i) the correctness of the information provided in the report; (ii) the inclusion of comments and inputs from stakeholders and interested and affected parties; and (iii) any information provided by the EAP to interested and affected parties and any responses by the EAP to comments or inputs made by interested or affected parties; 	The EAP affirmation is included in Appendix 3 .
(k) an undertaking under oath or affirmation by the EAP in relation to the level of agreement between the EAP and interested and affected parties (I&APs) on the plan of study for undertaking the environmental impact assessment;	The plan of study is included within this FSR which will be made available for review and comment by I&APs. Should any I&APs identify any issues or concerns with respect to the plan of study for undertaking the EIA, it will be updated accordingly.
(I) where applicable, any specific information required by the competent authority; and	A record of authority consultation is kept in section 1.4 on page 6 , including comments received on the DSR and how and where these have been addressed (Table 2).
(m) any other matter required in terms of section 24(4)(a) and(b) of the Act.	All requirements in terms of section 24(4)(a) and (b) of the Act have been met in this report.

1.2 Applicable Documentation

The following documentation should be read in conjunction with this Scoping Report:

- "Equator Principles" 2013
- International Finance Corporation's (IFC) Performance Standards on Social and Environment, January 2012, namely:

- Performance Standard 1: Assessment and Management of Environmental and Social Risks and Impacts
- Performance Standard 2: Labour and Working Conditions
- Performance Standard 3: Resource Efficiency and Pollution Prevention
- o Performance Standard 4: Community Health, Safety and Security
- Performance Standard 5: Land Acquisition and Involuntary Resettlement
- Performance Standard 6: Biodiversity Conservation and Sustainable Management of Living Natural Resources
- Performance Standard 7: Indigenous Peoples
- Performance Standard 8: Cultural Heritage
- International Finance Corporation World Bank Guidelines, General Environmental Health and Safety (EHS) Guidelines 2007.

The EHS Guidelines are technical reference documents with general and industry-specific examples of Good International Industry Practice (GIIP). These EHS Guidelines are applied as required by the World Bank's respective policies and standards. These General EHS Guidelines are designed to be used together with the relevant Industry Sector EHS Guidelines which provide guidance to users on EHS issues in specific industry sectors. The IFC handbook is contained in **Appendix 1**.

1.3 Specialist Studies

Specialist studies have been conducted in terms of the stipulations contained within **Appendix 6** of the 2014 NEMA EIA regulations, as amended.

The following specialist studies have been conducted to assess the site:

- Biodiversity Assessment;
- Avifauna Assessment (including pre-construction monitoring);
- Bat Assessment (including pre-construction monitoring);
- Surface Water Impact Assessment;
- Soils and Agricultural Potential Assessment;
- Noise Impact Assessment;
- Visual Impact Assessment;
- Heritage Assessment;
- Socio-economic Assessment;
- Geotechnical Assessment;
- Traffic Impact Assessment; and
- Path Loss and Risk Assessment to the SKA.

These studies have been used to identify issues at a scoping level and will be supplemented with more site specific studies during the EIA phase of the project. Key issues relating to the proposed site are discussed below in **Section 5**.

1.4 Decision-Making Authority Consultation

The National Department of Environmental Affairs (DEA) is the competent authority on this project. As such, an application for EA for the proposed development was submitted to the DEA on the 21st of June 2017. A proof of payment, details of the EAP and declaration of interest, a project schedule, details of landowners, and locality map formed part of the application form and were submitted accordingly on the same date. The DSR was also submitted to the DEA on the 21st of June 2017and an acknowledgement of receipt was subsequently received on the 22nd of June 2017. The project was allocated the following reference number: **14/12/16/3/3/2/1018**. The DEA provided comments on the DSR on the 6th of July 2017. The table below provides details as to how this FSR addresses the comments made by the DEA in the DSR comment letter. For further details, refer to **Appendix 4** for the DSR comment Letter.

Cor	nment made by the DEA	Notes / Comments
i.	Please ensure that all relevant listed activities are applied for, are specific and can be linked to the development activity or infrastructure as described in the project description.	All listed activities that have been applied for are detailed in Section 3.1.2 in Table 6 . The table describes the specific way each listed activity is triggered in terms of the project description included in Section 2 .
ii.	The two specialist studies, namely Visual Impact Assessment and Surface Water Assessment, that were conducted by in house specialists do not comply with regulation 13(1)(a) and therefore these studies must be externally reviewed by specialists in compliance with regulations 13(2) and 13(3) of the amended EIA regulations of 2014.	As indicated in section 11.3.6 , the EIA phase Visual Impact Assessment and Surface Water Impact Assessment will be externally reviewed by specialists in compliance with regulations 13(2) and 13(3) of the amended EIA regulations of 2014. These externally reviewed EIA phase specialist assessments will be included in the DEIAr.
111.	It has been noted that there is inconsistency with regard to the number of turbines proposed. On page 12 of the Scoping Report (under the project description) and page iii of the Noise Report, it has been mentioned that 70 and 47 turbines will be constructed. Please ensure that the final Scoping Report includes the correct number of turbines to be constructed on site.	The scoping phase specialist studies were initiated prior to the turbine layout being finalised. As such, the scoping phase specialist studies assessed the entire application site. However, as the noise assessment requires a layout in order to model and assess the potential impacts, the scoping phase noise assessment was undertaken based on the preliminary 47 turbine layout which was subsequently amended to be up

Table 2: Compliance with the DEA requirements detailed in the DSR comment letter

		to 70 turbines. As indicated in
		section 11.3.8, the noise models will
		however be redone during the EIA
		phase based on the 70 turbine
		layout. In addition, all EIA phase
		specialist reports will assess the 70
		turbine layout.
iv.	Please ensure that all issues raised and comments	All comments on the DSR that were
	received during the circulation of the SR from registered	received from I&APs and Organs of
	I&APs and organs of state which have jurisdiction	State have been captured in the
	(including this Department's Biodiversity Section) in	Comments and Response Report
	respect of the proposed activity are adequately	(C&RR) which is included in
	addressed in the Final SR. Proof of correspondence	Appendix 7E. Where necessary
	with the various stakeholders must be included in the	these comments have been
	Final SR. Should you be unable to obtain comments,	addressed in the FSR. Proof of
	proof should be submitted to the Department of the	correspondence is included in
	attempts that were made to obtain comments. The	Appendix 7B, 7D and 7I. Where
	Public Participation Process must be conducted in terms	comments were not obtained the
	of Regulation 39, 40, 41, 42, 43 & 44 of the EIA	details of the attempts to gain
	Regulations 2014.	comment are included in Section
	°	11.2, in Table 105. The public
		participation process is being
		conducted in terms of Regulations
		39, 40, 41, 42, 43 & 44 of the EIA
	This December of a sector of a sector bit of the sector	Regulations 2014, as amended.
V.	This Department requires a cumulative impact	Cumulative impacts have been
	assessment to be undertaken in the final SR to	addressed in section 6.4 of this
	determine potential flaws as this project in one part of	FSR. In the EIA phase the
	three projects that make up one project.	cumulative impact assessment will
		be further investigated by all
		specialists as indicated in section
		11.4 . The EIA phase specialist
		assessments ³ will clearly define all
		identified cumulative impacts, and
		where possible quantify and indicate
		the size of the identified impact, i.e.
		hectares of cumulative transformed
		land. This will be included in the
		DEIAr.
vi.	Please provide a description of and identified	A description of the alternatives
1	alternatives for the proposed activity that are feasible	considered in terms of the
1		

³ The Geotechnical and Traffic Assessments form part of the full preliminary engineering report. While the scoping phase Geotechnical and Traffic Assessments do not rate the significance of impacts or cumulative effects, these specialist studies will be updated in the EIA phase to include impact rating tables as well as an assessment of cumulative impacts. SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD Proposed Xha! Boom Wind Farm - Final Scoping Report Proposed Xha! Boom Wind Farm - Final Scoping Report

	disadvantages that the proposed activity or alternatives will have on the environment and on the community that may be affected by the activity as per Appendix 2 of GN R.982 of 2014. Alternatively, you should submit written proof of an investigation and motivation of no reasonable or feasible alternatives exist in terms of Appendix 2.	 2.3. An assessment of layout alternatives is included in section 7. A full description of the environmental attributes within the application site is included in section 5. The impacts and risks associated with each alternative are assessed in section 6.4. The positive and negative impacts that the proposed activity will have on the environment are discussed in section 6.2. The outcome of the site selection matrix is included in section 4.4. A concluding statement indicating the preferred alternatives is also contained in section 7. As mentioned previously, Section 1.1 details the objectives of the scoping phase as per Appendix 2 of
		GN R.982 of the EIA Regulations, 2014, as amended. Additionally, Table 1 which is contained in Section 1.1 lists all of the required content of a scoping report, and indicates where in the report all of the required content can be found.
vii.	You are advised to comply with regulation 21(1) of the amended EIA Regulations, 2014.	This FSR complies with Regulation 21(1) of the amended EIA Regulations, 2014.
viii.	You are further reminded that the Final SR to be submitted to this Department must comply with all the requirements in terms of the scope of assessment and content of Scoping reports in accordance with Appendix 2 and Regulation 21(1) of the EIA Regulations, 2014, as amended.	As mentioned previously, Section 1.1 details the objectives of the scoping phase as per Appendix 2 of GN R.982 of the EIA Regulations, 2014, as amended. Additionally, Table 1 which is contained in Section 1.1 lists all of the required content of a scoping report, and indicates where in the report all of the required content can be found.
ix.	Further note that in terms of Regulation 45 of the EIA Regulations 2014, as amended, this application will lapse if the applicant fails to meet any of the timeframes prescribed in terms of these Regulations, unless an extension has been granted in terms of Regulation 3(7).	All regulated timeframes will be adhered to.

SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD Proposed Xha! Boom Wind Farm - Final Scoping Report Version No: 1

x.You are hereby reminded of Section 24F of the National
Environmental Management Act, Act No 107 of 1998, as
amended, that no activity may commence prior to an
environmental authorisation being granted by the
Department.No activity will commence prior to an
environmental authorisation being
granted by the
Department.

1.5 Expertise of Environmental Assessment Practitioner

SiVEST has considerable experience in the undertaking of EIAs. Staff and specialists who have worked on this project and contributed to the compilation of this Scoping Report are detailed in **Table 3** below.

Name and Organisation	Role
Andrea Gibb – SiVEST	EAP and Visual
Stephan Jacobs – SiVEST	Environmental Consultant, Visual and
	Public Participation Practitioner
Simon Todd – Simon Todd Consulting	Biodiversity
Chris van Rooyen – Chris van Rooyen Consulting	Avifauna
Werner Marais – Animalia	Bats
Shaun Taylor – SiVEST	Surface Water
Johann Lanz	Agricultural Potential
Morné De Jager – Enviro Acoustic Research (EAR)	Noise
Wouter Fourie – PGS	Heritage
Elena Broughton – Urban-Econ Development	Socio-economic
Economists	
Zimkita Nkata – Urban-Econ Development	Socio-economic
Economists	
Nicolene Venter – Imaginative Africa	Senior Public Participation Practitioner
Kerry Schwartz – SiVEST	GIS, Mapping and Visual
Cobus Hendriksz – SMEC South Africa	Geotechnical and Traffic
Callie Fouché - Interference Testing and Consultancy	Path Loss and Risk Assessment to the SKA
Services (ITC)	

As per the requirements of the NEMA (2014), the details and level of expertise of the persons who prepared the DSR are provided in **Table 4** below.

Table 4: Expertise of the EAP

Environmental	SiVEST (Pty) Ltd – Andrea Gibb	
Practitioner		
Contact Details	andreag@sivest.co.za	
Qualifications	BSc Landscape Architecture and BSc (Hons) Environmental Management	

Expertise to carry	Andrea has 8.5 years' work experience and specialises in undertaking and		
out the EMPr	managing Environmental Impact Assessments (EIAs) and Basic Assessment		
	(BAs), primarily related to energy generation and electrical distribution		
	projects. She also specialises in undertaking visual impact and landscape		
	assessments, by making use of ArcGIS technology and field surveys. She has		
	extensive experience in overseeing public participation and stakeholder		
	engagement processes and has been involved in environmental baseline		
	assessments, fatal flaw / feasibility assessments and environmental negative		
	mapping / sensitivity analyses. From a business and administrative side,		
	Andrea is actively involved in maintaining good client relationships, mentoring		
	junior staff and maintaining financial performance of the projects she leads.		
Environmental	SiVEST (Pty) Ltd – Stephan Jacobs		
Consultant			
Contact Details	stephanj@sivest.co.za		
Qualifications	BSc Environmental Sciences and BSc (Hons) Environmental Management		
	and Analysis		
Expertise to carry	arry Stephan joined SiVEST in May 2015 and holds the position of Graduate		
out the EMPr	Environmental Consultant in the Johannesburg office. Stephan specialises in		
	the field of Environmental Management and has been involved in the		
	compilation of Environmental Impact Assessments (EIAs) and Basic		
	Assessments (BAs). Stephan has also assisted extensively in the undertaking		
	of field work and the compilation of reports for specialist studies such as		
	surface water and visual impact assessments. Stephan also has experience		
	in Environmental Compliance and Auditing and has acted as an		
	Environmental Control Officer (ECO) for several infrastructure projects.		

Please refer to attached CV's for more information in **Appendix 2**. Declarations of Independence of each specialist are contained in **Appendix 3**.

1.6 FinalScoping Report Structure

This Final Scoping Report (FSR) is structured as follows:

- Chapter 1 introduces the project and explains the objectives of the Scoping Phase. The chapter
 also outlines the relevance of the Equator Principles as well as the IFC Performance Standards
 and points out the specialist studies for the project. It describes the authority consultation thus far.
 Furthermore, the chapter discusses the experience of the Environmental Assessment Practitioners
 (EAP), including specialists, who have contributed to the report.
- Chapter 2 presents the technical description of the project, including a description of alternatives being considered.
- **Chapter 3** expands on the relevant legal ramifications applicable to the project and describes relevant development strategies and guidelines.
- Chapter 4 provides explanation to the need and desirability of the proposed project.

- **Chapter 5** provides a description of the region in which the proposed development is intended to be located. Although the chapter provides a broad overview of the region, it is also specific to the application. It contains descriptions of the site and the specialist studies are also summarised.
- **Chapter 6** identifies potential impacts associated with the proposed wind farm. The chapter further identifies these impacts per specialist study and discusses potential cumulative impacts.
- **Chapter 7** discusses layout alternatives, including how they relate to sensitive areas identified by specialists and provides a preliminary comparison of alternatives.
- **Chapter 8** describes the Public Participation Process (PPP) undertaken during the Scoping Phase and tables issues and concerns raised by Interested and Affected Parties (I&APs).
- **Chapter 9** provides an assessment of the report in terms of the Equator Principles.
- **Chapter 10** provides a conclusion to the FSR and recommendations to be addressed in further assessment.
- **Chapter 11** describes the environmental impact reporting phase of the EIA (i.e. the way forward for this study and includes the Plan of Study for EIA).
- Chapter 12 lists references indicated in the FSR.

2 TECHNICAL DESCRIPTION

The proposed development will encompass the installation of wind turbines and associated infrastructure, in order to generate electricity that is to be fed into the Eskom grid. The facility will have a maximum export capacity of up to 235MW and will be referred to as the Xha! Boom Wind Farm. The wind farm will consist of up to 70 turbines, each with a generation capacity between 3 and 5MW. The generated electricity will be fed into the national grid at the Helios Substation via a 132kV power line. It should however be noted that this 132kV power line will require a separate Environmental Authorisation and is being conducted as a part of a separate Basic Assessment (BA) process. The 132kV power line has been mentioned for background information but will be authorised under a separate BA to allow for handover to Eskom. The total area of the project infrastructure has not been determined and will be determined during the EIA phase, however the total extent of the development area is approximately 3804 hectares. The total buildable area for the proposed Wind Farm is 1897.20 hectares. During the Scoping Phase the entire development area has been assessed in order to inform the preliminary comparison of layout alternatives for the wind farm. These layout alternatives have been discussed in **Chapter 7** and are presented in the Plan of Study for the EIA Phase (**Chapter 11**).

2.1 Project Location

The proposed wind farm is located approximately 68km north of Loeriesfontein in the Northern Cape Province, within the Hantam Local Municipality.

The study area is on the following property:

• Entire part of Portion 2 of the Farm Georg's Vley No. 217.

The project site has been identified by Mainstream based on wind resource, grid connection suitability, competition, flat topography, land availability and site access. The buildable area of the site will however be determined by sensitive areas identified during the EIA.

The proposed development location is shown in the locality map (Figure 2) below.

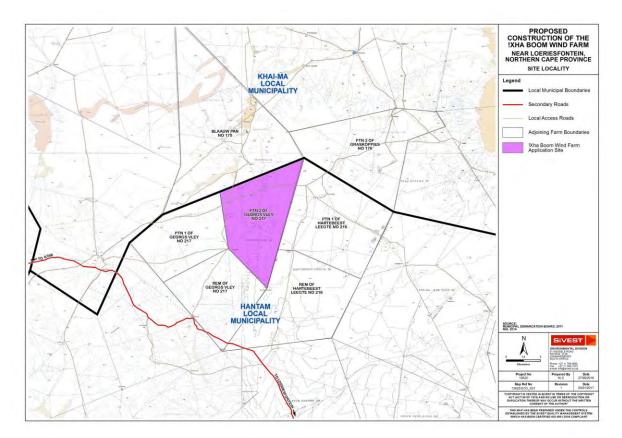


Figure 2: Proposed Xha! Boom Wind Farm site locality map

2.2 Wind Farm Technical details

The key technical details and infrastructure required is presented in the table below (Table 5).

Project	DEA Reference	Farm name and	Technical details and infrastructure
Name	DEA Reference	area	necessary for the proposed project
Xha!	14/12/16/3/3/2/1018	 Entire part of 	• Up to 70 wind turbines , between 3 and
Boom		Portion 2 of the	5MW, with a maximum export capacity
Wind		Farm Georg's	up to 235MW.
Farm		Vley No.217	• Wind turbines will have a hub height of
			up to 160m and a rotor diameter of up
		Development Area:	to 160m ⁴ .
		3804 ha	

Table 5: Xha! Boom Wind Farm summarv

SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD Proposed Xha! Boom Wind Farm - Final Scoping Report Version No: 1

	132kV on-site Xha! Boom IPP
Total Buildable Area	Substation
1897.20 ha	The turbines will be connected via
	medium voltage cables to the
	proposed 132kV on-site Xha! Boom
	IPP Substation.
	 Internal access roads are proposed to
	be up to 20 m wide. This would
	however only be for the construction
	phase as the width of the internal
	access roads will be reduced to 6 - 8m
	during the operational phase.
	 A temporary construction lay down
	area.
	• A hard standing area / platform per
	turbine.
	 The operations and maintenance
	buildings, including an on-site spares
	storage building, a workshop and an
	operations building.
	 Fencing (if required) will be up to 5m
	where required and will be either mesh
	or palisade.
	or pailsaue.

The key components of the project are detailed below.

2.2.1 Turbines

The total amount of developable area is approximately 3804 hectares (ha). The total buildable area for the proposed Wind Farm is 1897.20 ha. The wind turbines and all other project infrastructure will be placed strategically within the development area based on environmental constraints. The size of the wind turbines will depend on the development area and the total generation capacity that can be produced as a result. The wind turbines will therefore likely have a hub height of up to 160m and a rotor diameter of up to $160m^4$ (**Figure 3**). Each wind turbine will have a foundation diameter of up to 25m and will be approximately 3m deep, however, these dimensions may be larger if geotechnical conditions dictate as such. The hardstand area occupied by each wind turbine will be up to 0.5 hectares (85m x 60m). The excavation area will be approximately 1 $000m^2$ in sandy soils due to access requirements

⁴ The AW125/3000 wind turbine generator which has a hub height of 100m, a rotor diameter of 125m and an output of 3MW was used to assess the EMI and RFI. Forty seven (47) turbines with a hub height of 150m was used during the calculations as requested by Mainstream. It should be noted that a more suitable turbine with different specifications may be available once the proposed wind farm is ready for construction. As such, turbines with a hub height of up to 160m and a rotor diameter of up to 160m will need to be authorised. A more accurate path loss and risk assessment cannot be re-done until the turbine has been selected and the layout finalised. Prior to construction a new path loss and risk assessment will be undertaken based on a final layout, using a worst case scenario turbine and approved by the SKA before any turbines are installed on the proposed site. A letter from ICT to confirming this has been included in this Final Scoping Report (FSR) in **Appendix 8C**.

and safe slope stability requirements. A hard standing area / platform of approximately 2 400m² (60m x 40m) per turbine will be required for turbine crane usage. There will be up to 70 wind turbines constructed with a capacity up to 235MW. The electrical generation capacity for each turbine will range between 3MW and 5MW, depending on the final wind turbine selected for the proposed development. It must be noted that the final selection for the turbine type will be conducted after the project has been selected as a Preferred Bidder project under the DoE REIPPPP. This is as a result of technology constantly changing as time progresses⁵.

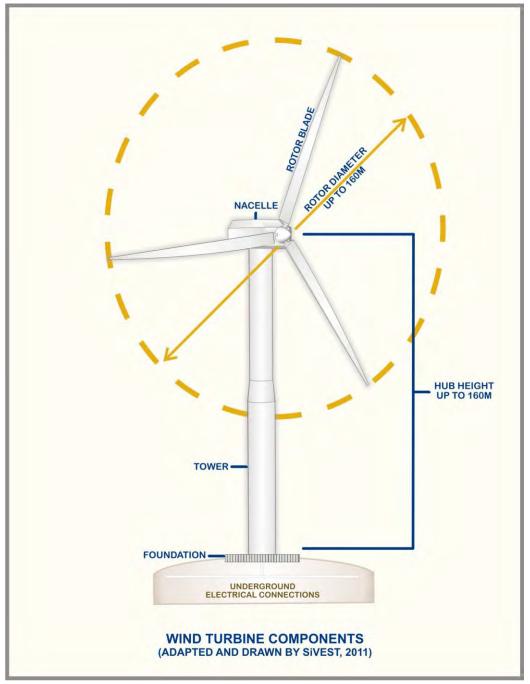


Figure 3: Typical Components of a Wind Turbine

 SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD
 p

 Proposed Xha! Boom Wind Farm - Final Scoping Report
 Version No: 1

⁵ Further SKA studies would be required at a later stage once a final turbine type has been confirmed.

2.2.2 Electrical Connections

The wind turbines will be connected (**Figure 4**) to the proposed 132kV on-site Xha! Boom substation using buried (up to a 1.5m depth) medium voltage cables except where a technical assessment of the proposed design suggests that overhead lines are more appropriate such as over rivers, gullies and long runs. Where overhead power lines are to be constructed, self-supported or H-pole tower types will be used. The height will vary based on the terrain, but will ensure minimum Overhead Line (OHL) clearances with buildings, roads and surrounding infrastructure will be maintained. The dimensions of the specific OHL structure types will depend on electricity safety requirements. The exact location of the towers, the selection of the final OHL structure types and the final designs will comply with the best practise and SANS requirements.

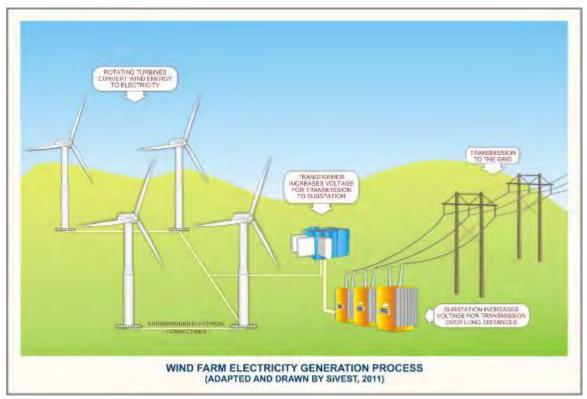


Figure 4: Conceptual Wind Farm Electricity Generation Process showing Electrical Connections

2.2.3 Roads

Internal access roads with a maximum width of 20m are initially being proposed for the construction phase. This is however only temporary as the width of proposed internal access roads will be reduced to approximately 6 - 8m for maintenance purposes during the operational phase. The proposed internal access roads will include the net load carrying surface excluding any V drains that might be required.

2.2.4 Temporary Construction Lay Down Area

The temporary construction lay down area will be approximately 10 $000m^2$ (100m x 100m) and will include an access road and contractor's site office area of up to 5 $000m^2$. A hard standing area / platform of approximately 2 400m² (60m x 40m) per turbine will be required for turbine crane usage.

2.2.5 Operation and Maintenance Buildings

The operation and maintenance buildings will include an on-site spares storage building, a workshop and operations building with a total combined footprint that will not exceed 5 000m². The operation and maintenance buildings will be situated in proximity to the wind farm substation due to requirements for power, water and access.

2.2.6 Other Associated Infrastructure

Other infrastructure includes the following:

• Fencing (if required) will be up to 5m where required and will be either mesh or palisade.

2.3 Alternatives

As per Chapter 1 of the EIA regulations (2014), as amended, feasible and reasonable alternatives are required to be considered during the EIA process. Alternatives are defined as "different means of meeting the general purpose and requirements of the activity". These alternatives may include:

- (a) The property on which or location where it is proposed to undertake the activity;
- (b) The type of activity to be undertaken;
- (c) The design or layout of the activity;
- (d) The technology to be used in the activity;
- (e) The operational aspects of the activity; and
- (f) The option of not implementing the activity.

Each of this alternatives is discussed in relation to the proposed project in the sections below.

2.3.1 The property on which or location where it is proposed to undertake the activity;

Prior to the initiation of the EIA, alternative properties were considered for the location of the proposed development. The selection of a potential wind project includes several key aspects including wind resource, environmental, grid connection suitability as well as competition, topography and access. This

site was selected by Mainstream based on the above criteria ahead of other regional farms due to the cumulative assessment of all criteria. This internal process takes several weeks to complete and ensures that the least environmentally sensitive farm is selected in the specific region of development.

No site alternatives for this project are being considered during the EIA. The placement of wind energy installations is dependent on the factors discussed above, all of which are favourable at the proposed site location. The project site has access to the national grid via the existing Helios Substation. The project site has a relatively flat topography which is suitable for the development of a wind farm. The project site is easily accessible via the N7 towards Kliprand via the R358 or the N1 to Loeriesfontein. The site is therefore considered highly suitable for the proposed development and no other locations are being considered.

2.3.2 The type of activity to be undertaken;

No other activity alternatives are being considered. Renewable Energy development in South Africa is highly desirable from a social, environmental and development point of view. While solar PV projects were considered, wind energy installations are more suitable for the site because of the high wind resource.

2.3.3 The design or layout of the activity;

Design or layout alternatives are being considered in the EIA process. Various environmental specialists assessed the site during the Scoping Phase. Their assessments encompassed the entire proposed development site and included the identification of sensitive areas. These sensitive areas were used during the Scoping Phase to perform a preliminary comparison of layout alternatives (**Chapter 7**). These layouts will be extensively investigated in the EIA phase of the project (see the plan of study for the EIA phase in **Chapter 11** of the FSR). At this stage, the design and layout alternatives include; alternative locations for the proposed 132kV on-site substation.

It should be noted that the layout alternatives for the EIA phase will be based on both environmental constraints and design factors. The findings of the specialist studies and sensitivity mapping will be used to inform the layout of the proposed facility within the preferred site during the EIA phase. The layout will be assessed by the specialists in their respective specialist studies which will be included in the EIA Report.

As part of the EIA, the buildable area of is 1897.20 hectares and will be assessed by the specialists and considered during the EIA phase. Based on the sensitivity mapping within the buildable area, the preferred location and layout for the wind farm and associated infrastructure will avoid the sensitive features identified by the specialists. The area that excludes these sensitive features will be considered to be the Development Envelope for this project and no development may occur outside this envelope. Based on the boundaries of the Development Envelope, a site layout will be determined for this project (i.e. the placement of the wind turbines within the Development Envelope).

It is important to note that should the layout change subsequent to the issuing of an EA (should such authorisation be granted), any alternative layout or revisions to the layout occurring within the boundaries of the Development Envelope would not be regarded as a change to the scope of work or the findings of the impact assessments undertaken during the EIA Phase. This is based on the understanding that the specialists will assess the larger area (i.e. the buildable area) and identify sensitivities, which will be avoided in the siting of the proposed infrastructure within the Development Envelope is considered to be a "box" in which the project components can be constructed at whichever location without requiring an additional assessment or change in impact significance. Any changes to the layout within the boundaries of the Development Envelope following the issuing of the EA (should it be granted) will therefore be considered to be non-substantive.

2.3.4 The technology to be used in the activity;

The technology selected for the Xha! Boom Wind Farm facility was based on environmental constraints, technical and economic considerations. The size of the wind turbines will depend on the development area and the total generation capacity that can be produced as a result. Therefore no technology alternatives will be considered during the EIA. The choice of technology used will ultimately be determined by technological and economic factors at a later stage.

2.3.5 The operational aspects of the activity;

No operational alternatives were assessed in the EIA.

2.4 The option of not implementing the activity.

The option of not implementing the activity, or the '**no-go**' alternative, is considered in the EIA. South Africa is under immense pressure to provide electricity generating capacity in order to reduce the current electricity demand in the country. With the global focus on climate change, the government is under severe pressure to explore alternative energy sources in addition to coal-fired power stations. Although wind energy is not the only solution to solving the energy crisis in South Africa, not establishing the proposed wind farm would be detrimental to the mandate that the government has set to promote the implementation of renewable energy. It is a suitable sustainable solution to the energy crisis and this project could contribute to addressing the problem. This project will aid in achieving South Africa's goals in terms of sustainability, energy security, mitigating energy cost risks, local economic development and national job creation.

3 LEGAL REQUIREMENTS AND GUIDELINES

3.1 Key Legal and Administrative Requirements Relating to the Proposed Development

3.1.1 National Environmental Management Act No. 107 of 1998 – NEMA EIA Requirements

The National Environmental Management Act (Act No. 107 of 1998) was promulgated in 1998 but has since been amended on several occasions from this date. This Act replaces parts of the Environment Conservation Act (Act No 73 of 1989) with exception to certain parts pertaining to Integrated Environmental Management. The act intends to provide for:

- co-operative environmental governance by establishing principles for decision-making on matters affecting the environment;
- institutions that will promote co-operative governance and procedures for coordinating environmental functions exercised by organs of state;
- to provide for the prohibition, restriction or control of activities which are likely to have a detrimental effect on the environment; and
- to provide for matters connected therewith.

NEMA now governs the EIA process with the promulgation of the new EIA regulations in December 2014 (Government Gazette No. 38282 of 4th December 2014), as amended.

Activities that may significantly affect the environment must be considered, investigated and assessed prior to implementation.

In terms of the newly released EIA Regulations promulgated in terms of Chapter 5 NEMA (National Environmental Management Act), which came into effect on 8th December 2014, as amended, a full EIA is required for the proposed project.

3.1.2 NEMA EIA Regulations (2014), as amended

Sections 24 and 44 of NEMA make provision for the promulgation of regulations that identify activities which may not commence without an environmental authorisation, the result being that NEMA now governs the EIA process with the said promulgation of EIA Regulations in December 2014 (Government Gazette No. 38282 of 04 December 2014), as amended. This EIA has therefore been undertaken in accordance with the NEMA EIA 2014 Regulations which are contained in four Government Notices (GN R 982, 983, 984, and 985) which came into effect on 8th December 2014, as amended.

In terms of these Regulations, a full Environmental Impact Assessment (EIA) is required for the proposed development based on triggered activities. However, several activities which trigger a Basic Assessment (BA) were also identified and need also be specified. Ultimately, these activities will not form a separate assessment, but will fall into the greater EIA.

The following Schedules of the Government Notice No. R. 983 – 985 of the 8thth December 2014, as amended on 7th April 2017 are of relevance to the project in question. All of the Listed Activities identified in terms of Sections 24(2) and 24D include:

r	Table 6: Listed activities in terms of the NEMA Regulations, as amended		
Activity	Listed activity as described in GNR	Description of Listed Activity	
number of	983, 984 and 985		
the			
relevant			
notice:	T I I I I I I I I I I I I I I I I I I I		
GN R. 983	The development of facilities or	An on-site IPP substation will be constructed as	
Item 11	infrastructure for the transmission	part of the proposed wind farm. The proposed	
	and distribution of electricity-	on-site IPP substation will be located outside an	
	() autoida autora ana an industrial		
	(i) outside urban areas or industrial	urban area and will have a capacity of 132kV.	
	complexes with a capacity of more than		
	33 but less than 275 kilovolts	The proposed development will enteil the	
GN R. 983 Item 12	The development of:	The proposed development will entail the	
item 12	ii) infrastructure or structures with a	construction of buildings and other	
	physical footprint of 100 square metres or more;	infrastructure exceeding 100 square metres in	
	וווסנוסט טו וווטוס,	size. Internal access roads will be required which	
	where such development occurs-	-	
	(a) within a watercourse;	will need to route to the respective wind turbines	
	(c) if no development setback exists,	locations and to the O&M building and	
	within 32 metres of a watercourse.	infrastructure. The Surface Water Scoping Study	
	measured from the edge of a	identified two (2) Depression Wetlands, three (3)	
	watercourse.	Major Drainage Line (drainage lines with channel	
		width >5m) and two hundred and thirty, six (236)	
		Drainage Lines (drainage lines with a channel	
		width <5m). As a result, the layout of the	
		proposed development will likely fall within 32m	
		of surface water features. These surface water	
		features will be identified during the EIA phase.	
GN R. 983	The infilling or depositing of any material	The Scoping Phase surface water assessment	
Item 19	of more than 10 cubic metres into, or the dredging, excavation, removal or moving	revealed that there are surface water features	
	of soil, sand, shells, shell grit, pebbles or	located within the development area. The	
	rock of more than 10 cubic metres from a	Surface Water Scoping Study identified two (2)	
	watercourse;	Depression Wetlands, three (3) Major Drainage	
	Put evoluting where each infilling	Line (drainage lines with channel width >5m) and	
	But excluding where such infilling,	two hundred and thirty, six (236) Drainage Lines	
	depositing, dredging, excavation, removal or moving-		
	(a) will occur behind a development	(drainage lines with a channel width <5m).	
	setback:	Although the layout of the proposed	
	(b) is for maintenance purposes	development will be designed to avoid the	
	undertaken in accordance with a	identified surface water features as far as	
	maintenance management plan;	possible, some of the internal and access roads,	
	· · · · · · · · · · · · · · · · · · ·	possible, some of the internal and access roads,	

able 6: Listed activities in terms of the NEMA Regulations, as amended
--

GN R. 983 Item 24	(c) falls within the ambit of activity 21 in this Notice, in which case that activity applies. The development of a road- ii) with a reserve wider than 13,5 meters, or where no reserve exists where the road is wider than 8 metres;	may need to traverse the identified surface water features and during construction of these roads soil may need to be removed from the watercourses. Internal access roads with a maximum width of 20m are initially being proposed for the construction phase. This is however only temporary as the width of proposed internal access roads will be reduced to approximately 6 - 8m for maintenance purposes during the operational phase.
GN R. 983 Item 28	Residential, mixed, retail, commercial, industrial or institutional developments where such land was used for agriculture, game farming, equestrian purposes or afforestation on or after 01 April 1998 and where such development: (ii) will occur outside an urban area, where the total land to be developed is bigger than 1 hectare; excluding where such land has already been developed for residential, mixed, retail, commercial, industrial or	The proposed project site is currently used for agricultural purposes, specifically commercial sheep farming, and the proposed project will result in an area greater than 1 hectare being transformed into an industrial land use.
GN R. 983 Item 56	institutional purposes. The widening of a road by more than 6 metres, or the lengthening of a road by more than 1 kilometre - (ii) where no reserve exists, where the existing road is wider than 8 metres – excluding where widening or lengthening occur inside urban areas.	It is likely that existing access roads will need to be upgraded in order to access the site. Internal access roads with a maximum width of 20m are initially being proposed for the construction phase. This is however only temporary as the width of proposed internal access roads will be reduced to approximately 6 - 8m for maintenance purposes during the operational phase. The required width and length of the expansion will be confirmed during the EIA process.
GN R. 984 Item 1	The development of facilities or infrastructure for the generation of electricity from a renewable resource where the electricity output is 20 megawatts or more, excluding where such development of facilities or infrastructure is for photovoltaic installations and occurs – (a) within an urban area.	It is proposed that a wind farm with an export capacity up to 235MW will be constructed.

GN R. 984 Item 15	The clearance of an area of 20 hectares or more of indigenous vegetation, excluding where such clearance of indigenous vegetation is required for- (i) the undertaking of a linear activity; or (ii) maintenance purposes undertaken in accordance with a maintenance management plan.	The proposed development will transform more than 20 hectares of indigenous vegetation. Clearance will also be required for the proposed lon-site substation, O&M building, internal access roads and other associated infrastructure.
----------------------	---	---

3.1.3 Environmental Impact Assessment Guideline for Renewable Energy Projects, DEA Notice 989 of 2015

The purpose of this document is primarily to provide guidance on the environmental management legal framework applicable to renewable energy operations and all the role players in the sector. The guideline is principally intended for use by the following stakeholder groups:

- Public Sector Authorities (as regulator and/or competent authority);
- Joint public sector authorities and project funders, e.g., Eskom, IDC, etc.
- Private Sector Entities (as project funder/developer/consultant);
- Other interested and affected parties (as determined by the project location and/or scope).

This guideline seeks to identify activities requiring authorisation prior to commencement of that activity, and provide an interface between national EIA regulations and other legislative requirements of various authorities.

The guidelines are applicable for the construction, installation and/or development of the following renewable energy projects:

- Concentrating Solar Power Plant;
- Wind Farm;
- Hydropower Station; and
- Photovoltaic Power Plant.

As the proposed development is for a wind farm it is subject to the recommendations proposed in the guidelines.

3.1.4 National Energy Act No. 34 of 2008

The National Energy Act (Act no, 34 of 2008), promulgated in 2008, has, as one of its key objectives, the promotion of diversity of supply of energy and its sources. From this standpoint, the Act directly references the importance of the renewable energy (RE) sector, with a mention of the wind energy sector included. The aim is to ensure that the South African economy is able to grow and develop, fast tracking poverty alleviation, through the availability of a sustainable, diverse energy mix. Moreover, the goal is to provide for the increased generation and consumption of RE (Republic of South Africa, 2008).

3.1.5 National Heritage Resources Act No. 25 of 1999

This Act requires all developers to undertake archaeological impact studies whenever any type of development activity is undertaken. Preliminary archaeological impact studies will consequently become a common procedure for all development activities, even if such development may be exempted in terms of the National Environmental Management Act (Act No 107 of 1998).

The law ensures community participation in the protection of national heritage resources and will involve all three levels of government in the management of the country's national heritage. The South African Heritage Resources Agency (SAHRA) will establish and maintain a national policy, strategy plans and standards for heritage resources management and will monitor the system as a whole.

Heritage authorities will assist and co-operate with individuals and organisations concerned with the study, the conservation, promotion and utilisation of national heritage resources. A newly established National Heritage Resources Fund will provide financial assistance for heritage projects.

A heritage assessment has been conducted to explore how the proposed development may impact on heritage resources as protected by the Act.

3.1.6 National Water Act No. 36 of 1998, as amended

The National Water Act (NWA) No 36 of 1998 was promulgated on the 20th August 1998. This Act is important in that it provides a framework to protect water resources against over exploitation and to ensure that there is water for socio-economic and economic development, human needs and to meet the needs of the aquatic environment. The Act also recognises that water belongs to the whole nation for the benefit of all people.

It is important to note that water resources are protected under the Act. Under the act, water resources as defined include a watercourse, surface water, estuary or aquifer. A watercourse is defined as a river or spring, a natural channel in which water flows regularly or intermittently, or a wetland, lake or dam into which, or from which water flows.

One of the main aims of the Act is the protection of water resources. 'Protection' in relation to a water resource entails:

- Maintenance of the quality of the water resource to the extent that the water use may be used in a sustainable way;
- Prevention of degradation of the water resource; and
- The rehabilitation of the water resource.

In the context of the proposed development and any potential impact on water resources, the definition of pollution and pollution prevention contained within the Act is relevant. 'Pollution', as described by the SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD prepared by: SiVEST Environmental Proposed Xha! Boom Wind Farm - Final Scoping Report Version No: 1 04 August 2017 Page 23

Act is the direct or indirect alteration of the physical, chemical or biological properties of a water resource, so as to make it (*inter alia*):

- less fit for any beneficial purpose for which it may reasonably be expected to be used; or
- harmful or potentially harmful to the welfare or human beings, to any aquatic or non-aquatic organisms, or to the resource quality.

This definition of pollution is quite wide ranging, and it applies to all types of water resource. Activities which cause alteration of the biological properties of a watercourse (i.e. the fauna and flora contained within that watercourse are also considered pollution).

In terms of section 19 of the Act owners / managers / people occupying land on which any activity or process undertaken which causes, or is likely to cause pollution of a water resource must take all reasonable measures to prevent any such pollution from occurring, continuing or recurring. These measures may include (inter alia):

- measures to cease, modify, or control any act or process causing the pollution;
- comply with any prescribed waste standard or management practice;
- contain or prevent the movement of pollutants;
- remedy the effects of the pollution; and
- remedy the effects of any disturbance to the bed and banks of a watercourse.

A surface water assessment has been conducted to explore how the proposed development may impact on water resources as protected by the Act.

3.1.7 National Environmental Management: Biodiversity Act, 2004 (Act No. 10 of 2004 as amended)

The overarching aim of the National Environmental Management: Biodiversity Act (NEMBA) No. 10 of 2004, within the framework of NEMA, is to provide for:

- The management and conservation of biological diversity within South Africa, and of the components of such biological diversity;
- The use of indigenous biological resources in a sustainable manner; and
- The fair and equitable sharing among stakeholders of benefits arising from bio-prospecting involving indigenous biological resources.

The South African National Biodiversity Institute (SANBI) was established by the NEMBA, its purpose being (*inter alia*) to report on the status of the country's biodiversity and the conservation status of all listed threatened or protected species and ecosystems.

NEMBA provides for a range of measures to protect ecosystems and for the protection of species that are threatened or in need of protection to ensure their survival in the wild, including a prohibition on carrying out a "restricted activity" involving a specimen of a listed threatened or protected species without a permit issued in terms of Chapter 7. Lists of critically endangered, endangered, vulnerable

and protected species have been published and a permit system for listed species has been established.

It is also appropriate to undertake a Biodiversity Impact Assessment where proposed developments, in an area that is considered ecologically sensitive, require an environmental authorisation in terms of NEMA, with such Assessment taking place during the basic assessment or EIA. This study will be undertaken during the project.

The NEMBA is relevant to the proposed project as the construction of the wind farm and other components (such as the substation) may impact negatively on biodiversity. The project proponent is therefore required to take appropriate reasonable measures to limit the impacts on biodiversity, to obtain permits if required and to also invite SANBI to provide commentary on any documentation resulting from the proposed development.

3.1.8 National Environmental Management: Protected Areas Act, 2003 (Act No. 57 of 2003 as amended)

The overarching aim of the National Environmental Management: Protected Areas Act (NEMPAA) No. 57 of 2003, within the framework of NEMA, is to provide for:

- provide for the declaration and management of protected areas;
- provide for co-operative governance in the declaration and management of protected areas;
- effect a national system of protected areas in South Africa as part of a strategy to manage and conserve its biodiversity;
- provide for a representative network of protected areas on state land, private land and communal land;
- promote sustainable utilisation of protected areas for the benefit of people, in a manner that would preserve the ecological character of such areas;
- promote participation of local communities in the management of protected areas, where appropriate; and
- provide for the continued existence of South African National Parks.

3.1.9 National Forests Act, 1998 (Act No. 84 of 1998)

The National Forest Act (NFA) was enacted to:

- Provide for the protection, management and utilisation of forests;
- The protection of certain plant and animal life;
- The regulation of trade in forest produce;
- The control and management of a national hiking way system and National Botanic Gardens.

The NFA enforces the necessity for a license to be obtained prior to destroying any indigenous tree in a natural forest and, subject to certain exemptions, cutting, disturbing, damaging, destroying or

removing any protected tree. The list of protected trees is currently contained in GN 908 of 21 November 2014. Licenses are issued by the Minister and are subject to periods and conditions as may be stipulated.

The NFA is relevant to the proposed project as the removal and/or disturbance and/or clearance of indigenous vegetation may be required and a license in terms of the NFA may be required for this to be done.

3.1.10 Conservation of Agricultural Resources Act No. 43 of 1983

The Conservation of Agricultural Resources Act (CARA) No. 43 of 1983 controls the utilisation of natural agricultural resources in South Africa. The Act promotes the conservation of soil, water sources and vegetation as well as the combating weeds and invader plants. The Act has been amended in part by the Abolition of Racially Based Land Measures Act, No. 108 of 1991.

The primary objective of the Act is to conserve natural agricultural resources by:

- maintaining the production potential of land;
- combating and preventing erosion and weakening or destruction of the water resources;
- protecting vegetation; and
- combating weeds and invaders plants.

The CARA is relevant to the proposed projects as the construction of a wind farm as well as other components (such as the substation) may impact on agricultural resources and vegetation on the site. The Act prohibits the spreading of weeds and prescribes control measures that need to be complied with in order to achieve this. As such, measures will need to be taken to protect agricultural resources and prevent weeds and exotic plants from invading the site as a result of the proposed development.

An agricultural potential assessment has been conducted to explore how the proposed development may impact on the agricultural production potential of the proposed site.

3.1.11 Subdivision of Agricultural Land Act No. 70 of 1970, as amended

The Subdivision of Agricultural Land Act No. 70 of 1970 controls the subdivision of all agricultural land in South Africa; prohibiting certain actions pertaining to agricultural land. Under the Act the owner of agricultural land is required to obtain consent from the Minister of Agriculture in order to subdivide agricultural land.

The purpose of the Act is to prevent uneconomic farming units from being created and degradation of prime agricultural land. To achieve this purpose the act also regulates leasing and selling of agricultural land as well as registration of servitudes.

The Act is of relevance to the proposed development as any land within the study area that is zoned for agricultural purposes will be regulated by this Act.

Although the whole of this Act has been repealed by section 1 of the Subdivision of Agricultural Land Act Repeal Act 64 of 1998, this Repeal Act has not been implemented and no date of coming into operation has been proclaimed.

It is important to note that the implementation of this act is problematic as the Act defines 'Agricultural Land' as being any land, except land situated in the area of jurisdiction of a municipality or town council, and subsequent to the promulgation of this Act uninterrupted Municipalities have been established throughout South Africa.

3.1.12 National Road Traffic Act No. 93 of 1996, as amended

The National Road Traffic Act (NRTA) No. 93 of 1996 provides for all road traffic matters and is applied uniformly throughout South Africa. The Act enforces the necessity of registering and licensing motor vehicles. It also stipulates requirements regarding fitness of drivers and vehicles as well as making provision for the transportation of dangerous goods.

All the requirements stipulated in the NRTA will need to be complied with during the construction and operational phases of the proposed wind farm.

3.1.13 Civil Aviation Act No. 13 of 2009

The Civil Aviation Act No. 13 of 2009 controls and regulates aviation within South Africa. It provides for the establishment of a South African Civil Aviation Authority and independent Aviation Safety Investigation Board in compliance with Annexure 13 of the Chicago Convention. It gives effect to various conventions related to aircraft offences, civil aviation safety and security, and provides for additional measures directed at more effective control of the safety and security of aircrafts, airports and matters connected thereto.

Although the Act is not directly relevant to the proposed development, it should be considered as the establishment of a photovoltaic energy facility may impact on aviation and air traffic safety if located directly within aircraft flight paths.

Air Traffic and Navigation Services Company Limited (ATNS) and the Civil Aviation Authority (CAA) will be consulted and the required approvals will be obtained.

3.1.14 Northern Cape Nature Conservation Act, 2009 (Act No. 9 of 2009)

These are developed to protect both animal and plant species within the various provinces of the country which warrant protection. These may be species which are under threat or which are already considered to be endangered. The provincial environmental authorities are responsible for the issuing of permits in terms of this legislation. The Northern Cape Nature Conservation Act, 2009 (Act No. 9 of 2009) and the Nature and Environmental Conservation Ordinance 19 of 1974 are of relevance to the Northern Cape Province.

A biodiversity assessment has been conducted to explore how the proposed development may impact on biodiversity as protected by the Act.

3.1.15 Astronomy Geographic Advantage Act No. 21 of 2007

The Astronomy Geographic Advantage Act No. 21 of 2007 provides for:

- The preservation and protection of areas that are uniquely suited for optical and radio astronomy;
- Intergovernmental cooperation and public consultation on matters concerning nationally significant astronomy advantage areas and matters connected therewith.

In terms of section 7(1) and 7(2) of this Act, the Minister declared core astronomy advantage areas on 20 August 2010 under Regulation No. 723 of Government Notice No. 33462. As such, all land within a 3 Kilometre radius of the centre of the Southern African Large Telescope (SALT) dome located in the Northern Cape Province, falls under the Sutherland Core Astronomy Advantage Area. The declaration also applies to the core astronomy advantage area containing the MeerKAT radio telescope and the core of the planned Square Kilometre Array (SKA) radio telescope.

Under Section 22(1) of the Act the Minister has the authority to protect the radio frequency spectrum for astronomy observations within a core or central astronomy advantage area. As such, the Minister may still under section 23(1) of the Act, declare that no person may undertake certain activities within a core or central astronomy advantage area. These activities include the construction, expansion or operation; of any fixed radio frequency interference source, facilities for the generation, transmission or distribution of electricity, or any activity capable of causing radio frequency interference or which may detrimentally influence the astronomy and scientific endeavours.

Mainstream appointed ITC to conduct a Path Loss and Risk Assessment based on the turbine layout for the proposed Xha! Boom Wind Farm. This risk assessment was based from measurements taken at the Gouda Wind Farm. This initial high level risk assessment was conducted to enable one to estimate the maximum permissible radiated emissions from the equipment installed within the Xha! Boom Wind Farm, compared to known radiated emission data from the Acciona AW125/3000 Wind Turbine Generator (WTG). Acciona AW125/3000 WTG is a large turbine type and was used to show the typical impacts of a similar technology and sized turbine. The report concluded that due to natural terrain barriers and the 52.6km distance between Xha! Boom and Rem-opt 7, the closest SKA unit, no degradation of performance is expected when the mitigated AW 125 TH100A Acciona turbines are installed. However, in order to verify overall wind farm emissions, ambient measurements should be done at the new site before construction starts. Tests points should be carefully selected based on test

equipment sensitivity with the objective to observe the increase in ambient emissions as construction progresses. In addition, final site tests will be done on completion of the project to confirm the radiated emission levels. Although not anticipated, proper mitigation measures on identified emitters will be studied and implemented if final test shows emissions exceeding the SKA threshold.

The cumulative impact assessment concluded that due to the sensitivity of the telescope receivers, there is a risk that unintentional emissions from the systems and associated equipment associated with renewable energy projects will desensitize or saturate the SKA receivers resulting in interference to celestial observations and/or data loss. Such interference is typically referred to as 'Radio Frequency Interference' (or 'RFI'). The NITIA TM-89-139 calculation of 17.9dB (REM OPT 7 location) and 18.4dB (SKA ID 2377 location) to be added to the emissions from a single unit to allow for the cumulative effect of 500 units appears to be conservative when compare to general man-made noise data (<10dB increase measured at various locations). The >60 degree beamwidth assumed during the NITIA TM-89-139 calculation of the cumulative effect due to a higher number of emitters in the beamwidth. The 40dB mitigation is a border line figure when considering all the adjacent projects resulting in a relatively high emitter density.

The SKA has provided initial comments and were also provided with the opportunity to comment on the DSR and on the ITC report. It should be noted that the only comments received from SKA since the submission of the DSR include a request for the KML/KMZ or shapefiles of the proposed wind farm development. These were subsequently forwarded to SKA by SiVEST. SKA comments on the ITC reports and the DSR have been included in the updated C&RR which is included in this FSR. . In addition, proof of correspondence undertaken with the SKA is included in **Appendix 7B**, **7D** and **7I**. The Topographical Analysis Assessment and the Path Loss and Risk Assessment Reports are included in **Appendix 8C**⁶.

3.1.16 Additional Relevant Legislation

- Occupational Health and Safety Act (Act No. 85 of 1993)
- National Environmental Management: Air Quality Act, 2004 (Act No. 39 of 2004)
- National Environmental Management: Waste Act, 2008 (Act No. 59 of 2008 as amended)
- Development Facilitation (Act No. 67 of 1995)
- The Hazardous Substances Act (Act No. 15 of 1973)
- Water Services Act (Act No. 108 of 1998)
- Electricity Regulation Act (Act No. 4 of 2006 as amended)
- Municipal Systems Act (Act No. 32 of 2000)
- Mineral and Petroleum Resource Development Act (Act No. 28 of 2002 as amended)
- Northern Cape Planning and Development Act, 1998 (Act No. 7 of 1998)

⁶ Please note that the EMI and RFI studies were based on worst case scenario turbines. Due to technology improvements a different turbine may be used for the proposed development. However this would be subject to the same EMI and RFI studies.

3.2 Key Development Strategies and Guidelines

3.2.1 Integrated Development Plans

An Integrated Development Plan (IDP) is defined in the Local Government: Municipal Systems Act No. 32 of 2000), as an inclusive and strategic plan that:

- Links, integrates and co-ordinates plans and takes into account proposals for the development of the municipality;
- Aligns the resources and capacity of the municipality with the implementation of the plan
- Forms the policy framework on which annual budgets must be based; and
- Is compatible with national and provincial development plans and planning requirements binding on the municipality in terms of legislation.

The main purpose of the IDP is considered the enhancement of service delivery and fighting poverty through an integrated and aligned approach between different role-players and stakeholders.

Each municipality is required to produce an IDP which would address pertinent issues relevant to their municipality. However, common concerns include municipal transformation and development, and service delivery and infrastructural development.

The proposed Xha! Boom Wind Farm is situated within the Hantam Local Municipality (LM), which is located within the greater Namakwa District Municipality (DM). The Namakwa Integrated Development Plan (IDP) sets out to utilise natural resources in the Province by optimally utilising and managing resources in each sector; this includes the growing realisation of investing in more renewable energy based development. The Namakwa DM has a competitive advantage in the energy sector as wind, solar, wave, nuclear and natural gas energy plants have all been identified as suitable investments in the area. Amongst other sectors such as agriculture and tourism, renewable energy is thus prioritised. Several large-scale renewable energy projects have already been included in the IDP of the district. The district also recognises the importance of the agriculture and tourism industries in the area and promotes their development and transformation, especially eco-heritage (Namakwa DM, 2014).

Despite the fact that the proposed Xha! Boom Wind Farm is situated within the Hantam LM only, the Khai-Ma LM is also located within close proximity to the project site and is thus also expected to be impacted to a degree. As such, the IDPs for both the Hantam and Khai-Ma LMs have been assessed and included in this section. According to the Hantam LM and Khai-Ma LM Integrated Development Plans (IDPs), considering the location of the site relative to the Hantam and Khai-Ma Local Municipalities, the review of the strategic policies highlights the importance of improving the living standards of the citizens of the municipalities as being amongst the top priorities of local government. Stimulating and strengthening the economy through various sector development interventions is envisioned to be one of the means to achieve this. Based on the composition and natural resource endowment of these municipalities, particular developmental priority is given to the agriculture and tourism sectors. Although flower tourism is seasonal in the Hantam LM, eco-tourism has been recently seen as the main growth stimulant for the regional economy. At the same time, the agricultural sector provides the most employment opportunities in the municipal area; thus, making it the backbone of the

Hantam LM (Hantam IDP, 2015). The above suggests that the tourism and agricultural sectors should be preserved and all effort needs to be made in order to ensure that no new development results in the loss of these activities.

In considering the spatial development pattern of the Khai-Ma LM, strengthening local economic growth is one of the focal aspects of the Khai-Ma LM Rural Spatial Development Framework (SDF). In terms of their contribution to GDP, the agriculture and tourism sector are the main contributors to the economic sector of the Khai-Ma LM as the municipality has a unique environment that needs to be exploited in a sustainable manner (Umsebe Development Planners, 2010). The Hantam LM SDF also further highlights that economic sector interventions in the area has led the municipality to seek complementary development opportunities in sectors such as agriculture, mining, tourism and renewable energy (Umsebe Development Planners, 2010; Hantam LM Spatial Development Framework (SDF)).

Upon reviewing the spatial planning component, the Namakwa DM as well as the Hantam and Khai-Ma LMs' spatial development frameworks do not suggest any potential conflicts between the planned spatial development visions and the proposed wind farm project. In addition, the site where the proposed project will be developed is not located near any settlement or tourism attraction or agricultural land that might be sensitive to the environmental effects of the proposed project. After considering the reviewed documentation, the proposed wind farm is in alignment with national, provincial and local objectives, plans and strategies relating to socio-economic development of the areas under analysis. There were no fatal flaws or contraventions identified as all spheres of government prioritise the development of renewable energy projects. The proposed project fits well with the plans to diversify the provincial, district and local economies through investment in renewable energy projects.

It can be suggested that the proposed project does not only conflict with any of the identified developmental priorities of the local governments in guestion but is also in alignment with the identified means to stimulate the local economy. The Hantam IDP, 2015, notes that Climate change will impact on biodiversity and with this the ability of biodiversity and ecosystems to provide ecosystem services that support human society. This is particularly important in rural areas such as the Namakwa District (ND), where the link between people and the environments that support them (and place them at risk in terms of droughts and other extreme weather events) is far more direct than in more urbanized environments (Hantam IDP, 2015). Some features in the landscape are more likely to support resilience of biodiversity to climate change than others. Such features include: riparian corridors and buffers; coastal corridors; areas with temperature, rainfall and altitudinal gradients; areas of high diversity; areas of high plant endemism; refuge sites including south-facing slopes and kloofs; and priority large unfragmented landscapes. Keeping these areas in a natural or near-natural state will help ecosystems and species to adapt naturally to climate change, thus supporting healthy landscapes and the ability of ecosystems to continue to provide ecosystem services to communities (Hantam IDP, 2015). Policy decisions taken in the next decade will largely determine the dimension of the impact of climate change. Eco-systems-based adaptation approaches, using nature and biodiversity to help people cope with, and respond to the negative impacts of climate change, will have an important role to play in Hantam. Local government is in the front line of implementation and service delivery, and thus needs to pursue adequate mitigation and adaptation strategies which should include participation from the public sector, the private sector and NGOs (Hantam IDP, 2015). Therefore, it is evident that the proposed development is aligned with the goals of the municipal IDPs in the study area.

3.2.2 Draft Integrated Energy Plan for the Republic of South Africa, 2016

The Draft Integrated Energy Plan (IEP), developed by the DoE, are anchored in the National Energy Act, 2008 (Act No. 34 of 2008). The IEP was undertaken to determine the best way to meet current and future energy service needs in the most efficient and socially beneficial manner, while:

- Maintaining control over economic costs;
- Serving national imperatives such as job creation and poverty alleviation; and
- Minimising the adverse impacts of the energy sector on the environment.

The IEP takes into consideration the crucial role that energy plays in the entire economy and is informed by the output of analyses founded on a solid fact base. It is a multi-faceted, long-term energy framework which has multiple objectives, some of which include:

- To guide the development of energy policies and, where relevant, set the framework for regulations in the energy sector;
- To guide the selection of appropriate technologies to meet energy demand (i.e. the types and sizes of new power plants and refineries to be built and the prices that should be charged for fuels);
- To guide investment in and the development of energy infrastructure in South Africa; and
- To propose alternative energy strategies which are informed by testing the potential impacts of various factors such as proposed policies, introduction of new technologies, and effects of exogenous macro-economic factors.

The IEP considers the national supply and demand balance and proposes alternative capacity expansion plans based on varying sets of assumptions and constraints. While infrastructural matters are briefly discussed, the IEP does not explicitly consider supply and demand at specific geographical locations within the country, nor does it take into account infrastructure bottlenecks at specific locations. These are, or will be, covered in detail as follows:

- Electricity infrastructure (transmission and distribution) is dealt with in other plans and the Integrated Resource Plan (IRP) should assess these in detail, taking into consideration the grid planning currently conducted by Eskom;
- Electricity supply is dealt with in the IRP;
- Liquid fuels will be dealt with in the 20-Year Liquid Fuel Infrastructure Roadmap which will cover logistical matters relating to pipelines and storage facilities for petroleum products;
- The Gas Utilisation Master Plan (GUMP) will take into consideration the bottlenecks and capacity
 constraints of the current natural gas infrastructure. All the above will inform the integrated energy
 planning process and will enable overall enhancement through ongoing periodic iterations to ensure
 alignment.

3.2.3 Integrated Resource Plan, 2010 and updated 2016

The Integrated Resource Plan (IRP) was created in order to plan for projected national electricity demand. The IRP 2010-30 was promulgated in March 2011, and was planned to be a "living plan", as it needs to take into account changes in the macroeconomic environment, developments in new technologies and changes in national priorities and imperatives, amongst other factors. Since the promulgation of the (IRP) 2010-30 there have been a number of developments in the energy sector in South and Southern Africa. In addition the electricity demand outlook has changed from that expected in 2010. As a result the DoE is in the processing of updating the IDP and has recently published Assumptions and Base Cases in November 2016.

- While the IRP 2010-30 remains the official government plan for new generation capacity until it is replaced by an updated plan, there are a number of assumptions that have changed and these include: The changed landscape over the past years, in particular in electricity demand and the underlying relationship with economic growth;
- New developments in technology and fuel options (locally and globally);
- Scenarios for carbon mitigation strategies and the impact on electricity supply up to 2050; and
- The affordability of electricity and its impact on demand and supply.

The IRP 2010-30 assumed the existing Eskom fleet to have an average availability of 86%, however actual performance has in the recent past declined to less than 70% availability.

The learning rates adopted in IRP 2010-30 are maintained in the 2016 update with PV and Wind learning rates adjusted to reflect the quick fall in prices experienced in South Africa and are reflected in the table below.

Technology	2015 (R/kW)	2050 (R/kW)
PV (fixed tilt)	16860.6	13425.03408
PV (tracking)	17860.6	14221.26959
Wind	19208.1	17287.405
Nuclear	55260	53768.80047

The new generation capacities called for in the Ministerial Determinations that are not yet committed (no procurement has started) are allowed to lapse. This means that only procurement up to bid window 4.5 for renewables (expedited including smalls) and coal 900MW are considered committed. The Base Case maintains a number of policy positions imposed in the IRP 2010-30 in particular an annual build limit of new capacity for wind (1600 MW) and photovoltaic (1000 MW).

- Based on least cost and moderate emissions reduction trajectory, the model results indicates, 18GW of PV, 37GW of Wind, 20GW of Nuclear, 34GW of Gas, 2500 of Hydro, 15GW of Coal by end of the study horizon (year 2050);
- Looking at same study period used in the promulgated IRP 2010-30, the model results indicate 4.7GW of PV ,6.4GW of Wind, 12.7GW of Gas and 5.3GW of Coal by year 2030;
- The first unit of Nuclear appears around year 2037, but this is sensitive to other technology primary fuel costs and their associated emission assumptions. These will be tested as a scenario as indicated in the next section. The 2030 figures in the Base Case are different from those in the IRP 2010-30 because they exclude the capacity already procured/under procurement (6.2GW of

renewable energy as well as 900MW of coal). The figures are also different because adjustment based on scenario analysis and policy has not been done.

3.2.4 Renewable Energy Independent Power Producer Procurement Program (REIPPPP)

(The following information was extracted from the Eskom website: Guide to Independent Power Procurement (IPP) processes in South Africa and Eskom, June 2010 http://www.eskom.co.za/live/content.php?ltem_ID=14324)

The objective of this section is to provide an overview of the processes in the country and within Eskom relating to Independent Power Producers (IPPs). It is important that certain enabling policies, rules and regulations are in place to provide certainty and transparency in the introduction of IPPs.

Country Process

South Africa has two acts that direct the planning and development of the country's electricity sector:

- i. The National Energy Act of 2008 (No. 34 of 2008)
- ii. The Electricity Regulation Act (ERA) of 2006 (No. 4 of 2006).

In August 2009, the Department of Energy (DoE) gazetted the Electricity Regulations on New Generation Capacity under the ERA. The New Generation Regulations establish rules and guidelines that are applicable to the undertaking of an IPP Bid Programme and the procurement of an IPP for new generation capacity. They also facilitate the fair treatment and non-discrimination between IPPs and the buyer of the energy.

• Formal Programmes

In terms of the New Generation Regulations, the Integrated Resource Plan (IRP) developed by the DoE sets out the new generation capacity requirement per technology, taking energy efficiency and the demand-side management projects into account. This required, new generation capacity must be met through the technologies and projects listed in the IRP and all IPP procurement programmes will be executed in accordance with the specified capacities and technologies listed in the IRP. The table below highlights the energy plan that has been proposed until 2050.

	New Build Options									
	PV	Wind	Land fill Gas	DR	Nuclear	OCGT	СССТ	Coal PF wFGD	Inga	
2016										
2017										
2018										
2019										
2020										
2021	160									
2022	160									

 Table 7: Government Energy Plans up until 2050 in terms of the updated IRP 2016

SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD Proposed Xha! Boom Wind Farm - Final Scoping Report Version No: 1 prepared by: SiVEST Environmental

2023	370	200						[
2024	440	500		1000		396			
2025	650	1000	15	1000		2376	732		
2026	580	1000	5	1000		264	1464		
2027	580	1000	230	1000		264	2196		
2028	580	1000		500		396	1464	1500	
2029	580	1100		1000			1464	1500	
2030	580	1200		1000		1716		2250	1000
2031	580	1200		1000		1584		750	
2032	580	1200		500			732	1500	1000
2033	580	100					1464	750	500
2034	580	1200		1000		1452			
2035	580	1600		500			1464	1500	
2036	580	1600		1000				1500	
2037	580	1400		500	1359		732	2250	
2038	580	1600				1848	1464	750	
2039	650	1500			1359		2928		
2040	650	1600		1000		1056	732		
2041	650	1600		1000	4077	792		750	
2042	650	1600		500			2196		
2043	650	1600		500					
2044	650	1800		500	1359				
2045	770	1600			2718		2196		
2046	790	1600		500	1359	924			
2047	720	1800		1000	1359		732		
2048	720	1600		500	2718	264			
2049	660	1500		500	1359				
2050	720	1400		500	2718				
Total (MW									
)	17600	37400	250	500	20385	13332	21960	15000	2500

A decision that additional capacity be provided by an IPP must be made with the concurrence of the Minister of Finance. Once such a decision is made, a procurement process needs to be embarked upon to procure that capacity in a fair, equitable and transparent process.

The New Generation Regulations set out the procurement process. The stages within a bid programme are prescribed as follows:

- i. Request for Qualifications (RFQ)
- ii. Request for Proposals (RFP)
- iii. Negotiation with the preferred bidder(s).

A successful bidder will be awarded a Power Purchase Agreement (PPA) subject to approval by the Regulator.

3.2.5 Department of Energy White Paper on Renewable Energy, 2003

The Department of Energy (DoE) gazetted its White Paper on Renewable Energy in 2003, and introduced it as a "policy that envisages a range of measures to bring about integration of renewable energies into the mainstream energy economy." At that time the national target was fixed at 10 000GWh (0.8Mtoe) renewable energy contribution to final energy consumption by 2013. The White Paper proposed that this would be produced mainly from biomass, wind, solar and small-scale hydropower. It went on to recommend that this renewable energy should to be utilised for power generation and non-electric technologies such as solar water heating and bio-fuels. Since the White Paper was gazetted, South Africa's primary and secondary energy requirements have remained heavily fossil-fuel dependant, both in terms of indigenous coal production and use, as well as the use of imported oil resources. Alongside this, the projected electricity demand of the country has led the National utility Eskom, to embark upon an intensive build programme to secure South Africa's longer-term energy needs, together with an adequate reserve margin.

3.2.6 The Northern Cape Provincial Growth and Development Strategy (NC PGDS)

The importance of developing the renewable energy sector in the Northern Cape was first acknowledged in the Northern Cape Provincial Growth and Development Strategy (NC PGDS). The NC PGDS makes reference to the need to ensure availability of affordable energy. It notes, "in order to promote economic growth in the Northern Cape the availability of electricity to key industrial users at critical localities at rates that enhance the competitiveness of their industries must be ensured." At the same time, the development of new sources of energy through the promotion of the adoption of energy applications that display a synergy with the province's natural resource endowments must be encouraged. In this regard the NC PGDS notes that, "development of energy sources such as solar energy, the natural gas fields, bio-fuels, etc., could be some of the means by which economic opportunity and activity is generated in the Northern Cape". The NC PGDS also notes that "sustainable utilisation of the natural resource base on which agriculture depends is critical in the Northern Cape with its fragile eco-systems and vulnerability to climatic variation". In this regard, care needs to be taken to ensure that renewable energy facilities do not impact negatively on the region's natural environment.

3.2.7 The Northern Cape Provincial Spatial Development Framework (SDF)

In the Northern Cape Provincial Spatial Development Framework (SDF) of 2011, the Northern Cape provincial government acknowledges that the major energy challenge faced by the province is finding a balance between ensuring electricity security and addressing issues around climate change. The Northern Cape Provincial SDF (2011) states that the energy sector could benefit the economy significantly through created economic spin-offs or multiplier effects. This will, however, require innovative planning to provide the necessary infrastructure and associated amenities to accommodate the industry in an efficient manner (Dennis Moss Partnership, 2012).

4 PROJECT NEED AND DESIRABILITY

4.1 National Renewable Energy Requirement

In 2010 South Africa (SA) had 44,157MW of power generation capacity installed. Current forecasts indicate that by 2025, the expected growth in demand will require the current installed power generation capacity to be almost doubled to approximately 74,000MW (SAWEA: 2010).

This growing demand, fuelled by increasing economic growth and social development within Southern Africa, is placing increasing pressure on South Africa's existing power generation capacity. Coupled with this, is the growing awareness of environmental impact, climate change and the need for sustainable development. Despite the worldwide concern regarding GHG emissions and climate change, South Africa continues to rely heavily on coal as its primary source of energy, while most of the countries renewable energy resources remain largely untapped (DME, 2003). There is therefore an increasing need to establish a new source of generating power in SA within the next decade.

The use of renewable energy technologies, as one of a mix of technologies needed to meet future energy consumption requirements is being investigated as part of Eskom's long-term strategic planning and research process. It must be remembered that wind energy is plentiful, renewable, widely distributed, clean and reduces greenhouse gas emissions when it displaces fossil-fuel derived from electricity. In this light, renewable wind energy can be seen as desirable.

The REIPPP programme and the competitiveness nature of the bidding process has resulted in significant lowering of solar and wind tariff prices since 2011. Solar PV, for example, was bid with tariffs of R2.80/kWh at the inception of the REIPPPP in 2011, to 60c/kWh at present. Further projects will increase the competitive nature of the REIPPP program and further result in cost savings to South African consumers.

4.2 National Renewable Energy Commitment

In support of the need to find solutions for the current electricity shortages, the increasing demand for energy, as well as the need to find more sustainable and environmentally friendly energy resources, South Africa has embarked on an infrastructure growth programme supported by various government initiatives. These include the National Development Plan (NDP), the Presidential Infrastructure Coordinating Commission (PICC), the Department of Energy's Integrated Resource Plan, the National Strategy for Sustainable Development, the National Climate Change Response White Paper, the Presidency of the Republic of South Africa's Medium-Term Framework, and the National Treasury's Carbon Tax Policy Paper.

The Government's commitment to growing the renewable energy industry in South Africa is also supported by the *White Paper on Renewable Energy* (2003) which sets out the Government's principals, goals and objectives for promoting and implementing renewable energy in South Africa. In order to achieve the long term goal of achieving a sustainable renewable energy industry, the Department of

Energy has set a target of contributing 17,8*GW* of renewable energy to the final energy consumption by 2030. This target is to be produced mainly through, wind and solar; but also through biomass and small scale hydro (DME, 2003; IRP, 2010).

4.3 Wind Power Potential in South Africa and Internationally

Onshore wind energy technology is the most commonly used and commercially developed renewable energy technology in South Africa, wind is abundant and inexhaustible (DEA Guideline for Renewable Energy, 2015). Wind energy is one of the lowest-priced renewable energy sources and is economically competitive (www.wasaproject.info).

4.4 Site Specific Suitability

The selection of a potential wind farm project site included several key aspects including wind resource, grid connection suitability as well as environmental, competition, topography and access.

Wind resource is one of the main drivers of project viability across South Africa. This specific project site has been identified by Mainstream through a pre-feasibility desktop analysis based on the estimation of the wind energy resource. This region of the Northern Cape Province in South Africa has above average wind resource potentials. Following 12 months of wind resources measuring, initial results are confirming average wind speeds between 7 and 8m/s, which is considered highly suitable for a wind farm development. This high resource ensures the best value for money is gained for the economy of South Africa. The general area would experience a similar resource, but as resource is only one driver of site selection, the other aspects should be considered when holistically evaluating a project.

Grid connection suitability is the next element which drives the project location. Long connection lines have increased environmental impacts as well as add increased costs to the project development. The Xha! Boom project site has good grid connection potential as the project is likely to connect to the existing regional Helios Substation, the Xha! Boom facility is located approximately 32km from the substation, thereby minimising the need for an extensive grid network upgrade or long power line.

Environmental is a key aspect that Mainstream considers when evaluating a wind project. The project should be developed in a sustainable and ecologically friendly manner ensuring its development has the least possible impact on the land on which it will be built. The regional farms have been evaluated before the selection of these specific farms and it was concluded that the development on these farms would result in the least impact of regional fauna and flora. Certain farms in the region, which are located in the lower areas have increased biodiversity which are deemed sensitive and other farms show increased biodiversity.

Other key criteria which refines the site selection on a micro level include competition, topography and access. The project site has a flat arid topography which is suitable for the development of a wind SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD prepared by: SiVEST Environmental Proposed Xha! Boom Wind Farm - Final Scoping Report Version No: 1 04 August 2017 Page 38

project. The region does have several ongoing EIA developments, with two (2) 140MW projects currently under construction. The project site can be accessed easily via the N7 towards Kliprand via the R358 regional road or via the N1 to Loeriesfontein. Upgrade of the district gravel road will be done by the current preferred bidder projects to allow for direct access to site.

The proposed wind farm is situated on the entire portion of Portion 2 of the Farm Georg's Vley No. 217. The farms are currently used for agricultural purposes, specifically commercial sheep farming. The proposed development is not envisioned to impact farming activities after the construction phase has been completed. With regards to competing land uses in the area, it was found that while sheep farming is the dominant activity grazing can still continue within the wind farm development area. The arid nature of the climate has restricted stocking densities which has resulted in relatively large farms across the area which are ideal for wind farm developments. The wider area is therefore sparsely populated, and human-related infrastructure is largely restricted to isolated farmsteads and gravel access roads. The area is regarded as largely uninhabited and the closest built up area is the small town of Loeriesfontein approximately 68km to the south of the proposed wind farm application site. It should also be noted that guarrying activities are present in the wider area, on the eastern edge of Konnes se Pan which is located to the north-east of the proposed wind farm application site. These guarrying activities are however isolated to this part of the area and are also expected reduce the impact of the proposed development from a visual perspective as these activities have reduced the natural/scenic character of the wider area to some degree. Due to the extreme aridity constraints as well as the poor soils, agricultural land use in the area is restricted to low intensity grazing only. As such, the area is not valued for its agricultural potential and the proposed development will only impact agricultural land which is of extremely low agricultural potential and is unsuitable for cultivation. In addition, several renewable energy developments (both wind and solar) are being proposed and/or constructed in the area. The construction of these renewable energy developments is expected to result in the loss of agricultural land. The impact is however low because of the extremely limited agricultural potential of all land in the area, predominantly as a result of climatic limitations, and the fact that there is no particular scarcity of such land in South Africa. Furthermore it is preferable to incur a cumulative loss of agricultural land in such a region, without cultivation potential, than to lose agricultural land that has a higher potential, to renewable energy development, elsewhere in the country. In light of the above, it can be concluded that the land use in the area appears to be shifting more towards the use of renewable energy developments and the proposed site is therefore considered to be suitable from a land use perspective.

Additionally, cumulative impact assessments of similar developments in the area were undertaken by the specialists during the scoping phase for this proposed development. It should however be noted that not all of the specialists rated the significance of the cumulative impacts using the significance rating methodology. This will therefore be undertaken by all specialist during the EIA phase and will be included in the DEIAr. Based on the findings of the specialist assessments which rated the significance of the cumulative impacts using the significance rating methodology, the cumulative impacts associated with the proposed development were found to be medium to low. It should however be noted that the scoping phase bat monitoring study found that the significance of the cumulative impact would be very high. The significance of the cumulative impacts. Despite the fact that there are a number of few similar projects in the area, the medium to low cumulative impacts associated with the proposed development will result in the site location being considered ideal for the proposed development of the wind farm.

prepared by: SiVEST Environmental

4.5 Local Need

The Northern Cape Province faces numerous socio-economic and developmental challenges, which are not unique to the Province and are observed throughout the country. Reducing poverty through social development and achieving a sustainable economic growth in the Province through diversification and transformation of its economy are at the forefront of the provincial government's developmental objectives (Northern Cape Government, 2008; Office of the Premier of the Northern Cape, 2012).

The Northern Cape Province is endowed with biological diversity, mineral resources, and renewable energy sources such as solar and wind. Therefore, the achievement of its developmental objectives is envisaged to be done by capitalising on the local resources and specifically, the development of the agriculture and agro-processing, mineral extraction and mineral beneficiation, fishing and aquaculture, manufacturing, and tourism industries (Northern Cape Government, 2008; Office of the Premier of the Northern Cape, 2012).

Ensuring availability of inexpensive energy is seen to be fundamental to growing competitive industries in the Province (Northern Cape Government, 2008). However, provincial government advocates the development of the energy sector in the Province through "the promotion of the adoption of energy applications that display a synergy with the province's natural resource endowments" (Northern Cape Government, 2008). This implies the use of renewable energy sources and natural gas fields that the Province enjoys (Northern Cape Government, 2008). Provincial strategic documents specifically promote the development of large-scale renewable energy projects, similar to the one under analysis, which among others, would contribute to renewable energy targets set by national government and allow to secure supply, tackle climate change and address the needs of the Province (Office of the Premier of the Northern Cape, 2012).

Harnessing renewables is also seen to contribute towards alleviation and reduction of poverty in the Province. One of the interventions that underpins the provincial approach to poverty eradication is "utilisation of natural resources in a sustainable manner", which in turn implies the transition to greater exploitation of renewables, including wind (Northern Cape Government, 2008).

Considering the above, it can be concluded that the development of the proposed project follows the provincial priorities and developmental objectives. From a spatial perspective, the project also does not appear to raise any red flags.

Similar to the Province, the district and local municipalities where the proposed project is to be established, also face challenges of poverty, unemployment, and income inequality. Therefore, the municipalities' developmental priorities largely coincide. Although much of the focus within district and local municipalities relates to the development and delivery of basic services, infrastructure, agriculture and tourism, the development of a green economy remains to be seen as an additional fundamental pillar of growth. Thus, in like manner with the national and provincial policies, the district and local municipalities have placed considerable emphasis on the prioritisation and promotion of renewable

energy resources within their boundaries. As previously mentioned, the Namakwa DM has a competitive advantage in the energy sector as wind, solar, wave, nuclear and natural gas energy plants have all been identified as suitable investments in the area. Amongst other sectors such as agriculture and tourism, renewable energy is thus prioritised. Several large-scale renewable energy projects have already been included in the IDP of the district. The district also recognises the importance of the agriculture and tourism industries in the area and promotes their development and transformation, especially eco-heritage (Namakwa DM, 2014).

It should be noted that the IDPs and SDFs for both the Hantam and Khai-Ma LMs have been assessed above in **section 3.2** and included in this section as the Khai-Ma LM is also located within close proximity to the project site and is thus expected to be impacted to a degree. Based on the above reviewed IDPs and SDF's, it is evident that the proposed project fits well with the plans to diversify the provincial, district and local economies through investment in renewable energy projects.

5 DESCRIPTION OF THE RECEIVING ENVIRONMENT

A general description of the study area is outlined in the section below. The receiving environment in relation to each specialist study is also provided.

5.1 Regional Locality

The proposed development will be located approximately 68km north of Loeriesfontein, within the Hantam Local Municipality in the Northern Cape Province (**Figure 5**). The proposed wind farm will be accessed by the N7 towards Kliprand via the R358 regional road or via the N1 to Loeriesfontein which lies south of the site. The centre point and corner co-ordinates for the development site are included in **Table 8**.

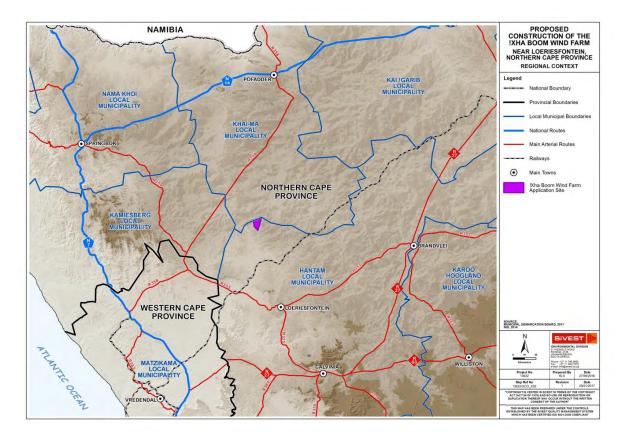


Figure 5: Regional Study Area.

5.2 Study Site Description

The site that is proposed for the Xha! Boom Wind Farm near Loeriesfontein is located on the following farm(s):

• Entire portion of Portion 2 of the Farm Georg's Vley No. 217; cadastral number: C0150000000021700002.

Table 8:	Application	Site Location
----------	-------------	---------------

	Xha! BOOM WIND FARM: APPLICATION SITE							
	CORNER POINT COORDINATES							
POINT SOUTH EAST								
XW_01 (NW)	S30° 16' 50.056"	E19° 13' 55.084"						
XW_02 (NE)	S30° 15' 14.650"	E19° 17' 53.313"						
XW_03 (SE)	S30° 21' 22.040"	E19° 16' 8.738"						
XW_04 (SW)	XW_04 (SW) S30° 19' 30.216" E19° 14' 19.283"							
	CENTRE POINT COOF	RDINATES						

SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD Proposed Xha! Boom Wind Farm - Final Scoping Report Version No: 1 04 August 2017

prepared by: SiVEST Environmental

POINT	SOUTH	EAST
XW_05	S30° 18' 2.587"	E19° 15' 47.612"

Please note that all maps within the report are included in **Appendix 5** and are in A3 format.

The application site as shown on the locality map below has a total developable area of approximately 3804 hectares (**Figure 6**). The total buildable area for the proposed Wind Farm is 1897.20 hectares. The entire application site has been assessed during the scoping phase, however, the 235MW wind farm layout will require only a portion of the area. The farm is currently used for agricultural purposes, specifically commercial sheep farming, and the wind farm is not envisioned to affect agricultural activities after the construction phase had been completed.

Preliminary layouts are discussed in **Chapter 7** of the FSR and are presented in the EIA plan of study in **Chapter 11** of this report. These will be assessed in detail during the EIA phase, and refined to avoid sensitive areas as required.


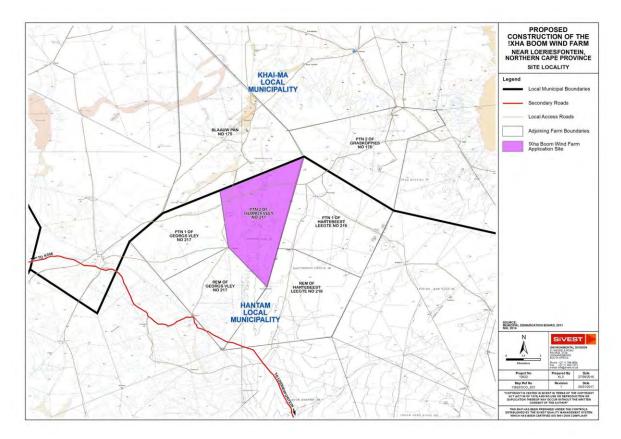


Figure 6: Site locality

5.3 Topography

The topography of the study site and surrounds is shown below (**Figure 7**). The area lies at a height of approximately 900 to 950 metres above sea level. The topography in the immediate vicinity of the site proposed for the wind farm is characterised by a flat to gently undulating landscape with gentle slopes (typical of much of the Karoo). Immediately north and north-east of the site the presence of a number of large pans signals that the topography is very flat and thus very poorly drained. Within the proposed wind farm site the topography is characterised by relatively flat terrain that slopes down gradually from a slight ridge in the eastern section of the site.

It should also be noted that the topography in certain parts of the wider study area is characterised by the presence of localised hills / ridges / koppies which create areas of localised hilly topography. In addition, the Klein and Groot Rooiberg and Leeuwberg koppies can also be found within the wider area and form an area of localised hilly topography to the south-east of the proposed Xha! Boom wind application site.

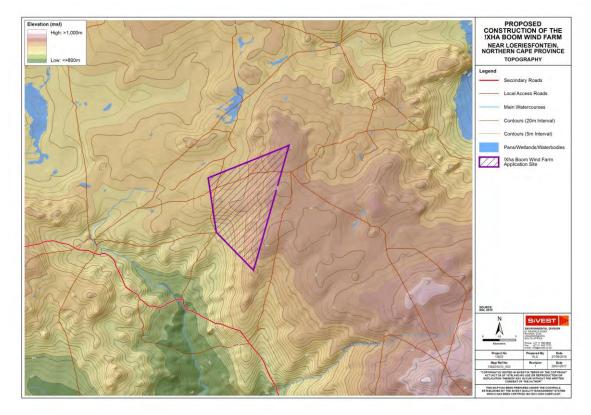

The degree of slope of the site and surrounding area are shown in Figure 8.

Figure 7: Topography of the study area.

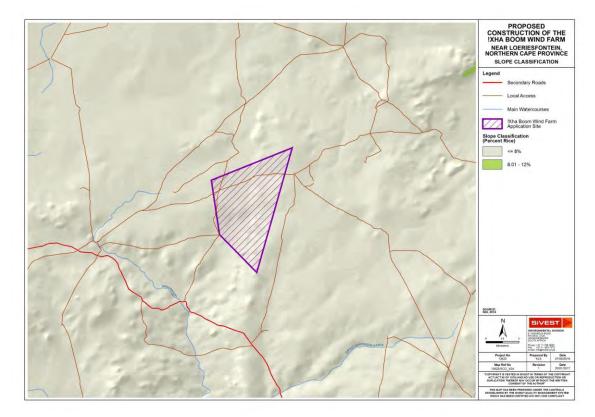


Figure 8: Degree of slope in region of the study area.

5.4 Geology

The underlying geology is shale of the Ecca and Dwyka Groups of the Karoo Supergroup with tillite of the Dwyka Group and dolerite intrusions.

According to the Geological Map of Loeriesfontein 3018 (scale 1:250 000, 2011) the site is mainly underlain by dolerite, which intruded into and crystallised as a sill within the brown and grey shale of the Prince Albert and Whitehill Formation. Significant alluvial sand deposits, associated with the local streams, partly cover the southern part of the site.

The Loeriesfontein 3018 Geological Map is shown in Figure 9.

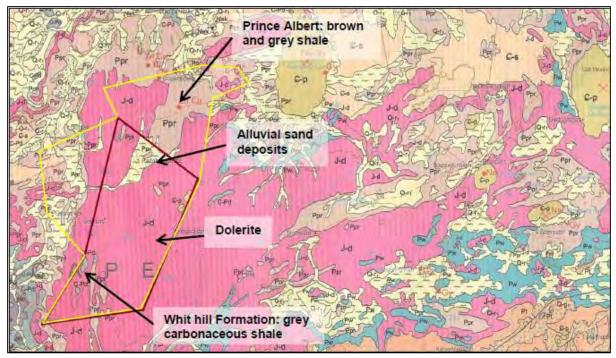


Figure 9: Loeriesfontein 3018 Geological Map for the study area

Breccia Pipes, associated with hydrothermal activity, caused by the dolerite intrusions, are found within the area, especially within the southern portion of the site. These pipes comprise baked and dislocated shale and mudstone, locally with breccia (shattered re-cemented blocks). Gas vugs and fractures are often filled with minerals like calcite, chlorite, fluorite, apophyllite, barite and quartz.

Economical zinc and copper deposits are found on Erf 176 in the north, but with the exception of a couple of borrow pits within the dolerite sill, no mining has occurred on site.

5.5 Land Use

Much of the land use in the wider study area is classified as bare (non-vegetated) although the northwestern and western sectors of the visual assessment zone are characterised by grassland and low shrubland (**Figure 10**). Sheep farming (**Figure 11**) is the dominant activity in the study area although the arid nature of the climate restricts stocking densities which has resulted in relatively large the farms across the area. The study area is therefore sparsely populated, and human-related infrastructure is largely restricted to isolated farmsteads and gravel access roads. The area is regarded as largely uninhabited and the closest built up area is the small town of Loeriesfontein approximately 68km to the south of the site.

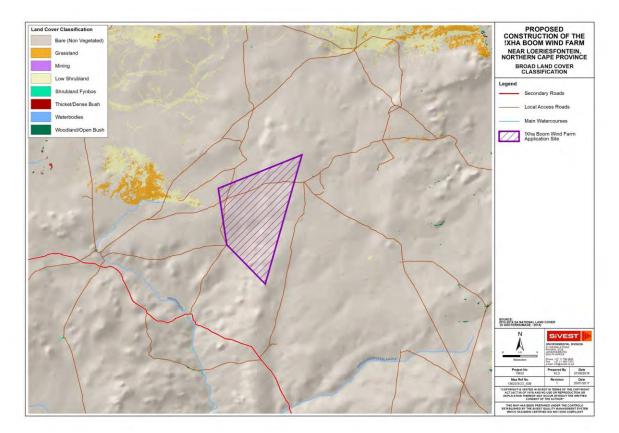


Figure 10: Land use in the region of the study area.



Figure 11: Typical view of the sheep farming activities which are dominant within the study area.

It should be noted that the study area is also characterised by the presence of certain pastoral elements (**Figure 12**). These elements can be found throughout the study area and are typically present in areas where sheep farming is taking place.

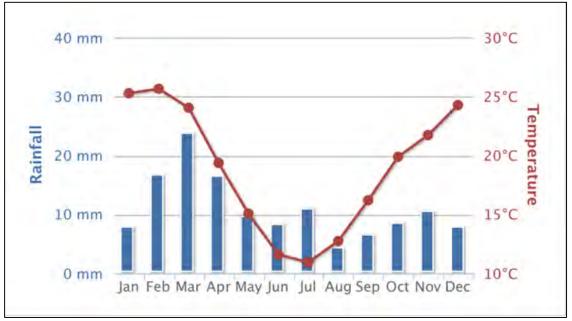


Figure 12: Example of typical pastoral elements which can be found within parts of the study area, especially in areas where sheep farming is taking place.

It should also be noted that quarrying activities are taking place on the eastern edge of 'Konnes se Pan', which is located to the north-east of the proposed Xha! Boom wind application site. This pan is however located outside of the study area. In addition, these quarrying activities are isolated to this part of the study area. As such, the quarrying activities are taking place outside of the study area and therefore there is no significant instance of transformation in the study area.

5.6 Climate

The area is dominated by the Cape Winter Season (cold fronts, resulting in soft, misty showers) and is characterised by semi-arid climatic conditions, with most of the rain falling at the start of autumn and during the winter. Rainfall for the site is given as a very low 130 mm per annum (The World Bank Climate Change Knowledge Portal, undated). The average monthly distribution of rainfall is shown in **Figure 13**. One of the most important climate parameters for agriculture in a South African context is moisture availability, which is the ratio of rainfall to evapotranspiration. This parameter largely controls what rain fed agriculture (including grazing) is possible within a given environment. Moisture availability is classified into 6 categories across the country (see **Table 9**). The site falls into the driest 6th category, which is labelled as a very severe limitation to agriculture.



Temperatures are moderate, with hot summers and cool winters. The average maximum daily temperatures vary from 32°C in February to 17°C in July, but temperatures can drop to 2°C.

Figure 13: Average monthly temperature and rainfall for the site from 1990-2012 (The World Bank Climate Change Knowledge Portal, undated).

Table 9: The classification of moisture availability climate classes for summer rainfall areas across
 South Africa (Agricultural Research Council, Undated)

Climate class	Moisture availability (Rainfall/0.25 PET)	Description of agricultural limitation
C1	>34	None to slight
C2	27-34	Slight
C3	19-26	Moderate
C4	12-18	Moderate to severe
C5	6-12	Severe
C6	<6	Very severe

5.7 Biodiversity

The Biodiversity Assessment was conducted by Simon Todd and is included as **Appendix 6A**. The environmental baseline from a biodiversity perspective is presented below. The purpose of the Terrestrial Biodiversity Scoping Report is to describe and detail the ecological features of the proposed site; provide a preliminary assessment of the ecological sensitivity of the site and identify the likely impacts that may be associated with the development of the site as a wind energy farm.

5.7.1 Broad-scale vegetation patterns

The national vegetation map (Mucina & Rutherford 2006) for the study area is depicted below in **Figure 14**. The majority of the Xha! Boom site is mapped as falling within the Western Bushmanland Klipveld vegetation type, with a small proportion of Bushmanland Basin Shrubland along the eastern boundary of the site. However, the site visit revealed that the majority of the areas classified as Bushmanland Basin Shrubland are in fact Bushmanland Arid Grassland. Although the dominant and characteristic species associated with each of these vegetation types is described in Mucina & Rutherford, these lists are not repeated here as the actual vegetation as observed at the site is described in the next section.

The south western margin of the site consists of Western Bushmanland Klipveld, which forms part of the Succulent Karoo Biome and occurs on the north-western plains of Bushmanland east of the Namaqualand Klipkoppe, north and south of Kliprand and west of Stofvlei. It consists of sparse plains of desertic character supporting dwarf succulent shrubs and drought-tolerant grasses. This vegetation type has an extent of 2297km², of which 99% is still intact, with no major transformation, although erosion is extensive with as much as 70% considered to be suffering from significant erosion. Eight endemic species are reported for this vegetation type by Mucina & Rutherford, which is significant given the low extent of this vegetation type.

Bushmanland Arid Grassland is an extensive vegetation type and is the second most extensive vegetation type in South Africa and occupies an area of 45 478 km². It extends from around Aggeneys in the east to Prieska in the west. It is associated largely with red-yellow apedal (without structure), freely drained soils, with a high base status and mostly less than 300mm deep. Due the arid nature of the unit which receives between 70 and 200 mm annual rainfall, it has not been significantly impacted by intensive agriculture and more than 99% of the original extent of the vegetation type is still intact. Mucina & Rutherford (2006) list 6 endemic species for the vegetation type which is a relatively low number given the extensive nature of the vegetation type.

With an extent of 34 690 km² Bushmanland Basin Shrubland is one of the most extensive vegetation types in South Africa. Bushmanland Basin Shrubland occurs on the extensive basin centered on Brandvlei and Van Wyksvlei, spanning Granaatboskolk in the west to Copperton in the east, and Kenhardt in the north to around Williston in the south. The area is characterised by slightly irregular plains dominated by a dwarf shrubland, with succulent shrubs or perennial grasses in places. The geology consists largely of mudstones and shales of the Ecca group and Dwyka tillites with occasional dolerite intrusions. Soils are largely shallow to non-existent, with calcrete present in most areas. Rainfall ranges from 100-200 mm and falls mostly during the summer months as thunder storms. As a result of the arid nature of the area, very little of this vegetation type has been affected by intensive agriculture and it is classified as Least Threatened. There are few endemic and biogeographically important species present at the site and only *Tridentea dwequensis* is listed by Mucina and Rutherford as biogeographically important while *Cromidon minimum, Ornithogalum bicornutum* and *O.ovatum subsp oliverorum* are listed as being endemic to the vegetation type.

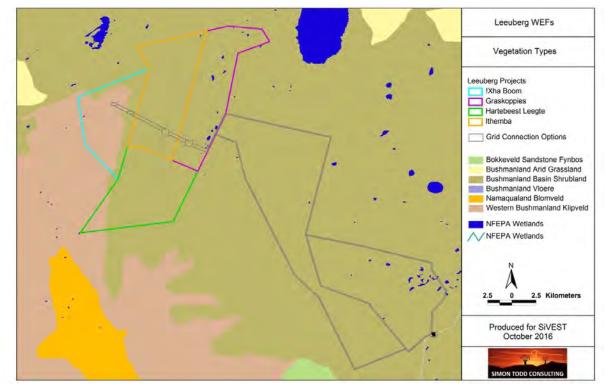


Figure 14: The national vegetation map (Mucina & Rutherford, 2006) for the study area. Rivers and wetlands (pans) delineated by the National Freshwater Ecosystem Priority Areas Assessment (Nel *et al.* 2011) are also depicted.

5.7.2 Fine-scale vegetation patterns

The site visit revealed that the site consists of two clear parts, the Western Bushmanland Klipveld section in the lower-lying areas in the west and then a much smaller strip of Bushmanland Arid Grassland along the eastern boundary of the Xha! Boom site boundary. These two broad units are seprated by a broken ridge system with sporadic rocky outcrops. The Western Bushmanland Klipveld and the Bushmanland Arid Grassland are generally considered low sensitivity, but the ridge that divides them is considered relatively sensitive and disturbance to this area should be minimised.

The areas mapped as Bushmanland Basin Shrubland by Mucina & Rutherford (2006) are consistently dominated by grasses with low shrub cover and are clearly more closely allied with Bushmanland Arid Grassland. This discrepancy with the vegetation map can be ascribed to the coarse nature of the national vegetation map and associated uncertainty along the boundaries of the vegetation units. In addition, boundaries between units have been mapped largely from aerial or satellite imagery and these boundaries are not always clearly visible. The main driver of vegetation pattern in the area is substrate. On the gravels and stony soils which characterise the western part of the site, the vegetation consists of open shrub-dominated vegetation of Bushmanland Basin Shrubland, while on sandy soils the vegetation is typically dominated by various *Stipagrostis* species and is typical of Bushmanland Arid Grassland. There are also some areas on shallow soils, which consist of grassy shrublands and are transitional areas.



Figure 15: Typical vegetation of the Xha! Boom site, which consist of Western Bushmanland Klipveld has very low cover and consists of bare, open areas alternating with shrubby or grassy areas with deeper soils or which accumulate more soil moisture.

The majority of the Xha! Boom site consists of Western Bushmanland Klipveld. These areas are dominated by shrub species such as *Pentzia incana*, *Zygophyllum lichtensteinianum*, *Zygophyllum retrofractum*, *Zygophyllum flexuosum*, *Eriocephalus spinescens*, *Aptosimum spinescens*, *Tripteris sinuata*, *Hermannia spinosa*, *Felicia clavipilosa*, *Osteospermum armatum*, *Pegolettia retrofracta*, *Pteronia glomerata*, *Pteronia sordida*, *Thesium hystrix*, *Euphorbia decussata* and *Salsola tuberculata*; succulent shrubs including *Aridaria noctiflora*, *Ruschia intricate*, *Prenia tetragonia* and *Sarcocaulon patersonii*; annual grasses such as *Aristida congesta*, *Stipagrostis anomala* and *Enneapogon desvauxii*. Taller shrubs are usually restricted to run-on environments and consist of species such as *Lycium pilifolium* and *Rhigozum trichotomum*. There are also a number of forbs and annuals present including *Sesamum capense*, *Galenia sarcophylla*, *Gazania lichtensteinii*, *Leysera tenella*, *Osteospermum pinnatum* and *Tribulis terrestris*. Cover across most of this area is very low and while this can be partly attributed to the aridity of the area, livestock grazing also appears to have played a significant role in leading to the degradation of the area and further loss in the plant cover.

The areas of Bushmanland Arid Grassland tend to be very homogenous with little species turnover and are usually dominated by *Stipagrostis ciliata*, *S.brevifolia* and *s.obtusa* with low shrubs such as *Lebeckia spinescens*, *Monechma incanum*, *Asparagus capensis*, *Asparagus retrofractus*, *Eriocephalus microphyllus var. pubescens*, *Zygophyllum retrofactum* with occasional larger *Lycium pumilum* shrubs or small *Parkinsonia africana* trees. Protected or listed species are rare in this habitat and only an occasional *Hoodia gordonii* was observed within this vegetation type. The rocky outcrops which occur along the western boundary of this unit in the transional area with Western Bushmanland Klipveld contain a number of species not observed elsewhere including *Aloe falcata*, *Dyerophytum africanum*, *Asparagus africanus*, *Thesium lineatum*, *Pteronia incana* and *Searsia burchellii*.



Figure 16: The eastern margin of the Xha! Boom site consists of open plains of Bushmandland Arid Grassland, interspersed with more shrubby areas of Bushmanland Basin Shrubland. These areas are not considered sensitive as the diversity is low and there are few species of concern present.



Figure 17: The transional areas between the grassy plains in the east of the Xha! Boom site and the Western Bushmanland Klipveld consists of a low ridge with sporadic rocky outcrops. Such features are not common in the area and are important habitats for fauna and flora.

prepared by: SiVEST Environmental

5.7.3 Listed plant species

The study area has been very poorly sampled in the past and many of the quarter degree squares in the area have no data available. Listed and protected species observed in the area include the provincially protected species *Aloe falcata*, *A.claviflora* and *Hoodia gordonii* and *Aloinopsis luckhoffii* and *Euphorbia multiceps*. *Hoodia gordonii* is protected under NEMA and is listed as DDD (Data Deficient – insufficient information) while *Aloinopsis luckhoffii* is provincially protected is listed as taxonomically uncertain (DDT).

5.7.4 Critical biodiversity areas & broad-scale processes

The site lies within the planning domain of the Namakwa Biodiversity Sector Plan (Desmet & Marsh 2007). This biodiversity assessment identifies Critical Biodiversity Areas (CBAs) which represent biodiversity priority areas which should be maintained in a natural to near natural state. The CBA maps indicate the most efficient selection and classification of land portions requiring safeguarding in order to maintain ecosystem functioning and meet national biodiversity objectives. There are no CBAs within the wind farm site or along the power line corridors, with the nearest CBA being northeast of the site on one of the large pans of the area. The southwestern corner of the site projects a little way into an Ecological Support Area but if there is any development in this area it would not significantly impact the ecological functioning of the CBA. Although it is not yet published, the Northern Cape Conservation Plan (Oosthuysen & Holness, 2016) defines CBAs for the whole Northern Cape and will be shortly published. The site does not fall within any CBAs defined within this map either (Figure 18), suggesting that no significant biodiversity features have been identified in this area. Although there are some CBAs along the grid connection route, the presence of a power line will generate a low terrestrial impact and this would not compromise the functioning of these CBAs which are corridors associated with larger drainage lines. In addition, the site does not lie within a National Protected Area Expansion Strategy (NPAES) focus area and has therefore not been identified as an important area for future conservation area expansion.

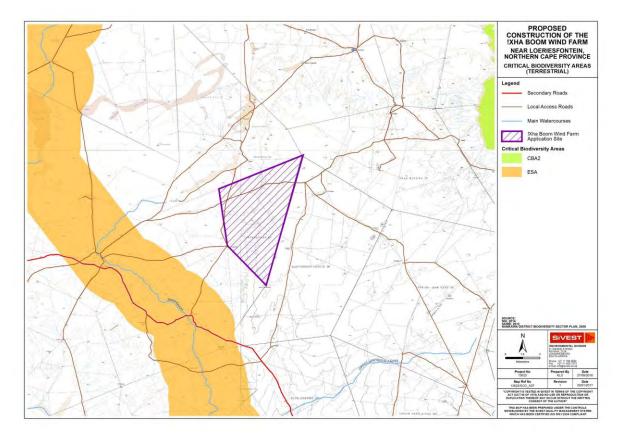


Figure 18: Extract of the Northern Cape Conservation Plan for the study area, showing that there are no CBAs within the Xha! Boom site.

5.7.5 Faunal communities

Mammals

The site falls within the distribution range of 40 terrestrial mammals suggesting that potential mammalian diversity at the site is quite low. Species observed in the area include Steenbok *Raphicerus campestris*, Cape Porcupine *Hystrix africaeaustralis*, Aardvark *Orycteropus afer*, Yellow Mongoose *Cynictis penicillata*, Cape Hare *Lepus capensis*, Cape Fox *Vulpes chama*, Bat-eared Fox *Otocyon megalotis* and Round-eared Elephant Shrew *Macroscelides proboscideus*. In terms of specific habitats which are likely to be of above average significance, the low ridges and drainage lines are likely to contain the highest fauna abundance and diversity.

Listed mammal species which may occur at the site includes the Black-footed cat *Felis nigripes* (Vulnerable) and Honey Badger *Mellivora capensis* which is listed as Endangered in the South African Red Data Book of Mammals, but is listed as Least Concern by the IUCN. As these species have a broad distribution across South Africa, the relatively limited footprint of the development is not likely to compromise the local or regional populations of these species, especially given the aridity of the area and the associated very low density of such species in the area.

Reptiles

The site lies in or near the distribution range of at least 40 reptile species (**Appendix 3** of the Biodiversity Specialist Report), comprising 5 tortoises, 12 snakes, 15 lizards and skinks, 8 geckos and 1 chameleon. This is a comparatively low total, suggesting that reptile diversity at the site is likely to be low. There are no listed species which are likely to occur at the site. Species which were observed in the area include the Karoo Girdled Lizard *Karusasaurus polyzonus*, the Namaqua Sand Lizard *Pedioplanis namaquensis*, Spotted Desert Lizard *Meroles suborbitalis*, Western Sandveld Lizard *Nucras tessellata*, Southern Rock Agama *Agama atra*, Ground Agama *Agama aculeata subsp. aculeata* and Bushmanland Tent Tortoise *Psammobates tentorius verroxii*. In terms of the likely impacts of the development on reptiles, habitat loss is not likely to be highly significant as the direct footprint of the development is not likely to exceed a few hundred hectares and this would not be significant in context of the relatively homogenous and intact surrounding landscape. In some situations, the loss of vegetation cover associated with roads and other cleared areas can generate significant impact on reptiles as they may be vulnerable to predation while crossing such cleared areas, but as the site is arid, plant cover is already low and the reptile species present are mostly adapted well to low-cover environments.



Figure 19: The Karoo Girdled Lizard is common on small rocky outcrops which occur scattered throughout the Xha! Boom site.

<u>Amphibians</u>

Given the aridity of the site and lack of surface water in the area, it is not surprising that only six frog species may occur in the area. Of these only those which are relatively independent of water such as the Karoo Toad *Vandijkophrynus gariepensis* are likely to occur within the site itself. Impacts on amphibians are likely to be low given the limited extent of the development as well as low likely density of amphibians in the area. Although there are some pans present in the area, these are not necessarily available to amphibians as many of the pans are saline and not suitable for amphibians.

5.7.6 Xha! Boom sensitivity assessment

The draft sensitivity map for the study area is depicted below in **Figure 20**. The vast majority of the site consists of arid shrublands or arid grasslands on open plains that are not considered highly sensitive.

The transition area between the arid grasslands of the east and the Klipveld of the west is considered a sensitive area and the rocky outcrops in particular should be avoided. There are also numerous washes and minor drainage features running off the ridge towards the west and while these are not well developed and do not have significant riparian vegetation, they should still be avoided as much as possible. Overall, apart from these features which occupy a small proportion of the site, the site is considered low sensitivity and the impact of the development would be local in nature and there are no highly significant impacts that cannot be reduced to a low level.

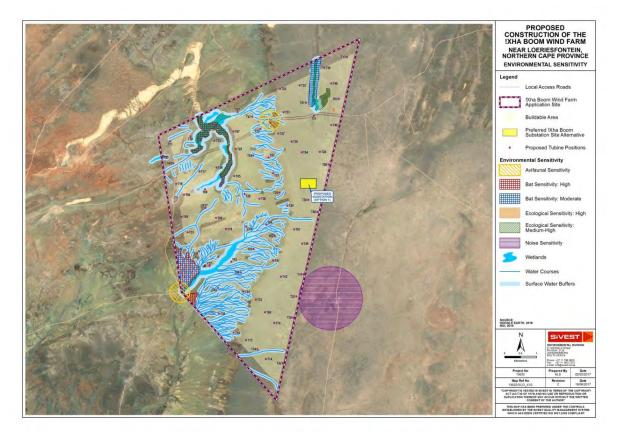


Figure 20: Draft sensitivity map for the Xha! Boom study area and the larger Leeuwberg site. The majority of the site is arid grassland or low open shrublands of low sensitivity.

5.8 Avifauna

The Avifauna Assessment was conducted by Chris van Rooyen and is included as **Appendix 6B**. The environmental baseline from an avifaunal perspective is presented below.

5.8.1 Description of the Affected Environment

5.8.1.1 Natural Environment

The development area is located on a vast, arid, topographically uniform plain. The habitat is very uniform, and consists mainly of Western Bushmanland Klipveld and a small section of Bushmanland Basin Shrubland in the east and the north of the development area. Western Bushmanland Klipveld is characterized by succulent dwarf shrubs (*Aciduria, Drosanthemum, Eberlanzia, Phyllobolus, Psilocaulon, Ruschia*), with microphyllous nonsucculent shrubs (*Aptosimum, Pentzia*) and drought-tolerant grasses, with occasional mass display of annual spring flora. Bushmanland Basin Shrubland consists of dwarf shrubland dominated by a mixture of low, sturdy and spiny (and sometimes also succulent) shrubs (*Rhigozum, Salsola, Pentzia, Eriocephalus*), 'white' grasses (*Stipagrostis*) and in years of high rainfall also abundant annual flowering plants such as species of *Gazania* and *Leysera* (Mucina & Rutherford 2006).

A number of ephemeral drainage lines flow though the development area, but they only hold water for brief periods after exceptional rainfall events, which are rare events. The study area is extremely arid with a mean annual rainfall of 170.5mm, with peak rainfall between March and July. The temperatures are highest on average in January, at around 22.8 °C. The lowest average temperatures in the year occur in July, when it is around 9.9 °C. The development area is situated in an ecological transitional zone between the Nama Karoo and Succulent Karoo biomes (Harrison et al. 1997). In comparison with Succulent Karoo, the Nama Karoo has higher proportions of grass and tree cover. The ecotonal nature of the study area is apparent from the presence of typical avifauna of both Succulent and Nama Karoo e.g. Karoo Eremomela Eremomela gregalis (Succulent Karoo) and Red Lark Calendulauda burra (Nama Karoo). The two Karoo vegetation types support a particularly high diversity of bird species endemic to Southern Africa, particularly in the family Alaudidae (Larks). Its avifauna typically comprises ground-dwelling species of open habitats (Harrison et al. 1997). Because rainfall in the Nama Karoo falls mainly in summer, while peak rainfall in the Succulent Karoo occurs mainly in winter, it provides opportunities for birds to migrate between the Succulent and Nama Karoo, to exploit the enhanced conditions associated with rainfall. Many typical karroid species are nomads, able to use resources that are patchy in time and space (Barnes, 1998).

A feature of the arid landscape where the development area is located is the presence of pans. Pans are endorheic wetlands having closed drainage systems; water usually flows in from small catchments but with no outflow from the pan basins themselves. They are typical of poorly drained, relatively flat and dry regions. Water loss is mainly through evaporation, sometimes resulting in saline conditions, especially in the most arid regions. Water depth is shallow (<3m), and flooding characteristically ephemeral (Harrison *et al.* 1997). Although the development area itself does not contain any significant pans, there is a major pan, known as Konnes se Pan, situated approximately 21km north-east of the development area, and a series of small pans, known as Die Soutkomme, approximately 7km east of the development area. When these pans hold water (which is only likely after exceptional rainfall events which may occur only once a decade or more), waterbird movement to and from these pans is possible, including Greater Flamingo *Phoenicopterus roseus* and Lesser Flamingo *Phoenicopterus* minor. It is possible that nocturnal flamingo movement might take place over the proposed wind farm sites between the coast and the abovementioned pans, although this should be sporadic rather than regularly.

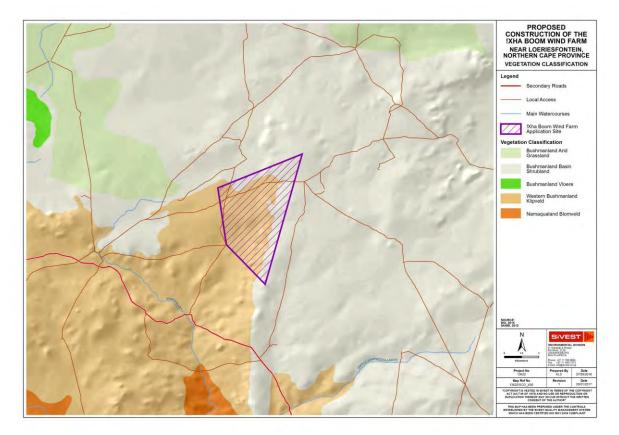


Figure 21: Vegetation types in the greater study area, indicating the homogenous character of the habitat at the proposed Xha! Boom Wind farms (Mucina & Rutherford 2006).

5.8.1.2 Modified Environment

Whilst the distribution and abundance of the bird species in the broader development area are mostly associated with natural vegetation, as this comprises virtually all the habitat, it is also necessary to examine the few external modifications to the environment that have relevance for birds.

The following avifaunal-relevant anthropogenic habitat modifications were recorded within the broader development area:

- Water points: The land use in the broader development area is mostly small stock farming. The entire area is divided into grazing camps, with several boreholes with associated water reservoirs and drinking troughs. In this arid environment, open water is a big draw card for several bird species, including priority species such as Martial Eagle, Verreaux's Eagle and Sclater's Lark that use the open water troughs to bath and drink.
- Transmission lines: The Aries Helios 400kV transmission line runs approximately 25km east of the proposed WEF areas. The transmission towers are used by raptors for perching and roosting, and also for breeding. Three Martial Eagle nests were recorded on the Aries Helios 400kV transmission line east of the proposed sites, two of which were active during the monitoring period. The study area contains many fence-lines which are used by several priority species for perching.

Appendix B of the Avifauna Specialist Report provides a photographic record of the habitat in the study area. A map of the study area, indicating the location of water points, raptor nests and HV lines is shown in Figure 22.

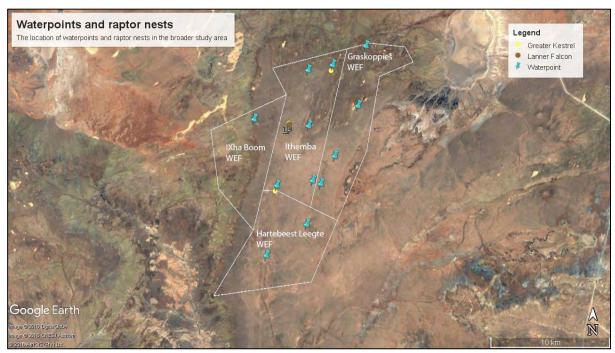


Figure 22: Location of water points and raptor nests in the greater area.

5.8.2 Avifauna

A total of 56 species were recorded in the broader study area (i.e. the WEF sites, control area and immediate surroundings) during the pre-construction monitoring from all data sources (drive transects, walk transects, VP watches, focal point counts and incidental sightings), of which 12 (21.4%) are priority species.

Overall species composition

The broader study area supports a relatively low diversity and abundance of avifauna, which is to be expected in an arid area like Bushmanland. Based on species diversity recorded during transect surveys, the development areas and control area are essentially similar as far as priority species are concerned. The higher counts at the development areas is most likely a result of the difference in survey effort, and does not reflect any intrinsic differences in habitat quality or species diversity.

Abundance

The abundance of priority species at the development areas is low, with less than one bird per kilometre recorded during transect counts - 0.743 birds/km were recorded on drive transects, and 0.905 birds/km were recorded during walk transects. Red Lark and Greater Kestrel emerged as the two most abundant SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD prepared by: SiVEST Environmental Proposed Xha! Boom Wind Farm - Final Scoping Report Version No: 1 04 August 2017

priority species at the development areas during drive transect counts, and Red Lark and Karoo Korhaan were the two most abundant species during walk transects. Red Lark, Karoo Korhaan, Northern Black Korhaan and Greater Kestrel definitely breed in the study area, and Ludwig's Bustard, Burchell's Courser and Double-banded Courser potentially too, although no evidence of bustard display areas or nests were recorded. Raptors were generally sparse with Greater Kestrel the most frequently recorded species during both the drive and walk transects. Other raptors were recorded sporadically in very low numbers.

Table 10 below lists all the priority species that could potentially occur at the development area, based on SABAP1 and SABAP2 data, and the results of the pre-construction monitoring. Priority species recorded during pre-construction surveys at the development areas are shaded. The following abbreviations and acronyms are used:

- VU Vulnerable
- NT Near threatened
- EN Endangered
- SAE Southern African endemic or near endemic
- Ct Collisions with turbines
- Dd Displacement through disturbance
- Dh Displacement habitat transformation
- Ep Electrocution on the internal MV overhead powerlines

Name	Scientific name	Regional threatened status (Taylor <i>et al.</i> 2015)	Global threatene d status (IUCN 2016)	BLSA/EWT Priority rating (on scale of 170 – 395)	Terrestrial	Soaring	Likelihood of occurrence	Potential impact
Martial Eagle	Polemaetus bellicosus	EN	NT	330		x	Confirmed. One incidental sighting of a flying bird in the broader area, and recorded briefly flying high over the study area. Could sporadically be attracted to water troughs.	Ct, Dd, Ep
Ludwig's Bustard	Neotis ludwigii	SAE, EN	EN	320	x		Confirmed. Occurrence likely to be linked to habitat conditions. The species is nomadic and a partial migrant and may occur sporadically.	Ct, Cp, Dd,
Secretarybird	Sagittarius serpentarius	VU	VU	320	x	x	Low. May occur sporadically	Ct, Cp, Dd,
Kori Bustard	Ardeotis kori	NT	Least concern	280	x		Low. May occur sporadically. Lack of dry watercourses with trees	Ct, Cp, Dd,

Table 10: Priority species (Retief et al. 2012) potentially occurring at the development area. Species recorded in the development areas are shaded.

SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD Proposed Xha! Boom Wind Farm - Final Scoping Report

prepared by: SiVEST Environmental

Version No: 1

04 August 2017

							may be an inhibiting factor.	
Lanner Falcon	Falco biarmicus	VU	Least concern	280		x	Confirmed. Breeding resident. Most likely to perch on fence lines running through the study area, but may also be attracted to the water points where it hunts small birds.	Ct
Sclater's Lark	Spizocorys sclateri	SAE, NT	NT	240	x		Confirmed. The species is nomadic and may occur sporadically.	Dd Dh
Steppe Buzzard	Buteo vulpinus		Least concern	210		x	Low. Most likely to be associated with utility lines and fence lines. May occur sporadically	Ct
Verreaux's Eagle	Aquila verreauxi	VU	Least concern	360		x	Confirmed. Solitary single birds were recorded sporadically. Could sporadically be attracted to water troughs, one individual	Ct, Ep

SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD Proposed Xha! Boom Wind Farm - Final Scoping Report

prepared by: SiVEST Environmental

Version No: 1 04 August 2017

							was recorded drinking at a water trough.	
Black-chested Snake-Eagle	Circaetus pectoralis		Least concern	230		x	Confirmed. May visit water points.	Ct, Ep
Southern Pale Chanting Goshawk	Melierax canorus	SAE	Least concern	200	x	x	Confirmed. Habitat is very suitable for the species.	Ct, Dd
Karoo Korhaan	Eupodotis vigorsii	SAE, NT	Least concern	190	x		Confirmed. One of the most commonly recorded terrestrial species. Occurs all over the study area.	Ct, Dd, Cp
Northern Black Korhaan	Afrotis afraoides	SAE	Least concern	180	x		Confirmed. One of the most commonly recorded terrestrial species. Occurs all over the study area.	Ct, Dd, Cp
Greater Kestrel	Falco rupicoloides		Least concern	174		x	Confirmed. Encountered all over the study area, but most likely to be associated with utility lines and fences which are used for perching.	Ct

prepared by: SiVEST Environmental

Version No: 1 04 August 2017

Page 65

	Milvus aegyptius	Least concern	0		х	Confirmed. May visit water points sporadically.	Ct
--	---------------------	------------------	---	--	---	---	----

Name	Scientific name	Regional threatened status (Taylor <i>et al.</i> 2015)	Global threatene d status (IUCN 2016)	BLSA/EWT Priority rating (on scale of 170 – 395)	Terrestrial	Soaring	Likelihood of occurrence	Potential impact
Spotted Eagle- Owl	Bubo africanus	Least concern	Least concern	170	Nocturnal raptor but flight characteristic s more like terrestrial species		High. Could be encountered anywhere in the study area.	Ct
Jackal Buzzard	Buteo rufofuscus	SAE	Least concern	125		x	Confirmed. Most likely to be associated with utility lines and fence lines. May occur sporadically, particularly immature birds.	Ct
Burchell's Courser	Cursorius rufus	SAE, VU	Least concern	140	x		Confirmed. Mostly recorded in the west of the study area.	Ct
Double- banded Courser	Rhinoptilus africanus	NT	Least concern	154	x		Confirmed. Recorded sparsely all over the study area.	Ct

SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD Proposed Xha! Boom Wind Farm - Final Scoping Report

prepared by: SiVEST Environmental

Version No: 1

Booted Eagle	Aquila pennatus		Least concern	230		x	Confirmed. Most likely to be encountered foraging on the wing over the site, and coming down to water points to bath and drink.	Ct
Greater Flamingo	Phoenicopteru s roseus	NT	LC	290	Waterbird which undertakes long distance, nocturnal powered flight.		Low. Might be attracted to large pans outside the study area, but occurrence is linked to standing water. This will only happen after exceptional rain events, perhaps once a decade during which the pan will contain standing water for a short period.	Ct
Lesser Flamingo	Phoeniconaias minor	NT	NT	290	Waterbird which undertakes long distance, nocturnal powered flight.		Low. Might be attracted to large pans outside the study area, but occurrence is linked to standing water. This will only happen after exceptional rain events, perhaps once a decade during which the pan will contain standing water for a short period.	Ct

SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD Proposed Xha! Boom Wind Farm - Final Scoping Report

prepared by: SiVEST Environmental

Page 67

Version No: 1 04 August 2017

5.8.3 Addendum to the Avifaunal Impact Assessment

The original turbine dimensions on which the collision risk index for the four development areas was calculated were a hub height of up to 150m and a rotor diameter of up to 150m. Mainstream has however subsequently decided to change the turbine dimensions to a hub height of up to 160m and a rotor diameter of up to 160m. As such, an addendum report was compiled in order to assess whether the conclusions and recommendations of the original Bird Impact Assessment Report compiled for the Graskoppies Wind Farm in December 2016 will be affected by the proposed change in the turbine dimensions. The addendum report is included in **Appendix 6B**.

Based on this addendum report, the conclusions and recommendations of the original Bird Impact Assessment Report remains unchanged by the proposed change in turbine dimensions. The reason for that are as follows:

- While the risk rating for Martial Eagle has increased with the new turbine dimensions, it is still below the average risk rating for priority species;
- The overall risk rating for priority species has increased by only 7.45%;
- The weight of published findings indicate that rotor swept area as a stand-alone issue is not a key factor in determining collision risk.

5.9 Bats

The Bat Assessment was conducted by Daleen Burger, Monika Moir and Werner Marais of Animalia Zoological & Ecological Consultation. The full report is included in **Appendix 6C**. The environmental baseline from a bat perspective is presented below.

5.9.1 Land Use, Vegetation, Climate and Topography

The site is located over two different vegetation units, namely Bushmanland Basin Shrubland and Western Bushmanland Klipveld. The following vegetation units are found in the surrounding area: Namaqualand Blomveld, Bushmanland Arid Grassland and Bushmanland Vloere (**Figure 21**).

The site mostly falls in the Bushmanland Basin Shrubland vegetation unit which consists of slightly irregular plains with dwarf shrubland dominated by a mixture of low sturdy and spiny shrubs as well as 'white' grasses and abundant annuals in years of high rainfall. This unit is found at an altitude of 800 m – 1200 m. Mudstones and shales of Ecca Group and Dwyka tillites, both of early Karoo age, dominate the unit. About 20% of rock outcrop is formed by Jurassic intrusive dolerite sheets and dykes. Soils are shallow Glenrosa and Mispah forms with lime generally present in the entire landscape. To a lesser extent, red-yellow apedal, freely drained soils with a high base status and usually less than 15% clay are also found. These soils have a high salt content. Rainfall occurs mainly in late summer and early autumn with MAP ranging from 100 mm - 200 mm. Mean maximum and minimum temperatures are

39.6°C and -2.2°C for January and July, respectively. This biome is Least Threatened with a target of 21%. None of the unit is statutorily conserved and is without signs of serious transformation. Erosion is moderate (56%) and low (34%) (Mucina and Rutherford 2006).

The Western Bushmanland Klipveld vegetation unit is mostly present in the western parts of the site. The unit consists of very sparsely populated plains with a desert appearance supporting succulent dwarf shrubs with microphyllous non succulent shrubs and draught tolerant grasses. There are occasional mass displays of spring flora. Geology consists of Hutton and Mispah soils over Karoo Sequence sediments. The rocky pavement of rounded boulders, which characterise this area, are palaeo-river terraces of the palaeo-Orange river, which is presumed to have flowed south through this area (approximately 22 mya). Rainfall shows slight peak in winter, hardly any rain falls in December and January, thus this unit is in winter-rainfall regime. Mean maximum and minimum temperatures are 36°C and -2°C for January and July, respectively. Incidence of frost is relatively high due to its land-locked position and high altitude. The biome is Least threatened with a target of 18%. No portion of the vegetation unit is statutorily conserved. There are no signs of serious large scale transformation or invasion of alien species (Mucina and Rutherford 2006).

Vegetation units and geology are of great importance as these may serve as suitable sites for the roosting of bats and support of their foraging habits (Monadjem *et al.* 2010). Houses and buildings may also serve as suitable roosting spaces (Taylor 2000; Monadjem *et al.* 2010). The importance of the vegetation units and associated geomorphology serving as potential roosting and foraging sites have been described in **Table 11** below.

Vegetation	Roosting	Foraging	Comments
Unit	Potential	Potential	
Namaqualand	Low -	Moderate - High	Scattered and few rocky outcrops as well as
Blomveld	Moderate		little to no large flora result in low roosting
			potential. The flowering flora results in higher
			concentrations of insects and thus increasing
			foraging.
Bushmanland	Low -	Low - Moderate	Roosting potential is almost entirely determined
Arid Grassland	Moderate		by sparse rocky outcrops resulting in low
			roosting potential. The lack of diverse flora
			results in a lower diversity of insect species
			resulting in lowered foraging potential.
Bushmanland	Low -	Moderate	Rocky outcrops provide roosting areas and
Basin	Moderate		scrubland provides potential foraging space.
Shrubland			
Western	Moderate -	Moderate - High	The presence of large boulders and rock
Bushmanland	High		outcrops provide roost sites. The presence of
Klipveld			drought tolerant grasses as well as a variety of
			shrubs make for adequate foraging area.

Bushmanland	Low	Moderate -High	This biome possesses salt pans and dry			
Vloere			riverbeds which does not provide adequate			
			roosting place. The sprouting of flora may infer			
			a higher foraging capacity for the unit.			

Refer to Figure 21 above for vegetation units present on the study area (Mucina and Rutherford 2006).

5.9.2 Literature Based Species Probability of Occurrence

"Probability of Occurrence" is assigned based on consideration of the presence of roosting sites and foraging habitats on the site, compared to literature described preferences. The probability of occurrence is described by a percentage indicative of the expected numbers of individuals present on site and the frequency with which the site will be visited by the species (in other words the likelihood of encountering the bat species).

The column of "Likely risk of impact" describes the likelihood of risk of fatality from direct collision or barotrauma with wind turbine blades for each bat species. The risk was assigned by Sowler and Stoffberg (2014) based on species distributions, altitudes at which they fly and distances they travel; and assumes a 100% probability of occurrence. The ecology of most applicable bat species recorded in the vicinity of the site is discussed below.

Table 12: Table of species that may be roosting or foraging on the study area, the possible site specific roosts, and their probability of occurrence based on literature (Monadjem *et al.* 2010).

Species name	Common name	Probability of	Conservation Status	Possible roosting sites occupied on site	Foraging habits (indicative of possible foraging areas	Likely Risk of Impact (Sowler
		Occurrence (%)			on site)	& Stoffberg 2014)
Miniopterus natalensis	Natal long- fingered bat	10 - 20	Near Threatened	Cave-dependent. No known caves in vicinity of site, however mountainous terrain within the larger area can possibly provide caves. Also being observed to forage singly or in small groups in small hollows and culverts or bridges.	Clutter-edge forager. Feeds on a variety of aerial prey including <i>Diptera</i> , <i>Hemiptera</i> , <i>Coleoptera</i> , <i>Lepidoptera</i> and <i>Isoptera</i> .	Medium - High
Neoromicia capensis	Cape serotine	90 - 100	Least Concern	Possibly large trees around farm buildings livestock kraal and shade areas. Limited farm building roofs	Clutter-edge forager feeding mainly on <i>Coleoptera</i> , <i>Hemiptera</i> , <i>Lepidoptera</i> and <i>Neuroptera</i> .	Medium - High
Tadarida aegyptiaca	Egyptian free- tailed bat	90 - 100	Least concern	Limited farm buildings and tall farm structures. Crevice dweller that will take refuge in almost any suitably sized crevice raised above ground.	consisting mainly of Diptera,	High

prepared by: SiVEST Environmental

Eptesicus	Long-tailed	90 - 100	Least	It is a crevice dweller roosting in	It seems to prefer woodland	Medium
hottentotus	serotine		Concern	rock crevices, expansion joints in	habitats, and has been caught	
				bridges and road culverts	in granitic hills and near rocky	
					outcrops	

prepared by: SiVEST Environmental

5.9.3 Ecology of bat species that may be largely impacted by the proposed Xha! Boom Wind Farm

There are three bat species recorded in the vicinity of the site that occurs commonly in the area due to their probably of occurrence and widespread distribution. These species are of importance based on their likelihood of being impacted by the proposed wind farm, which is a combination of abundance and behaviour. The relevant species are discussed below.

<u>Miniopterus natalenis</u>

Miniopterus natalensis, also commonly referred to as the Natal long-fingered bat, occurs widely across the country but mostly within the southern and eastern regions and is listed as Near Threatened (Monadjem *et al.* 2010).

This bat is a cave-dependent species and identification of suitable roosting sites may be more important in determining its presence in an area than the presence of surrounding vegetation. It occurs in large numbers when roosting in caves with approximately 260 000 bats observed making seasonal use of the De Hoop Guano Cave in the Western Cape, South Africa. Culverts and mines have also been observed as roosting sites for either single bats or small colonies. Separate roosting sites are used for winter hibernation activities and summer maternity behaviour, with the winter hibernacula generally occurring at higher altitudes in more temperate areas and the summer hibernacula occurring at lower altitudes in warmer areas of the country (Monadjem *et al.* 2010).

Mating and fertilisation usually occur during March and April and is followed by a period of delayed implantation until July/August. Birth of a single pup usually occurs between October and December as the females congregate at maternity roosts (Monadjem *et al.* 2010 & Van Der Merwe 1979).

The Natal long-fingered bat undertakes short migratory journeys between hibernaculum and maternity roosts. Due to this migratory behaviour, they are considered to be at high risk of fatality from wind turbines if a wind farm is placed within a migratory path (Sowler *et al.* 2016). The mass movement of bats during migratory periods could result in mass casualties if wind turbines are positioned over a mass migratory route and such turbines are not effectively mitigated. Very little is known about the migratory behaviour and paths of *Miniopterus natalensis* in South Africa with migration distances exceeding 150 kilometres. If the site is located within a migratory path the bat detection systems should detect high numbers and activity of the Natal long-fingered bat.

A study by Vincent *et al.* (2011) on the activity and foraging habitats of Miniopteridae found that the individual home ranges of lactating females were significantly larger than that of pregnant females. It was also found that the bats predominately made use of urban areas (54%) followed by open areas (19.8%), woodlands (15.5%) orchards and parks (9.1%) and water bodies (1.5%) when selecting habitats. Foraging areas were also investigated with the majority again occurring in urban areas (46%); however, a lot of foraging also occurred in woodland areas (22%), crop and vineyard areas (8%), pastures, meadows and scrubland (4%) and water bodies (4%).

Sowler and co-workers (2016) advise that *Miniopterus natalensis* faces a medium to high risk of fatality due to wind turbines. This evaluation was based on broad ecological features and excluded migratory information.

<u>Neoromicia capensis</u>

Neoromicia capensis is commonly called the Cape serotine and has a conservation status of Least Concern as it is found in high numbers and is widespread over much of Sub-Saharan Africa.

High mortality rates of this species due to wind turbines would be a cause of concern as *Neoromicia capensis* is abundant and widespread and as such has a more significant role to play within the local ecosystem than the rarer bat species. They do not undertake migrations and thus are considered residents of the site.

It roosts individually or in small groups of two to three bats in a variety of shelters, such as under the bark of trees, at the base of aloe leaves, and under the roofs of houses. They will use most man-made structures as day roosts which can be found throughout the site and surrounding areas (Monadjem *et al.* 2010).

They are tolerant of a wide range of environmental conditions as they survive and prosper within arid semi-desert areas to montane grasslands, forests, and savannas; indicating that they may occupy several habitat types across the site, and are amenable towards habitat changes. They are however clutter-edge foragers, meaning they prefer to hunt on the edge of vegetation clutter mostly, but can occasionally forage in open spaces. They are thought to have a Medium-High likelihood of risk of fatality due to wind turbines (Sowler *et al.*, 2016).

Mating takes place from the end of March until the beginning of April. Spermatozoa are stored in the uterine horns of the female from April until August, when ovulation and fertilisation occurs. They give birth to twins during late October and November but single pups, triplets and quadruplets have also been recorded (van der Merwe 1994 & Lynch 1989).

Tadarida aegyptiaca

The Egyptian Free-tailed bat, *Tadarida aegyptiaca*, is a Least Concern species as it has a wide distribution and high abundance throughout South Africa. It occurs from the Western Cape of South Africa, north through to Namibia and southern Angola; and through Zimbabwe to central and northern Mozambique (Monadjem *et al.* 2010). This species is protected by national legislation in South Africa (ACR 2010).

They roost communally in small (dozens) to medium-sized (hundreds) groups in rock crevices, under exfoliating rocks, caves, hollow trees and behind the bark of dead trees. *Tadarida aegyptiaca* has also adapted to roosting in buildings, in particular roofs of houses (Monadjem *et al.* 2010).

The Egyptian Free-tailed bat forages over a wide range of habitats, flying above the vegetation canopy. It appears that the vegetation has little influence on foraging behaviour as the species forages over

desert, semi-arid scrub, savannah, grassland and agricultural lands. Its presence is strongly associated with permanent water bodies due to concentrated densities of insect prey (Monadjem *et al.* 2010).

The Egyptian Free-tailed bat is considered to have a High likelihood of risk of fatality by wind turbines (Sowler *et al.*, 2016). Due to the high abundance and widespread distribution of this species, high mortality rates by wind turbines would be a cause of concern as these species have more significant ecological roles than the rarer bat species. The sensitivity maps are strongly informed by the areas that may be used by this species.

After a gestation of four months, a single pup is born, usually in November or December, when females give birth once a year. In males, spermatogenesis occurs from February to July and mating occurs in August (Bernard and Tsita 1995). Maternity colonies are apparently established by females in November (Herselman 1980).

Several North American studies indicate the impact of wind turbines to be highest on migratory bats, however there is evidence to the impact on resident species. Fatalities from turbines increase during natural changes in the behaviour of bats leading to increased activity in the vicinity of turbines. Increases in non-migrating bat mortalities around wind turbines in North America corresponded with when bats engage in mating activity (Cryan and Barclay 2009). This long term assessment will also be able to indicate seasonal peaks in species activity and bat presence.


5.9.4 Sensitivity Map

Figure 23 depicts the sensitive areas of the site, based on features identified to be important for foraging and roosting of the species that are confirmed and most probable to occur on site. Thus the sensitivity map is based on species ecology and habitat preferences. This map can be used as a pre-construction mitigation in terms of improving turbine placement with regards to bat preferred habitats on site.

Last iteration	January 2016
High sensitivity	200m
buffer	
Moderate sensitivity	100m
buffer	
Features used to	Manmade structures, such as farm houses, barns, sheds, road culverts and
develop the	mine adits, these structures provide easily accessible roosting sites.
sensitivity map	The presence of caves, rock faces, areas of exfoliating rock and clumps of
	larger woody plants. These features provide natural roosting spaces and
	tend to attract insect prey.
	The different vegetation types and presence of riparian/water drainage
	habitat is used as indicators of probable foraging areas.
	Open water sources, be it man-made farm dams or natural streams and
	wetlands, are important sources of drinking water and provide habitat that
	host insect prey.

The areas designated as having a High Bat Sensitivity (**Table 13**) implicates that no turbines should be placed in these areas and their respective buffer zones, due to the elevated impacts it can have on bat mortalities. Turbines located within high sensitivity areas and their buffers must be moved out of high bat sensitivities or removed from the turbine layout. If turbines are located within the Moderate Bat Sensitivity zone or buffer zone, they must receive special attention and preference for post-construction monitoring and implementation of mitigations during the operational phase.

Sensitivity	Description
Moderate Sensitivity	Areas of foraging habitat or roosting sites considered to have significant roles for bat ecology. Turbines within or close to these areas must acquire priority (not excluding all other turbines) during pre/post-construction studies and mitigation measures, if any is needed.
High Sensitivity	Areas that are deemed critical for resident bat populations, capable of elevated levels of bat activity and support greater bat diversity than the rest of the site. These areas are 'no-go' areas and turbines must not be placed in these areas.

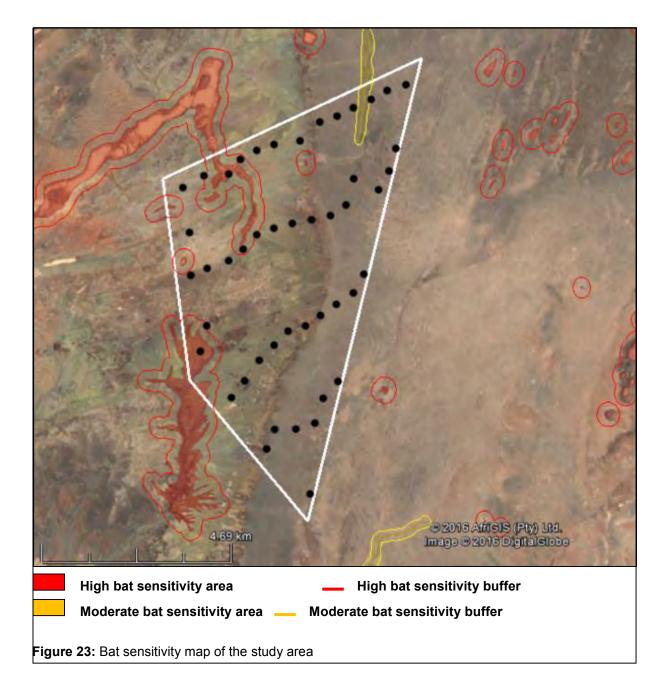

5.9.5 Amendments to the turbine specifications for the proposed Graskoppies Wind Energy Facility and the impacts on Bats

The original turbine dimensions on which the assessment was based were a hub height of up to 150m and a rotor diameter of up to 150m. Mainstream has however subsequently decided to change the turbine dimensions to a hub height of up to 160m and a rotor diameter of up to 160m.

As such, an amendment letter was compiled in order to assess whether the amendments will affect the larger outcomes, conclusions and impact assessment as assessed during the bat EIA and long-term pre-construction study. The amendment letter is included in **Appendix 6C**.

The proposed increase in rotor diameter, in combination with the proposed increased hub height will result in an increase of 5m for the minimum rotor swept ground clearance. In other words the lowest rotor swept height will be further away from the ground. Such a difference is minimal but still beneficial for bat conservation as bat activity and diversity decreased with height from ground level. However, the larger rotor diameter will result in a larger airspace occupied per turbine which will slightly increase the probability of impacting bats. These two effects can be considered as cancelling each other out.

Therefore, considering all factors, the proposed amendments will not affect the larger outcomes, conclusions and impact assessment as assessed during the bat EIA and long-term preconstruction study, and is therefore still acceptable from a bat sensitivity perspective.

5.10 Surface Water

The Surface Water Assessment was conducted by Shaun Taylor of SiVEST. The full report is included in **Appendix 6D**. The environmental baseline from a surface water perspective is presented below.

5.10.1 Surface Water Database Information

In terms of the National ENPAT (2002) database, the proposed wind farm study site is completely within the Olifants / Doorn Water Management Area (WMA) (Figure 24). Moreover, the proposed development is therefore also within the Olifants – Cape Primary Catchment (Olifants / Doorn WMA). At a finer level of detail, the Xha! Boom Wind Farm site traverses two (2) quaternary catchments including E31A and E31C.

In terms of the NFEPA (2011) database, there is only one (1) natural depression wetland. This wetland is not considered to be a Wetland Freshwater Ecosystem Priority Area (WETFEPA). A WETFEPA is a wetland that is earmarked to stay in good condition in order to conserve freshwater ecosystems and protect water resources for human use. These are classified according to a number of criteria some of which include existing protected areas and focus areas for protected area expansion identified in the National Protected Expansion Strategy.

Two (2) non-perennial watercourses were identified in the Northern Cape ENPAT (2000) database. No other watercourses were identified from the NFEPA (2011) database.

No other surface water resources were identified from the available databases.

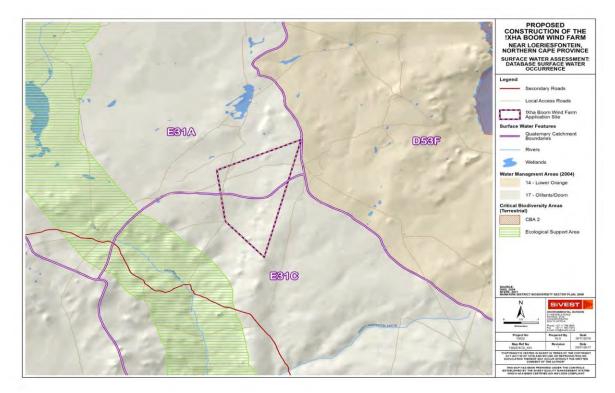


Figure 24: Database Surface Water Occurrence Map

5.10.2 Surface Water Desktop Delineation Information

A delineation exercise was undertaken using satellite imagery (Google Earth[™]) to demarcate the outer boundaries of any surface water resources identified at a desktop level. The results for the Xha! Boom Wind Farm study site are as follows:

- Two (2) Depression Wetlands;
- Three (3) Major Drainage Line (drainage lines with channel width >5m);
- Two hundred and thirty, six (236) Drainage Lines (drainage lines with a channel width <5m).

The result are shown in Figure 25 below.

Between the database information and the desktop delineation information in, the features identified will be earmarked for groundtruthing in the fieldwork phase. A refinement of the surface water resources will be undertaken in the impact phase pending the fieldwork findings.

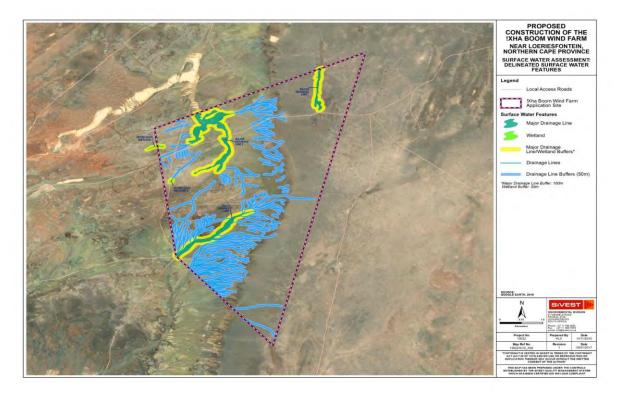


Figure 25: Desktop Delineation Map

5.11 Soils and Agricultural Potential

The Soils and Agricultural Potential Assessment was conducted by Johann Lanz. The full report is included in **Appendix 6E**. The environmental baseline from a soils and agricultural perspective is presented below.

5.11.1 Soils

The land type classification is a nationwide survey that groups areas of similar soil, terrain and climatic conditions into different land types. There are three land types across the study area, mainly Fc457, with small areas of Ah25 and Fc422 (**Figure 26**). Soils on these land types are similar and are predominantly shallow, sandy soils on underlying rock or hard-pan carbonate. The soils would fall into the Lithic and Calcic soil groups according to the classification of Fey (2010). A summary detailing soil data for the land types is provided in the Appendix in Table A1. The field investigation confirmed the occurrence of shallow, sandy soils on underlying rock or hard-pan carbonate across the entire site. The predominant soil forms are Coega, Mispah, Glenrosa and Askham.

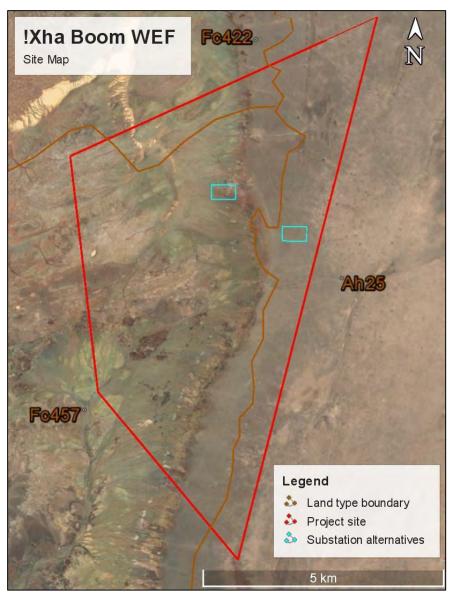


Figure 26: Satellite image map of the site showing the development area



Figure 27: Photograph showing typical landscape and veld conditions on the site.

5.11.2 Agricultural Capability

Land capability is defined as the combination of soil suitability and climate factors. The area has a land capability classification, according to the 8 category scale of Class 7 which is non-arable, low potential grazing land. The limitations to agriculture are the extreme aridity and lack of access to water as well as the predominantly shallow, rocky soils. Due to these constraints, agricultural land use is restricted to low intensity grazing only. The natural grazing capacity is given on AGIS as very low, at 45 hectares per animal unit. This is amongst the lowest grazing capacity areas in the country.

5.11.3 Land use and development on and surrounding the site

The farm is located in a sheep farming agricultural region, and grazing (sheep and some cattle) is the only agricultural land use on the site and surrounds. There is no agricultural infrastructure in the study area, apart from fencing into camps and wind pumps with stock watering points. There are no buildings on site.

5.11.4 Status of the land

As previously mentioned, the vegetation classification for the site is predominantly Western Bushmanland Klipveld, with a small amount of Bushmanland Basin Shrubland in the east. Refer to **Section 5.7.1** for the broadscale vegetation descriptions. Natural surface erosion, typical of sparsely vegetated, arid environments, is active but there is no evidence of excessive, accelerated erosion, or other land degradation. The land is classified as having a low to moderate water erosion hazard (class

5), and it is classified as susceptible to wind erosion (class 2b) because sands, as a soil textural class, are dominant.

5.11.5 Possible land use options for the site

Due to the extreme aridity constraints as well as the poor soils, agricultural land use is restricted to low intensity grazing only.

5.11.6 Agricultural sensitivity

Agricultural potential and conditions are very uniform across the farm and the choice of placement of facility infrastructure, including access roads, and transmission lines therefore has minimal influence on the significance of agricultural impacts. No agriculturally sensitive areas occur within the study area. From an agricultural point of view, no parts of the site need to be avoided by the development and there are no required buffers.

5.12 Noise

The Noise Assessment was conducted by Morné De Jager of Enviro-Acoustic Research (EAR). The full report is included in **Appendix 6F**. The environmental baseline from a noise perspective is presented below.

5.12.1 Study Area

The development is situated in the Hantam Local Municipality which falls within the Namakwa District Council Municipal area in the Northern Cape Province. This is of relevance due the fact that this province has not yet promulgated Provincial Noise Control Regulations. The study area is further described in terms of environmental components that may contribute to or change the sound character in the area.

Topography

The topography in the vicinity of the development is generally flat plains. There are no topographical features that will assist in the blocking of sound propagation. The larger area is classified by the Environmental Potential Atlas of South Africa as plains. Due to the height of the wind turbines, topographical features will not significantly limit the propagation of sound from the wind turbines.

Roads and rail roads

There are a few small gravel roads in the area, mainly used by the local land owners. Traffic volumes on these roads are very low and sporadic and will not be of any significance in terms of calculable noise.

Land use

Land use in the area is mostly vacant natural and agricultural activities (sheep and game).

Residential areas

Excluding structures identified that may be occupied, either permanently or temporary, there are no residential areas within 5,000m from the proposed wind farm.

Ground conditions and vegetation

The area falls within the arid Karoo and desert false grassveld vegetation regions within the Nama Karoo biome. The area consists mostly of low growing shrubs and grasses with hard ground conditions typical of an arid area. Ground conditions are unlikely to assist in the attenuation of noise (fraction of sound waves hitting and being reflected from the ground)

Existing Ambient Sound Levels

Ambient sound levels were previously measured in the area for the Loeriesfontein and Kokerboom Wind Farms.

Excluding the measurements collected near construction activities of the Loeriesfontein Wind Farm, ambient sound levels are very low in the area. Sound levels are higher at the dwellings in the area, mainly due to the modified environment around the residential dwellings.

5.12.2 Noise-Sensitive Developments

An assessment of the area was done using the Google Earth® as well as available topographical maps to identify potential Noise-sensitive Developments in the area (within area proposed, as well as potential NSD's within around 2km from the boundary of the proposed WF).

A desktop assessment identified seven (7) potential noise-sensitive developments in the area (**Figure 28** and **Table 14**). The statuses of these structures were confirmed by Mrs. Nicolene Venter of Imaginative Africa (Pty) Ltd after discussions with landowners.

Potential	Status of the developments identified in Figure 28 and comments				
receptor					
NSD01	Owner – Mr. Christo van der Merwe. Status unknown.				
NSD02	Owner – Mr. Herman Nel. Single room with carport, loading platform and kraal occupied up to 4 months per year by a shepherd.				

Table 14: Status of identified potential noise-sensitive developments

NSD03	Owner - Mr. Herman Nel. Single room with carport, loading platform and kraal
	occupied up to 4 months per year by a shepherd.
NSD04	Owner - Mr. Albi Louw. House being used on a temporary basis by Albi's shepherds
	during sheering time.
NSD05	Owner – Mr. Gys Lombaard. The house is occupied in the summer time, usually from
	January to June.
NSD06	Owner - Mr. Nico Louw. Occupied only in summer time (lambing period) and for a
	weekend at a time. He commented that noise will not be an issue for them.
NSD07	Owner – Mr. Kallie van Zyl. The house is not occupied. The owner lives in town.



Figure 28: Aerial Image indicating identified potential Noise-sensitive developments identified during scoping

5.12.3 Onsite Ambient Sound Level Measurements

Ambient sound levels were measured in the area for the Loeriesfontein and Kokerboom WEF's. The sound levels are discussed in the following sections.

Loeriesfontein Measurements

Measurements were collected at seven (7) locations during the day and night of 13th June 2011. The results are presented in **Table 15** below.

Table 15: Results of ambient sound level monitorin	a (Datum type	: WGS 84	Decimal Degrees)
	g (Dutum type	+++++++++	Decima Degrees

Point name	Location,	Location,	L _{Aeq,T}	L _{A, max}	L _{A, min}	L _{A, 90}	Wind
Point name	Latitude	Longitude	(dBA)	(dBA)	(dBA)	(dBA)	speed

prepared by: SiVEST Environmental

							Ave.
							(m/s)
LBN01 (N)	-30.336740°	19.584582°	25.7	32.1	16.3	18.8	1.1
LBN02 (N)	-30.420516°	19.561455°	23.6	36.6	16.1	16.9	0.9
LBN03 (N)	-30.485515°	19.557087°	29.7	43.1	17	19.4	0.9
LBN04 (D)	-30.497410°	19.557970°	54.3	64.2	48.9	50.8	4.2
LBN05 (D)	-30.498541°	19.559391°	74.1	74.5	72.7	73.5	3.2
LBN06 (D)	-30.476170°	19.563890°	30.6	38.9	18.3	23.3	0.4
LBN07 (D)	-30.428747°	19.605808°	42.2	55.7	25.4	33.5	3.4
LBN07 (D)(T)	-30.428747°	19.605808°	51.3	61.2	28.4	33.1	3.2

Notes:

- The Sound Level Meter was fitted with the WS-03 all-weather windshield during times when the average wind speed exceeded 3 m/s
- (D) = Day, (N) = Night, (R) = Road, (T) = Train moving slowly through station
- The Rion Sound Level Meter NL 32 minimum limit is at 18 dBA.
- LBN05 taken approximately 1m from Transformer inside the substation perimeter.

Measurements indicated an area with very low ambient sound levels (away from dwellings and industrial activities - the Eskom substation). During the period that measurements were collected sound levels in the area ranged from less than 18 dBA (L_{A90}) upwards, indicating that this area is very quiet (with no wind blowing and away from anthropogenic activities). All samples illustrate the rural character of the area during periods with light winds, with mainly natural sounds defining the acoustic character. Measurements closer to one dwelling and the Eskom substation indicated significantly increased sound levels.

<u>Kokerboom Measurements</u>

A number of additional measurements were collected during the day and night of 17 June 2016, with the site visit confirming the very low ambient sound levels in the area. Sound levels closer to construction activities and the substation (where the Loeriesfontein WEF contractor's camp are located) are significantly elevated.

The data collected and information about the measurement locations are presented in **Table 16**. All the 10-minute measurements indicated an area with a potential to be quiet, although traffic on the roads as well as natural (birds, insects and wind-induced noises) did increase the noise levels.

5.12.4 Ambient Sound Levels – Summary

Daytime measured data indicate an area with elevated noise levels, but, considering the spectral data and sounds heard, these sounds are mainly due to natural activities (wind-induced). Night-time measurements indicated a very quiet environment, even with low winds (around 0 - 2 m/s). Considering the measurements, and measurements conducted in the last few years at similar areas, acceptable rating levels for the area would be typical of a rural noise district.

There is a high confidence in the ambient sound levels measured and the subsequent Rating Levels determined. For the purpose of this assessment the strictest rating level (rural) will be used as defined in SANS 10103:2008 (35 dBA at night, 45 dBA during the day) for all the receptors living in the area.

5.12.5 Current Sound Levels

Considering the location of the project site in relation to roads or industrial activities, the current low developmental character and measurements done in the area indicates very low ambient sound levels. There is very high confidence that the ambient sound levels will also be very low on the project site.

Agricultural and other anthropogenic activities may raise ambient sound levels in the vicinity of the dwellings and agricultural structures in the area, but, as the night-time soundscape is of interest, these activities are unlikely to influence night-time sound levels.

Measurement	L _{Aeq,i}	L _{Aeq,f}	L _{A90}	Comments
location	level	level	Level	
	(dBA)	(dBA)	(dBA	
			90)	
Daytime data				•
MKWEFSTASL101	37	36	30	Very quiet with wind induced noises dominating. Aeolian noises from fence wires just audible at
(-30.314288°,				times. Wind speed ranging between 4 and 8 m/s at 2m height.
19.590754°)	39	37	26	times. Wind speed ranging between 4 and 6 m/s at 2m neight.
MKWEFSTASL102	37	35	31	
(-30.328244°,				Wind induced noises, grass rustling. Very quiet environment. 3 m/s average wind with a few gusts.
19.497512°)	41	39	27	
MKWEFSTASL103	41	38	30	Quiet location. Wind induced noises with 6 to 8 m/s wind. Truck in distance barely audible 2 nd
(-30.392800°,				measurement. Bird call second measurement was audible. Wind noise dominant.
19.569415°)	45	40	29	
MKWEFSTASL104	72	68	41	Construction area. Excavator in distance barely audible. Other trucks passing measurement
(-30.431132°,				location. Reverse alarms audible in area. 4 - 6 m/s wind. 4 Cars, 4 trucks first measurement, 2 cars
19.558799°)	68	64	37	and 3 trucks second measurement.
MKWEFSTASL105	36	34	17	Wind induced noises dominant. Crows flying in area, squawking audible first measurement. 3 - 5
(-30.524433°,				m/s wind.
19.517243°)	35	32	25	
MKWEFSTASL106	55	53	49	Sounds from construction camp. Vehicle idling at sub-station. Voices. Running engine and impulsive
(-30.498437°,				sounds (material dropping) dominant sound. Reverse alarms. Vehicles entering contractor's area.
(961166167), 19.557166°)				Frequently. Vehicles travelling between camp and sub-station. 3 - 5 m/s wind. 3 cars and 4 cars first
	59	56	49	and second measurement.
MKWEFSTASL107	60	58	26	Some wind-induced noises. Very quiet with bird calls. End of shift and passing vehicles generate
(-30.554480°,				significant noises. 4 cars, 1 trucks first measurement, 3 cars and 1 truck second measurement.
19.550756°)	61	59	26	Vehicles driving fast.
MKWEFSTASL108	20	17	15	Extremely quiet. No sounds observable. No wind.

SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD Proposed Xha! Boom Wind Farm - Final Scoping Report

prepared by: SiVEST Environmental

(-30.668283°,				
19.526764°)	21	18	15	
Night-time data		ł	•	
MKWEFSTASL101	18	16	15	Possible corona discharge type sound from somewhere, source unknown (just audible). Crickets
(-30.314288°,				just audible. Bird in distance at times. Very quiet.
19.590754°)	20	18	16	just addible. Bird in distance at times. Very quet.
MKWEFSTASL107	16	15	14	
(-30.554480°,				Very quiet location. No audible sounds.
19.550756°)	19	15	14	

prepared by: SiVEST Environmental

5.13 Visual

The Visual Assessment was conducted by Stephan Jacobs and Andrea Gibb of SiVEST. The full report is included in **Appendix 6G**. The environmental baseline from a visual perspective is presented below.

The physical and land use related characteristics are outlined below as they are important factors contributing to the visibility of a development and visual character of the study area. Defining the visual character is an important part of assessing visual impacts as it establishes the visual baseline or existing visual environment in which the development would be constructed. The visual impact of a development is measured according to this visual baseline by establishing the degree to which the development would contrast with or conform to the visual character of the surrounding area. The inherent sensitivity of the area to visual impacts or visual sensitivity is thereafter determined, based on the visual character, the economic importance of the scenic quality of the area, inherent cultural value of the area and the presence of visual receptors.

5.13.1 Topography

The flat terrain that occurs over most of the site results in generally wide-ranging vistas throughout the study area (**Figure 29**), and the horizon is usually visible across an entire 360° arc of the viewer. The only exception to this flat topography is the presence of the localised hills / ridges / koppies which can be found within certain parts of the wider visual assessment zone and as the range of hills located some distance to the south and south-west of the site, which will constrain the viewshed. Bearing in mind that wind turbines are very large structures (over 160m in height when the rotor blades are taken into account), these could be visible from a very wide radius around the site, except from areas to the south-east of the site where koppies and localised hilly topography will shield the proposed development. These above-mentioned areas are however located outside of the visual assessment zone and are thus not expected to have an effect on the visibility of the wind turbine structures. It should be noted that the areas of localised hilly topography which are found within certain parts of the wider study area are also expected to shield the proposed development to a degree. Thus there would be very little shielding to lessen the visual impact of the wind turbines from any locally-occurring receptor locations.



Figure 29: Generally wide-ranging vistas found throughout the study area as a result of the flat terrain that occurs over most of the site.

5.13.2 Vegetation

The natural short vegetation cover will offer no visual screening. Parts of the visual assessment zone are however characterised by the presence of some tree species (some relatively large and some low). These trees occur naturally in certain areas of the visual assessment zone and are expected to contribute to the overall natural character of the study area as well as provide some form of screening from the proposed development. In addition, tall exotic trees may effectively screen the proposed development from farmhouses, where these trees occur in close proximity to the farmhouse and are located directly in the way of views to the site.

5.13.3 Land Use

The general lack of human habitation and associated human infrastructure, has an obvious impact on the sense of place, giving the area a largely natural, rural feel (**Figure 30**). The pastoral elements which are present in parts of the study area, especially where sheep farming is taking place, are however expected to give the surrounding area a more pastoral feel.



Figure 30: Typical natural or rural visual character found within the study area.

The influence of the level of human transformation on the visual character of the area is described in more detail below.

5.13.4 Visual Character

The above physical and land use-related characteristics of the study area contribute to its overall visual character. Visual character can be defined based on the level of change or transformation from a completely natural setting, which would represent a natural baseline in which there is little evidence of human transformation of the landscape. Varying degrees of human transformation of a landscape would engender differing visual characteristics to that landscape, with a highly modified urban or industrial landscape being at the opposite end of the scale to a largely natural undisturbed landscape. Visual character is also influenced by the presence of built infrastructure such as buildings, roads and other objects such as telephone or electrical infrastructure.

Most of the study area is considered to have a natural (almost vacant) visual character as natural shrub land prevails throughout the site and there is minimal human habitation and associated infrastructure. In addition, the predominant land use (sheep farming) has not transformed the natural landscape and the area has thus largely retained its natural rural character. It should however be noted that the study area is also characterised by the presence of certain pastoral elements, which are expected to give the surrounding area a more pastoral feel. As mentioned above, built infrastructure within the proposed site

is limited to isolated farmhouses, gravel farm roads and farm boundary fences. In addition, quarrying activities are taking place on the eastern edge of 'Konnes se Pan', which is located to the north-east of the proposed Xha! Boom wind application site. This pan is however located outside of the visual assessment zone and as such, the quarrying activities are also taking place outside of the visual assessment zone. There is therefore there no significant instance of transformation in the study area.

The relatively low density of human transformation throughout the surrounding area is an important component contributing to the largely natural visual character of the study area. This is important in the context of potential visual impacts associated with the proposed development of a wind farm as introducing this type of development could be considered to be a degrading factor in this context.

It should however be noted that several renewable energy facilities (solar and wind) are proposed within relatively close proximity to the proposed wind farm. These facilities and their associated infrastructure typically consist of very large structures which are highly visible. As such, these facilities will significantly alter the visual character and baseline in the study area once constructed and make it appear to have a more industrial-type visual character. The Loeriesfontein Wind Farm can be found approximately 29km to the east of the proposed Xha! Boom Wind Farm application site and is currently operational (**Figure 31**). This wind farm is however located outside of the visual assessment zone and is therefore not expected to alter the visual character of the study area.



Figure 31: View of the Loeriesfontein Wind Farm which has been constructed approximately 29km to the east of the proposed Xha! Boom Wind Farm application site. This wind farm is however located outside of the visual assessment zone and is shown here as a representation of what the visual character of the proposed Wind Farm will look like once construction is completed.

The greater area surrounding the proposed development site is an important component when assessing visual character. The area can be considered to be typical of a Karoo or "platteland" landscape that would characteristically be encountered across the high-lying dry western and central interior of South Africa. Much of South Africa's dry Karoo interior consists of wide open, uninhabited spaces sparsely punctuated by widely scattered farmsteads and small towns. Traditionally the Karoo has been seen by many as a dull, lifeless part of the country that was to be crossed as quickly as possible on route between the major inland centres and the Cape coast, or between the Cape and Namibia. However, in the last couple of decades this perception has been changing, with the launching of tourism routes within the Karoo, and the promotion of tourism in this little visited, but large part of South Africa. In a context of increasing urbanisation in South Africa's major centres, the Karoo is being marketed as an undisturbed getaway, especially as a stop on a longer journey from the northern parts of South Africa to the Western and Eastern Cape coasts. Examples of this may be found in the relatively recently published "Getaway Guide to Karoo, Namagualand and Kalahari" (Moseley and Naude-Moseley, 2008). Although the small town of Loeriesfontein may be used by tourists as a stopover destination, the proposed wind farm is located approximately 68km to the north of the town and would therefore not influence these visitors. None of the roads passing near the proposed development are considered to be tourism routes.

The typical Karoo landscape can also be considered a valuable 'cultural landscape' in the South African context. Although the cultural landscape concept is relatively new, it is becoming an increasingly important concept in terms of the preservation and management of rural and urban settings across the world (Breedlove, 2002).

Cultural Landscapes can fall into three categories (according to the Committee's Operational Guidelines):

- i) "a landscape designed and created intentionally by man";
- ii) an "organically evolved landscape" which may be a "relict (or fossil) landscape" or a "continuing landscape";
- iii) an "associative cultural landscape" which may be valued because of the "religious, artistic or cultural associations of the natural element"

The typical Karoo landscape consisting of wide open plains, and isolated relief, interspersed with isolated farmsteads, windmills and stock holding pens, is an important part of the cultural matrix of the South African environment. The Karoo farmstead is also a representation of how the harsh arid nature of the environment in this part of the country has shaped the predominant land use and economic activity practiced in the area, as well as the patterns of human habitation and interaction. The presence of small Karoo towns, such as Loeriesfontein, engulfed by an otherwise rural environment, form an integral part of the wider Karoo landscape. As such, the Karoo landscape as it exists today has value as a cultural landscape in the South African context. In the context of the types of cultural landscape listed above, the Karoo cultural landscape would fall into the second category, that of an organically evolved, "continuing" landscape.

The study area, as visible to the viewer, represents a typical Karoo cultural landscape. This is important in the context of potential visual impacts associated with the proposed development of a wind farm as

introducing this type of development could be considered to be a degrading factor in the context of the natural Karoo character of the study area, as discussed further below.

5.13.5 Visual Sensitivity

Visual Sensitivity can be defined as the inherent sensitivity of an area to potential visual impacts associated with a proposed development. It is based on the physical characteristics of the area (i.e. topography, landform and land cover), the spatial distribution of potential receptors, and the likely value judgements of these receptors towards a new development (Oberholzer: 2005). A viewer's perception is usually based on the perceived aesthetic appeal of an area and on the presence of economic activities (such as recreational tourism) which may be based on this aesthetic appeal.

In order to assess the visual sensitivity of the area SiVEST has developed a matrix based on the characteristics of the receiving environment which, according to the Guidelines for Involving Visual and Aesthetic Specialists in the EIA Processes, indicate that visibility and aesthetics are likely to be 'key issues' (Oberholzer: 2005).

Based on the criteria in the matrix (**Table 17**), the visual sensitivity of the area is broken up into a number of categories, as described below:

- High The introduction of a new development such as a wind farm would be likely to be perceived negatively by receptors in this area; it would be considered to be a visual intrusion and may elicit opposition from these receptors
- ii) Moderate Presence of receptors, but due to the nature of the existing visual character of the area and likely value judgements of receptors, there would be limited negative perception towards the new development as a source of visual impact.
- iii) **Low** The introduction of a new development would not be perceived to be negative, there would be little opposition or negative perception towards it.

The table below outlines the factors used to rate the visual sensitivity of the study area. The ratings are specific to the visual context of the receiving environment within the study area.

FACTORS	RA	TING	;							
	1	2	3	4	5	6	7	8	9	10
Pristine / natural character of the environment										
Presence of sensitive visual receptors										
Aesthetic sense of place / scenic visual character										
Value to individuals / society										
Irreplaceability / uniqueness / scarcity value										
Cultural or symbolic meaning										
Scenic resources present in the study area										
Protected / conservation areas in the study area										
Sites of special interest present in the study area										

 Table 17: Environmental factors used to define visual sensitivity of the study area

Economic dependency on scenic quality					
Local jobs created by scenic quality of the area					
International status of the environment					
Provincial / regional status of the environment					
Local status of the environment					
**Scenic quality under threat / at risk of change					

**Any rating above '5' for this specific aspect will trigger the need to undertake an assessment of cumulative visual impacts.

Low						Μ	lodera	te						High	
10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	

Based on the above factors, the study area is rated as having a moderately-low visual sensitivity. This is mainly owing to the relatively uninhabited character of the area. An important factor contributing to the visual sensitivity of an area is the presence, or absence of visual receptors that may value the aesthetic quality of the landscape and depend on it to produce revenue and create jobs. Very few potentially sensitive receptors are present in the study area. Although no formal protected areas or leisure / nature-based tourism activities exist within the study area, the area would still be valued as a typical Karoo cultural landscape.

As previously mentioned, the Loeriesfontein Wind Farm can be found approximately 29km to the east of the proposed Xha! Boom Wind Farm application site and is currently operational. This wind farm is however located outside of the visual assessment zone and is not expected to alter the visual character of the study area. Other renewable energy facilities (solar and wind) are however proposed and/or being constructed within relatively close proximity to the proposed project.

5.13.6 Visually Sensitive Areas on the Site

During the scoping phase, all project specialists were requested to indicate environmentally sensitive areas within the application site. This exercise was undertaken to assist with determining the final placement and micro-siting the turbine layout within the site.

The aim of the assessment was to identify those parts of the application site where the establishment of wind turbines or other associated infrastructure would result in the greatest probability of visual impacts on potentially sensitive visual receptors, and should be precluded from the proposed development i.e. areas within the application site that should be avoided.

Different spatial characteristics were utilised to identify the visually sensitive areas within the proposed application site. In order to reduce the direct visual impact of the proposed turbines (especially those impacts related to shadow flicker), a buffer of 500m was recommended around all farmsteads located on or near the proposed development site. These buffers should be treated as exclusion zones in which no infrastructure, in particular turbines, should be allowed to be developed. This is done in order to prevent the impact of shadow flicker on people residing at the farmsteads.

Based on the above factors, a preliminary visual sensitivity map will be compiled and included in the EIA phase visual impact report.

It should be noted that a minimum of 500m buffer zone will typically be applied to any sensitive visual receptors identified within the proposed wind farm development area. However, it must be noted that mainstream applies a 1km buffer which is preferable. Within this part of the development area the establishment of wind turbines or other associated infrastructure would result in the greatest probability of visual impacts (especially the impact of shadow flicker) on potentially sensitive visual receptors. These areas within the proposed development area should therefore be avoided. However, based on the findings of the field-based investigation, no sensitive visual receptors were identified within the proposed Xha! Boom Wind Farm development area. As such, the above-mentioned 500m buffer zone was not applied for the proposed Xha! Boom Wind Farm and thus the proposed development is not expected to have any on-site visually sensitive areas.

5.13.7 Sensitive Visual Receptors

A sensitive receptor location is defined as a location from where receptors would potentially be adversely impacted by a proposed development. This takes into account a subjective factor on behalf of the viewer – i.e. whether the viewer would consider the impact as a negative impact. As described above, the adverse impact is often associated with the alteration of the visual character of the area in terms of the intrusion of the wind farm into a 'view', which may affect the 'sense of place'. The identification of sensitive receptors is typically undertaken based on a number of factors which include:

- the visual character of the area, especially taking into account visually scenic areas and areas of visual sensitivity;
- the presence of leisure-based (especially nature-based) tourism in an area;
- the presence of sites / routes that are valued for their scenic quality and sense of place;
- the presence of homesteads / farmsteads in a largely natural setting where the development may influence the typical character of their views; and
- feedback from interested and affected parties, as raised during the public participation process conducted as part of the EIA study.

A distinction must be made between a receptor location and a sensitive receptor location. A receptor location is a site from where the proposed wind farm may be visible, but the receptor may not necessarily be adversely affected by any visual intrusion associated with the development. Receptor locations include locations of commercial activities and certain movement corridors, such as roads that are not tourism routes. Sensitive receptor locations typically include sites that are likely to be adversely affected by the visual intrusion of the proposed development. They include; tourism facilities, scenic sites and residential dwellings in natural settings.

Distance bands were used to assign zones of visual impact from the proposed development site, as the visibility of the development would diminish exponentially over distance (refer to section 2.4 above). As such, the proposed development would be more visible to receptors located within a short distance and these would experience a higher adverse visual impact than those located at a moderate or long distance from the proposed development.

Based on the height and scale of the project, the radii chosen to assign these zones of visual impact are as follows:

- 0 < 2km (high impact zone)
- 2 < 5km (moderate impact zone)
- 5km < 8km (low impact zone)

Only one (1) farmstead / homestead which houses a local farmer was identified within the study area. These dwellings are regarded as potentially sensitive visual receptors as it is located within a mostly rural setting and the proposed development will likely alter natural vistas experienced from this dwelling. The degree of visual impact experienced will vary from one inhabitant to another, as it is largely based on the viewer's perception. Factors influencing the degree of visual impact experienced by the viewer include the following:

- Value placed by the viewer on the natural scenic characteristics of the area.
- The viewer's sentiments toward the proposed structures. These may be positive (a symbol of progression toward a less polluted future) or negative (foreign objects degrading the natural landscape).
- Degree to which the viewer will accept a change in the typical Karoo character of the surrounding area.

Table 18 below provides details of the potentially sensitive places that have cultural and symbolic importance that were identified within the study area.

Nome		Distance from the	Vieuel Impect Zone
Name		proposed Xha! Boom Wind development area	Visual Impact Zone
VR5	Farmstead/Homestead	Approximately 7.4km	Low

Table 18: Visual	receptor locations	potentially sensitiv	e to the proposed	d Xha! Boom Wind Farm
	receptor recutions	potentially sensitiv	c to the proposed	

There are no main or arterial roads in close enough proximity to the proposed development to be visually impacted by it. The district road that connects the town of Loeriesfontein with Granaatboskolk to the north, is some 4kms north-east of the study area and therefore well outside the visual impact zone (**Figure 32**). However, the district road that connects the town of Loeriesfontein with the R358 Regional Road to the west of the site, traverses the south-western section of the visual assessment zone and is therefore found within the visual impact zone. Despite the presence of this district road, there are no visually sensitive roads within the study area.



Figure 32: View of the district road that connects the town of Loeriesfontein with Granaatboskolk to the north. This district road is however found well outside the visual impact zone.

The potentially sensitive visual receptor locations in relation to the zones of visual impact are indicated in **Figure 33** below.

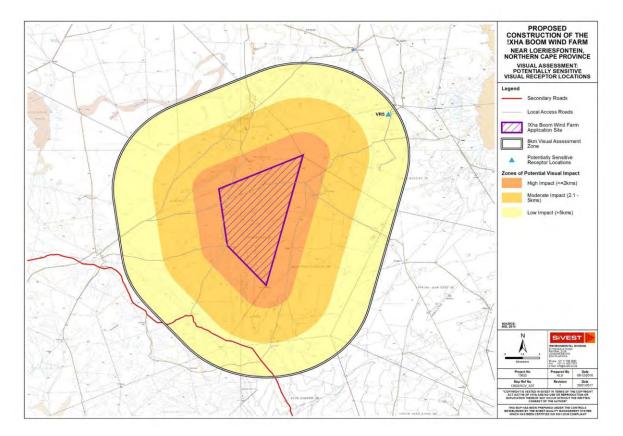


Figure 33: Potentially Sensitive Visual Receptors within the Study Area

5.14 Heritage

The Heritage Assessment was conducted by Wouter Fourie of PGS Heritage. The full report is included in **Appendix 6H**. The environmental baseline from a heritage perspective is presented below.

The examination of heritage databases, historical data and cartographic resources represents a critical additional tool for locating and identifying heritage resources and in determining the historical and cultural context of the study area. Therefore, an Internet literature search was conducted and relevant archaeological and historical texts were also consulted. Relevant topographic maps and satellite imagery were studied.

Researching the SAHRA APM Report Mapping Project records and the SAHRIS online database (http://www.sahra.org.za/sahris), it was determined that a number of other archaeological or historical studies have been performed within the wider vicinity of the study area.

5.14.1 Palaeontology

The following section has been compiled by Elize Butler for PGS Heritage. The full report can be viewed in **Appendix D** of the Heritage Specialist Report.

The development footprint is underlain by the Permo-Carboniferous Dwyka Group and Early to Middle Permian basinal rocks of the lower part of the Ecca Group (Karoo Supergroup). They are assigned to the Prince Albert Formation, Whitehill Formation and Tierberg Formation in order of decreasing age. The Ecca Group were laid down within the marine to freshwater Ecca Sea.

These mudrocks are generally weathered, and creates landscapes of low relief. The Ecca Group sediments, particularly the Whitehill Formation, are intruded by Early Jurassic (183 ± 2 Million years old) igneous intrusions of the Karoo Dolerite Suite (Duncan & Marsh 2006). The basic sills thermally metamorphosed or baked the adjacent Ecca country rocks. In many areas the Permian and Jurassic bedrocks are mantled with a variety of superficial deposits, most of which is probably of Late Caenozoic (Quaternary to Recent) age. This include doleritic surface rubble, gravelly to silty river alluvium and pan sediments and small patches of aeolian (i.e. wind-blown) sands. The intrusive Karoo dolerites are of no direct palaeontological significance and the Late Caenozoic superficial deposits are generally of very low palaeontological sensitivity.

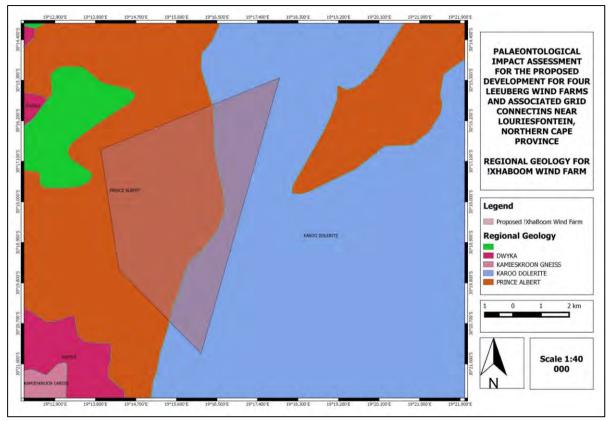


Figure 34: The surface geology of the proposed Xha! Boom Wind Farm near Loeriesfontein in the Northern Cape Province. The development footprint is underlain by Karoo Dolerite as well as the Prince Albert Formation of the Ecca Group

5.14.2 Archaeology

Although a study conducted by Morris (2007) have indicated minimal finds of archaeological sites in the vicinity of the upgrade of Loop 7A of the Sishen-Saldanha ore line to the north of the study area, discussions with local framers have indicated the occurrence of some archaeological sites.

Morris (2010) notes that previous studies have indicated that substantial MSA scatters is fairly uncommon in the Bushmanland/Namaqualand areas. While herder sites where more limited to sheltered and dune areas close to water sources such as pans and rivers.

The HIA's (Fourie, 2011; Van Schalkwyk, 2011; Webley & Halkett, 2012 and Orton, 2014) and the AIA's (Morris, 2007; Van der Walt, 2012 and Morris, 2013), have added to the body of work conducted in the area since the observations of Beaumont *et al.* (1995), that "thousands of square kilometres of Bushmanland area covered by a low density lithic scatter".

Orton (2014) notes that previous studies in the vicinity of the current study area, have found and assessed archaeological material dating to the early (ESA), Middel (MSA) and Later (LSA) Stone Ages.

5.14.3 Historical structures and history

The farm Georg's Vley 217 was surveyed and proclaimed in 1880. No structures are indicated on the original survey diagrams.

5.14.4 Heritage sensitivities

The evaluation of the possible heritage resource finds and their heritage significance linked to mitigation requirements was linked to types of landscape. The heritage sensitivity rating does not indicate no-go areas but the possibility of finding heritage significant site that could require mitigation work.

5.14.5 Possible finds

Evaluation of aerial photography has indicated that certain areas may be sensitive from an archaeological perspective. The analysis of the studies conducted in the area assisted in the development of the following landform type to heritage find matrix in **Table 19**.

LAND FROM TYPE	HERITAGE TYPE
Crest and foot hill	LSA and MSA scatters
Crest of small hills	Small LSA sites – scatters of stone artefacts, ostrich eggshell, pottery
	and beads
Pans	Dense LSA sites
Outcrops	Occupation sites dating to LSA
Farmsteads	Historical archaeological material

Table 19: Landform	to heritage matrix
--------------------	--------------------

prepared by: SiVEST Environmental

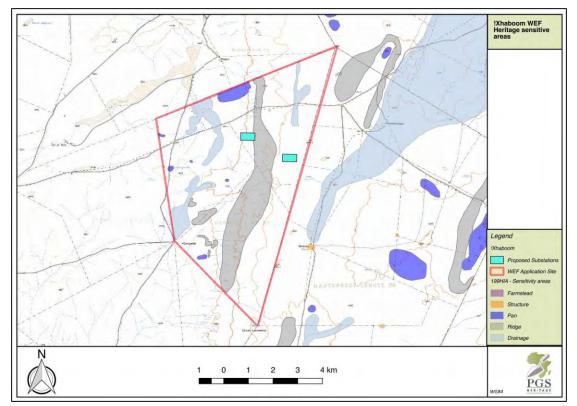


Figure 35: Possible heritage sensitive areas

5.15 Socio-economic Environment

The Socio-economic Assessment was conducted by Zimkita Nkata and Elena Broughton of Urban-Econ Development Economists. The full report is included in **Appendix 6I**. The environmental baseline from a socio-economic perspective is presented below.

5.15.1 Baseline Information

This chapter examines key socio-economic characteristics of the study area, as per delineation provided in the previous chapter. This is essential as it provides both qualitative and quantitative data related to the communities and economies under observation, creating a baseline against which the impacts can be assessed. As previously mentioned, the proposed wind farm project is located in within the Hantam LM and in close proximity to the border of Khai-Ma LM which both fall under the Namakwa DM.

Spatial Context and Regional Linkages

Geographically, the **Northern Cape** is the largest province located within South Africa with an area of 372 889km² equating to approximately 30.6% of South Africa's spatial composition. Despite having the largest surface area, the Northern Cape is the least populated province in South Africa with a population of 1.1 million people equating to 2.2% of the national population (Stats SA, 2011). This province is a **SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD** proposed Xha! Boom Wind Farm - Final Scoping Report Version No: 1

dry and hot region classified as a semi-desert as it also experiences scarce rainfall patterns. The Northern Cape Province consists of five districts, namely Frances Baard, Pixley ka Seme, Namakwa, ZF Mgcawu (previously known as Siyanda) and John Taolo Gaetsewe.

The proposed project falls within the **Namakwa DM** which is situated on the western part of the Northern Cape Province and is the largest municipality of the five main municipal districts of the Province covering an area of 126 900km² (34%) of the total provincial landmass. The Namakwa DM is bordered by the Western Cape province on the southern side, Namibia towards the northern side and two districts (ZF Mgcawu and Pixley ka Seme) on the north-east and east side respectively. Although it is the largest district geographically, the Namakwa DM is sparsely populated with a population of 115 842 people, which comprise 10.11% of the total province population (Stats SA, 2011).

In the Namakwa DM, the project lies within the borders of the Hantam LM and the Khai-Ma LM. The Hantam LM is an inland municipality which lies on the west of the Namakwa DM and is located 140km from Springbok. The Hantam LM covers an area of 36 128km² and has a population of 21 581 people (Stats SA, 2011). The municipality is known for its wide open space, striking mountain ranges and nature reserves filled with a vast array of indigenous plants and bulbs (Hantam IDP, 2015). The main attractions of the area are therefore, the floral displays, hiking and the natural environment. Hantam municipality is also furnished with four conservation areas, namely Oorlogskloof Nature Reserve, Hantam National Botanical Gardens, Tankwa Karoo National Park and the Akkerdam Nature Reserve (Umsebe Development Planners, 2010).

With a total surface area of 16 627km², the **Khai-Ma LM** is situated along the north-western part of the Namakwa DM and is a sparsely populated region with 12 466 people. The Khai-Ma LM is bordered by Namibia on the north, the ZF Mgcawu LM on the east and, the Nama-Khoi LM on the west. Urban nodes surrounding the local municipality include Pofadder as the main centre, Aggeneys, Pella, Witbank and Onseepkans. Although the surrounding area of the region has a low grazing potential, vast amounts of extensive land in Khai-Ma is predominantly used for livestock farming (Umsebe Development Planners, 2010).

5.15.2 Sense of Place, History and Cultural Aspects

Loeriesfontein is a small rural service centre town that lies within a basin surrounded by mountains and is situated to the north-west of the town of Calvinia. Loeriesfontein was built around a general store in the year 1894 by a British bible salesman, Frederick Turner (Hantam IDP, 2015). Loeriesfontein has a population of 2 746 people which has grown by 12.4% since the year 2001. The town covers a total surface area of 34.45km² and has a population density of 80 people/km2 (Stats SA, 2011).

The south-western part of Loeriesfontein forms part of Namagualand which is a region popular for its spring flowers and its wide variety of diverse vegetation (Hantam IDP, 2015). Loeriesfontein town also houses the Gannabos (Quiver) Forest, which is home to the worlds' largest colony of the Aloe Dichotoma species (Umsebe Development Planners, 2010). During spring, the town is flooded by tourists attracted by the spring flowers. The town also boasts of its' Windmill museum, which is one of only two in the world. Sheep farming and salt mining are the predominant activities within and around Loeriesfontein town (Umsebe Development Planners, 2010).

5.15.3 Demographic Profile

Population demographics

The population of any geographical area is the cornerstone of the development process, as it affects the economic growth through the provision of labour and entrepreneurial skills, and determines the demand for the production output. Examining population dynamics is essential in gaining an accurate perspective of those who are likely to be affected by any prospective development or project.

As previously noted, the **Hantam LM** has a population of 21 581 individuals, this accounts for 18.6% of the total population of Namakwa DM. In comparison to the year 2001, the Hantam LM has increased by 6.6%. Within the local municipality, 80% of the people reside in urban areas whilst the rest occupy farms. In total, the Hantam LM has 6 341 households with a household density of 0.14km² (Stats SA, 2011). The majority of the people in the Hantam LM reside in the city centre, which is Calvinia town; thus, only a small percentage of people reside in other smaller surrounding towns such as Loeriesfontein (13%) (Stats SA, 2011). Over 90% of the residents in the municipality as well as the nearby towns (Loeriesfontein and Brandvlei) speak Afrikaans as a first language, with the dominant race being coloured people (82%) and white people lagging behind at 11%. The Hantam LM's population consists of 50.1% males and 49.9% females. The largest group of people fall under those aged between 35 and 64 years of age. In this LM, the youth (15-34 years) encompass about 29.1% of the total population. Only 28% of Hantam residents are married, whilst 54% have never been married (Stats SA, 2011).

Loeriesfontein, the closest town to the project site, only has 806 households in total resulting in a household density of 23.3 km². The majority (94.3%) of people have access to formal housing whilst the rest either live in houses or flats in a backyard (0.87%) or in informal dwellings (4.12%). A huge portion of people living in Loeriesfontein are coloured (86%), followed by white people at 11.54% whilst Black people equate to 1.9% of the total population. Afrikaans is the main language spoken as more than 90% of the people cited it as their first language, only 0.4% residents speak English whilst 0.5% speak Setswana (Stats SA, 2011). Only 26.5% residents are married, whilst 56.9% have never married.

Although Loeriesfontein is a relatively small town, residents and farm owners stated that since the establishment of similar projects in the area, namely Khobab and Loeriesfontein 2, the town has experienced and influx of people either in an attempt to find employment or to seize economic opportunities brought by the wind farms.

The **Khai-Ma LM** on the other hand, has a smaller population of 12 466 people; this accounts for 10.7% of the total population of the Namakwa DM. Although the population has increased by 6.2% from 11 692 people in 2001, it is still only almost two thirds of the Hantam population (Stats SA, 2011). Most residents within Khai-Ma LM reside in the urban areas (81%) whilst some reside in farms (17%). The total number of households in the Khai-Ma LM is 3 796 resulting in a household density of 0.22km². Just over 80% of the residents speak Afrikaans in the municipality (Stats SA, 2011). Coloured people equate to three quarters of the total population with black people (18%) being the second dominant race. Only 24% of the Khai-Ma LM residents are married whilst 64% have never been married. In like

manner with the Hantam LM, the Khai-Ma LM has more males (52.6%) than females (47.4%) with the largest population also falling within 35 and 64 years of age. Although this is the case, this local municipality however, has a youth population (15-34 years) that is just over a third (36.8%) of the total population (Stats SA, 2011).

Health Demographics

The process of assessing and monitoring the level of health in a particular area is beneficial as it provides useful information on the development as well as human welfare of an area. Over the last 15 years, in comparison to the rest of South Africa and the Northern Cape Province, the effect of HIV has been less severe on the DM and LM's. AIDS related deaths have also been following a similar pattern.

In the year 2015, the **Hantam LM** reported a total of 956 people to be living with HIV, which equates to 4.5% of the total LM population. Although the number of HIV-positive people for the Namakwa DM (4.9%) is close to that of the LM (4.5%), national and provincial HIV infected percentage levels are much higher, as they are at 11.4% and 7.3%, respectively.

Indicator	South Africa	Northern Cape	Namakwa DM	Hantam LM	Khai-Ma LM
Population	54 956 509	1 175 780	116 834	21 371	11 805
HIV positive	6 248 908	86 146	5 702	956	673
AIDS deaths	206 761	2 360	113	20	7
Other deaths	444 866	9 729	1 159	213	98

Table 20: Population, HIV positive, AIDS and other deaths (2015)

The **Khai-Ma LM** had a slightly higher percentage of people living with HIV (5.7%). AIDS related deaths at the national, provincial, regional and local context are relatively low as they range from a range of 0.1%-0.4%. In a period of 15 years (2000-2015), people living with the HIV illness in the Hantam LM had increased by 695 people whilst residents living in the Khai-Ma LM with the same illness increased by 463 within the same period.

Although the prevalence of HIV/Aids in **Loeriesfontein town** is not clear, during the site visit and interviews conducted with various stakeholders it was revealed that construction workers employed to develop wind farms in the area, namely Khobab and Loeriesfontein 2, mingle with young females and this has since resulted in a sharp increase in the rate of teenage pregnancies. The presence of construction workers in the area has also increased a number of social ills such as the use of alcohol and drug abuse. Although many of the residents agree that this has always been a norm in the town, many alluded to the fact that the social ills have exacerbated in the last few years correlating with the period of establishment of the two wind farms. One such example is the increase in the number of liquor licenses applied for, as well as an increase in the number of young school girls who interact with construction workers resulting in unwanted pregnancies.

Crime Demographics

In the **Hantam LM**, 816 serious crimes were reported; of these, a total amount of 760 were community reported crimes whilst 56 of them were detected by the police. Common assault was the most frequently reported crime with 207 cases, followed by property-related crime with 154 cases and assault with the

intention to harm with 125 cases. The total number of serious crimes equate to 17% of the district reported crimes and 1.41% of the provincial reported crime cases. Although the use the alcohol and drugs have increased in Loeriesfontein town, crime levels have been stable and have not resulted in any criminal activities that can be directly linked to the heavy influx of people.

In 2015, the **Khai-Ma** LM had less crime-related occurrences, as only a total of 285 serious crimes were reported. The most commonly reported crimes are similar to trends noted in the Hantam LM but are at less severe rates with common assault reported to have had 69 cases, property related crime with 52 cases and assault with the intent to harm with 46 cases. Crimes reported in Khai-Ma LM equate to 6% of the cases reported at the district level and only 0.5% of the provincial reported crimes.

Types of crime	South Africa	Northern Cape	Namakwa DM	Hantam LM	Khai- Ma LM
Serious crimes	2209068	57817	4782	816	285
Community reported crimes	2068261	54724	4212	760	255
Crimes dependent on police action for detection	140807	3093	570	56	30

Table 21: Crimes reported by crime type (2015)

5.15.4 Economy

The structure of the economy and the composition of its employment provide valuable insight into the dependency of an area on specific sectors and its sensitivity to fluctuations of global and regional markets. Knowledge of the structure and the size of each sector is also important for the economic impact results' interpretation, as it allows the assessment of the extent to which the proposed activity would change the economy, its structure, and trends of specific sectors.

The **Hantam LM** is a relatively small economy that is valued at R1 184 million in current prices. In total, the economy of the Hantam LM equates to 11.1% of the Namakwa Districts Gross Domestic Product per Region (GDP-R) which was valued at R10 696 million in current prices (Quantec, 2016). The contribution of the LM to the Province as a whole is significantly low as it only accounts for 1.64% of the Northern Cape Province. The Hantam LM economy has been manifesting a fluctuating growth rate revealing its sensitivity to external shocks related to national and global changes. For instance, the Hantam economy was adversely affected by the 2008 global recession (Quantec, 2016). Although this was the case, the economy began slowly recovering between the 2010-2011 period. Overall, between the 1995-2011 period, the Hantam LM economy grew at a Compounded Annual Growth Rate (CAGR) of 3.19%.

The economy of the **Khai-Ma LM** lags behind the Hantam economy with a total size of R939 million in current prices (Quantec, 2016). This contribution accounts for 8.8% of the districts economy and 1.3% of the Province economy. The Khai-Ma LM experienced similar growth patterns with Hantam, as it experienced stagnation in the year 2009 after the global recession and began recovering shortly after. At current prices, the 20-year period (1995-2011) CAGR for Khai-Ma LM equates to 2.44%.

According to the Hantam LED Framework (2011), economic development ought to be sustainable. Ensuring that it is sustainable entails strengthening and diversifying the economy through a range of sectors such as the primary, secondary and tertiary sector which should cater for all consumer and business needs. Due to the fact that 72% of the GDP-R of the **Hantam LM** is generated by the tertiary sector, this LM is a service economy with prominent sub-sectors such as general government (13%), transport and communication (16%) as well as wholesale, retail and trade (25%). A contributing factor to this is mostly likely the numerous government departments that are situated in Calvinia town as it serves as the main seat and administrative town of the Hantam LM (Hantam IDP, 2015). On the other end of the spectrum, within the primary sector, agriculture is the main contributor to GDP-R as it equates to 18% of the Hantam economy.

Although the mining industry currently has a very low contribution to the economy, 80% of the worlds' gypsum reserves lie just outside Loeriesfontein town; thus, an opportunity exists for salt and gypsum mining in the region as salt pans at Dwaggas Pit also employ 30 permanent workers (Umsebe Development Planners, 2010).

Since the start of the construction of Khobab and Loeriesfontein 2 wind farms, the informal hospitality industry in the town of Loeriesfontein has boomed as construction workers have been in need for accommodation in town thus majority of town. In order to meet the increased demand in accommodation, the majority of the town residents have transformed their backyards and availed their garages for rent purposes. In conjunction with the 20-year old wind museum in the town, the recently established wind farms have also added value to the tourism component of the area. Due to the influx of people in the town, the economic impact has been positive for the town as a result of this; food and fuel sales have spiraled increasing businesses' gross revenues and profits in an unprecedented manner. Further positive investments are expected to trickle down to the Loeriesfontein community when the surrounding wind farms break even (after 9 years) and 5% of the generated profits will be invested in the community.

In the **Khai-Ma LM**, the primary sector contributes the highest percentage (67%) to the municipal GDP-R. Within the primary sector, mining and quarrying is the prominent industry with a contribution of 51%, whilst the agriculture industry contributes 15% to the overall economy. The high percentage contribution of the mining industry is most likely due to the presence of various minerals within the municipal area such as zinc, copper, lead, granite and quartz (Umsebe Development Planners, 2010). Mining activity is thus exacerbated by the existence of the Black Mountain mine in Aggeneys town as well as the gypsum mine in Pofadder town. The second contributor to the GDP-R of the Khai-Ma LM is the tertiary sector with a contribution of 28%. Within the tertiary sector, the most imminent industries are general government (10%), transport and communication (6%) as well as wholesale and retail trade, catering and accommodation (6%).

5.15.5 Labour Force and Employment Structure

Employment is the primary means by which individuals who are of working age may earn an income that will enable them to provide for their basic needs and improve their standard of living. As such, employment and unemployment rates are important indicators of socio-economic well-being. The following paragraphs examine the study area's labour profile.

Labour force composition

During the year 2011, the total working population of the **Hantam LM** consisted of 13 680 people, within this figure, the total labour force only equated to 7 004 people. As outlined in **Table 22** below, a percentage of 3.4% of people are described as discouraged job seekers, which typically refers to a group of people who are capable of searching for employment but have become discouraged and are no longer looking for employment. The difference between the number of people employed (6 122) and unemployed (882) in the region results in an unemployment rate of 12.6%, which is relatively low in comparison to the national and provincial unemployment rates (29.7% and 27.4%), respectively. Within the Hantam region, Loeriesfontein town has a slightly higher unemployment rate of 14.7% (Stats SA, 2011).

Although only 100-150 local residents are currently employed by the nearby wind farms, the impact of increased employment levels in **Loeriesfontein** has been significant; this is so because in the past the town was heavily reliant on income from extensive farming. However, in the event that agricultural farms undergo expansion, employment levels usually remain the same as farming in the area largely comprises of livestock farming, which is not very labour-intensive. However, with that being said, the prevalence of drug abuse has restricted the number of locals that can be employed as the impact of the drugs is said to result in a lack of personal motivation.

In the **Khai-Ma LM**, the total working population consisted of 8 541 people with a labour force equating to 5 889 people. In 2011, about 4% of people were recorded as discouraged jobseekers. The Khai-Ma LM has a relatively higher unemployment rate of 20.9% (Stats SA, 2011).

Town /	Working	Labour for	abour force			Unempl oyment
settlement	age	Employed	Unemployed	Total	job seekers	rate
South Africa	33928806	13254829	5586624	18841453	1848720	29,7%
Northern Cape	736205	284202	107379	391581	40170	27,4%
Namakwa DM	76579	33713	8455	42168	4258	20,1%
Hantam LM	13860	6122	882	7004	475	12,6%
Loeriesfontein	1767	680	117	797	33	14,7%
Khai-Ma LM	8541	4660	1229	5889	327	20,9%

Table 22: National, Provincial & Regional Labour Force Profile

Employment structure

Within the working age population (15-64 years) of the **Hantam LM**, about 60% of the individuals are employed in the formal sector whilst 21% are employed in the informal sector (Stats SA, 2011). Employment opportunities provided by private households equate to approximately 17% of the Hantam working population. Within the Hantam LM, Loeriesfontein town employed the least people in the formal sector resulting in it being the dominant job creator in the informal sector. In the **Khai-Ma LM**, more employment is offered in the formal sector whilst only a minority of people work in the informal sector.

Similar patterns can be observed for the provision of employment by private households within the LM as well as the towns.

Within the formal sector, only 14% of people of the Hantam LM's working population are considered to be skilled, whilst majority (30%) of the people either occupy jobs that require semi-skilled or low-skilled individuals. The rest of the working population (27%) are employed in the informal sector. In the Khai-Ma LM, very few individuals (10%) within the working population are considered skilled. Instead, similar to the Hantam LM, majority of people are semi-skilled and lowly-skilled (Quantec, 2016). Twenty percent (20%) of the people within the LM are occupied in the informal sector. As it can be noted in **Table 23** below, employment percentages by skill level for the Local Municipalities (Hantam and Khai-Ma) are relatively similar to the districts skill level percentages.

		Employment sector & compensation by skill level					
Skills	Namakwa DM		Hanta	m LM	Khai-Ma LM		
	Employment	%	Employment	%	Employment	%	
Formal:							
skilled	5092	14%	987	14%	446	10%	
Formal:							
Semi-skilled	11151	32%	2004	29%	1613	36%	
Formal: Low-							
skilled	9917	28%	2077	30%	1536	34%	
Informal	8962	26%	1849	27%	879	20%	

Table 23: Employment sector and	l compensation by skill level (2015)
---------------------------------	--------------------------------------

(Quantec, 2016)

In the Hantam LM, the tertiary sector is the largest contributor to formal and informal employment with 60% share of all employment provided in the municipality. As depicted in **Table 24** below, such employment consists of opportunities working in wholesale and trade (18%), finance and business services (7%), general government (17%) as well as community, social and personal services with 15%. Although the Hantam LM is dominated by the services sector, within the primary sector, agriculture employs the largest number of people (29%). The secondary sector makes very little contribution to employment services as it only accounts for 10% of the Hantam working population.

In contrast, the Khai-Ma LM is dominated by the primary sector, equating to 54% of municipal working age population. Within this sector, half of the total employment within the municipality is provided by the agriculture industry. The tertiary sector is the second largest contributor to job creation in the Khai-Ma LM; within this sector, prominent industries include general government (12%) and wholesale and retail trade (12%). The secondary sector lags with a contribution of 10% to the working population.

	Employment by area					
Economic sector	Namakwa DM		Hantam LM		Khai-Ma LM	
	Employment	%	Employment	%	Employment	%
Agriculture, Forestry &						
Fishing	7948	23%	1972	29%	2220	50%
Mining and Quarrying	783	2%	2	0%	175	4%

Table 24: Em	nlovment h	v economic	services	(2015)
	ірюўшені в	y economic	SEIVICES	(2013)

SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD prepared by: SiVEST Environmental Proposed Xha! Boom Wind Farm - Final Scoping Report

Manufacturing	1384	4%	140	2%	335	7%
Electricity, gas & water	152	0%	20	0%	4	0%
Construction	2760	8%	564	8%	114	3%
Wholesale and retail trade, catering and accommodation	7016	20%	1253	18%	517	12%
Transport, storage and communication	1138	3%	218	3%	64	1%
Finance, insurance, real estate and business services	2689	8%	493	7%	178	4%
General government	6269	18%	1200	17%	557	12%
Community, social and personal services	4983	14%	1055	15%	310	7%
Industry employment total	35122	100%	6917	100%	4474	100%

5.15.6 Income

In order to improve the living standards of residents in terms of to the Minimum Living Level (MLL), which broadly refers to the minimum monthly income needed to sustain a household, the Khai-Ma SDF stipulates that a greater disposable income per household is required. Linked to this point, economic development is thus seen as an essential pathway to raising the living standards and general wellbeing of residents (Umsebe Development Planners, 2010).

The average household annual income in the **Hantam LM** is R116 276 in 2016 prices; this implies an average household monthly income of R9 690. The monthly income for Loeriesfontein is R10 620; these figures are relatively higher than the provincial average income, which is R8 521 per month. As highlighted in **Table 25** below, 9% of households do not have a regular amount of income in both the Hantam LM and Loeriesfontein town which in on par with the national and provincial levels, where the proportion of people who do not receive any form of income equated to 9% and 7% respectively. In the Hantam LM, 54% of people fell within the poverty line as they earned less than R3 200 per month.

The main source of income in the municipality is the agricultural sector; predominantly sheep farming and rooibos tea. The second largest income contributor is the community employment sector; particularly the social and personal services industry.

Subsequent to the establishment of wind farms in the area, new economic opportunities in **Loeriesfontein** town have emerged. Public transport has benefitted as a result of the increased demand for the transportation of workers to and from construction sites. Cleaning services have also provided work opportunities for unemployed individuals whilst informal trading amongst residents has also increased and has stimulated further income and job creation in the town. Wind farm construction companies either pay their workers once a month or every fortnight; this has resulted in more money in circulation as the purchasing power of local residents also increased. This is important as it may assist in reducing the number of people living below the poverty line. Upon consultation, one farmer went to the extent of sharing that poverty levels have been slightly alleviated in the Loeriesfontein town.

The average household annual income in the **Khai-Ma LM** was R99 144 in 2016 prices; this equated to an average household monthly income of R8 262. The main source of income in Khai-Ma is the Black Mountain Mine situated in Aggeneys town, as well as several government departments. Commercial farmers depend on incomes generated from their farms. The rest of the residents are either dependent on the government grant or they earn a living by providing housekeeping and gardening services (Umsebe Development Planners, 2010).

Indicator	Namakwa DM	Hantam LM	Loeriesfontein	Khai-Ma LM
No income	8%	9%	9%	5%
R1 – R3 200	54%	57%	61%	62%
R3 201 – R6				
400	14%	12%	12%	10%
R6 401– R12				
800	12%	11%	10%	13%
R12 801– R25				
600	7%	6%	4%	6%
R25 601– R51				
200	2%	2%	2%	1%
>R51 200	4%	3%	3%	2%

Table 25: Household per monthly income groups (2011)

(Stats SA 2011)

5.15.7 Education

The key characteristics of the education profile of the population in the analysed municipalities are presented below.

In terms of education levels in the **Hantam LM**, during the year 2011, 13.8% people living in the municipality did not have any form of schooling. This is worse than the provincial and national level, which were 6.3% and 11.1%, respectively. Thirty percent (30%) of the population acquired some form of secondary schooling but had not completed the full course. Only 7.7% of people continued on to further their studies by pursuing higher education. Amongst the nearby towns, in Loeriesfontein 15.2% people indicated that they had never been exposed to a school environment whilst 23.3% failed to complete primary school resulting in an even lower portion (15.4%) of people completing secondary school (Stats SA, 2011).

In the **Khai-Ma LM**, only 3.8% of the people did not have any form of schooling. Although the proportion of people without any form of schooling was relatively low in comparison to the Hantam LM, only 5.1% people furthered their studies in the form of higher education (Stats SA, 2011). This can be possibly be ascribed to the fact that there is no university in the Namakwa DM as well as the Northern Province, it is also highly unlikely for individuals who have obtained further education elsewhere to return to the region (Umsebe Development Planners, 2010). Another contributing factor to the low higher education levels in Khai-Ma could be due to the fact that 45% of the residents indicated that they had not completed their secondary studies which reduce the chances of being admitted in a higher institution

Page 112

of learning. The low percentage of individuals who have completed their studies in both municipalities also coincides with the abundance of semi- and low-skilled individuals working in the formal sector.

5.15.8 Access to Services and State of Local Built Environment

Access to shelter, water, electricity, sanitation, and other services are indicators that assist to determine the standard of living of the people in the area under investigation. Infrastructure and the state of local infrastructure is another indicator to contemplate when considering living standards. The availability of social and economic infrastructure including roads, educational facilities, and health facilities further indicates the nature of the study area, which is valuable in developing a complete profile of the circumstances in which communities are living. These measurements create a baseline against, which the potential impacts of the proposed project can be assessed.

Settlement profile

In comparison to the national population density (42 people/km²), the Hantam LM is characterised by a low density of people per square km. It is also relatively lower than the district (0.91 people/ km²) and provincial (3.07 people/ km²) density. Although population densities for the LM are significantly low (0.59 people/ km²), as outlined in Table 26 below. Loeriesfontein town has a higher population density of 79.69 people/km² making it the most densely populated area between the three areas under analysis.

	Towns in the Hantam & Khai-Ma LM's				
Indicator	Hantam LM	Loeriesfontein	Khai-Ma LM		
Population total	21581	2746	12466		
Area (Sq. Km)	36128.07	34.45	16627.9		
Population density	0.59	79.69	0.74		

 Table 26: Population density of Hantam and Khai Ma LM (2011)

The Khai-Ma LM also has a relatively low population density with only 0.74 people/km², making it a sparsely populated region. Most people in the Khai-Ma LM are situated in the urban areas or in agricultural clusters along the Orange River, which also provides opportunities for water sport and recreation as well as resort development (Umsebe Development Planners, 2010).

Access to Housing and Basic Services

With respect to basic service provision and housing, the Namakwa DM is responsible for assisting and ensuring that local municipalities provide adequate housing to inhabitants in their jurisdiction such. The current level of access to various basic services in the municipality are as follows:

Housing: During the year 2011, housing shortages in the Hantam LM were an acute problem. In Hantam LM, 94% of houses had access to formal housing (i.e., a house made of brick or a concrete structure on a separate yard). Towns of the Hantam LM followed a similar path with Loeriesfontein having 94% access to formal housing (Stats SA, 2011). Amongst other pressing developments of the municipality, new housing unit developments have been identified by the Hantam SDF (Umsebe Development Planners, 2010). In comparison to the Hantam LM, the **Khai-Ma LM** residents had less access to formal housing as only 74% of inhabitants resided in formal housing structures (Stats SA, 2011).

- Access to piped water: In the Hantam LM, more than 90% of the households have access to piped water either inside their dwellings or yards. This includes residents living in Loeriesfontein town. More than 95% of water for the Hantam LM as well as for nearby towns is supplied by a regional or local water scheme operated by the municipality. In the Khai-Ma LM, more than 90% of households have access to piped water either in their dwellings or yards. A very low percentage of people do not have any type of access to piped water in the Khai-Ma LM.
- Access to sanitation: Although the Spatial Development Framework suggests that almost all households in the Hantam LM had access to flush toilets in 2011 (Umsebe Development Planners, 2010), statistics show that just over three quarters (76%) of households in Hantam LM have access to flush toilets either connected to the sewerage or to a septic tank. Whilst the Hantam LM believes to have eradicated the bucket system (Umsebe Development Planners, 2010), 3.1% of residents rely on the bucket latrine system whilst 0.9% do not have any form of access to any form of sanitation (Stats SA, 2011). Just over half of Loeriesfontein residents utilise flush toilets. The Khai-Ma LM has the same proportion of people who have access to flush toilets as the Hantam LM, with 6% of people who have no access to any type of sanitation.
- Access to electricity: In the Hantam LM, only urban areas are provided with electricity whilst the rural areas depend on other sources (Umsebe Development Planners, 2010). Slightly more than three quarters (77%) of households in the municipality have access to electricity for lighting whilst only 15% and 7% of people use candles and solar for lighting, respectively (Stats SA, 2011). Similar trends can be noted when assessing the towns of the municipality as more than 90% of Loeriesfontein town residents have access to electricity. One of the objectives of the municipality is to improve the living standards of it's' residents by implementing opportunities for bulk infrastructure development (Urban-Econ Development Economists, 2011). Although the SDF highlights electricity as one of the sectors experiencing backlogs in the Khai-Ma LM, 90% of households in the municipality use electricity for lighting whilst the rest use 7% candles and 2% use solar. Development objectives premised on the optimisation of resources relating to bulk infrastructure such as electricity remains a goal for the municipality (Umsebe Development Planners, 2010).

<u>Transport Infrastructure</u>

The transport sector plays a vital role in meeting the objectives of economic development, access to employment opportunities and social infrastructure (Dennis Moss Partnership, 2012). As a result of this, industrial development ought to take the mode of transport utilised by the labour force of a particular region into consideration. This means that new economic developments should not be situated far from the pick-up or drop-off points of various means of transport (Urban-Econ Development Economists, 2011). In 2001, just over a third 36.8% of people in the Hantam LM travelled to work or school by foot. The rest of the people used public transport (4.92%) whilst others made use of bicycles (1.39%) and their own transport facilities (5.12%) (Stats SA, 2001). Using the R55 gravel road, the distance between

Page 114

Calvinia and Loeriesfontein is 86km, whilst travelling from Calvinia to Brandvlei requires the utilisation of the R27 tar surface road for approximately 2 hours and 30 minutes.

The **Hantam LM** is traversed by a number of regional roads and encompasses two transport corridors (Umsebe Development Planners, 2010):

- Nieuwoudtville Calvinia Williston corridor consisting of the R63 tar road and railway link among Calvinia, Williston and Carnarvon, which links Gauteng and the Western Cape
- Nieuwoudtville Calvinia Brandvlei -Kenhardt corridor consisting of the R27 tar road leading from Cape Town to Upington, which provides a shortcut alternative to the route via Springbok and is often used by trucks particularly during the grape season. Considering that this is the main route in the region, it is essential that this road is maintained as it is of economic importance to the area.

The **Khai-Ma** IDP places emphasis on the need for local communities to have adequate accessibility to services through the provision of sufficient transport infrastructure. Although the Khai-Ma LM recognises the need for sufficient transport facilities, about 30% of people walked home and either to and from work or school. The second most-utilised mode of transport is public transport in the form of buses, trains and taxis (Umsebe Development Planners, 2010).

Social and Recreational Infrastructure

The Hantam LM has the following social and recreational infrastructure available:

- Three libraries in Calvinia, Loeriesfontein and Nieuwoudtville
- Five secondary schools in Calvinia, Loeriesfontein, Nieuwoudtville and Brandvlei
- Three hospitals in Calvinia, Loeriesfontein and Brandvlei
- Seven sport facilities in Calvinia and Loeriesfontein
- Nine religious centres in Loeriesfontein and Brandvlei

The **Khai-Ma LM** has the following social and recreational infrastructure available:

- Four primary and schools in Pofadder and Aggeneys
- Two clinics in Pofadder and Aggeneys
- Three police stations in Pofadder and Aggeneys

5.15.9 Profile of the Zone of Influence

The profile of the zone of influence section will investigate the various dynamics of the proposed site in order to ensure that the current land use activity does not conflict with the establishment of the proposed facility. If there are any conflicts identified, then they will be investigated further in the next phase.

Land-use profile

The land is currently used for agricultural purposes, specifically commercial sheep farming. Due to the fact that sheep farming and wind farms can successfully coexist within the same land, it can be deduced **SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD** prepared by: SiVEST Environmental Proposed Xha! Boom Wind Farm - Final Scoping Report Version No: 1

that the proposed development is not expected to result in adverse effects on the current land use activities. The site is located approximately 75km away from the closest urban area and will be developed across the following farm portions (presented in below):

Farm Portion	Farm Name	Farm no	Туре
2	Georg's Vley	217	Directly affected
1	Hartebeest Leegte	216	Adjacent
Rem	Hartebeest Leegte	216	Adjacent

Table 27: Directly and indirectly affected farm portions across zone of influence

Portion 1 of Hartebeest Leegte Farm No.216 (adjacent)

• General information

- 5 100 hectares are used for commercial livestock (sheep) farming which is the main source of income.
- Type of sheep: Dorpers.
- Average annual revenue: ± R500 000.
- No workers currently live on the farm.
- Concerns raised for construction phase:
 - The farm is almost only grass. This, however, is not a concern because grass grows very quickly. The destruction of the veld and shrubs are however a concern because they recover at much slower rates than the grass and they are the primary source of food for the sheep.
 - During the building process, the sheep will have to be moved to another farm which will be rented. There is not much farmland available to rent in the area thus farm owner will have to be adequately compensated for this.
 - Water is a very scarce commodity in the area so there is great concern related to where the water for the project will be sourced from during the construction phase.
- Concerns raised for operational phase:
 - Farm owner is not concerned about the visual impact as he jokingly added that the sheep will most probably enjoy the shade of the wind turbines.
 - Economic benefits and opportunities for the farm and the town.
 - Concerns related to the rising population as Loeriesfontein is a relatively small town.
 - Water scarcity in the area.

Remainder of Hartebeest Leegte Farm No.216 (adjacent)

- General information
 - 5 400-6000 hectares used for commercial farming, however main source of income derived from date farming.
 - Type of sheep: Wit Dorpers and Merino's.
 - Average annual revenue: ± R183 333.
 - Currently no workers are employed by the farm, however, workers periodically live on the farm during the sheering season.
- Concerns raised:
 - The farm owner mentioned that any operational losses incurred will require compensation.

- Incurred losses will be proportionate to the forfeited rental income (in the event that the sheep are relocated elsewhere during the construction phase).
- The construction company must ensure that minimal damage is done to the veld and that roads are built without infringing on existing infrastructure (farms, farm gates, water pipes, water installations, windmills etc.).
- All construction roads that will potentially be built across the farm to be communicated with farm owner in time.
- The construction workers must ensure that they are careful during the construction phase and none of the project activities cause unnecessary damage to the existing infrastructure and veld.
- \circ $\;$ Dust needs to be controlled as the Merino sheep are especially affected by this.

Portion 2 of Georg's Vley Farm No.217 (directly affected)

• General information

- ± 13000 hectares are used for commercial sheep farming which is the main source of income.
- Type of sheep: Mainly Dorpers.
- Average annual revenue: ± R1 400 000.
- Family permanently resides on the farm during summer rainfall time.
- Two permanent workers live on the farm (one of which is a long term employee who lives with his wife and two children.

• Concerns raised during construction phase: short term

- The farm owner expressed his concerns about the destruction of the bossie veld (shrubs) as once it is destroyed, it recovers very slowly and it is the primary source of food for the sheep.
- The construction will be situated 14km away from the main house. Owners therefore not concerned about any disturbances during the construction phase.
- During the construction phase, 200 sheep will need to be relocated to another rented farm and compensation for this is necessary. There is also concern there will be limited grazing land if all the farm owners have to move their sheep.
- \circ $\,$ No jobs will be lost on farm during the construction phase.
- Not concerned about the developments that are occurring in the area as long as they do not affect the farms daily operations.
- \circ $\,$ Not concerned about construction workers as most of them prefer to reside in town.
- Water is a very scarce commodity in the area so there is great concern related to where the water for the project will be sourced from during the construction phase.
- Concerns raised during construction phase: long term
 - An average of 200 sheep are lost to jackal every year. The farm owner thus had hope that the wind turbines would drive jackal away. Jackal however quickly get used to the turbines.

5.15.10 Resources and land capability

The proposed study area is demarcated as agricultural land. Although the area is delineated for agricultural purposes, the land is also deemed non-arable with a very low grazing potential. As such, the grazing capacity for the area is low and is not suitable for arable farming; thus, making the region suitable for sheep farming which is a characteristic of the municipal area. A very small percentage (4%) of the Hantam region is considered to be high potential agricultural soils (Umsebe Development Planners, 2010), as a result of this the lack of water bodies as well as the lack of productivity in the area due to has also led to a very low Gross Domestic Product per hectare contribution.

5.15.11 Access to infrastructure

There is currently no national road that passes through the Hantam municipal area. Due to the influx of people and heavy load traffic in the Hantam LM as well as nearby towns, the main route (R27) in the area, which is also the only tarred road connecting Nieuwoudtville and Brandvlei via Loeriesfontein has been rapidly deteriorating and needs to be frequently maintained.

The project site for the proposed wind farm can be accessed through a small gravel access road that isn't wide enough to be traversed by large construction vehicles, which farm owners have expressed their desire for the road to be moved as it isn't far from one of the farm portions. With respect to water availability in the area, consultations with farm owners revealed that the affected farm portions do not have any direct access to water as it is a scarce resource in the area. To prevent water shortage impacts, some farmers in the area have reservoirs within their property or use water tanks to store water.

5.16 Preliminary Geotechnical Assessment

The Preliminary Geotechnical Assessment was conducted by Glen Randall and reviewed by Cobus Hendriksz from SMEC. Glen Randall subsequently no longer works at SMEC, but Cobus Hendriksz will be responsible for the study going forward. The full report is included in **Appendix 8D**. The environmental baseline from a socio-economic perspective is presented below.

This chapter discusses the geotechnical conditions present over the area in which the site is situated. An evaluation of the impact of the expected geotechnical characteristics on the development are discussed below.

5.16.1 Existing Conditions

Topographical maps show the site to be relatively flat with local ridges associated with dolerite intrusions. The only prominent hill is Groot Rooiberg, on the southern site boundary.

Farms within the region are generally undeveloped and used for grazing. The surface of the region is generally characterised by a gravelly crust that becomes sandier in the vicinity of the stream floodplains

and pans. The southern part of the site is drained by generally south west flowing, non-perennial Klein Sandkraal River tributaries. Within the northern part of the site, water typically flows in the form of sheet wash, with some small stream tributaries draining towards Konnes se Pan in the far north.

According to Acock's field types of South Africa, the area is located within the western Mountain Karoo that has a desert appearance with its sparsely populated succulent dwarf shrub species, particularly of the Vygie Family, with Bushmanland grass.

The general appearance of the area, in which the site is situated, is shown on the photographs below.



Figure 36: General aerial view (During dry season)

5.16.2 Seismicity

The Northern Cape can generally be considered a region with a low hazard (peak ground acceleration of 0 - 0.2m/s2). According to the Seismic Hazard Map of South Africa contained in the new South African Loading Code - SANS 10160 the peak ground acceleration (g) with a 10% probability of being exceeded in a 50 year period for the site is in the order of 0.08 - 0.12g. An extract of this map indicating the position of the site is as **Figure 37** below.

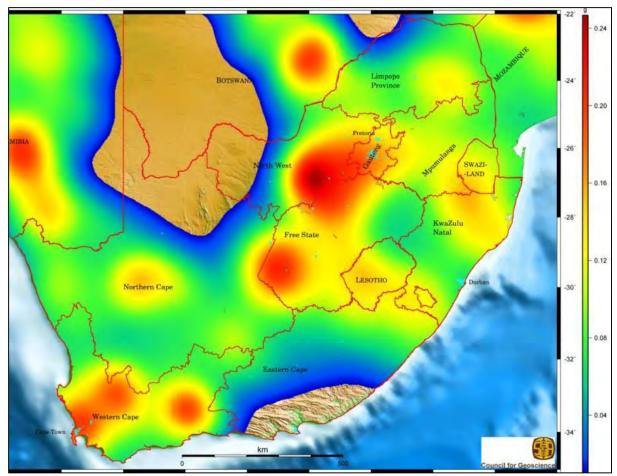


Figure 37: Seismic Hazard map of South Africa

5.16.3 Geology

According to the Geological Map of Loeriesfontein 3018 (scale 1:250 000, 2011) the site is mainly underlain by dolerite, which intruded into and crystallised as a sill within the brown and grey shale of the Prince Albert and Whitehill Formation. Significant alluvial sand deposits, associated with the local streams, partly cover the southern part of the site as shown on **Figure 38** below:

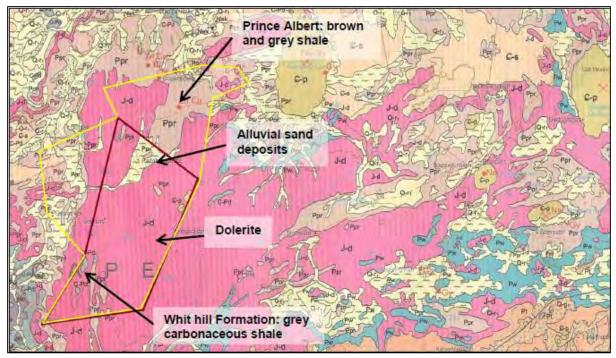


Figure 38: Extract from Loeriesfontein 3018 Geological Map

Breccia Pipes, associated with hydrothermal activity, caused by the dolerite intrusions, are found within the area, especially within the southern portion of the site. These pipes comprise baked and dislocated shale and mudstone, locally with breccia (shattered re-cemented blocks). Gas vugs and fractures are often filled with minerals like calcite, chlorite, fluorite, apophyllite, barite and quartz.

Economical zinc and copper deposits are found on Erf 176 in the north, but with the exception of a couple of borrow pits within the dolerite sill, no mining has occurred on site.

5.16.4 General Ground Conditions

Previous investigations on neighbouring farms show the area is generally underlain by shallow bedrock found between 0 – 1.9m below surface. General profiles for the geological units mapped in Figure 38 above, are summarised in Table 28 below:

UNIT	GEOLOGY	APPROXIMATE PROPORTION SITE (%)	OF	GENERAL PROFILE DESCRIPTION
3 ¹⁵ 3	Alluvial Sand	8		
Pw	Whitehill Formation Shale	2		The area is underlain by shale, covered by silty sand with gravel and calcrete nodules (generally between 0.1-2.0m thick), occasionally with weakly cemented to cemented calcrete towards the base.

 Table 28: General Subsurface Profiles

SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD Proposed Xha! Boom Wind Farm - Final Scoping Report Version No: 1

			The shale tends to be fractured within the upper 2m below surface and within the vicinity of dolerite sills.
			Weathered dolerite sills (up to 1.5m thick), may be occasionally encountered within the upper 5m below surface, with thick hard to very hard rock dolerite sills at depth.
			Refusal of the excavator is generally expected between 0.3-1.5m below surface.
b-L	Dolerite	75	This area comprises a dolerite sill covered by silty sand with gravel and calcrete nodules (generally between 0.1-1.2m thick), occasionally with cemented calcrete towards the base. Sill thickness varies, generally between 5 - >10m, but may be locally absent. Here the subsurface is characterised by fractured shale. Weathering of the sill is also variable, with completely weathered dolerite grading into hard rock from 1.5- >10m below surface, with hard rock generally within 6m.
			Refusal of the excavator is generally expected between 0.3-3.5m below surface.
Pt	Prince Albert Shale	15	The area is underlain by shale, locally with surface outcrops and covered by silty sand with gravel and calcrete nodules (generally between 0.1-2m thick), occasionally with weakly cemented to cemented calcrete towards the base. The shale tends to be fractured within the upper 2m below surface and within the vicinity of dolerite sills. Weathered dolerite sills (up to 1.5m thick), may be occasionally encountered within the upper 5m below surface, with thick hard to very hard rock
			dolerite sills at depth. Refusal of the excavator is generally expected between 0.3-1.5m below surface.

5.16.5 Geotechnical Evaluation

From the available site information, conditions on the site are generally seen as favourable for the proposed development. An evaluation of the impact of the expected geotechnical characteristics on the development are discussed below.

<u>Geotechnical Constraints to Development</u>

Unfavourable geotechnical conditions on the site include:

- 1) Medium hard excavatability of hardpan (cemented) calcrete and soft rock shale. Hard excavatability through soft rock dolerite and hard rock shale.
- 2) Instability of excavation side walls within fractured bedrock.
- 3) Rocky risk for both turbines and roads.

Precautionary measures for foundations as detailed below will have to be incorporated in the design and construction of the proposed development.

<u>Construction Material</u>

Generally the natural gravel, calcrete, fractured shale, weathered dolerite and sand are expected to be suitable for road building material. All of the material in the Leeuwberg Wind Energy Facilty (LWEF) is expected to be suitable for general fill, but the weathered dolerite may also be suitable for a wearing course, however this material should first be tested to verify its quality before use.

Possible quarry sources for concrete aggregate include the hard rock dolerite sill which covers most of the site. Loeriesfontein 2 and Khobab both utilise the existing quarry located on the Loeriesfontein site. The quarry was reopened for these projects and as such the mining license was easier to obtain. There is therefore an opportunity to utilise this quarry for the LWEF project. However, given that the quarry is some 80km away, the tipper trucks required to transport the material makes this option unfavourable. Instead, it is recommended that a new mining license be applied for the LWEF project, utilising in-situ material as far as possible. The location of the mine site can only be determined once material suitability has been confirmed through further testing.

The dolerite within the northern portion of the site seems most promising, as this area is characterised with less preferential drainage channels and associated deeper weathered conditions. Generally significant overburden (up to 5m below surface) is expected. Overburden at the base of existing borrow pits may be thinner and the vegetation over these areas is already disturbed. The source should however be drilled to assess quantities, with additional laboratory testing to confirm the durability of the material. A map, indicating existing borrow pots recorded on the 1:50 000 map and the most promising area for a potential quarry is provided in **Appendix G** of the Preliminary Geotechnical Assessment.

Foundations

Founding conditions are seen as relatively favourable on the site, with excavatability seen as the main concern.

It is likely that all the foundations would be placed on spread footings at shallow depth.

Estimated safe bearing capacities for these foundations include:

- Hardpan calcrete 200 500kPa.
- Fractured shale 500 -1,000kPa
- Soft to medium hard rock dolerite and hard rock shale >1,000kPa.

<u>Geotechnical Evaluation</u>

- 1. <u>*Mining activity and undermining*</u>. No mining has occurred on site, thus no undermined areas occur on site. There is, however occurrences of economic mineral deposits on the northern portion of the site.
- 2. <u>Dolomite</u>. The site is not situated on dolomitic land.
- 3. <u>Contaminated soils (including tailings)</u>. No contaminated soils were noted. The site is also not on or near a tailings dam.

5.16.6 Further Geotechnical Investigations

The assessment of ground conditions on the site is based on limited information obtained during previous investigations on neighbouring farms. Although geotechnical conditions is expected to be favourable over the site, it is recommended that further, more detailed investigations are undertaken to confirm the assumed ground conditions given in this report. These additional investigations would also be aimed at optimising design assumptions so as to ultimately result in a reduced project cost.

Aspects which should specifically be addressed during these investigations include:

- Foundation conditions for turbine structures Detailed investigations comprising rotary core drilling covering approximately 30% of the site, with percussion drilling and / or Continuous Surface Wave (CSW) test on the remainder of the positions. This investigation should extend to a minimum depth of 10m at each of the final turbine positions. Piezometers are also recommended to locate the permanent groundwater levels for the site.
- Excavatability Rock excavation trials and/or either CSW or geophysical testing where excavations deeper than 1m are required.
- Mass haul and materials Investigation of the suitability of materials from excavations for engineered layerworks and the identification and investigation of potential borrow areas.
- Electrical & thermal resistivity Investigation of ground resistivity for the design of earthing for substations, and grading of buried cables.

5.16.7 Conclusion

From the available site information, conditions on the site are generally seen as favourable for the proposed development. However the Preliminary Geotechnical Report should be supplemented with a detailed geotechnical investigation prior to construction commencing.

5.17 Traffic Impact Assessment

The Traffic Impact Assessment was conducted by Glen Randall and reviewed by Cobus Hendriksz from SMEC. Glen Randall subsequently no longer works at SMEC, but Cobus Hendriksz will be responsible for the study going forward. The full report is included in **Appendix 8E**. The environmental baseline from a socio-economic perspective is presented below.

This Chapter provides a summary of a separate report entitled "Leeuwberg Farm Preliminary Transportation Study" which attempts to address all transport related issues. Both the abnormal and legal vehicles were reviewed in terms of their type of activity; i.e. construction traffic, traffic associated with the transportation of the wind turbine components, or traffic associated with the transportation of materials, equipment and people. The key issues associated with the construction and operational phases of the project that will be assessed as part of the transport study are:

- Increase in traffic generation throughout the lifetime of the project;
- Increase in road maintenance required; and
- Ability to transport wind turbine components to site safely and efficiently.

5.17.1 Existing Traffic Conditions

Table 29 below shows a summary of the roads and road segments affected by the LWEF project.

Road Segment	Segment Name	Chainage Start	Chainage End	Distance (km)
Atlantis to R358				
R304	Dr1134	Km1	Km0	1
N7	Segment 1	Km36 (Atlantis)	Km52 (Malmesbury)	16
	Segment 2	Km0	Km34 (Moorreesburg)	34
		(Malmesbury)		
	Segment 3	Km0	Km31 (Piketberg)	31
		(Moorreesburg)		
R366	MR023/MR531	Km0 (Piketberg)	Km38	38
R365	MR538	Km86	Km0	86
R364	TR5501	Km61	Km0	61
N7	Segment 5	Km0	Km75 (Vanrhynsdorp)	75
	Segment 6	Km0	Km75 (Bitterfontein)	83

Table 29: Road Segments Affected by LWEF

	Segment 7	Km0	Km4	(R358	4
			intersection))	
			То	tal	429
R358 to P294	8				
R358	MR736	Km0	Km61	(R355	61
			intersection))	
	MR736	Km61	Km105	(P2948	44
			intersection))	
			To	tal	105
P2948 to LWE	EF Boundary				
P2948		Km0	Km29		29
Private Ad	cess	Km0	Km12	(LWEF	12
Road			Boundary)		
			То	tal	41
Loeriesfontei	n to R358				
	R355	Km0	Km84	(R358	84
		(Loeriesfontein)	intersection))	

Table 30 shows that the Average Daily Traffic (ADT) for the N7 between Vanrhynsdorp and Nuwerus is in the order of 1100 vehicles of which the Average Daily Truck Traffic (ADTT) consist of 300 vehicles. The N7 is only one lane in each direction and is capable of carrying 2000vph. It is furthermore reasonable to assume that this portion of the N7 carries significantly lower volumes of traffic than elsewhere along its length. SMEC are still awaiting additional traffic data from the provincial DoT.

Historic Trip Generation of N7 (2013)				
Section	Between Vanrhynsdorp and Nuwerus			
Average Daily traffic (ADT)	1038 vehicles			
Average Daily Truck Traffic (ADTT)	290 vehicles (27.9% of total)			

Table 30: Existing Traffic Volumes (2013)

5.18 Path Loss and Risk Assessment

The Path Loss and Risk Assessment was conducted by Callie Fouché of Interference Testing and Consultancy Services (Pty) Ltd (ITC). The full report is included in **Appendix 8C**. The environmental baseline from a socio-economic perspective is presented below.

The SKA is a stakeholder listed in the Interested and Affected parties of the proposed development. In order to determine whether the planned wind farm development could have any influence on the SKA, Mainstream requested a risk evaluation of the planned development to SKA activities. The frequency band of concern for SKA mid-band is 200MHz to 20GHz. This assessment does not consider any potential telecommunication services or networks that are to be established as part of the operational plan.

This risk assessment assumes the use of 47 Acciona AW 125 TH100A turbines within the Xha! Boom development and will be compared to known radiated emission data from the AW125 TH100A Acciona WTG as presented in the Acciona Control Plan.

The Acciona AW 125 TH 100A is the model within the AW 3000 platform that will be evaluated for this project. This assessment will be updated based on additional measurement results and design information as it becomes available.

The intent of this evaluation is to ensure that Xha! Boom facility poses a low risk of detrimental impact on the SKA by using known radiated emission amplitudes of the Acciona AW3000/125 TH100 50Hz wind turbine. Specific mitigation measures to be implemented on the AW3000/125 TH100 50Hz wind turbine in order to achieve 40 dB of attenuation has been reviewed and agreed by SKA South Africa as described in the Emission Control Plan for the AW125 TH100A WTG.

5.18.1 EMC Requirements

The current Emission Control Plan for the AW125 TH100A WTG provides for a 40dB reduction in radiated emissions to ensure the cumulative emission level of previously assessed wind farms where the Acciona AW 125 TH100A WTG will be used is within the requirements of SKA. This requirement is based on measurements on the Acciona AW 125 TH100A WTG at the Gouda facility in South Africa and Barosoain wind farm, Navarra, Spain.

5.18.2 EMC Analysis

<u>Site Location</u>



Figure 39: Area map showing Xha! Boom locations relative to SKA

Two (2) WTG locations (WTG 1 and WTG 36) and two (2) SKA installations (Rem Opt 7 and SKA 2377) were used for the evaluation.



Figure 40: Local map showing nearest two SKA locations

	Xha! Boom WTG 1	Xha! Boom WTG 36
SKA Rem Opt 7	52.7km	60.5km
SKA ID 2377	74.8km	73.2km
MeerKAT (Core)	212.0km	212km

 Table 31: Xha! Boom layout distance from SKA infrastructure

Due to natural terrain barriers and the 52.6km distance between Xha! Boom and Rem-opt 7, the closest SKA unit, no degradation of performance is expected when the mitigated AW 125 TH100A Acciona turbines are installed. This shown by the 10 to 20dB higher path loss for Xha! Boom compared to Garob.

To verify overall wind farm emissions, ambient measurements should be done at the new site before construction starts. Tests points should be carefully selected based on test equipment sensitivity with the objective to observe the increase in ambient emissions as construction progresses.

Final site tests will be done on completion of the project to confirm the radiated emission levels. Although not anticipated, proper mitigation measures on identified emitters will be studied and implemented if final test shows emissions exceeding the SKA threshold.

5.18.3 Impacts associated with change in turbine dimension from a SKA perspective

Due to the fact that the proposed turbine dimensions were changed from a hub height of up to 150m and rotor diameter of up to 150m, to a hub height of up to 160m and a rotor diameter of up to 160m, the specialist was requested to compile a letter which details the impacts associated with the change in the proposed turbine dimensions from a SKA perspective. This letter is included in Appendix 8C.

The risk of interference between wind turbines and the SKA radio telescope is primarily a function of the following factors:

- Radiated emission amplitude from turbine;
- Turbine hub height;
- Number of turbines;
- Distance between turbine and SKA infrastructure; and
- Terrain between the turbine and the SKA infrastructure (line of sight or natural barriers between the installations).

The dB increase in the electromagnetic noise by increasing the number of turbines from 47 units to 70 units can be estimated with the standard 10 x Log (N), where N is the number of turbines, formula as a reasonable assumption. Changing the number of turbines from 47 to 70 will therefor result in a 13.6dB increase in electromagnetic noise.

Increasing the turbine hub height could result in the nacelle being elevated above the natural terrain barriers that provided a shield between the turbine and the SKA infrastructure at a lower hub height. The change in interference risk profile will have to be re-evaluated if the nacelle height is different from the initial proposed height to verify the line of sight/ terrain shielding conditions.

Further studies would in any case be required at a later stage once a final turbine type has been confirmed, at this stage all these uncertainties would be clarified.

6 ENVIRONMENTAL ISSUES, POTENTIAL IMPACTS AND CUMULATIVE IMPACTS

6.1 Methodology for Assessing Impacts

The Impact Assessment Methodology assists in evaluating the overall effect of a proposed activity on the environment. The determination of the effect of an environmental impact on an environmental parameter is determined through a systematic analysis of the various components of the impact. This is undertaken using information that is available to the environmental practitioner through the process of the environmental impact assessment. The impact evaluation of predicted impacts was undertaken through an assessment of the significance of the impacts.

6.1.1 Determination of Significance of Impacts

Significance is determined through a synthesis of impact characteristics which include context and intensity of an impact. Context refers to the geographical scale i.e. site, local, national or global whereas Intensity is defined by the severity of the impact e.g. the magnitude of deviation from background conditions, the size of the area affected, the duration of the impact and the overall probability of occurrence. Significance is calculated as shown in **Table 113**.

Significance is an indication of the importance of the impact in terms of both physical extent and time scale, and therefore indicates the level of mitigation required. The total number of points scored for each impact indicates the level of significance of the impact.

6.1.2 Impact Rating System

Impact assessment must take account of the nature, scale and duration of effects on the environment whether such effects are positive (beneficial) or negative (detrimental).

Rating System Used To Classify Impacts

The rating system is applied to the potential impact on the receiving environment and includes an objective evaluation of the mitigation of the impact. Impacts have been consolidated into one rating. In assessing the significance of each issue the following criteria (including an allocated point system) is used:

Table 32: Description of terms

NATURE

Include a brief description of the impact of environmental parameter being assessed in the context of the project. This criterion includes a brief written statement of the environmental aspect being impacted upon by a particular action or activity.

GEOGRAPHICAL EXTENT

This is defined as the area over which the impact will be expressed. Typically, the severity and significance of an impact have different scales and as such bracketing ranges are often required. This is often useful during the detailed assessment of a project in terms of further defining the determined.

1	Site The impact will only affect the site				
2	Local/district	t Will affect the local area or district			
3	Province/region	Will affect the entire province or region			
4	International and National Will affect the entire country				
	PROBABILITY				
This	This describes the chance of occurrence of an impact				
1	The chance of the impact occurring is extremely low (Less tUnlikelya 25% chance of occurrence).				

		1			
2	Possible	The impact may occur (Between a 25% to 50% chance of occurrence).			
		The impact will likely occur (Between a 50% to 75% chance of			
3	Probable	occurrence).			
		Impact will certainly occur (Greater than a 75% chance of			
4	Definite	occurrence).			
	I	REVERSIBILITY			
This	describes the degree to which	an impact on an environmental parameter can be successfully			
reve	rsed upon completion of the pro	posed activity.			
		The impact is reversible with implementation of minor			
1	Completely reversible	mitigation measures			
		The impact is partly reversible but more intense mitigation			
2	Partly reversible	measures are required.			
1		The impact is unlikely to be reversed even with intense			
3	Barely reversible	mitigation measures.			
4	Irreversible	The impact is irreversible and no mitigation measures exist.			
	IRREPL	ACEABLE LOSS OF RESOURCES			
This	describes the degree to which	resources will be irreplaceably lost as a result of a proposed			
activ	vity.				
1	No loss of resource.	The impact will not result in the loss of any resources.			
2	Marginal loss of resource	The impact will result in marginal loss of resources.			
3	Significant loss of resources	The impact will result in significant loss of resources.			
4	Complete loss of resources	The impact is result in a complete loss of all resources.			
DURATION					
	describes the duration of the ir me of the impact as a result of th	mpacts on the environmental parameter. Duration indicates the he proposed activity			
I		The impact and its effects will either disappear with mitigation			
		or will be mitigated through natural process in a span shorter			
		than the construction phase $(0 - 1 \text{ years})$, or the impact and its			
		effects will last for the period of a relatively short construction			
4	Chart tarm	period and a limited recovery time after construction, thereafter			
1	Short term	it will be entirely negated (0 – 2 years).			
		The impact and its effects will continue or last for some time			
		after the construction phase but will be mitigated by direct			
2	Medium term	human action or by natural processes thereafter $(2 - 10 \text{ years})$.			
-		The impact and its effects will continue or last for the entire			
		operational life of the development, but will be mitigated by			
		direct human action or by natural processes thereafter $(10 - 50)$			
3	Long term	years).			
L	, č	· ·			

	T				
	The only class of impact that will be non-transitory. Mitigation				
		either by man or natural process will not occur in such a way			
		or such a time span that the impact can be considered transient			
4	Permanent	(Indefinite).			
		CUMULATIVE EFFECT			
This	describes the cumulative effec	t of the impacts on the environmental parameter. A cumulative			
effe	ct/impact is an effect which in its	elf may not be significant but may become significant if added to			
		nanating from other similar or diverse activities as a result of the			
proje	ect activity in question.				
1	Negligible Cumulative Impact	The impact would result in negligible to no cumulative effects			
2	Low Cumulative Impact	The impact would result in insignificant cumulative effects			
3	Medium Cumulative impact	The impact would result in minor cumulative effects			
4	High Cumulative Impact	The impact would result in significant cumulative effects			
		INTENSITY / MAGNITUDE			
Des	cribes the severity of an impact				
		Impact affects the quality, use and integrity of the			
1	Low	system/component in a way that is barely perceptible.			
		Impact alters the quality, use and integrity of the			
		system/component but system/ component still continues to			
		function in a moderately modified way and maintains general			
2	Medium	integrity (some impact on integrity).			
		Impact affects the continued viability of the system/component			
		and the quality, use, integrity and functionality of the system or			
		component is severely impaired and may temporarily cease.			
3	High	High costs of rehabilitation and remediation.			
		Impact affects the continued viability of the system/component			
		and the quality, use, integrity and functionality of the system or			
		component permanently ceases and is irreversibly impaired			
		(system collapse). Rehabilitation and remediation often			
		impossible. If possible rehabilitation and remediation often			
		unfeasible due to extremely high costs of rehabilitation and			
4	Very high	remediation.			
		SIGNIFICANCE			

Significance is determined through a synthesis of impact characteristics. Significance is an indication of the importance of the impact in terms of both physical extent and time scale, and therefore indicates the level of mitigation required. This describes the significance of the impact on the environmental parameter. The calculation of the significance of an impact uses the following formula:

(Extent + probability + reversibility + irreplaceability + duration + cumulative effect) x magnitude/intensity.

The summation of the different criteria will produce a non-weighted value. By multiplying this value with the magnitude/intensity, the resultant value acquires a weighted characteristic which can be measured and assigned a significance rating.

Points	Impact Significance Rating	Description			
6 to 28	Negative Low impact	The anticipated impact will have negligible negative			
		effects and will require little to no mitigation.			
0 / 00	-				
6 to 28	Positive Low impact	The anticipated impact will have minor positive effects.			
29 to 50	Negative Medium impact	The anticipated impact will have moderate negative			
		effects and will require moderate mitigation measures.			
29 to 50	Positive Medium impact	The anticipated impact will have moderate positive			
		effects.			
51 to 73	Negative High impact	The anticipated impact will have significant effects and			
		will require significant mitigation measures to achieve an			
		acceptable level of impact.			
51 to 73	Positive High impact	The anticipated impact will have significant positive			
		effects.			
74 to 96	Negative Very high impact	The anticipated impact will have highly significant effects			
		and are unlikely to be able to be mitigated adequately.			
		These impacts could be considered "fatal flaws".			
74 to 96	Positive Very high impact	The anticipated impact will have highly significant			
		positive effects.			

6.2 Identification of Potential Impacts

The proposed development is likely to result in a variety of positive and negative impacts. Moreover, the proposed development could potentially result in collective and long term impacts more commonly known as cumulative impacts. A cumulative impact is the impact of an activity that, in itself, may not be significant but may become significant when added to the existing and potential impacts eventuating from similar or diverse activities or undertakings in the area.

The Scoping Report assists in the identification of these potential and cumulative impacts, which will then be assessed at a more detailed level during the EIA stage.

Moreover, further details associated with the construction and operation of the various activities (as listed in the Project Description) in light of the above types of impacts that become available later in the EIA process will be discussed in detail in the EIA Phase.

The impacts that have been identified as being potentially significant are elaborated on in the subsections below.

6.2.1 Biodiversity Impacts

The following potential impacts have been identified for the proposed wind farm development and will be further investigated in the EIA phase of the biodiversity assessment.

IMPACTS ON VEG	IMPACTS ON VEGETATION AND PROTECTED PLANT SPECIES					
Environmental parameter	Vegetation and protected plant species					
Issue/Impact/Environmental	Vegetation clearing for access roads, turbines and their					
Effect/Nature	service areas and other infrastructure will impact on					
	vegetation and protected plant species.					
Extent	The extent of the impact will be restricted the wind farm site					
	and as such would be local in nature.					
Probability	This impact will definitely occur as vegetation clearing will be					
	required for the construction and establishment of the					
	project.					
Reversibility	This impact is not highly reversible as it would take a long					
	time for any cleared to return to their former state.					
Irreplaceable loss of resources	It is not likely that there would be significant irreplaceable					
	loss of resources.					
Duration	The construction phase itself will be of short duration, but the					
	resulting impact would persist for a long time.					
Cumulative effect	The clearing would contribute to vegetation impacts in the					
	area, the contribution of a single facility would be low, but as					
	there are several facilities in the area, the cumulative impact					
	would be moderate.					
Intensity/magnitude	The intensity of the impact would be moderate to high,					
	depending on where and how much vegetation was cleared.					
Significance rating	Without mitigation, this impact would be of moderate					
	significance, but with avoidance this impact can be reduced					
	to a low level.					
	Pre-mitigation impact rating Post-mitigation impact rating					
Extent	2 2					
Probability	4 4					
Reversibility	2 2 2 1					
Irreplaceable loss Duration						
Cumulative effect						
	3 2					
Intensity/magnitude	3 2					
Significance rating	-48 (medium negative) -28 (low negative)					
Mitigation measures	Mitigation measures to reduce residual risk or enhance					
	opportunities:					
	1) Minimise development footprint within sensitive areas and ensure that final development layout takes account of areas					
	identified as sensitive.					

 Table 33: Impacts on vegetation and protected plant species

2) Ensure that lay-down and other temporary infrastructure						
is	within	low	sensitivity	areas,	preferably	previously
transformed areas if possible.						

Table 34: Impacts on fauna during construction and operation

IMPACTS ON FAUNA DURING CONSTRUCTION AND OPERATION					
Environmental parameter	Faunal impacts due to constru	uction and operation activities			
Issue/Impact/Environmental	Vegetation clearing, the use o	f heavy machinery and human			
Effect/Nature	presence during construction	presence during construction is likely to negatively affect			
	resident fauna during constru	ction. During operation, noise			
		te some disturbance for fauna.			
Extent		e restricted the site and as such			
	would be local in nature.				
Probability		and cannot be easily mitigated			
	or avoided.				
Reversibility		e and it is only habitat loss that			
	is not considered easily revers				
Irreplaceable loss of resources	-	pe significant irreplaceable loss			
	of resources in terms of fauna				
Duration		elf will be of relatively short			
	· · · ·	will persist into operation on			
	account of the noise generate				
Cumulative effect	-	to cumulative habitat loss for			
		fauna in the area, but this would be largely local in nature.			
Intensity/magnitude	The intensity of the impact would be moderate.				
Significance rating					
moderate to high intensity. Du		• • •			
	•	Overall significance is likely to			
	be moderate before mitigation and moderate to low				
	thereafter.				
	Des mitigation immant action	Deet with a time in a stration			
Futent	Pre-mitigation impact rating	Post-mitigation impact rating			
Extent	2	2			
Probability	3	2			
Reversibility	2	2			
Irreplaceable loss	1	1			
Duration	4	4			
Cumulative effect	3	2			
Intensity/magnitude	3	2			
Significance rating					
Mitigation measures	Mitigation measures to reduce residual risk or enhance opportunities:				
	1) Avoid sensitive faunal hab	itats such as drainage lines.			
	2) A variety of avoidance and	mitigation measures to reduce			
	impact on fauna will need	to be implemented during			

SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD prepared by: SiVEST Environmental Proposed Xha! Boom Wind Farm - Final Scoping Report

construction, including limiting impacts from construction	
staff and the operation of construction vehicles.	

INCREASED SOIL E	ROSION RISK						
Table 35: Impacts on increased soil erosion risk							
stan and the	operation of construction vehicles						

Environmental parameter	Ecosystem integrity			
Issue/Impact/Environmental	Following construction, the site will be highly vulnerable to			
Effect/Nature	soil erosion due to disturbance	soil erosion due to disturbance		
Extent	The extent of the impact will b	The extent of the impact will be restricted the wind farm site		
	and as such would be local in	and as such would be local in nature.		
Probability	This impact would be likely to	This impact would be likely to occur due to the large amount		
	of disturbance generated durin	of disturbance generated during construction.		
Reversibility	Reversibility would be high	Reversibility would be high for mild erosion, but would		
	become increasingly low with	become increasingly low with increasing severity of erosion.		
Irreplaceable loss of resources	It is not likely that there would b	be significant irreplaceable loss		
	of resources if this impact is m	of resources if this impact is managed.		
Duration	This impact is likely to pe	This impact is likely to persist for several years after		
	construction.			
Cumulative effect	Erosion would contribute	to cumulative ecosystem		
	degradation in the area, but with mitigation, this impact ca be avoided.			
Intensity/magnitude	The intensity of the impact wo	ould be moderate as the site is		
	not considered highly vulneral			
Significance rating	Without mitigation, this impact would be of moderate to low significance, but with avoidance this impact can be reduced			
	to a very low level.	to a very low level.		
	Pre-mitigation impact rating	Post-mitigation impact rating		
Extent				
Extent	3	4		
Probability Reversibility	2	2		
	2	1		
Irreplaceable loss Duration				
	3	3		
Cumulative effect	2	1		
Intensity/magnitude	3	1 12 (low posstive)		
	gnificance rating -39 (medium negative) -12 (low ne			
		uce residual risk or enhance		
	opportunities:			
		 Soil erosion plan to be part of the EMP. Rehabilitation of eroded areas on a regular basis. 		
		eas on a regular basis.		

Table 36: Loss of Alien Plant Invasion

ALIEN PLANT INVASION	
Environmental parameter E	Ecosystem integrity

prepared by: SiVEST Environmental

Issue/Impact/Environmental	Following construction, the site will be highly vulnerable to			
Effect/Nature	alien plant invasion due to disturbance			
Extent	The extent of the impact will be restricted the wind farm site			
	and as such would be local in	and as such would be local in nature.		
Probability	This impact would be likely t	This impact would be likely to occur as there are already		
	some alien species at the site	e and these would be likely to		
	increase in response to disturb	increase in response to disturbance.		
Reversibility	Reversibility would be high for mild infestation, but would			
	become increasingly low with	become increasingly low with extensive invasion.		
Irreplaceable loss of resources	It is not likely that there would be significant irreplaceable loss			
	of resources if this impact is m	of resources if this impact is managed.		
Duration	This impact is likely to per	This impact is likely to persist for several years after		
	construction.			
Cumulative effect	Alien invasion would contribute to cumulative ecosystem			
	-	degradation in the area, but with mitigation, this impact can		
	be avoided.			
Intensity/magnitude		uld be moderate as the site is		
		not considered highly vulnerable to invasion.		
Significance rating	Without mitigation, this impact would be of moderate			
		significance, but with avoidance this impact can be reduced		
	to a very low level.	to a very low level.		
	Pre-mitigation impact rating	Post-mitigation impact rating		
Extent	1	1		
Probability	4	4		
Reversibility	2	2		
Irreplaceable loss	2	1		
Duration	3	3		
Cumulative effect	2	1		
Intensity/magnitude	3	1		
Significance rating	-42 (medium negative)	-12 (low negative)		
Mitigation measures	gation measuresMitigation measures to reduce residual risk or enhance opportunities: 1) Alien management plan to be part of the EMP. 2) Regular alien clearing where invasion occurs.			

The following impacts associated with the proposed Xha! Boom Wind Farm can be listed as:

- Impacts on vegetation and protected plant species during construction
- Impacts on fauna and flora during construction and operation;
- Impacts on increased soil erosion risk during operation; and
- Loss of Alien Plant Invasion during operation.

6.2.2 Avifauna Impacts

The following potential impacts have been identified for the proposed wind farm development and will be further investigated in the EIA phase of the avifaunal assessment.

Displaced due to disturbance

None of the priority species are likely to be permanently displaced due to disturbance, although displacement in the short term during the construction phase is very likely. The risk of permanent replacement is larger for large species such as Kori Bustard (*Ardeotis kori*) and Ludwig's Bustard (*Neotis ludwigii*), although displacement of the closely related Denham's Bustard (*Neotis denhami*) is evidently not happening at existing wind farms in the Eastern Cape (M. Langlands pers. comm). If the wind farm follows the modern trend of fewer, larger turbines (which seems to be the case), the risk of displacement due to disturbance is also lower. However, this will only be conclusively established through a post-construction monitoring programme. It is necessary to implement exclusion zones around the nests of the priority species recorded breeding in the development site, namely Greater Kestrel (*Falco rupicoloides*) and Lanner Falcon (*Falco biarmicus*).

Habitat transformation

The direct habitat transformation at the proposed wind farm is likely to be fairly minimal. The indirect habitat transformation could potentially have a bigger impact on priority species. It is expected that the densities of some larger terrestrial priority species may decrease due to this impact, e.g. Ludwig's Bustard, Karoo Korhaan and Northern Back Korhaan, but complete displacement is unlikely. The degree of displacement will only become apparent through post-construction monitoring. It is unlikely that raptors will be affected at all.

An issue that needs to be investigated is the potential of Red Lark displacement by the habitat transformation which will take place as a result of the proposed wind farms, due to the fact that the species is a range-restricted endemic. In a comprehensive study Hötker *et al.* 2006 calculated the following minimum turbine avoidance distances for several species, based on the analyses of a number of studies

AVIFAUNA		
Environmental Parameter	Avifauna	
Issue/Impact/Environmental	Displacement of priority species due to disturbance during	
Effect/Nature	construction phase	
Extent	The impact will only affect the site.	
Probability	Impact will certainly occur (greater than a 75% chance of	
	occurrence) for some species, particularly the larger ones.	
Reversibility	Partly reversible. The construction activities will inevitably	
	cause temporary displacement of some priority species.	
	Once the source of the disturbance has been removed, i.e.	

 Table 37: Impacts associated with displacement of priority avifauna due to disturbance during construction phase

AVIFAUNA		
	activities, most species sho have not been transformed	ssociated with the construction uld re-colonise the areas which by the footprint. However, the gmentation could result in lower
Irreplaceable loss of resources	Marginal loss of resources species is likely to be partial	s. The displacement of priority I.
Duration	removed, i.e. the noise and construction activities, prio	ce of the disturbance has been movement associated with the rity species should re-colonise een transformed by the footprint, nsity.
Cumulative effect	are likely to occur) at the distribution ranges, the cun would therefore be at mo	he priority species that occur (or e proposed site all have large nulative impact of displacement ost locally significant in some nally or nationally significant (see
Intensity/magnitude	High. Impact affects the continued viability of the system/component and the quality, use, integrity and functionality of the system or component is severely impaired and may temporarily cease.	
Significance Rating	Medium significance.	
	Pre-mitigation impact rating	Post mitigation impact rating
Extent	1	1
Probability	4	2
Reversibility	2	1
Irreplaceable loss	2	2
Duration	1	1
Cumulative effect	3	2
Intensity/magnitude	3	2
Significance rating	-39 (medium negative)	-18 (low negative)
	 Restrict the construction activities to the construction footprint area. Do not allow any access to the remainder of the property during the construction period. Measures to control noise and dust should be applied according to current best practice in the industry. Maximum used should be made of existing access roads and the construction of new roads should be kept 	
Mitigation measures	to a minimum.	

SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD prepared by: SiVEST Environmental Proposed Xha! Boom Wind Farm - Final Scoping Report

	AVIFAUNA
•	A 300m exclusion zone should be implemented around the existing water points and pans where no construction activity or disturbance should take place. A 300m exclusion zone must be implemented around all Greater Kestrel nests. A 500m exclusion zone must be implemented around the active Lanner Falcon nest.

Table 38: Impacts associated with the displacement of priority species due to habitat destruction during
construction phase.

AVIFAUNA		
Environmental Parameter	Avifauna	
Issue/Impact/Environmental	Displacement of priority species due to habitat destruction	
Effect/Nature	during construction phase	
Extent	The impact will only affect the	ne site.
Probability	Impact will certainly occur occurrence)	(greater than a 75% chance of
Reversibility	Partly reversible. The footprint of the wind farm is an inevitable result of the development, but it is likely that priority species will still utilise the site, albeit at lower densities.	
Irreplaceable loss of resources	Marginal loss of resources. I still utilise the site albeit at lo	t is likely that priority species will over densities.
Duration	Long term. The habitat trans	sformation will be permanent
Cumulative effect	Moderate cumulative impact. There are several renewable energy developments planned around Loeriesfontein which could result in a significant area of transformed habitat, but only at a local scale, for some species (see also Section 10 below).	
Intensity/magnitude	Medium. It is likely that prior albeit at lower densities.	ity species will still utilise the site
Significance Rating	Medium significance.	
	Pre-mitigation impact	
	rating	Post mitigation impact rating
Extent	1	1
Probability	4	3
Reversibility	2	2
Irreplaceable loss	2	2
Duration	4	4

SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD Proposed Xha! Boom Wind Farm - Final Scoping Report Version No: 1

AVIFAUNA		
Cumulative effect	3	3
Intensity/magnitude	2	2
Significance rating	-32 (medium negative)	-30 (medium negative)
	 must be strictly adhered Maximum used should roads and the construction to a minimum. A 300m exclusion zone is the existing water p construction activity or d A 300m exclusion zone r Greater Kestrel nests. A 500m exclusion zone is the active Lanner Falcor Post-construction monitor make comparisons with If densities of key prior significantly reduced du farm, the management 	be made of existing access on of new roads should be kept should be implemented around oints and pans where no isturbance should take place. nust be implemented around all must be implemented around
Mitigation measures	species.	

 Table 39: Impacts associated with the Avifauna displacement of priority species due to disturbance during operational phase

AVIFAUNA		
Environmental Parameter	Displacement of priority species due to disturbance durin	
	operational phase	
Issue/Impact/Environmental		
Effect/Nature		
	The impact will only affect the site.	
Extent	Probable. The impact may occur (between a 50% to 75%	
	chance of occurrence).	
Probability	Partly reversible. The operational activities could cause	
	displacement of some priority species, but the impact is	
	likely to be much less than during the construction phase.	
Reversibility	Marginal loss of resources. Habituation is likely for some	
	species after the construction phase, especially smaller	
	species.	
Irreplaceable loss of resources	Long term. Although habituation may happen in some	
	instances, it must be assumed that in some instances the	
	impact may be long term i.e. for the life-time of the activity.	
Duration	Minor cumulative impact. The priority species that occur (or	
	are likely to occur) at the proposed site all have large	

 SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD
 prepared by: SiVEST Environmental

 Proposed Xha! Boom Wind Farm - Final Scoping Report
 Version No: 1

AVIFAUNA			
	would therefore be loca	distribution ranges, the cumulative impact of displacement would therefore be locally significant at most, rather than regional or national (see also Section 9 below).	
Cumulative effect	instances, it must be as	Medium. Although habituation may happen in some instances, it must be assumed that in some instances the impact may be long term i.e. for the life-time of the activity.	
Intensity/magnitude	Low significance.		
Significance Rating	Displacement of priority operational phase	Displacement of priority species due to disturbance during operational phase	
	Pre-mitigation imp rating	Pact Post mitigation impact rating	
Extent	1	1	
Probability	3	2	
Reversibility	2	2	
Irreplaceable loss	2	2	
Duration	3	3	
Cumulative effect	2	2	
Intensity/magnitude	2	2	
Significance rating	-26 (low negative)	-24 (low negative)	
N4141 model and an and a second second	area. Maintenance s other parts of the pro	area. Maintenance staff should not be allowed to access other parts of the property unless it is necessary for wind	
Mitigation measures	farm related work.		

Table 40: Impacts associated with collisions of priority species with the turbines in the operational phase.

AVIFAUNA		
Environmental Parameter	Avifauna	
Issue/Impact/Environmental Effect/Nature	Collisions of priority species with the turbines in the operational phase	
Extent	The impact will affect the local area or district	
Probability	Possible. The impact may occur (between 25% - 50% chance of occurrence).	
Reversibility	Partly reversible. Mitigation measures could reduce the risk of collisions.	
Irreplaceable loss of resources	Significant loss of resources.	
Duration	Long term. The risk of collision will be present for the life- time of the development.	

AVIFAUNA		
Cumulative effect	Moderate cumulative impact. The cumulative impact will depend largely on which species are killed. If Verreaux's Eagles or Martial Eagles are regularly killed, the regional impact could be significant (see also Section 10 below). However, the low reporting rate for priority species makes this an unlikely scenario.	
Intensity/magnitude	Medium. The wind turbines could cause mortality of some priority species.	
Significance Rating	Medium significance.	
Extent	Pre-mitigation impact rating 2	Post mitigation impact rating
Probability	2	2
Reversibility	2	2
Irreplaceable loss	3	3
Duration	3	3
Cumulative effect	3	3
Intensity/magnitude	3	2
Significance rating	-	
	 -45 (medium negative) -30 (medium negative) A 300m no-go buffer is proposed around water points as they serve as focal points for bird activity. A 300m exclusion zone must be implemented around all Greater Kestrel nests. A 500m exclusion zone must be implemented around the active Lanner Falcon nest. Formal monitoring should be resumed once the turbines have been constructed, as per the most recent edition of the best practice guidelines (Jenkins <i>et al.</i> 2011). The exact scope and nature of the post-construction monitoring will be informed on an ongoing basis by the result of the monitoring through a process of adaptive management. The purpose of this would be (a) to establish if and to what extent displacement of priority species has occurred through the altering of flight patterns post-construction, and (b) to search for carcasses at turbines. As an absolute minimum, post-construction monitoring should be undertaken for the first two years of operation, and then repeated again in year 5, and again every five years thereafter. The exact scope and nature of the 	
Mitigation measures	post-construction moni	toring will be informed on an

AVIFAUNA
 ongoing basis by the results of the monitoring through a process of adaptive management. The minimum turbine tip height should be no less than 50m to reduce the risk of Red Lark mortality during display flight activity. Depending on the results of the carcass searches, a range of mitigation measures will have to be considered if mortality levels turn out to be significant, including selective curtailment of problem turbines during high risk periods if need be. If turbines are to be lit at night, lighting should be kept to a minimum and should preferably not be white light. Flashing strobe-like lights should be used where possible (provided this complies with Civil Aviation Authority regulations). Lighting of the wind farm (for example security lights) should be kept to a minimum. Lights should be directed downwards (provided this complies with Civil Aviation Authority regulations).

Xha! Boom Wind Farm

The species most at risk of electrocution on the internal overhead MV power line network are the large raptors, particularly Martial Eagle and Verreaux's Eagle. Although the majority of the lines will be underground, there might be small sections e.g. those crossing drainage lines, which will be overhead.

Table 41: Impacts associated with mortality of priority species due to electrocution on the internal MV lines in the operational phase.

AVIFAUNA		
Environmental Parameter	Avifauna	
Issue/Impact/Environmental	Mortality of priority species due to electrocution on the	
Effect/Nature	internal MV lines in the operational phase	
Extent	The impact could affect the local area or district	
Probability	Possible. The impact may occur (Between a 25% to 50%	
	chance of occurrence).	
Reversibility	Completely reversible. Mitigation measures could eliminate	
	the risk	
Irreplaceable loss of resources	Significant loss of resources.	
Duration	Long term. The risk of electrocution could potentially be	
	present for the life-time of the development if not mitigated	
	at the onset.	
Cumulative effect	Moderate cumulative impact. The cumulative impact will	
	depend largely on which species are killed. If Verreaux's	

 SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD
 prepared by: SiVEST Environmental

 Proposed Xha! Boom Wind Farm - Final Scoping Report
 prepared by: SiVEST Environmental

AVIFAUNA				
	Eagles or Martial Eagles a	Eagles or Martial Eagles are regularly killed, the regional		
	impact could be significan	impact could be significant (see also Section 10 below).		
	However, the low reporting	rate for priority species makes		
	this an unlikely scenario.			
Intensity/magnitude	Medium. The power lines	could cause mortality of some		
	priority species.			
Significance Rating	Medium significance.			
	Pre-mitigation impact			
	rating	Post mitigation impact rating		
Extent	2	2		
Probability	2	1		
Reversibility	1	1		
Irreplaceable loss	3	3		
Duration	3	3		
Cumulative effect	3	1		
Intensity/magnitude	3	1		
Significance rating	-42 (medium negative)	-11 (low negative)		
	The avifaunal specialist	The avifaunal specialist must approve the power line		
	design to ensure that bird-f	design to ensure that bird-friendly structures are used.		
Mitigation measures				

The following impacts associated with the proposed Xha! Boom Wind Farm can be listed as:

- Impacts associated with displacement of priority avifauna due to disturbance during the construction phase;
- Impacts associated with the displacement of priority species due to habitat destruction during the construction phase;
- Impacts associated with the Avifauna displacement of priority species due to disturbance during the operational phase;
- Impacts associated with collisions of priority species with the turbines in the operational phase; and
- Impacts associated with mortality of priority species due to electrocution on the internal MV lines in the operational phase.

6.2.3 Bat Impacts

The following potential impacts have been identified for the proposed wind farm development and will be further investigated in the EIA phase of the bat assessment.

Construction Phase

Table 42: Impacts on destruction of bats roots due to earthworks and blasting

	BATS		
Environmental Parameter	Bat populations will be impacted upon through earthworks and		
	blasting close to bat roosts.		
Issue/Impact/Environmental	Earthworks and blasting close to bat roosts will negatively affect		
Effect/Nature	bat populations through high mortality, which in effect will cause		
	a decrease in bat population n	umbers.	
Extent	If bat roosts are found to be w	ithin the site, blasting will have a	
	negative effect on the bat popu	lations in the local area.	
Probability	There is a probable chance of	the impact occurring.	
Reversibility	Blasting occurring at bat roos	Blasting occurring at bat roosts will cause damage to the bat	
	population in the area. Depen	ding on the extent, the impact is	
	reversible however, recovery	of the roost numbers would take	
	place over several generations	and many years.	
Irreplaceable loss of resources	•	urs close to a bat roost, it will be	
	destroyed and lost.		
Duration		ation, as blasting and earthworks	
	will only occur during construct	•	
Cumulative effect		ction of the bat roosts impact the	
		area which in effect may impact	
	the insect numbers.		
Intensity/magnitude	Blasting of bat roosts will cause mortality to the bats inhabiting		
	the roosts, and will negatively impact the population and system.		
Significance Rating	The anticipated impact will have significant effects and will		
	require significant mitigation measures to achieve an acceptable		
	level of impact.		
	1		
	Pre-mitigation impact rating	Post mitigation impact rating	
Extent	2	1	
Probability	3	1	
Reversibility	4	2	
Irreplaceable loss	4	2	
Duration	1	1	
Cumulative effect	3	1	
Intensity/magnitude	4	2	
Significance rating	- 68 (high negative)	- 16 (low negative)	
Mitigation measures	Adhere to the sensitivity map during turbine placement. Blasting		
	should be minimised and used only when necessary. A Bat		
	Specialist should be consulted before blasting of a rocky cliff face		
	or rocky cavernous area. The mitigation measures will reduce		
	the impact blasting and earthworks will have on the		
	environmental parameter, through	ugh avoiding sensitive areas.	

Table 43: Impacts on loss of foraging habitat

BATS			
Environmental Parameter	Loss of foraging habitat within the site boundaries.		
Issue/Impact/Environmental	Loss of foraging habitat. Some minimal foraging habitat will be		
Effect/Nature	permanently lost by construction of turbines and access roads.		
	Temporary foraging habitat loss will occur during construction		
	due to storage areas and move	•	
Extent		contained within the boundaries	
	of the development site.		
Probability	The impact will definitely occur.		
Reversibility		itat loss, it will be partly reversed	
	-	s, especially in more sensitive	
	areas. Minimal foraging habitat		
Irreplaceable loss of	•	emoved for roads and turbines,	
resources	there will be a loss of habitat rea		
Duration		ation, past the operational phase	
	of the development.		
Cumulative effect	,	tat will cause a decrease in the	
	number of bat numbers and	insect numbers within the site	
	boundaries.		
Intensity/magnitude	Removal of foraging grounds may negatively impact the		
		st likely on a small scale since	
	foraging distances are usually large for insectivorous bat		
	species.		
Significance Rating	The anticipated impact will have moderate negative effects and		
	will require moderate mitigation	measures.	
	Pre-mitigation impact rating	Post mitigation impact rating	
Extent	1	1	
Probability	3	1	
Reversibility	3	1	
Irreplaceable loss	3	2	
Duration	3	2	
Cumulative effect	2	1	
Intensity/magnitude	2	1	
Significance rating	- 30 (medium negative)	- 8 (low negative)	
	Adhere to the sensitivity map. Keep to designated areas when		
	storing building materials, resources, turbine components and/or		
	construction vehicles and keep to designated roads with all		
	construction vehicles. Damaged areas not required after		
	construction should be rehabilitated by an experienced		
	vegetation succession specialist. The mitigation measures will		
Mitigation measures	reduce the degree of habitat loss.		

Operational Phase

Table 44: Impacts of bat mortalities due to direct blade impact or barotrauma during foraging activities (not migration)

	BATS		
Environmental Parameter	Impact on bat population numbers.		
Issue/Impact/Environmental	Bat mortalities due to direct blade impact or barotrauma during		
Effect/Nature	foraging activities (not migration	foraging activities (not migration). If the impact is too severe (e.g.	
	in the case of no mitigation) local bat populations may not		
	recover from mortalities.		
Extent	The impact will be contained	d within the boundaries of the	
	development site.		
Probability	There is a definite chance of th	e impact occurring.	
Reversibility	The impact will occur througho	ut the lifespan of the wind facility.	
	Population numbers may take	very long to recover. Population	
	and diversity genetics may be	permanently altered.	
Irreplaceable loss of	Bat population numbers will de	crease in the area.	
resources			
Duration		ation, past the operational phase	
	of the development. It will take	e some time for the population to	
	achieve its previous numbers a	after the impact is removed.	
Cumulative effect	•	bat numbers will in effect cause	
	an increase in the number of ir	nsects in the area which changes	
	the system of the area.		
Intensity/magnitude	Very high intensity impact on the bat population numbers in the		
	area.		
Significance Rating	The anticipated impact will have highly significant effects and are		
	unlikely to be able to be mitigation	ated adequately. These impacts	
	could be considered "fatal flaw	s".	
	-		
	Pre-mitigation impact rating	Post mitigation impact rating	
Extent	1	1	
Probability	4	2	
Reversibility	4	2	
Irreplaceable loss	3	2	
Duration	3	3	
Cumulative effect	4	3	
Intensity/magnitude	4	2	
Significance rating	- 76 (very high negative) - 26 (low negative)		
	Adhere to the sensitivity maps, avoid areas of high bat sensitivity		
	and their buffers as well as preferably avoid areas of Moderate		
	bat sensitivity and their buffers. Adhere to operational mitigation		
Mitigation measures	measures described in Section 7 of this report. An operational		

BATS		
	phase bat monitoring study must be implemented as soon as the	
facility has been constructed.		

Table 45: Impacts	of artificial lighting
-------------------	------------------------

BATS			
Environmental Parameter	Impact on bat populations and diversity.		
Issue/Impact/Environmental	During operation, strong artificial lights that may be used at the		
Effect/Nature	turbine base or immediate surro	ounding infrastructure will attract	
	insects and thereby also bats. 1	This will significantly increase the	
	-	foraging around such lights.	
		cies of bats will readily forage	
		others avoid such lights even if	
		hich can draw insect prey away	
		ereby artificially favor only certain	
	species.		
Extent		ed within the boundaries of the	
	development site.		
Probability	There is a probable chance of the		
Reversibility		al phase, the artificial lighting will	
	-	at species won't be favoured in	
	the area.		
Irreplaceable loss of	No		
resources			
Duration	The impact will be of a long-term duration, the lifespan of the		
Cumulative effect	development. It will take some time to reverse the impact. During operational phase, strong artificial lights used at the work		
Cumulative enect		will attract insects and thereby	
		ain species of bats will readily	
		hereas others avoid such lights	
		lable. This can draw insect prey	
		s and thereby artificially favour	
	certain species, affecting bat div		
Intensity/magnitude		I change the diversity of the bat	
	species in the area. This will ne	•	
Significance Rating	The anticipated impact will have moderate negative effects and		
	will require moderate mitigation measures.		
	Pre-mitigation impact rating Post mitigation impact rating		
Extent	1 1		
Probability	4	1	
Reversibility	2	1	
Irreplaceable loss	2 1		
	l		

SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD Proposed Xha! Boom Wind Farm - Final Scoping Report Version No: 1

BATS		
Duration	3	2
Cumulative effect	3	2
Intensity/magnitude	2	1
Significance rating	- 30 (medium negative)	- 8 (low negative)
	Utilize lights with wavelengths that attract less insects (low thermal/infrared signature). If not required for safety or security purposes, lights should be switched off when not in use or equipped with passive motion sensors. The mitigation measures	
Mitigation measures	will reduce the likelihood of certain bat species being favored.	

Decommissioning phase

Table 46: Impacts of loss of foraging habitat

BATS			
Environmental Parameter	Loss of foraging habitat within the site boundaries.		
Issue/Impact/Environmental		minimal foraging habitat will be	
Effect/Nature	permanently lost by decommiss	ioning of the facility.	
Extent	Loss of foraging habitat will be contained within the boundaries of the facility site.		
Probability	There is a probable chance of the terms of terms o	he impact occurring.	
Reversibility	Depending on the degree of hat	oitat loss, it will be partly reversed	
	with some mitigation measure	s, especially in more sensitive	
	areas.		
Irreplaceable loss of	In areas where vegetation is r	emoved there will be a loss of	
resources	habitat resources.		
Duration	The impact will be of a long duration		
Cumulative effect	Low effect, as the removal of habitat will cause a decrease in the		
	number of bat numbers and insect numbers within the site		
	boundaries.		
Intensity/magnitude	Removal of foraging grounds may negatively impact the		
	population and system, but mo	ost likely on a small scale since	
	foraging distances are usual	ly large for insectivorous bat	
	species.		
Significance Rating	The anticipated impact will have moderate negative effects and		
	will require moderate mitigation measures.		
	•		
	Pre-mitigation impact rating	Post mitigation impact rating	
Extent	1	1	
Probability	3	1	
Reversibility	3	1	

SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD Proposed Xha! Boom Wind Farm - Final Scoping Report Version No: 1 04 August 2017

BATS		
Irreplaceable loss	3	2
Duration	3	2
Cumulative effect	2	1
Intensity/magnitude	2	1
Significance rating	- 30 (medium negative)	- 8 (low negative)
	 - 30 (medium negative) - 8 (low negative) Adhere to the sensitivity map. Keep to designated areas when storing building materials, resources, turbine components and/or large vehicles and keep to designated roads with all large vehicles. Damaged areas not required after decommissioning should be rehabilitated by an experienced vegetation succession specialist. The mitigation measures will reduce the degree of 	
Mitigation measures	habitat loss.	

The following impacts associated with the proposed Xha! Boom Wind Farm can be listed as:

- Impacts on destruction of bats roots due to earthworks and blasting during the construction phase;
- Impacts on loss of foraging habitat during the construction phase;
- Impacts of bat mortalities due to direct blade impact or barotrauma during foraging activities (not migration) in the operational phase;
- Impacts of artificial lighting during the operational phase; and
- Impacts of loss of foraging habitat during the decommissioning phase.

6.2.4 Surface Water Impacts

The following potential impacts have been identified for the proposed wind farm development and will be further investigated in the EIA phase of the surface water assessment.

Pre- construction Phase

A construction lay-down area is likely to be required for the proposed development. The location of the construction lay-down area will be important as placing this area in a wetland or any other surface water resource is likely to result in direct negative physical impacts. Direct negative impacts can include vegetation clearing and degradation, and soil compaction impacts due to temporary structures and vehicle movement. Impacts related to worker ingress and the degradation of wetlands or any other surface water resource may similarly result. Potential contamination and pollution impacts from stored oils, fuels, and other hazardous substances or materials are also a possibility. Where site clearing may be required in the wetland or any other surface water resource in order for the lay-down area to be established, this will result in the clearance/removal of vegetation at the surface leaving the exposed soils of the wetland(s) or surface water resource vulnerable to erosion and sedimentation impacts. Indirect impacts can also be anticipated in the form of sedimentation and increased run-off which can induce erosion, should the location of the construction lay-down area be within close proximity (32m) to the wetlands and / or watercourses.

Table 47: Impacts associated with the Construction Lay-down Area directly in or in close proximity to
Surface Water Resources

SURFACE WATER			
Environmental Parameter	Depression wetlands and drainage lines		
Issue/Impact/Environmental Effect/Nature	Impacts associated with the construction lay-down		
	area directly in or within close proximity to surface		
	water resources		
Extent	Site		
Probability	Probable		
Reversibility	Partly reversible		
Irreplaceable loss of resources	Marginal loss of resources		
Duration	Medium term		
Cumulative effect	Low cumulative Impact		
Intensity/magnitude	High		
Significance Rating	Pre-mitigation significance	rating is low and negative.	
	With appropriate mitigation measures, the potential		
	impact can be reduced greatly.		
	Pre-mitigation impact	Post mitigation impact	
	rating	rating	
Extent	3	1	
Probability	2	1	
Reversibility	2	1	
Irreplaceable loss	2	1	
Duration	2	1	
Cumulative effect	2	1	
Intensity/magnitude	3	1	
Significance rating	-36 (medium negative)	- 6 (low negative)	
	Location of the Lay-dow	n Area – The location of	
	the lay-down area must not be within 50m of any of		
	the identified surface water resources. Therefore, the		
	location of the construction lay-down area must not		
	be within any of the associated buffer zones by		
	implication. Additionally, the storage of materials and		
	machinery must also not be within 50m of any of the		
Mitigation measures	identified surface water resources.		

Construction Phase

Construction vehicles (heavy and light) are likely to require access to the proposed development. Potential negative impacts can include the need to travel into or through surface water resources, thereby resulting in physical degradation. Moreover, leaks or spills of oils, fluids and/or fuels from vehicles and machinery in general, or during re-fuelling, or servicing in the surface water resources, are a possibility. Should any leakage or spillage occur in and / or near the surface water resources, potential

soil / water contamination can result. Fuels and oils also pose a fire risk not only to the surface water resources, but also neighbouring areas.

Table 48: Impact Rating for Construction Vehicle and Machinery Degradation Impacts to Surface Water
Resources

SUR	RFACE WATER	
Environmental Parameter	Depression wetlands and drainage lines	
Issue/Impact/Environmental Effect/Nature	Vehicle and machinery degradation to surface water resources	
Extent	Site	
Probability	Probable	
Reversibility	Partly reversible	
Irreplaceable loss of resources	Marginal loss of resources	
Duration	Medium term	
Cumulative effect	Medium cumulative Impact	t
Intensity/magnitude	High	
Significance Rating	Pre-mitigation significance	rating is low and negative.
	With appropriate mitigation	measures, the impact can
	be reduced further slightly.	
	Pre-mitigation impact	Post mitigation impact
	rating	rating
Extent	1	1
Probability	3	3
Reversibility	2	2
Irreplaceable loss	2	2
Duration	2	2
Cumulative effect	3	2
Intensity/magnitude	3	3
Significance rating	- 39 (medium negative)	- 36 (medium negative)
	Preventing Physical D	-
	Water Resources – Surfa	
	be designated as "highly	
	access is not to be allowed in the highly sensitive areas. Internal access roads are not to be routed in any surface water resources. Should this be required,	
	environmental authorisation and a water use license	
	will be required before construction takes place and	
	all mitigation measures are to be implemented accordingly.	
	Limiting Damage to Surface Water Resources -	
	Ideally, to minimise any impact to surface water	
Mitigation measures	resources, the proposed development (including	

buildings, wind turbines and all associated infrastructure) should seek to avoid all surface water resources as far as possible.

Where this is not possible a single access route or "Right of Way" (RoW) is to be established through or in the desired construction area in the surface water resource(s). The environmentally authorized and license permitted construction area is to be demarcated and made visible. The establishment of the RoW likewise must be demarcated and made visible. The width of the RoW must be limited to the width of the vehicles required to enter the surface water resource (no more than a 3m width). An area around the locations of the proposed development buildings, wind turbines and any other associated infrastructure will be required in order for construction vehicles and machinery to operate/manoeuvre, only where required. This too must be limited to the smallest possible area and made visible by means of demarcation.

Where crossings are required, only vehicle tracks should be made through the surface water resources. No crossings however are to be made through the natural depression wetlands. RoW areas through surface water resources should not be completely cleared of vegetation, only the tracks should be cleared. Vegetation should otherwise be trimmed appropriately such that vehicles can move through RoW areas adequately. No structures will need to be placed in the RoW crossing areas through surface water resources since these systems are ephemeral. No bog mats or gravel running tracks would therefore be required. No surface water resources are to be crossed during or directly after a rainfall event.

Construction workers are only allowed in the designated construction areas of the proposed development and not into the surrounding surface water resources. Highly sensitive areas are to be clearly demarcated prior to the commencement of construction and no access beyond these areas is to be allowed unless in RoW areas.

Preventing Soil Contamination – No vehicles are
to be allowed in the highly sensitive areas unless authorised. Should vehicles be authorized in highly sensitive areas, all vehicles and machinery are to be checked for oil, fuel or any other fluid leaks before entering the required construction areas. Should there be any oil, fuel or any other fluid leaks, vehicles are not to be allowed into surface water resources.
All vehicles and machinery must be regularly serviced and maintained before being allowed to enter the construction areas. No fuelling, re-fuelling, vehicle and machinery servicing or maintenance is to take place in the highly sensitive areas.
Sufficient spill contingency measures must be available throughout the construction process. These include, but are not limited to, oil spill kits to be available, fire extinguishers, fuel, oil or hazardous substances storage areas must be bunded to prevent oil or fuel contamination of the ground and/or nearby surface water resources.

The possibility of human degradation to the surface water resources is unlikely to occur during the construction phase, since construction activities are not likely to take place in close proximity to surface water resources given the limited number of surface water resources identified. Nonetheless, human degradation there is a small chance of this impact occurring which could take place in the form of physical / direct degradation such as lighting fires (purposefully or accidentally) in or near to surface water resources. Usage of the surface water resources for sanitation purposes may take place resulting in pollution of the surface water resources. The surface water resources may also be utilised as a source of water for domestic use, building and general cleaning purposes.

Fauna and avi-fauna associated with surface water resources are often hunted, trapped, killed or eaten. This impact must be prevented. Finally, flora associated with surface water resources may need to be cleared or removed for building storage purposes which can result in a loss of resources.

Table 49: Impact Rating for Human Degradation of Flora and Fauna associated with Surface Water

 Resources

SURFACE WATER		
Environmental Parameter	Depression wetlands and drainage lines	
Issue/Impact/Environmental Effect/Nature	Human degradation to fauna and flora associated with surface water resources	
Extent	Site	
Probability	Probable	

 SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD
 prepared by: SiVEST Environmental

 Proposed Xha! Boom Wind Farm - Final Scoping Report
 prepared by: SiVEST Environmental

Reversibility	Completely reversible	
Irreplaceable loss of resources	Marginal loss of resources	
Duration	Short term	
Cumulative effect	Low cumulative impact	
Intensity/magnitude	Medium	
Significance Rating	Pre-mitigation significance rating is low and negative.	
	With appropriate mitigation	measures, the impact can
	be further reduced to a low	/ impact.
	Pre-mitigation impact	Post mitigation impact
	rating	rating
Extent	1	1
Probability	3	2
Reversibility	1	1
Irreplaceable loss	2	1
Duration	1	1
Cumulative effect	2	1
Intensity/magnitude	3	2
Significance rating	-30 (medium negative)	- 14 (low negative)
	Minimising Human Physical Degradation of	
	Sensitive Areas - Cons	truction workers are only
	allowed in designated cor	struction and RoW areas
	where the environmenta	l authorisation and the
	relevant water use license	e is obtained where and if
	required. The highly sensitive areas are to be clearly	
	demarcated no access into these areas are to be	
	allowed unless authorised.	
	No animals on the construction site or surrounding	
	areas are to be hunted, ca	ptured, trapped, removed,
	injured, killed or eaten by c	
	other project team memb	ers. Should any party be
	found guilty of such an of	• • •
	should be imposed. The	
	Control Officer (ECO) or s	•••
	. ,	• •
	may only remove animals, where such animals (including snakes, scorpions, spiders etc.) are a threat to construction workers. The ECO or appointed individual is therefore to be contacted should removal of any fauna be required during the construction phase. Animals that cause a threat and need to be removed may not be killed. Additionally, these animals are to be relocated outside the RoW, within	
	relative close proximity wh	
Mitigation measures		

No "long drop" toilets are allowed on the study site. Suitable temporary chemical sanitation facilities are to be provided. Temporary chemical sanitation facilities must be placed at least 100 meters from any surface water resource(s) where required. Temporary chemical sanitation facilities must be checked regularly for maintenance purposes and cleaned often to prevent spills.
No water is to be abstracted unless a water use license is granted for specific quantities for a specific water resource.
No hazardous or building materials are to be stored or brought into the highly sensitive areas. Should a designated storage area be required, the storage area must be placed at the furthest location from the highly sensitive areas. Appropriate safety measures as stipulated above must be implemented.
No cement mixing is to take place in a surface water resource. In general, any cement mixing should take place over a bin lined (impermeable) surface or alternatively in the load bin of a vehicle to prevent the mixing of cement with the ground. Importantly, no mixing of cement directly on the surface is allowed in the highly sensitive areas.

It may be required that wind turbines, associated buildings and infrastructure are to be located within the identified surface water resources. As a result, foundations and hard stand areas will need to be laid for the wind turbines. Additionally, foundations will need to be established for the various buildings, structures and infrastructure. Where the placement of the foundations and hard stand areas extend into the surface water resource areas, the excavation of potential soils are likely to affect the functionality of these hydrological systems. Functionality may be affected in terms of hydrogeomorphic functionality. Moreover, the implementation of the foundations will result in a relatively permanent structure, meaning that the area occupied by the foundation will ultimately result in a degree of permanent habitat and soil loss.

Table 50: Impact Rating for Degradation and Removal of Vegetation and Soils associated with Surface

 Water Resources

SURFACE WATER		
Environmental Parameter	Depression wetlands and drainage lines	
Issue/Impact/Environmental Effect/Nature	Degradation and removal of soils and vegetation	
	associated with surface water resources	

SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD Proposed Xha! Boom Wind Farm - Final Scoping Report Version No: 1 04 August 2017

Possible			
8 1 11			
Barely reversible	Barely reversible		
Marginal loss of resources	Marginal loss of resources		
Long term			
Medium cumulative Impac	t		
Very High			
negative. With appropriate impact can be reduced to impact	Pre-mitigation significance rating is medium and negative. With appropriate mitigation measures, the impact can be reduced to a low impact to a medium impact		
• •	Post mitigation impact		
rating	rating		
1	1		
	3		
	3		
	2		
	3		
	2		
4	3		
	- 42 (medium negative)		
 and other Linear Infrastructure – Preferably all wind turbines, buildings and infrastructure should be placed at least 50m from any surface water resource as far as practically possible. This will significantly reduce the potential impact on surface water resources. Where this is not possible, more intense mitigation measures will be required as stipulated below. Obtaining Relevant Authorisations and Licenses – Before any construction or removal of soils and vegetation in any delineated surface water resources is undertaken, the relevant water use license and environmental authorisation is to be obtained and conditions adhered to. Limiting Damage to Surface Water Resources – Construction must be limited to the authorized RoW areas where applicable. Limiting Removal of Excavated Soils – Should the necessary authorisations (water use license, provide authorisations (water use license) 			
			Long term Medium cumulative Impact Very High Pre-mitigation significance negative. With appropriate impact can be reduced to impact Pre-mitigation impact rating 1 3 2 3 4 -60 (High negative) Strategic Positioning of V and other Linear Infrast wind turbines, buildings and placed at least 50m from a as far as practically possite reduce the potential impression resources. Where this is remitigation measures will below. Obtaining Relevant Authon - Before any construction vegetation in any delineated is undertaken, the relevant environmental authorisation conditions adhered to. Limiting Damage to Surf Construction must be limit areas where applicable.

proposed development to be placed in surface water resources, excavated topsoils should be stockpiled separately from subsoils so that it can be replaced in the correct order for rehabilitation purposes postconstruction. Soils removed from surface water resources must only be removed if absolutely required. Furthermore, any removed soils and vegetation that are not required should be taken to a registered landfill site that has sufficient capacity to assimilate the spoil. The topsoil is to be used for rehabilitation purposes and should not be removed unless there is surplus that cannot be utilised. It is important that when the soils are re-instated, the subsoils are to be backfilled first followed by the topsoil. The topsoil contains the natural seedbank from which the affected surface water resources or the associated buffer zone can naturally rehabilitate.

Where the soils are excavated from the sensitive areas, it is preferable for them to be stockpiled adjacent to the excavation pit to limit vehicle and any other movement activities around the excavation areas.

Preventing Pollution Impacts – Any cement mixing should take place over a bin lined (impermeable) surface or alternatively in the load bin of a vehicle to prevent the mixing of cement with the ground of the surface water resource. Importantly, no mixing of cement directly on the surface is allowed in the construction and RoW areas in surface water resources.

Protection of Stockpiled Soils – Stockpiled soils will need to be protected from wind and water erosion. Stockpiled soils are not to exceed a 3m height and are to be bunded by suitable materials. Stacked bricks surrounding the stockpiled soils can be adopted. Alternatively, wooden planks pegged around the stockpiled soils can be used.

Rehabilitation of RoW Areas – Ideally, the affected RoW zones in the sensitive areas must be re-instated with the soils removed from the surface water resource(s), and the affected areas must be levelled, or appropriately sloped and scarified to loosen the

04 August 2017

soil and allow seeds contained in the natural seed
bank to re-establish. However, given the aridity of the
study area, it is likely that vegetation recovery will be
slow. Rehabilitation areas will need to be monitored
for erosion until vegetation can re-establish where
prevalent. If affected areas are dry and no vegetation
is present, the soil is to be re-instated and sloped.

Vegetation clearing will need to take place for the construction process. Excessive or complete vegetation clearance in the highly sensitive and nearby surrounding areas is likely to result in exposing the soil, leaving the ground susceptible to wind and water erosion particularly during and after rainfall events. Due to the climate of the study area (generally arid with sudden sporadic rainfall) general soil erosion, as a consequence of the proposed development, is a distinct possibility. A further impact due to erosion and storm water run-off impacts is increased sedimentation to surface water resources. Deposited sediments can smother vegetation and change flow paths and dynamics making affected areas susceptible to alien plant invasion leading to further degradation.

SURFACE WATER		
Environmental Parameter	Surface water resources	
Issue/Impact/Environmental Effect/Nature	Increased storm water run-off, erosion and increased	
	sedimentation impacting of	n surface water resources
Extent	Site	
Probability	Definite	
Reversibility	Partly reversible	
Irreplaceable loss of resources	Marginal loss of resources	
Duration	Medium term	
Cumulative effect	Medium cumulative impact	
Intensity/magnitude	Very high	
Significance Rating	Pre-mitigation significance rating is medium and	
	negative. With appropriate mitigation measures, the	
	impact can be reduced to a low level to a medium	
	level.	
	Pre-mitigation impact	Post mitigation impact
	rating	rating
Extent	1	1
Probability	4	3
Reversibility	2	2
Irreplaceable loss	2	2
Duration	2	2
Cumulative effect	3	3
Intensity/magnitude	4	3
Significance rating	- 56 (high negative)	- 39 (medium negative)

Table 51: Impact Rating for Increased Storm Water Run-off, Erosion and Sedimentation Impacts

SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD Proposed Xha! Boom Wind Farm - Final Scoping Report Version No: 1 04 August 2017

	Preventing Increased Run-off and Sedimentation Impacts – Vegetation clearing should take place in a phased manner, only clearing areas that will be constructed on immediately. Vegetation clearing
	must not take place in areas where construction will only take place in the distant future.
	An appropriate storm water management plan formulated by a suitably qualified professional must accompany the proposed development to deal with increased run-off in the designated construction areas.
	In general, adequate structures must be put into place (temporary or permanent where necessary in extreme cases) to deal with increased/accelerated run-off and sediment volumes. The use of silt fencing and potentially sandbags or hessian "sausage" nets can be used to prevent erosion in susceptible construction areas. Grass blocks on the perimeter of the wind turbine hard stand areas and building structure footprints can also be used to reduce run- off and onset of erosion. Where required more permanent structures such as attenuation ponds and gabions can be constructed if needs be, however this is unlikely given the study area. All impacted areas
Mitigation measures	are to be adequately sloped to prevent the onset of erosion.

Operational Phase

Vehicle access may be required to construction areas for the wind turbines, structures, buildings and infrastructure (such as roads, cables and power lines) in and / or through and / or over (spanning) surface water resources. It is therefore important that access routes and service roads to wind turbines, structures, buildings and infrastructure are not planned and constructed within surface water resources as far as practically possible. However, where this is required and the relevant environmental authorization and water use license is obtained, access routes and service roads for vehicles in or through surface water resources may be susceptible to soil compaction and consequent erosion impacts. Regular vehicle movement in surface water resources can compact the soil affecting the hydrology of the surface water resources. Similarly, regular movement from vehicles can flatten the ground surface making it a preferential flow path for storm water and thereby becoming susceptible to accelerated run-off which may result in progressive erosion. Compaction from vehicles can also create incisions which may induce donga erosion over time

 Table 52: Impact of Vehicle Damage to Surface Water Resources

SURFACE WATER

Environmental Parameter	Depression wetlands and drainage lines		
Issue/Impact/Environmental Effect/Nature	Vehicle compaction damage to surface water resources		
Extent	Local		
Probability	Define		
Reversibility	Partly reversible		
Irreplaceable loss of resources	Marginal loss of resources		
Duration	Long term		
Cumulative effect	Medium cumulative impact	<u> </u>	
Intensity/magnitude	Very high		
Significance Rating	Pre-mitigation significance	e rating is medium and	
	negative. With appropriate	mitigation measures, the	
	impact can be reduced to a	a low negative impact to a	
	medium negative impact.		
	Pre-mitigation impact	Post mitigation impact	
	rating	rating	
Extent	2	2	
Probability	4	3	
Reversibility	2	2	
Irreplaceable loss	2	2	
Duration	3	3	
Cumulative effect	3	2	
Intensity/magnitude	4	3	
Significance rating	- 64 (high negative)	-42 (medium negative)	
	 Minimising Vehicle Damage to the Surface Water Resources – Potential impacts can be avoided by planning and routing of access / service roads outside of and away from all surface water resources and the associated buffer zones. Where access through surface water resources are unavoidable and are absolutely required, it is recommended that any road plan and associated structures (such as stormwater flow pipes, culverts, culvert bridges etc.) be submitted to the relevant environmental and water departments for approval prior to construction. Internal access and services roads authorised in sensitive areas will have to be regularly monitored and checked for erosion. Monitoring should be conducted once every month. Moreover, after short or long periods of heavy rainfall or after long periods of sustained rainfall the roads will need to be checked 		
Mitigation measures			

for erosion. Rehabilitation measures will need to be employed should erosion be identified.
Where erosion begins to take place, this must be dealt with immediately to prevent significant erosion damage to the surface water resources. Should large scale erosion occur, a rehabilitation plan will be required. Input, reporting and recommendations from a suitably qualified wetland / aquatic specialist must be obtained in this respect should this be required.

The impact of stormwater run-off is primarily related to the types of structures and surfaces that will need to be established for the proposed development. Hard impermeable surfaces and foundations are to be laid for wind turbines, buildings and associated infrastructure. Additionally, where regular movement from vehicles flatten the ground surface making it a preferential flow path for storm water, sediment transportation from hardened gravel surfaces via run-off for internal access and service roads can result in increased sedimentation. In general, flat and hard surfaces aid with the acceleration and generation of run-off which can impact on nearby surface water resources through the onset of erosion, as well as by means of increased sedimentation.

SURFACE WATER			
Environmental Parameter	Depression wetlands and drainage lines		
Issue/Impact/Environmental Effect/Nature	Impermeable and hardene	° °	
	accelerated and increased	run-off, consequent	
	erosion and increased sed	imentation	
Extent	Local		
Probability	Definite		
Reversibility	Partly reversible		
Irreplaceable loss of resources	Marginal loss of resource		
Duration	Long term		
Cumulative effect	Medium cumulative impact		
Intensity/magnitude	very high		
Significance Rating	Pre-mitigation significance rating is medium and		
	negative. With appropriate mitigation measures, the		
	impact can be reduced to a moderate level.		
	Pre-mitigation impact Post mitigation imp		
	rating	rating	
Extent	1 2	1 2	
Probability	3 4	2 3	
Reversibility	2	2	
Irreplaceable loss	2	2	
Duration	3	3	
Cumulative effect	3	1 3	

Table 53: Storm-water Run-off Impacts to Surface Water Resources

SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD Proposed Xha! Boom Wind Farm - Final Scoping Report Version No: 1

Intensity/magnitude	3 4	1 3		
Significance rating	- 64 (high negative)	- 45 (medium negative)		
	Any hardstand area or bui	Iding within 50m proximity		
	to a surface water reso	ource must have energy		
	dissipating structures in a			
	prevent increased run-off	entering adjacent areas or		
	surface water resources. This can be in the form of			
	hard concrete structures or soft engineering			
	structures (such as grass blocks for example).			
	Alternatively, a suitable operational storm water			
	management plan can be compiled and implemented			
	that accounts for the use of appropriate alternative			
	structures or devices that will prevent increased run-			
	off and sediment entering adjacent areas or surface			
	water resources, thereby also preventing erosion.			
	This must be submitted to the relevant environmental			
Mitigation measures	and water authority for app	roval, if undertaken.		

Decommissioning Phase

Should the proposed development need to be decommissioned, the same impacts as identified for the construction phase of the proposed development can be anticipated. Similar impacts are therefore expected to occur and the stipulated mitigation measures where relevant and appropriate must be employed as appropriate to minimise impacts.

The following impacts associated with the proposed Xha! Boom Wind Farm can be listed as:

- Impacts associated with the Construction Lay-down Area directly in or in close proximity to Surface Water Resources during the pre-construction phase;
- Construction Vehicle and Machinery Degradation Impacts to Surface Water Resources during the construction phase;
- Human Degradation of Flora and Fauna associated with Surface Water Resources during the construction phase;
- Degradation and Removal of Vegetation and Soils associated with Surface Water Resources during the construction phase;
- Increased Storm Water Run-off, Erosion and Sedimentation Impacts during the construction phase;
- Impact of Vehicle Damage to Surface Water Resources during the operational phase; and
- Storm-water Run-off Impacts to Surface Water Resources during the operational phase.

As mentioned above, should the proposed development need to be decommissioned, the same impacts as identified for the construction phase of the proposed development can be anticipated.

6.2.5 Soils and Agricultural Potential Impacts

The following potential impacts have been identified for the proposed wind power facility development and will be further investigated in the EIA phase of the soils and agricultural potential assessment.

LOSS OF AGRICULTURAL LAND USE				
Environmental Parameter	Agricultural land (grazing)			
Impact	Loss of agricultural land use, caused by direct occupation of land			
	by footprint of development infrastructure and having the effect			
	of taking affected portions of land out of agricultural production			
	(grazing). This applies to the direct footprint of the development			
	which comprises the turbine for	oundations, hard standing areas,		
	roads and the footprint of othe	er infrastructure. This represents		
	only a small proportion of the	e land surface area. During the		
	construction phase there is so	mewhat more disturbance due to		
	temporary lay down areas.			
Extent (E)	Site			
Probability (P)	Definite			
Reversibility (R)	Partly reversible	Partly reversible		
Irreplaceable loss of resources (I)	Marainal			
	Marginal			
Duration (D)	Long term			
Cumulative effect (C)	Low			
Intensity/magnitude (M)	Low			
Significance Rating	Low negative.			
	Pre-mitigation impact rating Post mitigation impact rating			
Extent	1 n/a			
Probability	4 n/a			
Reversibility	2 n/a			
Irreplaceable loss	2 n/a			
Duration	3 n/a			
Cumulative effect	2 n/a			
Intensity/magnitude	1 n/a			
Significance rating	-14 (low negative) n/a			
Mitigation measures	None Possible			

Table 54: Summary of Loss of agricultural land use

 Table 55:
 Summary of Generation of additional land use income impacts

GENERATION OF ADDITIONAL LAND USE INCOME				
Environmental Parameter	Farm economic sustainability			
Impact	Generation of additional land use income through rental to energy facility. This is a positive impact for agriculture. It will provide the farming enterprises on site with increased cash flow and rural livelihood, and thereby improve their financial sustainability.			
Extent (E)	Site			
Probability (P)	Definite			
Reversibility (R)	Completely reversible			
Irreplaceable loss of resources (I)	No Loss			
Duration (D)	Long term			
Cumulative effect (C)	Negligible			
Intensity/magnitude (M)	Low			
Significance Rating	Low positive			
	Pre-mitigation impact rating	Post mitigation impact rating		
Extent	1	n/a		
Probability	4 n/a			
Reversibility	1 n/a			
Irreplaceable loss	1 n/a			
Duration	3 n/a			
Cumulative effect	1 n/a			
Intensity/magnitude	1 n/a			
Significance rating	11 (low positive) n/a			
Mitigation measures	None possible			

EROSION DUE TO ALTERATIO	ON OF THE LAND SURFACE RUN-OFF CHARACTERISTICS
Environmental Parameter	Soil
Impact	Erosion due to alteration of the land surface run-off characteristics. Alteration of run-off characteristics may be caused by construction related land surface disturbance, vegetation removal, and the establishment of hard standing areas and roads. Erosion will cause loss and deterioration of soil resources. Risk of water erosion is low, but the area is susceptible to wind erosion.
Extent (E)	Site
Probability (P)	Probable

SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD Proposed Xha! Boom Wind Farm - Final Scoping Report Version No: 1

EROSION DUE TO ALTERATIO	ON OF THE LAND SURFACE R	UN-OFF CHARACTERISTICS	
Reversibility (R)	Partly reversible		
Irreplaceable loss of resources (I)	Marginal		
Duration (D)	Long term		
Cumulative effect (C)	Negligible		
Intensity/magnitude (M)	Medium		
Significance Rating	Low negative		
	Pre-mitigation impact rating	Post mitigation impact rating	
Extent	1	1	
Probability	3	2	
Reversibility	2	2	
Irreplaceable loss	2	2	
Duration	3	3	
Cumulative effect	1	1	
Intensity/magnitude	2	1	
Significance rating	- 24 (low negative)	-11 (low negative)	
Mitigation measures	 Implement an effective system of run-off control, where it is required, that collects and safely disseminates run-off water from all hardened surfaces and prevents potential down slope erosion. Any occurrences of erosion must be attended to immediately and the integrity of the erosion control system at that point must be amended to prevent further erosion from occurring there. This should be in place and maintained during all phases of the development. Maintain where possible all vegetation cover and facilitate re-vegetation of denuded areas throughout the site, to stabilize the soil against erosion. 		

Table 57: Summary of farm security risk

FARM SECURITY			
Environmental Parameter	Farm security		
Impact	Increased security against stock theft due to the presence of the		
	energy facility and its personnel		
Extent (E)	Site		
Probability (P)	Probable		
Reversibility (R)	Completely reversible		
Irreplaceable loss of resources (I)	No loss		

SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD Proposed Xha! Boom Wind Farm - Final Scoping Report Version No: 1 04 August 2017

FARM SECURITY					
Duration (D)	Long term	Long term			
Cumulative effect (C)	Negligible	Negligible			
Intensity/magnitude (M)	Low	Low			
Significance Rating	Low negative	Low negative			
	Pre-mitigation impact rating	Post mitigation impact rating			
Extent	1	n/a			
Probability	3	3 n/a			
Reversibility	1	1 n/a			
Irreplaceable loss	1	1 n/a			
Duration	3	3 n/a			
Cumulative effect	1	1 n/a			
Intensity/magnitude	1	n/a			
Significance rating	- 10 (low negative)	- 10 (low negative) n/a			
Mitigation measures	None Possible				

Table 58: Summary of Loss of topsoil caused by poor topsoil management construction phase impacts

mpact I				
	orogion oto) during construction	Loss of topsoil caused by poor topsoil management (burial,		
	erosion, etc.) during construction	n related soil profile disturbance		
((levelling, excavations, disposal	of spoils from excavations etc.)		
	and having the effect of loss of	•		
	after rehabilitation. The very low	• •		
	is likely to be impacted, reduces	the significance of this impact.		
	Site			
, ()	Probable			
Reversibility (R)	Partly reversible			
Irreplaceable loss of resources (I)	Marginal			
Duration (D)				
Duration (D)	Long term			
Cumulative effect (C)	Negligible			
	Negligible			
Intensity/magnitude (M)	Medium			
Significance Rating	Low negative			
	Ŭ			
I				
!	Pre-mitigation impact rating	Post mitigation impact rating		
Extent	1	1		

SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD Proposed Xha! Boom Wind Farm - Final Scoping Report

LOSS OF TOPSOIL CAUSED BY POOR TOPSOIL MANAGEMENT			
Probability	3		2
Reversibility	2		2
Irreplaceable loss	2		2
Duration	3		3
Cumulative effect	1		1
Intensity/magnitude	2		1
Significance rating	- 2	24 (low negative)	- 11 (low negative)
Mitigation measures	w tti s T tti C tti s S S	vay, then any available top he entire surface to be d preading during rehabilitati opsoil stockpiles must hrough erosion by establish Dispose of all subsurface hey will not impact on undis During rehabilitation, the sto pread over the entire distur	be conserved against losses hing vegetation cover on them. spoils from excavations where sturbed land. ockpiled topsoil must be evenly

Table 59: Summary of degradation of veld impacts

DEGRADATION OF VELD IMPACTS			
Environmental Parameter	Veld vegetation (grazing)		
Impact	Degradation of veld vegetation beyond the direct development		
	footprint caused by trampling	due to vehicle passage, and	
	deposition of dust.		
Extent (E)	Site		
Probability (P)	Possible		
Reversibility (R)	Partly reversible		
Irreplaceable loss of resources (I)	Marginal		
Duration (D)	Medium term		
Cumulative effect (C)	Negligible		
	Negligible		
Intensity/magnitude (M)	Low		
Significance Rating	Low negative		
	Pre-mitigation impact rating	Post mitigation impact rating	
Extent	1	1	
Probability	2	1	

SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD Proposed Xha! Boom Wind Farm - Final Scoping Report Version No: 1 04 August 2017

DEGRADATION OF VELD IMPACTS		
Reversibility	2	2
Irreplaceable loss	2	2
Duration	2	2
Cumulative effect	1	1
Intensity/magnitude	1	1
Significance rating	- 10 (low negative)	- 9 (low negative)
Mitigation measures	 Minimize road footprint and control vehicle access on approved roads only. Control dust as per standard construction site practice. 	

 Table 60:
 Summary of dust generation impacts

DUST GENERATION		
Environmental Parameter	Air quality	
Impact	Dust generation is likely to result from disturbance of surface and	
	surface vegetation cover, and consequent exposure to wind	
	erosion. Dust has a negative	e impact on surrounding veld
	vegetation, animals and human	S.
Extent (E)	Site	
Probability (P)	Possible	
Reversibility (R)	Partly reversible	
Irreplaceable loss of resources (I)	Marginal	
Duration (D)	Medium term	
Cumulative effect (C)	Negligible	
Intensity/magnitude (M)	Low	
Significance Rating	Low negative	
	Pre-mitigation impact rating	Post mitigation impact rating
Extent	1	
Probability	2	1
Reversibility	2	2
Irreplaceable loss	2	2
Duration	2	2
Cumulative effect	1	1
Intensity/magnitude	1	1
Significance rating	- 10 (low negative)	- 9 (low negative)
Mitigation measures	· • /	ard construction site measures
	which may include damping down with water or other	
	appropriate and effective d	lust control measures. Maintain

SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD pre Proposed Xha! Boom Wind Farm - Final Scoping Report

DUST GENERATION
where possible all vegetation cover and facilitate re-
vegetation of denuded areas throughout the site.

SOIL CONTAMINATION		
Environmental Parameter	Soil	
Impact	Soil contamination can occur from hydrocarbon spillages from construction activities. The very low proportion of surface area that is likely to be impacted and its low consequence for farming activities, reduces the significance of this impact.	
Extent (E)	Site	
Probability (P)	Possible	
Reversibility (R)	Partly reversible	
Irreplaceable loss of resources (I)	Marginal	
Duration (D)	Long term	
Cumulative effect (C)	Negligible	
Intensity/magnitude (M)	Low	
Significance Rating	Low negative	
	Pre-mitigation impact rating	Post mitigation impact rating
Extent	1	1
Probability	2	1
Reversibility	2	2
Irreplaceable loss	2	2
Duration	2	2
Cumulative effect	1	1
Intensity/magnitude	1	1
Significance rating	- 10 (low negative)	- 9 (low negative)
Mitigation measures	 Implement effective spilla system. 	age and waste management

The following impacts associated with the proposed Xha! Boom Wind Farm can be listed as:

- Loss of agricultural land use during the construction and operational phases;
- Generation of additional land use income impacts during operation phase;
- Erosion due to alteration of the land surface run-off characteristic impacts during the construction phase;

- Stock theft due to the presence of the energy facility and its personnel during the construction and operational phases;
- Loss of topsoil caused by poor topsoil management during the construction phase;
- Degradation of veld impacts caused by trampling due to vehicle passage, and deposition of dust during the construction phase;
- Dust generation impacts from disturbance of surface and surface vegetation cover, and consequent exposure to wind erosion during the construction phase; and
- Soil contamination impacts from hydrocarbon spillages from construction activities.

6.2.6 Noise Impacts

The following potential impacts have been identified for the proposed wind farm development and will be further investigated in the EIA phase of the noise assessment.

Table 62: Noise Impact Assessment – Daytime Construction (and upgrade) of access roads and other
infrastructure

NOISE		
Environmental Parameter	Construction of the access roads and grid infrastructure during the day	
	Increase in sound levels at the dwellings of receptors during the day. Construction activities will generate noises up to 45 dBA at 450m and 52 dBA (potential disturbing noise) at 220m. Impulsive noises are associated with construction activities and these noises may be intrusive and increase annoyance with the project. The route of the access roads or grid infrastructure was not defined but could go past structures.	
Issue/Impact/Environmental Effect/Nature	Considering the location of existing roads, there may be an access road (if accessing from the south) approximately 600m from NSD01, directly passing NSD02 and 160m from NSD03.	
	If the access road is developed from the Buchufontein road (if accessing from the east), it could pass as close as 85m from NSD05. It should be noted, while most of the NSDs only use the farms for a few months during the year, this assessment will assume that the dwellings will be used for residential purposes during the construction phase.	
Extent (E)	The impact will only affect residences on site.	
Probability (P)	Definite	
Reversibility (R)	Completely reversible. Construction noise ceases once infrastructure is in place.	
Irreplaceable loss of resources (I)	None	

Page 173

NOISE		
Duration (D)	Short term.	
Cumulative effect (C)	Negligible	
Intensity/magnitude (M)	Very high	
Significance Rating	Medium	
	Pre-mitigation impact rating	Post mitigation impact rating
Extent	1	1
Probability	4	1
Reversibility	1	1
Irreplaceable loss	1	1
Duration	1	1
Cumulative effect	1	1
Intensity/magnitude	4	1
Significance rating	- 36 (medium negative)	- 6 (low negative)
Mitigation measures	 General mitigation measures to reduce residual risk: Relocate access roads further from houses. To minimize noise levels below a low significance, ensure that roads (or grid lines) are further than 220m from dwellings used for residential purposes during the construction period. Construct the access roads during a period when receptors are not using their dwellings. Locate contractors camp and storage areas at locations where construction traffic will pass occupied dwellings minimally. Develop a separate road or upgrade an existing access road to the contractor's camp to minimise traffic past residents. 	

Table 63: Noise Impact Assessment - Night-time	Construction (and	d upgrade) o	of access road	s and
other infrastructure				

NOISE		
Environmental Parameter	Construction of the access roads and grid infrastructure at	
	night	
Issue/Impact/Environmental Effect/Nature	Increase in sound levels at the dwellings of receptors during at night. Construction activities will generate noises up to 35	
	dBA at 1,100m and 42 dBA (potential disturbing noise) at	
	580m. Ambient sound levels are very low in this area at night	
	and these noises may be intrusive and increase annoyance	
	with the project, especially if impulsive noises are present. The	
	route of the access roads or grid infrastructure was not defined	
	but could go past structures.	

	NOISE						
	Considering the location of existing roads, there may be an access road (if accessing from the south) approximately 600m from NSD01, directly passing NSD02 and 160m from NSD03.						
	accessing from the east), it constrained accessing from the east), it constrained by NSD05. It should be noted, we the farms for a few months dowill assume that the dwellin purposes during the construct	If the access road is developed from the Buchufontein road (if accessing from the east), it could pass as close as 85m from NSD05. It should be noted, while most of the NSDs only use the farms for a few months during the year, this assessment will assume that the dwellings will be used for residential purposes during the construction phase.					
Extent	Site						
Probability	Definite						
Reversibility	Completely						
Irreplaceable loss of resources	None						
Duration	Short						
Cumulative effect	Negligible						
Intensity/magnitude	Very high						
Significance Rating	Medium						
	Pre-mitigation impact rating	Post mitigation impact rating					
Extent	1	1					
Probability	4	1					
Reversibility	1	1					
Irreplaceable loss	1	1					
Duration	1	1					
Cumulative effect	1	1					
Intensity/magnitude	4	1					
Significance rating	- 36 (medium negative)	 6 (low negative) 					
Mitigation measures	 General mitigation measures to reduce residual risk: Due to the low ambient sound levels, it is highly recommended that no construction activities are allowed within 580m from occupied dwellings at night. This includes construction of roads, power lines or construction of wind turbines. Construct the access roads during a period when receptors are not using their dwellings. Locate contractors camp and storage areas at locations where construction traffic will pass occupied dwellings minimally. Develop a separate road or upgrade an existing 						

SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD prepared by: SiVEST Environmental Proposed Xha! Boom Wind Farm - Final Scoping Report

NOISE					
	access road to the contractor's camp to minimise traffic past residents.				

Table Of Main Law		Contraction Traction
I able 64: Noise Im	pact Assessment – Da	ytime Construction Traffic

	NOISE					
Environmental Parameter	Construction traffic passing day	residential dwellings during the				
	the day due to traffic passing take place for up to 3 years. On noises up to 45 dBA at 130 noises may be intrusive and	he dwellings of receptors during the dwellings. This activity could Construction traffic can generate Om during busy periods. These d increase annoyance with the roads was not defined but could				
Issue/Impact/Environmental Effect/Nature	access road (if accessing from	existing roads, there may be an in the south) approximately 600m NSD02 and 160m from NSD03.				
	If the access road is developed from the Buchufontein road accessing from the east), it could pass as close as 85m fro NSD05. It should be noted, while most of the NSDs only us the farms for a few months during the year, this assessme will assume that the dwellings will be used for resident purposes during the construction phase.					
Extent	Site					
Probability	Probable					
Reversibility	Completely					
Irreplaceable loss of resources	None					
Duration	Medium					
Cumulative effect	Negligible					
Intensity/magnitude	High					
Significance Rating	Medium					
	Pre-mitigation impact rating	Post mitigation impact rating				
Extent	1	1				
Probability	3	1				
Reversibility	1	1				

SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD Proposed Xha! Boom Wind Farm - Final Scoping Report Version No: 1

NOISE					
Irreplaceable loss	1	1			
Duration	2	2			
Cumulative effect	1	1			
Intensity/magnitude	3	1			
Significance rating	- 27 (low negative)	- 7 (low negative)			
Mitigation measures	 General mitigation measures to reduce residual risk: If possible, the relocation of access roads to be furthe than 160m from any dwelling to be used for residentia purposed during the construction phase. 				

Table 65: Noise	Impact Assessment	- Night-time	Construction 7	Traffic

NOISE					
Environmental Parameter	Construction traffic passing residential dwellings at night				
	Increase in sound levels at the dwellings of receptors at night due to traffic passing the dwellings. This activity could take place for up to 3 years. Construction traffic can generate noises up to 35 dBA at 1,200m during busy periods and higher than 42 dBA when closer than 250m. These noises may be intrusive and increase annoyance with the project. Route of the access roads was not defined but could go past structures.				
Issue/Impact/Environmental Effect/Nature	Considering the location of existing roads, there may be an access road (if accessing from the south) approximately 600m from NSD01, directly passing NSD02 and 160m from NSD03.				
	If the access road is developed from the Buchufontein road (if accessing from the east), it could pass as close as 85m from NSD05. It should be noted, while most of the NSDs only use the farms for a few months during the year, this assessment will assume that the dwellings will be used for residential purposes during the construction phase.				
Extent	Site				
Probability	Definite				
Reversibility	Completely				
Irreplaceable loss of resources	None				
Duration	Medium				
Cumulative effect	Negligible				
Intensity/magnitude	Very high				

	NOISE	
Significance Rating	Medium	
	Pre-mitigation impact rating	Post mitigation impact rating
Extent	1	1
Probability	4	1
Reversibility	1	1
Irreplaceable loss	1	1
Duration	2	2
Cumulative effect	1	1
Intensity/magnitude	4	1
Significance rating	- 40 (medium negative)	- 7 (low negative)
Mitigation measures	 dwellings used for resident material or equipment mushould be allowed closed Minimize night-time traffic If significant traffic is ant must be located further th Locate contractor's camp where construction traffic dwellings (or pass them mupgrade an existing access to minimise traffic past reset Noise impact would dep anticipated. If significant access roads must be located for the locate function of the significant for the significant past reset for minimise traffic past reset	nstruction traffic to drive past ntial purposes at night. If people, list be moved at night, no traffic er than 250m from receptors. as much as possible. icipated at night, access roads an 580m from receptors. and storage areas at locations will not need to pass occupied inimally). Develop a separate or as road to the contractor's camp sidents. end if night-time activities are traffic is anticipated at night, ocated further than 250m from may allow the development of

NOISE				
Environmental Parameter	Construction activities of the Wind Turbine Generators and			
	other infrastructure during the day			
	Increase in sound levels at the dwellings of receptors during			
	the day. Construction activities will generate noises up to 45			
Issue/Impact/Environmental	dBA at 450m and 52 dBA (potential disturbing noise) at 220m.			
Effect/Nature	Impulsive noises are associated with construction activities			
Eneconature	and these noises may be intrusive and increase annoyance			
	with the project.			

Table 66: Noise Impact Assessment - Daytime Construction of Wind Turbines and other infrastructure

	NOISE						
	There are no receptors or dw	ellings closer than 1,000m from					
	any wind turbine and construction activities would not be						
	significant.						
Extent	Site						
Probability	Unlikely						
Reversibility	Completely						
Irreplaceable loss of resources	None						
Duration	Short						
Cumulative effect	Negligible						
Intensity/magnitude	Low						
Significance Rating	Low						
	Pre-mitigation impact rating	Post mitigation impact rating					
Extent	1	1					
Probability	1	1					
Reversibility	1	1					
Irreplaceable loss	1	1					
Duration	1	1					
Cumulative effect	1	1					
Intensity/magnitude	1	1					
Significance rating	- 6 (low negative)	- 6 (low negative)					
Mitigation measures	 Mitigation not required infrastructure will be co potential noise-sensitive rec 	nstructed is too far from the					

Table 67:	Noise	Impact	Assessment	_	Night-time	Construction	of	Wind	Turbines	and	other
infrastructu	re										

NOISE						
Environmental Parameter	Construction of the Wind Turbine Generators and other					
	infrastructure at night					
Issue/Impact/Environmental Effect/Nature	Increase in sound levels at the dwellings of receptors during at night. Construction activities will generate noises up to 35 dBA at 1,100m and 42 dBA (potential disturbing noise) at 580m. Ambient sound levels are very low in this area at night and these noises may be intrusive and increase annoyance with the project, especially if impulsive noises are present. The route of the access roads or grid infrastructure was not defined but could go past structures.					

SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD Proposed Xha! Boom Wind Farm - Final Scoping Report

NOISE			
	There are no receptors or dwellings closer than 1,000m from		
	any wind turbine and construction activities would not be		
	significant.		
Extent	Site		
Probability	Possible		
Reversibility	Completely		
Irreplaceable loss of resources	None		
Duration	Short		
Cumulative effect	Negligible		
Intensity/magnitude	Medium		
Significance Rating	Low		
	1		
	Pre-mitigation impact rating	Post mitigation impact rating	
Extent	1	1	
Probability	2	1	
Reversibility	1	1	
Irreplaceable loss	1	1	
Duration	1	1	
Cumulative effect	1	1	
Intensity/magnitude	2	1	
Significance rating	- 14 (low negative)	- 6 (low negative)	
Mitigation measures	 Mitigation measures to reduce residual risk: The residential dwelling is seldom used and the developer can ensure that the construction of Wind Turbines take place during a period when the owners are not using the property. 		

Table 68: Impact Assessment: Operation of Wind Farm – Daytime

NOISE		
Environmental Parameter	Noise from operating wind turbines.	
Issue/Impact/Environmental Effect/Nature	Increase in sound levels at the dwellings of receptors during the day. Operating wind turbines will generate noises of approximately 40 dBA at all NSD.	
Extent	Site	
Probability	Unlikely	
Reversibility	Completely	

SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD Proposed Xha! Boom Wind Farm - Final Scoping Report Version No: 1

NOISE		
Irreplaceable loss of resources	None	
Duration	Long	
Cumulative effect	Negligible	
Intensity/magnitude	Low	
Significance Rating	Low	
	Pre-mitigation impact rating	Post mitigation impact rating
Extent	1	1
Probability	1	1
Reversibility	1	1
Irreplaceable loss	1	1
Duration	3	3
Cumulative effect	1	1
		1
Intensity/magnitude	1	
Significance rating	- 8 (low negative)	- 8 (low negative)
Mitigation measures	 Mitigation not required as the potential daytime noise impact would be insignificant. 	

Table 69: Impact Assessment: Operation of Wind Farm - Night-time

NOISE		
Environmental Parameter	Noise from operating wind turbines.	
Issue/Impact/Environmental Effect/Nature	Increase in sound levels at the dwellings of receptors at night. Operating wind turbines will generate noises of approximately 40 dBA at all NSD.	
Extent	Site	
Probability	Probable	
Reversibility	Completely	
Irreplaceable loss of resources	None	
Duration	Long	
Cumulative effect	Negligible	
Intensity/magnitude	Very high	
Significance Rating	High	

SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD Proposed Xha! Boom Wind Farm - Final Scoping Report Version No: 1

NOISE		
	Dro mitigation impost ration	Dest mitigation impact ratios
Extent	Pre-mitigation impact rating	Post mitigation impact rating
Extent	1	1
Probability	3	1
Reversibility	1	1
Irreplaceable loss	1	1
Duration	3	3
Cumulative effect	1	1
Intensity/magnitude	4	1
Significance rating	- 40 (high negative)	- 8 (low negative)
Mitigation measures	 40 (high negative) - 8 (low negative) Mitigation is recommended if the owner will use this property for residential purposes: This noise level must be discussed with the owner. It is not recommended that this dwelling be used for residential purposes if the Xha! Boom WF is developed with the current layout. The owner should provide an alternative location for the worker staying at this location during the sheering period. The developer can change the layout and not develop any wind turbines within approximately 1,000m from this dwelling (alternatively relocate or remove wind turbine 25). The developer can use a different wind turbine that have a sound power emission level of less than 106dBA (maximum). The developer can confirm periods when the dwelling will be used for residential purposes, and the three closest wind turbines can be operated in a noise mode that generates less noise (less than 106dBA) or one or more 	

The following impacts associated with the proposed Xha! Boom Wind Farm can be listed as:

- Impacts of noise during daytime construction (and upgrade) of access roads and other infrastructure;
- Night-time construction (and upgrade) of access roads and other infrastructure;
- Daytime Construction Traffic impacts;
- Night-time Construction Traffic impacts;
- Daytime Construction of Wind Turbines and other infrastructure;
- Night-time Construction of Wind Turbines and other infrastructure;
- Daytime operation impacts from operating wind turbines; and
- Night-time operation impacts from operating wind turbines;

6.2.7 Visual Impacts

The following potential impacts have been identified for the proposed wind farm development and will be further investigated in the EIA phase of the visual assessment.

	VISUAL		
Environmental Parameter	Visual Impact		
Issue/Impact/Environmental	During the construction phase, large construction vehicles		
Effect/Nature	and equipment will alter the natural character of the study		
	area and expose visual receptors to visual impacts		
		n. The construction activities	
		unwelcome visual intrusion,	
		Indisturbed settings. Vehicles	
	-	from the proposed site on	
	-	so expected to increase dust	
		affic on gravel roads and the	
		reate a visual impact and may from surrounding viewers.	
	•	onstruction would also expose	
	-	contrast with the surrounding	
	-	emporary stockpiling of soil	
		ter the flat landscape. Wind	
	blowing over these disturbed areas could result in dust		
	which would have a visual impact.		
Extent	Local / District (2)		
Probability	Probable (3)		
Reversibility	Completely reversible (1)		
Irreplaceable loss of resources	Marginal loss (2)		
Duration	Short term (1)		
Cumulative effect	Medium cumulative effects (3)		
Intensity/magnitude	Medium (2)		
Significance Rating	Prior to mitigation measures: Low negative impact		
	After mitigation measures: Low negative impact		
	Pre-mitigation impact rating Post mitigation impact rating		
Extent	2	2	
Probability	3	2	
Reversibility	1	1	
Irreplaceable loss	2	1	

Table 70: Rating of visual impacts of the proposed Xha! Boom Wind Farm during construction

SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD Proposed Xha! Boom Wind Farm - Final Scoping Report Version No: 1

Duration	1	1	
Cumulative effect	3	3	
Intensity/magnitude	2	2	
Significance rating	-24(negative low)	-20 (negative low)	
Mitigation measures	 Minimise vegetation areas as soon as po 		
	and waste materials	suppression techniques are	

Table 71: Rating of visual impacts of the infrastructure associated with the proposed Xha! Boom Wind
 Farm during construction

VISUAL		
Environmental Parameter	Visual Impact	
Issue/Impact/Environmental	During the construction of the underground cables,	
Effect/Nature	overhead power lines (if required), on-site 132kV	
	substation, access roads and building infrastructure, large	
	construction vehicles and equipment could exert a visual	
	impact by altering the visual character of the surrounding	
	area and exposing sensitive visual receptor locations to	
	visual impacts associated with the construction phase. The	
	construction activities may be perceived as an unwelcome	
	visual intrusion, particularly in more natural undisturbed	
	settings. Vehicles and trucks travelling to and from the	
	proposed site on gravel access roads are also expected to	
	increase dust emissions. The increased traffic on the gravel	
	roads and the resultant dust plumes could create a visual	
	impact and may evoke negative sentiments from	
	surrounding viewers. Surface disturbance during	
	construction would also expose bare soil which could	
	visually contrast with the surrounding environment. In	
	addition, temporarily stockpiling soil during construction	
	may alter the flat landscape. Wind blowing over these	
	disturbed areas could result in dust which would have a	
	visual impact.	
Extent	Local/district (2)	
Probability	Probable (3)	

Reversibility	Completely reversible (1)	
Irreplaceable loss of resources	No loss (1)	
Duration	Short term (1)	
Cumulative effect	Medium cumulative effects (3)
Intensity/magnitude	Medium (2)	
Significance Rating	Prior to mitigation measures: Low negative impact After mitigation measures: Low negative impact	
	Pre-mitigation impact rating	Post mitigation impact rating
Extent	2	2
Probability	3	2
Reversibility	1	1
Irreplaceable loss	1	1
Duration	1	1
Cumulative effect	3	3
Intensity/magnitude	2	2
Significance rating	-22 (low negative)	-20 (low negative)
	 All reinstated cable trenches should be re-vegetated with the same vegetation that existed prior to the cable being laid. Carefully plan to reduce the construction period. Minimise vegetation clearing and rehabilitate cleared areas as soon as possible. Maintain a neat construction site by removing rubble and waste materials regularly. Make use of existing gravel access roads where possible. Ensure that dust suppression techniques are 	
Mitigation measures	implemented on all access roads	

Operation

Table 72: Rating of visual impacts of the proposed Xha! Boom Wind Farm during operation

VISUAL		
Environmental Parameter	Visual Impact	
	The group and group and Mark Deeper Wind Forms aculd super-	
Issue/Impact/Environmental	The proposed proposed Xha! Boom Wind Farm could exert	
Effect/Nature	a visual impact by altering the visual character of the	
	surrounding area and exposing sensitive visual receptor	

		ads / homesteads, to visual
	impacts. The development may be perceived as an unwelcome visual intrusion, particularly in more natural undisturbed settings. Maintenance vehicles may need to access the wind farm via gravel access roads and are expected to increase dust emissions in doing so. The	
	-	el roads and the dust plumes ct and may evoke negative
		ing viewers. Security and
		posed wind farm could result
	in light pollution and glare, wh	nich could be an annoyance to
	surrounding viewers	
Extent	Local/district (2)	
Probability	Definite (4)	
Reversibility	Irreversible (4)	
Irreplaceable loss of resources	Marginal (2)	
Duration	Long term (3)	
Cumulative effect	High cumulative effects (4)	
Intensity/magnitude	Medium (2)	
Significance Rating	Prior to mitigation measures: Medium negative impact	
	After mitigation measures:	Medium negative impact
	Pre-mitigation impact rating	Post mitigation impact rating
Extent	2	2
Probability	4	4
Reversibility	4	4
Irreplaceable loss	2	2
Duration	3	3
Cumulative effect	4	3
Intensity/magnitude	2	2
Significance rating	-38 (medium negative)	-36 (medium negative)
	 Where possible, fewer but larger turbines with a greater 	
	 output should be utilised rather than a larger number of smaller turbines with a lower capacity. Light fittings for security at night should reflect the light toward the ground and prevent light spill. 	
	 Ensure that dust suppression techniques are 	
Mitigation measures	implemented on all acces	
* Please note in the context of the visu	al anvironment 'resources' are	defined as scenic / natural view

Table 73: Rating of visual impacts of the infrastructure associated with the proposed Xha! Boom Wind
 Farm during operation

	VISUAL		
Environmental Parameter	Visual Impact		
Issue/Impact/Environmental Effect/Nature	The proposed underground cables, overhead power lines (if required), on-site 132kV substation, access roads and building infrastructure could exert a visual impact by altering the visual character of the surrounding area and exposing sensitive visual receptors to visual impacts. The development may be perceived as an unwelcome visual intrusion, particularly in more natural undisturbed settings. Maintenance vehicles may need to access the infrastructure associated with the wind farm via gravel access roads and are expected to increase dust emissions in doing so. The increased traffic on the gravel roads and the resultant dust plumes could create a visual impact and may evoke negative sentiments from surrounding viewers. Security and operational lighting at the associated infrastructure could result in light pollution and glare, which could be an annoyance to surrounding viewers		
Extent	Local / District (2)		
Probability	Probable (3)	Probable (3)	
Reversibility	Partly reversible (2)		
Irreplaceable loss of resources	No loss of resource (1)		
Duration	Long term (3)		
Cumulative effect	Low cumulative effect (2)		
Intensity/magnitude	Medium (2)	Medium (2)	
Significance Rating	-	Prior to mitigation measures: Low negative impact	
	After mitigation measures:	- ·	
	Pre-mitigation impact rating	Post mitigation impact rating	
Extent	2	2	
Probability	3	3	
Reversibility	2	2	
Irreplaceable loss	1	1	
Duration	3	3	
Cumulative effect	2	2	
Intensity/magnitude	2	1	
Significance rating	-26 (low negative)	-13 (low negative)	

	 Light fittings for security at the on-site 132kV substation 	
	at night should reflect the light toward the ground and	
	prevent light spill.	
	 The operations and maintenance buildings should not 	
	be illuminated at night.	
	 If overhead power lines are required, align power lines to run parallel to existing power lines and other linear impacts, where possible. 	
	Bury cables underground where possible.	
	The operation and maintenance building should be	
	painted with natural tones that fit with the surrounding	
	environment. Non-reflective surfaces should be utilised	
	where possible.	
	 Ensure that dust suppression techniques are 	
	implemented on all access roads.	
	 Select the alternatives that will have the least impact 	
Mitigation measures	on visual receptors.	

Decommissioning

Visual impacts during the decommissioning phase are potentially similar to those during the construction phase.

The following impacts associated with the proposed Xha! Boom Wind Farm can be listed as:

- Visual impacts of the proposed Xha! Boom Wind Farm during construction;
- Visual impacts of the infrastructure associated with the proposed Xha! Boom Wind Farm during construction;
- Visual impacts of the proposed Xha! Boom Wind Farm during operation; and
- Visual impacts of the infrastructure associated with the proposed Xha! Boom Wind Farm during operation.

As mentioned above, visual impacts during the decommissioning phase are potentially similar to those during the construction phase.

6.2.8 Heritage Impacts

The following potential impacts have been identified for the proposed wind farm development and will be further investigated in the EIA phase of the heritage assessment.

Table 74: Impact rating - Palaeontology

HERITAGE

Environmental Parameter	Impact on the Palaeontology Heritage (fossils) of the	
	development footprint	
Issue/Impact/Environmental Effect/Nature	The excavations and site clearance during the construction phase will involve substantial excavations into the superficial sediment cover as well as locally into the underlying bedrock. These excavations will modify the existing topography and may disturb, damage, destroy or permanently seal-in fossils at or below the ground surface that are then no longer available for scientific research. This impact is likely to occur only during the construction phase. No impacts are expected to occur during the operation phase.	
Extent	The Xha! Boom Wind Farm project area will be located approximately 62km north of Loeriesfontein,	
	in the Khai-ma and Hantam Local Municipalities within the Northern Cape Province.	
Probability	The development footprint is underlain by the Permo- Carboniferous Dwyka Group and Early to Middle Permian basinal mudrocks of the lower part of the Ecca Group (Karoo Supergroup). Permian and Jurassic bedrocks are mantled with a range of superficial deposits, mostly Late Caenozoic (Quaternary to Recent) in age. The intrusive Karoo dolerites are of no palaeontological significance and the Late Caenozoic superficial deposits are generally of very low palaeontological sensitivity. The probability of significant impacts on palaeontological heritage during the construction phase is low.	
Reversibility	Impacts on fossil heritage are generally irreversible. Well-documented records and further palaeontological studies of any fossils exposed during construction would represent a positive impact from a scientific perspective. The possibility of a negative impact on the palaeontological heritage of the area can be reduced by the implementation of adequate damage mitigation procedures. If damage mitigation is properly undertaken the benefit scale for the project will lie within the beneficial category. Fossil Heritage is expected and fossils other than trace assemblages are generally scarce and most of the Ecca sediments are of low overall palaeontological sensitivity.	

Irreplaceable loss of resources	The development footprint is underlain by the Permo-	
Carboniferous Dwyka Group and Early		
	Permian basinal mudrocks of the lower part of the Ecca Group and is rated as insignificant loss o	
	resources	
Duration	The expected duration of the impact is assessed as	
	potentially permanent to long term. In the absence of	
	mitigation procedures (should fossil material be	
	present within the affected area) the damage or	
	destruction of any palaeontological materials will be	
	permanent	
Cumulative effect	Low Cumulative Impact	
	The cumulative effect of the development area within	
	the proposed location is considered to be low. The	
	broader area near Loeriesfontein is underlain by the	
	Dwyka, Lower Ecca, Karoo Dolerite and Late	
	Caenozoic deposits. Karoo Dolerite is unfossiliferous	
	while the fossil sensitivity in the Caenozoic is low.	
	Fossils other than trace assemblages are generally	
	scarce and most of the Ecca and Dwyka sediments	
	are of low overall palaeontological sensitivity.	
Intensity/magnitude	Probable significant impacts on palaeontologica	
	heritage during the construction phase are high, bu	
	the intensity of the impact on fossil heritage is rated as low	
Significance Rating	A brief description of the importance of an impact	
	which in turn dictates the level of mitigation required	
	Pre-mitigation impact Post mitigation impact	
	rating rating	
Extent	2 1	
Probability	2 1	
Reversibility	2 1	
Irreplaceable loss	2 1	
Duration	4 1	
Cumulative effect	2 1	
Intensity/magnitude	2 1	
Significance rating	-28 (low negative) -6 (low negative)	
	Recommended mitigation of the inevitable damage	
	and destruction of fossil within the proposed	
	development area would involve the surveying,	
	development area would involve the surveying, recording, description and collecting of fossils within	

initial vegetation clearance has taken place but before the ground is levelled for construction
Impacts on fossil heritage are generally irreversible. Well-documented records and further palaeontological studies of any fossils exposed during construction would represent a positive impact from a scientific perspective. The possibility of a negative impact on the palaeontological heritage of the area can be reduced by the implementation of adequate damage mitigation procedures. If damage mitigation is properly undertaken the benefit scale for the project will lie within the beneficial category.
Not deemed necessary as the Allanridge Formation is unfossiliferous.

ARCHAEOLOGY		
Environmental Parameter	Stone Age resources	
Issue/Impact/Environmental Effect/Nature	Archaeological finds have been identified during the	
	fieldwork having low archaeological significance.	
	All the identified find spots could be impacted by	
	construction activities however the impact is seen as	
	negligible.	
Extent	Localised	
Probability	Probable	
Reversibility	Non- renewable.	
Irreplaceable loss of resources	Archaeological sites are irreplaceable	
Duration	Permanent	
Cumulative effect	Low cumulative impact	
Intensity/magnitude	Medium	
Significance Rating	Negative medium impact before mitigation and low	
	negative after mitigation.	
	Dre withouting import Deck withouting income	
	Pre-mitigation impact Post mitigation impact	
	rating rating	
Extent	2 2	
Probability	3 1	

 SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD
 prepared by: SiVEST Environmental

 Proposed Xha! Boom Wind Farm - Final Scoping Report
 prepared by: SiVEST Environmental

Reversibility	4	4
Irreplaceable loss	4	4
Duration	4	4
Cumulative effect	3	1
Intensity/magnitude	2	1
	-40 (Negative Medium	
Significance rating	Impact	-16 (Low negative
	 significant sites will be Monitor find spot area take place through the A management plan needs then to be complementation du operations. Possible swith a medium to himetation du site a medi	as if construction is going to
Mitigation measures	practitioner during the	construction phase.

 Table 76:
 Impact rating – chance finds

CHANCE FINDS			
Environmental Parameter	Unidentified heritage structures		
Issue/Impact/Environmental Effect/Nature	Due to the size of the area assessed and the design process requiring fieldwork before identification of the layout. The possibility of encountering heritage features in unsurveyed areas does exist.		
Extent	Localised and in most cases no more than 1000m2		
Probability	Probable		
Reversibility	Heritage resources are non-renewable.		
Irreplaceable loss of resources	A brief description of the degree in which irreplaceable resources are likely to be lost		
Duration	Permanent		
Cumulative effect	Medium		
Intensity/magnitude	Medium		
Significance Rating	Medium negative before mitigation and low negative		
	after mitigation for both the expanded and the		
	constrained layout.		
	Pre-mitigation impact Post mitigation impact		
	rating rating		

SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD Proposed Xha! Boom Wind Farm - Final Scoping Report Version No: 1 04 August 2017

Extent	1 1
Probability	3 3
Reversibility	4 4
Irreplaceable loss	2 2
Duration	4 4
Cumulative effect	3 3
Intensity/magnitude	2 1
Significance rating	-34 (Medium negative) -17 (Low negative)
	 A walk down of the final approved layout will be required before construction commence; Any heritage features of significance identified during this walk down will require formal mitigation or where possible a slight change in design could accommodate such resources. A management plan for the heritage resources needs then to be compiled and approved for implementation during construction and
Mitigation measures	operations.

The following impacts associated with the proposed Xha! Boom Wind Farm can be listed as:

- Impact on the Palaeontology Heritage (fossils) of the development footprint during construction;
- Impact on Stone Age resources (i.e. Archaeological resources) during construction; and
- Impact on chance finds / unidentified heritage structures during construction and operation.

6.2.9 Socio-economic Impacts

The following potential impacts have been identified for the proposed wind farm and will be further investigated in the EIA phase of the socio-economic assessment.

Construction

Table 77: Increased production and temporary stimulation of GDP-R

· ·	
Environmental Parameter	GDP-R: Refers to the value of all final goods and services
	produced within a region during a year.
Issue/Impact/Environmental	Project capital expenditure is expected to result in an increase in
Effect/Nature	the production of national and local economies as majority of inputs
	(with the exception of the cell and blades) will be produced in South
	Africa. A multiplier effect will be seen at a national level as the
	injection of funds will in turn increase people's incomes thus
	increasing their demand for goods and services.
Extent	The national economy will experience an increase in production.
Probability	The impact will certainly occur (>75% chance of occurrence).

Reversibility	Once capital is spent, impact is irreversible.		
Irreplaceable loss of resources	The impact will not result in any loss of resources		
Duration	The impact will last during constr	uction (± 2 years), which will be	
	extended to a short-term period.		
Cumulative effect	Establishment of similar projects	will multiply the positive impact	
	therefore cumulative impact is hig	h.	
Intensity/magnitude	Impact at a national level will be high.		
Significance Rating	Prior to mitigation measures: The anticipated impact will have a		
	significant positive impact at the national level.		
	After mitigation measures: No viable mitigation measures exist		
	to increase the intensity of the impact.		
	Pre-mitigation impact rating	Post mitigation impact rating	
Extent	4	4	
Probability	4	4	
Reversibility	4	4	
Irreplaceable loss	1	1	
Duration	1	1	
Cumulative effect	4	4	
Intensity/magnitude	3	3	
Significance rating	+54 (High positive)	+54 (High positive)	
Mitigation measures	No mitigation measures exist.		

· ·		
Environmental Parameter	Employment: Towns and settlements surrounding the project site	
	are characterised by very high levels of unemployment, reflecting	
	that the economy of the area is stagnant and is in need of economic	
	stimulation.	
Issue/Impact/Environmental	During the establishment of a wind farm, large numbers of workers	
Effect/Nature	are required for the duration of the construction phase.	
Extent	The impact will affect the local community and district.	
Probability	The impact will certainly occur (>75% chance of occurrence).	
Reversibility	The impact is completely reversible.	
Irreplaceable loss of	The impact will not result in any loss of resources.	
resources		
Duration	The impact will last during construction (± 2 years), which will be	
	extended to a short-term period.	
Cumulative effect	The developments of other renewable projects in the area could	
	significantly increase the number of jobs created, with wind energy	
	projects, it could grow proportionally to the number of new projects	
	implemented.	

Intensity/magnitude	Considering the high unemployment rate in the district as well the	
	local community, the impact coul	
	alleviating the unemployment level	•
Significance Rating	Prior to mitigation measures: The anticipated impact will have	
	significant positive effects.	
	o	
	After mitigation measures: Ensuring that jobs are allocated to	
	workers in the local area will significantly increase the impact of job	
	creation	
	Pre-mitigation impact rating	Post mitigation impact rating
Extent	2	2
Probability	4	4
Reversibility	1	1
Irreplaceable loss	1	1
Duration	1	1
Cumulative effect	4	4
Intensity/magnitude	3	4
Significance rating	+36 (Medium positive)	+52 (High positive)
	• Drafting legal and binding enforcements stipulating that majority of the unskilled positions in the project where possible be allocated to local labourers.	
	Where possible, subcontract to local construction companies	
	Consultation with local authorities is essential so as to manage	
	job creation expectations and ensure that all eligible worke	
Mitigation measures	in the primary study area are informed of the opportunities.	

Table 79: Impact of skills development due to the creation of new employment opportunities
--

Environmental Parameter	Skills development: it is expected that those who will receive	
	employment as a result of the construction activities will either be	
	improving an existing skill or acquiring a new skill.	
Issue/Impact/Environmental	The population of the primary study area mainly consists of	
Effect/Nature	unskilled workers with low literacy rates therefore employees will	
	benefit from a skills development programme, which is a key	
	component of the development of this project.	
Extent	Impact will affect the district and local communities.	
Probability	The impact will certainly occur (>75% chance of occurrence).	
Reversibility	The impact is irreversible.	
Irreplaceable loss of resources	The impact will not result in the loss of any resources.	
Duration	The impact will have a permanent effect on the employed	
	individuals as the acquired skills and necessary knowledge will	
	have already been acquired and will remain with the relevant	
	workers.	
Cumulative effect	The development of similar projects in the area will lead to greater	
	labour productivity and employability of construction phase	
	workers.	

Intensity/magnitude	The low primary school completion percentages indicate a lack of	
	skills amongst local communities,	
	a skilled workforce will have a high	
Significance Rating	Prior to mitigation measures: The anticipated impact will have a	
	significant positive effect.	
	After mitigation measures: L	Itilising appropriate mitigation
	measures, which ensure that skills	• • • • •
	part of the establishment will incre	
	Pre-mitigation impact rating	Post mitigation impact rating
Extent	2	2
Probability	3	4
Reversibility	4	4
Irreplaceable loss	1	1
Duration	4	4
Cumulative effect	3	4
Intensity/magnitude	3	3
Significance rating	+51 (High positive)	+57 (High positive)
	 Contracts ensuring that on-the-job training is included and enforced as a condition for the development of this project. To improve the chances of skills development during the 	
Mitigation measures	construction phase, contractors are encouraged to provide	
Mitigation measures	learner-ships and encourage further knowledge sharing.	

Table 80: Impact of Increased household income and improved standard of living

Environmental Parameter	Household income: the result of a household member engaging in	
	economic activity; has a direct link to the standards of living.	
	Currently just over half of the residents of the Hantam LM generate	
	an income less than R3 200.	
Issue/Impact/Environmental	Certain households are expected to experience an increase in	
Effect/Nature	household income as a result of the job creation as well as skills	
	development.	
Extent	Will affect local district and community.	
Probability	The impact will certainly occur (>75% chance of occurrence).	
Reversibility	The impact is reversible as the income will only be earned for the	
	duration of the construction period.	
Irreplaceable loss of resources	The impact will not result in the loss of any resources	
Duration	The impact will last during construction (± 2 years), which will be	
	extended to a short-term period.	
Cumulative effect	With the potential development of similar renewable projects in the	
	area, the number of jobs created through multiplier effects will	
	increase leading to increased household income.	
Intensity/magnitude	With just over 50% of individuals in the municipality who earn less	
	than R3 200, the impact of the increase in disposable household	
	income will thus result in a medium-sized impact.	

Significance Rating	 Prior to mitigation measures: Due to the improved living standards accompanying household income increases, the impact will result in a low positive effect. After mitigation measures: Utilising appropriate mitigation measures, the intensity of the impact has increased to a medium positive effect. 	
	Pre-mitigation impact rating	Post mitigation impact rating
Extent	2	2
Probability	4	4
Reversibility	1	1
Irreplaceable loss	1	1
Duration	1	1
Cumulative effect	4	4
Intensity/magnitude	2	3
Significance rating	+26 (Low positive)	+39 (Medium positive)
Mitigation measures	 Recruit local labour as far as possible so as to ensure that the benefits accrue to local households within the community Employ labour-intensive methods as far as feasible in the construction phase Where possible, sub-contract to local companies 	

Table 81: Impact of investment in the local community and economic development projects as part of
a Social Economic Development (SED) and Enterprise Development Plan (ED).

Environmental Parameter	Investment in the local community	
Issue/Impact/Environmental	SED and ED initiatives, as part of the Independent Power Producer	
Effect/Nature	Procurement Programme (IPPPP); project owners are required	
	allocate a certain percentage of the projects' revenue towards	
	community development. As such, the developer aims on investing	
	R450 000 in nearby communities through several community	
	development initiatives.	
Extent	The impact will affect the local district.	
Probability	Investing into the local economy is a government requirement	
	therefore the impact will certainly occur (>75% chance of	
	occurrence).	
Reversibility	Once the investments are injected into the economy, it can be	
	assumed that the impact will be irreversible.	
Irreplaceable loss of resources	The impact will not result in the loss of any resources.	
Duration	This impact is rated as medium term as it will take place during the	
	pre-construction and construction phase of the project.	
Cumulative effect	The base-town for several of the other projects in the area is	
	Loeriesfontein as well, thus the cumulative impact is high.	

Page 197

Intensity/magnitude	The local district as well as Loeriesfontein town is in need of an	
	economic stimulus therefore benefits from the investment will have	
	a high intensity impact.	
Significance Rating	Prior to mitigation measures: The anticipated impact will have a	
	significant positive effect.	
	After mitigation measures: After viable mitigation measures are	
	implemented, the anticipated impact will have a significant positive	
	effect.	
	Pre-mitigation impact rating	Post mitigation impact rating
Extent	2	2
Probability	4	4
Reversibility	4	4
Irreplaceable loss	1	1
Duration	2	2
Cumulative effect	4	4
Intensity/magnitude	3	4
Significance rating	+51 (High positive)	+68 (High positive)
	• It is recommended that	the proponent/project owner
	establishes a relationship with the local authorities such as the	
	Hantam LM so as to ensure that the SED & ED initiative that	
Mitigation measures	are invested into are aligned with the particular and relevant	
	needs of the Loeriesfontein or similar rural community.	
	• The government should find a way to monitor and evaluate the	
	compliance of the proponent to the requirement of investing	
	into a local community.	

Environmental Parameter	Government revenue: government obtains its revenue from	
	collecting taxes and rates from the country's residents and	
	business	
Issue/Impact/Environmental	The increase in employment opportunities and disposable income	
Effect/Nature	has a direct influence on the increase in the tax base as a result of	
	investment on the proposed project. The increased tax revenue	
	also implies that large sum of money to be spent on improving the	
	service delivery of the local district.	
Extent	The impact will affect the entire country.	
Probability	The impact will certainly occur (>75% chance of occurrence).	
Reversibility	The impact is completely reversible.	
Irreplaceable loss of resources	The impact will not result in any loss of resources.	
Duration	The impact will last during construction (± 2 years), which will be	
	extended to a short-term period.	
Cumulative effect	Considering surrounding renewable energy products, the	
	cumulative impact could potentially be high	

Intensity/magnitude	At a national level, the impact (increase in government revenue)	
	will have a medium impact and at	this stage, government revenue
	will not be as large as when the wi	nd farm becomes operational
Significance Rating	Prior to mitigation measures: The anticipated impact will result	
	in a medium positive effect.	
	After mitigation measures: No i	mitigations measures exist and
	the significance of the impact will remain unchanged.	
	Pre-mitigation impact rating	Post mitigation impact rating
Extent	4	4
Probability	4	4
Reversibility	1	1
Irreplaceable loss	1	1
Duration	1	1
Cumulative effect	4	4
Intensity/magnitude	2	2
Significance rating	+30 (Medium positive)	+30 (Medium positive)
Mitigation measures	No mitigation measures exist.	

Table 83: Change in demographics due to migration of workers from other areas and influx of jobseekers

Environmental Parameter	Demographics of the area: the area has a naturally	
	established, relatively small community.	
	The Loeriesfontein as well as Hantam LM labour force does	
	not have the essential skills and is not diversified enough to	
Issue/Impact/Environmental	provide all skills required in the construction phase, this will	
Effect/Nature	necessitate the migration of workers to the area. The	
	projects will also attract job-seekers from various parts of the	
	Province and possibly outside its borders.	
Extent	The impact will affect the local area and district as the	
Extern	demographics of the area will be altered.	
Probability	The impact will certainly occur (>75% chance of	
1 TODUSINIY	occurrence).	
	In the likely event that migrant workers as well as job	
Reversibility	seekers remain in the area after the construction phase in	
	the hope for employment during the operating phase, the	
	impact would be partly reversible.	
Irreplaceable loss of resources	The impact will not result in any loss of resources.	
Duration	The impact is rated as long term based on the likelihood that	
Duration	migrant workers will stay in the area for the life of the project.	
	Considering other renewable energy projects that are	
Cumulative effect	situated in the area, the impact would result in a significant	
	cumulative effect as it might attract several other migrant	
	workers	

Intensity/magnitude		cted to increase in the area thus of the area thus resulting in an
	impact of a medium intensity	•
	Prior to mitigation measu	res: The anticipated impact will
	result in a medium negative	effect.
Significance Rating	After mitigation measure	es: Considering the proposed
	mitigation measures, the remained the same.	intensity of the impact has
	Pre-mitigation impact rating	Post mitigation impact rating
Extent	2	2
Probability	4	3
Reversibility	2	2
Irreplaceable loss	1	1
Duration	3	3
Cumulative effect	4	3
Intensity/magnitude	2	1
Significance rating	-32 (Medium negative)	-30 (Medium negative)
Mitigation measures	• Developers should be open to local recruitment processes and be willing to offer some skills transfer during this phase of the project to ensure maximum local labour procurement. This will decrease the likelihood of	
	an influx of migrant work	kers.

Table 84: Impact of Increase in social pathologies associated with the influx of migrant labourers and job-seekers to the area

	Social pathologies: factors such as the deterioration in	
Environmental Parameter	health, increase in crime, prostitution, xenophobia and	
	drugs, etc.	
	Activities in the construction phase will attract job-seekers	
	and will involve the migration of construction workers to	
Issue/Impact/Environmental Effect/Nature	either the site or the surrounding town. The increase in the	
Ellectivature	number of construction workers is expected to cause a	
	further increase in social pathologies.	
Extent	The impact will affect the local area and district.	
	Considering the impacts that the already existing wind farms	
Probability	(Khobab & Loeriesfontein 2) have had on the Loeriesfontein	
Probability	community, the impact will certainly occur (>75% chance of	
	occurrence).	
	Impacts such as social ills are not defined to a particular area	
Reversibility	and tend to develop over long time periods. Therefore, if the	
	migrant workers choose to remain in the area after the	
	construction, the impact is rated as party reversible.	

	This impost will post likely	recult in a madarata increase in	
Irreplaceable loss of resources	This impact will most likely result in a moderate increase in the stock theft therefore this impact is rated to possibly result		
	in a marginal loss of resources. In the event that migrant workers remain in the area after the		
Duration	, i i i i i i i i i i i i i i i i i i i		
	construction period, the imp	,	
Cumulative effect	-	wable projects in the area, the	
	cumulative impact of increased social pathologies is		
	expected to be high.	pathologies is most likely to	
Intensity/magnitude		• •	
Intensity/magnitude	jeopardise the integrity of the area resulting in a medium intensity effect.		
	,	res: The anticipated impact will	
	-	cts and will require significant	
	mitigation measures to achieve an acceptable level of		
Significance Rating	impact.		
	After mitigation measures: The anticipated impact will be		
	reduced to a medium negative effect.		
	Pre-mitigation impact	Post mitigation impact rating	
	rating	Post miligation impact rating	
Extent	2	2	
Probability	4	3	
Reversibility	2	2	
Irreplaceable loss	2	2	
Duration	3	3	
Cumulative effect	4	3	
Intensity/magnitude	3	2	
Significance rating	-51 (High negative)	-30 (Medium negative)	
		s crippled by high levels of drug	
	and alcohol abuse through remedial intervention and		
	awareness programs		
Mitigation measures	• Introduce awareness campaigns for workers on the		
	dangers of substance abuse		
	Place more emphasis on the role of and need of a social		
	worker in the area		

Environmental Parameter	Basic services and social and economic infrastructure, water provision and adequate housing.	
Issue/Impact/Environmental Effect/Nature	The influx of jobseekers in the area will result in an increased demand for basic services, as well as social and economic infrastructure in the area. This will put pressure on the local municipality to ensure that the services are not further deteriorated.	
Extent	The impact will affect the local district	
Probability	The impact will certainly occur (>75% chance of occurrence).	

SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD Proposed Xha! Boom Wind Farm - Final Scoping Report Version No: 1

Reversibility	The impact is partly reversible.	
Irreplaceable loss of resources	The impact will not result in any loss of resources.	
Duration	construction period (± 2 years short-term period, however,	at least the duration of the ars), which will be extended to a it may remain for several years , thus the impact will have a
Cumulative effect	The demand for basic services and infrastructure is most likely to increase as more similar developments appear in the area, thus the cumulative impact is high.	
Intensity/magnitude	With the municipality already experiencing backlogs in housing and like services, the impact is rated as a medium-sized effect.	
Significance Rating	Prior to mitigation measures: The anticipated impact will have a medium negative effect and will require moderate mitigation measures. After mitigation measures: The anticipated impact will be reduced to a low negative effect. Pre-mitigation impact rating	
Extent	2	2
Probability	4	4
Reversibility	2	2
Irreplaceable loss	1	1
Duration	2	2
Cumulative effect	4	4
Intensity/magnitude	2	2
Significance rating	-30 (Medium negative)	-30 (Medium negative)
Mitigation measures	 Engage with the local authorities to inform them on the timeframes of the project and possible risks from a service delivery perspective. Where possible, assist the local municipality in ensuring that the quality of the social and economic infrastructure does not deteriorate by making use of social responsibility allocations. 	

Environmental Parameter	Formation of informal hospitality industry as a result of the
	increased demand for accommodation.
Issue/Impact/Environmental	In the event that construction workers do not reside on the
Effect/Nature	construction sites, local residents have identified an opportunity in
	providing accommodation for the construction workers and
	majority of them have resorted to transforming their backyards and
	garages into rooms available for monthly rentals.
Extent	The impact will affect the local area or district.

Probability	The impact will certainly occur (>7	5% chance of occurrence).
Reversibility	Considering projects similar to this one, some migrant workers and	
	job-seekers might remain in the ar	ea therefore the impact is partly
	reversible.	
Irreplaceable loss of resources	The impact will not result in the los	ss of any resources.
Duration	The impact will last for at least the duration of the construction	
	period (± 2 years), which will be e	extended to a short-term period,
	however, it may remain for severa	al more years if similar projects
	are developed in the area.	
Cumulative effect	In consideration of projects of a similar nature, the cumulative	
	impact is rated as high.	
Intensity/magnitude	In consideration of the dynamics that currently characterise the	
	existing wind farms, construction	workers have a preference of
	residing in town as opposed to	•
	resulting in increased demand for	
	town; thus, the impact is rated as I	
Significance Rating Prior to mitigation measures: The anticipated impac		• •
	medium negative effect and wi	Il require moderate mitigation
	measures.	
	After mitigation measures: No m	•
	Pre-mitigation impact rating	Pre-mitigation impact rating
Extent	2	2
Probability	4	4
Reversibility	2	2
Irreplaceable loss	1	1
Duration	2	2
Cumulative effect	4	4
Intensity/magnitude	3	3
Significance rating	+45 (Medium positive)	+45 (Medium positive)
Mitigation measures	No mitigation measures exist.	•

• Operation

Table 87: Impact of sustainable increase in GDP of the national and local economies through operation

 and maintenance activities

Environmental Parameter	GDP-R: The total value of all final goods and services produced in
	a region within a year.
Issue/Impact/Environmental	The operating phase of the wind farm will contribute to an increase
Effect/Nature	in production of the national economy.
Extent	The impact will affect the entire country.
Probability	The impact will certainly occur (>75% chance of occurrence).
Reversibility	The impact is irreversible as one cannot 'un-do' production.
Irreplaceable loss of resources	The impact will not result in the loss of any resources.

Page 203

Duration	The impact is rated as long t	The impact is rated as long term as it will last for the entire	
	operational life of the developm	operational life of the development therefore, it is rated as long	
	term.		
Cumulative effect	In consideration of the other p	planned project for the area, the	
	cumulative impact could be high	1.	
Intensity/magnitude	The impact will alter the econor	my of the entire community; it will	
	therefore, result in a medium-siz	zed effect.	
Significance Rating	Prior to mitigation measures:	Prior to mitigation measures: The anticipated impact will have a	
	moderate positive effect.	moderate positive effect.	
	After mitigation measures:	After mitigation measures: No mitigation measures exist to	
	increase the intensity of the imp	increase the intensity of the impact.	
	Pre-mitigation impact rating	Pre-mitigation impact rating	
Extent	4	4	
Probability	4	4	
Reversibility	4	4	
Irreplaceable loss	1	1	
Duration	3	3	
Cumulative effect	4	4	
Intensity/magnitude	2	2	
Significance rating	+40 (Medium positive)	+40 (Medium positive)	
Mitigation measures	No mitigation measures exist	No mitigation measures exist	

Table 88:	Sustainable	increase in	government	revenue stream
	oustainable		government	

Environmental Parameter	Government revenue: through the operations of the project, a	
	contribution will be made to the government revenue which will	
	indirectly improve the provision of basic services to the population.	
Issue/Impact/Environmental	The impact will mostly take place when there is an increase in the	
Effect/Nature	amount of tax on the salaries of salaries and wages of people, as	
	well as payment of company taxes.	
Extent	The impact will affect the entire country.	
Probability	The impact will certainly occur.	
Reversibility	Government will collect money in the form of tax and will utilise the	
	injection to improve the socio-economic standards of the	
	population, for this reason; the impact is rated as irreversible.	
Irreplaceable loss of resources	The impact will not result in the loss of any resources.	
Duration	The impact is rated as long term as it will last for the entire	
	operational life of the development; therefore, rated as long term.	
Cumulative effect	Considering the projects that are to be developed in the area, the	
	tax revenue will increase. The impact could be a medium-sized	
	effect.	
Intensity/magnitude	The impact will potentially alter the living conditions of the	
	population through government investment; thus, the impact is of	
	a medium-sized intensity.	
Significance Rating	Prior to mitigation measures: The anticipated impact will have	
	high positive effects.	

 SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD
 prepared by: SiVEST Environmental

 Proposed Xha! Boom Wind Farm - Final Scoping Report
 Version Net 4

	After mitigation measures: N	lo mitigation measures exist to
	increase the intensity of the impact.	
	Pre-mitigation impact rating	Pre-mitigation impact rating
Extent	4	4
Probability	4	4
Reversibility	4	4
Irreplaceable loss	1	1
Duration	3	3
Cumulative effect	3	3
Intensity/magnitude	3	3
Significance rating	+57 (High positive)	+57 (High positive)
Mitigation measures	No mitigation measures exist.	

Table 89: Impact of creation of long term employment in local and national economies through operation and maintenance activities

Environmental Parameter	Sustainable employment opportun	ities.	
Issue/Impact/Environmental Effect/Nature	Throughout the lifespan of the project, several people will receive employment.		
Extent	Will affect the local area and distric	xt.	
Probability	The impact will certainly occur (>7	5% chance of occurrence).	
Reversibility	The employment is expected to la	st for the entire life span of the	
	project upon which the impact is ra	ted as barely irreversible.	
Irreplaceable loss of resources	The impact will not result in any los	ss of resources.	
Duration	The impact and its effects is e	xpected to last for the entire	
	operational life of the development	resulting in a long-term effect.	
Cumulative effect	The cumulative impact of the proje	ect is expected to be high as a	
	number of people in the Hantam	economy will receive long term	
	employment.		
Intensity/magnitude	Although the operational phase promises long term employment,		
	in the context of the entire Hantam economy, the effect of the		
	impact is expected to medium-sized.		
Significance Rating	Prior to mitigation measures: The anticipated impact will have		
	moderate positive effects.		
	After mitigation measures: The anticipated impact will have		
	highly significant positive effects.		
	Pre-mitigation impact rating	Pre-mitigation impact rating	
Extent	2	2	
Probability	4	4	
Reversibility	3	3	
Irreplaceable loss	1	1	
Duration	3	3	
Cumulative effect	4	4	
Intensity/magnitude	2	2	
Significance rating	+34 (Medium positive)	+34 (Medium positive)	

SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD Proposed Xha! Boom Wind Farm - Final Scoping Report

Mitigation measures	Where possible, ensure that the created jobs are acquired by local
Miligation measures	people.

Table 90: Impact of skills develo	pment due to the creation of nev	v sustainable employment opportunities

	Skills development long term	knowledge transfer and skills	
Environmental Parameter	Skills development, long term knowledge transfer and skills development will take place as a result of the expected new		
	employment creation.		
	Individuals who have receive the long term employment in the		
Issue/Impact/Environmental			
Effect/Nature	operational activities of the project will gain skills and will be able to practice already existing skills.		
Extent			
Extern	Will affect the entire country.Considering the current skills base, the required skills may not be		
Duchability	-		
Probability	available locally and will need to	be sourced elsewhere thus the	
	impact will likely occur.		
Reversibility	The impact irreversible as once sk	filled are gained, they cannot be	
-	lost.		
Irreplaceable loss of resources	The impact will not result in the los		
Duration	Considering the duration of the ph		
Cumulative effect	The cumulative impact is rated as		
skills will arise from other projects.			
Intensity/magnitude	Considering the current skills base of local people, the intensity of		
intensity/magintade	the impact is expected to be low.		
	Prior to mitigation measures: The anticipated impact will		
Significance Rating	minor positive effect.		
Significance Rating	minor positive effect. After mitigation measures: The	anticipated impact will have a	
Significance Rating	•	anticipated impact will have a	
Significance Rating	After mitigation measures: The	e anticipated impact will have a Pre-mitigation impact rating	
Significance Rating Extent	After mitigation measures: The minor positive effect.		
	After mitigation measures: The minor positive effect. Pre-mitigation impact rating	Pre-mitigation impact rating	
Extent	After mitigation measures: The minor positive effect. Pre-mitigation impact rating 4	Pre-mitigation impact rating	
Extent Probability	After mitigation measures: The minor positive effect. Pre-mitigation impact rating 4 3	Pre-mitigation impact rating 4 3	
Extent Probability Reversibility	After mitigation measures: The minor positive effect. Pre-mitigation impact rating 4 3 4	Pre-mitigation impact rating 4 3 4	
Extent Probability Reversibility Irreplaceable loss	After mitigation measures: The minor positive effect. Pre-mitigation impact rating 4 3 4 1	Pre-mitigation impact rating4341	
Extent Probability Reversibility Irreplaceable loss Duration	After mitigation measures: The minor positive effect. Pre-mitigation impact rating 4 3 4 1 3 3	Pre-mitigation impact rating 4 3 4 1 3	
Extent Probability Reversibility Irreplaceable loss Duration Cumulative effect	After mitigation measures: The minor positive effect. Pre-mitigation impact rating 4 3 4 1 3 3 3	Pre-mitigation impact rating 4 3 4 1 3 3 3 3	
Extent Probability Reversibility Irreplaceable loss Duration Cumulative effect Intensity/magnitude	After mitigation measures: The minor positive effect. Pre-mitigation impact rating 4 3 4 1 3 3 1 +18 (Low positive)	Pre-mitigation impact rating4341331+18 (Low positive)	
Extent Probability Reversibility Irreplaceable loss Duration Cumulative effect Intensity/magnitude	After mitigation measures: The minor positive effect. Pre-mitigation impact rating 4 3 4 1 3 3 1 +18 (Low positive) • Contracts ensuring that know	Pre-mitigation impact rating4341331+18 (Low positive)wledge sharing and on-the-job	
Extent Probability Reversibility Irreplaceable loss Duration Cumulative effect Intensity/magnitude	After mitigation measures: The minor positive effect. Pre-mitigation impact rating 4 3 4 1 3 3 1 +18 (Low positive) Contracts ensuring that know training should be enforced as	Pre-mitigation impact rating4341331+18 (Low positive)	
Extent Probability Reversibility Irreplaceable loss Duration Cumulative effect Intensity/magnitude Significance rating	After mitigation measures: The minor positive effect. Pre-mitigation impact rating 4 3 4 1 3 3 1 +18 (Low positive) • Contracts ensuring that know training should be enforced as of the project.	Pre-mitigation impact rating 4 3 4 1 3 3 1 +18 (Low positive) wledge sharing and on-the-job a condition for the development	
Extent Probability Reversibility Irreplaceable loss Duration Cumulative effect Intensity/magnitude	After mitigation measures: The minor positive effect. Pre-mitigation impact rating 4 3 4 1 3 3 1 +18 (Low positive) Contracts ensuring that know training should be enforced as of the project. To ensure that skills are added	Pre-mitigation impact rating 4 3 4 1 3 3 1 +18 (Low positive) wledge sharing and on-the-job a condition for the development equately acquired, ensure that	
Extent Probability Reversibility Irreplaceable loss Duration Cumulative effect Intensity/magnitude Significance rating	After mitigation measures: The minor positive effect. Pre-mitigation impact rating 4 3 4 1 3 3 1 +18 (Low positive) Contracts ensuring that know training should be enforced as of the project. To ensure that skills are add there are additional training	Pre-mitigation impact rating 4 3 4 1 3 3 1 +18 (Low positive) wledge sharing and on-the-job a condition for the development equately acquired, ensure that programmes held during the	
Extent Probability Reversibility Irreplaceable loss Duration Cumulative effect Intensity/magnitude Significance rating	After mitigation measures: The minor positive effect. Pre-mitigation impact rating 4 3 4 1 3 3 1 +18 (Low positive) Contracts ensuring that know training should be enforced as of the project. To ensure that skills are add there are additional training	Pre-mitigation impact rating 4 3 4 1 3 3 1 +18 (Low positive) wledge sharing and on-the-job a condition for the development equately acquired, ensure that	

Table 91: Increased	household income
---------------------	------------------

Environmental Parameter	Household income: the result of a	households' member engaging
	in economic activity which has a d	
	of a household.	Ũ
Issue/Impact/Environmental	About 54% of the people in the municipality earn less than R3 200	
Effect/Nature	a month thus the operation of the	wind farm is expected to result
	in an injection in the salary of peo	ople so as to indirectly improve
	their standard of living.	
Extent	The impact will affect the local area	a and district.
Probability	The impact will certainly occur (>7	5% chance of occurrence).
Reversibility	The impact is irreversible.	
Irreplaceable loss of resources	The impact will not result in the los	s of any resources.
Duration	The impact will be relevant for the	e entire life span of the project,
	long term.	
Cumulative effect	Based on the current size of th	e district and local area, the
	cumulative impact is expected to be high.	
Intensity/magnitude	In Loeriesfontein, employment is currently dominated by the	
	informal sector opportunities, thus the provision of sustainable jobs	
	will significantly improve the living standards of local residents.	
Significance Rating	Prior to mitigation measures: The anticipated impact will have	
	significant positive effects.	
	After mitigation measures: The intensity of the impact remains	
	the same at a significant positive effect.	
	Pre-mitigation impact rating	Pre-mitigation impact rating
Extent	2	2
Probability	4	4
Reversibility	4	4
Irreplaceable loss	1	1
Duration	3	3
Cumulative effect	4	4
Intensity/magnitude	3	3
Significance rating	+54 (High positive)	+54 (High positive)
	Ensure that local labour is procured to maximise benefit to the local	
Mitigation measures	households.	

Table 92: Impact of Investment in the local community and economic development projects as part of
a Social Economic Development (SED) and Enterprise Development Plan (ED)

-	
Environmental Parameter	Investment in the local community
Issue/Impact/Environmental	SED and ED initiatives, as part of the Independent Power Producer
Effect/Nature	Procurement Programme (IPPPP); project owners are required to
	allocate a certain percentage of the projects' revenue towards
	community development.
Extent	The impact will affect the local district.

Probability	Investing into the local economy	/ is a government requirement	
	therefore the impact will certainly occur (>75% chance of		
	occurrence).		
Reversibility	Once the investments are injected into the economy, it can be		
	assumed that the impact will be irreversible.		
Irreplaceable loss of resources	The impact will not result in the loss of any resources.		
Duration	This impact is rated as long term as it will take place annually for		
	the duration of the project.		
Cumulative effect	The base-town for several of the other projects in the area is Loeriesfontein as well, thus the cumulative impact is high.		
Intensity/magnitude	The local district as well as Loeriesfontein town is in need of an		
	economic stimulus therefore bene	fits from the investment will have	
	a high intensity impact.		
Significance Rating	Prior to mitigation measures: The anticipated impact will have a significant positive effect.		
	After mitigation measures: After	r viable mitigation measures are	
	implemented, the anticipated impact will have a significant positive effect.		
	Pre-mitigation impact rating	Pre-mitigation impact rating	
E de st			
Extent	2	2	
Probability	4	2 4	
Probability Reversibility	4 4		
Probability Reversibility Irreplaceable loss	4 4 1	4 4 1	
Probability Reversibility Irreplaceable loss Duration	4 4	4 4	
Probability Reversibility Irreplaceable loss Duration Cumulative effect	4 4 1 3 4	4 4 1 3 4	
Probability Reversibility Irreplaceable loss Duration Cumulative effect Intensity/magnitude	4 4 1 3 4 3	4 4 1 3	
Probability Reversibility Irreplaceable loss Duration Cumulative effect	4 4 1 3 4	4 4 1 3 4	

Table 93: Impact of Improved standard of living of he	nouseholds directly or indirectly benefiting from
created employment opportunities	

Environmental Parameter	Improved standard of living.	
Issue/Impact/Environmental Effect/Nature	During the construction and operational phase of the project, indirect employment opportunities are created through the provision of services such as transport as well as accommodation which indirectly improves the living standards of the locals.	
Extent	The impact will affect the local area or district.	

 SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD
 prepar

 Proposed Xha! Boom Wind Farm - Final Scoping Report
 Version No: 1

Probability	This impact will certainly occur (>7	· · ·
	During the operational phase, people are expected to receive	
Reversibility	employment for the duration of the project thus the impact is barely	
	reversible.	
Irreplaceable loss of resources	The impact will not result in the loss of any resources.	
Duration	The impact is expected to last for the entire operational life of the	
Duration	project.	
Cumulative effect	With the development of similar pro	pjects in the area, the cumulative
	impact could be high.	
	Indirect employment opportunities	
Intensity/magnitude	high unemployment rate in Loeriesfontein town, therefore the	
	intensity of the impact is of a medi	
	Prior to mitigation measures: Th	ne anticipated impact will have a
	moderate positive effect.	
Significance Rating	After mitigation measures: After the implementation of ensuring	
	that residents of the local community are employed, the anticipated	
	impact will have significant positive effects.	
	Pre-mitigation impact rating	Pre-mitigation impact rating
Extent	2	2
Probability	2 4	2 4
Probability Reversibility	2 4 3	2 4 3
Probability	2 4 3 1	2 4 3 1
Probability Reversibility Irreplaceable loss Duration	2 4 3 1 3	2 4 3 1 3
Probability Reversibility Irreplaceable loss Duration Cumulative effect	2 4 3 1	2 4 3 1
Probability Reversibility Irreplaceable loss Duration	2 4 3 1 3	2 4 3 1 3
Probability Reversibility Irreplaceable loss Duration Cumulative effect	2 4 3 1 3 4	2 4 3 1 3 4
Probability Reversibility Irreplaceable loss Duration Cumulative effect Intensity/magnitude	2 4 3 1 3 4 2 +34 (Medium positive)	2 4 3 1 3 4 2
Probability Reversibility Irreplaceable loss Duration Cumulative effect Intensity/magnitude	2 4 3 1 3 4 2 +34 (Medium positive)	2 4 3 1 3 4 2 +34 (Medium positive)
Probability Reversibility Irreplaceable loss Duration Cumulative effect Intensity/magnitude	2 4 3 1 3 4 2 +34 (Medium positive) • Ensure that local labour is pro- the local households.	2 4 3 1 3 4 2 +34 (Medium positive)
Probability Reversibility Irreplaceable loss Duration Cumulative effect Intensity/magnitude Significance rating	 2 4 3 1 3 4 2 +34 (Medium positive) Ensure that local labour is protothe local households. Consultation with local authority 	2 4 3 1 3 4 2 +34 (Medium positive) cured to maximise the benefit to
Probability Reversibility Irreplaceable loss Duration Cumulative effect Intensity/magnitude Significance rating	 2 4 3 1 3 4 2 +34 (Medium positive) Ensure that local labour is protothe local households. Consultation with local authority 	2 4 3 1 3 4 2 +34 (Medium positive) cured to maximise the benefit to ties is essential so as to manage ensure that all eligible workers

Table 94: Impact of improved access to basic services and community services
--

Environmental Parameter	Access to basic services.	
Issue/Impact/Environmental Effect/Nature	The project will allocate a certain percentage of its revenue toward community development for the duration of its operational life. This will assist in addressing currently existing backlogs in the community and will therefore improve the access of the people to basic and community services.	
Extent	The impact will affect the local area or district.	
Probability	This impact will certainly occur (>75% chance of occurrence).	
Reversibility	The impact is irreversible.	
Irreplaceable loss of resources	The impact will not result in the loss of any resources.	

Duration	The impact is expected to last for the entire operational life of the		
Duration	project.	project.	
Cumulative effect	With the development of similar p	With the development of similar projects in the area, the cumulative	
Cumulative enect	impact could be high.	impact could be high.	
	The amount of funds that will be	The amount of funds that will be injected into the local community	
Intensity/magnitude	will be on an annual basis and th	will be on an annual basis and this will result in a significantly high	
	intensity of the impact.	intensity of the impact.	
	Prior to mitigation measures:	The anticipated impact will have a	
Significance Rating	significant positive effect.	significant positive effect.	
	After mitigation measures: No	mitigation measures exist that can	
	improve the intensity of the impa	improve the intensity of the impact.	
	Pre-mitigation impact rating	Pre-mitigation impact rating	
Extent	2	2	
Probability	4	4	
Reversibility	4	4	
Irreplaceable loss	1	1	
Duration	3	3	
Cumulative effect	4	4	
Intensity/magnitude	3	3	
Significance rating	+54 (High positive)	+54 (High positive)	
Mitigation measures	No mitigation measures exist.		

The following impacts associated with the proposed Xha! Boom Wind Farm can be listed as:

- Increased production and temporary stimulation of GDP-R during the construction phase;
- Employment creation during the construction phase;
- skills development due to the creation of new employment opportunities during the construction phase;
- Increased household income and improved standard of living during the construction phase;
- Investment in the local community and economic development projects as part of a Social Economic Development (SED) and Enterprise Development (ED) Plan during the construction phase;
- Increase in government revenue due to the capital investment during the construction phase;
- Change in demographics due to migration of workers from other areas and influx of jobseekers during the construction phase;
- Increase in social pathologies associated with the influx of migrant labourers and job-seekers to the area during the construction phase;
- Added pressure on basic services and social and economic infrastructure during the construction phase;
- Establishment of informal hospitality industry due to increased demand for accommodation during the construction phase;
- Sustainable increase in GDP of the national and local economies through operation and maintenance activities during the operational phase;
- Sustainable increase in government revenue stream during the operational phase;
- Creation of long term employment in local and national economies through operation and maintenance activities during the operational phase;

- Skills development due to the creation of new sustainable employment opportunities during the operational phase;
- Increased household income during the operational phase;
- Investment in the local community and economic development projects as part of a Social Economic Development (SED) and Enterprise Development (ED) Plan during the operational phase;
- Improved standard of living of households directly or indirectly benefiting from created employment opportunities during the operational phase; and
- Improved access to basic services and community services during the operational phase.

6.3 Identification of Mitigation Measures

6.3.1 Biodiversity

- Minimise development footprint within sensitive areas and ensure that final development layout takes account of areas identified as sensitive.
- Ensure that lay-down and other temporary infrastructure is within low sensitivity areas, preferably previously transformed areas if possible.
- Avoid sensitive faunal habitats such as drainage lines.
- A variety of avoidance and mitigation measures to reduce impact on fauna will need to be implemented during construction, including limiting impacts from construction staff and the operation of construction vehicles.
- Soil erosion plan to be part of the EMP.
- Rehabilitation of eroded areas on a regular basis.
- Alien management plan to be part of the EMP.
- Regular alien clearing where invasion occurs.
- Minimise the development footprint within the high sensitivity areas.
- There should be an integrated management plan for the development area during operation, which is beneficial to fauna and flora.
- Specific avoidance and mitigation may be required to reduce the impact on certain habitats of limited extent and high ecological or conservation significance

6.3.2 Avifauna

- Restrict the construction activities to the construction footprint area.
- Do not allow any access to the remainder of the property during the construction period.
- Measures to control noise and dust should be applied according to current best practice in the industry.
- Maximum used should be made of existing access roads and the construction of new roads should be kept to a minimum.
- A 300m exclusion zone should be implemented around the existing water points and pans where no construction activity or disturbance should take place.
- The recommendations of the specialist ecological study must be strictly adhered to.
- Maximum used should be made of existing access roads and the construction of new roads should be kept to a minimum.

- A 300m exclusion zone should be implemented around the existing water points and pans where no construction activity or disturbance should take place.
- Post-construction monitoring should be implemented to make comparisons with baseline conditions possible.
- If densities of key priority species are proven to be significantly reduced due to the operation of the wind farm, the management of the wind farm must be engaged to devise ways of reducing the impact on these species.
- Operational activities should be restricted to the plant area. Maintenance staff should not be allowed to access other parts of the property unless it is necessary for wind farm related work.
- A 300m no-go buffer is proposed around water points and pans as they serve as focal points for bird activity.
- Formal monitoring should be resumed once the turbines have been constructed, as per the most recent edition of the best practice guidelines (Jenkins et al. 2011). The exact scope and nature of the post-construction monitoring will be informed on an ongoing basis by the result of the monitoring through a process of adaptive management. The purpose of this would be (a) to establish if and to what extent displacement of priority species has occurred through the altering of flight patterns postconstruction, and (b) to search for carcasses at turbines.
- As an absolute minimum, post-construction monitoring should be undertaken for the first two years of operation, and then repeated again in year 5, and again every five years thereafter. The exact scope and nature of the post-construction monitoring will be informed on an ongoing basis by the results of the monitoring through a process of adaptive management.
- The minimum turbine tip height should be no less than 50m to reduce the risk of Red Lark mortality during display flight activity.
- Depending on the results of the carcass searches, a range of mitigation measures will have to be considered if mortality levels turn out to be significant, including selective curtailment of problem turbines during high risk periods if need be.
- If turbines are to be lit at night, lighting should be kept to a minimum and should preferably not be white light. Flashing strobe-like lights should be used where possible (provided this complies with Civil Aviation Authority regulations).
- Lighting of the wind farm (for example security lights) should be kept to a minimum. Lights should be directed downwards (provided this complies with Civil Aviation Authority regulations).
- The avifaunal specialist must approve the power line design to ensure that bird-friendly structures are used.

6.3.3 Bats

- Adhere to the sensitivity map during turbine placement. Blasting should be minimised and used only when necessary. A Bat Specialist should be consulted before blasting of a rocky cliff face or rocky cavernous area. The mitigation measures will reduce the impact blasting and earthworks will have on the environmental parameter, through avoiding sensitive areas.
- Avoid areas of high bat sensitivity and their buffers as well as preferably avoid areas of Moderate bat sensitivity and their buffers. Adhere to operational mitigation measures described in Section 7 of this report. An operational phase bat monitoring study must be implemented as soon as the facility has been constructed.
- Utilize lights with wavelengths that attract less insects (low thermal/infrared signature). If not required for safety or security purposes, lights should be switched off when not in use or equipped

with passive motion sensors. The mitigation measures will reduce the likelihood of certain bat species being favoured.

 Keep to designated areas when storing building materials, resources, turbine components and/or large vehicles and keep to designated roads with all large vehicles. Damaged areas not required after decommissioning should be rehabilitated by an experienced vegetation succession specialist. The mitigation measures will reduce the degree of habitat loss.

6.3.4 Surface Water

- Location of the Lay-down Area The location of the lay-down area must not be within 50m of any of the identified surface water resources. Therefore, the location of the construction lay-down area must not be within any of the associated buffer zones by implication. Additionally, the storage of materials and machinery must also not be within 50m of any of the identified surface water resources.
- Preventing Physical Degradation of Surface Water Resources Surface water resources are to be designated as "highly sensitive areas". Vehicle access is not to be allowed in the highly sensitive areas. Internal access roads are not to be routed in any surface water resources. Should this be required, environmental authorisation and a water use license will be required before construction takes place and all mitigation measures are to be implemented accordingly.
- Limiting Damage to Surface Water Resources Ideally, to minimise any impact to surface water resources, the proposed development (including buildings, wind turbines and all associated infrastructure) should seek to avoid all surface water resources as far as possible.

Where this is not possible a single access route or "Right of Way" (RoW) is to be established through or in the desired construction area in the surface water resource(s). The environmentally authorized and license permitted construction area is to be demarcated and made visible. The establishment of the RoW likewise must be demarcated and made visible. The width of the RoW must be limited to the width of the vehicles required to enter the surface water resource (no more than a 3m width). An area around the locations of the proposed development buildings, wind turbines and any other associated infrastructure will be required in order for construction vehicles and machinery to operate/maneuver, only where required. This too must be limited to the smallest possible area and made visible by means of demarcation.

Where crossings are required, only vehicle tracks should be made through the surface water resources. No crossings however are to be made through the natural depression wetlands. RoW areas through surface water resources should not be completely cleared of vegetation, only the tracks should be cleared. Vegetation should otherwise be trimmed appropriately such that vehicles can move through RoW areas adequately. No structures will need to be placed in the RoW crossing areas through surface water resources since these systems are ephemeral. No bog mats or gravel running tracks would therefore be required. No surface water resources are to be crossed during or directly after a rainfall event.

Construction workers are only allowed in the designated construction areas of the proposed development and not into the surrounding surface water resources. Highly sensitive areas are to

be clearly demarcated prior to the commencement of construction and no access beyond these areas is to be allowed unless in RoW areas.

 Preventing Soil Contamination – No vehicles are to be allowed in the highly sensitive areas unless authorised. Should vehicles be authorized in highly sensitive areas, all vehicles and machinery are to be checked for oil, fuel or any other fluid leaks before entering the required construction areas. Should there be any oil, fuel or any other fluid leaks, vehicles are not to be allowed into surface water resources.

All vehicles and machinery must be regularly serviced and maintained before being allowed to enter the construction areas. No fuelling, re-fuelling, vehicle and machinery servicing or maintenance is to take place in the highly sensitive areas.

Sufficient spill contingency measures must be available throughout the construction process. These include, but are not limited to, oil spill kits to be available, fire extinguishers, fuel, oil or hazardous substances storage areas must be bunded to prevent oil or fuel contamination of the ground and/or nearby surface water resources.

 Minimising Human Physical Degradation of Sensitive Areas – Construction workers are only allowed in designated construction and RoW areas where the environmental authorisation and the relevant water use license is obtained where and if required. The highly sensitive areas are to be clearly demarcated no access into these areas are to be allowed unless authorised.

No animals on the construction site or surrounding areas are to be hunted, captured, trapped, removed, injured, killed or eaten by construction workers or any other project team members. Should any party be found guilty of such an offence, stringent penalties should be imposed. The appointed Environmental Control Officer (ECO) or suitably qualified individual may only remove animals, where such animals (including snakes, scorpions, spiders etc.) are a threat to construction workers. The ECO or appointed individual is therefore to be contacted should removal of any fauna be required during the construction phase. Animals that cause a threat and need to be removed may not be killed. Additionally, these animals are to be relocated outside the RoW, within relative close proximity where they were found

No "long drop" toilets are allowed on the study site. Suitable temporary chemical sanitation facilities are to be provided. Temporary chemical sanitation facilities must be placed at least 100 meters from any surface water resource(s) where required. Temporary chemical sanitation facilities must be checked regularly for maintenance purposes and cleaned often to prevent spills.

No water is to be abstracted unless a water use license is granted for specific quantities for a specific water resource.

No hazardous or building materials are to be stored or brought into the highly sensitive areas. Should a designated storage area be required, the storage area must be placed at the furthest location from the highly sensitive areas. Appropriate safety measures as stipulated above must be implemented. No cement mixing is to take place in a surface water resource. In general, any cement mixing should take place over a bin lined (impermeable) surface or alternatively in the load bin of a vehicle to prevent the mixing of cement with the ground. Importantly, no mixing of cement directly on the surface is allowed in the highly sensitive areas.

- Strategic Positioning of Wind Turbines, Buildings and other Linear Infrastructure -Preferably all wind turbines, buildings and infrastructure should be placed at least 50m from any surface water resource as far as practically possible. This will significantly reduce the potential impact on surface water resources. Where this is not possible, more intense mitigation measures will be required as stipulated below.
- **Obtaining Relevant Authorisations and Licenses** Before any construction or removal of soils • and vegetation in any delineated surface water resources is undertaken, the relevant water use license and environmental authorisation is to be obtained and conditions adhered to.
- Limiting Damage to Surface Water Resources Construction must be limited to the authorized • RoW areas where applicable.
- Limiting Removal of Excavated Soils Should the necessary authorisations (water use license, environmental authorisation etc.) be obtained for the proposed development to be placed in surface water resources, excavated topsoils should be stockpiled separately from subsoils so that it can be replaced in the correct order for rehabilitation purposes post-construction. Soils removed from surface water resources must only be removed if absolutely required. Furthermore, any removed soils and vegetation that are not required should be taken to a registered landfill site that has sufficient capacity to assimilate the spoil. The topsoil is to be used for rehabilitation purposes and should not be removed unless there is surplus that cannot be utilised. It is important that when the soils are re-instated, the subsoils are to be backfilled first followed by the topsoil. The topsoil contains the natural seedbank from which the affected surface water resources or the associated buffer zone can naturally rehabilitate.

Where the soils are excavated from the sensitive areas, it is preferable for them to be stockpiled adjacent to the excavation pit to limit vehicle and any other movement activities around the excavation areas.

- Preventing Pollution Impacts Any cement mixing should take place over a bin lined (impermeable) surface or alternatively in the load bin of a vehicle to prevent the mixing of cement with the ground of the surface water resource. Importantly, no mixing of cement directly on the surface is allowed in the construction and RoW areas in surface water resources.
- Protection of Stockpiled Soils Stockpiled soils will need to be protected from wind and water erosion. Stockpiled soils are not to exceed a 3m height and are to be bunded by suitable materials. Stacked bricks surrounding the stockpiled soils can be adopted. Alternatively, wooden planks pegged around the stockpiled soils can be used.
- Rehabilitation of RoW Areas Ideally, the affected RoW zones in the sensitive areas must be reinstated with the soils removed from the surface water resource(s), and the affected areas must be

levelled, or appropriately sloped and scarified to loosen the soil and allow seeds contained in the natural seed bank to re-establish. However, given the aridity of the study area, it is likely that vegetation recovery will be slow. Rehabilitation areas will need to be monitored for erosion until vegetation can re-establish where prevalent. If affected areas are dry and no vegetation is present, the soil is to be re-instated and sloped.

 Preventing Increased Run-off and Sedimentation Impacts – Vegetation clearing should take place in a phased manner, only clearing areas that will be constructed on immediately. Vegetation clearing must not take place in areas where construction will only take place in the distant future.

An appropriate storm water management plan formulated by a suitably qualified professional must accompany the proposed development to deal with increased run-off in the designated construction areas.

In general, adequate structures must be put into place (temporary or permanent where necessary in extreme cases) to deal with increased/accelerated run-off and sediment volumes. The use of silt fencing and potentially sandbags or hessian "sausage" nets can be used to prevent erosion in susceptible construction areas. Grass blocks on the perimeter of the wind turbine hard stand areas and building structure footprints can also be used to reduce run-off and onset of erosion. Where required more permanent structures such as attenuation ponds and gabions can be constructed if needs be, however this is unlikely given the study area. All impacted areas are to be adequately sloped to prevent the onset of erosion.

 Minimising Vehicle Damage to the Surface Water Resources – Potential impacts can be avoided by planning and routing of access / service roads outside of and away from all surface water resources and the associated buffer zones.

Where access through surface water resources are unavoidable and are absolutely required, it is recommended that any road plan and associated structures (such as stormwater flow pipes, culverts, culvert bridges etc.) be submitted to the relevant environmental and water departments for approval prior to construction.

Internal access and services roads authorised in sensitive areas will have to be regularly monitored and checked for erosion. Monitoring should be conducted once every month. Moreover, after short or long periods of heavy rainfall or after long periods of sustained rainfall the roads will need to be checked for erosion. Rehabilitation measures will need to be employed should erosion be identified.

Where erosion begins to take place, this must be dealt with immediately to prevent significant erosion damage to the surface water resources. Should large scale erosion occur, a rehabilitation plan will be required. Input, reporting and recommendations from a suitably qualified wetland / aquatic specialist must be obtained in this respect should this be required.

Any hardstand area or building within 50m proximity to a surface water resource must have energy dissipating structures in an appropriate location to prevent increased run-off entering adjacent areas or surface water resources. This can be in the form of hard concrete structures or soft engineering structures (such as grass blocks for example).

Alternatively, a suitable operational storm water management plan can be compiled and implemented that accounts for the use of appropriate alternative structures or devices that will prevent increased run-off and sediment entering adjacent areas or surface water resources, thereby also preventing erosion. This must be submitted to the relevant environmental and water authority for approval, if undertaken.

6.3.5 Soils and Agricultural Potential

- Implement an effective system of run-off control, where it is required, that collects and safely
 disseminates run-off water from all hardened surfaces and prevents potential down slope erosion.
 Any occurrences of erosion must be attended to immediately and the integrity of the erosion control
 system at that point must be amended to prevent further erosion from occurring there. This should
 be in place and maintained during all phases of the development.
- Maintain where possible all vegetation cover and facilitate re-vegetation of denuded areas throughout the site, to stabilize the soil against erosion.
- If an activity will mechanically disturb below surface in any way, then any available topsoil should first be stripped from the entire surface to be disturbed and stockpiled for re-spreading during rehabilitation.
- Topsoil stockpiles must be conserved against losses through erosion by establishing vegetation cover on them.
- Dispose of all subsurface spoils from excavations where they will not impact on undisturbed land.
- During rehabilitation, the stockpiled topsoil must be evenly spread over the entire disturbed surface.
- Erosion must be controlled where necessary on topsoiled areas.
- Minimize road footprint and control vehicle access on approved roads only.
- Control dust as per standard construction site measures which may include damping down with water or other appropriate and effective dust control measures. Maintain where possible all vegetation cover and facilitate re-vegetation of denuded areas throughout the site.
- Control dust as per standard construction site practice.
- Implement effective spillage and waste management system.

6.3.6 Noise

The following general statements are included in the Noise Specialist report for the developer to note, and include:

- Ensure that noise as a component is included in the induction of employees and contractors, and how their activities and actions can impact on residents in the area (reverse alarms and reversing close to dwellings, driving fast past residential dwellings at night, maintenance of equipment). All contractors and employees should receive this induction.
- Good public relations are essential. At all stages surrounding receptors should be informed about the sound generated by wind turbines. The information presented to stakeholders should be factual and should not set unrealistic expectations. It is counterproductive to suggest that the wind turbines will be inaudible, or to use vague terms like "quiet". Modern wind turbines produce a sound due to the aerodynamic interaction of the wind with the turbine blades, audible as a "swoosh", which can

be heard at some distance from the turbines. The magnitude of the sound will depend on a multitude of variables and will vary from day to day and from place to place with environmental and operational conditions. Similarly, potential annoyance levels have been linked to visibility and audibility. Audibility is distinct from the sound level, because it depends on the relationship between the sound level from the wind turbines and the ambient background sound level and character.

- Community involvement needs to continue throughout the project. Annoyance is a complicated
 psychological phenomenon; as with many industrial operations, expressed annoyance with sound
 can reflect an overall annoyance with the project, rather than a rational reaction to the sound itself.
 Wind projects offer a benefit to the environment and the energy supply for the greater population,
 and offer economic benefits to the land owners leasing installation sites to the wind farm. A positive
 community attitude throughout the greater area should be fostered, particularly with those residents
 near the wind farm, to ensure they do not feel that advantage have been taken of them.
- The developer must implement a line of communication (i.e. a helpline where complaints could be lodged. All potential sensitive receptors should be made aware of these contact numbers. The wind farm should maintain a commitment to the local community and respond to concerns in an expedient fashion. Sporadic and legitimate noise complaints could develop. For example, sudden and sharp increases in sound levels could result from mechanical malfunctions or perforations or slits in the blades. Problems of this nature can be corrected quickly, and it is in the developer's interest to do so.

Specific conditions are defined below for the construction phase (noise impact of medium significance), with no specific conditions for the operational phase (noise impact of low significance).

Construction Phase:

The significance of potential noise impacts during the construction phase is **medium** and mainly relates to the construction of the access roads as well as construction traffic. While the access roads were not indicated, these findings are based on the location of existing roads.

General mitigation measures to reduce residual risk:

- Confirm with the residents in the area when they will be using their dwellings. Plan construction
 activities close to their dwellings when they are not at their houses. Construct the access roads
 close to their dwellings during a period when receptors are not using their dwellings.
- Locate contractors camp and storage areas at locations where construction traffic will pass occupied dwellings minimally.
- Relocate access roads further from houses. To minimize noise levels below a low significance, ensure that roads (or grid lines) are further than 220m from dwellings used for residential purposes during the construction period if only daytime construction activities are proposed. Due to the low ambient sound levels, it is highly recommended that no construction activities are allowed within 580m from occupied dwellings if night-time construction activities are anticipated. This includes construction of roads, power lines or construction of wind turbines.
- Ideally, do not allow construction traffic to drive past dwellings used for residential purposes at night. If people, material or equipment must be moved at night, no traffic should be allowed closer than 250m from receptors. Minimize night-time traffic as much as possible. If significant traffic (more than 10 vehicles per hour) is anticipated at night, access roads must be located further than 580m from receptors.

Operational Phase:

The noise impact is considered to be of a low significance for the surrounding receptors for the operation of the wind farm as well as the cumulative situation. Mitigation is not required and not recommended.

Special Conditions:

Mitigation options that should be included in the EMPr:

- Confirm with the residents in the area when they will be using their dwellings. Plan construction
 activities close to their dwellings when they are not at their houses. Construct the access roads
 close to their dwellings during a period when receptors are not using their dwellings.
- Locate contractor's camp and storage areas at locations where minimal construction traffic will pass occupied dwellings.

Special conditions that should be included in the Environmental Autorisation (EA):

- The potential noise impact must again be evaluated should the layout be changed where any wind turbines are located closer than 1,000m from a confirmed NSD.
- The developer must investigate any reasonable and valid noise complaint if registered by a receptor staying within 2,000m from location where construction activities are taking place or operational wind turbine.
- No access roads should be developed closer than 250m from dwellings that will be occupied during the construction period.

6.3.7 Visual

- Carefully plan to reduce the construction period.
- Minimise vegetation clearing and rehabilitate cleared areas as soon as possible.
- Maintain a neat construction site by removing rubble and waste materials regularly.
- Make use of existing gravel access roads where possible.
- Ensure that dust suppression techniques are implemented on all access roads.
- All reinstated cable trenches should be re-vegetated with the same vegetation that existed prior to the cable being laid.
- Carefully plan to reduce the construction period.
- Minimise vegetation clearing and rehabilitate cleared areas as soon as possible.
- Maintain a neat construction site by removing rubble and waste materials regularly.
- Make use of existing gravel access roads where possible.
- Ensure that dust suppression techniques are implemented on all access roads
- Where possible, fewer but larger turbines with a greater output should be utilised rather than a larger number of smaller turbines with a lower capacity.
- Light fittings for security at night should reflect the light toward the ground and prevent light spill.
- Ensure that dust suppression techniques are implemented on all access roads.
- Light fittings for security at the on-site 132kV substation at night should reflect the light toward the ground and prevent light spill.
- The operations and maintenance buildings should not be illuminated at night.

- If overhead power lines are required, align power lines to run parallel to existing power lines and other linear impacts, where possible.
- Bury cables underground where possible.
- The operation and maintenance building should be painted with natural tones that fit with the surrounding environment. Non-reflective surfaces should be utilised where possible.
- Ensure that dust suppression techniques are implemented on all access roads.
- Select the alternatives that will have the least impact on visual receptors.

6.3.8 Heritage

- Recommended mitigation of the inevitable damage and destruction of fossil within the proposed development area would involve the surveying, recording, description and collecting of fossils within the development footprint by a professional palaeontologist. This work should take place after initial vegetation clearance has taken place but *before* the ground is levelled for construction
- Impacts on fossil heritage are generally irreversible. Well-documented records and further
 palaeontological studies of any fossils exposed during construction would represent a positive
 impact from a scientific perspective. The possibility of a negative impact on the palaeontological
 heritage of the area can be reduced by the implementation of adequate damage mitigation
 procedures. If damage mitigation is properly undertaken the benefit scale for the project will lie
 within the beneficial category. Not deemed necessary as the Allanridge Formation is unfossiliferous.
- A walk down of the final layout to determine if any significant sites will be affected.
- Monitor find spot areas if construction is going to take place through them.
- A management plan for the heritage resources needs then to be compiled and approved for implementation during construction and operations. Possible surface collections for sites with a medium to high significance as well as conducting a watching brief by heritage practitioner during the construction phase.
- A walk down of the final approved layout will be required before construction commence;
- Any heritage features of significance identified during this walk down will require formal mitigation or where possible a slight change in design could accommodate such resources.
- A management plan for the heritage resources needs then to be compiled and approved for implementation during construction and operations.

6.3.9 Socio-Economic

- Drafting legal and binding enforcements stipulating that majority of the unskilled positions in the project where possible be allocated to local labourers.
- Where possible, subcontract to local construction companies.
- Consultation with local authorities is essential so as to manage job creation expectations and ensure that all eligible workers in the primary study area are informed of the opportunities.
- Contracts ensuring that on-the-job training is included and enforced as a condition for the development of this project.
- To improve the chances of skills development during the construction phase, contractors are encouraged to provide learner-ships and encourage further knowledge sharing.
- Recruit local labour as far as possible so as to ensure that the benefits accrue to local households within the community

- Employ labour-intensive methods as far as feasible in the construction phase.
- Where possible, sub-contract to local companies.
- It is recommended that the proponent/project owner establishes a relationship with the local authorities such as the Hantam LM so as to ensure that the SED & ED initiative that are invested into are aligned with the particular and relevant needs of the Loeriesfontein or similar rural community/ies.
- The government should find a way to monitor and evaluate the compliance of the proponent to the requirement of investing into a local community.
- Developers should be open to local recruitment processes and be willing to offer some skills transfer during this phase of the project to ensure maximum local labour procurement. This will decrease the likelihood of an influx of migrant workers.
- Assist local communities crippled by high levels of drug and alcohol abuse through remedial intervention and awareness programs
- Introduce awareness campaigns for workers on the dangers of substance abuse
- Place more emphasis on the role of and need of a social worker in the area
- Engage with the local authorities to inform them on the timeframes of the project and possible risks from a service delivery perspective.
- Where possible, assist the local municipality in ensuring that the quality of the social and economic infrastructure does not deteriorate by making use of social responsibility allocations.
- Where possible, ensure that the created jobs are acquired by local people.
- Contracts ensuring that knowledge sharing and on-the-job training should be enforced as a condition for the development of the project.
- To ensure that skills are adequately acquired, ensure that there are additional training programmes held during the construction phase to prepare them for the next phase; operational.
- Ensure that local labour is procured to maximise benefit to the local households.
- Consultation with local authorities is essential so as to manage job creation expectations and ensure that all eligible workers in the primary study area are informed of the opportunities.

6.3.10 Geotechnical

- Material for construction purposes must where possible be sourced from site to reduce costs;
- Water should be stored on site so that it can be readily available for use.
- A detailed Geotechnical and Electrical investigation will be required.
- A detailed soil chemical analysis and soil resistivity test will also be required.

6.3.11 Traffic

Even though the traffic generated would not be significant, the following requirements should still be met by the developer during the construction phase:

- All abnormal loads must be transport under a permit;
- A route study be undertaken to confirm the most appropriate route to site;
- Dust suppression techniques should be utilised to reduce the impact on air quality for the surrounding area;

 A Traffic Management Plan must be prepared once the Project advances to the detailed design phase. This plan should ensure that vehicles arrive in a dispersed manner throughout the day to reduce the impact to other road users. The plan should also promote the use of car sharing, especially from Loeriesfontein and the construction camp. Methods to improve driver safety should also be outlined, e.g. the use of speed cameras or Average Speed Over Distance (ASOD) cameras along particular sections such as the R358 to Loeriesfontein.

6.4 Assessment of Cumulative Impacts

The area has seen a notable interest from developers of various renewable energy projects, which could be associated with the energy resource potential found in the region, proximity to the existing sub-station and its evacuation capacity, as well as other factors. Such developments, whether already approved or only proposed, need to be considered as they have the potential to create numerous cumulative impacts, whether positive or negative, if implemented. The potential cumulative impact of the proposed wind facility in combination with other renewable energy facilities in the area will be identified and assessed per environmental aspect and mitigation measures will be identified to address the cumulative impact, where possible. Cumulative impacts will also be rated as part of the impact rating system and used to determine the significance of the impacts.

The proposed renewable energy developments identified in the vicinity of the Xha! Boom Wind Farm are identified in **Table 95** and shown in **Figure 41** below.

Development	Current status of EIA/development	Proponent	Capacity	Farm details
Dwarsrug Wind Farm	Environmental Authorisation issued	Mainstream Renewable Power		Remainder of the Farm Brak Pan 212
Graskoppies Wind Farm	EIA ongoing	Mainstream Renewable Power	235MW	Portion 2 of the Farm Graskoppies No 176 & Portion 1 of the Farm Hartebeest Leegte No 216
Hartebeest Leegte Wind Farm	EIA ongoing	Mainstream Renewable Power	235MW	Remainder of the Farm Hartebeest Leegte No 216
Hantam PV Solar Energy Facility	Environmental Authorisation issued / Approved under RE IPPPP	Solar Capital (Pty) Ltd	Up to 525MW	Remainder of the Farm Narosies 228
lthemba Wind Farm	EIA ongoing	Mainstream Renewable Power	235MW	Portion 2 of the Farm Graskoppies No 176 &

Table 95: Renewable energy developments proposed within a 55km radius of the Xha! Boom Wind
 Farm study site

prepared by: SiVEST Environmental

Khobab Wind Farm Kokerboom 1 Wind Farm	Under Construction Environmental Impact Assessment (EIA) underway	Mainstream Renewable Power Business Venture Investments No. 1788 (Pty) Ltd (BVI)	140MW 240MW	Portion 1 of the Farm Hartebeest Leegte No 216 Portion 2 of the Farm Sous 226 Remainder of the Farm Leeuwbergrivier No. 1163 & Remainder of the Farm Kleine Rooiberg No. 227	
Kokerboom 2 Wind Farm	Environmental Impact Assessment (EIA) underway	Business Venture Investments No. 1788 (Pty) Ltd (BVI)	Remainder of the Farm Springbok Pan No. 1164 & Remainder of the Farm Springbok Tand No. 215		
Loeriesfontein 2 Wind Farm	Environmental Authorisation issued/Approved under RE IPPPP	Mainstream Renewable Power	140MW	Portions 1& 2 of the V Farm Aan de Karree Doorn Pan No 213	
Loeriesfontein PV3 Solar Energy Facility	Environmental Authorisation issued	Mainstream Renewable Power	100MW	Portion 2 of the Farm Aan de Karree Doorn Pan No 213	
PV Solar Energy Facility	Environmental Authorisation issued	Mainstream Renewable Power	100MW	Portion 2 of the Farm Aan de Karree Doorn Pan 213	
PV Solar Power Plant	Environmental Authorisation issued	BioTherm Energy	70MW	Portion 5 of the Farm Kleine Rooiberg 227	
Wind farm	Environmental Authorisation issued, however the project is no longer active.	Mainstream Renewable Power	50MW	Portion 1 of the Farm Aan de Karree Doorn Pan 213	

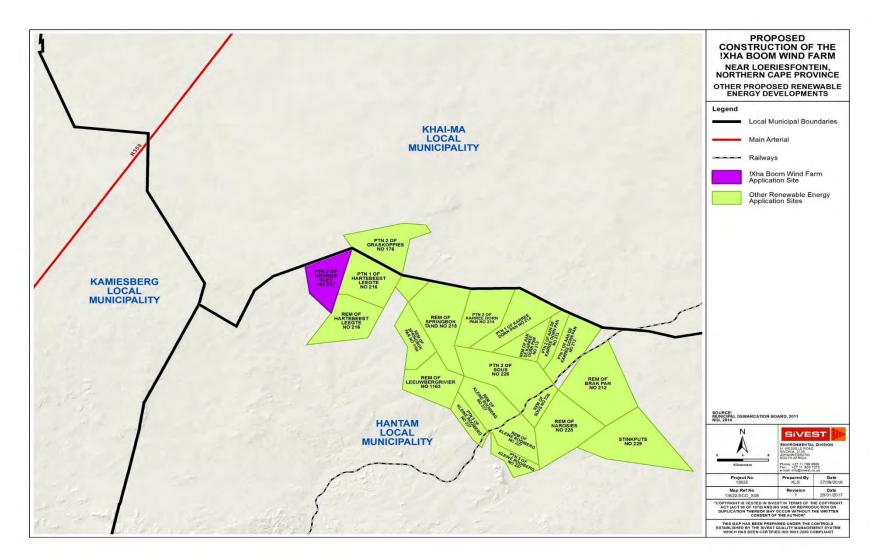


Figure 41: Renewable energy facilities proposed within a 55km radius of the Xha! Boom Wind Farm application site

In order to identify potential fatal flaws, each specialist (where necessary) has identified and addressed the potential cumulative impact of the proposed development during the scoping phase impact assessment. It should however be noted that only some of the scoping phase specialist assessments rated the significance of the potential cumulative impacts associated with the proposed development using the significance rating methodology. The significance of the cumulative impacts associated with propsoed development will however be rated using the significance rating methodology. The significance rating methodology in all the EIA phase specialist assessments. This will be included in the DEIAr. In addition, the EIA phase specialist assessments will also undertake a detailed assessment of cumulative impacts, including a review of other specialist studies conducted for renewable energy projects in the area. The recommendations contained in the specialist reports will be reflected in the mitigation measures provided in the DEIAr and EMPr. This will also be included in the DEIAr.

The potential cumulative impacts which were identified and addressed in the scoping phase specialist assessments are addressed in more detail in the sections below.

CUMULATIVE IMPACTS AND LOSS OF BROAD-SCALE CONNECTIVITY		
Environmental Parameter	Broad-scale ecological processes	
Issue/Impact/Environmental Effect/Nature	Transformation and presence of the facility will contribute to cumulative impacts on broad-scale ecological processes.	
Extent	The extent of the impact will be restricted the wind farm site and immediate environment as such would be largely local in nature.	
Probability	This impact is highly likely to occur due to the presence of the facility.	
Reversibility	This impact is not highly reversible as it would persist for the lifetime of the facility, but could be largely reduced thereafter.	
Irreplaceable loss of resources	It is not likely that there would be significant irreplaceable loss of resources.	
Duration	This impact would persist for the lifespan of the facility.	
Cumulative effect	The development would contribute to cumulative impacts on the area, and while the contribution of a single facility would be low, there are several facilities in the area and so overall cumulative impacts are likely to be moderate.	
Intensity/magnitude	The intensity of the impact would be moderate to high, depending on where and how much vegetation was cleared.	
Significance RatingDue to the relatively low contribution of the developmentSignificance Ratingthe low overall current level of impact in the asignificance of this impact is likely to be moderate to		

6.4.1 Biodiversity

SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD Proposed Xha! Boom Wind Farm - Final Scoping Report Version No: 1

CUMULATIVE IMPACTS	AND LOSS OF BROAD-SCA	
	Pre-mitigation impact rating	Post mitigation impact rating
Extent	2	2
Probability	4	4
Reversibility	2	2
Irreplaceable loss	2	1
Duration	3	3
Cumulative effect	3	2
Intensity/magnitude	3	2
Significance rating	-48 (medium negative)	-28 (low negative)
Mitigation measures	 Mitigation measures to reduce residual risk or enhance opportunities: 1) Minimise the development footprint within the high sensitivity areas. 2) There should be an integrated management plan for the development area during operation, which is beneficial to fauna and flora. 3) Specific avoidance and mitigation may be required to reduce the impact on certain habitats of limited extent and high ecological or conservation significance 	

6.4.2 Avifauna

Below is a summary of the typical threats currently facing avifauna in the Karoo environment (Marnewick *et al.* 2015):

Overgrazing

This results in a depletion of palatable plant species, erosion, and encroachment by Karoo shrubs. The result is loss of suitable habitat and a decrease in the availability of food for large terrestrial birds.

Poisoning

Strychnine poison was used extensively in the past to control damage-causing predators, such as Black-backed Jackal (*Canis mesomelas*) and Caracal (*Caracal caracal*), and reduced scavenging raptor populations. The use of poison may be continuing, and the potential impacts on threatened raptor species has not been confirmed or quantified.

Road-kills

Many birds are commonly killed on roads, especially nocturnal species such as Spotted Eagle-Owl.

Renewable energy developments

Several wind and solar developments have been approved for development within a 40km radius around Helios MTS. The combined footprint of these proposed developments is approximately 28 299 hectares⁷. This has implications for several priority species, both in terms of collision mortality for some species, especially raptors, and displacement due to permanent habitat transformation, which affects most of the priority species to some degree.

Powerlines

Numerous existing and new power lines are significant threats to large terrestrial priority species in the Karoo. Power lines kill substantial numbers of all large terrestrial bird species in the Karoo, including threatened species such as Karoo Korhaan, Kori Bustard and Ludwig's Bustard (Jenkins *et al.* 2010; Shaw, J. 2013) There is currently no completely effective mitigation method to prevent collisions.

Climate change

Climate change scenarios for the region predict slightly higher summer rainfall by 2050, and increased rainfall variability. Droughts are expected to become more severe. The climate change is predicted to have both positive and negative consequences for priority species. Increased summer rainfall could improve survival, and conversely drought years can lower long-term average survival. Large, mainly resident species dependent on rainfall are also more vulnerable to climate change. This would include the slow-breeding Martial Eagle, which also exhibit extended parental care. Severe hailstorms kill many priority species and could become more frequent.

Shale gas fracking

There is a potential threat of shale gas fracking throughout the Karoo. Populations of bird species may be locally reduced through disturbance caused by lights, vibration, vehicles and dust, and may be affected by pollutants in ponds containing contaminated water produced by returned fracking fluids.

Persecution

Although it is difficult to prove, the direct persecution of raptors such as Verreaux's Eagle and Martial Eagle for stock predation is still taking place (R. Visagie pers. comm).

For a systematic exposition of the expected cumulative impacts of the existing renewable energy projects and the Xha! Boom Wind Farm on priority species within a 40km radius around Helios MTS see **Table 97** below.

⁷ In the case of projects already authorised or under construction, the actual infrastructure footprint (and not the land parcel size) was considered. This information was obtained through internet searches. In the case of projects currently undergoing an environmental impact assessment process, the size of the land parcel was used as the actual footprint size has as yet not been finalised.

SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD
 prepared by: SiVEST Environmental

 Proposed Xha! Boom Wind Farm - Final Scoping Report
 prepared by: SiVEST Environmental

					~ 0		
Priority species	Level of current and future impacts on species	Susceptibility to renewable energy impacts	Preferred habitat within a 40km radius around Helios MTS	Approximate size of preferred habitat within a 40km radius around Helios MTS (ha)	Extent of habitat potentially affected by the existing renewable applications and the Ithemba WEF (ha)	Expected combined cumulative impact of Ithemba WEF and existing renewable applications: Pre_ mitigation	Expected combined cumulative impact of tithemba WEF and existing renewable applications: Post <u>-</u> mitigation
Karoo Korhaan	Powerlines, solar, overgrazing, climate change	Low	Karoo shrubland	510 000	34 014 (6.6%)	Minor	Not significant
Northern Black Korhaan	Low: Powerlines, solar, overgrazing, climate change	Low	Karoo shrubland	510 000	34 014 (6.6%)	Moderate	Minor
Kori Bustard	High: Powerlines,sol ar, overgrazing, climate change	Low	Karoo shrubland	510 000	34 014 (6.6%)	Moderate	Minor
	Low: Powerlines, poisoning, road kills,		Karoo				
Lanner Falcon	High: Powerlines, solar, overgrazing,	Medium?	shrubland	510 000	34 014 (6.6%)	Moderate	Minor
Ludwig's Bustard	climate change	Low	Karoo shrubland	510 000	34 014 (6.6%)	Moderate	Minor
Martial Eagle	High: Powerlines, persecution, solar, overgrazing,	High	Karoo shrubland	510 000	34 014 (6.6%)	Moderate	Minor
Secretarybird	overgrazing, WEFs, climate change	High	Karoo shrubland	510 000	34 014 (6.6%)	Moderate	Minor
Booted Eagle	Medium: Solar, overgrazing, WEFs, climate change Low:	High	Karoo shrubland	510 000	34 014 (6.6%)	Minor	Not significant
Sclater's Lark	Powerlines, solar, overgrazing, climate change	Low	Karoo shrubland	510 000	34 014 (6.6%)	Not significant	Not significant
Red Lark	Low: Powerlines, solar, overgrazing, climate change	Medium?	Karoo shrubland	510 000	34 014 (6.6%)	Moderate	Minor
Black-chested Snake-Eagle	Medium:	High	Karoo shrubland	510 000	34 014 (6.6%)	Minor	Not significant

Table 97: Systematic exposition of the expected cumulative impacts on avifauna.

Priority species	 Level of current and future impacts on species 	Susceptibility to renewable energy impacts	Preferred habitat within a 40km radius around Helios MTS	Approximate size of preferred habitat within a 40km radius around Helios MTS (ha)	Extent of habitat potentially affected by the existing renewable applications and the Graskoppies WEF (ha)	Expected combined cumulative impact of Graskoppies WEF and existing renewable applications: Pre_ mitigation	Expected combined cumulative impact of Graskoppies WEF and existing renewable applications: Post_ mitigation
Southern Pale Chanting Goshawk	Powerlines, solar,	High	Karoo shrubland	510 000	32 081 (6.3%)	Minor	Not significant
Greater Kestrel	Low: Solar, overgrazing, climate change Medium:	High	Karoo shrubland	510 000	32 081 (6.3%)	Minor	Not significant
Spotted Eagle- Owl	Powerlines,	High	Karoo shrubland	510 000	32 081 (6.3%)	Minor	Not significant
Jackal Buzzard	Medium: Solar, overgrazing, WEFs, climate change	High	Karoo shrubland	510 000	32 081 (6.3%)	Moderate	Minor
Burchell's Courser	Medium: Solar, overgrazing, WEFs, climate change	Low?	Karoo shrubland	510 000	32 081 (6.3%)	Not significant	Not significant
Double- banded Courser	Medium: Solar, overgrazing, WEFs, climate change	Low?	Karoo shrubland	510 000	32 081 (6.3%)	Not significant	Not significant
Steppe Buzzard	Medium: Solar, overgrazing, WEFs, climate change	High	Karoo shrubland	510 000	32 081 (6.3%)	Minor	Not significant
Yellow-billed Kite		High?	Karoo shrubland	510 000	32 081 (6.3%)	Minor	Not significant
Verreaux's Eagle	High: Powerlines, persecution, solar, overgrazing, WEFs, climate	High	Karoo shrubland	510 000	32 081 (6.3%)	Moderate	Minor

The cumulative impact of the proposed Xha! Boom Wind Farm on priority avifauna within a 40km radius around the Helios MTS, should range from minor to insignificant, if appropriate mitigation is implemented.

6.4.3 Bats

The table below lists and summarises the impact assessment for Xha! Boom Wind Farm taking into account the information from available specialist reports of the neighbouring wind energy projects.

The main impact on bats that raises concern from a cumulative impact assessment point of view is the bat mortalities due to direct turbine blade collision or barotrauma during operation. There is potential for mass loss of locally active bats and migratory bats from the area due to cumulative mortality from wind turbines of several neighbouring wind farms. This impact is assessed below.

Table 98: Cumulative bat mortalities due to direct blade impact or barotrauma during foraging (resident and migrating bats affected).

	CUMULATIVE IMPACT – BATS
Environmental Parameter	Impact on bat population numbers.
Issue/Impact/Environmental	Bat mortalities due to direct blade impact or barotrauma during
Effect/Nature	foraging activities (not migration). The concerns of foraging bats
	in relation to wind turbines is discussed in Section 2.2. If the
	impact is too severe (e.g. in the case of no mitigation) migrating
	bat populations may not recover from mortalities.
Extent	The impact will occur nationally.
Probability	There is a high probability of the impact occurring.
Reversibility	The impact will occur throughout the lifespan of the wind facility
	as well as other facilities in the area, therefore population
	numbers may take very long to recover. There is a higher
	probability for population and diversity genetics to be
	permanently altered in cumulative impacts.
Irreplaceable loss of resources	Bat population numbers will decrease in the area.
Duration	The impact will be of long duration, over the operational phase
	of the facility. It will take many years for the population to achieve
	its previous numbers after the impact is removed.
Cumulative effect	High cumulative effects. Mortalities of bats due to wind turbines
	during foraging and migration can have significant ecological
	consequences as the bat species at risk are insectivorous and
	thereby contribute significantly to the control of nocturnal flying
	insects. On a project specific level insect numbers in a certain
	habitat can increase if significant numbers of bats are killed off.
	But if such an impact is present on multiple projects in close
	vicinity of each other, insect numbers can increase regionally
	and possibly cause outbreaks of colonies of certain insect
	species. If migrating bats are killed off it can have detrimental
	effects on the cave ecology of the caves that a specific colony

04 August 2017

	CUMULATIVE IMPACT – BATS		
	utilises. This is due to the fact that bat guano is the primary form of energy input into a cave ecology system.		
Intensity/magnitude	Very high intensity impact on th area.	e bat population numbers in the	
Significance Rating	The anticipated impact will have unlikely to be able to be mitigate	highly significant effects and are ed adequately.	
	Pre-mitigation impact rating	Post mitigation impact rating	
Extent	4	4	
Probability	3	3	
Reversibility	4	2	
Irreplaceable loss	3	2	
Duration	3	2	
Cumulative effect	4	3	
Intensity/magnitude	4	2	
Significance rating	- 84 (very high negative)	- 32 (medium negative)	
Mitigation measures	The high sensitivity valley areas can serve as commuting corridors for bats in the larger area, potentially lowering the cumulative effects of several WEF's in an area. Adhere to recommended mitigation measures for this project as described in Section 8 of the bat impact assessment report. It is essential that project specific mitigations be applied and adhered to for each project, as there is no overarching mitigation that can be recommended on a regional level due to habitat and ecological differences between project sites. Adhere to the sensitivity map during any further turbine layout revisions.		

6.4.4 Surface Water

Although it is important to assess the potential surface water impacts of the proposed wind farm, it is equally important to assess the cumulative surface water impacts that could materialise in the area should other renewable energy developments (both wind and solar facilities) be granted authorisation to proceed. Cumulative impacts are the combined impacts from different developments / facilities which, in combination, result in significant impacts that may be larger than sum of all the impacts.

It must be noted that for the purpose of this study, renewable energy developments within a 55km radius of the Xha! Boom Wind Farm study site were identified and mapped.

From a direct cumulative potential impact perspective, where there is no direct impact to surface water resources on the proposed project site, there will be no direct cumulative impact to surface water resources from a project site specific level.

The nearest surrounding development that could potentially be impacted as a result of the proposed development from an indirect perspective is the Kokerboom 2 Wind Farm. This wind farm is located approximately 9km from the proposed development site. Therefore, there is a considerable distance between the proposed development and the nearest surrounding development. The two sites are also separated by two low ridges that act as watersheds and occupy separate local catchments. Drainage from the proposed development is in a western direction, whilst drainage for the Kokerboom 2 Wind Farm is in a south eastern direction. As a result, it is therefore highly unlikely that the proposed development will affect the Kokerboom 2 Wind Farm should this development proceed to construction. Indirect impacts such as increased run-off, consequent sedimentation and erosion are highly unlikely.

Over and above the negligible potential cumulative impact to Kokerboom 2 Wind Farm, the potential cumulative impact on the remaining surrounding renewable energy developments is negligible for the same reasons, as stated above. The negligible cumulative impact is compounded by the fact that there is an increased distance to the remaining surrounding proposed renewable energy developments

6.4.5 Soils and Agricultural Potential

The cumulative regional impact is a loss of agricultural land, as a result of the sum of surrounding developments, of which there are several.). Due to the extremely limited agricultural potential of all land in the area, predominantly as a result of climatic limitations, and the fact that there is no particular scarcity of such land in South Africa, the cumulative impact is assessed as being of low significance. Because of the very low agricultural potential of the site considered in this report, its contribution to any cumulative impact is also low.

Furthermore it is preferable to incur a cumulative loss of agricultural land in such a region, without cultivation potential, than to lose agricultural land that has a higher potential, to renewable energy development, elsewhere in the country.

6.4.6 Noise

CUI	MULATIVE IMPACT – NOISE
Environmental Parameter	Cumulative noises from operating wind turbines for the Graskoppies, Ithemba, Xha! Boom and Hartebeest Leegte Wind Farms
Issue/Impact/Environmental Effect/Nature	Increase in sound levels at the dwellings of receptors at night due to cumulative noises. This will be very low for the Xha! Boom WF.
Extent	Site
Probability	Possible
Reversibility	Completely

Table 99: Impact Assessment: Cumulative noise levels for the Leeuwberg Wind Energy Facility – Night

 time

prepared by: SiVEST Environmental

CUMULATIVE IMPACT – NOISE				
Irreplaceable loss of resources	None			
Duration	Long	Long		
Cumulative effect	Negligible			
Intensity/magnitude	High			
Significance Rating	Low			
	Pre-mitigation impact rating	Post mitigation impact rating		
Extent	1	1		
Probability	2	1		
Reversibility	1	1		
Irreplaceable loss	1	1		
Duration	3	3		
Cumulative effect	1	1		
Intensity/magnitude	3	1		
Significance rating	- 27 (low negative)	- 8 (low negative)		
Mitigation measures	Mitigation not required as the noise impact would be insignit	potential cumulative night-time ficant.		

6.4.7 Visual

Although it is important to assess the visual impacts of the proposed wind farm itself, it is equally important to assess the cumulative visual impact that could materialise in the area should other renewable energy developments (both wind and solar facilities) be granted authorisation to proceed. Cumulative impacts are the combined impacts from different developments / facilities which, in combination, result in significant impacts that may be larger than sum of all the impacts.

These renewable energy facilities and their potential for large scale visual impacts could significantly alter the sense of place and visual character in the study area, if constructed. It must be noted that for the purpose of this study, renewable energy developments within a 55km radius of the Xha! Boom Wind application site were identified and mapped. The cumulative visual impact experienced by each visual receptor will however depend on the number of proposed developments within an 8km radius of the receptor location, as beyond the 8km radius the visual impact of the development would diminish to an insignificant level.

The proposed renewable energy developments identified are indicated in Figure 42 below.

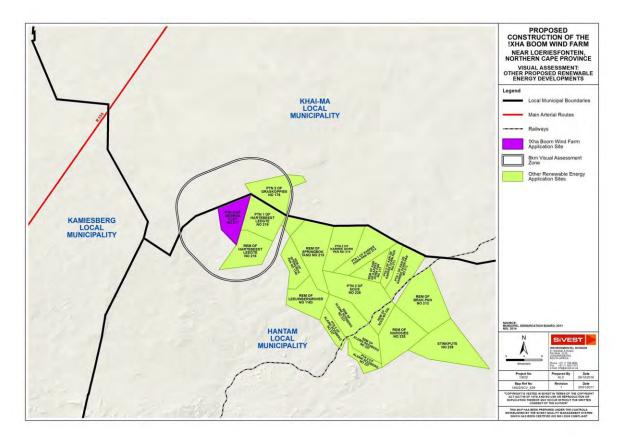


Figure 42: Renewable energy facilities proposed within a 55km radius of the Xha! Boom Wind Farm application site

Scattered farmsteads / homesteads identified in the study area are regarded as potentially sensitive visual receptor locations and it was noted that some of these dwellings are located within 8kms of certain of the additional proposed renewable energy developments, specifically the Graskoppies, Hartebeest Leegte and Ithemba Wind Farms which all form part of the greater Leeuwberg Wind Farms Project. It is therefore likely that these receptors will experience some visual impacts if these three additional wind farms are all constructed. However, it must be noted that these receptors will need to be investigated further during the EIA phase when fieldwork is undertaken and more information becomes available.

6.4.8 Heritage

CUMULATIVE IMPACT - HERITAGE		
Environmental Parameter Heritage Resources		
Issue/Impact/Environmental	The extent that the addition of this project will have on the	
Effect/Nature	overall impact of developments in the region on heritage	
	resources	
Extent	Local	
Probability	Possible	

Table 100: Impact rating – Cumulative

prepared by: SiVEST Environmental

Reversibility	Non- renewable.		
Irreplaceable loss of resources	The nature of heritage resources are that they are non-		
	renewable. The proper mitigation and documentation of		
	these resources can however preserve the data for research		
Duration	Permanent		
Cumulative effect	It is my reserved but considered opinion that this additional		
	load on the overall impact on heritage resources will be low.		
	With a detailed and comprehensive regional dataset this		
	rating could possibly be adjusted and more accurate.		
Intensity/magnitude	Low		
Significance Rating	Negative low impact before mitigation and low negative after mitigation.		
		Post mitigation impact	
	Pre-mitigation impact rating	rating	
Extent	2	2	
Probability	2	1	
Reversibility	4	4	
Irreplaceable loss	4	4	
Duration	4	4	
Cumulative effect	1	1	
Intensity/magnitude	1	1	
Significance rating	-17 (Negative low impact) -16 (Low negative)		
	 A walk down of the final approved layout will be required before construction commence. Any heritage features of significance identified during 		
	this walk down will require formal mitigation or w		
Mitigation measures	Itigation measures possible a slight change in design could accommodat such resources. • A management plan for the heritage resources need		
	then to be compiled and approved for impleme during construction and operations.		

It is the opinion of the heritage specialist that the additional load on the overall impact on heritage resources will be low. With a detailed and comprehensive regional dataset this rating could possibly be adjusted and more accurate.

6.4.9 Socio-Economic

In recent years, developers of various renewable energy projects have taken a notable interest in the area where the Xha! Boom Wind Farm is proposed to be established. A likely contributing factor to this, is linked to the wind and solar energy potential of the region. Such developments, whether they are approved or are at the proposal stage as this one, need to be taken into consideration as they have a potential to create numerous positive or negative cumulative socio-economic impacts. **Table 95** lists all **SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD** prepared by: SiVEST Environmental

the various projects that will need to be considered when examining the cumulative impacts and their location relative to the project under analysis as depicted in **Figure 41**.

The Khobab and Loeriesfontein projects have both been approved and have reached financial closure. As a result of this, these two wind farms have been under construction since the beginning of 2015. Under the Renewable Energy Independent Power Producer Procurement Programme (REIPPP), only one of the other projects listed in **Table 95** has been approved whilst the rest are yet to be approved. This means that, at this stage the possible timelines of their development are uncertain.

Considering the uncertainty associated with the future project roll-out, two possible extreme scenarios could be foreseen assuming that all of these projects are implemented at a certain point in time in the future. The first scenario is premised on the assumption that all the projects will be developed at the same time, whilst the second extreme scenario would be that all projects are developed one after another. From the quantitative impacts perspective, both scenarios will lead to the same impact on the GDP-R, employment, and household income; however, they may have a different effect on the standard of living and the social pathologies of the local community due to the level of concentration of the potential impacts that could be created at any given point in time.

The difference will lie in whether the impacts become concentrated (generated over a short period of time), or they all take place at the same time. Seeing that it is impossible to conclude with certainty which of these options would be realised, for the purposes of this study, it is assumed that all projects which are yet to be approved will be all built at the same time. This option is considered to be the least preferred option and therefore represents the worst case scenario.

<u>Construction Phase Cumulative Impacts</u>

The region, which the Xha! Boom Wind Farm is proposed to be built, is one of the examples as there are already two RE projects (i.e. Khobab and Loeriesfontein 2 Wind Farms) under construction. Several other RE projects in the area have also been proposed for the development and considering the government's continued interest in renewables as outlined in the IRP, they are likely to be implemented sometimes in the future. The development of the projects in the area, though will result in numerous cumulative effects, which will have both positive and negative outcomes.

- With respect to the positive effects, the combination of the effects of the projects already under construction as well as the ones still to be potentially approved is expected to result in increased production, temporary creation of employment both for the local labour and workers coming outside the local community, skills development, and creation of local business opportunities. Considering the small size of the local economy, the significance of these cumulative impacts in the context of the local municipality could be prominent and result in the growth and diversification of the local economy, reduced unemployment rates, and greater local government earnings.
- Construction of a number of projects in a relatively remote and rural area, which has a small economic base and limited labour, could though lead to undesired but sometimes unavoidable socio-economic impacts. Projects of such nature would attract job seekers and bring workers from outside the local community, which could lead to various social pathologies. This could offset some of the positive impacts that would be derived from the same projects during

construction and would need to be carefully managed to ensure that they are minimised and possibly eliminated altogether.

Operational Phase Cumulative Impacts

Considering the existing wind farms as well as other similar projects still to be approved, cumulative socio-economic impacts arising during the operation phase are expected to be largely positive. This is due to the fact that the supposed simultaneous operational life of all these projects will provide sustainable employment opportunities, improved access to basic services as a result of increased income as well as an improved standard of living. The prescribed investment into socio-economic and enterprise development initiatives by IPPs will also lead to improvement of general standard of living in the area.

6.4.10 Path Loss and Risk Assessment

The Karoo area is ideally suited for the installation and commissioning of renewable energy projects, but is also host to the Department of Science and Technology's SKA radio telescope project. Due to the sensitivity of the telescope receivers, there is a risk that unintentional emissions from the systems and associated equipment associated with renewable energy projects will desensitize or saturate the SKA receivers resulting in interference to celestial observations and/or data loss. Such interference is typically referred to as 'Radio Frequency Interference' (or 'RFI').

6.4.10.1 Area of Interest

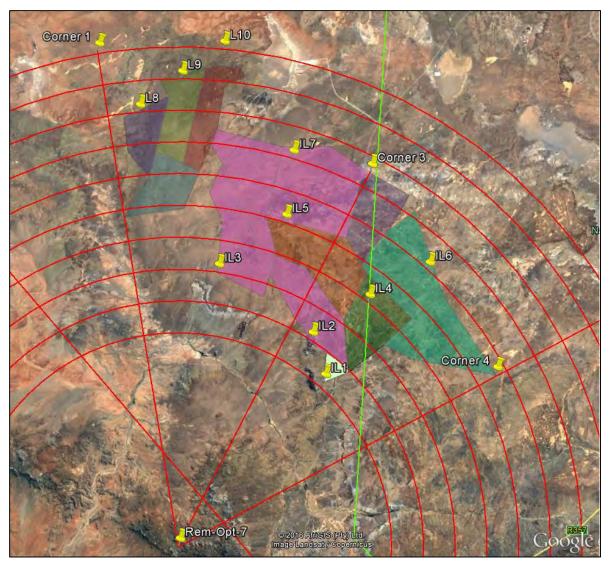


Figure 43: Wind farm areas considered for REM OPT 7 evaluation

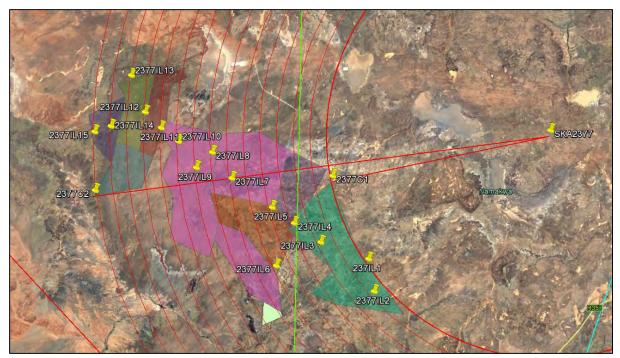


Figure 44: Wind farm areas considered for SKA ID 2377 evaluation

Development	Current status of	Capacity	No. Turbines
	EIA/development		
Dwarsrug Wind Farm	Environmental Authorisation issued	140MW	70
Khobab Wind Farm	Environmental Authorisation	140MW	61
	issued/Approved under RE IPPPP		
Loeriesfontein 2 Wind	Environmental Authorisation	140MW	61
Farm	issued/Approved under RE IPPPP		
ACED Kokerboom 1	EIA ongoing	240MW	60
Wind Farm			
ACED Kokerboom 2	EIA ongoing	240MW	60
Wind Farm			
Graskoppies Wind	EIA ongoing	235MW	70
Farm			
Hartebeest Leegte	EIA ongoing	235MW	70
Ithemba Wind Farm	EIA ongoing	235MW	70
Xha! Boom Wind Farm	EIA ongoing	235MW	70

6.4.10.2 Calculation Information

A total of 500 mitigated Acciona model AW 125/3000 turbines with a 160m⁸ hub height was used for the NTIA TM-89-139 calculations with an inner ring of 30km and outer ring of 70km. This resulted in 10 rings with a spacing of 4.44km between rings.

⁸ The AW125/3000 wind turbine generator which has a hub height of 100m, a rotor diameter of 125m and an output of 3MW was used to assess the EMI and RFI. Forty seven (47) turbines with a hub height of 150m was used during the calculations as

Path loss was calculated with SPLAT! at 500MHz. Where the software reported parameters that were out of range, the ITU-R Recommendation P.452-15 model as contained in SEAMCAT was used.

6.4.10.3 Data Comparisons

The following factors have an impact on cumulative emissions:

- Number of emitters (emitter density)
- Path loss due to distance and topography

To avoid tedious path loss calculations for 500 emitters and the exact location of each emitter not being known, the NTIA TM-89-139 "Rings" method was used to calculate the expected cumulative amplitude. The source amplitude of all emitters was assumed to be Acciona mitigated. The levels as described in ITC Services CP 1609/16: EMISSION CONTROL PLAN THE AW125 TH100A WTG. Path loss was calculated for each of the rings at the calculated distance from the receiver.

The following definitions apply to Business areas (City), Residential areas, rural areas and quiet rural areas:

Business areas: any area where the predominant usage throughout the area is for any type of business e.g. stores, offices, industrial parks, large shopping centers, main streets or highways etc.

Residential areas (urban or suburban): any area used predominantly for single or multiple dwellings with a density of at least two single family units per 4046 square meter (1 acre) and no large or busy highways.

Rural areas: primarily agricultural or similar purpose with no more than one dwelling per 20234 square meter (5 acres).

The statistical cumulative figure of 10*Log N where N = number of emitters is an overly conservative approach when the emitter number is >63 units. (18dB).

6.4.10.4 NTIA TM-89-139

The 500MHz calculation for the REM Opt 7 location showed an expected increase of 17.9dB when comparing one emitter to 500 emitters and 18.3dB for the SKA ID 2377 location.

6.4.10.5 ITU-R P.372-13: Radio Noise

requested by Mainstream. It should be noted that a more suitable turbine with different specifications may be available once the proposed wind farm is ready for construction. As such, turbines with a hub height of up to 160m and a rotor diameter of up to 160m will need to be authorised. A more accurate path loss and risk assessment cannot be re-done until the turbine has been selected and the layout finalised. Prior to construction a new path loss and risk assessment will be undertaken based on a final layout, using a worst case scenario turbine and approved by the SKA before any turbines are installed on the proposed site. A letter from ICT to confirming this has been included in this Final Scoping Report (FSR) in Appendix 8C

When comparing the City (high emitter density) with residential and rural data from ITU-R P.372-13 *Table 3: Outdoor man-made noise measurements in Europe (2006-2007)*, the median noise figure increase for the City environment compared with the residential environment is shown in **Figure 45** below. The City median noise figure compared with the residential noise figure as measured in Japan (2009-2011) is also included. Added to **Figure 45** is the Hag *et al* model that is in line with the measured values presented.

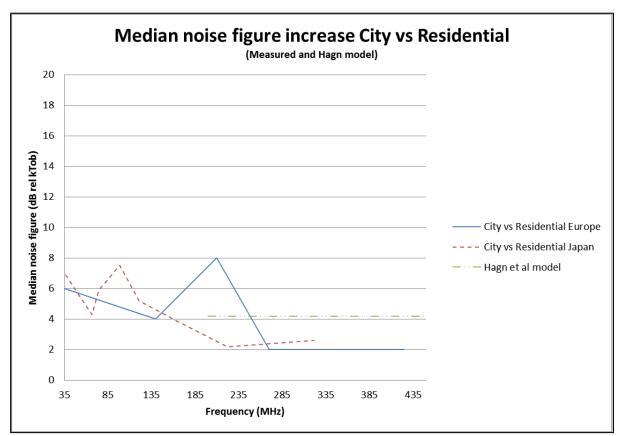


Figure 45: Man-made noise measured results (ITU-R P.372-13 Table 3 and Table 4, Hagn eq 8 and 9)

6.4.10.6 Measured Urban, Suburban, Airport and Rural Ambient Emissions

The emitter density in rural areas is much lower than the urban environment. The urban environment ambient level are the highest as expected, however the increase in the measured bands is <10dB for both vertical and horizontal polarisation as shown in: World meteorological Organization: Results of Ambient RF environment and noise floor measurements taken in the U.S. in 2004 and 2005.

6.4.10.7 Mobile Communication Radio Base Stations

From "Comparative international analysis of radiofrequency exposure surveys of mobile communication radio base stations" it was noted that the installation of more base stations did not result in a marked increase in ambient RF levels. Although often quoted when investigating cumulative effect of multiple sources, it cannot be used as a case study for wind turbine generators as the service quality that consumers expect requires certain signal strength and the signal strength is regulated by the service

providers. This would be a driving factor from industry to maintain ambient levels. The base station density per square kilometer is also less than the WTG sites.

6.4.10.8 Conclusion

The NITIA TM-89-139 calculation of 17.9dB (REM OPT 7 location) and 18.4dB (SKA ID 2377 location) to be added to the emissions from a single unit to allow for the cumulative effect of 500 units appears to be conservative when compare to general man-made noise data (<10dB increase measured at various locations). The >60 degree beamwidth assumed during the NITIA TM-89-139 calculations will result in over estimation of the cumulative effect due to a higher number of emitters in the beamwidth. The 40dB mitigation is a border line figure when considering all the adjacent projects resulting in a relatively high emitter density.

6.4.11 Overall Cumulative Impact Assessment Significance Rating

Based on the identified cumulative impacts in the scoping phase specialist studies above, SiVEST has compiled a table, which rates the overall significance of the cumulative impacts associated with the proposed development using the significance rating methodology.

As previously mentioned, all the EIA phase specialist assessments will rate the significance of the cumulative impacts associated with the proposed development using the significance rating methodology as this was only done by some of the specialists in their scoping phase assessments.

The overall significance of the cumulative impact associated with the proposed development is addressed in the table below.

IMPACT TABLE FORMAT			
Environmental Parameter	Biodiversity, Avifauna, Bats, Agriculture, Noise, Visual, Heritage,		
	Socio-Economic and SKA		
Issue/Impact/Environmental	The proposed development could impact broad-scale ecological		
Effect/Nature	processes, priority avifauna within a 40km radius around the Helios		
	MTS, bat population numbers due to direct blade impact or		
	barotrauma during foraging, sound levels at dwellings at night, sense		
	of place / visual character, heritage resources, GDP-R, employment,		
	income, standard of living of local community and social pathologies		
	of local community. It should however be noted that the proposed		
	development could have positive socio-economic cumulative impacts		
	on production, employment, skills development, local business		
	opportunities, local economy and local government earnings.		
	In addition, the proposed development could also result in the regional		
	cumulative impact of loss of agricultural land. However, despite the		

 Table 102: Overall Significance Rating of Cumulative Impacts Associated with the Proposed

 Development

IMPACT TABLE FORMAT			
	cumulative regional impact that may occur, it is preferable to incur a loss of agricultural land in such a region, without cultivation potential, than to lose agricultural land that has a higher potential, to renewable energy development elsewhere in the country.		
	From an SKA perspective, due to the sensitivity of the telescope receivers, there is a risk that unintentional emissions from the systems and associated equipment associated with renewable energy projects will desensitize or saturate the SKA receivers resulting in interference to celestial observations and/or data loss. Such interference is typically referred to as 'Radio Frequency Interference' (or 'RFI').		
	It should be noted that from a surface water perspective, there is no direct cumulative impact to surface water resources on the proposed project site. In addition, there will be no direct cumulative impact to surface water resources from a project site specific level. The nearest surrounding renewable energy development that could potentially be impacted as a result of the proposed development from an indirect perspective is located approximately 2.2km from the proposed development site. As such, it is highly unlikely that the proposed development will affect other surrounding renewable energy developments should this development proceed to construction and thus indirect cumulative impacts such as increased run-off, consequent sedimentation and erosion are highly unlikely.		
Extent	Local/district (2)		
Probability	Probable (3)		
Reversibility	Barely reversible (3)		
Irreplaceable loss of	Significant loss (3)		
resources	g		
Duration	Long term (3)		
Cumulative effect	Medium (3)		
Intensity/magnitude	Medium (2)		
Significance Rating	Medium negative impact		
	Pre-mitigation impact rating	Post mitigation impact rating	
Extent	2	2	
Probability	3	2	
Reversibility	3	2	
Irreplaceable loss	3	2	
Duration	3 3		

SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD Proposed Xha! Boom Wind Farm - Final Scoping Report Version No: 1

prepared by: SiVEST Environmental

IMPACT TABLE FORMAT			
Cumulative effect	3	3	
Intensity/magnitude	2	2	
Significance rating	- 34 (Medium negative)	- 28 (Low negative)	

7 LAYOUT ALTERNATIVES

One of the aims of the Scoping Report is to identify alternatives to carry through to the EIA phase of the investigation for detailed assessment (as was discussed in **Chapter 2**). The selection of alternatives during the Scoping Phase of the project usually helps to focus future investigations, both in terms of the environmental investigations required and the scope of the public participation process. Various environmental specialists assessed the site during the scoping phase. Their assessments encompassed the entire proposed development site and included the identification of sensitive areas. These sensitive areas were used during the Scoping Phase to perform a preliminary comparison of layout alternatives (**Chapter 7**). These layouts will be extensively investigated in the EIA phase of the project (see the plan of study for the EIA phase in **Chapter 11** of the FSR). At this stage, the design and layout alternatives include; alternative locations for the proposed 132kV on-site substation.

It should be noted that the layout alternatives for the EIA phase will be based on both environmental constraints and design factors. The findings of the specialist studies and sensitivity mapping will be used to inform the layout of the proposed facility within the preferred site during the EIA phase. The layout will be assessed by the specialists in their respective specialist studies which will be included in the EIA Report.

As part of the EIA, the buildable area of the proposed Wind Farm is 1897.20 hectares and will be assessed by the specialists and considered during the EIA phase. Based on the sensitivity mapping within the buildable area, the preferred location and layout for the wind farm and associated infrastructure will aim to avoid the sensitive features identified by the specialists. The area that excludes these sensitive features will be considered to be the Development Envelope for this project and no development may occur outside this envelope. Based on the boundaries of the Development Envelope, a site layout will be determined for this project (i.e. the placement of the wind turbines within the Development Envelope).

It is important to note that should the layout change subsequent to the issuing of an EA (should such authorisation be granted), any alternative layout or revisions to the layout occurring within the boundaries of the Development Envelope would not be regarded as a change to the scope of work or the findings of the impact assessments undertaken during the EIA Phase. This is based on the understanding that the specialists will assess the larger area (i.e. the buildable area) and identify sensitivities, which will be avoided in the siting of the proposed infrastructure within the Development Envelope is considered to be a "box" in which the project components can be constructed at whichever location without requiring an additional assessment or change in impact significance. Any changes to the layout within the boundaries of the Development Envelope following the issuing of the EA (should it be granted) will therefore be considered to be non-substantive.

Page 244

As mentioned above, various specialists identified preliminary site specific sensitive areas during the Scoping Phase of the EIA that may need to be precluded from the buildable area. These include the biodiversity, avifaunal, bats, visual, heritage, surface water and noise specialists. The sensitive areas identified by these specialists were used to guide the design of the wind farm where practical. The identified sensitive areas were also used to assess the impacts of each of the proposed alternatives on the environment. The sensitive areas as identified by various specialists via desktop and field verification means are shown in **Figure 46** below.

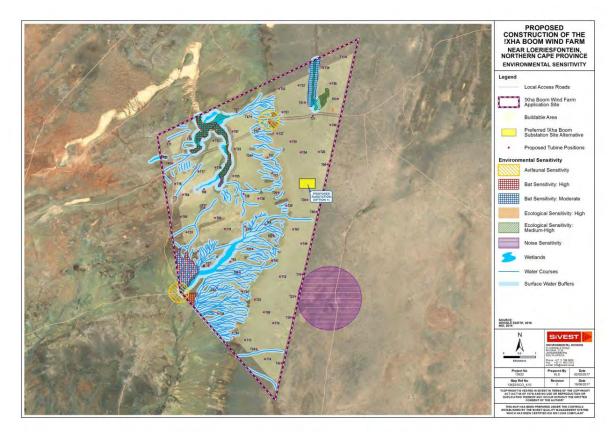


Figure 46: Sensitive areas as pertaining to biodiversity, avifaunal, bats, visual, heritage, surface water and noise

Key

PREFERRED	The alternative will result in a low impact / reduce the impact	
FAVOURABLE	The impact will be relatively insignificant	
NOT PREFERRED	The alternative will result in a high impact / increase the impact	
NO PREFERENCE	The alternative will result in equal impacts	

132kV ON-SITE XHA! BOOM SUBSTATION				
Specialist	132kV on-site Xha! Boom Substation Option 1		132kV on-site Xha! Boom Substation Option 2	
	PREFERENCE	CONCERNS / IMPACT SUMMARY	PREFERENCE	CONCERNS / IMPACT SUMMARY
Biodiversity	Preferred	The site is located on the typical open plains of	Not Preferred	The site is located in a transional area between the
		the site, dominated by Stipagrostis. There are no		arid grasslands in the east and the Klipveld in the west.
		sensitive features within the footprint area. No		There are numerous small drainage features or
		significant issues associated with the site. This is		washes in the site and it is not considered favourable.
		clearly the preferred option for the substation.		
Avifauna	No Preference	The habitat at the proposed turbine site is highly	No Preference	The habitat at the proposed turbine site is highly
		homogenous. The impact that the substation will		homogenous. The impact that the substation will have
		have on the available habitat is therefore likely to		on the available habitat is therefore likely to be similar,
		be similar, irrespective of where the substation is		irrespective of where the substation is located.
		located.		
Bats	Preferred	This option is located within a flatter and more	Not Preferred	Based on satellite imagery, this location is situated
		homogenous area such that the only foreseen		nearer to an area that is of potential interest for bat
		impact is habitat removal.		foraging activities.
Surface Water	Preferred	No surface water resources are found within this	Not Preferred	There are two minor drainage lines that can be found
		alternative site. The nearest surface water		within this substation alternative. There will therefore
		resource is a major drainage line which is located		be direct potential impacts to these surface water
		approximately 600m to the west, and separated		resources. Additionally, there are several other minor
		by a low ridge acting as a watershed. The		drainage lines in close proximity (<120m). Indirect
		potential for indirect impacts is minimal		potential impacts such as increased run-off, and
		considering the distance and barrier to the		consequent sedimentation and erosion are therefore,
		drainage line. This option is therefore preferred.		likely. This option is therefore considered not
				preferred.
Soils and		Impact is low with no significant differences		Impact is low with no significant differences between
Agricultural Potential	No preference	between the locations	No preference	the locations

 Table 103: Alternatives Assessment summarising the impacts, highlighting issues/concerns and indicating the preference associated with each alternative

prepared by: SiVEST Environmental

Noise	No preference	Substations are too far from NSD to pose any noise risk.	No preference	Substations are too far from NSD to pose any noise risk.	
Visual No preference		The visual impacts associated with the proposed substation alternatives will be equal due to the close proximity of the substation locations and the flat nature of the topography.	No preference	The visual impacts associated with the proposed substation alternatives will be equal due to the close proximity of the substation locations and the flat nature of the topography.	
Heritage	Preferred	No heritage resources identified in the footprint	Favourable	One (1) low significance heritage resource found in the footprint.	
Socio- economic	No preference	No differentiation between this and the other option in terms of the socio-economic impacts identified will result in equal impacts.	No preference	No differentiation between this and the other option in terms of the socio-economic impacts identified will result in equal impacts.	

Table 104: Summary of specialist Alternatives Assessment indicating the preference associated with	
each alternative	

Specialist Assessment	132kV ON-SITE XHA! BOOM SUBSTATION OPTION 1	132kV ON-SITE XHA! BOOM SUBSTATION OPTION 2
Biodiversity	Preferred	Not Preferred
Avifuana	No Preference	No Preference
Bats	Preferred Not Preferred	
Surface Water	Preferred	Not Preferred
Soils and agricultural potential	No Preference	No Preference
Noise	No Preference	No Preference
Visual	No Preference	No Preference
Heritage	Preferred	Favourable
Socio-Economic	No Preference	No Preference

Based on the specialist scoping assessments and assessment of the proposed 132kV On-Site Xhal Boom Substation alternatives, **Substation Option 1** has been identified as the preferred alternative from biodiversity, bats, surface water and heritage perspectives respectively. As based on the biodiversity specialist studies **Substation Option 1** is located on the typical open plains of the site, dominated by *Stipagrostis*. There are no sensitive features within the footprint area and no significant issues associated with the site. From a surface water perspective, no surface water resources are found within **Substation Option 1**. The nearest surface water resource is a major drainage line which is located approximately 600m to the west, and separated by a low ridge acting as a watershed. The potential for indirect impacts is minimal considering the distance and barrier to the drainage line. With regards to bats, **Substation Option 1** is located within a flatter and more homogenous area such that the only foreseen impact is habitat removal. In addition, from a heritage perspective, no heritage resources were identified in **Substation Option 1**.

However, from a biodiversity perspective, the proposed 132kv On-Site Xha! Boom **Substation Option 2** is not preferred due to the location of the proposed substation in a transional area between the arid grasslands in the east and the Klipveld in the west. There are numerous small drainage features or washes in the site and it is not considered favourable. Additionally, from a surface water perspective the proposed 132kV On-Site Xha! Boom **Substation Option 2** is not preferred due to the presence of two (2) minor drainage lines that can be found within this substation alternative. There will therefore be direct potential impacts to these surface water resources. Additionally, there are several other minor drainage lines in close proximity (<120m). Indirect potential impacts such as increased run-off, and consequent sedimentation and erosion are therefore, likely. It should also be noted that from a heritage perspective, a site occurs at **Substation Option 2**. This site is however is of a low significance. In addition, with regards to bats, **Substation Option 2** is not preferred as based on satellite imagery, this location is situated nearer to an area that is of potential interest for bat foraging activities. Based on the above findings from the various specialist scoping reports it is recommended that only **Substation Option 1** be taken through to the EIA phase.

8 PUBLIC PARTICIPATION PROCESS

Public participation is the cornerstone of any EIA. The principles of NEMA as well as the EIA Regulations govern the EIA process, including public participation. These include provision of sufficient and transparent information on an ongoing basis to stakeholders to allow them to comment, and ensuring the participation of previously disadvantaged people, women and the youth.

The public participation process is primarily based on two factors; firstly, ongoing interaction with the environmental specialists and the technical teams in order to achieve integration of technical assessment and public participation throughout. Secondly, to obtain the bulk of the issues to be addressed early on in the process, with the latter half of the process designed to provide environmental and technical evaluation of these issues. These findings are presented to stakeholders for verification that their issues have been captured and for further comment.

Input into the public participation process by members of the public and stakeholders can be given at various stages of the EIA process. Registration on the project can take place at any time during the EIA process up until the final EIA report is submitted to DEA. There are however set periods in which comments are required from Interested and / or Affected Parties (I&APs) in order to ensure that these are captured in time for the submission of the various reports. The comment periods during the Scoping Phase were implemented according to NEMA EIA Regulations. The comment periods during the Scoping Phase (as set out by EIA Regulations 2014) are as follows:

- Background Information Document (BID): 4 Calendar weeks, but also as and when an I&AP registers.
- Comment period for the Draft / Final Scoping Report (DSR/FSR): 4 Calendar weeks (30 days).
- Any public participation process must be conducted for a period of at least 30 days.

The EIA regulations emphasise the importance of public participation. In terms of the EIA regulations, registered interested and/or affected parties –

- may participate in the application process;
- may comment on any written communication submitted to the competent authority by the applicant or environmental consultant;
- must comment within the timeframes as stipulated by the EIA Regulations;
- must send a copy of any comments to the applicant or Environmental Assessment Practitioner (EAP) if the comments were submitted directly to the competent authority; and
- must disclose any direct business, financial, personal or other interests that the person has in the application being granted or refused.

Further, in terms of the EIA regulations, the EAP:

- manages the application process;
- must be independent;
- must undertake the work objectively even if this results in views and findings that are not favourable to the applicant;

- must disclose material information that may influence the decision; and
- must conduct a public participation process.

The following actions were taken upon receiving comments/queries/issues:

- The contact details provided were entered into the project database for use in future notifications.
- Confirmation of receipt of comments.
- Addressed comments in the Comments & Response Report.

8.1 Objectives of Public Participation

An understanding of what the public participation is, and is what it is not, needs to be explored and must be clarified.

- Public Participation is:
 - A communication mechanism to inform I&APs regarding a proposed project.
 - A communication mechanism to record comments and/or concerns raised during the relevant phase of the EIA by I&APs regarding a proposed project.
- What Public Participation is not:
 - A marketing exercise.
 - A process to address grievances but rather to record comments raised.
 - One-on-one consultation with each I&AP during the EIA process (not relevant to possibly affected landowners identified).


The primary aims of the PPP are:

- To inform interested and affected parties (I&APs) and key stakeholders of the proposed development.
- To initiate meaningful and timeous participation of I&APs.
- To identify issues and concerns of key stakeholders and I&APs with regards to the proposed development
- To promote transparency and an understanding of the proposed project and its potential environmental impacts.
- To provide information used for decision-making.
- To provide a structure for liaison and communication with I&APs and key stakeholders.
- To assist in identifying potential environmental impacts associated with the proposed development.
- To ensure inclusivity (the views, needs, interests and values of I&APs must be considered in the decision-making process).
- To focus on issues relevant to the project and issues considered important by I&APs and key stakeholders.
- To provide responses to I&AP queries.
- To encourage co-regulation, shared responsibility and a sense of ownership.

In addition to the guidance of the PPP in the EIA Regulations, every effort was also made to conform to the requirements of the Promotion of Administrative Justice Act 2000 (Act 3 of 2000).

8.2 Overview of the Public Participation Process to date

The public participation process for the EIA was initiated in October 2016 with the issuing of the BID and initial landowner consultation. The DSR was released for public review and comment on the 21st of June 2017. The stages that typically form part of the public participation process during the Scoping Phase are reflected in **Figure 47** below.

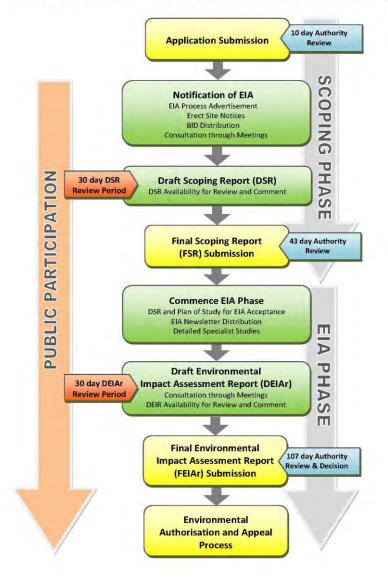

ENVIRONMENTAL IMPACT ASSESSMENT PROCESS

Figure 47: EIA and Public Participation Process

Members of the public who wished to be registered on the database as an I&AP were able to do so via telephone, fax, email, mail or SiVEST's website (<u>www.sivest.co.za</u>).

On-going consultation with key stakeholders (e.g. provincial, district and local authorities, relevant government departments, local business etc.) and identified I&APs ensured that I&APs were kept informed regarding the EIA process. Networking with I&APs will effectively continue throughout the Scoping Phase of the project until the Final Scoping Report (FSR) and EIA Plan of Study are submitted to DEA. Where required, stakeholders and I&APs were engaged on an individual basis.

During the environmental studies, consultations were held with individuals, businesses, institutions and organisations, and the following sectors of society have been identified and were afforded the opportunity to comment (the full stakeholder database list is included in Appendix 7F):

- National Authorities;
- Provincial Authorities;
- Namakwa District Municipality
- Hantam Local Municipality
- Khai-Ma Local Municipality
- Government Structures such as SAHRA, SANRAL, Eskom Telkom, etc.;
- Agriculture Associations;
- Regional and local media (advertisements and public documents e.g. BID);
- Business and commerce;
- Environmental bodies / NGOs;
- Department of Environmental Affairs: Biodiversity Section;
- Department of Water and Sanitation;
- Community representatives, CBOs, development bodies;
- Landowners;
- Square Kilometre Array (SKA);
- Civil Aviation Authority (CAA); and
- Air Traffic and Navigation Services (ATNS).

8.3 Consultation and Public Involvement

Through the consultation process, issues for inclusion within the FSR were identified and confirmed. Telephonic discussions and one-on-one consultation were undertaken where relevant. Meetings with landowners took place prior to the release of the FSR in order to identify key issues, needs and priorities for input into the proposed project. Special attention was paid to the consultation with possibly affected landowners and communities within the study area to try and address their main concerns.

8.4 Stakeholders and I&APs

In order to identify possible I&APs, use will be made of:

- print media EIA process advertisements
 - The Noordwester (English and Afrikaans)
- site notices throughout the study area (Proofs included in **Appendix 7A**)
- referrals
- requesting databases and/or contact information from NGOs / CBOs and other organisations

A full database list of registered I&APs was compiled and is included in Appendix 7F.

8.5 Announcing the Opportunity to Participate

The opportunity for stakeholders to participate in the EIA were as follows:

- EIA process advert (16th of June 2017).
- I&APs with e-mail addresses and fax numbers were sent copy of the BID (26th of October 2016).
- BIDs were delivered to various locations within the study area (October 2016):

The letter of invitation to participate as well as the Registration and Comment Form accompanied the BID.

8.6 Notification of the Potential Interested and Affected Parties

Communication with I&APs were conducted by means of telephone, faxes and email in order to obtain the necessary background information to compile this report. The advertising process was followed in terms of regulation 41 of the EIA Regulations published in R982 in Government Gazette No. 38282 of 4 December 2015, as amended.

An advertisement was placed in the Noordwester newspaper on the 16th of June 2017.

In addition, many site notices (as per regulations) were placed near the study area during a site visit in October (**Appendix 7A**).

As stakeholders respond to these advertisements, they will be registered on the project database and sent letters of invitation to participate as well as the BID.

I&AP	Date received	Summary of comments	
Mr. Adrian Tiplady	18 November 2016	•	Mentioned that a high level risk assessment
		has been conducted at the South African SKA	
			Project Office to determine the potential impact
			of the proposed development on the Square

8.6.1 Summary of comments received

ГТ	
	Kilometre Array. Listed the main findings of the
	Risk Assessment:
	 The location of the wind facilities was provided
	in the form of a Google Earth shapefiles.
	 The nearest SKA stations has been identified
	as Rem-Opt-7, it is located approximately 50
	km from the proposed location of wind
	facilities;
	 Based on distance to the nearest SKA station,
	and the information currently available on the
	detailed design of the wind farms, a single
	facility electricity generation facility would pose
	a low to medium risk of detrimental impact on
	the SKA. However, multiple facilities, as is the
	case for this application, as well as taking into
	account the number of facilities already
	located, or to be constructed, in the area would
	result in an increase in the risk (to at least a
	medium to high risk) of detrimental impact on
	the SKA as a result of the integrated impact;
	 Any transmitters that are to be established, or
	have been established, at the site for the
	purposes of voice and data communication will
	be required to comply with the relevant AGA
	regulations concerning the restriction of use of
	the radio frequency spectrum that applies in
	the area concerned;
	 As a result of the medium to high risk
	associated with the wind facilities, the SKA
	project office recommends that further EMI and
	significant mitigation measures may be
	required to lower the risk of detrimental impact
	to an acceptable level. The South African SKA
	Project Office would like to be kept informed of
	progress with this project, and reserves the
	right to further risk assessments at a later
	stage.
	 Mentioned that the above technical advice is
	provided by the South African SKA Project
	Office on the basis of the protection
	requirements of the SKA in South Africa, and
	does not constitute legal approval of the
	renewable energy projects in terms of the
	Astronomy Geographic Advantage Act, the

		Management Authority, and its regulations or
Ms. Stephnie Kot	17 November 2016	declarations. Requested to be registered as an I&AP for the
		proposed development.
Mrs. Ono Naude	15 February 2017	Stated that the proposed turbines are not close to any of Vodacom's sites and thus there should be no issues.
Mr. Hennie Barnard	16 February 2017	 It was stated that Vodacom has no objection to South Africa Mainstream Renewable Power Developments (Pty) Ltd establishing the Xha! Boom 140MW wind energy facility at the following location: Portion 2 of the Farm Georgs Vley no. 217, Which are all situated 120km west of Brandvlei in the Northern Cape Province
Mr. Loopard Chau	20 February 2017	the Northern Cape Province.
Mr. Leonard Shaw	20 Februay 2017	Telkom SA granted Mainstream the approval to proceed with the construction of its energy project at the site subject to a certain set of terms and conditions outlined in the comment letter. These terms and conditions have been included in the C&RR which is included in Appendix 7E of this FSR
Mr. Serame Motlhake	8 March 2017	 It was confirmed that there would be limited degradation of Sentech transmitted Terrestrial UHF/CHF Television (TV), and/or FM radio services in the planned development area. Sentech therefore grant Mainstream approval to proceed with the construction of its energy project at the proposed site subject to a certain set of terms and conditions outlined in the comment letter. The comment letter also included an Annexure (namely Annexure 1) which summarises Sentech's conclusions and findings with regards to the proposed development. The above-mentioned terms and conditions, as well as the conclusions and findings outlined in Annexure 1, have been included in the C&RR which is included in Appendix 7E of this FSR.
Mrs. Jeannette- Anne Steenkamp	25 March 2017	Recommended that a rehabilitation or relocation plan (depending on feasibility) be investigated in the EIA / BA. The removal of plant species from the proposed areas should take place prior to construction commencing. These plant species

Mrs. Jeannette- Anne Steenkamp Mrs. Esther Adeyileka	25 March 2017 25 July 2017	should be grown ex-situ (via a nursery which will create employment opportunities) and then relocated after construction has been completed. Recommended that preference be given to conservation organisations to remove seeds, cuttings and plants prior to construction commencing for conservation purposes. It was stated that the proposed applications fall in the Lower Orange Water Management Area, SiVEST were also informed that Mrs. Adeyileka has given the document to one (1) of her colleagues at DWS (namely Kelebogile Moalosi) so that LO staff can assist SiVEST further.
Mrs. Natasha Higgitt	27 July 2017	 SAHRA provided the following interim comments on the DSR: SAHRA Archaeology, Palaeontology and Meteorites (APM) Unit notes that a Heritage Scoping Report has been submitted, and therefore awaits the pending Heritage Impact Assessment (HIA). It is further noted that the palaeontological recommendations included in the Heritage Scoping Report do not appear in the Palaeontological Desktop Assessment appended to the Heritage Scoping Report. This must be rectified in the HIA. The pending HIA must assess all heritage resources as defined in section 3(2) of the National Heritage Resources Act, Act 25 of 1999 (NHRA) and the report must comply with section 38(3) of the NHRA. Additionally, the Visual Impact of the proposed development on heritage resources and any comments provided by the public regarding heritage resources must be taken into consideration. The Scoping report appendices, the draft EIA with all appendices must be submitted along with the heritage reports in order for further comments to be issued. Additionally, the location of the proposed development must be mapped on the GIS Layer of the case application in order to be compliant.

Mr.	Simphiwe	27 July 2017	SiVEST were informed that the proposed Wind
Masilela			Farm falls below the Johannesburg Area West
			Controlled Airspace and is not situated close to any
			airfield. In addition, the proposed development will
			not impact the safety of flights negatively in and
			around the area.

A detailed Comments and Response Report (C&RR) is included in the **Appendix 7E**.

8.7 **Proof of Notification**

Appendix 7 includes all proof of notification of Interested and Affected Parties. More specifically, the types of proofs are as follows:

- Site notice text (**Appendix 7A**);
- Photographs of site notices (Appendix 7A);
- Proof of advertisements in the newspapers (Appendix 7C);
- Background Information Document (Appendix 7B); and
- Correspondence to registered I&APs and key stakeholders (**Appendix 7D**).

8.8 Focus Group Meetings

Focus Group Meetings (FGMs) will be held with affected and surrounding landowners and with local municipality officials and councillors. FGMs are smaller meetings with specific groups or organisations who have similar interests in or concerns about the project. This process is ongoing and will continue throughout the EIA phase.

Following all meetings, minutes will be compiled and forwarded to all attendees for their review and comment. The primary aim of these meetings is to:

- disseminate information regarding the proposed development to I&APs;
- provide I&APs with an opportunity to interact with the EIA team and the Mainstream representatives present;
- supply more information regarding the EIA process;
- answer questions regarding the project and the EIA process; and
- receive input regarding the public participation process and the proposed development.

8.9 One-on-One Consultation

Where possible, potentially directly affected landowners were consulted on a one-on-one basis and informed about the proposed project. Any comments and/or concerns received were noted and included in the Comments and Responses Report (C&RR) which is included in **Appendix 7E** of this FSR.

This consultation process is seen as one of the important aspects of the EIA and Public Participation process. Should the proposed project be granted an Environmental Authorisation (EA), these particular stakeholders will be directly affected and their properties impacted upon. The consultation process will also ensure that as many uncertainties and concerns as possible are raised upfront and channelled to Mainstream to ensure that the stakeholders and the applicant are informed about these issues throughout the process.

8.10 Comments and Response Report

Issues, comments and concerns raised during the public participation process were captured in the Comments and Response Report (C&RR) which is included in **Appendix 7E** of the FSR. This C&RR provides a summary of the issues raised, as well as responses provided to I&APs. This information will be used to feed into the evaluation of social impacts. All comments received during the review period of the DSR have been included in the C&RR.

8.11 Comments on Draft Scoping Report

The Draft Scoping Report (DSR) was made available for public review after submission to DEA, the competent authority.

The report was out for public review and comment for a period of thirty (30) calendar days, from the 21st of June 2017 to the 21st of July 2017. Written notice was given to all registered I&APs as well as all key stakeholders on the database that the DSR was available for public review.

Electronic copies (CD) of the report will also be made available and will be distributed on written request.

8.12 Authority Review of the Draft Scoping Report

In terms of section 40 (2) of the EIA Regulations (as amended), under Government Notices No R982, public participation must include consultation with all organs of state which have jurisdiction in respect of the activity to which the application relates.

Table 105 below includes all the organs of state who were e-mailed the DSR and sent electronic copies(on CD) of the full report including all appendices. Telephonic follow-up with stakeholders was done inorder to provide them with ample opportunity to comment during the DSR comment period.

 Table 105:
 Authorities follow-up consultation

E	NVIRONMENTA	L IMPACT AS			DEVELOPMENT OF FOUR (4) WIND FA EAR LOERIESFONTEIN, NORTHERN CAP	RMS AND BASIC ASSESSMENTS (BAs) FOR THE PE PROVINCE				
	DISTRIBUTION OF THE WIND FARM DRAFT SCOPING REPORT (DSR) TO ORGANS OF STATE FOR COMMENT									
TITLE	SURNAME	NAME	POSITION	POSTAL ADDRESS	EMAIL ADDRESS	RESPONSE / RECEIPT OF COMMENTS				
HANT	AM LOCAL MUN									
Mr	du Plessis Van Wyk	Charl	Environmental Officer	Private Bag X14 CALVINIA 8190 Private Bag X14 CALVINIA 8190	<u>municipalmanager@hantam.gov.za</u> <u>socialdev1@hantam.gov.za</u>	Access to an electronic copy of the report was posted on 22 June 2017. Attempts were made to contact Mr du Plessis, however, SiVEST were informed that he no longer works for the municipality. Mr Riaan Van Wyk was said to be the person that has taken over from Mr du Plessis. When contacted, Mr. Riaan Van Wyk requested that SiVEST resend the report to him in rder to make comment. The email was subsequently resent to him. Any comments received after the FSR has been submitted will be forwarded to the DEA.				
KHAI-I	MA LOCAL MUN	CIPALITY								
Mr	Isaacs	Obakeng	Municipal Manager	PO Box 108 Pofadder 8890	munman@khaima.gov.za	Access to an electronic copy of the report was posted on 22 June 2017. When contacted, Mr Isaacs informed SiVEST that he will speak to the relevant department and will try send comments				

Mr	Josop	Ρ	Land Use Officer	PO Box 108 Pofadder 8890	<u>commonage@khaima.gov.za</u>	before the end of the week. No coments have however been received by SiVEST to date. SiVEST will continue to pursue comments into the EIA phase. Any comments received after the FSR has been submitted will be forwarded to the DEA.
NAM	AKWA DISTRICT	MUNICIPALITY	Y		·	
Mr	Loubser	Jannie	Manager: Planning	Private Bag X20 SPRINGBOK 8240	janniel@namakwa-dm.gov.za	Access to an electronic copy of the report was posted on 22 June 2017. When contacted, Mr Loubser informed SiVEST that there are no comments at this stage.
DEPA	RTMENT OF EN	/IRONMENTAL	AFFAIRS BIODI	VERSITY		
Mr	Lekota	Seoka		Private Bag X447 Pretoria 0001	slekota@environment.gov.za	Comment was received from DEA on 10 July 2017.
Mr	Rabothata	Mmatlala		Private Bag X447 Pretoria 0001	slekotamrabothata@environment. gov.za	
AGRI	SA-NORTHERN (САРЕ				
Mr	Myburg	Henning	General Manager	PO Box 1094 KIMBERLEY 8300	<u>henning@agrink.co.za</u>	Access to an electronic copy of the report was posted on 22 June 2017. When contacted, Mr Henning informed Sivest that there he will send through comments before 28 July 2017. No coments have however been received by SiVEST to date. SiVEST will continue to pursue comments into the EIA phase. Any comments received after the FSR has been submitted will be forwarded to the DEA.

Makungo	Ester	Environmental Officer	Private Bag X6101 KIMBERLEY 8300	makungoe@dws.gov.za	Comment was received from DWS on 25 July 2017
Mahunonyane	Moses	Director: Institutional Establishment	Private Bag X6101 KIMBERLEY 8300	MahunonyaneM@dws.gov.za	
HERN CAPE DEPA	RTMENT OF	AGRICULTURE, LA	ND REFORM & RURA		
Steenkamp	Gert		P.O.Box 65 CALVINIA 8190	gsteenkamp@ncpg.gov.za	Access to an electronic copy of the report was posted on 22 June 2017. When contacted, Mr Steenkamp informed Sivest that there are no comments at this stage.
ARTMENT OF AGE	RICULTURE,	FORESTRY AND FIS	SHERIES		
ern Cape Departn	nent				
Mans	Jacoline	Chief Forester	Koelenhof 306 Schroder Street UPINGTON, 8800	jacolinema@daff.gov.za	Access to an electronic copy of the report was posted on 22 June 2017. Attempts were made to contact Ms Mans to no avail. SiVEST will continue to pursue comments into the EIA phase. Any comments received after the FSR has been submitted will be forwarded to the DEA.
ncial Department					
Avenant	Paul	Land-use & Soil Management (Agriculture)	Private Bag X120 PRETORIA 0001	paula@daff.gov.co.za	Access to an electronic copy of the report was posted on 22 June 2017. Attempts were made to contact Mr Avenant to no avail. SiVEST will continue to pursue comments into the EIA phase.
	Makungo Mahunonyane HERN CAPE DEPA Steenkamp ARTMENT OF AGF ern Cape Departm Mans	Makungo Ester Mahunonyane Moses HERN CAPE DEPARTMENT OF Steenkamp Gert Steenkamp Gert ARTMENT OF AGRICULTURE, ern Cape Department Mans Jacoline Department	Mahunonyane Moses Director: Institutional Establishment HERN CAPE DEPARTMENT OF AGRICULTURE, LA Steenkamp Gert Steenkamp Gert ARTMENT OF AGRICULTURE, FORESTRY AND FIS ern Cape Department Mans Jacoline Chief Forester motical Department Avenant Paul Land-use & Soil	MakungoEsterEnvironmental OfficerPrivate Bag X6101 KIMBERLEY 8300MahunonyaneMosesDirector: Institutional EstablishmentPrivate Bag X6101 KIMBERLEY 8300HERN CAPE DEPARTMENT OF AGRICULTURE, LAND REFORM & RURA SteenkampGertP.O.Box 65 CALVINIA 8190ARTMENT OF AGRICULTURE, FORESTRY AND FISHERIES ern Cape DepartmentP.O.Box 65 CALVINIA 8190MansJacolineChief Forester Chief ForesterKoelenhof 306 Schroder Street UPINGTON, 8800MansJacolineChief Forester SoilKoelenhof 306 Schroder Street UPINGTON, 8800	MakungoEsterEnvironmental OfficerPrivate Bag X6101 KIMBERLEY 8300makungoe@dws.gov.zaMahunonyaneMosesDirector: Institutional EstablishmentPrivate Bag X6101 KIMBERLEY 8300MahunonyaneM@dws.gov.zaHERN CAPE DEPARTMENT OF AGRICULTURE, LAND REFORM & RURAL SteenkampGertP.O.Box 65 CALVINIA 8190gsteenkamp@ncpg.gov.zaARTMENT OF AGRICULTURE, FORESTRY AND FISHERIESP.O.Box 65 CALVINIA 8190gsteenkamp@ncpg.gov.zaMansJacolineChief Forester VINGTON, 8800jacolinema@daff.gov.zaMansPaulLand-use & SoilPrivate Bag X120 PETORIApaula@daff.gov.co.za

Mr	Ravhogoni	Ntsundeni	Regional Manager	Private Bag x6093 KIMBERLEY 8300	Ntsundeni.Ravhogoni@dmr.gov.za	Access to an electronic copy of the report was posted on 22 June 2017. Attempts to contact Mr Ntsundeni were made, however, SIVEST was
Mr	Muila	Vincent		Private Bag x6093 KIMBERLEY 8300	-	informed that he no longer works in this department and is at the head office. Calls were transferred to replacements but their mailboxes were full. SiVEST will continue to pursue
Mr	Sekepane	Rasibe		Private Bag x6093 KIMBERLEY 8300	-	comments into the EIA phase. Any comments received after the FSR has been submitted will be forwarded to the DEA.
NORT	HERN CAPE DEP	T OF ENVIRON	MENT AND NATU	JRE CONSERVATION		
Mr	Fisher	Brian	Director Environmental Impact Management	Private Bag X86102KIMBERLEY 8300	<u>bfisher@ncpg.gov.za</u>	Access to an electronic copy of the report was posted on 22 June 2017. Mr Fisher informed SiVEST that he was extremelly busy but will try and send comments by Friday 28 July 2017. No coments have however been received by SiVEST to date. SiVEST will continue to pursue comments into the EIA phase. Any comments received after the FSR has been submitted will be forwarded to the DEA.
NORT	HERN CAPE DEP	T OF SPORT, A	RTS & CULTURE:	Heritage Resources U	nit	
Mr	Lenyibi	Patrick	Manager: Heritage Resources	Private Bag X5004 KIMBERLEY 8300	plenyibi@ncpg.gov.za	Access to an electronic copy of the report was posted on 22 June 2017. Attempts were made to contact Mr Lenyibi to no avail. SiVEST will continue to pursue comments into the EIA phase. Any comments received after the FSR has been submitted will be forwarded to the DEA.
SANR	AL - WESTERN R	EGION				

Ms	Abrahams	Nicole	Environmental Coordinator	Private Bag X19 BELLVILLE 7535	abrahamsn@nra.co.za	Access to an electronic copy of the report was posted on 22 June 2017. Attempts were made to contact Ms Abrahams to no avail. SiVEST will continue to pursue comments into the EIA phase. Any comments received after the FSR has been submitted will be forwarded to the DEA.
NORT	HERN CAPE DEPA	ARTMENT OF	ROADS AND PUB	LIC WORKS		
Mr	Roelofse	Jaco	Director: Planning & Design	PO Box 3132 Kimberley 8300	roelofse.j@vodamail.co.za	Access to an electronic copy of the report was posted on 22 June 2017. Attempts were made to contact Mr Reolofse to no avail. SiVEST will continue to pursue comments into the EIA phase. Any comments received after the FSR has been submitted will be forwarded to the DEA.
SAHR	A: HEAD OFFICE					
Ms	Higgitt	Natasha	Heritage Officer: Northern Cape	PO Box 4637 CAPE TOWN 8000	nhiggitt@sahra.org.za	Comment was received from SAHRA on 27 July 2017.
ESKO	M					
Mr	Geeringh	John	Chief Planner	PO Box 1091 JOHANNESBURG 2000	GeerinJH@eskom.co.za	Comment was received from ESKOM on 02 May 2017.
SQUA	RE KILOMETRE A	RRAY				
Dr	Tiplady	Adriaan	Manager: Site Categorisation	PO Box 522 SAXONWOLD 2132	atiplady@ska.ac.za	Comment was received from SKA on 18 November 2016.
SA CIV	/IL AVIATION AU	THORITY (SA	CAA)	<u> </u>		

Ms	Stoh	Lizell	Obstacle Specialist	Private Bag X73 HALFWAY HOUSE 1685	<u>strohl@caa.co.za</u>	Access to an electronic copy of the report was posted on 22 June 2017. Attempts were made to contact Ms Stroh to no avail. SiVEST will continue to pursue comments into the EIA phase. Any comments received after the FSR has been submitted will be forwarded to the DEA.
AIR TR	AFFIC AND NAVI	GATION SERV	VICES (ATNS)			
Ms	Morobane	Johanna	Manager: Corporate Sustainability and Environment	Private Bag X15 KEMPTON PARK 1620	Johanna M@atns.co.za	Comment was received from ATNS on 27 July2017.
Ms	Masilela	Simphiwe	Obstacle Evaluator	Private Bag X15 KEMPTON PARK 1620	SimphiweM@atns.co.za	
TRANS	NET FREIGHT RA	IL				
Mr	Fiff	Sam	Environmental Manager: Freight Rail	PO Box 255 BLOEMFONTEIN 9300	<u>sam.fiff@transnet.net</u>	Access to an electronic copy of the report was posted on 22 June 2017. Attempts were made to contact Mr Fiff to no avail. SiVEST will continue to pursue comments into the EIA phase. Any comments received after the FSR has been submitted will be forwarded to the DEA.
SENTE	СН					
Mr	Koegelenberg	Johan	Renewable Projects	Private Bag X06 Honeydew 2040	koegelenbergj@sentech.co.za	Comment was received from Sentech on 08 March 2017.
TELKO	М		·	·	·	·

Ms	Spammer	Candice	Western Cape Region	Private Bag X20700 BLOEMFONTEIN 9300	SpammerC1@telkom.co.za	Comment was received from Telkom on 20 February 2017.
Mr	Bester	Amanda	Wayleave Officer	Private Bag X20700 BLOEMFONTEIN 9300	WayleaCR@telkom.co.za BesterAD@telkom.co.za	
Ms	van den Heever	Heleen	Ops Manager Central Region	Private Bag X20700 BLOEMFONTEIN 9300	vdheevhd@telkom.co.za	
ENDA		FE TRUST				
Mr	Leeuwner	Lourens	Renewable Energy Project Manager	Private Bag X11, Modderfontein, 1609, Johannesburg	lourensl@ewt.org.za	Access to an electronic copy of the report was posted on 22 June 2017. Attempts were made to contact Mr Leeuwner to no avail. SiVEST will continue to pursue comments into the EIA phase. Any comments received after the FSR has been submitted will be forwarded to the DEA.
WESS	4					
Mr	Griffiths	Morgan	Environmental Governance Programme Manager	PO Box 12444, Centrahil, Port Elizabeth, 6006, South Africa	morgan.griffiths@wessa.co.za	Access to an electronic copy of the report was posted on 22 June 2017. Attempts were made to contact Mr Griffiths to no avail. SiVEST will continue to pursue comments into the EIA phase. Any comments received after the FSR has been submitted will be forwarded to the DEA.
BIRDL	IFE SOUTH AFRI	CA				
Mr	Gear	Simon	Policy and Advocacy Manager	PO Box 515 RANDBURG 2125	advocacy@birdlife.org.za	Access to an electronic copy of the report was posted on 22 June 2017. Attempts were made to contact Mr Gear but Sivest was informed that he

Ms	Stevens	Candice	Policy	PO Box 515	advocacy@birdlife.org.za	no longer works for the department. All EIA
			Manager	RANDBURG		related queries are saved until a replacement is
				2125		appointed. SiVEST will continue to pursue
						comments into the EIA phase. Any comments
						received after the FSR has been submitted will be
						forwarded to the DEA.

9 ASSESSMENT IN TERMS OF EQUATOR PRINCIPLES

The Equator Principles are a financial industry benchmark for determining, assessing and managing social and environmental risk in project financing. A number of banks, exchanges and organisations worldwide have adopted the Principles as requirements to be undertaken for project funding on application and approval. Furthermore, certain funding institutions have not formally adopted the Principles, but require clients to be compliant with them in order to qualify for loans. The Equator Principles are summarised below:

Principle 1: Review and Categorisation

When a project is proposed for financing, the Equator Principles Funding Institution ("EPFI") will categorise the project based on the magnitude of its potential environmental and social impacts and risks.

Principle 2: Environmental and Social Assessment

For each project assessed as being either Category A or Category B, the client / borrower must conduct a Social and Environmental Assessment ("Assessment") process to address the relevant impacts and risks of the proposed project. The Assessment should also propose mitigation and management measures relevant and appropriate to the nature and scale of the proposed project.

Principle 3: Applicable Environmental and Social Standards

The Assessment will refer to the applicable IFC Performance Standards and applicable Industry Specific Environmental, Health, and Safety (EHS) Guidelines.

Principle 4: Environmental and Social Management System and Equator Principles Action Plan

The client / borrower must prepare an Environmental and Social Management System (ESMS). Further, an Environmental and Social Management Plan (ESMP) must be prepared by the client to address issues raised in the Assessment process and incorporate actions required to comply with the applicable standards. Where applicable standards are not met to the EPFI's satisfaction, the client and the EPFI will agree to an Equator Principles Action Plan to outline gaps and commitments.

Principle 5: Stakeholder Engagement

For all Category A and Category B Projects, the EPFI will require the client to demonstrate effective Stakeholder Engagement as an ongoing process in a structured and culturally appropriate manner with Affected Communities and, where relevant, Other Stakeholders. For Projects with potentially significant adverse impacts on Affected Communities, the client will conduct an Informed Consultation and Participation process. The client will tailor its consultation process to: the risks and impacts of the Project; the Project's phase of development; the language preferences of the Affected Communities; their decision-making processes; and the needs of disadvantaged and vulnerable groups.

Principle 6: Grievance Mechanism

The EPFI will require the client, as part of the ESMS, to establish a grievance mechanism designed to receive and facilitate resolution of concerns and grievances about the Project's environmental and social performance. The grievance mechanism is required to be scaled to the risks and impacts of the

Project and have Affected Communities as its primary user. It will seek to resolve concerns promptly, using an understandable and transparent consultative process that is culturally appropriate, readily accessible, at no cost, and without retribution to the party that originated the issue or concern. The mechanism should not impede access to judicial or administrative remedies.

Principle 7: Independent Review

For all Category A projects and, as appropriate, for Category B projects, an independent social or environmental expert not directly associated with the borrower must review the Assessment, AP and consultation process documentations in order to assist the EPFIs due diligence, and assess Equator Principles compliance.

Principle 8: Covenants

An important strength of the Principles is the incorporation of covenants linked to compliance. For all Projects, the client will covenant in the financing documentation to comply with all relevant host country environmental and social laws, regulations and permits in all material respects. For Category A and B projects, the client / borrower will covenant in financing documentation:

- To comply with the ESMPs and Equator Principles AP (where applicable) during the construction and operation of the Project in all material respects; and
- To provide periodic reports in a format agreed with the EPFI (with the frequency of these reports proportionate to the severity of impacts, or as required by law, but not less than annually), prepared by in-house staff or third party experts, that i) document compliance with the ESMPs and Equator Principles AP (where applicable), and ii) provide representation of compliance with relevant local, state and host country environmental and social laws, regulations and permits; and
- To decommission the facilities, where applicable and appropriate, in accordance with an agreed decommissioning plan.

Principle 9: Independent Monitoring and Reporting

To ensure ongoing monitoring and reporting over the life of the loan, EPFIs will, for all Category A projects, and as appropriate, for Category B projects, require appointment of an independent environmental and/or social expert, or require that the borrower to retain qualified and experienced external experts to verify its monitoring information, which would be shared with EPFIs.

Principle 10: Reporting and Transparency

For all Category A and, as appropriate, Category B Projects:

- The client will ensure that, at a minimum, a summary of the ESIA is accessible and available online.
- The client will publicly report GHG emission levels (combined Scope 1 and Scope 2 Emissions) during the operational phase for Projects emitting over 100,000 tonnes of CO₂ equivalent annually.

Although this report is not written in terms of the Equator Principles (EPs), it fully acknowledges that EPs will need to be complied with should funding for the project be required. In general, the following documentation will need to be considered in that regard:

- The "Equator Principles" 2013
- International Finance Corporations Performance Standards on Social and Environment, IFC, January 2012, namely:
 - Performance Standard 1: Social and Environmental Assessment and Management Systems
 - Performance Standard 2: Labour and Working Conditions
 - Performance Standard 3: Pollution Prevention and Abatement
 - Performance Standard 4: Community Health, Safety and Security
 - Performance Standard 5: Land Acquisition and Involuntary Resettlement
 - Performance Standard 6: Biodiversity Conservation and Sustainable Natural Resource Management
 - Performance Standard 7: Indigenous Peoples
 - Performance Standard 8: Cultural Heritage
- International Finance Corporation World Bank Guidelines, General EHS Guidelines 2007.

EHS Guidelines are technical reference documents with general and industry-specific examples of Good International Industry Practice. These EHS Guidelines are applied as required by the World Bank's respective policies and standards. These General EHS Guidelines are designed to be used together with the relevant Industry Sector EHS Guidelines which provide guidance to users on EHS issues in specific industry sectors.

• The EHS Guidelines contain the performance levels and measures that are generally considered to be achievable in new facilities by existing technology at reasonable costs.

9.1 Assessment Results

This section details the current compliance level with which the wind farm projects meets with the Equator Principles and the related Performance Standards which are outlined below.

Table 106: Wind farm Compliance Level in terms of Equator Principles and Related Performance

 Standards.

The coding key is as follows:

Compliance Level			
Clear			
Not assessed/	Not compliant	Partially compliant	Compliant
determined			

Principles	Compliance	Reference	
	Level		
General, Performance Standard	1 Environmental	I & Social Reporting	
1. Baseline Information		Refer to Chapter 2 - Technical Details and	
		Chapter 5 – Description of the receiving	
		environment	
2. Alternatives (Assessment of		Refer to Chapter 7	
alternatives)			
3. Impacts and risks		Refer to Chapter 6	
4. Global impacts		N/A	
5. Legal requirements		Refer to Chapter 3 for legal requirements and	
		guidelines	
6. Transboundary		N/A	
7. Disadvantaged / vulnerable		Partly addressed in 5.15 as part of the Socio-	
groups		economic scoping assessment. This will be	
		addressed as part of the EMPr during the EIA	
		phase	
8. Third party		Refer to section 1.1.	
9. Mitigation measures		Partly addressed in section 6.3 as part of	
		scoping assessments. These will be	
		addressed as part of the EMPr during the EIA	
		phase	
10. Documentation process		Refer to Chapter 1, Chapter 3 Sections 3.1.1	
		and 3.1.2 and Chapter 7	
11. Action Plans		Partially, addresses in Chapter 11, To be	
		addressed during in the FSR with the EIA Plan	
		of study and then will be addressed further in	
		the EIA phase	
12. Organisational capacity		To be addressed as part of the EMPr during the	
		EIA phase	
13. Training		To be addressed as part of the EMPr during the	
		EIA phase	
14. Grievance mechanism		To be addressed during the EIA phase	
15. Report content		To be addressed as part of the EMPr during the	
		EIA phase	
Performance Standard 2, Labou	r & Working Con	ditions	
1. Human Resource Policy		To be addressed as part of the EMPr during the	
		EIA phase	
2. Working relationship		To be addressed as part of the EMPr during the	
		EIA phase	

SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD Proposed Xha! Boom Wind Farm - Final Scoping Report Version No: 1

Principles	Compliance	Reference
	Level	
3. Working conditions with and		To be addressed as part of the EMPr during the
terms of employment		EIA phase
4. Workers organisation		To be addressed as part of the EMPr during the
		EIA phase
5. Non-discrimination and equal		Partly addressed in 5.15 as part of the Socio-
opportunities		economic scoping assessment. This issue will
		also be addressed as part of the EMPr during
		the EIA phase
6. Grievance mechanism		To be addressed as part of the EMPr during the
		EIA phase
7. Occupational Health and		To be addressed as part of the EMPr during the
Safety		EIA phase
8. Non-employee workers		To be addressed as part of the EMPr during the
		EIA phase
9. Supply Chain		To be addressed as part of the EMPr during the
		EIA phase
10. Labour Assessment		To be addressed as part of the EMPr during the
Component of a Social and		EIA phase
Environmental Assessment		
Performance Standard 3, Pollut	ion	
1. Pollution Prevention,		To be addressed as part of the EMPr during the
Resource Conservation and		EIA phase
Energy Efficiency		
2. Wastes		To be addressed as part of the EMPr during the
		EIA phase
3. Hazardous material		To be addressed as part of the EMPr during the
		EIA phase
4. Dangerous substances		To be addressed as part of the EMPr during the
C C		EIA phase
5. Emergence preparedness and		To be addressed as part of the EMPr during the
response		EIA phase
6. Technical guidance – ambient		To be addressed as part of the EMPr during the
considerations		EIA phase
7. Greenhouse gas emissions		N/A
Performance Standard 4, Health	n & Safety	l
1. Hazardaya matariala aafaty		To be addressed as part of the EMPr during the
 Hazardous materials safety 		

Principles	Compliance	Reference
	Level	
2. Environmental and natural		Refer to Chapter 6
resource issues		
3. Emergency preparedness and		To be addressed in the EMPr during the EIA
response		phase
Performance Standard 5, Land		Refer to Chapter 4 Project needs and
Acquisition		desirability is discussed.
Performance Standard 6,		Refer to Chapter 5, section 5.7 and Chapter
Biodiversity		6, section 6.2.1 which summarises the
		Biodiversity Scoping Assessment
Performance Standard 7,		Refer to Chapter 8 describing public
Indigenous People		participation.
Performance Standard 8,		Refer to Chapter 5, section 5.14 and Chapter
Cultural Heritage		6, section 6.2.8

It is important to note that, most of the issues listed per performance standard in the table above will only be addressed during the EIA phase. Therefore at this stage (scoping phase), most of the issues are categorised as "not assessed/ to be determined". Full compliance with the EPs will only be realised following EIA assessments.

10 CONCLUSIONS AND RECOMMENDATIONS

The above report provides a broad introduction to the issues that are pertinent to the proposed Xha! Boom Wind Farm, and highlights important issues to be investigated during the EIA Phase of the project. The EIA Phase will draw on the above information and make use of the recommended specialist studies to reach an objective decision on the overall impact of the proposed development.

The EIA Phase will culminate in the compilation of detailed mitigation measures to reduce impacts, the identification of least impactful locations for the wind turbines, the identification of least impactful locations for associated infrastructure and the identification of sensitive areas within the site which may require more specific management measures. The EIA Phase will also aim to optimise and improve potential positive impacts that may result from the proposed development.

10.1 Conclusions

None of the specialist studies conducted during the Scoping Phase for the proposed development has identified any fatal flaws for the proposed Xha! Boom Wind Farm. However, a few of potentially significant (positive and negative) environmental impacts have been identified and will need to be evaluated and assessed further during the detailed EIA phase of the project. In addition, the EIA Phase will provide a more detailed comparative analysis of these potential impacts against the "no-go" alternative.

Detailed mitigation and management measures will be developed during the Environmental Management Programme (EMPr) phase of the project, in response to the detailed assessment, and will be run towards the end of EIA phase of the project. Should this project receive a positive environmental authorisation, the EMPr will guide the project proponent and appointed contractor(s) through the final design, construction and operational phases of the proposed project.

10.1.1 Summary of Findings

A summary of the findings for each identified environmental impact evaluated in the context of the proposed development (both biophysical and social) is provided in the table below.

Aspect	Potential impacts
Biodiversity	 Impacts on vegetation and protected plant species
	 Direct Faunal Impacts during construction and operation
	 Increased Soil Erosion Risk
	 Alien Plant Invasion
	 Impacts on broad-scale ecological processes
	Cumulative habitat loss

Aspect	Potential impacts
Avifauna	Impacts associated with displacement of priority avifauna due to disturbance
	during construction phase
	 Impacts associated with the displacement of priority species due to habitat
	destruction during construction phase
	 Impacts associated with the Avifauna displacement of priority species due to
	disturbance during operational phase
	 Impacts associated with collisions of priority species with the turbines in the
	operational phase
	 Impacts associated with mortality of priority species due to electrocution on
	the internal MV lines in the operational phase
Bats	 Impacts on destruction of bats roots due to earthworks and blasting
	 Impacts on loss of foraging habitat during the construction phase
	 Impacts of bat mortalities due to direct blade impact or barotrauma during
	foraging activities (not migration)
	 Impacts of artificial lighting
	 Impacts of loss of foraging habitat during the decommissioning phase
Surface Water	 Impacts associated with the Construction Lay-down Area directly in or in close
	proximity to Surface Water Resources
	Construction Vehicle and Machinery Degradation Impacts to Surface Water
	Resources
	 Human Degradation of Flora and Fauna associated with Surface Water Resources
	 Degradation and Removal of Vegetation and Soils associated with Surface
	Water Resources
	 Increased Storm Water Run-off, Erosion and Sedimentation Impacts
	 Vehicle Damage to Surface Water Resources
	 Storm-water Run-off Impacts to Surface Water Resources
Soils and	 Stoff-water Rull-off impacts to Sufface Water Resources Loss of agricultural land use
	 Generation of additional land use income
Agricultural Potential	 Erosion due to alteration of the land surface run-off characteristics
Fotential	
	 Loss of topsoil caused by poor topsoil management construction phase Degradation of veld
	Dust generation
NI-1	Soil contamination impacts
Noise	 Increase in sound levels at the dwellings of receptors during the day as a
	result of the construction of the access roads and grid infrastructure during
	the day
	 Increase in sound levels at the dwellings of receptors during at night due to
	night-time Construction (and Upgrade) of access roads and other
	infrastructure
	 Increase in sound levels at the dwellings of receptors during the day due to
	construction traffic passing the dwellings

Aspect	Potential impacts
	 Increase in sound levels at the dwellings of receptors at night due to
	construction traffic passing the dwellings
	 Increase in sound levels at the dwellings of receptors during the day due to
	daytime construction of Wind Turbines and other infrastructure
	 Increase in sound levels at the dwellings of receptors during at night due to daytime construction of Wind Turbines and other infrastructure
	 Increase in sound levels at the dwellings of receptors during the day as a
	result of noise from operating wind turbines
	 Increase in sound levels at the dwellings of receptors at night as a result of
	noise from operating wind turbines
Visual	 Visual impacts of the proposed Xha! Boom Wind Farm during construction
	 Visual impacts of the infrastructure associated with the proposed Xha! Boom
	Wind Farm during construction
	 Visual impacts of the proposed Xha! Boom Wind Farm during operation
	 Visual impacts of the infrastructure associated with the proposed Xha! Boom
	Wind Farm during operation
Heritage	 Impact on the Palaeontology Heritage (fossils) of the development footprint
	 Impact on Stone Age resources
	 Impact on Unidentified heritage structures / Chance Finds
Socio-economic	 Increased production and temporary stimulation of GDP-R
	 Skills development due to the creation of new employment opportunities
	 Increased household income and improved standard of living
	 Investment in the local community and economic development projects as
	part of a Social Economic Development (SED) and Enterprise Development
	Plan (ED)
	 Increase in government revenue due to the capital investment
	 Change in demographics due to migration of workers from other areas and influx of jobseekers
	 Increase in social pathologies associated with the influx of migrant labourers and job-seekers to the area
	 Added pressure on basic services and social and economic infrastructure
	 Establishment of informal hospitality industry due to increased demand for
	accommodation
	 Sustainable increase in GDP of the national and local economies through
	operation and maintenance activities
	 Sustainable increase in government revenue stream
	 Creation of long term employment in local and national economies through
	operation and maintenance activities
	Skills development due to the creation of new sustainable employment
	opportunities
	Increased household income
	 Improved standard of living of households directly or indirectly benefiting from
	created employment opportunities
	 Improved access to basic services and community services

Aspect	Potential impacts
Traffic	 Increase in traffic generation throughout the lifetime of the project
	 Increase in road maintenance required

Based on the specialist studies, the following conclusions can be reached for each environmental parameter assessed.

Biodiversity	The Xha! Boom Wind Farm consists largely of arid grassland or low open
Biodiversity	
	shrubland on flat plains and gently sloping hills that are low sensitivity, with few
	species of conservation concern. Development in these areas would generate low
	impacts of local significance only. The only sensitive feature present at the site
	are some minor drainage lines in the south and some rocky outcrops along the
	transitional area between the grasslands of the east and the arid shrubland of the
	west. These however occupy a small proportion of the site and these can easily
	be avoided by the final layout of the development.
	Cumulative impacts as a result of the development are likely to be relatively low
	as the footprint of the development is quite low and the intensity of development
	in the wider area is still low despite the fact that a node of renewable energy is
	developing around the Helios substation. In addition, there are no specific features
	of the Xha! Boom development area which would indicate that it is more important
	than the surrounding area for faunal movement or landscape connectivity. The
	contribution of the Xha! Boom development to cumulative impact is thus likely to
	be relatively low and would operate at a local scale only.
	With the application of relatively simple mitigation and avoidance measures, the
	impact of the Xha! Boom Wind Farm can be reduced to a low overall level. There
	are no specific long-term impacts likely to be associated with the wind farm that
	cannot be reduced to an acceptable level through mitigation and avoidance. As
	such, there are no fatal flaws associated with the development and no apparent
	reasons that it should not proceed to the EIA phase.
Avifauna	Information on the micro habitat level was obtained through a pre-construction
	monitoring programme which was conducted over four seasons between
	November 2015 and September 2016. The proposed Mainstream Xha! Boom
	Wind Farm will have a variety of impacts on avifauna which range from low to
	high. Displacement of priority species due to disturbance during construction
	phase is likely to be a temporary medium negative impact, but can be reduced to
	low with the application of mitigation measures. Displacement of priority species
	due to habitat destruction during construction phase is likely to be a medium
	negative impact and will remain so, despite the application of mitigation measures.
	Displacement of priority species due to disturbance during the operational phase
	is likely to be of low significance and it could be further reduced through the
	application of mitigation measures, namely the restriction of operational activities
	to the plant area and no access to other parts of the property unless it is necessary

	for wind farm related work. Collisions of priority species with the turbines in the operational phase are likely to be a high negative impact but it could be reduced to medium negative through the application of mitigation measures. The electrocution of priority species on the internal MV powerlines is rated as a potentially medium impact which could be reduced to low through the use of bird friendly designs. Finally, it is concluded that, after taking into account the expected impact of proposed renewable energy projects within a 40km radius around Helios MTS that the cumulative impact of the proposed Xha! Boom Wind Farm on priority avifauna, if appropriate mitigation is implemented, will range from minor to insignificant.
	It should be noted that an addendum report was compiled by the Avifauna specialist in order to assess whether the conclusions and recommendations of the Bird Impact Assessment Report compiled in December 2016 will be affected by a change in the proposed turbine dimensions from a hub height of up to 150m and rotor diameter of up to 150m, to a hub height of up to 160m and a rotor diameter of up to 160m. Assuming a 160m blade diameter and a 160m hub height, it means maximum height of the blade will be 240m (previously 225m) and minimum height will be 80m (previously 75m).
	 The conclusions and recommendations of the original Bird Impact Assessment Report remains unchanged by the proposed change in turbine dimensions. The reason for that are as follows: While the risk rating for Martial Eagle has increased with the new turbine dimensions, it is still below the average risk rating for priority species; The overall risk rating for priority species has increased by only 7.45%; and The weight of published findings indicate that rotor swept area as a stand-
Bats	 alone issue is not a key factor in determining collision risk. The site was visited over the period of November 2015 to December 2016 wherein data was collected from the five 10m mast and one meteorological mast, where after the systems were decommissioned. The long-term data was analysed by means of identifying the bat species detected by the monitoring systems and the periods of high bat activity. A number of technical failures occurred with the monitoring systems. The failures should not compromise the study since an adequate amount of data was recorded during the 12 months.
	<i>Tadarida aegyptiaca</i> is the most abundant bat species recorded by all systems. Common and abundant species, such as <i>Neoromicia capensis</i> , <i>Tadarida aegyptiaca</i> and <i>Miniopterus natalensis</i> , are of a larger value to the local ecosystems as they provide a greater contribution to most ecological services than the rarer species due to their higher numbers. <i>Miniopterus natalensis</i> is the only migratory species detected on site. It was detected by all the monitoring systems, with Short Mast 3 detecting the highest number of passes. The results of the full 12 months monitoring study were analysed for the presence of a migratory event in order to determine whether the site is located within a migratory

route. There were no signs and activity levels indicative of a migratory event however, an event may occur in the future and the Operational Phase Bat Monitoring Study must be designed such that a migratory event would be detected if it occurred. Met Mast monitoring system indicates the highest amount of bat passes, followed by Short Mast 3.

Short Mast 2 shows a low sum of bat passes over the first three-month monitoring period due to a fault with the detector software causing the system to freeze and not record for the full monitoring period. Short Mast 1 had no data for the months of April, June, and July 2016 due to system failures.

The average nightly bat passes per month is used to show the general trend in bat activity across the different month of the year. All the masts show higher bat activity from January to April with predominant peaks for the month of March, except for Short Mast 4 which has a peak in January 2016, except for Short Mast 2 which was not recording during January as explained above. Bat activity decreased as the seasons changed into winter. An increase in bat activity, for all the monitoring systems, occurred again from August to November as the seasons changed from winter to spring.

A sensitivity map was drawn up indicating potential roosting and foraging habitat. The Moderate bat sensitivity areas and associated buffer zones must be prioritised during operational monitoring and preferably be avoided during turbine placement, if another feasible option is available. The High Bat Sensitivity areas are expected to have elevated levels of bat activity and support greater bat diversity. High Bat Sensitivity areas are 'no – go' areas due to expected elevated rates of bat fatalities due to wind turbines. Turbines located within high sensitivity areas are removed from the layout. There were no turbines located within moderate sensitivity areas.

Peak activity times across the night and monitoring period were identified, as well as wind speed and temperature parameters during which most bat activity was detected. Mitigations are expected to be implemented once the turbines become operational. The proposed mitigation schedule follows the precautionary approach strongly and therefore the mitigations will be adjusted and refined during a post-construction bat monitoring study.

It should be noted that an amendment letter has been compiled by the Bat specialist in order to assess whether the proposed amendments (a change in the proposed turbine dimensions from a hub height of up to 150m and rotor diameter of up to 150m, to a hub height of up to 160m and a rotor diameter of up to 160m) will affect the larger outcomes, conclusions and impact assessment as assessed during the bat EIA and long-term preconstruction study, as well as to determine whether the amendments are acceptable from a bat sensitivity perspective.

	It was deemed that the proposed increase in rotor diameter, in combination with the proposed increased hub height will result in an increase of 5m for the minimum rotor swept ground clearance. In other words the lowest rotor swept height will be further away from the ground. Such a difference is minimal but still beneficial for bat conservation as bat activity and diversity decreased with height from ground level. However, the larger rotor diameter will result in a larger airspace occupied per turbine which will slightly increase the probability of impacting bats. These two effects can be considered as cancelling each other out.
	Therefore, considering all factors, the proposed amendments will not affect the larger outcomes, conclusions and impact assessment as assessed during the bat EIA and long-term preconstruction study, and is therefore still acceptable from a bat sensitivity perspective.
Surface water	Findings from the database assessment showed that there is only one (1) natural depression wetland. This wetland is not considered to be a Wetland Freshwater Ecosystem Priority Area (WETFEPA). Aside from the wetland, two (2) non-perennial watercourses were identified in the Northern Cape ENPAT (2000) database. No other watercourses were identified from the NFEPA (2011) database. No other surface water resources were identified from the available databases.
	 In terms of the desktop delineation exercise, the following surface water resources were identified: Two (2) Depression Wetlands; Three (3) Major Drainage Line (drainage lines with channel width >5m); Two hundred and thirty, six (236) Drainage Lines (drainage lines with a channel width <5m).
	Between the database findings and the desktop delineation information, the identified features identified are to be earmarked for groundtruthing in the fieldwork phase. A refinement of the surface water resources will be undertaken in the impact phase pending the fieldwork findings. A provisional buffer zone of 50m has been implemented at this stage for all surface water resources. Pending the results of the in-field groundtruthing and verification exercise, the buffer zone may be increased or decreased depending on the assessment findings.
	A comparative assessment was undertaken to determine the environmentally preferred alternative (from a surface water perspective) for the proposed substation. Based on the comparative assessment, the preferred alternative site for the proposed substation was Substation Option 1.
	In terms of NEMA (1998) and the EIA Regulations (2014), as no specific layout is available at this time, it is provisionally identified that Activities 12 and 19 of Government Notice 983 Listing Notice 1 are identified that may be triggered thereby requiring Environmental Authorisation. In terms of the NWA (1998), it has been identified that there are a number of surface water resources which may be

	offected and it is therefore pessible that water uses (a) and (i) may be applicable
	affected and it is therefore possible that water uses (c) and (i) may be applicable, thereby requiring a water use license. The applicability of these environmental activities and water uses can ultimately only be confirmed once a more detailed layout is available.
	Potential cumulative impacts were assessed given that numerous proposed and currently constructed renewable energy developments can be found in the surrounding area. As such, it was found that from a direct cumulative potential impact perspective, where there is no direct impact to surface water resources on the proposed project site, there will be no direct cumulative impact to surface water resources from a project site specific level. The nearest surrounding development that could potentially be impacted as a result of the proposed development from an indirect perspective is the Kokerboom 2 Wind Farm. The considerable distance (9km) and separation by two watersheds between the proposed development and the Kokerboom 2 Wind Farm mean that it is therefore highly unlikely that the proposed development will affect the Kokerboom 2 Wind Farm. Over and above the negligible potential cumulative impact to Kokerboom 2 Wind Farm, the potential cumulative impact on the remaining surrounding renewable energy developments is negligible for the same reasons as stated above. The negligible cumulative impact is compounded by the fact that there is an increased distance to the remaining surrounding proposed renewable energy developments.
Soils and	The key findings of the Soils and Agricultural Potential scoping study are:
Agricultural	
Potential	 Soils across the site are predominantly shallow, sandy soils on underlying rock or hard-pan carbonate, of the Coega, Mispah, Glenrosa and Askham soil forms.
	 The major limitations to agriculture are the extremely limited climatic moisture availability and the poor soils.
	 As a result of these limitations, the site is unsuitable for cultivation and agricultural land use is limited to low intensity grazing.
	 The land capability is classified as Class 7 - non-arable, low potential grazing land. The site has a very low grazing capacity of 45 hectares per large stock unit.
	 There are no agriculturally sensitive areas and no parts of the site need to be avoided by the development.
	 The significance of all agricultural impacts is kept low by two important factors. The first is that the actual footprint of disturbance of the wind farm is very small in relation to the available grazing land. The second is the fact that the proposed site is on land of extremely limited agricultural potential that is only viable for low intensity grazing.
	 Six potential negative impacts of the development on agricultural resources and productivity were identified as:
	 Loss of agricultural land use caused by direct occupation of land by the energy facilities' footprint.
	 Soil Erosion caused by alteration of the surface characteristics.

	• Generation of dust caused by alteration of the surface characteristics.
	 Loss of topsoil in disturbed areas, causing a decline in soil fertility.
	 Degradation of surrounding grazing land due to vehicle trampling.
	 Soil contamination from hydrocarbon spills during construction.
	 Two potential positive impacts of the development on agricultural resources
	and productivity were identified as:
	 Generation of additional land use income through renting land for energy
	generation which makes a positive contribution to farming cash flow and
	thereby improves the financial sustainability of farming on site.
	 Increased security against stock theft due to the presence of the energy
	facility.
	 Because of the low agricultural potential, and the consequent low agricultural
	impact, there are no restrictions relating to agriculture which would preclude
	authorisation of the proposed development.
	 Despite any cumulative regional impact that may occur, it is preferable to incur
	a loss of agricultural land in such a region, without cultivation potential, than
	to lose agricultural land that has a higher potential, to renewable energy
	development elsewhere in the country.
	• There are no conditions resulting from this assessment that need to be
	included in the environmental authorisation.
	There is no difference and therefore no preference between the proposed
	alternatives, in terms of agricultural impacts.
Noise	The Noise scoping assessment indicates that the proposed project could have a
	noise impact on the surrounding area, as there are noise-sensitive developments
	within the (potential) area of acoustical influence of the construction activities and
	operating wind turbines.
	The construction of access roads as well as construction traffic may increase the
	noise levels sufficiently to result in noise impacts of medium significance.
	Mitigation measures are available and easy to implement to reduce the potential
	significance of the noise impact to low.
	The potential noise impact of operational activities is of a low significance, similarly
	the potential cumulative noise effect when all the surrounding wind turbines are
	operating is of low significance.
	There is a high confidence in the finding of this report, and with the implementation
	of the mitigation measures there exists a low potential for a noise impact. An
	additional noise impact assessment is not required for the EIA phase, as it will not
	provide additional information.
	During the Environmental Impact Assessment (EIA) phase the noise models will

	that the project can be authorised (subject to the implementation of the mitigation
	measures agreeable with the identified receptors) from a noise perspective.
Visual	A scoping-level study has been conducted to identify the potential visual impact and issues related to the development of the Xha! Boom Wind Farm near Loeriesfontein, in the Northern Cape Province. The study area has a largely natural, untransformed visual character although there are several renewable energy developments (solar and wind) proposed within relatively close proximity to the proposed wind farm. These facilities and their associated infrastructure, will significantly alter the visual character and baseline in the study area once constructed and make it appear to have a more industrial-type visual character. The proposed wind farm development is likely to visually influence only one (1) farmstead / homestead identified within the visual assessment zone, therefore this is regarded as a potentially sensitive visual receptor location. The sensitivity of the receptor locations will need to be confirmed through further assessment in the next phase of the study. The nature of the visual impacts associated with a development of this size on the receptors in the study area could be significant.
	An overall impact rating was also conducted as part of the Scoping Phase in order to allow the visual impact to be assessed alongside other environmental parameters. The assessment revealed that overall the proposed Xha! Boom Wind Farm is expected to have a low visual impact during construction and a medium visual impact during operation, with relatively few mitigation measures available. In addition, the infrastructure associated with the proposed Xha! Boom Wind Farm would have a low visual impact during construction and a low visual impact during operation.
	There is no preference between the two (2) proposed 132kV onsite IPP Substation alternatives from a visual perspective. The close proximity of the substation locations and the flat nature of the topography are expected to result in equal visual impacts.
	Further assessment will however be required in the EIA-phase to investigate the sensitivity of the receptor locations to visual impacts associated with the proposed development and to quantify the impacts that would result.
Heritage	The Heritage Scoping Report (HSR) completed in October 2016 has shown that the proposed Xha! Boom site to be developed as a WEF may have heritage resources present on the property. This has been confirmed through archival research and evaluation of aerial photography of the sites.
	The subsequent field work completed for the October 2016, has confirmed the presence of 3 heritage resources as well as several areas with existing infrastructure such as fenced off camps, windmills and reservoirs.
	The design process and methodology followed by the developer for this project will enable the heritage assessment to provide input into the proposed layouts before the impact assessment. This resulted in cognisance being taken of the

	positions of the heritage resources and thus the reduction of impacts at an early design phase.
	Palaeontology The proposed Xha! Boom Wind Farm development is unlikely to pose a substantial threat to local fossil heritage. In Palaeontological terms the significance is rated as low (negative). Consequently, pending the discovery of significant new fossil material here, no further specialist studies are considered to be necessary.
	However, should fossil remains be discovered during any phase of construction, either on the surface or exposed by fresh excavations, the ECO responsible for these developments should be alerted immediately. Such discoveries ought to be protected (preferably <i>in situ</i>) and the ECO should alert SAHRA (South African Heritage Research Agency) so that appropriate mitigation (<i>e.g.</i> recording, sampling or collection) can be taken by a professional palaeontologist.
	The specialist involved would require a collection permit from SAHRA. Fossil material must be curated in an approved collection (<i>e.g.</i> museum or university collection) and all fieldwork and reports should meet the minimum standards for palaeontological impact studies developed by SAHRA.
	<u>Comparative Assessment of Alternatives</u> A comparative assessment of the preferred substation position has shown that from a heritage perspective both area considered as good options. Substation Option 1 is however preferred as Substation Option 2 will impact on a low significance heritage find.
	<u>Cumulative Impact</u> It is the Heritage Specialist's considered opinion that this additional load on the overall impact on heritage resources will be low. With a detailed and comprehensive regional dataset this rating could possibly be adjusted and more accurate.
Socio-economic	 Relevant national, provincial and local government policies reveal that the development of RE technologies is strongly supported both: At the national level, developing an RE sector is supported with respect to the need to diversify and expand energy supply At the provincial and local level, RE sector development support is premised on the prioritisation of regional economic stimulation as well as the creation of employment opportunities for the benefit of local people.
	The overall consideration of the favourable alignment of local, regional and national policy with the proposed project as well as the complementary nature of wind farms and the current land use of the project site is evidence that no fatal flaws are present from the socio-economic perspective. Considering all the potential socio-economic impacts for both the construction and operational phase,

	with respect to the substation, there is no differentiation that each he made
	with respect to the substation, there is no differentiation that can be made
	regarding the potentially ensued socio-economic effects as they will remain the
	same regardless of the sub-station site alternative chosen.
Geotechnical	From a geotechnical perspective, the major findings suggest that the site is relatively flat with local ridges associated with dolerite intrusions. The only prominent hill is Groot Rooiberg, on the southern site boundary. The water table is 10m below the ground level during the winter months and consequently the site is dry throughout the year.
	Greening interventions are recommended during construction of the wind farm. These include water and energy related interventions, material re-use and solid waste management. The site, being vacant, currently generates no solid waste and it is proposed that onsite composting, sorting and recycling will reduce the overall volume of waste being collected and removed from the site.
Traffic	Both the abnormal and legal vehicles were reviewed in terms of their type of activity; i.e. construction traffic, traffic associated with the transportation of the wind turbine components, or traffic associated with the transportation of materials, equipment and people. The key issues associated with the construction and operational phases of the project that will be assessed as part of the transport study are:
	 Increase in traffic generation throughout the lifetime of the project;
	 Increase in road maintenance required; and
	• Ability to transport wind turbine components to site safely and efficiently.
	With regards to transport, an assessment was undertaken to determine the impact that the proposed wind farm will have on the operation of the existing road network, both during construction and post completion. It is anticipated that during construction up to 100 vehicles will travel to the site in the morning peak hour, the majority travelling from the proposed construction camp along the R358. In addition, other transportation aspects relating to the proposed project, including access, internal circulation and abnormal vehicle transportation were investigated and form part of this report. The report recommends the primary access to the site to be via the R358 which links directly to the N7. This route is appropriate for both legal vehicles as well as abnormal vehicles carrying the wind turbine components.
Radiation	In order to determine whether the planned wind farm development could have any
Emissions	influence on the SKA, Mainstream requested a risk evaluation of the planned
(SKA)	development to SKA activities. This risk assessment assumes the use of 47
	Acciona AW 125 TH100A turbines within the Xha! Boom development and will be
	compared to known radiated emission data from the AW125 TH100A Acciona
	WTG as presented in the Acciona Control Plan. The Acciona AW 125 TH 100A is
	the model within the AW 3000 platform that will be evaluated for this project. This
	assessment will be updated based on additional measurement results and design information as it becomes available.
	The intent of this evaluation is to ensure that the Xha! Boom facility poses a low risk of detrimental impact on the SKA by using known radiated emission

amplitudes of the Acciona AW3000/125 TH100 50Hz wind turbine. Specific mitigation measures to be implemented on the AW3000/125 TH100 50Hz wind turbine in order to achieve 40 dB of attenuation has been reviewed and agreed by SKA South Africa as described in the Acciona Control Plan.

The current Emission Control Plan for the AW125 TH100A WTG provides for a 40dB reduction in radiated emissions to ensure the cumulative emission level of previously assessed wind farms where the Acciona AW 125 TH100A WTG will be used is within the requirements of SKA. This requirement is based on measurements on the Acciona AW 125 TH100A WTG at the Gouda facility in South Africa and Barosoain wind farm, Navarra, Spain. Two WTG locations (WTG 1 and WTG 36) and two SKA installations (Rem Opt 7 and SKA 2377) were used for the evaluation. Due to natural terrain barriers and the 52.6km distance between Xha! Boom and Rem-opt 7, the closest SKA unit, no degradation of performance is expected when the mitigated AW 125 TH100A Acciona turbines are installed. This shown by the 10dB to 20dB higher path loss for Xha! Boom compared to Garob.

The Karoo area is ideally suited for the installation and commissioning of renewable energy projects, but is also host to the Department of Science and Technology's SKA radio telescope project. Due to the sensitivity of the telescope receivers, there is a risk that unintentional emissions from the systems and associated equipment associated with renewable energy projects will desensitize or saturate the SKA receivers resulting in interference to celestial observations and/or data loss. Such interference is typically referred to as 'Radio Frequency Interference' (or 'RFI'). The NITIA TM-89-139 calculation of 17.9dB (REM OPT 7 location) and 18.4dB (SKA ID 2377 location) to be added to the emissions from a single unit to allow for the cumulative effect of 500 units appears to be conservative when compare to general man-made noise data (<10dB increase measured at various locations). The >60 degree beamwidth assumed during the NITIA TM-89-139 calculations will result in over estimation of the cumulative effect due to a higher number of emitters in the beamwidth. The 40dB mitigation is a border line figure when considering all the adjacent projects resulting in a relatively high emitter density.

To verify overall wind farm emissions, ambient measurements should be done at the new site before construction starts. Tests points should be carefully selected based on test equipment sensitivity with the objective to observe the increase in ambient emissions as construction progresses. Final site tests will be done on completion of the project to confirm the radiated emission levels. Although not anticipated, proper mitigation measures on identified emitters will be studied and implemented if final test shows emissions exceeding the SKA threshold.

It should be noted that the specialist was requested to compile a letter which details the impacts associated with the change in the proposed turbine dimensions

from a hub height of up to 150m and rotor diameter of up to 150m, to a hub height
of up to 160m and a rotor diameter of up to 160m from an SKA perspective.
 According to the specialist, the risk of interference between wind turbines and the SKA radio telescope is primarily a function of the following factors: Radiated emission amplitude from turbine; Turbine hub height; Number of turbines; Distance between turbine and SKA infrastructure; and Terrain between the turbine and the SKA infrastructure (line of sight or natural barriers between the installations).
The dB increase in the electromagnetic noise by increasing the number of turbines from 47 units to 70 units can be estimated with the standard 10 x Log (N), where N is the number of turbines, formula as a reasonable assumption. Changing the number of turbines from 47 to 70 will therefor result in a 13.6dB increase in electromagnetic noise.
Increasing the turbine hub height could result in the nacelle being elevated above the natural terrain barriers that provided a shield between the turbine and the SKA infrastructure at a lower hub height. The change in interference risk profile will have to be re-evaluated if the nacelle height is different from the initial proposed height to verify the line of sight/ terrain shielding conditions.
Further studies would in any case be required at the stage a final turbine type has been confirmed, at which stage all these uncertainties would be clarified.

10.2 Recommendations

Aspect	Fatal	Site refinement / Recommendations	Further
	flaws		Investigations
Biodiversity	None	There are no specific long-term impacts likely to	Yes
		be associated with the wind farm that cannot be	
		reduced to an acceptable level through	
		mitigation and avoidance. No layout has been	
		provided for the current assessment and an	
		important activity for the EIA will be assessing	
		the layout in relation to the sensitive features of	
		the site	
Avifauna	None	After taking into account the expected impact of	Yes
		proposed renewable energy projects within a	
		40km radius around Helios MTS that the	
		cumulative impact of the proposed Xha! Boom	

 Table 109: Outcomes and Recommendations of Specialist Studies

Aspect	Fatal	Site refinement / Recommendations	Further
	flaws		Investigations
		Wind Farm on priority avifauna, if appropriate mitigation is implemented, will range from minor to insignificant.	
Bats	None	 A sensitivity map was drawn up indicating potential roosting and foraging habitat. The Moderate bat sensitivity areas and associated buffer zones must be prioritised during operational monitoring and preferably be avoided during turbine placement, if another feasible option is available. High Bat Sensitivity areas are 'no – go' areas due to expected elevated rates of bat fatalities due to wind turbines. Turbines located within high sensitivity areas and buffers or removed from the layout. Mitigation schedule should be monitored during the operational phase bat study, and the recommended mitigation measures and levels of curtailment be adjusted according to the results of the operational monitoring. The proposed mitigation schedule follows the precautionary approach strongly and therefore the mitigations will be adjusted and refined during a post-construction bat monitoring study. 	Yes
Surface water	None	 Specialist recommendations in terms of the proposed development are as follows: An impact phase assessment with infield groundtruthing and verification of surface water resources on the Wind Farm site must be undertaken to inform the layouts proposed in the impact phase; All surface water resources and buffer zones must be avoided as far as practically possible in the layouts to be designed in order to minimise and potentially avoid potential impacts as far as possible; 	Yes

Aspect	Fatal flaws	Site refinement / Recommendations	Further Investigations
		 The following are to be revised (if required) based on in-field findings in the impact phase surface water assessment: Surface water buffer zones; Legislative requirements; Impact assessment (including mitigation measures); and Cumulative Impact Assessment. The impact phase surface water assessment must include the following: Surface water environmental baseline findings obtained from the in-field assessment; and Alternatives comparative assessment. 	
Agricultural potential	None	 There are no agriculturally sensitive areas that need to be avoided by the development. There are no conditions resulting from this assessment that need to be included in the environmental authorisation. Because of the low agricultural potential of the site, and the consequent low agricultural impact, there are no restrictions relating to agriculture which would preclude authorisation of the proposed development. No additional investigation of agricultural impact Assessment of the proposed development low a development, however the turbine layout put forward in the plan of study will need to be further investigated. 	Yes.
Noise	None	 The potential noise impact of operational activities is of low significance, similarly the potential cumulative effects when all the surrounding wind turbines are operating is of low significance. There is a high confidence in the finding of this report, and with the implementation of the mitigation measures there exist a low 	Yes

Aspect	Fatal	Site refinement / Recommendations	Further
	flaws		Investigations
		potential for a noise impact. An additional noise impact assessment is not required for the EIA phase, as it will not provide additional information, however the turbine layout put forward in the plan of study will need to be reassessed and remodelled. The cumulative impacts will also need to be further investigated.	
Visual	None	Further assessment will be required in the EIA phase to investigate the sensitivity of the receptor locations to visual impacts associated with the proposed development and to quantify the impacts that would result.	Yes
Heritage	None	These findings provide the basis for the recommendation of further field truthing through an archaeological walk covering the site. The aim of this will be to compile a comprehensive database of heritage sites in the study areas, with the aim of developing a heritage management plan for inclusion in the Environmental Management Plan as derived from the EIA. In Palaeontological terms the significance is rated as low (negative). Consequently, pending the discovery of significant new fossil material here, no further specialist studies are considered to be necessary.	Yes
Socio-economic	None	The previously listed potential impacts will need to be investigated in the EIA phase in greater detail.	Yes
Geotechnical	None	 A detailed Traffic Management Plan should be completed once the project details are finalised and before construction can commence. Material for construction purposes must be sourced from site to reduce costs; Groundwater from the site can be used for human consumption and construction considered that it will be treated. A water purification plant to be constructed on site in order to treat this water before use. Water should be stored on site so that it can be readily available for use. 	No

Aspect	Fatal	Site refinement / Recommendations	Further
	flaws	 A detailed Geotechnical and Electrical 	Investigations
		investigation will be required.	
		A detailed soil chemical analysis and soil	
		resistivity test will also be required.	
Traffic	None	 All abnormal loads must be transport under a permit; A route study be undertaken to confirm the most appropriate route to site; Dust suppression techniques should be utilised to reduce the impact on air quality for the surrounding area; A Traffic Management Plan must be prepared once the Project advances to the preliminary phase. This plan should ensure that vehicles arrive in a dispersed manner throughout the day to reduce the impact to other road users. The plan should also promote the use of car sharing, especially from Loeriesfontein and the construction camp. Methods to improve driver safety should also be outlined, e.g. the use of speed cameras or Average Speed Over 	No
Path Loss and Risk Assessment (ITC)	None	 Distance. Due to natural terrain barriers and the 52.6km distance between Xha! Boom and Rem-opt 7, the closest SKA unit, no degradation of performance is expected when the mitigated AW 125 TH100A Acciona turbines are installed. This shown by the 10dB to 20dB higher path loss for Xha! Boom compared to Garob. To verify overall wind farm emissions, ambient measurements should be done at the new site before construction starts. Tests points should be carefully selected based on test equipment sensitivity with the objective to observe the increase in ambient emissions as construction progresses. Final site tests will be done on completion of the project to confirm the radiated emission levels. Although not anticipated, proper mitigation measures on identified emitters will be 	No – the impact would need to be remodelled at a later stage, once the final turbine has been selected and the layout finalised. This would not be required in the EIA phase but would be required prior to construction.

 SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD
 prepared by: SiVEST Environmental

 Proposed Xha! Boom Wind Farm - Final Scoping Report
 prepared by: SiVEST Environmental

Aspect	Fatal flaws	Site refinement / Recommendations	Further Investigations
		studied and implemented if final test shows emissions exceeding the SKA threshold.	

It is therefore recommended that the following studies be taken through to the EIA Phase:

- Biodiversity (flora and fauna) Assessment (Simon Todd Simon Todd Consulting)
- Avifauna Assessment (Chris van Rooyen Chris van Rooyen Consulting)
- Bat Assessment (Werner Marais, Dalene Burger and Monika Moir Animalia)
- Surface Water Impact Assessment (Shaun Taylor– SiVEST) including external peer review by Michiel Jonker – Ecotone Freshwater Consultants
- Agricultural Potential Assessment (Johann Lanz)
- Noise Assessment (Morné De Jager Enviro Acoustic Research (EAR)
- Visual Impact Assessment (Andrea Gibb and Stephan Jacobs SiVEST) including external peer review by Keagan Allan – SRK Consulting
- Heritage Assessment (Wouter Fourie PGS Heritage)
- Socio-economic Impact Assessment (Zimkita Nkata and Elena Broughton Urban-Econ Development Economists)

The proposed scope of work and methodology to assess each of the above impacts has been detailed in the plan of study to undertake an EIA, as per the EIA Regulations. The Plan of Study is included below.

11 PLAN OF STUDY FOR ENVIRONMENTAL IMPACT ASSESSMENT

Issues identified during the Scoping Phase will be investigated further during the EIA phase of the project. Various specialist studies will be conducted during the EIA phase to assess these issues. Mitigation measures will be formulated and these will be included in the Environmental Management Programme (EMPr). The following section confirms the process to be undertaken by the EAP in the EIA Phase of the project.

This information will assist DEA in making an informed decision with regards to the proposed development.

11.1 Aim of the EIA Phase

The aim of the impact assessment phase is to:

- Conduct a detailed impact assessment of the issues identified
- Identify potential mitigation measures to reduce impacts
- Ensure information is disseminated to Interested and / or Affected parties and there is a constant flow of communication

The following tasks will form part of the Environmental Impact Assessment Phase:

- A comprehensive Public Participation Process (as above)
- Conduct specialist studies
- Conduct alternatives assessment on the alternative layouts identified in this FSR
- Compilation of an Environmental Impact Assessment Report (EIAr)
- Compilation of an Environmental Management Programme (EMPr)
- Make Draft EIAr available for public comment
- Submit Final EIAr to DEA
- Await decision

The following specialist studies will form part of the EIAr:

- Biodiversity (flora and fauna) Assessment (Simon Todd Simon Todd Consulting)
- Avifauna Assessment (Chris van Rooyen Chris van Rooyen Consulting)
- Bat Assessment (Werner Marais, Dalene Burger and Monika Moir Animalia)
- Surface Water Impact Assessment (Shaun Taylor– SiVEST) including external peer review by Michiel Jonker – Ecotone Freshwater Consultants
- Agricultural Potential Assessment (Johann Lanz)
- Noise Assessment (Morné De Jager Enviro Acoustic Research (EAR)
- Visual Impact Assessment (Andrea Gibb and Stephan Jacobs SiVEST) including external peer review by Keagan Allan – SRK Consulting
- Heritage Assessment (Wouter Fourie PGS Heritage)

prepared by: SiVEST Environmental

 Socio-economic Impact Assessment (Zimkita Nkata and Elena Broughton – Urban-Econ Development Economists)

The terms of reference for these studies involve assessing the potential impacts that have been identified in the Scoping Report in addition to any new issues that are identified during the detailed assessments. The qualifications of these specialists are included in their CV's which are included in **Appendix 2**.

11.2 Decision-Making Authority Consultation

The stages at which the competent authority will be consulted are as follows:

- Submission of the draft Scoping Report (DSR) for comment;
- Submission of the final Scoping Report (FSR) for comment;
- Submission of draft Environmental Impact Assessment Report (DEIAr) for comment;
- Submission of final Environmental Impact Assessment Report (FEIAr) with comments; and
- Response from competent authority regarding acceptance of final Environmental Impact Assessment Report (FEIAr).

Additional consultation may occur with the DEA during the EIA process should the need arise.

11.3 Proposed Method of Assessing Environmental Issues

The EIA Methodology assists in evaluating the overall effect of a proposed activity on the environment. The determination of the effect of an environmental impact on an environmental parameter is determined through a systematic analysis of the various components of the impact. This is undertaken using information that is available to the environmental practitioner through the process of the environmental impact assessment. The impact evaluation of predicted impacts was undertaken through an assessment of the significance of the impacts.

A brief Terms of Reference for each specialist study is included below:

11.3.1 Biodiversity Assessment

The current study is based on a desktop study as well as a site visit, which reduces the uncertainty associated with the scoping-level assessment. In addition, since a field assessment has been conducted for the current assessment, the characteristics of the affected environment have been well defined and there is little uncertainty as to the sensitivity of the site and the presence of sensitive features has been verified in the field. No layout has been provided for the current assessment and an important activity for the EIA will be assessing the layout in relation to the sensitive features of the site. Additional activities and outputs for the EIA will include the following studies and activities:

- Evaluate the impact of the final layout of the development in relation to the sensitive features and attributes of the site.
- Evaluate, based on the site attributes, what the most applicable mitigation measures to reduce the impact of the development on the site would be and if there are any areas where specific precautions or mitigation measures should be implemented.
- Assess cumulative impacts in the area based on the current as well as the other proposed and existing developments in the area.
- Assess the impacts identified above in light of the site-specific findings and the final layout for assessment to be provided by the developer.

11.3.2 Avifauna Assessment

The EIA phase avifaunal report will contain the results of preconstruction monitoring. The monitoring protocol for the site is designed according to the latest version (2012) of Jenkins A R; Van Rooyen C S; Smallie J; Anderson M D & Smit H A. 2011. Best practice guidelines for avian monitoring and impact mitigation at proposed wind energy development sites in southern Africa. Endangered Wildlife Trust and Birdlife South Africa.

The objective of the pre-construction monitoring at the proposed wind project was to gather baseline data over a period of 12-months on the following aspects pertaining to avifauna:

- The abundance and diversity of birds at the broader study area and a suitable control area to measure the potential displacement effect of the wind farm.
- Flight patterns of priority species at the broader study area to measure the potential collision risk with the turbines.

<u>Methods</u>

The monitoring protocol for the site is designed according to the latest version (2014) of Jenkins A R; Van Rooyen C S; Smallie J J; Anderson M D & Smit H A. 2011. Best practice guidelines for avian monitoring and impact mitigation at proposed wind energy development sites in southern Africa. Endangered Wildlife Trust and Birdlife South Africa.

Monitoring surveys were conducted at the broader study area and a control area by four field monitors during the following periods:

10 – 23 November 2015 23 February – 03 March 2016 18 May - 30 May 2016 22 August – 1 September 2016

Monitoring was conducted in the following manner:

- Four drive transects were identified on the study area totaling 52.1km and one drive transect in the control site with a total length of 13.7km.
- Two observers travelling slowly (± 10km/h) in a vehicle records all species on both sides of the drive transect. The observers stop at regular intervals (every 500 m) to scan the environment with binoculars. Drive transects are counted three times per sampling session.
- In addition, eleven walk transects of 1km each were identified at the study area, and four at the control site, and counted 8 times per sampling season. All birds are recorded during walk transects.
- The following variables were recorded:
 - Species;
 - Number of birds;
 - o Date;
 - Start time and end time;
 - Distance from transect (0-50 m, 50-100 m, >100 m);
 - Wind direction;
 - Wind strength (estimated Beaufort scale 1 7);
 - Weather (sunny; cloudy; partly cloudy; rain; mist);
 - Temperature (cold; mild; warm; hot);
 - Behaviour (flushed; flying-display; perched; perched-calling; perched-hunting; flyingforaging; flying-commute; foraging on the ground); and
 - Co-ordinates (priority species only).
- Eleven vantage points (VPs) were identified to record the flight altitude and patterns of priority species at the development areas. Two VPs were also identified on the control area. The following variables were recorded for each flight:
 - Species;
 - Number of birds;
 - o Date;
 - Start time and end time;
 - Wind direction;
 - Wind strength (estimated Beaufort scale 1-7);
 - Weather (sunny; cloudy; partly cloudy; rain; mist);
 - Temperature (cold; mild; warm; hot);
 - Flight altitude (high i.e. >220m; medium i.e. 30m 220m; low i.e. <30m);
 - Flight mode (soar; flap; glide; kite; hover); and
 - Flight time (in 15 second-intervals).

The aim with drive transects was primarily to record large priority species (i.e. raptors and large terrestrial species), while walk transects were primarily aimed at recording small passerines. The objective of the transect monitoring was to gather baseline data on the use of the development areas by birds in order to measure potential displacement by the wind farm activities. The objective of vantage point counts was to measure the potential collision risk with the turbines. Priority species were identified using the November 2014 BLSA list of priority species for wind farms.

Four potential focal points of bird activity, two boreholes and two salt pans, one known as Die Soutkomme and the other as Konnes se Pan, were identified in the greater study area and monitored.

11.3.3 Bat Assessment

Bat activity was monitored using active and passive bat monitoring techniques. Active monitoring was done through site visits with transects made throughout the site with a vehicle-mounted bat detector. Passive detection was carried out with the mounting of passive bat monitoring systems placed on six monitoring masts on site. Specifically, five short 10m masts (**Figure 48**) and one meteorological mast. The monitoring systems consisted of SM2BAT+ time expansion bat detectors that were powered by 12V, 18Ah, sealed lead acid batteries and 20W solar panels that provided recharging power to the batteries (**Figure 49**). Each system also had an 8-amp low voltage protection regulator and SM3PWR step down transformer. Four SD memory cards, class 10 speed, with a capacity of 32GB each were utilized within each SM2BAT+ detector; this was to ensure substantial memory space with high quality recordings even under conditions of multiple false wind triggers.

One weatherproof ultrasound microphone was mounted at a height of 10 meters on the short masts, while two microphones were mounted at 10m and 80m on the meteorological mast. These microphones were then connected to the SM2BAT+ bat detectors.

Each detector was set to operate in continuous trigger mode from dusk each evening until dawn (times were correlated with latitude and longitude). Trigger mode is the setting for a bat detector in which any frequency which exceeds 16 kHz and -18dB will trigger the detector to record for the duration of the sound and 500 ms after the sound has ceased, this latter period is known as a trigger window. All signals are recorded in WAC0 lossless compression format. The table below summarizes the above-mentioned equipment setup.



Figure 48: Short mast monitoring system



Figure 49: SM2BAT+ detector and supporting hardware

Site visit dates	3	First Visit	30 November – 5 December 2015	
		Second Visit	14 – 18 February 2016	
		Third Visit	25 April – 4 May 2016	
		Fourth Visit	29 August – 3 September 2016	
		Fifth Visit	28 November – 02 December 2016	
Met mast	Quantity on site	1		
passive bat N detection	Microphone heights	10m; 80m		
systems	Coordinates	Met Mast 1: 30°	18'49.56"S 19°19'0.01"E	
Short mast	Quantity on site	5		
passive bat detection	Microphone height	10m		
systems	Coordinates	SM1: 30°13'9.21	"S 19°23'18.12"E	
2		SM2: 30°16'56.0	3"S 19°15'20.45"E	
		SM3: 30°18'16.1	6"S 19°21'34.84"E	
		SM4: 30°21'7.55	j"S 19°16'29.17"E	
		SM5: 30°21'34.4	4"S 19°18'55.03"E	

Table 110: Site Visits Information

SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD Proposed Xha! Boom Wind Farm - Final Scoping Report Version No: 1

prepared by: SiVEST Environmental

Replacements/ Repairs/ Comments	
First Visit	The microphones were mounted such that they pointed
	approximately 30 degrees downward to avoid excessive water
	damage. Crows have been found to peck at microphones and
	subsequently destroying them. Hence, measures were taken
	for protection against birds, without noticeably compromising
	effectiveness.
	The bat detectors were installed within their weatherproof
	containers and all peripherals attached.
	Monitoring at 80m height will provide an assessment of the
	bat activity occurring within rotor-sweep height.
Second Visit	All the systems were functioning correctly apart from Short
	Mast 2 which had a software malfunction causing the detector
	to freeze resulting in the low bat activity recorded. A software
	update was loaded and the system is functional again.
Third Visit	Short Mast 1 bat detector had frozen and a firmware update
	was applied. Short Mast 2 bat detector had no power and after
	inspection it was found that the wire connection on the
	regulator was faulty and was reconnected. Short Mast 3 solar
	panel had turned slightly towards north east and was turned
	to north west. All the other systems were functional.
Fourth Visit	Short Mast 1 bat detector was not powered, due to a
	discharged battery. The battery was charged, and solar panel
	was re-aligned. Short Mast 2 had collapsed, after which it was
	erected again and solar panel re-aligned. Firmware update
	was applied to Short Masts 3 - 5 and the Met Mast. Short Mast
	1 and 3 decibel settings were updated to 12db.
Fifth Visit	All the systems were functioning correctly.
Type of passive bat detector	SM2BAT+, Real Time Expansion (RTE) type
Recording schedule	Each detector was set to operate in continuous trigger mode
	from dusk each evening until dawn (times were automatically
	adjusted in relation to latitude, longitude and season).
Trigger threshold	>16KHz, -18dB
Trigger window (time of recording	500 ms
after trigger ceased)	
Microphone gain setting	36dB
Compression	WACO
Single memory card size (each	32GB
system uses 4 cards)	
Battery size	18Ah; 12V
Solar panel output	20 Watts
Solar charge regulator	6 - 8 Amp with low voltage/deep discharge protection

prepared by: SiVEST Environmental

Other methods	Terrain was investigated during the day for signs of roosting
	and foraging habitat.

All site visits were conducted following the same methodology as mentioned above, over the course of the 12-month preconstruction monitoring period.

After each site visit, the passive data of the bat activity was downloaded from each monitoring system. The data was analysed by classifying (as near to species level as possible) and counting positive bat passes detected by the passive systems. A bat pass is defined as a sequence of ≥ 1 echolocation calls where the duration of each pulse is ≥ 2 ms (one echolocation call can consist of numerous pulses). A new bat pass will be identified by a >500 ms period between pulses. These bat passes will be summed into 10 minute intervals which will be used to calculate nocturnal distribution patterns over time. Bat activity was grouped into 10 minute periods. Only nocturnal, dusk and dawn values of environmental parameters from the wind data will be used, as this is the only time insectivorous bats are active. Times of sunset and sunrise was adjusted with the time of year.

The bat activity was correlated with the environmental parameters; wind speed and air temperature, to identify optimal foraging conditions and periods of high bat activity.

Distribution maps of South African bat species still require further refinement such that the bat species proposed to occur on the site (that were not detected) are assumed accurate. If a species has a distribution marginal to the site, it was assumed to occur in the area. The literature based table of species probability of occurrence may include a higher number of bat species than actually present. The migratory paths of bats are largely unknown, thus limiting the ability to determine if the wind farm will have a large scale effect on migratory species. Attempts to overcome this limitation, however, will be made during this long-term sensitivity assessment.

The satellite imagery partly used to develop the sensitivity map may be slightly imprecise due to land changes occurring since the imagery was taken.

Species identification with the use of bat detection and echolocation is less accurate when compared to morphological identification, nevertheless it is a very certain and accurate indication of bat activity and their presence with no harmful effects on bats being surveyed.

It is not possible to determine actual individual bat numbers from acoustic bat activity data, whether gathered with transects or the passive monitoring systems. However, bat passes per night are internationally used and recognized as a comparative unit for indicating levels of bat activity in an area as well as a measure of relative abundance.

Spatial distribution of bats over the study area cannot be accurately determined by means of transects, although the passive systems can provide comparative data for different areas of the site. Transects may still possibly uncover high activity in areas where it is not necessarily expected and thereby increase insight into the site.

Exact foraging distances from bat roosts or exact commuting pathways cannot be determined by the current methodology. Radio telemetry tracking of tagged bats is required to provide such information if needed.

The above information will be incorporated into the Bat Impact Assessment Report during the EIA phase as well as further investigation of the identified impacts associated with the proposed development.

11.3.4 Surface Water Impact Assessment

The surface water assessment during the EIA phase would primarily entail more detailed field investigation of surface water bodies (identified during the scoping phase) within the project site.

The fieldwork would be focused on:

- Larger wetland and drainage systems;
- Those wetland systems identified as sensitive or as having a high functionality; and
- Riparian zones of larger river systems.

The primary aim of the EIA-level assessment would be to determine the boundaries of the relevant wetland / riparian systems so that the wind farm can be placed outside of the wetlands / riparian areas. The wetland / riparian area boundary delineation would be undertaken using the DWAF guideline 'A practical field procedure for the identification and delineation of wetlands and riparian areas'.

The surface water analysis would propose measures to mitigate any identified potential negative impacts associated with the wind farm, and these would inform the EMPr phase. Mitigation measures would possibly entail slight changes to the proposed locations and extent of the wind farm to avoid impacts on surface water bodies, where significant or likely impacts have been predicted.

Input will be given to the proposed layout and buffers recommended.

The study will culminate in the compilation of a Surface Water Impact Assessment as well as mitigation measures which will feed into the Environmental Management Programme (EMPr).

The Surface Water Impact Assessment Report will be peer reviewed by an external surface water specialist and the report will be updated based on the peer reviewers' comments prior to finalisation.

11.3.5 Agricultural Potential Impact Assessment

The agricultural potential assessment was based largely on existing soil and agricultural potential data for the site. The source of this data was the online Agricultural Geo-Referenced Information System (AGIS), produced by the Institute of Soil, Climate and Water (Agricultural Research Council, undated). Satellite imagery of the site available on Google Earth was also used for evaluation.

The AGIS data was supplemented by a field investigation. This was aimed at ground-proofing the Agricultural Geo-Referenced Information System (AGIS) data and achieving an understanding of specific soil and agricultural conditions, and the variation of these across the site. The field investigation involved a drive and walk over of the site using assessment of surface conditions and existing excavations and burrows. The field assessment was done on 2 November 2016.

Soils were classified according to the South African soil classification system (Soil Classification Working Group, 1991).

It is the specialist's opinion that the level of soil mapping detail in the Department of Agriculture, Forestry and Fisheries (DAFF) requirements (see Section 2 of the Agricultural Potential Specialist Report) is appropriate for arable land only. It is not appropriate for this site. Detailed soil mapping has little relevance to an assessment of agricultural potential in this environment, where the agricultural limitations are overwhelmingly climatic, soil conditions are generally poor, and cultivation potential is non-existent. In such an environment, even where soils suitable for cultivation may occur, they cannot be cultivated because of the aridity constraints. Conducting a soil assessment at the stipulated level of detail would be very time consuming and be a waste of that time, as it would add no value to the assessment. The level of soil assessment that was conducted for this report (reconnaissance ground proofing of land type data) is considered more than adequate for a thorough assessment of all agricultural impacts.

An assessment of soils (soil mapping) and long term agricultural potential is in no way affected by the season in which the assessment is made, and therefore the fact that the assessment was done in summer has no bearing on its results.

The field investigation also included a visual assessment of erosion and erosion potential on site, taking into account a potential development layout.

Telephonic consultation was done with the land owners, Mr. Albie Louw and Mr. Nico Louw to get details of farming activities on the site.

It should be noted that the impact ratings associated with agricultural potential in the Scoping Phase Report will be updated based on the new layout. In addition, the cumulative impact section will also be updated based on the new layout.

11.3.6 Visual Impact Assessment

The focus of the EIA phase VIA will be to undertake a more detailed GIS-based assessment, to quantify the magnitude and significance of the visual impacts of the proposed development in both a day-time and night-time context.

This assessment will focus on areas where potential sensitive receptors are located. Should data be available, digital terrain models and viewsheds will be generated for the areas of focus. This analysis will be conducted using ArcGIS software in conjunction with the Spatial Analyst and 3D Analyst extensions where necessary. The assessment will rely on site visits to each potentially sensitive **SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD** prepared by: SiVEST Environmental Proposed Xha! Boom Wind Farm - Final Scoping Report Version No: 1
04 August 2017 Page 301

receptor location (where possible) to identify the extent of visual impact of the proposed wind farm from these locations. A further assessment of the intensity of potential visual impact, expressed in terms of bands of differing visual significance will be undertaken. The fieldwork will also allow for the correction and refinement of the baseline information.

The overall significance of visual impacts associated with the proposed wind farm will be assessed through a rating matrix. Once this has been undertaken, measures to mitigate potential visual impacts will be identified, and if practical, layout alternatives within the application site will be considered and suggested to minimise visual impact of the proposed development.

A separate rating matrix will be used to assess the visual impact of the proposed development on the sensitive receptor locations, as identified. This matrix is based on the distance of a receptor from the proposed development, the primary focus / orientation of the receptor, the presence of screening factors, the visual character and sensitivity of the area and the visual contrast of the development with the typical elements and forms in the landscape.

Thereafter, the alternatives will be comparatively assessed, in order to ascertain the preferred alternative from a visual perspective.

Interested and Affected Parties will be consulted through the public participation process being undertaken as part of the EIA process, in order to establish how the proposed wind farm will be perceived from the various receptor locations and the degree to which this impact will be regarded as negative.

It is envisaged that the main deliverable of the study would be the generation of a spatial databases / maps indicating the zones of visual impact, as well as a detailed report indicating the findings of the study.

The Visual Impact Assessment Report will be peer reviewed by an external surface water specialist and the report will be updated based on the peer reviewers' comments prior to finalisation.

11.3.7 Heritage Assessment

The Heritage Impact Assessment (HIA) report to be compiled by PGS Heritage (PGS) for the proposed Xha! Boom project will assess the heritage resources found on site. This report will contain the applicable maps, tables and figures as stipulated in the NHRA (no 25 of 1999) and the National Environmental Management Act (NEMA) (no 107 of 1998). The HIA process consists of three steps:

- Step I Literature Review: The background information to the field survey leans greatly on the Heritage Scoping Report completed by PGS for this site.
- Step II Physical Survey: A physical survey will be conducted on foot through the proposed project area by qualified archaeologists, aimed at locating and documenting sites falling within and adjacent to the proposed development footprint.

 Step III – The final step involves the recording and documentation of relevant archaeological resources, as well as the assessment of resources in terms of the heritage impact assessment criteria and report writing, as well as mapping and constructive recommendations

The significance of heritage sites is based on four main criteria:

- **site integrity** (i.e. primary vs. secondary context),
- amount of deposit, range of features (e.g., stonewalling, stone tools and enclosures),
 - Density of scatter (dispersed scatter)
 - Low <10/50m²
 - Medium 10-50/50m²
 - High >50/50m²
- uniqueness and
- **potential** to answer present research questions.

Management actions and recommended mitigation, which will result in a reduction in the impact on the sites, will be expressed as follows:

- A No further action necessary;
- B Mapping of the site and controlled sampling required;
- C No-go or relocate pylon position
- D Preserve site, or extensive data collection and mapping of the site; and
- E Preserve site

Site Significance

Site significance classification standards prescribed by the South African Heritage Resources Agency (2006) and approved by the Association for Southern African Professional Archaeologists (ASAPA) for the Southern African Development Community (SADC) region, were used for the purpose of this report.

FIELD RATING	GRADE	SIGNIFICANCE	RECOMMENDED MITIGATION
National Significance	Grade 1	-	Conservation; National Site
(NS)			nomination
Provincial	Grade 2	-	Conservation; Provincial Site
Significance (PS)			nomination
Local Significance	Grade 3A	High Significance	Conservation; Mitigation not advised
(LS)			
Local Significance	Grade 3B	High Significance	Mitigation (Part of site should be
(LS)			retained)
Generally Protected	Grade 4A	High / Medium	Mitigation before destruction
A (GP.A)		Significance	
Generally Protected	Grade 4B	Medium	Recording before destruction
B (GP.B)		Significance	

Table 111: Site significance classification standards as prescribed by SAHRA

Generally Protected	Grade 4C	Low Significance	Destruction
C (GP.A)			

11.3.8 Noise Assessment

The noise emissions into the environment from the various sources as defined by the project developer will be calculated during the EIA phase using the sound propagation models described by ISO 9613-2 (operational phase) and SANS 10357₁₃ (construction phase). The following will be taken into account:

- The octave band sound pressure emission levels of processes and equipment;
- The distance of the receiver from the noise sources;
- The impact of atmospheric absorption;
- The layout details of the proposed project;
- The height of the noise source under investigation;
- Topographical layout; and
- Acoustical characteristics of the ground.

The potential impact from traffic will be considered during the EIA phase using the sound propagation model described in SANS 10210:2004₁₄. Corrections such as the following will be considered:

- Distance of a noise-sensitive development from roads;
- Road construction material;
- Average speeds of travel; and
- Types of vehicles used.

The layout as presented will be assessed in detail and used to assess the magnitude, the extent of potential noises as well as the potential significance of the noise impact. As the details of the preferred wind turbine are unknown, the sound power emission levels of a relatively noisy wind turbine will be used. The assessment will therefore lean towards a worst-case approach.

11.3.9 Socio-economic Impact Assessment

A socio-economic impact assessment will be conducted during the EIA phase in order to:

- Delineate the zone of influence that stretches beyond the directly affected sites following the discussions with other specialists on the team
- Collect primary socio-economic data (through personal or telephonic interviews) of the communities and economic activities that will be directly or indirectly affected (positively or negatively) by the proposed developments (per project and its components)
- Quantify the potential positive and negative effects of the proposed project and its alternatives (if applicable) on the socio-economic environment in the delineated study area;
- Evaluate the change in the size and composition of the local and regional economies that will be stimulated by the proposed development, as well as the state of local communities
- Evaluate the potential positive and negative impacts following the environmental specialist's methodology
- Assess cumulative impacts

 Develop a management and mitigation plan by proposing mitigation measures for negative effects and enhancement measures for positive impacts, supported by methods for the implementation, timeframes, costs and responsibilities information

The following methods will be employed in undertaking the study.

Surveys and interviews

Surveying is one of the fastest ways to obtain primary information. Surveys can be conducted over the telephone, internet, e-mail, or personal interviews. The latter is relatively expensive but since it involves one person interviewing another, it is a way to get in-depth and comprehensive information. The use of surveys and interviews is particular applicable for collecting primary data of the community that could potentially be affected by the project or collecting specific data from an identified official or stakeholder.

The following data will be sourced using surveys and interviews:

- Land use information and type of economic activity on properties within the affected environment
- Economic profiles of the activities within the affected environment
- Demographic and social characteristics of the local environment (population, income levels, crime levels, etc.)
- Mapping

Land use mapping technique would be used to illustrate and analyse the land uses in the affected area. The map will be created based on the information collected during the surveys and include the following data:

- Types and location of tourism facilities in the area
- Land uses in the area surrounding the facility (defined by the visual impact)
- Economic modelling and impact assessment

Assessment of economic impacts will be done using economic models developed for the South African economy and the North West Province. The former will be used to assess the impacts on the country's economy, whilst the latter will be used to estimate the impact on the provincial and local economies.

Economic models are compiled on the basis of Social Accounting Matrices that illustrate the linkages between various economic agents. The use of economic models allows identifying the industry-specific multipliers on production, capital formation, Gross Domestic Product (GDP), employment, and income. Such multipliers can also be broken in terms of various effects that can be observed as a result of an exogenous change introduced into the economy, be it capital investment or operating expenditure. Three types of effects are distinguished, inter alia:

 Direct – these represent the original purchases for the project's establishment or operations

- Indirect these are effects that spill over the industries that supply goods and services required for the implementation of the project or for its operation, whether directly to the contractor or operator, or through their suppliers
- Induced these are the effects that are stimulated by the change in income levels of households that would directly or indirectly be affected by the project and businesses.

11.3.10 Geotechnical and Traffic Impact Assessment

It should be noted that the scoping phase Geotechnical and Traffic Impact Assessments form part of the full preliminary engineering report which were originally undertaken based on turbine specifications with a hub height and rotor diameter of 150m. These specialist studies will however be updated according to the correct turbine specifications and turbine layout during the EIA phase. The Geotechnical and Traffic Assessments will also be updated in the EIA phase to include impact rating tables as well as an assessment of cumulative impacts. As such, the updated Geotechnical and Traffic Impact Assessments will be included in the DEIAr.

11.4 Cumulative Impact Assessment

The potential cumulative impact of the proposed wind farm in combination with other renewable energy facilities in the area were identified and assessed per environmental aspect in section 6.4 of this FSR. In addition, mitigation measures were identified to address the cumulative impact, where possible. It should however be noted that not all of the scoping phase specialist assessments have rated the significance of the identified cumulative impacts associated with the proposed development with the significance rating methodology. As such, cumulative impacts will be further assessed during the EIA phase of the project. In addition, all EIA Phase specialist reports will include a detailed cumulative impact assessment, including a review of other specialist studies conducted for renewable energy projects in the area. The specialist studies will thus provide proof (via a literature review) that other specialist reports that were conducted for renewable energy projects in the area were reviewed and will indicate how the recommendations, mitigation measures and conclusions have been taken into consideration when the conclusion and mitigation measures were drafted for this project. The recommendations contained in the specialist reports will be reflected in the mitigation measures to be provided in the DEIAr and EMPr. It should also be noted that the significance of the identified cumulative impacts will be rated as part of the impact rating system using the significance rating methodology and used to determine the significance of the impacts.

11.5 Determination of Significance of Impacts

Significance is determined through a synthesis of impact characteristics which include context and intensity of an impact. Context refers to the geographical scale i.e. site, local, national or global whereas Intensity is defined by the severity of the impact e.g. the magnitude of deviation from background

conditions, the size of the area affected, the duration of the impact and the overall probability of occurrence. Significance is calculated as shown in **Table 113**.

Significance is an indication of the importance of the impact in terms of both physical extent and time scale, and therefore indicates the level of mitigation required. The total number of points scored for each impact indicates the level of significance of the impact.

11.6 Impact Rating System

Impact assessment will take account of the nature, scale and duration of effects on the environment whether such effects are positive (beneficial) or negative (detrimental). Each issue / impact will also be assessed according to the project stages:

- Planning;
- Construction;
- Operation; and
- Decommissioning.

Where necessary, the proposal for mitigation or optimisation of an impact will be detailed. A brief discussion of the impact and the rationale behind the assessment of its significance is also been included.

11.6.1 Rating System Used to Classify Impacts

The rating system will be applied to the potential impact on the receiving environment and includes an objective evaluation of the mitigation of the impact. Impacts will be consolidated into one rating. In assessing the significance of each issue the following criteria (including an allocated point system) is used:

 Table 112: Description of terms.

NATURE

Include a brief description of the impact of environmental parameter being assessed in the context of the project. This criterion includes a brief written statement of the environmental aspect being impacted upon by a particular action or activity.

GEOGRAPHICAL EXTENT

This is defined as the area over which the impact will be expressed. Typically, the severity and significance of an impact have different scales and as such bracketing ranges are often required. This is often useful during the detailed assessment of a project in terms of further defining the determined.

Site

1

The impact will only affect the site

SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD Proposed Xha! Boom Wind Farm - Final Scoping Report Version No: 1 04 August 2017

prepared by: SiVEST Environmental

2	Local/district	Will affect the local area or district
3	Province/region	Will affect the entire province or region
4	International and National	Will affect the entire country
		PROBABILITY
This	describes the chance of occurre	nce of an impact
1	Unlikely	The chance of the impact occurring is extremely low (Less than a 25% chance of occurrence).
2	Possible	The impact may occur (Between a 25% to 50% chance of occurrence).
3	Probable	The impact will likely occur (Between a 50% to 75% chance of occurrence).
4	Definite	Impact will certainly occur (Greater than a 75% chance of occurrence).
		REVERSIBILITY
This	describes the degree to which ar	impact on an environmental parameter can be successfully
reve	rsed upon completion of the prop	osed activity.
1	Completely reversible	The impact is reversible with implementation of minor mitigation measures
2	Partly reversible	The impact is partly reversible but more intense mitigation measures are required.
3	Barely reversible	The impact is unlikely to be reversed even with intense mitigation measures.
4	Irreversible	The impact is irreversible and no mitigation measures exist.
		EABLE LOSS OF RESOURCES
This activ	•	esources will be irreplaceably lost as a result of a proposed
1	No loss of resource.	The impact will not result in the loss of any resources.
2	Marginal loss of resource	The impact will result in marginal loss of resources.
3	Significant loss of resources	The impact will result in significant loss of resources.
4	Complete loss of resources	The impact is result in a complete loss of all resources.
		DURATION
	describes the duration of the imp ne of the impact as a result of the	acts on the environmental parameter. Duration indicates the e proposed activity

		The impact and its effects will either disappear with
		mitigation or will be mitigated through natural process in a
		span shorter than the construction phase $(0 - 1 \text{ years})$, or
		the impact and its effects will last for the period of a
		relatively short construction period and a limited recovery
		time after construction, thereafter it will be entirely negated
1	Short term	(0 – 2 years).
		The impact and its effects will continue or last for some
		time after the construction phase but will be mitigated by
		direct human action or by natural processes thereafter (2
2	Medium term	– 10 years).
		The impact and its effects will continue or last for the entire
		operational life of the development, but will be mitigated by
		direct human action or by natural processes thereafter (10
3	Long term	- 50 years).
<u> </u>		The only class of impact that will be non-transitory.
		Mitigation either by man or natural process will not occur
		in such a way or such a time span that the impact can be
4	Permanent	
4	Permanent	considered transient (Indefinite).
Thin		
		f the impacts on the environmental parameter. A cumulative
eneci	Mimpact is an effect which in itser	f may not be significant but may become significant if added
to oth		emanating from other similar or diverse activities as a result
to oth	ner existing or potential impacts e	
to oth	ner existing or potential impacts e	emanating from other similar or diverse activities as a result
to oth of the	ner existing or potential impacts e e project activity in question.	emanating from other similar or diverse activities as a result The impact would result in negligible to no cumulative
to oth of the 1	ner existing or potential impacts e e project activity in question. Negligible Cumulative Impact	The impact would result in negligible to no cumulative effects
to oth of the 1 2	ner existing or potential impacts e e project activity in question. Negligible Cumulative Impact Low Cumulative Impact	emanating from other similar or diverse activities as a result The impact would result in negligible to no cumulative effects The impact would result in insignificant cumulative effects
to oth of the 1 2 3	ner existing or potential impacts e e project activity in question. Negligible Cumulative Impact Low Cumulative Impact Medium Cumulative impact	The impact would result in negligible to no cumulative effects The impact would result in insignificant cumulative effects The impact would result in insignificant cumulative effects
to oth of the 1 2 3	ner existing or potential impacts e e project activity in question. Negligible Cumulative Impact Low Cumulative Impact Medium Cumulative impact High Cumulative Impact	The impact would result in negligible to no cumulative effects The impact would result in insignificant cumulative effects The impact would result in insignificant cumulative effects
to oth of the 1 2 3 4	ner existing or potential impacts e e project activity in question. Negligible Cumulative Impact Low Cumulative Impact Medium Cumulative impact High Cumulative Impact	The impact would result in negligible to no cumulative effects The impact would result in insignificant cumulative effects The impact would result in minor cumulative effects The impact would result in minor cumulative effects The impact would result in significant cumulative effects
to oth of the 1 2 3 4	ner existing or potential impacts e e project activity in question. Negligible Cumulative Impact Low Cumulative Impact Medium Cumulative impact High Cumulative Impact	The impact would result in negligible to no cumulative effects The impact would result in insignificant cumulative effects The impact would result in minor cumulative effects The impact would result in minor cumulative effects The impact would result in significant cumulative effects
to oth of the 1 2 3 4	ner existing or potential impacts e e project activity in question. Negligible Cumulative Impact Low Cumulative Impact Medium Cumulative impact High Cumulative Impact	The impact would result in negligible to no cumulative effects The impact would result in insignificant cumulative effects The impact would result in minor cumulative effects The impact would result in minor cumulative effects The impact would result in significant cumulative effects
to oth of the 1 2 3 4	ner existing or potential impacts e e project activity in question. Negligible Cumulative Impact Low Cumulative Impact Medium Cumulative impact High Cumulative Impact	emanating from other similar or diverse activities as a result The impact would result in negligible to no cumulative effects The impact would result in insignificant cumulative effects The impact would result in minor cumulative effects The impact would result in significant cumulative effects The impact would result in significant cumulative effects
to oth of the 1 2 3 4 Desc	her existing or potential impacts of project activity in question. Negligible Cumulative Impact Low Cumulative Impact Medium Cumulative impact High Cumulative Impact INT cribes the severity of an impact	Emanating from other similar or diverse activities as a result The impact would result in negligible to no cumulative effects The impact would result in insignificant cumulative effects The impact would result in minor cumulative effects The impact would result in significant cumulative effects The impact affects the quality, use and integrity of the system/component in a way that is barely perceptible.
to oth of the 1 2 3 4 Desc	her existing or potential impacts of project activity in question. Negligible Cumulative Impact Low Cumulative Impact Medium Cumulative impact High Cumulative Impact INT cribes the severity of an impact	 Emanating from other similar or diverse activities as a result The impact would result in negligible to no cumulative effects The impact would result in insignificant cumulative effects The impact would result in minor cumulative effects The impact would result in significant cumulative effects The impact affects the quality, use and integrity of the system/component in a way that is barely perceptible. Impact alters the quality, use and integrity of the
to oth of the 1 2 3 4 Desc	her existing or potential impacts of project activity in question. Negligible Cumulative Impact Low Cumulative Impact Medium Cumulative impact High Cumulative Impact INT cribes the severity of an impact	Emanating from other similar or diverse activities as a result The impact would result in negligible to no cumulative effects The impact would result in insignificant cumulative effects The impact would result in minor cumulative effects The impact would result in significant cumulative effects The impact affects the quality, use and integrity of the system/component in a way that is barely perceptible. Impact alters the quality, use and integrity of the system/component but system/ component still continues
to oth of the 1 2 3 4 Desc 1	her existing or potential impacts of project activity in question. Negligible Cumulative Impact Low Cumulative Impact Medium Cumulative impact High Cumulative Impact IN ^T cribes the severity of an impact Low	 Emanating from other similar or diverse activities as a result The impact would result in negligible to no cumulative effects The impact would result in insignificant cumulative effects The impact would result in minor cumulative effects The impact would result in significant cumulative effects The impact affects the quality, use and integrity of the system/component in a way that is barely perceptible. Impact alters the quality, use and integrity of the system/component but system/ component still continues to function in a moderately modified way and maintains
to oth of the 1 2 3 4 Desc	her existing or potential impacts of project activity in question. Negligible Cumulative Impact Low Cumulative Impact Medium Cumulative impact High Cumulative Impact INT cribes the severity of an impact	Emanating from other similar or diverse activities as a result The impact would result in negligible to no cumulative effects The impact would result in insignificant cumulative effects The impact would result in minor cumulative effects The impact would result in significant cumulative effects The impact affects the quality, use and integrity of the system/component in a way that is barely perceptible. Impact alters the quality, use and integrity of the system/component but system/ component still continues
to oth of the 1 2 3 4 Desc 1	her existing or potential impacts of project activity in question. Negligible Cumulative Impact Low Cumulative Impact Medium Cumulative impact High Cumulative Impact IN ^T cribes the severity of an impact Low	emanating from other similar or diverse activities as a result The impact would result in negligible to no cumulative effects The impact would result in insignificant cumulative effects The impact would result in minor cumulative effects The impact would result in significant cumulative effects The impact would result in significant cumulative effects The impact would result in significant cumulative effects The impact would result in significant cumulative effects The impact would result in significant cumulative effects TENSITY / MAGNITUDE Impact affects the quality, use and integrity of the system/component in a way that is barely perceptible. Impact alters the quality, use and integrity of the system/component but system/ component still continues to function in a moderately modified way and maintains general integrity (some impact on integrity).
to oth of the 1 2 3 4 Desc 1	her existing or potential impacts of project activity in question. Negligible Cumulative Impact Low Cumulative Impact Medium Cumulative impact High Cumulative Impact IN ^T cribes the severity of an impact Low	 manating from other similar or diverse activities as a result The impact would result in negligible to no cumulative effects The impact would result in insignificant cumulative effects The impact would result in significant cumulative effects The impact affects the quality, use and integrity of the system/component in a way that is barely perceptible. Impact alters the quality, use and integrity of the system/component but system/ component still continues to function in a moderately modified way and maintains general integrity (some impact on integrity). Impact affects the continued viability of the
to oth of the 1 2 3 4 Desc 1	her existing or potential impacts of project activity in question. Negligible Cumulative Impact Low Cumulative Impact Medium Cumulative impact High Cumulative Impact IN ^T cribes the severity of an impact Low	emanating from other similar or diverse activities as a result The impact would result in negligible to no cumulative effects The impact would result in insignificant cumulative effects The impact would result in minor cumulative effects The impact would result in significant cumulative effects The impact would result in significant cumulative effects The impact would result in significant cumulative effects The impact would result in significant cumulative effects The impact would result in significant cumulative effects TENSITY / MAGNITUDE Impact affects the quality, use and integrity of the system/component in a way that is barely perceptible. Impact alters the quality, use and integrity of the system/component but system/ component still continues to function in a moderately modified way and maintains general integrity (some impact on integrity).

		impaired and may temporarily cease. High costs of rehabilitation and remediation.
4	Very high	Impact affects the continued viability of the system/component and the quality, use, integrity and functionality of the system or component permanently ceases and is irreversibly impaired (system collapse). Rehabilitation and remediation often impossible. If possible rehabilitation and remediation often unfeasible due to extremely high costs of rehabilitation and remediation.

SIGNIFICANCE

Significance is determined through a synthesis of impact characteristics. Significance is an indication of the importance of the impact in terms of both physical extent and time scale, and therefore indicates the level of mitigation required. This describes the significance of the impact on the environmental parameter. The calculation of the significance of an impact uses the following formula:

(Extent + probability + reversibility + irreplaceability + duration + cumulative effect) x magnitude/intensity.

The summation of the different criteria will produce a non-weighted value. By multiplying this value with the magnitude/intensity, the resultant value acquires a weighted characteristic which can be measured and assigned a significance rating.

Point	ts	Impact Significance	Description
		Rating	
6 to 2	28	Negative Low impact	The anticipated impact will have negligible negative effects
			and will require little to no mitigation.
6 to 2	28	Positive Low impact	The anticipated impact will have minor positive effects.
29	to	Negative Medium impact	The anticipated impact will have moderate negative effects
50			and will require moderate mitigation measures.
29	to	Positive Medium impact	The anticipated impact will have moderate positive effects.
50			
51	to	Negative High impact	The anticipated impact will have significant effects and will
73			require significant mitigation measures to achieve an
			acceptable level of impact.
51	to	Positive High impact	The anticipated impact will have significant positive
73			effects.
74	to	Negative Very high impact	The anticipated impact will have highly significant effects
96			and are unlikely to be able to be mitigated adequately.
			These impacts could be considered "fatal flaws".

74	to	Positive Very high impact	The anticipated impact will have highly significant positive
96			effects.

The table below is to be represented in the Impact Assessment section of the report.

Table 113: Rating of impacts.

Environmental Parameter A brief description of the environmental aspect likely to be affected by the proposed activity e.g. Surface water Issue/Impact/Environmental A brief description of the nature of the impact that is likely to affect the environmental aspect as a result of the proposed activity e.g. alteration of aquatic biota The environmental impact that is likely to positively or negatively affect the environment as a result of the proposed activity e.g. oil spill in surface water Extent A brief description indicating the chances of the impact due to cocurring Probability A brief description of the ability of the environmental aspect likely to be affected by the proposed activity e.g. Surface water Extent A brief description of the environmental aspect likely to be affected by the proposed activity e.g. Surface water Probability A brief description of the environmental aspect likely to be affected by the proposed activity e.g. Surface water Inreplaceable loss of resources A brief description of the degree in which irreplaceable resources are likely to be lost Duration A brief description of whether the impact will be exacerbated as a result of the proposed activity Significance Rating A brief description of whether the impact has the ability to alter the functionality or quality of a system permanently or temporarily Significance Rating A brief description impact rating Pre-mitigation mpact rating		IMPACT TABLE	
Issue/Impact/Environmental A brief description of the nature of the impact that is likely Effect/Nature to affect the environmental aspect as a result of the proposed activity e.g. alteration of aquatic biota The environmental impact that is likely to positively or negatively affect the environment as a result of the proposed activity e.g. oil spill in surface water Extent A brief description of the ability of the environmental components recovery after a disturbance as a result of the proposed activity Probability A brief description of the environmental aspect likely to be affected by the proposed activity e.g. Surface water Irreplaceable loss of resources A brief description of the degree in which irreplaceable resources are likely to be lost Duration A brief description of whether the impact will be exacerbated as a result of the impact will be exacerbated as a result of the impact will be exacerbated as a result of the impact will be exacerbated as a result of the impact that is likely to take to its completion Cumulative effect A brief description of the amount of time the proposed activity is likely to take to its completion Significance Rating A brief description of whether the impact will be after the functionality or quality of a system permanently or temporally Significance Rating A brief description of the importance of an impact rating Pre-mitigation impact Intensity/magnitude 4 Irreplaceable loss 4	Environmental Parameter	A brief description of the er	nvironmental aspect likely to be
Effect/Nature to affect the environmental aspect as a result of the proposed activity e.g. alteration of aquatic biota The environmental impact that is likely to positively or negatively affect the environment as a result of the proposed activity e.g. oil spill in surface water Extent A brief description indicating the chances of the impact occurring Probability A brief description of the ability of the environmental components recovery after a disturbance as a result of the proposed activity Reversibility A brief description of the environmental aspect likely to be affected by the proposed activity e.g. Surface water Irreplaceable loss of resources A brief description of the amount of time the proposed activity is likely to be lost Duration A brief description of the amount of time the proposed activity Cumulative effect A brief description of whether the impact will be exacerbated as a result of the proposed activity Intensity/magnitude A brief description of the amount of time the proposed activity Intensity/magnitude A brief description of the importance of an impact which in turn dictates the level of mitigation required Pre-mitigation impact the functionality or quality of a system permanently or temporarily Significance Rating A brief description of the importance of an impact traing Pre-mitigation impact Implement 4 1 Irreplaceable l		affected by the proposed a	ctivity e.g. Surface water
proposed activity e.g. alteration of aquatic biota The environmental impact that is likely to positively or negatively affect the environment as a result of the proposed activity e.g. oil spill in surface water Extent A brief description indicating the chances of the impact occurring Probability A brief description of the ability of the environmental components recovery after a disturbance as a result of the proposed activity Reversibility A brief description of the environmental aspect likely to be affected by the proposed activity e.g. Surface water Irreplaceable loss of resources A brief description of the degree in which irreplaceable resources are likely to be lost Duration A brief description of whether the impact will be exacerbated as a result of the proposed activity Intensity/magnitude A brief description of whether the impact will be exacerbated as a result of the proposed activity Significance Rating A brief description of the importance of an impact which in turn dictates the level of mitigation required Pre-mitigation Intersity/magnitude A brief description of the importance of an impact rating Extent 4 Intensity/magnitude 4 Intensity/magnitude 4	Issue/Impact/Environmental	A brief description of the na	ature of the impact that is likely
environmental impact that is likely to positively or negatively affect the environment as a result of the proposed activity e.g. oil spill in surface water Extent A brief description indicating the chances of the impact occurring Probability A brief description of the ability of the environmental components recovery after a disturbance as a result of the proposed activity Reversibility A brief description of the environmental aspect likely to be affected by the proposed activity e.g. Surface water Irreplaceable loss of resources A brief description of the degree in which irreplaceable resources are likely to be lost Duration A brief description of whether the impact will be exacerbated as a result of the proposed activity Intensity/magnitude A brief description of whether the impact will be exacerbated as a result of the proposed activity Significance Rating A brief description of the importance of an impact which in turn dictates the level of mitigation required Pre-mitigation impact rating Post mitigation impact rating Extent 4 1 Irreplaceable loss 4 1	Effect/Nature	to affect the environment	al aspect as a result of the
negatively affect the environment as a result of the proposed activity e.g. oil spill in surface water Extent A brief description indicating the chances of the impact occurring Probability A brief description of the ability of the environmental components recovery after a disturbance as a result of the proposed activity Reversibility A brief description of the environmental aspect likely to be affected by the proposed activity e.g. Surface water Irreplaceable loss of resources A brief description of the degree in which irreplaceable resources are likely to be lost Duration A brief description of the amount of time the proposed activity is likely to take to its completion Cumulative effect A brief description of whether the impact will be exacerbated as a result of the proposed activity Intensity/magnitude A brief description of whether the impact has the ability to alter the functionality or quality of a system permanently or temporarily Significance Rating A brief description of the importance of an impact which in turn dictates the level of mitigation impact rating Extent 4 1 Pre-mitigation 1 Irreplaceable loss 4 1 Intensity/magnitude 4 1		proposed activity e.g. alt	eration of aquatic biota The
proposed activity e.g. oil spill in surface water Extent A brief description indicating the chances of the impact occurring Probability A brief description of the ability of the environmental components recovery after a disturbance as a result of the proposed activity Reversibility A brief description of the environmental aspect likely to be affected by the proposed activity e.g. Surface water Irreplaceable loss of resources A brief description of the degree in which irreplaceable resources are likely to be lost Duration A brief description of the amount of time the proposed activity is likely to take to its completion Cumulative effect A brief description of whether the impact will be exacerbated as a result of the proposed activity Intensity/magnitude A brief description of the importance of an impact which in turn dictates the level of mitigation required Pre-mitigation impact rating Extent 4 1 1 Precobability 4 4 1 Duration 4		environmental impact the	at is likely to positively or
Extent A brief description indicating the chances of the impact occurring Probability A brief description of the ability of the environmental components recovery after a disturbance as a result of the proposed activity Reversibility A brief description of the environmental aspect likely to be affected by the proposed activity e.g. Surface water Irreplaceable loss of resources A brief description of the degree in which irreplaceable resources are likely to be lost Duration A brief description of the amount of time the proposed activity is likely to take to its completion Cumulative effect A brief description of whether the impact will be exacerbated as a result of the proposed activity Intensity/magnitude A brief description of whether the impact has the ability to alter the functionality or quality of a system permanently or temporarily Significance Rating A brief description of the importance of an impact which in turn dictates the level of mitigation required Pre-mitigation impact Irreplaceable loss 4 1 1 Precensibility 4 4 1 Irreplaceable loss 4 1 1 Cumulative effect 4 4 1 Irreplaceable loss 4 1 1<		negatively affect the env	ironment as a result of the
occurring Probability A brief description of the ability of the environmental components recovery after a disturbance as a result of the proposed activity Reversibility A brief description of the environmental aspect likely to be affected by the proposed activity e.g. Surface water Irreplaceable loss of resources A brief description of the degree in which irreplaceable resources are likely to be lost Duration A brief description of the amount of time the proposed activity is likely to take to its completion Cumulative effect A brief description of whether the impact will be exacerbated as a result of the proposed activity Intensity/magnitude A brief description of the importance of an impact which in turn dictates the level of mitigation required Pre-mitigation Impact rating Post mitigation impact rating Extent 4 1 Irreplaceable loss 4 1		proposed activity e.g. oil sp	ill in surface water
Probability A brief description of the ability of the environmental components recovery after a disturbance as a result of the proposed activity Reversibility A brief description of the environmental aspect likely to be affected by the proposed activity e.g. Surface water Irreplaceable loss of resources A brief description of the degree in which irreplaceable resources are likely to be lost Duration A brief description of the amount of time the proposed activity is likely to take to its completion Cumulative effect A brief description of whether the impact will be exacerbated as a result of the proposed activity Intensity/magnitude A brief description of the importance of an impact which in turn dictates the level of mitigation required Verementation Pre-mitigation impact Intensity 4 Intensity 4 Intensity 4 Intensity 4 Intensity/magnitude A brief description of the importance of an impact which in turn dictates the level of mitigation required Intensity 4	Extent	A brief description indicati	ng the chances of the impact
components recovery after a disturbance as a result of the proposed activity Reversibility A brief description of the environmental aspect likely to be affected by the proposed activity e.g. Surface water Irreplaceable loss of resources A brief description of the degree in which irreplaceable resources are likely to be lost Duration A brief description of the amount of time the proposed activity is likely to take to its completion Cumulative effect A brief description of whether the impact will be exacerbated as a result of the proposed activity Intensity/magnitude A brief description of whether the impact has the ability to alter the functionality or quality of a system permanently or temporarily Significance Rating A brief description of the importance of an impact which in turn dictates the level of mitigation required Pre-mitigation Premitigation Extent 4 1 Irreplaceable loss 4 1 Irreplaceable loss 4 1		occurring	
proposed activityReversibilityA brief description of the environmental aspect likely to be affected by the proposed activity e.g. Surface waterIrreplaceable loss of resourcesA brief description of the degree in which irreplaceable resources are likely to be lostDurationA brief description of the amount of time the proposed activity is likely to take to its completionCumulative effectA brief description of whether the impact will be exacerbated as a result of the proposed activityIntensity/magnitudeA brief description of whether the impact has the ability to alter the functionality or quality of a system permanently or temporarilySignificance RatingA brief description of the importance of an impact which in turn dictates the level of mitigation requiredPre-mitigation ratingPre-mitigation impact ratingExtent41Probability41Irreplaceable loss41Duration41Intensity/magnitude41	Probability	A brief description of the	e ability of the environmental
Reversibility A brief description of the environmental aspect likely to be affected by the proposed activity e.g. Surface water Irreplaceable loss of resources A brief description of the degree in which irreplaceable resources are likely to be lost Duration A brief description of the amount of time the proposed activity is likely to take to its completion Cumulative effect A brief description of whether the impact will be exacerbated as a result of the proposed activity Intensity/magnitude A brief description of whether the impact has the ability to alter the functionality or quality of a system permanently or temporarily Significance Rating A brief description of the importance of an impact which in turn dictates the level of mitigation impact rating Extent 4 1 Probability 4 1 Irreplaceable loss 4 1 Intensity/magnitude 4 1			a disturbance as a result of the
affected by the proposed activity e.g. Surface waterIrreplaceable loss of resourcesA brief description of the degree in which irreplaceable resources are likely to be lostDurationA brief description of the amount of time the proposed activity is likely to take to its completionCumulative effectA brief description of whether the impact will be exacerbated as a result of the proposed activityIntensity/magnitudeA brief description of whether the impact has the ability to alter the functionality or quality of a system permanently or temporarilySignificance RatingA brief description of the importance of an impact which in turn dictates the level of mitigation requiredPre-mitigation ratingPost mitigation impact ratingExtent41Inreplaceable loss41Inreplaceable loss41Inreplaceable loss41Intensity/magnitude41			
Irreplaceable loss of resources A brief description of the degree in which irreplaceable resources are likely to be lost Duration A brief description of the amount of time the proposed activity is likely to take to its completion Cumulative effect A brief description of whether the impact will be exacerbated as a result of the proposed activity Intensity/magnitude A brief description of whether the impact has the ability to alter the functionality or quality of a system permanently or temporarily Significance Rating A brief description of the importance of an impact which in turn dictates the level of mitigation required Pre-mitigation impact Intensity 4 1 Precombility 4 1 Irreplaceable loss 4 1 1 Cumulative effect 4 4 1 Intensity/magnitude 4	Reversibility		
resources are likely to be lostDurationA brief description of the amount of time the proposed activity is likely to take to its completionCumulative effectA brief description of whether the impact will be exacerbated as a result of the proposed activityIntensity/magnitudeA brief description of whether the impact has the ability to alter the functionality or quality of a system permanently or temporarilySignificance RatingA brief description of the importance of an impact which in turn dictates the level of mitigation requiredPre-mitigation ratingPost mitigation impact ratingExtent41Probability41Irreplaceable loss41Ouration41Intensity/magnitude41			
Duration A brief description of the amount of time the proposed activity is likely to take to its completion Cumulative effect A brief description of whether the impact will be exacerbated as a result of the proposed activity Intensity/magnitude A brief description of whether the impact has the ability to alter the functionality or quality of a system permanently or temporarily Significance Rating A brief description of the importance of an impact which in turn dictates the level of mitigation required Pre-mitigation impact rating Prebability 4 1 Irreplaceable loss 4 1 Duration 4 1 Intensity/magnitude 4 1	Irreplaceable loss of resources		•
activity is likely to take to its completionCumulative effectA brief description of whether the impact will be exacerbated as a result of the proposed activityIntensity/magnitudeA brief description of whether the impact has the ability to alter the functionality or quality of a system permanently or temporarilySignificance RatingA brief description of the importance of an impact which in turn dictates the level of mitigation requiredPre-mitigationimpact ratingPre-mitigationPost mitigation impact ratingExtent41Probability41Irreplaceable loss41Duration41Intensity/magnitude41			
Cumulative effectA brief description of whether the impact will be exacerbated as a result of the proposed activityIntensity/magnitudeA brief description of whether the impact has the ability to alter the functionality or quality of a system permanently or temporarilySignificance RatingA brief description of the importance of an impact which in turn dictates the level of mitigation requiredPre-mitigationPre-mitigation ratingExtent41Probability41Irreplaceable loss41Duration41Intensity/magnitude41	Duration		
exacerbated as a result of the proposed activityIntensity/magnitudeA brief description of whether the impact has the ability to alter the functionality or quality of a system permanently or temporarilySignificance RatingA brief description of the importance of an impact which in turn dictates the level of mitigation requiredPre-mitigation ratingPre-mitigation ratingExtent41Probability41Irreplaceable loss41Duration41Intensity/magnitude41			
Intensity/magnitudeA brief description of whether the impact has the ability to alter the functionality or quality of a system permanently or temporarilySignificance RatingA brief description of the importance of an impact which in turn dictates the level of mitigation requiredPre-mitigationimpact ratingExtent41Probability41Reversibility41Irreplaceable loss41Duration41Intensity/magnitude41	Cumulative effect		
alter the functionality or quality of a system permanently or temporarilySignificance RatingA brief description of the importance of an impact which in turn dictates the level of mitigation requiredPre-mitigation ratingPre-mitigation impact ratingExtent41Probability41Reversibility41Irreplaceable loss41Duration41Cumulative effect41Intensity/magnitude41			
temporarilySignificance RatingA brief description of the importance of an impact which in turn dictates the level of mitigation requiredPre-mitigationimpact ratingExtent41Probability41Reversibility41Irreplaceable loss41Duration41Cumulative effect41Intensity/magnitude41	Intensity/magnitude		
Significance RatingA brief description of the importance of an impact which in turn dictates the level of mitigation requiredPre-mitigationimpact ratingExtent41Probability41Reversibility41Irreplaceable loss41Duration41Cumulative effect41Intensity/magnitude41			
turn dictates the level of mitigation requiredUnderstates the level of mitigation requiredPre-mitigationimpactratingPost mitigation impact ratingExtent41Probability41Reversibility41Irreplaceable loss41Duration41Cumulative effect41Intensity/magnitude41			
Pre-mitigation ratingimpact Post mitigation impact ratingExtent41Probability41Reversibility41Irreplaceable loss41Duration41Cumulative effect41Intensity/magnitude41	Significance Rating		
ratingPost mitigation impact ratingExtent41Probability41Reversibility41Irreplaceable loss41Duration41Cumulative effect41Intensity/magnitude41		turn dictates the level of mi	ligation required
ratingPost mitigation impact ratingExtent41Probability41Reversibility41Irreplaceable loss41Duration41Cumulative effect41Intensity/magnitude41		Pre-mitigation impact	
Extent41Probability41Reversibility41Irreplaceable loss41Duration41Cumulative effect41Intensity/magnitude41		• ·	Post mitigation impact rating
Probability41Reversibility41Irreplaceable loss41Duration41Cumulative effect41Intensity/magnitude41	Extent	-	
Reversibility41Irreplaceable loss41Duration41Cumulative effect41Intensity/magnitude41			-
Irreplaceable loss41Duration41Cumulative effect41Intensity/magnitude41	_		-
Duration41Cumulative effect41Intensity/magnitude41			
Cumulative effect41Intensity/magnitude41	-		1
Intensity/magnitude 4 1		4	1
	Intensity/magnitude	4	1
	Significance rating	-96 (high negative)	-6 (low negative)

SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD Proposed Xha! Boom Wind Farm - Final Scoping Report Version No: 1 04 August 2017

prepared by: SiVEST Environmental

	IMPACT TABLE
	Outline/explain the mitigation measures to be undertaken
	to ameliorate the impacts that are likely to arise from the
	proposed activity. Describe how the mitigation measures
	have reduced/enhanced the impact with relevance to the
	impact criteria used in analysing the significance. These
Mitigation measures	measures will be detailed in the EMPR.

11.7 Environmental Management Programme (EMPr)

In accordance with the EIA Regulations, 2014 (as amended) a draft Environmental Management Programme (EMPr) will be included within the Environmental Impact Assessment Report. The EMPr will include the mitigation measures formulated by the various specialists.

11.8 Alternative Assessment

In accordance with the EIA Regulations, 2014 and as discussed in **Chapter 7** of this report, the layout alternatives identified within this FSR will be described and comparatively assessed in the EIA phase. The size and layout of the proposed 70 wind turbines will depend on the development area and the total generation capacity that can be produced as a result, and will be informed by the findings of the Scoping Phase specialist studies. Additionally, the substation, O&M buildings and turbine layout will be adjusted based on more detailed specialist studies conducted during the EIA phase of the proposed development.

Specialist Assessment	132kV ON-SITE XHA! BOOM	132kV ON-SITE XHA! BOOM
	SUBSTATION OPTION 1	SUBSTATION OPTION 2
Biodiversity	Preferred	Not Preferred
Avifauna	No Preference	No Preference
Bats	Preferred	Not Preferred
Surface Water	Preferred	Not Preferred
Soils and agricultural	No Preference	No Preference
potential		
Noise	No Preference	No Preference
Visual	No Preference	No Preference
Heritage	Preferred	Favourable
Socio-Economic	No Preference	No Preference

Table 114: Summary of specialist Alternatives Assessment indicating the preference associated with each alternative

Based on the specialist scoping assessments and assessment of the proposed 132kV On-Site Xha! Boom Substation alternatives, **Substation Option 1** has been identified as the preferred alternative from biodiversity, bats, surface water and heritage perspectives respectively. As based on the

prepared by: SiVEST Environmental

biodiversity specialist studies **Substation Option 1** is located on the typical open plains of the site, dominated by *Stipagrostis*. There are no sensitive features within the footprint area and no significant issues associated with the site. From a surface water perspective, no surface water resources are found within **Substation Option 1**. The nearest surface water resource is a major drainage line which is located approximately 600m to the west, and separated by a low ridge acting as a watershed. The potential for indirect impacts is minimal considering the distance and barrier to the drainage line. With regards to bats, **Substation Option 1** is located within a flatter and more homogenous area such that the only foreseen impact is habitat removal. In addition, from a heritage perspective, no heritage resources were identified in **Substation Option 1**.

However, from a biodiversity perspective, the proposed 132kv On-Site Xhal Boom **Substation Option 2** is not preferred due to the location of the proposed substation in a transitional area between the arid grasslands in the east and the Klipveld in the west. There are numerous small drainage features or washes in the site and it is not considered favourable. Additionally, from a surface water perspective the proposed 132kV On-Site Xhal Boom **Substation Option 2** is not preferred due to the presence of two (2) minor drainage lines that can be found within this substation alternative. There will therefore be direct potential impacts to these surface water resources. Additionally, there are several other minor drainage lines in close proximity (<120m). Indirect potential impacts such as increased run-off, and consequent sedimentation and erosion are therefore, likely. It should also be noted that from a heritage perspective, a site occurs at **Substation Option 2** is not preferred as based on satellite imagery, this location is situated nearer to an area that is of potential interest for bat foraging activities. Based on the above findings from the various specialist scoping reports it is recommended that only **Substation Option 1** be taken through to the EIA phase.

As previously stated, the sensitive areas used to determine the layouts were based on specialist scoping studies, it is recommended that further studies be done on the proposed site alternatives during the EIA phase, including specialist fieldwork. The specialist studies in the EIA phase will provide a more detailed assessment of sensitive areas. If necessary, the proposed locations for the 132kV on-site substation may be amended at this stage to more accurately avoid highly sensitive or no-go areas.

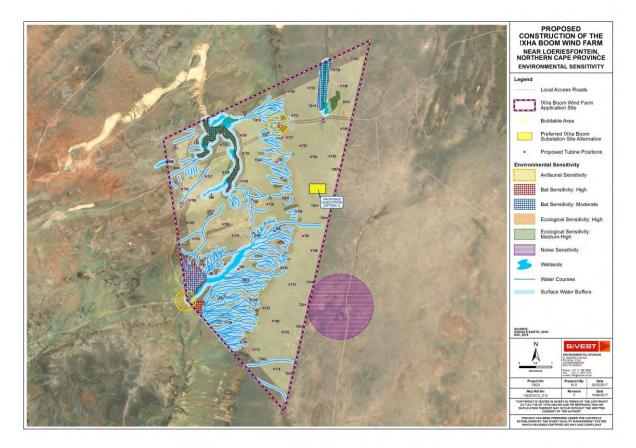


Figure 50: Proposed Layout Alternatives to be assessed in the EIA phase in relation to the Sensitive Areas

11.9 Recommendations

It is recommended that the specialist studies pertaining to certain aspects be carried forward into the EIA Phase, namely, those studies mentioned above. Various issues and concerns have been identified which require detailed assessment and thus it is recommended that the EIA phase be allowed to continue in order to assess these and the impacts associated.

11.10Public Participation

The Public Participation during the EIA Phase will involve the following:

Table 113. I ubic I allicipation activities suit to take place.	
ACTIVITY	FUNCTION
Prepare and distribute EIA newsletter	Notify registered I&APs of outcome of the
	Scoping Phase (including timeframes and when
	their input is required).

Table 115: Public Participation activities still to take place.

ACTIVITY	FUNCTION					
Focus Group Meeting	Meeting to provide feedback on the findings of					
	the detailed specialist studies to key					
	stakeholders (specifically the Local and District					
	Municipalities and Landowners)					
Public Meetings	Provide feedback on the findings of the detailed					
	specialist studies to the general public.					
Public comment period	Notification of I&APs of the availability of the EIAr					
	reports for public comment.					
Notification of granting or refusal of	Informing of all registered I&APs of the EA					
Environmental Authorisation						
Environmental Authorisation appeal period	Receive any appeals and forward to DEA					

11.11 Proposed Project Schedule going forward

The table below represents the proposed schedule of events for the project till closure upon DEA's decision.

	June 2017	July 2017	August 2017	September 2017	October 2017	November 2017	December 2017	January 2018	February 2018	March 2018
Start of DSR Comment period	21 st June 2017 to 21 st of July 2017									
Submission of FSR to DEA			August 2017							
DEA Decision on FSR				September 2017						
Distribution of EIA Newsletter				September 2017						
DEIAr Comment period				September 2017 to October 2017						
Hold Meetings (FGMs and PM)					October 2017					
Submission of FEIAr to DEA						November 2017				
DEA Decision										March 2018

Table 116: Proposed Project Schedule

SOUTH AFRICA MAINSTREAM RENEWABLE POWER (PTY) LTD Proposed Xha! Boom Wind Farm - Final Scoping Report

prepared by: SiVEST Environmental

Version No: 1

12 REFERENCES

- 1:250 000 Geological Sheet 3018 Loeriesfontein, Council for Geoscience. Pretoria 2001.
- ACOCKS J.P.H. "Veld types of South Africa". In; Memoirs of the Botanical Survey of South Africa No. 57. 3rd Edition, Botanical Research Institute, Pretoria, 1988.
- ACOUSTICS BULLETIN, 2009: Prediction and assessment of wind turbine noise
- ACOUSTICS, 2008: A review of the use of different noise prediction models for wind farms and the effects of meteorology
- ACR. 2010. African Chiroptera Report, 2010. African Bats, Pretoria.
- AGRICULTURAL RESEARCH COUNCIL. Undated. AGIS Agricultural Geo-Referenced Information System available at http://www.agis.agric.za/.

ALEXANDER, G. & MARAIS, J. 2007. *A Guide to the Reptiles of Southern Africa*. Struik Nature, Cape Town.

- ALLAN, D.G. 1994. The abundance and movements of Ludwig's Bustard *Neotis Iudwigii*. Ostrich 65: 95-105
- ALMOND, J.E. & PETHER, J. 2008a. Palaeontological heritage of the Northern Cape. Interim SAHRA technical report, 124 pp. Natura Viva cc., Cape Town.
- ALMOND, J.E. 2002. Giant arthropod trackway, Ecca Group. Geobulletin 45: p28.
- ALTAMONT PASS AVIAN MONITORING TEAM. 2008. Bird Fatality Study at Altamont Pass Wind Resource Area October 2005 – September 2007. Draft Report prepared for the Almeda County Scientific Review Committee.
- ANDERSON, A.M. & MCLACHLAN, I.R. 1976. The plant record in the Dwyka and Ecca Series (Permian) of the south-western half of the Great Karoo Basin, South Africa. Palaeontologia Africana 19: 31-42.
- ANDERSON, A.M. 1974. Arthropod trackways and other trace fossils from the Early Permian lower Karoo Beds of South Africa. Unpublished PhD thesis, University of Witwatersrand, Johannesburg, 172 pp.
- ANDERSON, A.M. 1975. Turbidites and arthropod trackways in the Dwyka glacial deposits (EarlyPermian) of southern Africa. Transactions of the Geological Society of South Africa 78: 265-273.
- ANDERSON, A.M. 1981. The *Umfolozia* arthropod trackways in the Permian Dwyka and Ecca Groups of South Africa. Journal of Palaeontology 55: 84-108, pls. 1-4.
- ANIMAL DEMOGRAPHY UNIT. The southern African Bird Atlas Project 2. University of Cape Town. <u>http://sabap2.adu.org.za</u>.
- ARNETT, E. B., HUSO, M. M. P., SCHIRMACHER, M. R AND HAYES, J. P. 2009. Patterns of bat fatality at the Casselman Wind Project in south-central Pennsylvania. An annual report of the Bats and Wind Energy Cooperative and the Pennsylvania Game Commission. Bat Conservation International. Austin, Texas, USA.
- ARNETT, E. B., TECHNICAL EDITOR. 2005. Relationships between bats and wind turbines in Pennsylvania and West Virginia: an assessment of bat fatality search protocols, patterns of fatality, and behavioral interactions with wind turbines. A final report submitted to the Bats and Wind Energy Cooperative. Bat Conservation International. Austin, Texas, USA.
- AUDIOLOGY TODAY, 2010: Wind-Turbine Noise What Audiologists should know

AUTUMN, LYN RADLE, 2007: The effect of noise on Wildlife: A literature review

AVIAN POWER LINE INTERACTION COMMITTEE (APLIC). 2012. *Mitigating Bird Collisions with Power Lines: The State of the Art in 2012.* Edison Electric Institute. Washington D.C.

- BAERWALD, E. F., D'AMOURS, G. H., KLUG, B.J. AND BARCLAY, R. M. R. 2008. Barotrauma is a significant cause of bat fatalities at wind turbines. *Current Biology* 18: 695-695.
- BARCLAY, R. M. R., BAERWALD, E. F., AND GRUVER, J. C. 2007. Variation in bat and bird fatalities at wind energy facilities: assessing the effects of rotor size and tower height. *Canadian Journal of Zoology* 85: 381-387.
- BARNES, K.N. (ed.) 1998. The Important Bird Areas of southern Africa. BirdLife South Africa: Johannesburg.
- BARRIENTOS R, PONCE C, PALACIN C, MARTÍN CA, MARTÍN B, ET AL. 2012. Wire marking results in a small but significant reduction in avian mortality at power lines: A BACI Designed Study. PLoS ONE 7(3): e32569. doi:10.1371/journal.pone.0032569.
- BARRIENTOS, R., ALONSO, J.C., PONCE, C., PALACÍN, C. 2011. Meta-Analysis of the effectiveness of marked wire in reducing avian collisions with power lines. Conservation Biology 25: 893-903.
 BARRIOS, L. & RODRÍGUEZ, A. 2004. Behavioural and environmental correlates of soaring-bird mortality at on-shore wind turbines. Journal of Applied Ecology. Volume 41. Issue 1. pp72-81.
- BARTHWAL, R. 2002. Environmental Impact Assessment. New Age International Publishes, New Delhi.
- BATES, M.F., BRANCH, W.R., BAUER, A.M., BURGER, M., MARAIS, J., ALEXANDER, G.J. & DE
- VILLIERS, M. S. 2013. Atlas and Red List of the Reptiles of South Africa, Lesotho and Swaziland. Strelitzia 32. SANBI, Pretoria.
- BEAULAURIER, D.L. 1981. Mitigation of bird collisions with transmission lines. Bonneville Power Administration. U.S. Dept. of Energy.
- BERNARD, R. T. F. AND TSITA, J. N. 1995. Seasonally monoestrous reproduction in the molossid bat, *Tadarida aegyptiaca,* from low temperature latitudes (35^oS) in South Africa. South African Journal of Zoology 30: 18-22.
- BIO3 (2013). Kangnas wind energy facility Bird community monitoring. Pre-construction phase. Final report.
- BOLIN, KARL, 2006: *Masking of Wind Turbine Sound by Ambient Noise*. KTH Engineering Sciences BOWDLER, DICK, 2008: *Amplitude modulation of wind turbine noise: a review of the evidence*
- BRANCH W.R. 1998. Field guide to snakes and other reptiles of southern Africa. Struik, Cape Town.
- BREEDLOVE, G., 2002. A systematic for the South African Cultural Landscapes with a view to implementation. Thesis University of Pretoria.
- BWEA, 2005: Low Frequency Noise and Wind Turbines Technical Annex
- CAMIÑA, A. 2012a Email communication on 12 April 2012 to the author by Alvaro Camiña, Spanish ornithologist with 8 years' experience in avifaunal monitoring at wind farms in Spain.
- CAMIÑA, A. 2012b. Email communication on 17 November 2012 to the author by Alvaro Camiña, Spanish ornithologist with 8 years' experience in avifaunal monitoring at wind farms in Spain.
- CARETTE, M., ZAPATA-SANCHEZ, J.A., BENITEZ, R.J., LOBON, M. & DONAZAR, J.A. (In press) Large scale risk-assessment of wind farms on population viability of a globally endangered long-lived raptor. Biol. Cons. (2009), doi: 10.1016/j.biocon.2009.07.027.
- CIVIL AVIATION REGULATIONS. 1997. Part 139.01.33 of the civil aviation regulations, 1997, to the Aviation Act, 1962 (Act 74 of 1962).
- COLLINS, N.B., 2005: Wetlands: The basics and some more. Free State Department of Tourism, Environmental and Economic Affairs.
- CRYAN, P. M. AND BARCLAY, R. M. R. 2009. Causes of bat fatalities at wind turbines: Hypotheses and predictions. *Journal of Mammalogy* 90: 1330-1340.

DE LUCAS, M., JANSS, G.F.E., WHITFIELD, D.P. & FERRER, M. 2008. Collision fatality of raptors in wind farms does not depend on raptor abundance. Journal of Applied Ecology 45, 1695 – 1703.

- DEAN W.R.J., MILTON, S.J., WATKEY, M.K., AND HOCKEY, P.A.R. 1991. Distribution, habitat preference and conservation status of the Red Lark *Certhilauda burra* in Cape Province, South Africa Biological Conservation Volume 58, Issue 3, 1991, Pages 257–274
- DEFRA, 2003: A Review of Published Research on Low Frequency Noise and its Effects, Report for Defra by Dr Geoff Leventhall Assisted by Dr Peter Pelmear and Dr Stephen Benton
- DEFRA, 2007: Research into Aerodynamic Modulation of Wind Turbine Noise: Final Report
- DELTA, 2008: *EFP-06 project: Low Frequency Noise from Large Wind Turbines, a procedure for evaluation of the audibility for low frequency sound and a literature study*, Danish Energy Authority
- DELTA, 2009: Measurement of Noise Emission from a Vestas V90 3 MW wind turbine "Mode 0"
- DENNIS MOSS PARTNERSHIP. (2012). Northern Cape Spatial Development Framework.
- DEPARTMENT OF ECONOMIC DEVELOPMENT. (2010). New Growth Path: Framework
- DEPARTMENT OF ENERGY. (2011). Intergrated Resource Plan.

DEPARTMENT OF ENVIRONMENTAL AFFAIRS AND TOURISM, 2007. National Environmental Management: Biodiversity Act, 2004 (Act 10 of 2004): Publication of lists of Critically Endangered, Endangered, Vulnerable and Protected Species. Government Gazette, Republic of South Africa. DEPARTMENT OF TRADE AND INDUSTRY. (2015). *Industrial Policy Action Plan.*

- DEPARTMENT OF WATER AFFAIRS AND FORESTRY (DWAF), 2005: A practical field procedure for identification and delineation of wetlands and riparian areas (edition 1). DWAF, Pretoria.
- DESMET, P AND MARSH A. 2008. *Namakwa District Biodiversity Sector Plan*. Available from BGIS at <u>http://bgis.sanbi.org/namakwa/project.asp</u>.
- DREWITT, A.L. & LANGSTON, R.H.W. 2006. Assessing the impacts of wind farms on birds. Ibis 148, 29-42.
- DU PREEZ, L. & CARRUTHERS, V. 2009. A Complete Guide to the Frogs of Southern Africa. Struik Nature., Cape Town.
- DUNCAN, E. AND KALISKI, K. 2008: Propagation Modelling Parameters for Wind Power Projects EIA Report, Chapter16-Traffic Impact Assessment, Mulilo Renewable Projects Developments
- ENERTRAG, 2008: *Noise and Vibration*, Hempnall Wind Farm (http://www.enertraguk.com/technical/noise-and-vibration.html) *Engineering Service Report for the Proposed Kangnas Wind Farm, bvi Engineers, February* 2013.
- Erickson, W. P., G. D. Johnson, and D. P. Young, Jr. 2005. A summary and comparison of bird mortality form anthropogenic causes with an emphasis on collisions. U.S. Department of Agriculture Forest Service General Technical Report PSW-GTR-191, Albany, California, USA.
- ERICKSON, W. P., G. D. JOHNSON, M. D. STRICKLAND, D. P. YOUNG, JR., K. J. SERNKA, AND R.
- E. GOOD. 2001. Avian collisions with wind turbines: a summary of existing studies and comparisons to other sources of avian collision mortality in the United States. National Wind Coordinating Committee, c/o RESOLVE, Washington, D.C., USA.
- ETSU R97: 1996. 'The Assessment and Rating of Noise from Wind Farms: Working Group on Noise from Wind Turbines'
- EVANS, F.J. & BENDER, P.A. 1999. The Permian Whitehill Formation (Ecca Group) of South Africa:a preliminary review of palaeoniscoid fishes and taphonomy. Records of the Western Australian Museum Supplement No. 57: 175-181.

- EVERAERT, J., DEVOS, K. & KUIJKEN, E. 2001. Windturbines en vogels in Vlaanderen: Voorlopige Onderzoeksresultaten En Buitenlandse Bevindingen [Wind Turbines and Birds in Flanders (Belgium): Preliminary Study Results in a European Context]. Instituut Voor Natuurbehoud. Report R.2002.03. Brussels B.76pp. Brussels, Belgium: Institut voor Natuurbehoud.
- EWEA 2003. Wind Energy The Facts. Volume 4: Environment. The European Wind Energy Association (EWEA), and the European Commission's Directorate General for Transport and Energy (DG TREN). pp182-184. (www.ewea.org/documents/)
- EYA BANTU, 2016. Grid Study for Leeuwberg Suite of Projects, Loeriesfontain Northern Cape.
- FARFÁN M.A., VARGAS J.M., DUARTE J. AND REAL R. (2009). What is the impact of wind farms on birds? A case study in southern Spain. Biodiversity Conservation. 18:3743-3758.
- FÉGEANT, OLIVIER, 2002: Masking of Wind Turbine Noise: Influence of wind turbulence on ambient noise fluctuations. Royal Institute of Technology, Report 2002:12
- FERRER, M., DE LUCAS, M., JANSS, G.F.E., CASADO, E., MUNOZ, A.R., BECHARD, M.J., CALABUIG,C.P. 2012. Weak relationship between risk assessment studies and recorded mortality on wind farms. Journal of Applied Ecology. 49. p38-46.

FEY, M. 2010. Soils of South Africa. Cambridge University Press, Cape Town.

- FOX, A.D., DESHOLM, M., KAHLERT, J., CHRISTENSEN, T.K. & KRAG PETERSEN, I.B. 2006. Information needs to support environmental impact assessments of the effects of European marine offshore wind farms on birds. In Wind, Fire and Water: Renewable Energy and Birds. Ibis 148 (Suppl. 1): 129–144.
- Generation Connection Capacity Assessment of the 2016 Transmission Network (GCCA-2016) Generation Connection Capacity Assessment of the 2022 Transmission Network (GCCA-2022)
- HACKING, T. Undated. An innovative approach to structuring environmental impact assessment reports – Part 2: Ranking the significance of Environmental Aspects and Impacts. Anglo

American plc

HANTAM IDP. (2015). Hantam Integrated Development Plan.

- HARRISON, J.A., DREWITT, D.G., UNDERHILL, L.G., HERREMANS, M., TREE, A.J., PARKER, V & BROWN, C.J. (eds). 1997. The atlas of southern African birds. Vol. 1&2. BirdLife South Africa, Johannesburg.
- HERSELMAN, J. C. 1980. The distribution and status of bats in the Cape Province. International Report. Cape Department of Nature and Environmental Conservation.
- HESTER, S. G. AND GRENIER, M.B. 2005. *A conservation plan for bats in Wyoming*. Lander, WY: Wyoming Game and Fish Department, Nongame Program.
- HGC ENGINEERING, 2006: *Wind Turbines and Infrasound*, report to the Canadian Wind Energy Association
- HGC ENGINEERING, 2007: *Wind Turbines and Sound*, report to the Canadian Wind Energy Association
- HOBBS, J.C.A. & LEDGER J.A. 1986a. The Environmental Impact of Linear Developments; Power
- lines and Avifauna. *Proceedings of the Third International Conference on Environmental Quality and Ecosystem Stability*. Israel, June 1986.
- HOBBS, J.C.A. & LEDGER J.A. 1986B. Power lines, Birdlife and the Golden Mean. *Fauna and Flora*, 44:23-27.
- HOCKEY P.A.R., DEAN W.R.J., AND RYAN P.G. 2005. Robert's Birds of Southern Africa, seventh edition. Trustees of the John Voelcker Bird Book Fund, Cape Town.
- HOCKEY, P.A.R., DEAN, W.R.J, AND RYAN, P.G. 2005. Robert's Birds of Southern Africa, seventh edition. Trustees of the John Voelcker Bird Book Fund, Cape Town.

- HOOGSTAD, C. Email communication from the manager of the Eskom-EWT Strategic Partnership to the author on 25 June 2015.
- HORN, J. W., ARNETT, E. B. AND KUNZ, T.H. 2008. Behavioural responses of bats to operating wind turbines. *Journal of Wildlife Management* 72: 123-132.
- HÖTKER, H., THOMSEN, K.-M. & H. JEROMIN. 2006. Impacts on biodiversity of exploitation of renewable energy sources: the example of birds and bats facts, gaps in knowledge, demands for further research, and ornithological guidelines for the development of renewable energy exploitation. Michael-Otto-Institut im NABU, Bergenhusen.
- HOWE, R. H., EVANS, W. AND WOLF, A. T. 2002. Effects of wind turbines on Birds and Bats on Northeastern Wisconsin. Report submitted to Wisconsin Public Service Corporation and Madison Gas and Electric Company.
- HOWELL, J.A. & DIDONATO, J.E. 1991. Assessment of avian use and mortality related to wind turbine operations: Altamont Pass, Alameda and Contra Costa Counties, California, September 1988 Through August 1989. Final report prepared for Kenentech Windpower.
- HUNT, W.G. 2001. Continuing studies of golden eagles at Altamont Pass. Proceedings of the National Avian-Wind Power Planning Meeting IV.
- HUNT, W.G., JACKMAN, R.E., HUNT, T.L., DRISCOLL, D.E. & CULP, L. 1999. A Population Study of Golden Eagles in the Altamont Pass Wind Resource Area: Population Trend Analysis 1994– 97. Report to National Renewable Energy Laboratory, Subcontract XAT-6-16459–01. Santa Cruz: University of California.
- ISO 9613-2: 1996. 'Acoustics Attenuation of sound during propagation outdoors Part 2: General method of calculation'
- JENKINS A R; VAN ROOYEN C S; SMALLIE J J; ANDERSON M D & SMIT H A. 2011. Best practice guidelines for avian monitoring and impact mitigation at proposed wind energy development sites in southern Africa. Endangered Wildlife Trust and Birdlife South Africa.
- JENKINS, A. & SMALLIE, J. 2009. Terminal velocity: the end of the line for Ludwig's Bustard? Africa Birds and Birding. Vol 14, No 2.
- JENKINS, A., DE GOEDE, J.H. & VAN ROOYEN, C.S. 2006. Improving the products of the Eskom Electric Eagle Project. Unpublished report to Eskom. Endangered Wildlife Trust.
- JENKINS, A.R., SMALLIE, J.J. & DIAMOND, M. 2010. Avian collisions with power lines: a global review of causes and mitigation with a South African perspective. *Bird Conservation International* 20: 263-278.
- JOHNSON, G. D., ERICKSON, W. P., STICKLAND, M. D., SHEPHERD, M. F., SHEPHERD, D. A. AND
- SARAPPO, S. A. 2003. Mortality of bats at a large-scale wind power development at Buffalo Ridge, Minnesota. *The American Midland Naturalist Journal* 150: 332-342.
- JOHNSON, G.D., STRICKLAND, M.D., ERICKSON, W.P. & YOUNG, D.P. 2007. Use of data to develop mitigation measures for wind power impact on birds. In: De Lucas, M., Janss, G.F.E., & Ferrer, M eds: Birds and Wind Farms Risk Assessment and Mitigation. Quercus, Madrid.
- JOHNSON, G.D., STRICKLAND, M.D., ERICKSON, W.P., SHEPERD, M.F. & SHEPERD D. A. 2000. Avian Monitoring Studies at the Buffalo Ridge, Minnesota Wind Resource Area: Results of a four-year study. Technical Report prepared for Northern States Power Company, Minneapolis, MN 262pp.

JOHNSON, M.R, ANHAEUSSER, C.R. and THOMAS RJ (Eds) (2006). The Geology of South Africa.

GSSA, Council for Geoscience, Pretoria. Rubidge BS (ed) 1995. Biostratigraphy of the Beaufort Group (Karoo Supergroup), South Africa. South African Committee for Stratigraphy.

JOURNAL OF ACOUSTICAL SOCIETY OF AMERICA, 2009: *Response to noise from modern wind farms in the Netherlands*

KAMPERMAN, GW. AND James, RR, 2008: The "How to" guide to siting wind turbines to prevent health risks from sound

KOOPS, F.B.J. & DE JONG, J. 1982. Vermindering van draadslachtoffers door markering van hoogspanningsleidingen in de omgeving van Heerenveen. Electrotechniek 60 (12): 641 – 646.
 KRUCKENBERG, H. & JAENE, J. 1999. Zum Einfluss eines Windparks auf die Verteilung weidender Bläßgänse im Rheiderland (Landkreis Leer, Niedersachsen). Natur Landsch. 74: 420–427.

KRUGER, R. & VAN ROOYEN, C.S. 1998. Evaluating the risk that existing power lines pose to large raptors by using risk assessment methodology: The Molopo Case Study. *Proceedings of the 5th World Conference on Birds of Prey and Owls*. August 4-8, 1998. Midrand, South Africa.

KRUGER, R. 1999. *Towards solving raptor electrocutions on Eskom Distribution Structures in South Africa*. Bloemfontein (South Africa): University of the Orange Free State. (M. Phil. Mini-thesis)

KUNZ, T. H., ARNETT, E. B., ERICKSON, W. P., HOAR, A. R., JOHNSON, G. D., LARKIN, R. P.,

- STRICKLAND, M. D., THRESHER, R. W., TUTTLE, M. D. 2007. Ecological impacts of wind energy development on bats: questions, research needs, and hypothesis. *Frontiers in Ecology and the Environment* 5: 315-324.
- LANGGEMACH, T. 2008. Memorandum of Understanding for the Middle-European population of the Great Bustard, German National Report 2008. Landesumweltamt Brandenburg (Brandenburg State Office for Environment).
- LANGSTON, R.H.W. & PULLAN, J.D. 2003. Wind farms and birds: an analysis of the effects of wind farms on birds, and guidance on environmental assessment criteria and site selection issues. Report written by Birdlife International on behalf of the Bern Convention. Council Europe Report T-PVS/Inf
- LARSEN, J.K. & MADSEN, J. 2000. Effects of wind turbines and other physical elements on field utilization by pink-footed geese (*Anser brachyrhynchus*): A landscape perspective. Landscape Ecol. 15: 755–764.
- LEDDY, K.L., HIGGINS, K.F., NAUGLE, D.E., 1999. Effects of wind turbines on upland nesting birds in conservation reserve program grasslands. Wilson Bulletin 11, 100–104.
- LEDGER, J. 1983. *Guidelines for Dealing with Bird Problems of Transmission Lines and Towers.* Eskom Test and Research Division. (Technical Note TRR/N83/005).
- LEDGER, J.A. & ANNEGARN H.J. 1981. Electrocution Hazards to the Cape Vulture (*Gyps* coprotheres) in South Africa. *Biological Conservation* 20:15-24.
- LEDGER, J.A. 1984. Engineering Solutions to the Problem of Vulture Electrocutions on Electricity Towers. *The Certificated Engineer*, 57:92-95.
- LEDGER, J.A., J.C.A. HOBBS & SMITH T.V. 1992. Avian Interactions with Utility Structures: Southern African Experiences. *Proceedings of the International Workshop on Avian Interactions with Utility Structures*. Miami (Florida), Sept. 13-15, 1992. Electric Power Research Institute.
- LYNCH, C. D. 1989. The mammals of the north-eastern Cape Province. *Mem. Nas. Mus. Bloemfontein* 25: 1-116.
- MACRAE, C. 1999. Life etched in stone. Fossils of South Africa, 305 pp. The Geological Society of South Africa, Johannesburg.
- MADDERS, M & WHITFIELD, D.P. Upland raptors and the assessment of wind farm impacts. 2006. Ibis. Volume 148, Issue Supplement s1. pp 43-56.
- MARNEWICK, M.D., RETIEF E.F., THERON N.T., WRIGHT D.R., ANDERSON T.A. 2015. Important Bird and Biodiversity Areas of South Africa. Johannesburg: BirdLife South Africa.

- MARTIN, G., SHAW, J., SMALLIE J. & DIAMOND, M. 2010. Bird's eye view How birds see is key to avoiding power line collisions. Eskom Research Report. Report Nr: RES/RR/09/31613.
- MILIEU, 2010: 'Inventory of Potential Measures for a Better Control of Environmental Noise', DG Environment of the European Commission
- MINISTRY OF THE ENVIRONMENT, 2008: Noise Guidelines for Wind Farms, Interpretation for Applying MOE NPC Publications to Wind Power Generation Facilities
- MINNESOTA DEPARTMENT OF HEALTH, 2009: Public Health Impacts of Wind Farms
- MINTER LR, BURGER M, HARRISON JA, BRAACK HH, BISHOP PJ & KLOEPFER D (EDS). 2004. Atlas and Red Data book of the frogs of South Africa, Lesotho and Swaziland. SI/MAB Series no. 9. Smithsonian Institution, Washington, D.C.
- MONADJEM, A., TAYLOR, P.J., COTTERILL, F.P.D. & SCHOEMAN, M.C. (2010). Bats of southern and central Africa A biogeographic and taxonomic synthesis, Ultra Litho (Pty) Ltd, Johannesburg.
- MOSELEY,S., AND NAUDE-MOSELEY,B., 2008. Getaway Guide to the Karoo, Namaqualand and Kalahari, Sunbird.
- MUCINA L. & RUTHERFORD M.C. (EDS) 2006. *The Vegetation of South Africa, Lesotho and Swaziland*. Strelitzia 19. South African National Biodiversity Institute, Pretoria.
- MUCINA L., AND RUTHERFORD M.C., (EDS) 2006. The Vegetation of South Africa, Lesotho and Swaziland. Strelitzia 19. South African National Biodiversity Institute, Pretoria.
- MUCINA, L & RUTHERFORD, M. C., 2006: The Vegetation of South Africa, Lesotho and Swaziland. *Strelitzia* 19, South African National Biodiversity Institute, Pretoria.
- MUCINA, L. AND RUTHERFORD, M. C. 2006. The Vegetation of South Africa, Lesotho and Swaziland-Strelitzia 19, South African National Biodiversity Institute, Pretoria.
- MUCINA. L. & RUTHERFORD, M.C. (Eds) 2006. The vegetation of South Africa, Lesotho and Swaziland. *Strelitzia* 19. South African National Biodiversity Institute, Pretoria.
- NAMAKWA DM. (2014). Namakwa Integrated Development Plan.
- NATIONAL PLANNING COMISSION. (2011). National Development Plan: Vision for 2030.
- NEL, J.L., MURRAY, K.M., MAHERRY, A.M., PETERSEN, C.P., ROUX, D.J., DRIVER, A., HILL, L.,
 VAN DEVENTER, H., FUNKE, N., SWARTZ, E.R., SMITH-ADAO, L.B., MBONA, N.,
 DOWNSBOROUGH, L. AND NIENABER, S. (2011). Technical Report for the National Freshwater
 Ecosystem Priority Areas project. WRC Report No. K5/1801.
- NEUWEILER, G. 2000. The Biology of Bats. Oxford University Press.
- NICOLAS, M. & RUBIDGE, B.S. 2010. Changes in Permo-Triassic terrestrial tetrapod ecological representation in the Beaufort Group (Karoo Supergroup) of South Africa. Lethaia 43, 45-59.
- NICOLAS, M.V. 2007. Tetrapod diversity through the Permo-Triassic Beaufort Group (Karoo Supergroup) of South Africa. Unpublished PhD thesis, University of Witwatersrand, Johannesburg.
- NOISE QUEST, Aviation Noise Information & Resources, 2010: http://www.noisequest.psu.edu/pmwiki.php?n=Main.HomePage
- NOISE-CON, 2008: Simple guidelines for siting wind turbines to prevent health risks
- NORTHERN CAPE GOVERNMENT. (2008). Northern Cape Provincial Growth and Development Strategy.
- NORTHERN CAPE PROVINCE. (2011). Northern Cape Municipal Local Economic Development Framework.
- NORTON, M.P. AND KARCZUB, D.G.: Fundamentals of Noise and Vibration Analysis for Engineers, Second Edition, 2003

O'SHEA, T. J., BOGAN, M. A. AND ELLISON, L. E. (2003). *Monitoring trends in bat populations of the United States and territories: Status of the science and recommendations for the future*. Wildlife Society Bulletin, 31: 16-29.

OBERHOLZER, B. 2005. Guideline for involving visual & aesthetic specialists in EIA processes: Edition

CSIR Report No ENV-S-C 2005 053 F. Republic of South Africa, Provincial Government of the Western

Cape, Department of Environmental Affairs & Development Planning, Cape Town. Treasure Karoo Action Group website: http://treasurethekaroo.co.za/

OLLIS, D. J., SNADDON, C. D., JOB, N. M & MBONA, M., 2013: Classification System for Wetlands and other Aquatic Ecosystems in South Africa, User Manual: Inland Systems.

OOSTHUYSEN, E. & HOLNESS, S. 2016. Northern Cape Critical Biodiversity Areas (CBA) Map. https://cirrus.nmmu.ac.za/index.php/s/20fe43905396fca0025948bc0d3b514d. Northern Cape Department of Environment and Nature Conservation & Nelson Mandela Metropolitan University.

ORLOFF, S. & FLANNERY, A. 1992. Wind turbine effects on avian activity, habitat use and mortality in Altamont Pass and Solano County Wind Resource Areas, 1989–91. California. Energy Commission.

PEARCE-HIGGINS J.W, STEPHEN L, LANGSTON R.H.W, BAINBRIDGE, I.P.& R BULLMAN. The distribution of breeding birds around upland wind farms. Journal of Applied Ecology 2009, 46, 1323–1331

- PEARCE-HIGGINS, J.W., STEPHEN, L., DOUSE, A., & LANGSTON, R.H.W. Greater impacts on bird populations during construction than subsequent operation: result of multi-site and multi-species analysis. Journal of Applied Ecology 2012, 49, 396-394.
- PEDERSEN, EJA; HALMSTAD, HÖGSKOLAN I (2003): '*Noise annoyance from wind turbines: a review*'. Naturvårdsverket, Swedish Environmental Protection Agency, Stockholm
- PEDERSEN, M.B. & POULSEN, E. 1991. Impact of a 90 m/2MW wind turbine on birds. Avian responses to the implementation of the Tjaereborg wind turbine at the Danish Wadden Sea. Danske Vildtunderogelser Haefte 47. Rønde, Denmark: Danmarks Miljøundersøgelser.

PIKTOCHART. (2016, October 15). Piktochart. Retrieved from Piktochart: https://piktochart.com

QUANTEC. (2016). Quantec data.

- RAAB, R., JULIUS, E., SPAKOVSZKY, P. & NAGY, S. 2009. Guidelines for best practice on mitigating impacts of infrastructure development and afforestation on the Great Bustard. Prepared for the Memorandum of Understanding on the conservation and management of the Middle-European population of the Great Bustard under the Convention on Migratory species (CMS). Birdlife International. European Dvision.
- RAAB, R., SPAKOVSZKY, P., JULIUS, E., SCHÜTZ, C. & SCHULZE, C. 2010. Effects of power lines on flight behaviour of the West-Pannonian Great Bustard *Otis tarda* population. Bird Conservation International. Birdlife International.
- RALSTON, S. IN LITT. 2016. Summary of avian mortality at wind farms in South Africa up to March 2016. BirdLife SA.
- RAUTENBACH, I.L. 1982. *Mammals of the Transvaal*. Pretoria: Ecoplan.

RENEWABLE ENERGY RESEARCH LABORATORY, 2006: Wind Turbine Acoustic Noise

- REPORT TO CONGRESSIONAL REQUESTERS, 2005: Wind Power Impacts on Wildlife and Government Responsibilities for Regulating Development and Protecting Wildlife
- RETIEF E.F., DIAMOND M, ANDERSON M.D., SMIT, H.A., JENKINS, A & M. BROOKS. 2012. Avian Wind Farm Sensitivity Map. Birdlife South Africa <u>http://www.birdlife.org.za/conservation/birds-and-wind-energy/windmap</u>.

- SABS 1200; "Code of practice for use with standardised specifications for civil engineering construction and contract documents". Second revision, SABS Pretoria, 1986.
- SANS 10103:2008. 'The measurement and rating of environmental noise with respect to annoyance and to speech communication'.
- SANS 10210:2004. 'Calculating and predicting road traffic noise'.

SANS 10328:2008. 'Methods for environmental noise impact assessments'.

SANS 10357:2004 The calculation of sound propagation by the Concave method'.

SCOTTISH NATURAL HERITAGE (2005, revised 2010) Survey methods for use in assessing the impacts of onshore wind farms on bird communities. SNH Guidance. SNH, Battleby.

SCOTTISH NATURAL HERITAGE. 2010. Use of Avoidance Rates in the SNH Wind Farm Collision Risk Model. SNH Avoidance Rate Information & Guidance Note.

- SHAW, J.M. 2013. Power line collisions in the Karoo: Conserving Ludwig's Bustard. Unpublished PhD thesis. Percy FitzPatrick Institute of African Ornithology, Department of Biological Sciences, Faculty of Science University of Cape Town May 2013.
- SKINNER, J.D. & CHIMIMBA, C.T. 2005. The mammals of the Southern African Subregion. Cambridge University Press, Cambridge.SMALLWOOD, K. S. (2013), Comparing bird and bat fatality-rate estimates among North American wind-energy projects. Wildlife Society Bulletin, 37: 19–33. doi: 10.1002/wsb.260.
- SMITH, R., RUBIDGE, B. AND VAN DER WALT, M. 2012. Therapsid Biodiversity Patterns and Palaeoenvironments of the Karoo basin, South Africa in ed. Chinsamy Turan, A. *Forerunners of Mammals*. Indiana University Press.

SOIL CLASSIFICATION WORKING GROUP. 1991. Soil classification: a taxonomic system for South Africa. Soil and Irrigation Research Institute, Department of Agricultural Development, Pretoria.

SOUTH AFRICAN BIRD ATLAS PROJECT 2. Accessed on 04 October 2016. <u>http://sabap2.adu.org.za</u>. SOWLER, S., STOFFBERG, S., MACEWAN, K., ARONSON, J., RAMALHO, R., POTGIETER, K., LÖTTER, C. 2016. *South African Good Practice Guidelines for Surveying Bats at Wind Energy Facility*

Developments - Pre-construction: 4th Edition. South African Bat Assessment Association.

STATS SA. (2001). Census.Stats SA.

- STEWART, G.B., COLES, C.F. & PULLIN, A.S. 2004. Effects of Wind Turbines on Bird Abundance. Systematic Review no. 4. Birmingham, UK: Centre for Evidence-based Conservation.
- STEWART, G.B., PULLIN, A.S. & COLES, C.F. 2007. Poor evidence-base for assessment of windfarm impacts on birds. Environmental Conservation. 34, 1-11.
- TATS SA. (2011). Census. Stats SA.
- TAYLOR, P. J. 2000. Bats of southern Africa, University of Natal Press, Pietermaritzburg.

The World Bank Climate Change Knowledge Portal available at http://sdwebx.worldbank.org/climateportal/

THELANDER, C.G., SMALLWOOD, K.S. & RUGGE, L. 2003. Bird Risk Behaviours and Fatalities at the Altamont Pass Wind Resource Area. Report to the National Renewable Energy Laboratory, Colorado.

Transmission Development plan 2016 – 2025

TRH 11: Dimensional and Mass Limitations and Other Requirements for Abnormal Load Vehicles' 8th Edition, March 2010.

TRH11: Administrative Guidelines for Granting of Exemption Permits for the Conveyance of Abnormal Loads' 1st Edition, July 2009.

TUTTLE, M. D. AND HENSLEY, D. L. 2001. *The Bat House Builder's Handbook*. (BCI) Bat Conservation International.

UGORETZ, S. 2001. Avian mortalities at tall structures. In: Proceedings of the National Avian Wind Power Planning Meeting IV pp. 165-166. National Wind Coordinating Committee. Washington DC.

UMSEBE DEVELOPMENT PLANNERS. (2010). *Hantam LM Rural Spatial Development Framework*. UMSEBE DEVELOPMENT PLANNERS. (2010). *Khai-Ma LM Rural Spatial Development Framework*. UNESCO. 2005. Operational Guidelines for the Implementation of the World Heritage Convention.

UNESCO World Heritage Centre. Paris

- URBAN-ECON DEVELOPMENT ECONOMISTS. (2011). Hantam Municipality Local Economic Development Strategy
- USEPA, 1971: Effects of Noise on Wildlife and other animals
- VAN DEN BERG G.P., 2011. 'Health based guidelines for wind turbine noise in the Netherlands: Fourth International Meeting on Wind Turbine Noise'.
- VAN DEN BERG, G.P., 2003. '*Effects of the wind profile at night on wind turbine sound*'. Journal of Sound and Vibration.
- VAN DEN BERG, G.P., 2004. 'Do wind turbines produce significant low frequency sound levels?'. 11th International Meeting on Low Frequency Noise and Vibration and its Control
- VAN DER MERWE D.H. "The prediction of heave from the plasticity index and percentage clay fraction of soils". SAICE 1964
- VAN DER MERWE, M. 1979. Growth of ovarian follicles in the Natal clinging bat. South African Journal of Zoology 14: 111-117.
- VAN DER MERWE, M. 1994. Reproductive biology of the Cape serotine bat, *Eptesicus capensis*, in the Transvaal, South Africa. *South African Journal of Zoology* 29: 36-39.
- VAN DER WALT, M., DAY, M., RUBIDGE, B., COOPER, A.K. & NETTERBERG, I. 2010. A new GIS based biozone map of the Beaufort Group (Karoo Supergroup), South Africa. Palaeontologia Africana45, 1-5.
- VAN ROOYEN, C. & FRONEMAN, A. 2016. Addendum to the avifaunal impact assessment conducted for the proposed Kangnas Wind Energy facility near Springbok, Northern Cape Province. Report done for Aurecon.
- VAN ROOYEN, C.S. & LEDGER, J.A. 1999. Birds and utility structures: Developments in southern Africa. Pp 205-230, in Ferrer, M. & G.F.M. Janns. (eds.). Birds and Power lines. Quercus, Madrid (Spain). Pp 238.
- VAN ROOYEN, C.S. & TAYLOR, P.V. 1999. Bird Streamers as probable cause of electrocutions in South Africa. EPRI Workshop on Avian Interactions with Utility Structures 2-3 December 1999. Charleston, South Carolina.
- VAN Rooyen, C.S. 1998. Raptor mortality on power lines in South Africa. *Proceedings of the 5th World Conference on Birds of Prey and Owls*. Midrand (South Africa), Aug.4 – 8, 1998.
- VAN ROOYEN, C.S. 1999. An overview of the Eskom-EWT Strategic Partnership in South Africa. *EPRI Workshop on Avian Interactions with Utility Structures* Charleston (South Carolina), Dec. 2-3 1999.
- VAN ROOYEN, C.S. 2000. An overview of Vulture Electrocutions in South Africa. *Vulture News*, 43: 5-22. (Vulture Study Group, Johannesburg, South Africa).
- VAN ROOYEN, C.S. 2007. Eskom-EWT Strategic Partnership: Progress Report April-September 2007. Endangered Wildlife Trust, Johannesburg.
- VAN ROOYEN, C.S. VOSLOO, H.F. & R.E. HARNESS. 2002. Eliminating bird streamers as a cause of faulting on transmission lines in South Africa. *Proceedings of the IEEE 46th Rural Electric Power Conference*. Colorado Springs (Colorado), May. 2002.

VAN ROOYEN, C.S., FRONEMAN, A. & LAUBSCHER, N. 2014A. Avifaunal pre-construction monitoring at the proposed Mainstream Loeriesfontein Wind Energy Facility: Phase 1. Final Pre-construction Report.

VAN ROOYEN, C.S., FRONEMAN, A. & LAUBSCHER, N. 2014b. Avifaunal pre-construction monitoring at the proposed Mainstream Loeriesfontein Wind Energy Facility: Phase 2 and 3. Final Pre-construction Report.

VERDOORN, G.H. 1996. Mortality of Cape Griffons *Gyps coprotheres* and African Whitebacked Vultures *Pseudogyps africanus* on 88kV and 132kV power lines in Western Transvaal, South Africa, and mitigation measures to prevent future problems. *Proceedings of the 2nd International Conference on Raptors*: Urbino (Italy), Oct. 2-5, 1996.

VESTAS, 2010: '1/1 Octaves According to the General Specification - V90-1.8/2.0 MW'. Denmark

- VINCENT, S., NEMOZ, M. AND AULAGNIER, S. 2011. Activity and foraging habitats of *Miniopterus schreibersii* (Chiroptera: Miniopteridae) in southern France: implications for its conservation. *The Italian Journal of Mammalogy* 22: 57-72.
- VISAGIE, R. 2016. Personal communication to the author on 15 April 2016 by EWT's Birds of Prey Programme Field Officer.
- VISSER, J.N.J. 1992. Deposition of the Early to Late Permian Whitehill Formation during a sea-level high stand in a juvenile foreland basin. South African Journal of Geology 95: 181-193.
- WHITFORD, JACQUES, 2008: Model Wind Turbine By-laws and Best Practices for Nova Scotia Municipalities

WINDTEST, KAISER-WILHELM-KOOG GMBH, 2005: 'Report of acoustic emission of a wind turbine generator system of the Type V90-3MW, Mode 0 near Bökingharde (Germany), Report WT 4224/05'

WORLD HEALTH ORGANIZATION, 1999: Protection of the Human Environment; Guidelines for Community Noise

WORLD HEALTH ORGANIZATION, 2009: Night Noise Guidelines for Europe

SiVEST Environmental Division 51 Wessels Road, Rivonia. 2128. South Africa PO Box 2921, Rivonia. 2128. South Africa

Tel + 27 11 798 0600 Fax +27 11 803 7272 Email info@sivest.co.za www.sivest.co.za

.

Contact Person: Cell Number: Email: Andrea Gibb 011 798 0600 andreag@sivest.co.za