
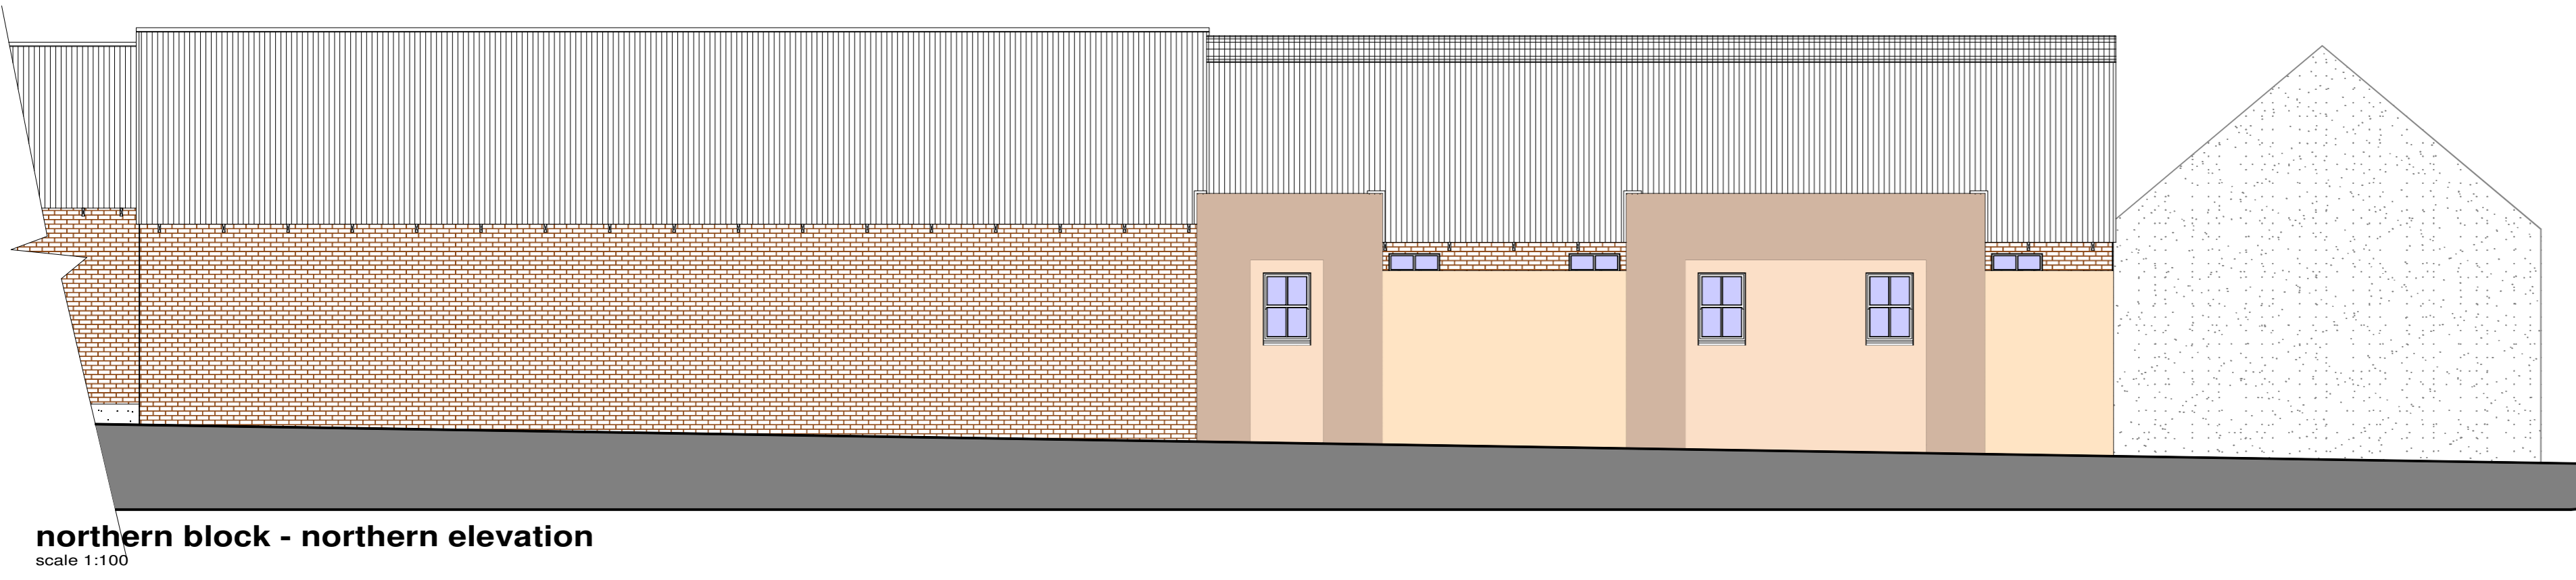
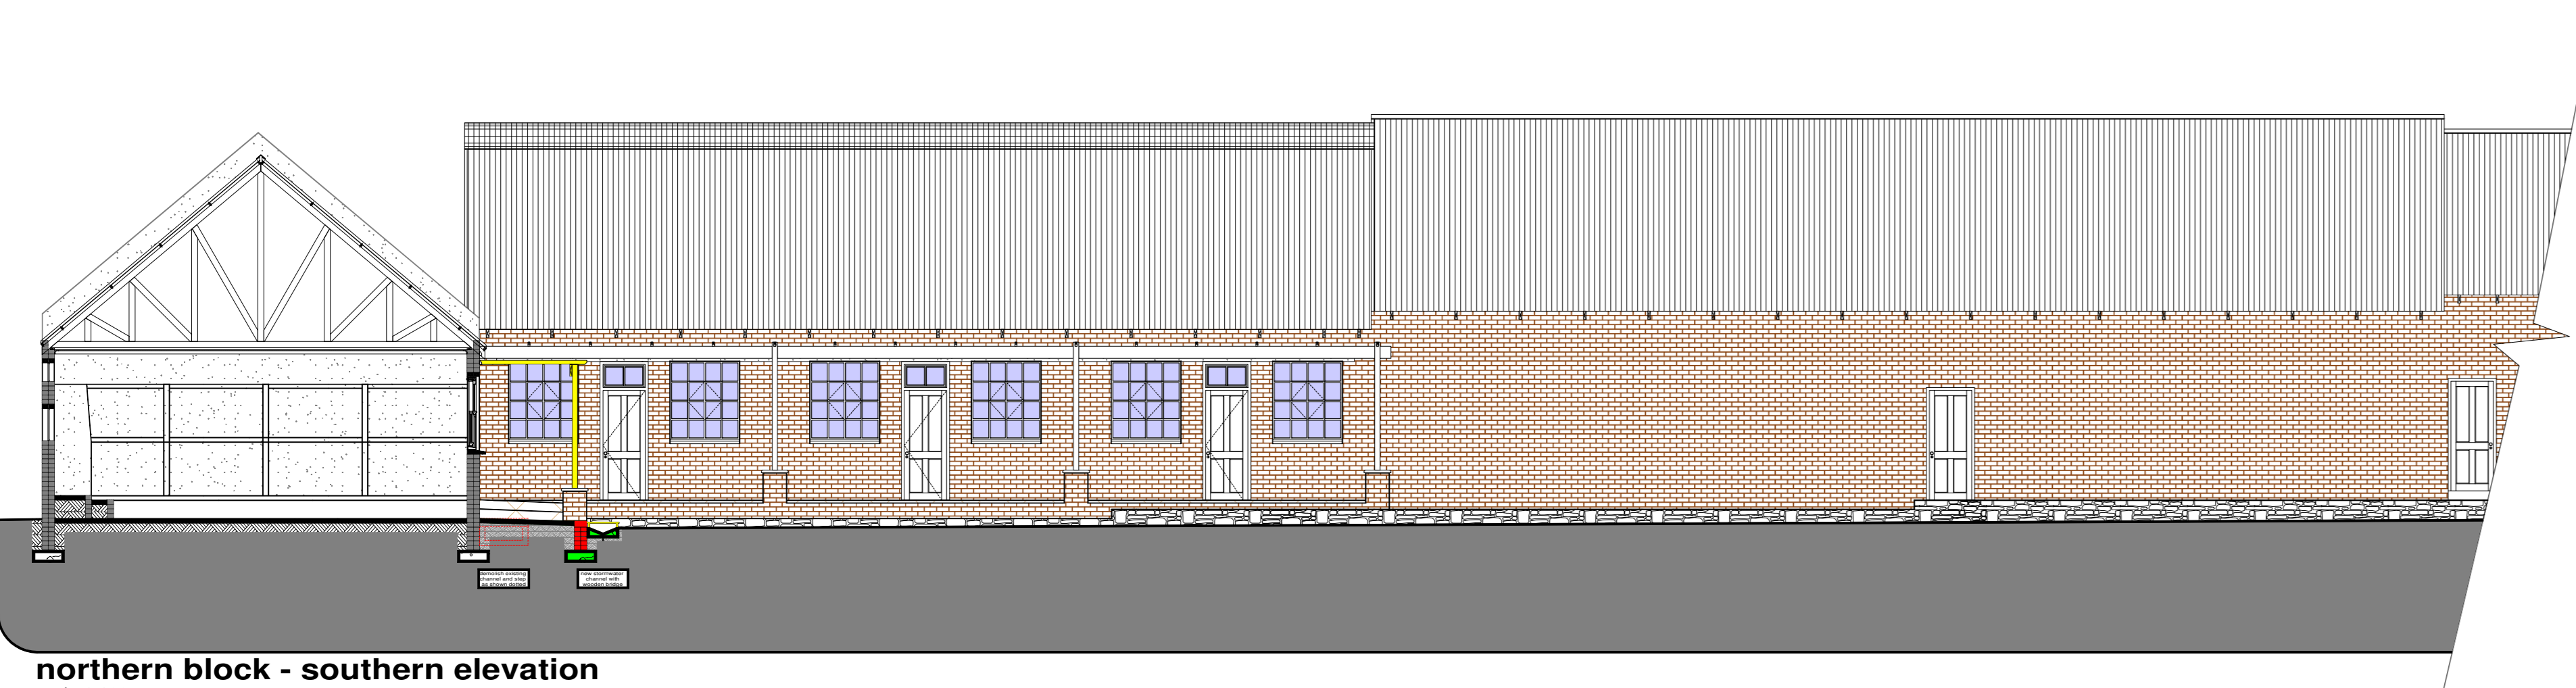


construction notes:

- 01 **internal floor finish:**
ceramic tile as per approved sample.
- 02 **internal floor finish:**
ceramic tile as per approved sample.
- 03 **dpc:**
Guard@API A T USB Green 250um damp proof membrane under concrete surface beds conforming to SANS 952-1:2011 laid with minimum 150mm overlaps and sealed with Gurplas pressure sensitive tape.
- 04 **internal wall finish 1:**
plaster and paint.
- 05 **internal wall finish 2:**
ceramic tile from floor to ceiling to later specification.
- 06 **external wall finish 1:**
plaster and paint.
- 07 **external wall finish 2:**
natural stone cladding, stone found on site.
- 08 **ceiling:**
existing ceiling to be repaired / replaced where necessary.
- 09 **slab soffit:**
Slab soffits to be plastered smooth, paint to finish.
- 10 **roof insulation:**
layer 150mm thick Factorylite non-combustible light weight fibreglass. Glaswool acoustic ceiling insulation with reinforced foil facing, nominal density 12kg/m³, fixed concurrent with the roof covering with galvanised steel strapping wires at 300mm centres and laid down top and bottom after tensioning with galvanised hoop iron ties with overlaps stapled together, all in accordance with manufacturer's recommendations.
• R-value: 2.56m²°C/W
• Thermal conductivity: 0.039 W/m/K.
- 11 **roof:**
existing roof sheeting and trusses to be inspected for leaks and damaged members, damaged members to be repaired / replaced if necessary, truss members to be replaced with Oregon pine to match existing, all finishes to match existing, unless specified differently elsewhere.
- 12 **new floor surface beds:**
80mm concrete surface bed with 100 micron DPC on 30mm sand blinding on fill compacted in 150mm layers to 93% MCD AASHTO, fill to be treated with ant and termite poison to comply to SANS standards.
- 15 **existing floor surface beds:**
existing concrete surface beds to be inspected by structural engineer, all needed repairwork to be done according to engineers specifications if required.
- 16 **new foundation footings:**
concrete foundation strip footings to sizes shown on foundation plan, all to engineers specifications.
- 17 **existing foundation footings:**
existing concrete foundation strip footings to be inspected by structural engineer, all needed repairwork to be done according to engineers specifications if required.
- 18 **slab waterproofing:**
One layer Derbigum SP4 waterproofing membrane, with 75mm side laps and 100mm end laps, sealed to primed surface to falls and crossfalls by 'torchlusion' finished with two coats Floodcote bituminous aluminum paint. Waterproofing to be installed by an Approved Derbigum Contractor under a ten year guarantee.

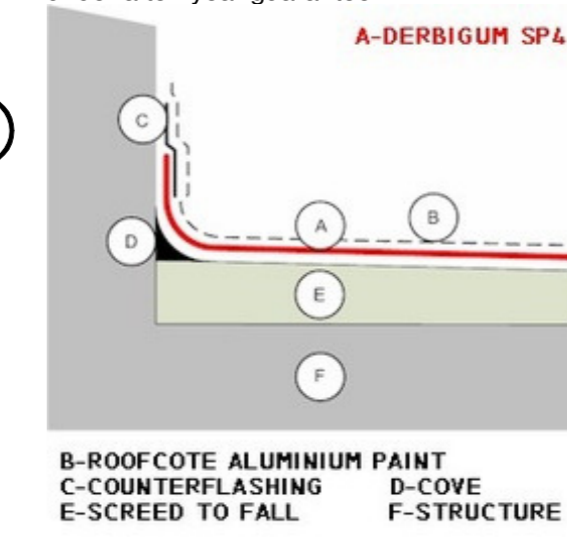

n o r t h e r n b l o c k

COPYRIGHT NOTICE
COPYRIGHT RESERVED
Copyright © 2017, Bakopane Architects cc
Copyright subsists in this drawing. The person or entity whose name appears in the list block of this drawing, is hereby granted a non-exclusive license to use, display, print and / or reproduce this drawing to the extent necessary to carry out and complete the project described in the title block of this drawing. This license in respect of the copyright is expressly limited as stated and the person and / or entity referred to above shall not be entitled to grant sub-licenses in respect of the copyright in this drawing to any other entity. This license confers no ownership rights in the copyright vesting in the drawing and this drawing and the copyright subsisting therein will, at all times, remain the property of Bakopane Architects cc. Any unauthorised reproduction, publication, transmission, adaptation and/or inclusion of this drawing in a cinematograph film or television broadcast is an act of copyright infringement which will render the doer of the act liable for civil law copyright infringement and may in certain circumstances render the doer liable to criminal prosecution. Requests and enquiries concerning this drawing and the rights subsisting therein should be addressed to the copyright owner.

No.	Date:	Notes:	Drawn:
Rev. 08	28-08-17	Revised for measurement	NOT
Rev. 08	05-09-17	Starting drawings started	COUJUN

- GENERAL NOTES:**
1. Check all measurements, levels and details on site before commencement with work.
 2. Refer any discrepancies to architect.
 3. All work to be done in accordance with SANS-10400
 4. Nothing to be scaled from drawing. Request measurement from architect.
 5. Architect's & engineer's drawings to be read together.
 6. Drawing to be used for intention as mentioned in Drawing description.



CLIENTS SIGNATURE:



DEPARTMENT'S SIGNATURE:



PRINCIPAL AGENT SIGNATURE:



ARCHITECTS SIGNATURE:

TITLE:
PROPOSED ALTERATIONS & ADDITIONS TO TAUNG SKULL HERITAGE SITE FOR NORTH-WEST RURAL, ENVIRONMENTAL & AGRICULTURE DEPARTMENT PROVINCE OF NORTH-WEST

DRAWING DESCRIPTION: COMPOUND	ORIGINAL ORG. SIZE: A1
SCALE: 1:100	REV. 0

DRG No: TAUNG - 42017 - ARC - C007