



# **VISUAL IMPACT REPORT**

---

**HARMONY ONE PLANT SOLAR PV  
IMPACT ASSESSMENT  
OCTOBER 2022**

---

VISUAL IMPACT REPORT

**Harmony One Plant Solar PV Facility, Free State**

**Submitted to:**

Savannah Environmental (Pty) Ltd

PO Box 148  
Sunninghill  
2157

Tel: 011 656 3237



**Prepared by:**

Eco-Thunder Consulting (Pty) Ltd

PO Box 2055  
Fourways  
2191  
Tel: 064 655 2752



Report Revision No: 1

Date Issued: 14<sup>th</sup> October 2022

Reference: Eco Thunder Consulting (2022) Visual Impact Assessment for Harmony One Plant Impact Assessment.

## ACRONYMS, ABBREVIATIONS AND GLOSSARY

Acronyms & Abbreviations	
<b>BAR</b>	Basic Assessment Report
<b>EIA</b>	Environmental Impact Assessment
<b>EMPr</b>	Environmental Management Programme
<b>GYLA</b>	Graham Young Landscape Architect
<b>SACLAP</b>	South African Council for the Landscape Architectural Profession
<b>VAC</b>	Visual Absorption Capacity
<b>VIA</b>	Visual Impact Assessment
Glossary	
<b>Aesthetic Value</b>	Aesthetic value is the emotional response derived from the experience of the environment with its natural and cultural attributes. The response can be either to visual or non-visual elements and can embrace sound, smell and any other factor having a strong impact on human thoughts, feelings, and attitudes (Ramsay, 1993). Thus, aesthetic value encompasses more than the seen view, visual quality, or scenery, and includes atmosphere, landscape character and sense of place (Schapper, 1993).
<b>Aesthetically significant place</b>	A formally designated place visited by recreationists and others for the express purpose of enjoying its beauty. For example, tens of thousands of people visit Table Mountain on an annual basis. They come from around the country and even from around the world. By these measurements, one can make the case that Table Mountain (a designated National Park) is an aesthetic resource of national significance. Similarly, a resource that is visited by large numbers who come from across the region probably has regional significance. A place visited primarily by people whose place of origin is local is generally of local significance. Unvisited places either have no significance or are "no trespass" places. (after New York, Department of Environment 2000).
<b>Aesthetic impact</b>	Aesthetic impact occurs when there is a detrimental effect on the perceived beauty of a place or structure. Mere visibility, even startling visibility of a Project proposal, should not be a threshold for decision making. Instead a Project, by its visibility, must clearly interfere with or reduce (i.e. visual impact) the public's enjoyment and/or appreciation of the appearance of a valued resource e.g. cooling tower blocks a view from a National Park overlook (after New York, Department of Environment 2000).
<b>Cumulative Effects</b>	The summation of effects that result from changes caused by a development in conjunction with the other past, present, or reasonably foreseeable actions.
<b>Glare</b>	The sensation produced by luminance within the visual field that is sufficiently greater than the luminance to which the eyes are adapted, which causes annoyance, discomfort, or loss in visual performance and visibility. <i>See Glint.</i> (USDI 2013:314)
<b>Glint</b>	A momentary flash of light resulting from a spatially localized reflection of sunlight. <i>See Glare.</i> (USDI 2013:314)
<b>Landscape Character</b>	The individual elements that make up the landscape, including prominent or eye-catching features such as hills, valleys, woods, trees, water bodies, buildings, and roads. They are generally quantifiable and can be easily described.
<b>Landscape Impact</b>	Landscape effects derive from changes in the physical landscape, which may give rise to changes in its character and how this is experienced (Institute of Environmental Assessment & The Landscape Institute 1996).

<b>Study area</b>	For the purposes of this report this Project the study area refers to the proposed Project footprint / Project site as well as the 'zone of potential influence' (the area defined as the radius about the centre point of the Project beyond which the visual impact of the most visible features will be insignificant) which is a 5,0km radius surrounding the proposed Project footprint / site.
<b>Project Footprint / Site</b>	For the purposes of this report the Project <i>site / footprint</i> refers to the actual layout of the Project as described.
<b>Sense of Place (geniusloci)</b>	Sense of place is the unique value that is allocated to a specific place or area through the cognitive experience of the user or viewer. A <i>genius loci</i> literally means 'spirit of the place'.
<b>Sensitive Receptors</b>	Sensitivity of visual receptors (viewers) to a proposed development.
<b>Viewshed analysis</b>	The two-dimensional spatial pattern created by an analysis that defines areas, which contain all possible observation sites from which an object would be visible. The basic assumption for preparing a viewshed analysis is that the observer eye height is 1,8m above ground level.
<b>Visibility</b>	The area from which Project components would potentially be visible. Visibility depends upon general topography, aspect, tree cover or other visual obstruction, elevation, and distance.
<b>Visual Exposure</b>	Visibility and visual intrusion qualified with a distance rating to indicate the degree of intrusion and visual acuity, which is also influenced by weather and light conditions.
<b>Visual Impact</b>	Visual effects relate to the changes that arise in the composition of available views because of changes to the landscape, to people's responses to the changes, and to the overall effects with respect to visual amenity available views because of changes to the landscape, to people's responses to the changes, and to the overall effects with respect to visual amenity.
<b>Visual Intrusion</b>	The nature of intrusion of an object on the visual quality of the environment resulting in its compatibility (absorbed into the landscape elements) or discord (contrasts with the landscape elements) with the landscape and surrounding land uses.
<b>Visual absorption capacity</b>	Visual absorption capacity is defined as the landscape's ability to absorb physical changes without transformation in its visual character and quality. The landscape's ability to absorb change ranges from low- capacity areas, in which the location of an activity is likely to cause visual change in the character of the area, to high-capacity areas, in which the visual impact of development will be minimal (Amir & Gidalizon 1990).
<b>Worst-case Scenario</b>	Principle applied where the environmental effects may vary, for example, seasonally or collectively to ensure the most severe potential effect is assessed.
<b>Zone of Potential Visual Influence</b>	By determining the zone of potential visual influence, it is possible to identify the extent of potential visibility and views which could be affected by the proposed development. Its maximum extent is the radius around an object beyond which the visual impact of its most visible features will be insignificant primarily due to distance.

## TABLE OF CONTENTS

<b>ACRONYMS, ABBREVIATIONS AND GLOSSARY .....</b>	<b>i</b>
<b>TABLE OF CONTENTS .....</b>	<b>iii</b>
<b>LIST OF FIGURES .....</b>	<b>v</b>
<b>LIST OF TABLES .....</b>	<b>vi</b>
<b>1. INTRODUCTION.....</b>	<b>7</b>
1.1. Project Overview and Background.....	7
1.2. Project Description .....	7
1.3. Objective of the Specialist Study .....	7
1.4. Terms and Reference .....	8
1.5. Specialist Details.....	8
1.6. Level of Confidence .....	8
1.7. Assumptions, Uncertainties, and Limitations.....	9
<b>2. LEGAL REQUIREMENTS AND GUIDELINES .....</b>	<b>11</b>
2.1. National Legislation and Guidelines .....	11
<b>3. APPROACH AND METHODOLOGY .....</b>	<b>12</b>
3.1. Approach .....	12
3.1.1. Significance of Visual Impact.....	13
3.2. Methodology .....	13
<b>4. DESCRIPTION OF THE PROJECT .....</b>	<b>15</b>
4.1. Project Phases and Activities .....	15
4.1.1. Site Preparation Phase .....	15
4.1.2. Construction Phase.....	15
4.1.3. Operational Phase .....	15
4.1.4. Decommissioning Phase.....	15
<b>5. ENVIROMENTAL SETTING .....</b>	<b>17</b>
5.1. Landscape Character .....	17
5.2. Land Use .....	17
5.3. Visual exposure and area of study.....	18
<b>6. VISUAL RESOURCE .....</b>	<b>28</b>
6.1. Visual Resource Value, Scenic Quality and Landscape Sensitivity .....	28
6.2. Sense of Place .....	29
6.3. Aerospace .....	29
<b>7. VISUAL IMPACT ASSESSMENT .....</b>	<b>32</b>
7.1. VIA Rating Methodology .....	32
7.2. Visual Impact Assessment.....	33
7.2.1. Construction Phase.....	33
7.2.2. Operation Phase .....	37
7.2.3. Cumulative Effects.....	39
7.3. Impact Statement.....	40

<b>8. CONCLUSION .....</b>	<b>41</b>
<b>REFERENCES .....</b>	<b>42</b>
<b>9. MITIGATION AND MANAGEMENT MEASURES .....</b>	<b>42</b>
9.1. Preparatory Works and Construction Concerns .....	42
9.2. Earthworks.....	43
9.3. Landscaping and Ecological Approach .....	43
9.4. Mounting Structures and Associated Infrastructure.....	43
9.5. Good housekeeping.....	43
9.6. Operation Phase .....	43
9.7. Lighting .....	44
9.8. MANAGEMENT PROGRAMME .....	44

## LIST OF FIGURES

---

Figure 1: Proposed Development location map.	10
Figure 2: VIA Process	13
Figure 3: Facility layout map	16
Figure 4: A- 1KM Visual exposure area	18
Figure 5: B- 3KM Visual exposure area	19
Figure 6: C- 6KM Visual exposure area	19
Figure 7: Road View of proposed PV Facility	20
Figure 8: Southern View of Proposed PV Facility	20
Figure 9: Western View of PV facility	21
Figure 10: Gridline and Proposed PV Facility	21
Figure 11: Gridline Road Crossing	22
Figure 12: R30 Road View of development	22
Figure 13: View of Diggers in and PV facility	23
Figure 14: View of Proposed Alternative	23
Figure 15: View of Preferred PV Placement and Alternative Placement	24
Figure 16: View of alternative from unknown road	24
Figure 17: Site Topography and Slope	25
Figure 18: Site Viewshed High definition	26
Figure 19: Viewshed Analysis topographical map	27
Figure 20: Aerospace relative to the development	30
Figure 21: Viewshed analysis	31

**LIST OF TABLES**

---

<i>Table 1: Value of the Visual Resource</i>	28
<i>Table 2: Impact on landscape character and sense of place due to the removal of vegetation and the construction of the PV structures and associated infrastructure.</i>	33
<i>Table 3: Impact of PV facility on the Roads in Close Proximity</i>	35
<i>Table 4: Visual Impact on Impact on Businesses, homes or facilities in close proximity</i>	35
<i>Table 5: Glint and Glare / Night and Daytime lighting</i>	37
<i>Table 6: Visual Exposure</i>	38
<i>Table 7: Sense of place</i>	38
<i>Table 8: Cumulative Impact</i>	39
<i>Table 9: Management programme – Planning.</i>	44
<i>Table 10: Management programme – Construction.</i>	45
<i>Table 11: Management programme – Operation.</i>	46
<i>Table 12: Management programme – Decommissioning.</i>	47



## 1. INTRODUCTION

---

### 1.1. Project Overview and Background

Eco-Thunder Consulting was commissioned by Savannah Environmental (Pty) Ltd to carry out a Visual Impact Assessment (VIA) of the proposed Harmony One Plant Solar PV Facility near Virginia in the Free State Province. The VIA focuses on the potential impact of the physical aspects of the proposed developments (i.e., form, scale, and bulk), and their potential impact within the local landscape and receptor context.

The VIA focuses on the potential impact of the physical aspects of the proposed developments (i.e., form, scale, and bulk), and their potential impact within the local landscape and receptor context.

### 1.2. Project Description

Free Gold Harmony (Pty) Ltd is looking to supplement its energy supply by implementing Photovoltaic (PV) generation, aiding their transition to a more sustainable and environmentally friendly energy mix. Located south-west of the Witpan dam, and South of the Harmony One Gold Plant operations, approximately 14km north-west of the town of Virginia within the Matjhabeng Local Municipality and within the Lejweleputswa District Municipality, Free State Province.

The PV facility is located on the Remaining Extent of the Farm Marmageli 20 and Remainder Extent of the Farm Welkom

A technically feasible project site, with an extent of 100 ha has been identified by Free Gold Harmony (Pty) Ltd as a technically suitable area for the development of the Project. A development area of ~75 ha was demarcated within this project site and allows an adequate footprint for the installation of a solar PV facility with a contracted capacity of up to 30MW, while allowing for the avoidance of environmental site sensitivities. The size of the development footprint within the development area will be confirmed in the EIA Phase once the facility layout is available for assessment.

#### **The onsite infrastructure will include:**

- Solar PV array comprising bifacial PV modules and mounting structures, using single axis tracking technology. Once installed will stand up to 5m above ground level.
- Inverters and transformers, a SCADA room, and maintenance room
- Cabling between the project components.
- Balance of Plant:
  - Existing spare switchgear panels upgraded switchgear circuit breakers or additional switchgear panels.
  - EK self-build works as defined in the CEL.
- On-site facility substation to facilitate the connection between the solar PV facility and Eskom electricity grid. The Size and Capacity of each of the on-site stations will be 40MW, 20MW, 40MW respectively
- An on-site Medium Voltage (MV) switching station forming part of the collector substation
- Temporary Laydown areas.
- Access roads, internal roads and fencing around the development area.
- Up to 132kV Overhead Power Lines (OHPL) – maximum of 30m height with a 30m servitude width
- Underground LV cabling will be used on the PV site

The successful development of the renewable energy projects will enable Harmony Gold to make a valuable and meaningful contribution towards growing the green economy within the province and South Africa. This will assist the Free State in creating green jobs and reducing Green House Gas emissions, whilst reducing the energy demand on the National Grid.

### 1.3. Objective of the Specialist Study

The main aim of the study is to document the baseline and to ensure that the visual/aesthetic consequences of the proposed Project are understood. The report therefore aims to identify scenic resources, and visually sensitive areas or receptors. It also aims to identify key concerns or issues relating to potential visual impacts arising from the Project, and which must be addressed in the assessment phase.

#### 1.4. Terms and Reference

A specialist study is required to establish the visual baseline and to identify and potential visual impacts arising from the proposed development based on the general requirements for a comprehensive VIA. The following terms of reference were established:

- Data collected allows for a description and characterization of the receiving environment.
- Describe the landscape character, quality and assess the visual resource of the study area.
- Describe the visual characteristics of the components of the Project.
- Identify issues that must be addressed in the impact assessment phase.
- Propose mitigation options to reduce the potential impact of the Project.

#### 1.5. Specialist Details

Eco-Thunder Consulting (ETC) is a 100% woman-owned, private company that specializes in a range of specialist studies, such as Visual Impact Assessments socio-economic research, economic development planning, development programme design and implementation as well as community trust management.

Eco-Thunder Consulting is registered with ECSA and landscape architects with interest and experience in landscape architecture, urban design, and environmental planning. The company has carried out visual impact assessments throughout Africa and specialize in project optimization in the environmental space. Aspects of this work also include landscape characterization studies, end-use studies for quarries, and computer modelling and visualization.

Based in Johannesburg, South Africa, Eco-Thunder has established itself as an expert on the conditions, needs and assets of communities that are linked to independent power generation facilities.

ETC also implements development programmes in energy communities, which ensures a comprehensive understanding of the how to drive positive social impact.

#### 1.6. Level of Confidence

Level of confidence<sup>1</sup> is determined as a function of:

- The information available, and understanding of the study area by the practitioner:
  - 3: A high level of information is available of the study area and a thorough knowledge base could be established during site visits, surveys etc. The study area was readily accessible.
  - 2: A moderate level of information is available of the study area and a moderate knowledge base could be established during site visits, surveys etc. Accessibility to the study area was acceptable for the level of assessment.
  - 1: Limited information is available of the study area and a poor knowledge base could be established during site visits and/or surveys, or no site visit and/or surveys were carried out.
- The information available, understanding of the study area and experience of this type of project by the practitioner:
  - 3: A high level of information and knowledge is available of the project and the visual impact assessor is well experienced in this type of project and level of assessment.
  - 2: A moderate level of information and knowledge is available of the project and/or the visual impact assessor is moderately experienced in this type of project and level of assessment.
  - 1: Limited information and knowledge is available of the project and/or the visual impact assessor has a low experience level in this type of project and level of assessment.

The level of confidence for this assessment is determined to be **9** and indicates that the author's confidence in the accuracy of the findings is high:

- The information available, and understanding of the study area by the practitioner is rated as **3** and
- The information available, understanding and experience of this type of project by the practitioner is rated as **3**

---

<sup>1</sup> Adapted from Oberholzer (2005).

### 1.7. Assumptions, Uncertainties, and Limitations

The following assumptions and limitations have been made in the study:

- The assessment has been based on the requirements of the Western Cape Guidelines.
- Whilst the majority of homesteads and housing areas were visited during the site visit in order to confirm their nature and likely visibility of the development, it was not possible to visit all homesteads and housing areas.
- The description of project components is limited to what has been supplied to the author before the date of completion of this report.
- The Project report uses the concept of 'worst case scenario' to identify issues and rate visual impacts. This scenario assumes that all facilities along with the associated grid infrastructure and sub-stations would be constructed at the same time. At the time of writing there was no evidence to the contrary. This assumption is also based on the nature of visual impact and the fact that receptors would experience all facilities within the same visual envelope from their respective locations or as they travel along adjacent roads.
- The assessment of cumulative impacts is partly based on information provided by the DFFE Website. This source provides detail of all other renewable energy applications and has been used to indicate other possible solar energy sites within 30km of the application site.

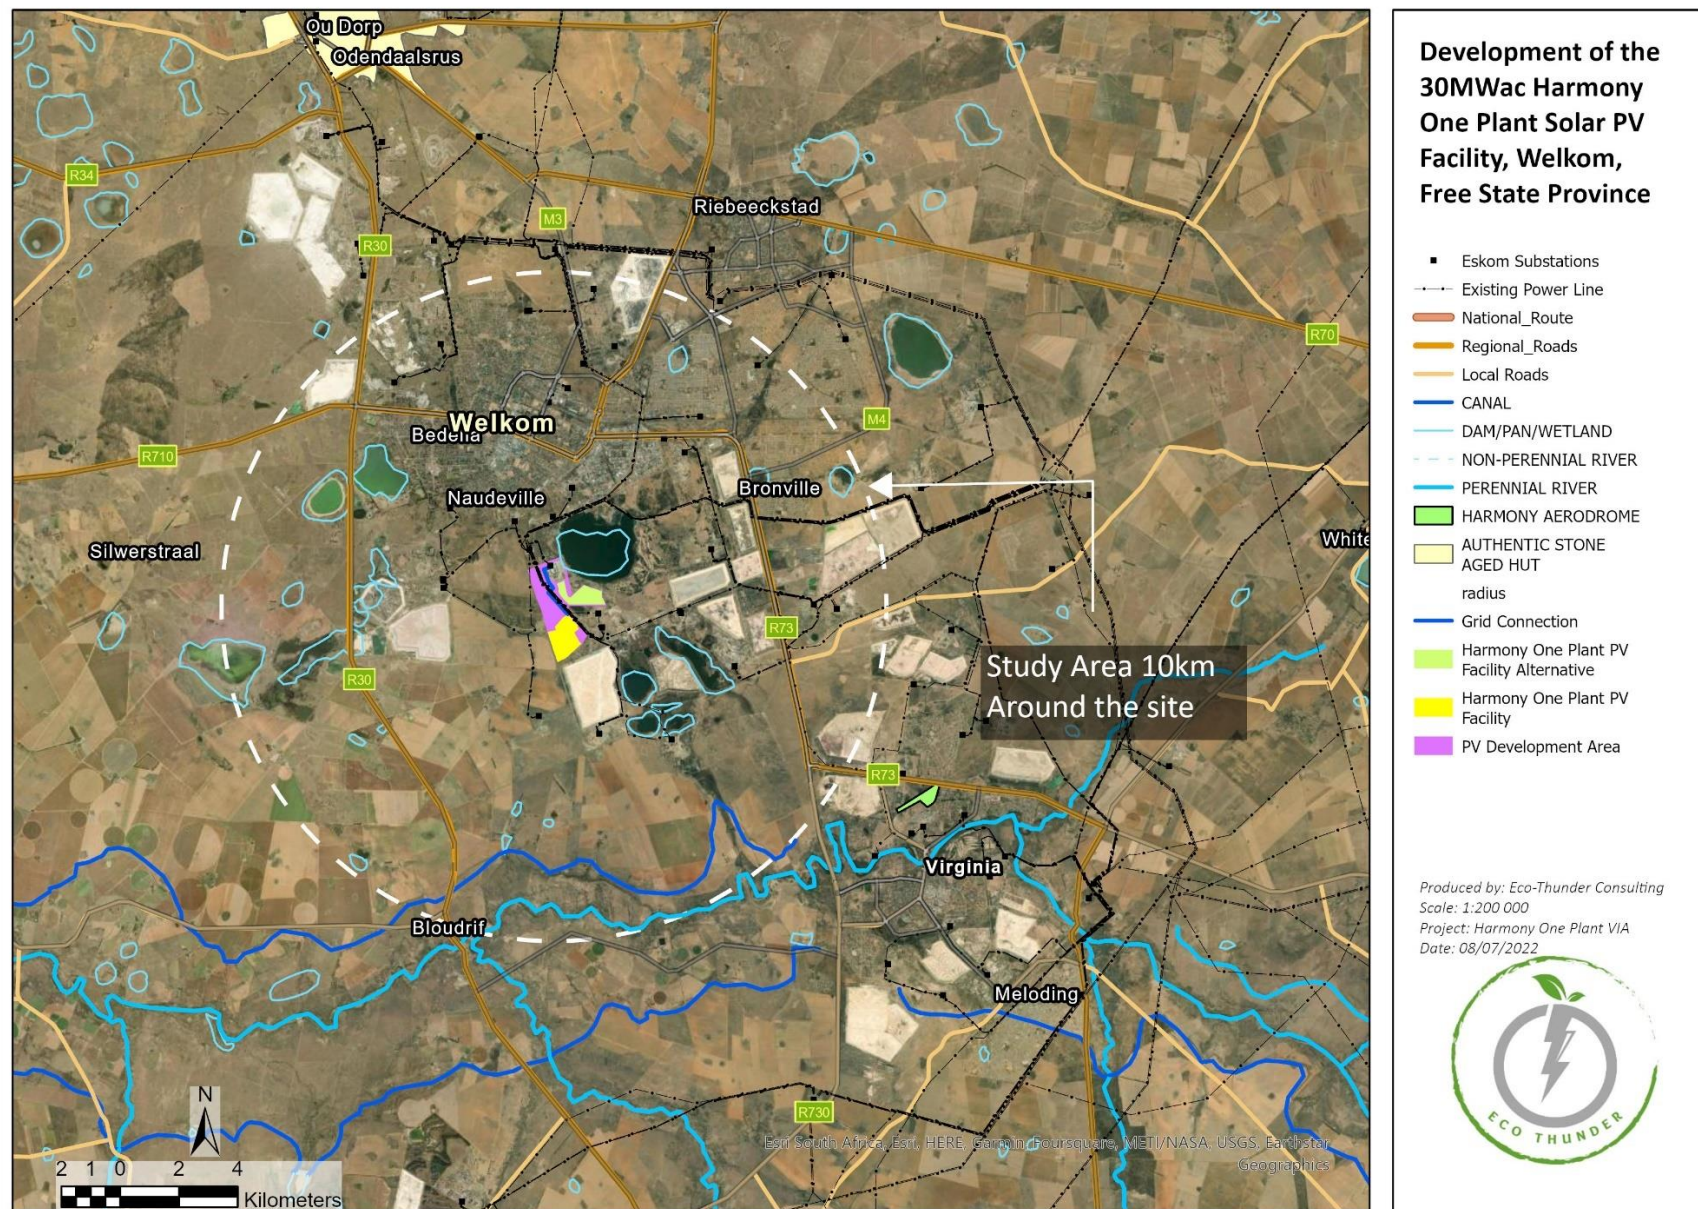


Figure 1: Proposed Development location map.

## 2. LEGAL REQUIREMENTS AND GUIDELINES

---

This report adheres to the following legal requirements and guideline documents.

### 2.1. National Legislation and Guidelines

#### National Environmental Management Act (Act 107 of 1998), EIA Regulations

The specialist report is in accordance with the specification on conducting specialist studies as per Government Gazette (GN) R 982 of the National Environmental Management Act (NEMA) Act 107 of 1998. The mitigation measures as stipulated in the specialist report can be used as part of the Environmental Management Programme (EMPr) and will be in support of the Environmental Impact Assessment (EIA) and Appendix 6 of the EIA Regulations 2014, as amended on 7 April 2017.

Specialist Screening Protocols are also required by the 2014 EIA Regulations. These were taken into consideration for each of the five projects. However, the Landscape (Solar) Theme Sensitivity was referenced as there is no specific 'visual' protocol.

#### Western Cape Department of Environmental Affairs & Development Planning: Guideline for Involving Visual and Aesthetic Specialists in EIA Processes Edition 1 (CSIR, 2005)

Although the guidelines were specifically compiled for the Province of the Western Cape<sup>4</sup>, they provide guidance that is appropriate for any EIA process. The Guideline document also seeks to clarify instances when a visual specialist should get involved in the EIA process.

---

<sup>4</sup> The Western Cape Guidelines are the only official guidelines for visual impact assessment reports in South Africa and can be regarded as best practice throughout the country.

### 3. APPROACH AND METHODOLOGY

#### 3.1. Approach

The effects of the development on a landscape resource and visual amenity are complex since it is determined through a combination of quantitative and qualitative evaluations. When assessing visual impact, the worst-case scenario is considered. Landscape and visual assessments are separate, although linked, procedures. The landscape, its analysis, and the assessment of impacts on the landscape all contribute to the baseline for visual impact assessment studies. The assessment of the potential impact on the landscape is carried out as an impact on an environmental resource, i.e., the physical landscape. Visual impacts, on the other hand, are assessed as one of the interrelated effects on people (i.e., the viewers and the impact of an introduced object into a view or scene).

The study was undertaken using Geographical Information Systems (GIS) software as a tool to generate viewshed analyses and to apply relevant spatial criteria to the proposed infrastructure. A detailed Digital Terrain Model (DTM) for the study area was created from topographical data provided by the Japan Aerospace Exploration Agency (JAXA), Earth Observation Research Centre, in the form of the ALOS Global Digital Surface Model "ALOS World 3D - 30m" (AW3D30) elevation model.

The scope of work for this report includes:

- Identify potentially sensitive visual receptors within the receiving environment.
- Determine the Visual Absorption Capacity of the landscape.
- Determine Visual Distance/Observer Proximity to the facility.
- Determine Viewer Incidence/Viewer Perception.
- Determine Significance of identified impacts.
- Propose mitigation to reduce or alleviate potential adverse visual impacts (to be structured as an EMPr).
- Assess the glint and glare of the PV panels
- Conclude with an Impact Statement of Significance and a project recommendation.

#### Visual Impact Assessment (VIA)

The VIA is determined according to the nature, extent, duration, intensity or magnitude, probability and significance of the potential visual impacts, and will propose management actions and/or monitoring programs and may include recommendations related to the proposed Solar PV Facility.

The visual impact is determined for the highest impact-operating scenario (worst-case scenario) and varying climatic conditions (i.e., different seasons, weather conditions, etc.) are not considered.

The VIA considers potential cumulative visual impacts, or alternatively the potential to concentrate visual exposure/impact within the region.

The determination of the potential visual impacts is undertaken in terms of nature, extent, duration, magnitude, probability and significance of the construction and operation of the proposed infrastructure.

Anticipated issues related to the potential visual impact of the proposed development include the following:

- The visibility of the facility to, and potential visual impact on, observers travelling along the major local roads traversing south and west of the proposed facility.
- The visibility of the facility to, and visual impact on, the larger built-up centres or populated places (the towns of Bronville, Verginia and Meloding) as well as the homesteads (farm residences) located within close proximity of the site.
- Potential cumulative visual impacts (or alternately, consolidation of visual impacts) with specific reference to the existing power line infrastructure adjacent to the proposed development area.
- The potential visual impact of the construction of ancillary infrastructure (i.e., the substation at the facility,

associated power line and access roads) on observers in close proximity of the facility.

- The potential visual impact of operational, safety and security lighting of the facility at night on observers residing in proximity of the facility.
- The visual absorption capacity of natural or planted vegetation (if applicable).
- Potential visual impacts associated with the construction phase.
- The potential to mitigate visual impacts and inform the design process.

It is envisaged that the issues listed above may constitute a visual impact at a local scale.

### 3.1.1. Significance of Visual Impact

A combined quantitative and qualitative methodology, as supplied by the Environmental Practitioner, was used to describe the significance of impacts. Significance of impact is rated as *consequence* of impact multiplied by the *probability* of the impact occurring. Consequence is determined using intensity, spatial scale, and duration criteria.

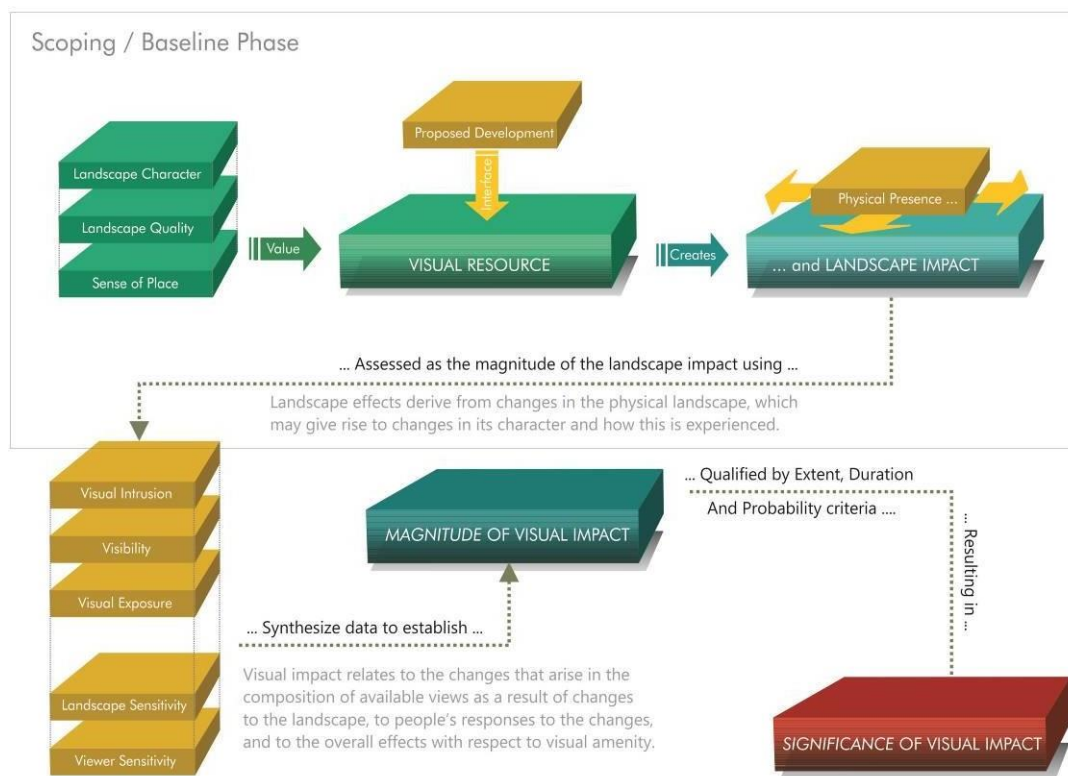


Figure 2: VIA Process

## 3.2. Methodology

The following method was used:

- **Site visit:** A field survey was undertaken so the extent of the receiving environment could be documented and adequately described. The climate conditions were mostly sunny with some cloud cover.
- **Project components:** The physical characteristics of the Project components were described and illustrated based on information supplied by Savannah Environmental.
- **General landscape characterization:** The visual resource (i.e., receiving environment) was mapped using the field survey, Google Earth imagery, and Mucina and Rutherford's (2006) reference book, *The Vegetation of South Africa, Lesotho, and Swaziland*. The description of the landscape focused on the nature of the land rather than the response of a viewer (refer to Appendix A).
- The character of the landscape was described and rated in terms of its aesthetic appeal using recognized contemporary research in perceptual psychology as the basis, and its sensitivity as a landscape receptor.
- The sense of place of the study area was described as to its uniqueness and distinctiveness. The primary informant of these qualities was the spatial form and character of the natural landscape together with the

cultural transformations associated with the historic/current use of the land.

- The creation of viewshed analyses from the proposed Project site in order to determine the visual exposure and the topography's potential to absorb the potential visual impact. The viewshed analyses consider the dimensions of the proposed structures and activities
- The potential impact on the visual environment of the proposed Projects were identified; and rated according to Savannah's significance rating criteria.
- Measures to mitigate the negative impacts of the proposed Project were recommended.



## 4. DESCRIPTION OF THE PROJECT

---

### 4.1. Project Phases and Activities

Activities to be undertaken during each of the phases are described in the following sections:

#### 4.1.1. Site Preparation Phase

This phase would include the clearance of vegetation, installation of perimeter fencing and levelling of the site and preliminary earthworks. Thereafter the Project site will be marked out, a construction camp set up and the access road to the site is constructed. The clearance of vegetation is not anticipated to be site wide and will depend on the detailed layout of the proposed Project.

#### 4.1.2. Construction Phase

The construction phase of the proposed Project will be initiated following the completion of the site preparation activities. The construction phase will include the following:

- Excavation of cable trenches;
- Ramming or drilling of the mounting structure frames;
- Installation of the PV modules onto the frames;
- Installation of measuring equipment;
- Laying of cables between the module rows to the inverter stations;
- Optionally laying of gravel or aggregate from nearby quarries placed in the rows between the PV panel array for enhanced reflection onto the panels, assisting in vegetation control and drainage;
- Construction of foundations for the inverter stations and installation of the inverters;
- Construction of operations and maintenance buildings;
- Undertaking of rehabilitation on cleared areas where required;
- Testing and commissioning; and
- Removal of equipment and disassembly of construction camp.

The construction phase of the proposed Project will be for a period of up to 12 – 18 months.

#### 4.1.3. Operational Phase

The proposed Project will be operated on a 24 hour, 7 days a week basis. The operation phase of the proposed Project will comprise the following activities:

- Regular cleaning of the PV modules by trained personnel;
- Vegetation management under and around the PV modules and within the transmission line servitude to allow maintenance and operation at full capacity;
- Office management and maintenance of operations and maintenance of buildings;
- Supervision of the solar PV facility operations; and
- Site security monitoring.

#### 4.1.4. Decommissioning Phase

The proposed Project is expected to operate for at least 25 years. Once the solar PV facility reaches the end of its life, the facility and the grid connection infrastructure will be decommissioned or continue to operate following the issuance of a new Power Purchase Agreement (PPA) by Eskom. If decommissioned, all components will be removed, and the site rehabilitated. Where possible all materials will be recycled, otherwise they will be disposed of in accordance with local regulations and international best practice.

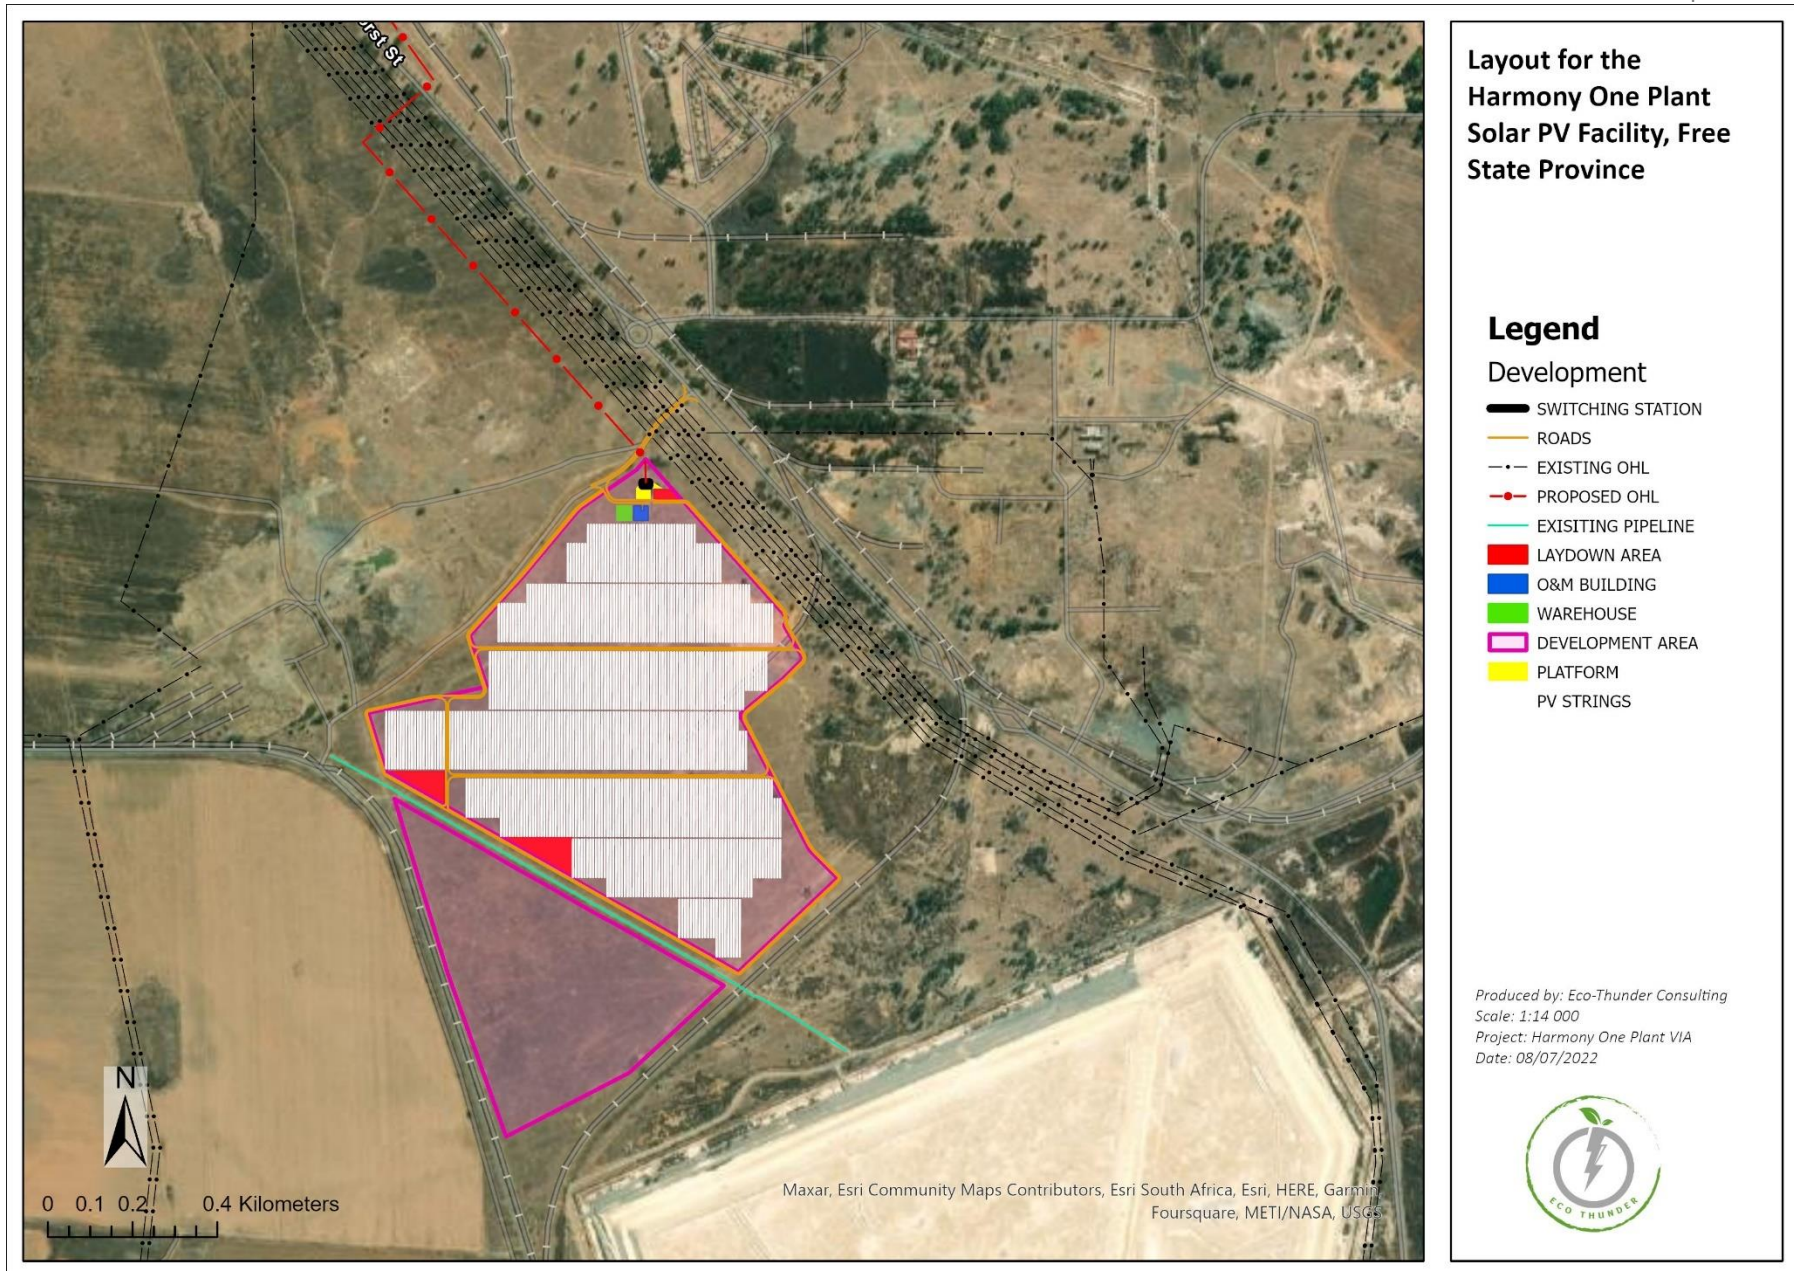


Figure 3: Facility layout map

## 5. ENVIRONMENTAL SETTING

---

### 5.1. Landscape Character

The Harmony One Plant is located near Welkom, 250km away from Johannesburg. The plant accounts for a significant portion of Harmony's gold production. The plant treats ore from the Bambanani, Masimong, Phakisa, and Tshepong shafts.

The site is located south west of the Witpan dam, south of the Harmony One Gold Plant operations, approximately ~14km north west of the town of Virginia within the Matjhabeng Local Municipality and within the Lejweleputswa District Municipality, Free State Province.

The topography of the study area is described as slightly undulating plains with an even (flat) slope and a gradual drop (approximately 90m) from the south to the Vaal River to the north-west.

A 10km radius from the project area was evaluated. The surrounding area comprises mostly of agricultural land, mining activities and to the north industrial and residential activities from the town of Welkom. The area is located within a typical Highveld climate with moderately wet, warm summers and cold dry winters.

The proposed development site itself is located at an average elevation of 1 470m above sea level and has an even slope to the north. The majority of the development area is characterized by a slope percentage between 0 and 5%, with some smaller patches within the project area characterized by a slope percentage up to 30%. The flat topography of the project area is considered beneficial in terms of the construction activities that will be required. Based on the suitable and preferable topography, no location alternatives are considered for the development.

The area surrounding the development footprint can be classified as a mix between agricultural activities such as grazing, and crop production and activities associated with mining. Towards the southern, western and eastern boundaries of the site, preexisting mining infrastructure and buildings are clearly visible. Additionally, to the northern borders of the proposed site a few residential areas are located. There is no cultivated agricultural land in the project site or directly adjacent to it which could be impacted upon by the proposed development. The proposed development is compatible with the surrounding land uses and does not present a conflicting land use.

The natural vegetation in the study area is dominated by two types of grasslands: the Vaal-Vet Sandy Grassland and the Highveld Alluvial Grassland. Much of these grasslands have been degraded throughout the region. Most of it has been transformed for cultivation and the rest under strong grazing pressure from cattle and sheep.

### 5.2. Land Use

The most prominent (and visible) land use within the region is the mining activities, mining infrastructure and mine dumps. Interspersed with these mining activities are agricultural land uses, ranging from irrigated agriculture to the south-west and broader south and western area. Agricultural activities include the production of maize, wheat, and sunflower crops, as well as cattle farming. The farmers working these fields predominantly reside at homesteads or farm residences scattered throughout the study area.

Towns or residential areas primarily associated with the mines in the region include:

- Welkom
- Bronville
- Naudeville
- Bedelia
- Silwerstraat
- Bloudrif
- Virginia
- Meloding
- Whites

- Riebeekstad
- Odendaalsrus

The N1 national road provides access to the region and is the main connecting route in between the Gauteng Province (Pretoria) and Welkom. The proposed PV facility sites is accessible from both the M3 and the R730 via secondary roads.

Besides the large number of mines and mining infrastructure within the study area, there are numerous power lines and substations, predominantly associated with the mines. The proposed Harmony One Plant PV facility is located approximately 11.4 km north-west of the Harmony Airfield.

There is a formally protected or conservation areas just outside of the 10km range to the PV facility and approximately 11km south-east from the Openheimer Gold course (2km from the eastern border of the alternative layout facility).

### 5.3. Visual exposure and area of study

The result of the viewshed analyses for the proposed facility is shown on Figure 18. The viewshed analyses were undertaken from a number of vantage points within the proposed development area at an offset of 5m above average ground level. This was done in order to determine the general visual exposure (visibility) of the area under investigation, simulating the maximum height of the proposed structures (PV panels) associated with the facility.

**Visual exposure as follow:**

#### 0 – 1 KM (**Very High sensitivity area**)

The main project components are anticipated to fall within this area, the anticipated visual exposure of the facility is contained to a core area on the site itself and within a 1 km radius thereof. There are no residences within this zone, although diggers in falls just outside of the exposure zone. a section of the unnamed road which runs parallel to this site falls within the observation zone. Observers travelling along this road will be exposed to the project infrastructure.

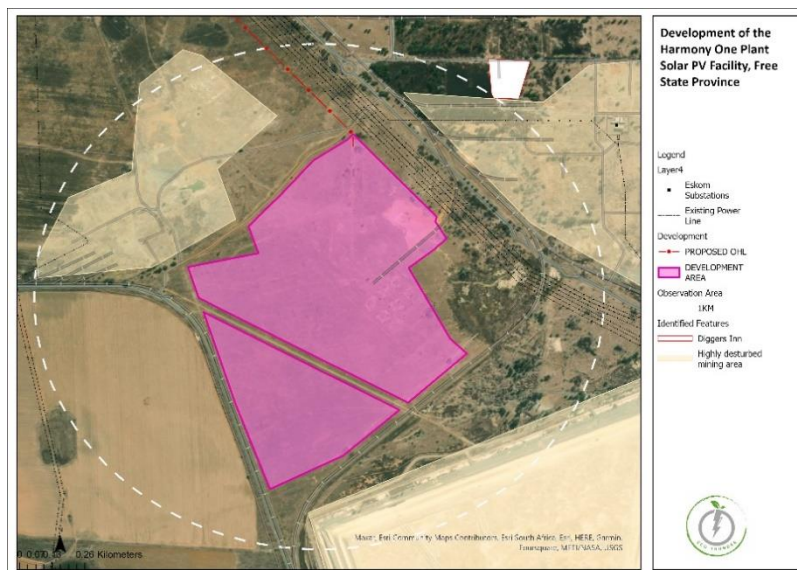


Figure 4: A- 1KM Visual exposure area

#### 1 – 3 KM (**High Sensitivity**)

Potential exposure in the short to medium distance (i.e., between 1 and 3km), is largely contained to the eastern half of the proposed site as seen in figure 18, whereas the western portion largely more vacant land with fewer visual receptors. This zone contains the above-mentioned Diggers Inn Venue Hire, which would be considered one of the higher sensitivities in terms of the visual receptors, however there are however a large number of trees between the proposed development and Diggers inn (ass seen in figure 13) which is anticipated to largely reduce the visual impact on the facility.

Additionally, more sections of the abovementioned road are found within this observational area. It is expected that the PV facility would be clearly visible from these sections of road. Another Key visual receptor identified is the Mwelase Lifestyle farm, this establishment will be visually impacted by the development, although there is some disturbed area between the PV facility and the Lifestyle establishment, the topography is relatively flat with little to no tall vegetation.

It is therefore recommended that this visual impact is mitigated from very high by use of things such as trees etc., as discussed in section 7.

Additionally, some key mining establishments are within this zone of observation, it is anticipated to have no negative impact on their landscape character as Harmony is a mining company who, as can be seen to the south of the development area (in brown) have extensively transformed the landscape.

The Brand Mashie Golf club and part of the Oppenheimer Golf Club as well as the Witpan dam fall within this zone of investigation, these areas are largely associated with recreational activities, there are also some homesteads which lay around the golfclub and dam edges, The area has a large presence of vegetation around these recreational activities which will mitigate and reduce the visual exposure to the Solar PV.

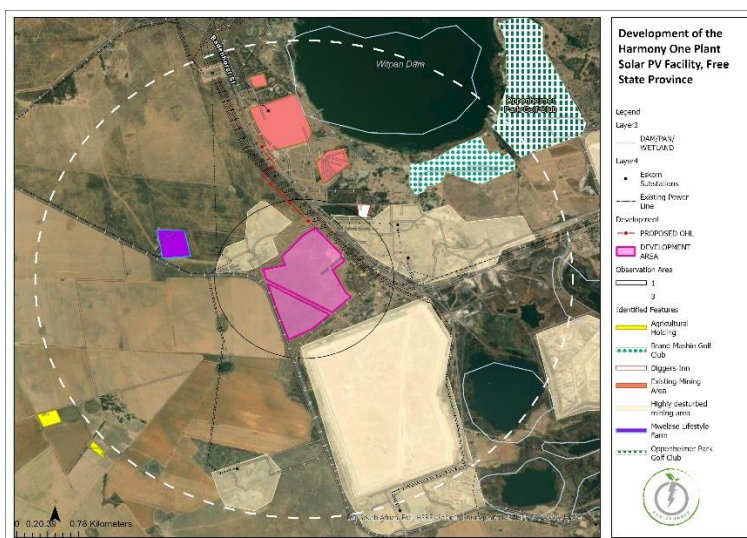


Figure 5: B- 3KM Visual exposure area

**3 - 6KM (Moderate Sensitivity)**

Within this observation the visual exposure becomes very scattered and interrupted due to the undulating nature of the topography as well as the surrounding features (mine heaps, buildings, roads, vegetation, etc.). Some agricultural holdings exist to the West of the proposed development. The majority of the eastern area is comprised of existing mine heaps or infrastructure which severely influences the characteristics of the landscape.

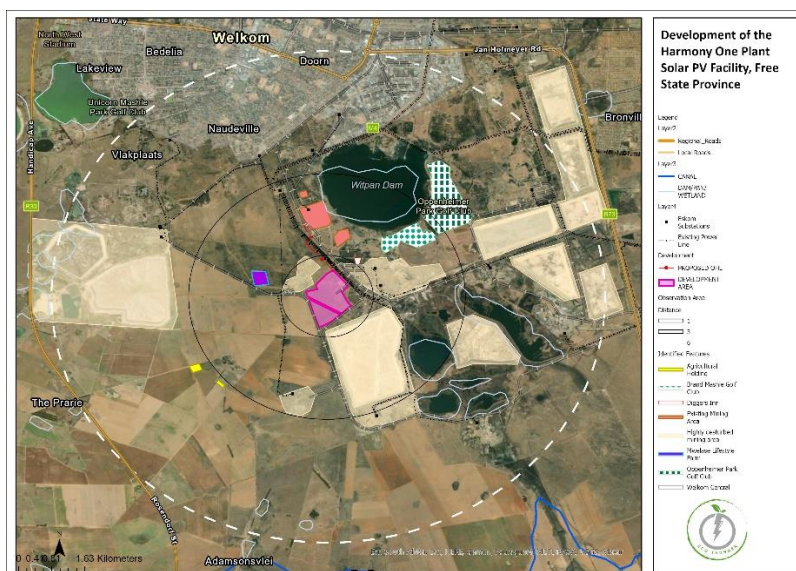


Figure 6: C- 6KM Visual exposure area

**6 – 10 KM (Very Low Sensitivity)**

At distances exceeding 6km the intensity of visual exposure is expected to be very low and highly unlikely due to the distance between the object (development) and the observer. The only point of interest which has been accounted for in this report within this zone is the Witbank Airfield.

It is clear that the relatively constrained dimensions of the PV facility would amount to a fairly limited area of potential visual exposure. The visual exposure would largely be contained within a 6-8km radius of the proposed development site, with the predominant exposure to the east of the development.



Figure 7: Road View of proposed PV Facility



Figure 8: Southern View of Proposed PV Facility



Figure 9: Western View of PV facility



Figure 10: Gridline and Proposed PV Facility



Figure 11: Gridline Road Crossing



Figure 12: R30 Road View of development





Figure 13: View of Diggers in and PV facility



Figure 14: View of Proposed Alternative



Figure 15: View of Preferred PV Placement and Alternative Placement



Figure 16: View of alternative from unknown road

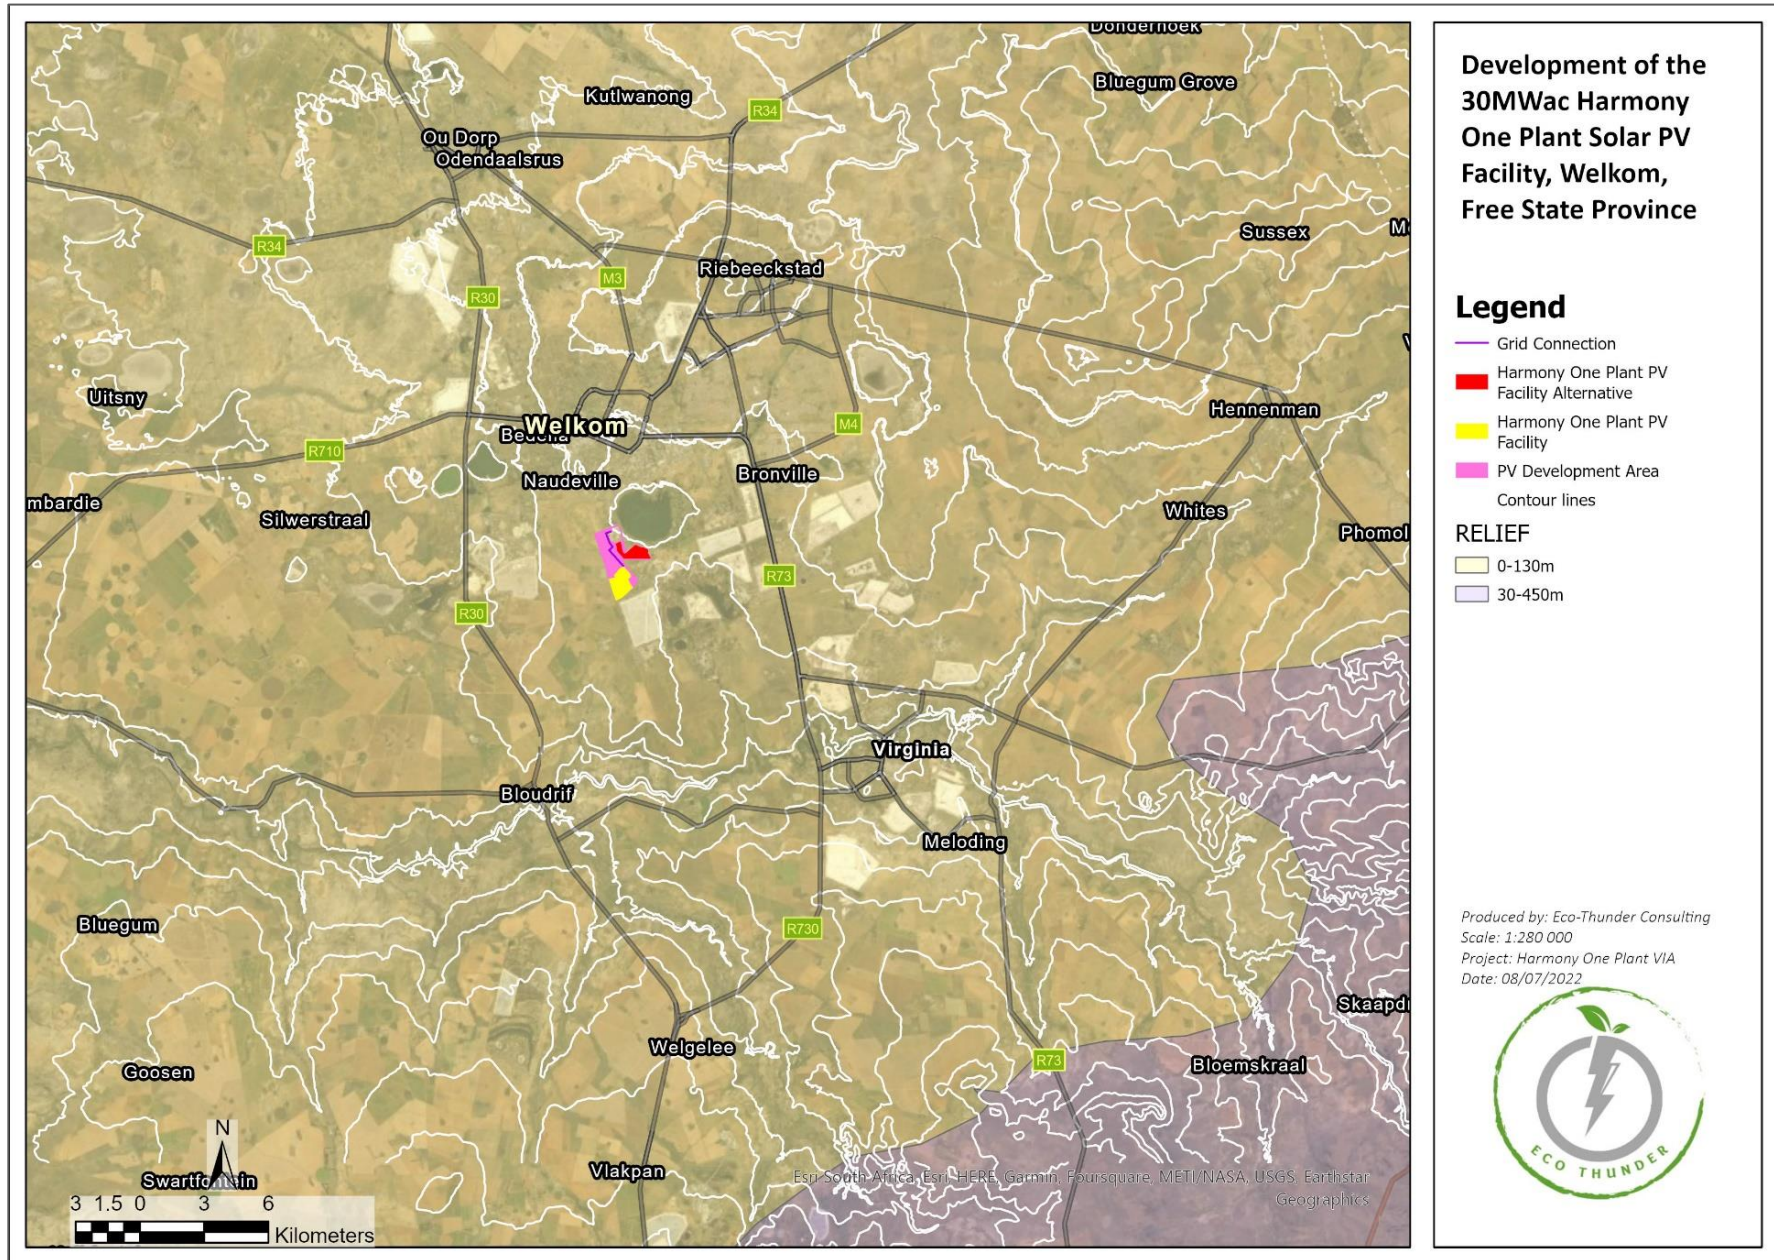


Figure 17: Site Topography and Slope

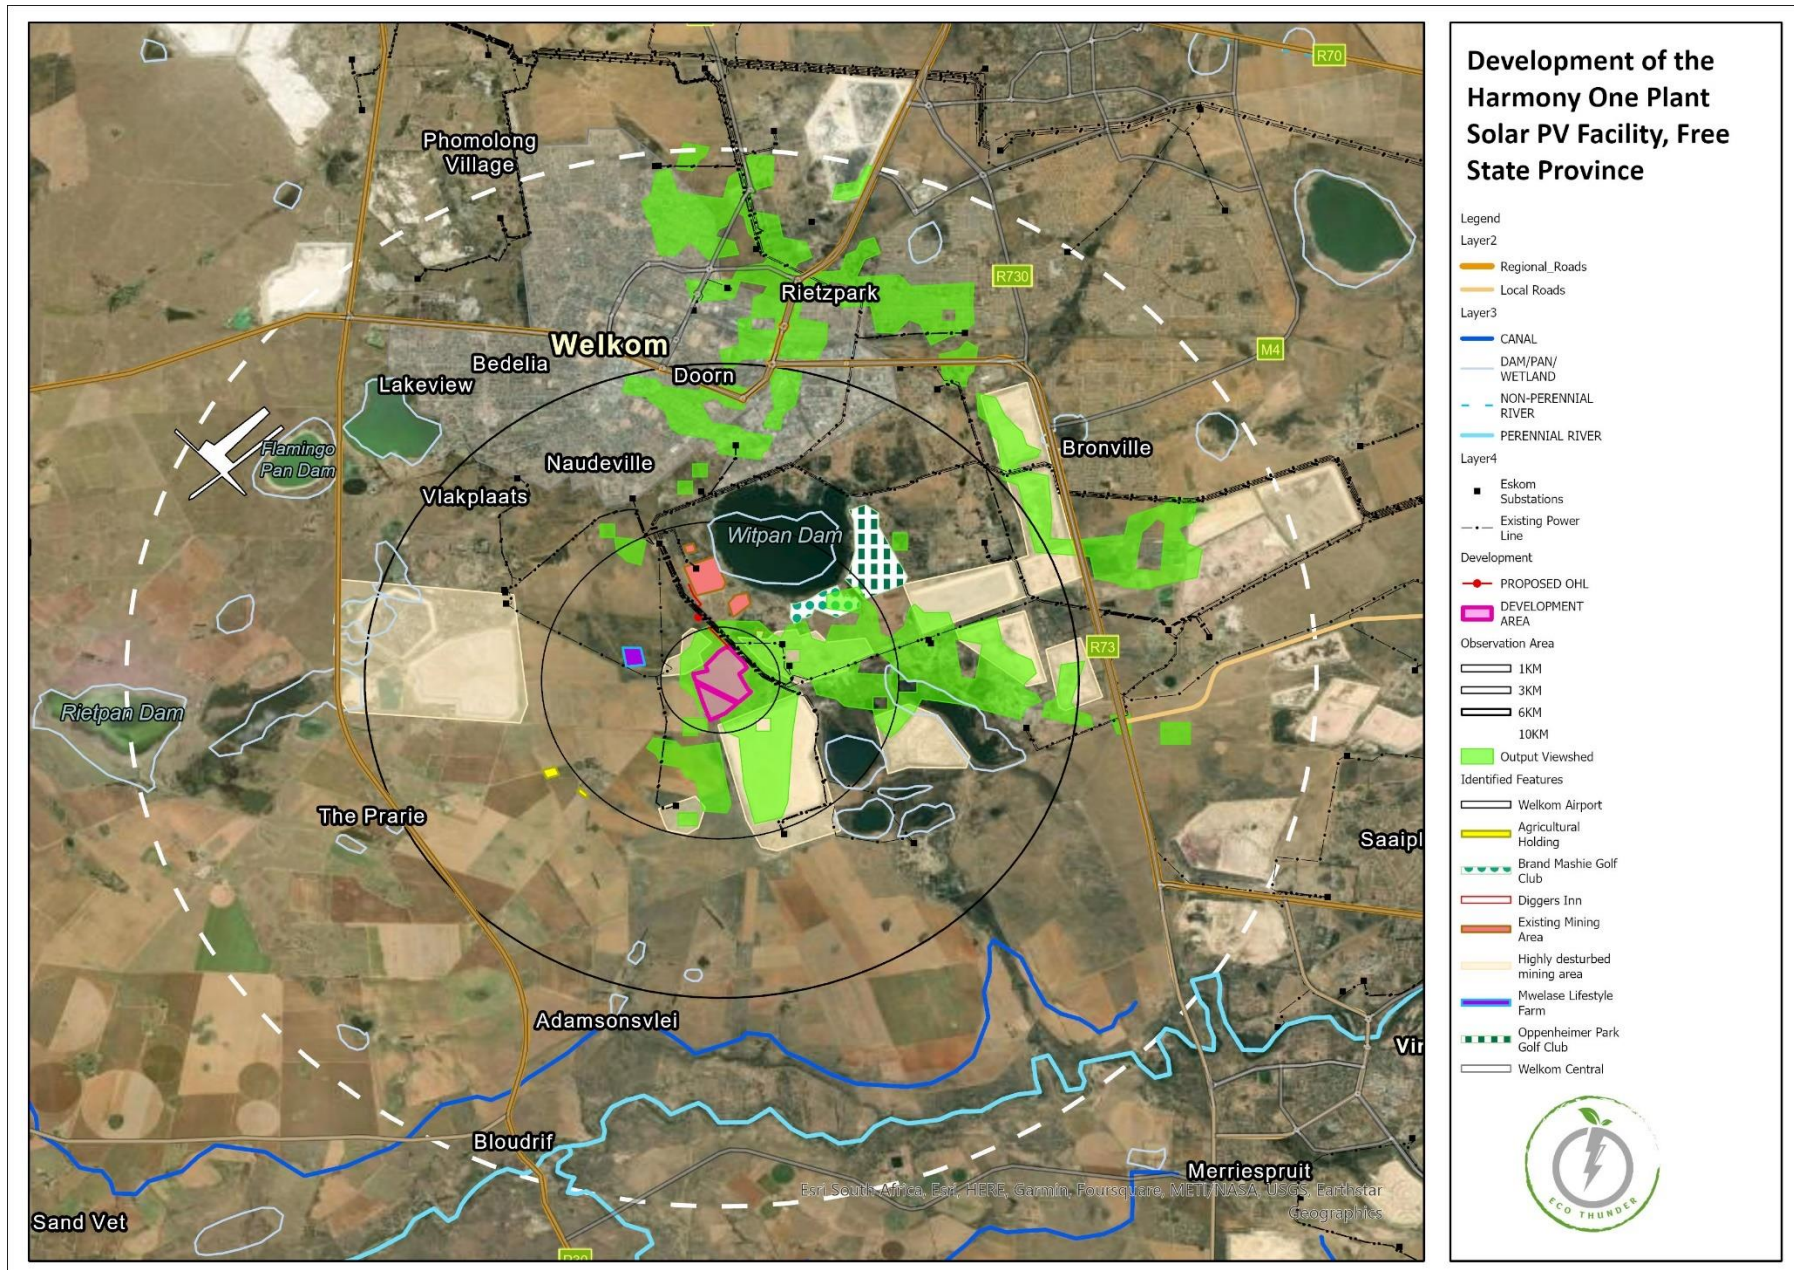


Figure 18: Site Viewshed High definition

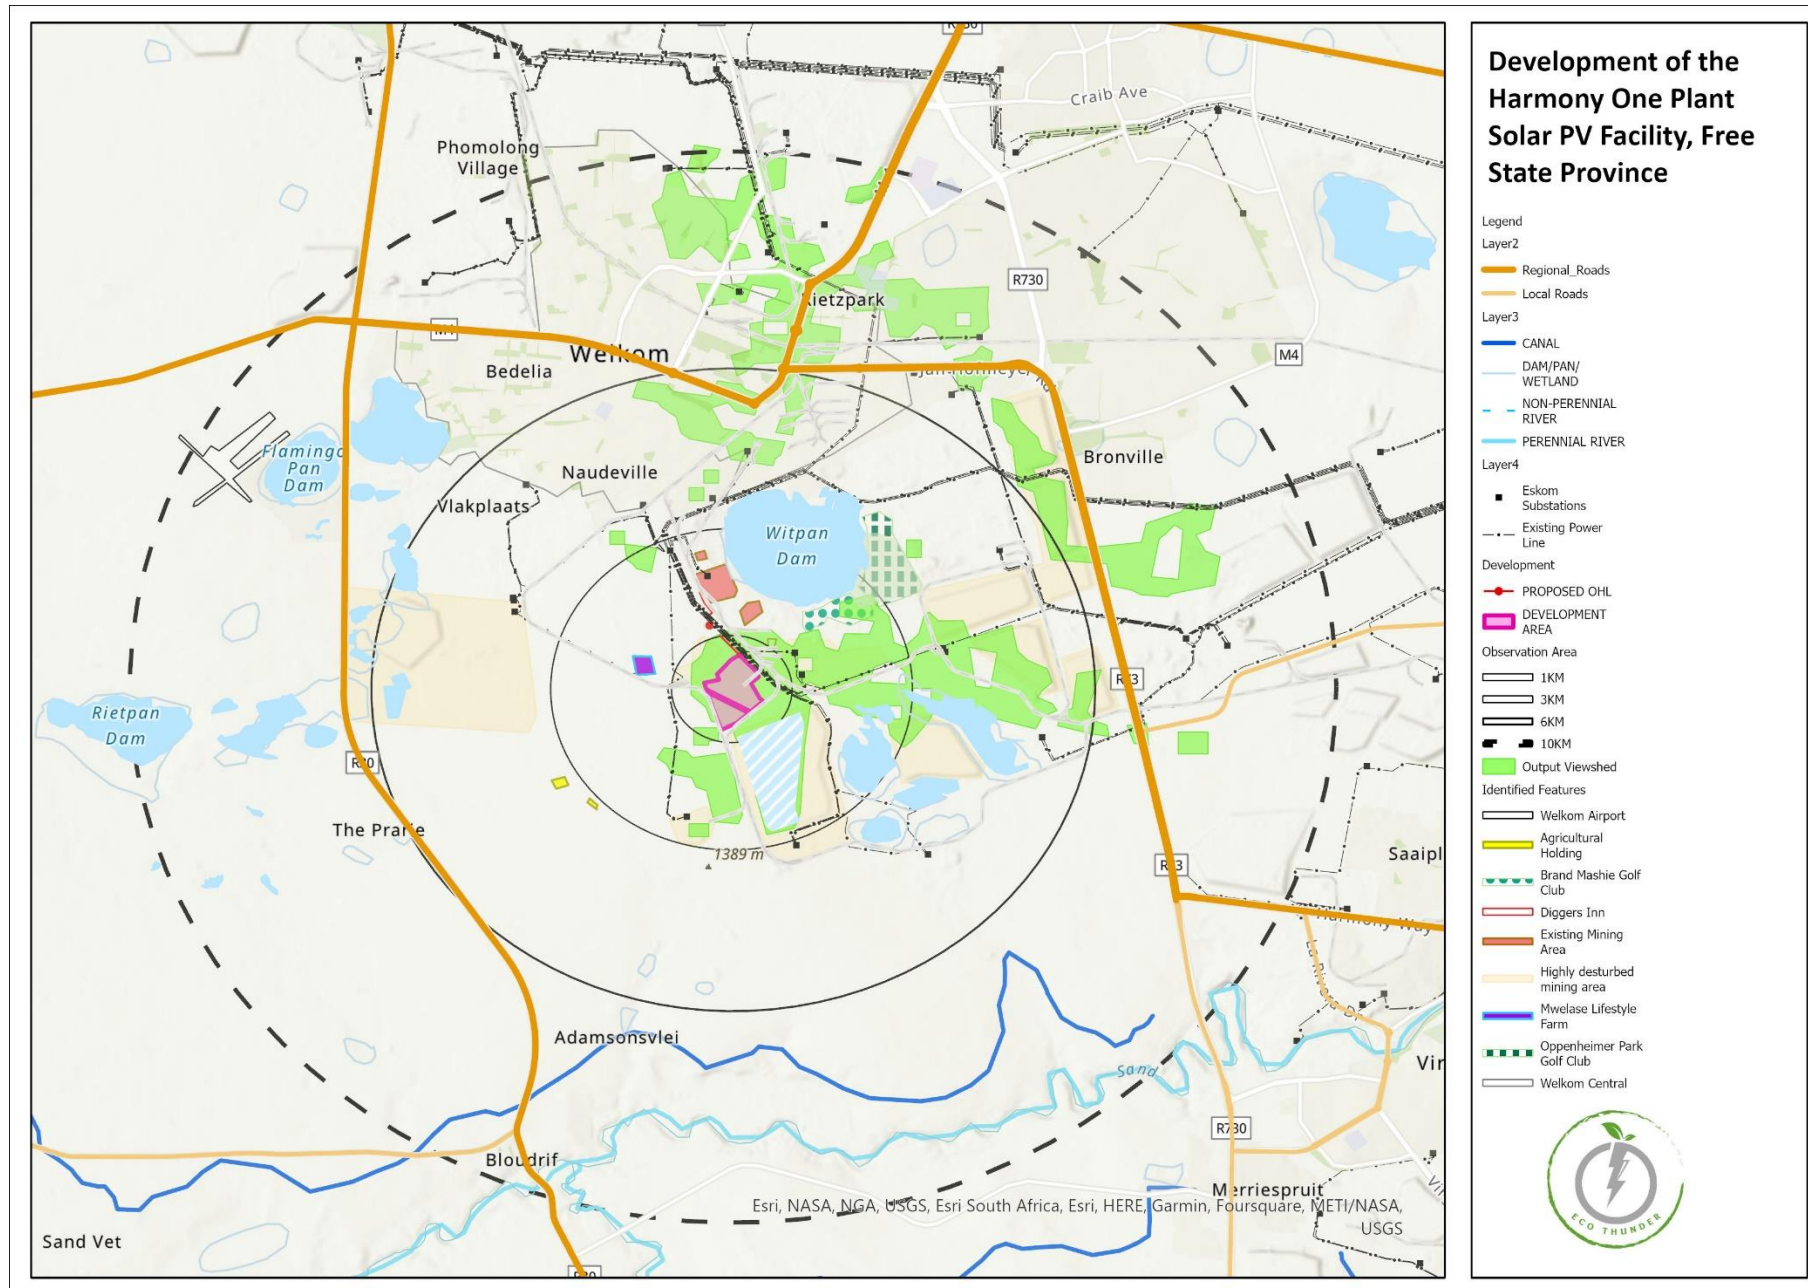


Figure 19: Viewshed Analysis topographical map

## 6. VISUAL RESOURCE

### 6.1. Visual Resource Value, Scenic Quality and Landscape Sensitivity

The value of the visual resource and its associated scenic quality are primarily derived from the combination of land-uses described above overlaid onto an open rolling topography. These are the primary features that give the area its general characteristics and a sense of place.

The sensitivity of the study area’s landscape can be defined as high, medium, or low (as indicated below and in Figure 5), and is dependent on the Character – does it contribute to the area’s sense of place and distinctiveness; Quality – in what condition is the existing landscape; Value – is the landscape valued by people, local community, visitors, and is the landscape recognised, locally, regionally, or nationally; and Capacity – what scope is there for change (either negative or positive) in the existing landscape character?

When the criteria are considered and understood within the context of the sub-region, a visual resource value of *low* (power utility and mining areas), *moderate* (drainage lines, open farmland, and urban recreation development), and *high* (bush-covered low hills), is allocated.

Table 1: Value of the Visual Resource  
(After: LiEMA 2013)

High	Moderate	Low
<p>This landscape type is considered to have a <i>high</i> value because it is a: Distinct landscape that exhibits an extremely positive character with valued features that combine to give the experience of unity, richness, and harmony. It is a landscape that may be of particular importance to conserve, and which has a strong sense of place.</p> <p>Sensitivity: It is sensitive to change in general and will be detrimentally affected if change is inappropriately dealt with.</p>	<p>This landscape type is considered to have a <i>moderate</i> value because it is a: Common landscape that exhibits some positive character, but which has evidence of alteration / degradation / erosion of features resulting in areas of more mixed character.</p> <p>Sensitivity: It is potentially sensitive to change in general and change may be detrimental if inappropriately dealt with.</p>	<p>This landscape type is considered to have a <i>low</i> value because it is a: Minimal landscape generally negative in character with few, if any, valued features.</p> <p>Sensitivity: It is not sensitive to change in general and change may be detrimental if inappropriately dealt with.</p>

The Project sites occur within a landscape type rated moderate, with nearby power infrastructure and mines rated low. Generally, because most of the areas surrounding the site are rated moderate to moderately high in scenic value, the area is potentially sensitive to change if the change is inappropriately dealt with.

## 6.2. Sense of Place

According to Lynch (1992), a sense of place is the extent to which a person can recognize or recall a place as being distinct from other places - as having a vivid, unique, or at least particular character of its own. The sense of place for the study area derives from a combination of the local landscape types described above, their relative 'intactness', and their impact on the senses.

The sub-region is recognised as a major agricultural area. The combination of the mining land and farming activities, along with the distinctiveness of the rolling open land, gives the study area a mixed sense of place. One, in which new development needs to be carefully managed such that the combination of development activities associated with the Project and the landscape are not at odds with each other.

The Zone of Visibility reflects the visibility rating in term of proximity of viewers to the power line. The distances were calculated using satellite imagery, but the impact magnitude was determined by using previous experiences, assumptions and opinions, it is therefore theoretical. Figure 16 will give a clearer understanding of areas susceptible to line of sight which means, an imaginary line from the eye to a perceived object, in this case the power line and PV facility. The assessment did not take into account existing screening such as buildings, mining heaps and vegetation cover but rather the terrain's above mean sea level (AMSL) which indicates line of sight. The receptors which were identified were subject to an impact assessment, the findings of therefore largely impacted by the onsite findings which impacts the direct line of sight. Aesthetic issues are subjective, and some people find solar farms and power line infrastructure pleasant and optimistic changes whilst others may find it visually invasive; it is mostly perceived as symbols of energy independence; and local prosperity.

## 6.3. Aerospace

Any communications structure, building or other structure, whether temporary or permanent, which has the potential to endanger aviation in navigable airspace, or has the potential to interfere with the operation of navigation or surveillance systems or Instrument Landing Systems, including meteorological systems for aeronautical purposes, is considered an obstacle and shall be submitted to the Commissioner for Civil Aviation for evaluation (refer to SA-CAR Part 139.01.33).

To guarantee that the airspace stays operational, navigable airspace must be maintained, and any obstacle that may interfere with this must be considered. The main reason is to control or prevent structures that could jeopardize aviation safety, particularly near an airfield. It seems to reason that knowing where the impediments are will improve aviation safety. The South African Civil Aviation Authority (SACAA) should therefore be engaged with as part of the EIA Process.

It is noted that the proposed development is located approximately 9km south-east of the Welkom airfield (See Figure 20: Aerospace location relative to development).

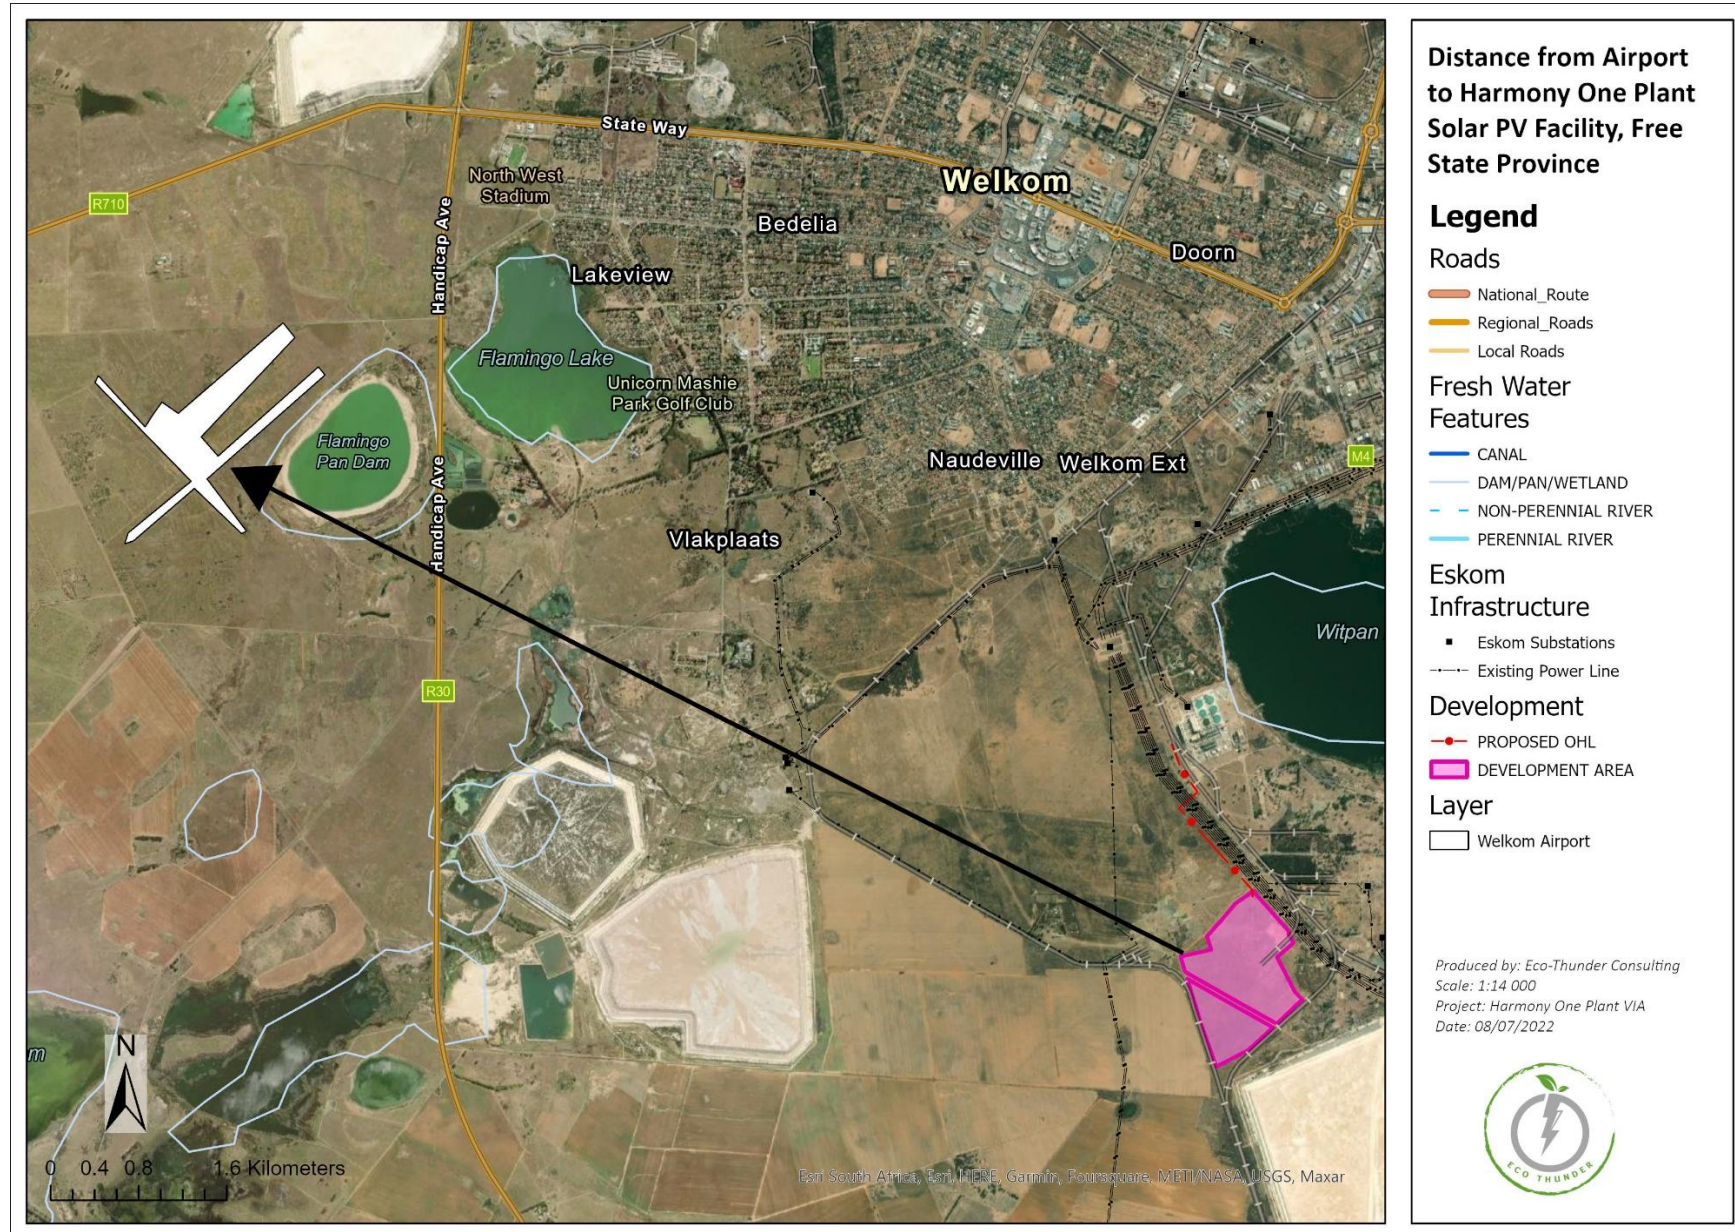


Figure 20: Aerospace relative to the development



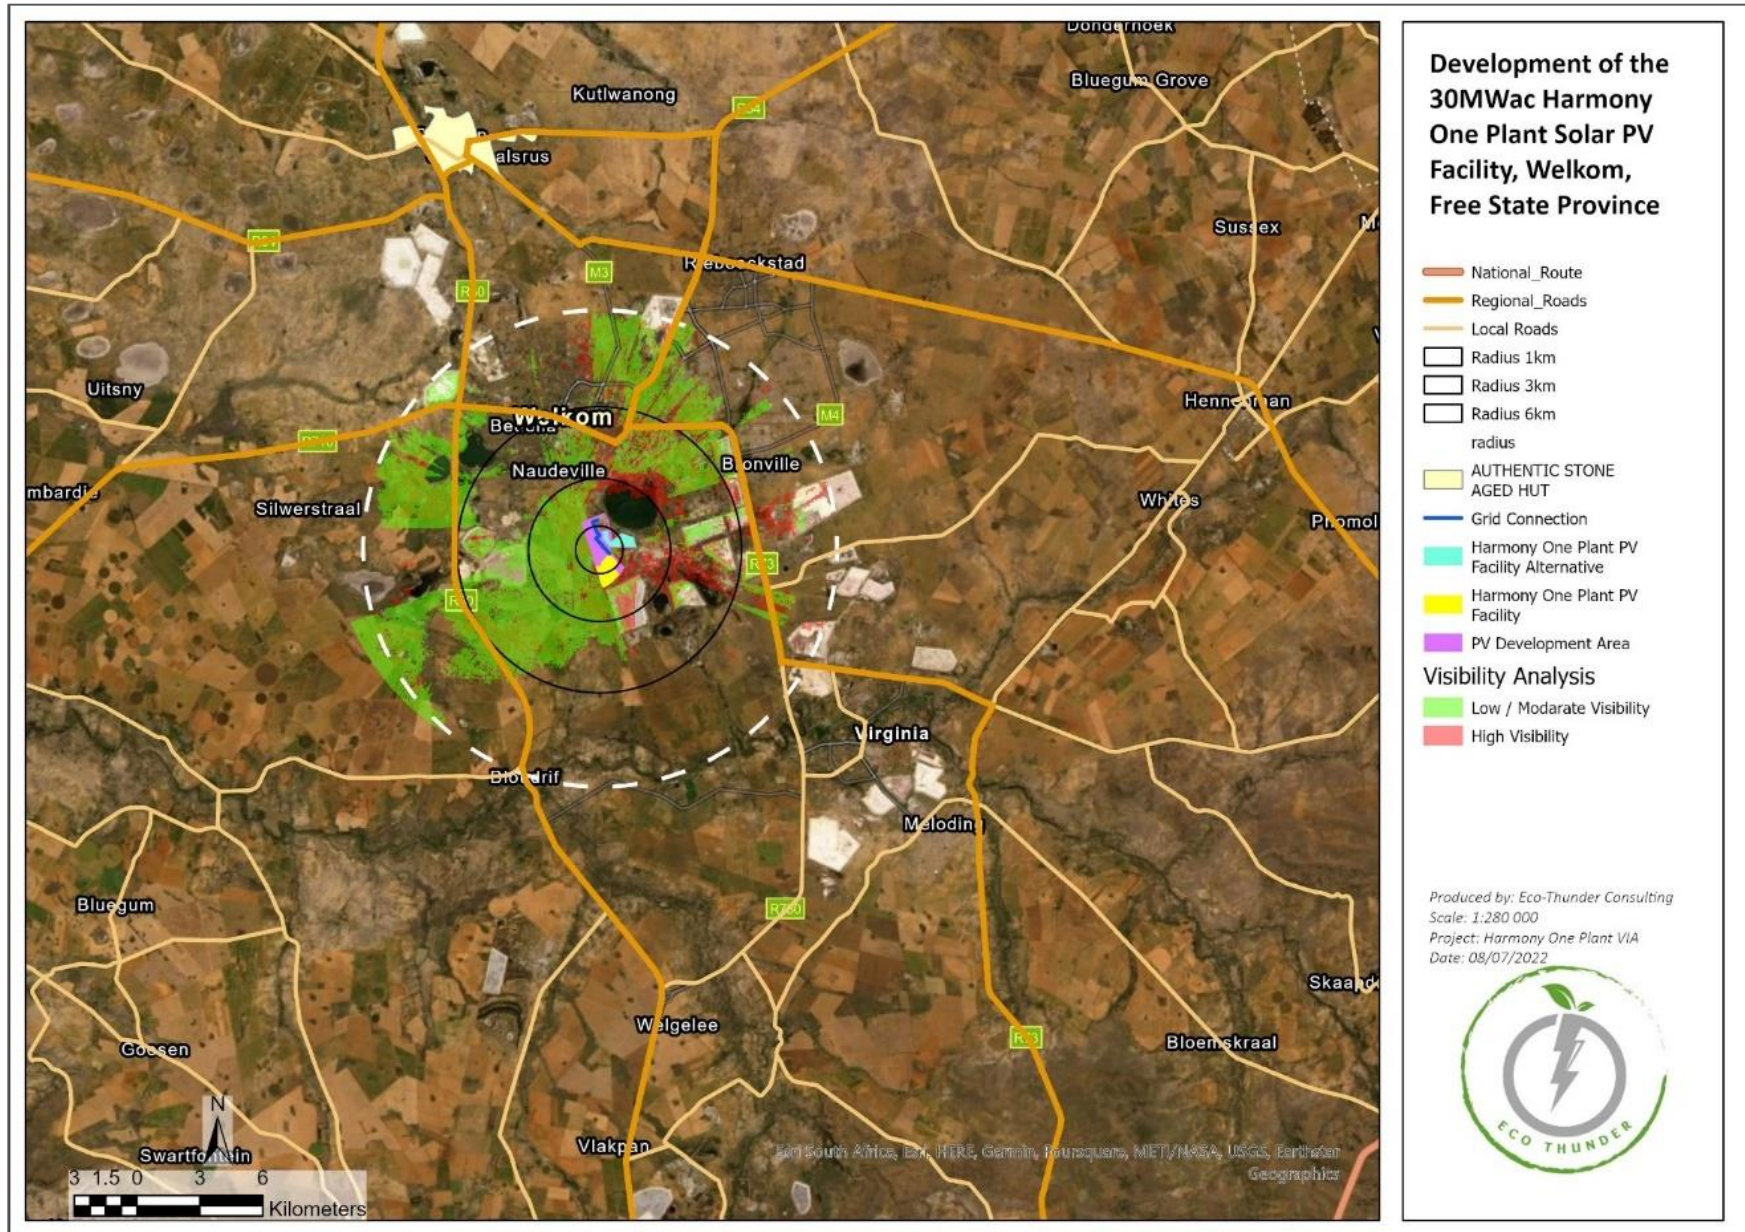


Figure 21: Viewshed analysis

## 7. VISUAL IMPACT ASSESSMENT

---

The *intensity* of impact is assessed through a synthesis of visual intrusion, visibility, visual exposure, and viewer sensitivity criteria. Once the intensity of impact has been established this value is further qualified with spatial, duration and probability criteria to determine the *significance* of the visual impact.

In assessing the intensity of visual impact, the study assumes the worst-case scenario, i.e., that the facility (PV and Grid Connections) will be built at the same time. Figure 3 shows that the facilities and grid connection infrastructure are located immediately adjacent to each other, resulting in all Project components being observed within the same visual envelope (to a greater or lesser degree) from the sensitive viewing areas.

It is anticipated that visual impacts will result from the activities and infrastructure in all Project phases i.e., construction, operational, and closure. Activities associated with the Project will be visible, to varying degrees from varying distances around the Project site. During the establishment phase, the Project's visibility will be influenced due to the preparatory activities, primarily earthworks and infrastructure establishment. During the operation phase, the visibility of the Project will be the result of the established PV arrays, the substation, and associated powerline infrastructure (grid connections).

Typical issues associated with solar PV Projects are:

- Who will be able to see the new development?
- What will it look like, and will it contrast with the receiving environment?
- Will the development affect sensitive views in the area and if so, how?
- What will be the impact of the development during the day and at night?
- What will the cumulative impact be if any?

These potential impacts will be considered and rated in the following sections.

### 7.1. VIA Rating Methodology

This section will attempt to quantify the potential visual impacts in their respective geographical locations and in terms of the identified issues related to the visual impact.

The methodology for the assessment of potential visual impacts states the **nature** of the potential visual impact (e.g., the visual impact on users of major roads in the vicinity of the proposed power line alignment) and includes a table quantifying the potential visual impact according to the following criteria:

- **Extent** - long distance (very low = 1), medium to longer distance (low = 2), short distance (medium = 3) and very short distance (high = 4)<sup>2</sup>.
- **Duration** - very short (0 – 1yrs. = 1), short (2 – 5yrs. = 2), medium (5 – 15yrs. = 3), long (>15 yrs. = 4), and permanent (= 5).
- **Magnitude** - None (= 0), minor (= 2), low (= 4), medium / moderate (= 6), high (= 8) and very high (= 10)<sup>3</sup>.
- **Probability** – very improbable (= 1), improbable (= 2), probable (= 3), highly probable (= 4) and definite (= 5).
- **Status** (positive, negative or neutral).
- **Reversibility** - reversible (= 1), recoverable (= 3) and irreversible (= 5).
- **Significance** - low, medium or high.

---

<sup>2</sup> Long distance = > 3km. Medium to longer distance = 1.5 – 3km. Short distance = 0.5 – 1.5km. Very short distance = < 0.5km (refer to Section 6.3. Visual distance / observer proximity to the grid connection infrastructure).

<sup>3</sup> This value is read from the visual impact index. Where more than one value is applicable, the higher of these will be used as a worst case scenario.

The *significance* of the potential visual impact is equal to the *consequence* multiplied by the *probability* of the impact occurring, where the consequence is determined by the sum of the individual scores for magnitude, duration and extent (i.e.,  $significance = consequence (magnitude + duration + extent) \times probability$ ).

The significance weighting for each potential visual impact (as calculated above) is as follows:

- <30 points: Low (where the impact would not have a direct influence on the decision to develop in the area)
- 31-60 points: Medium / moderate (where the impact could influence the decision to develop in the area)
- >60: High (where the impact must have an influence on the decision to develop in the area)

## 7.2. Visual Impact Assessment

The combined results of the visual exposure, viewer perception and visual distance of the proposed solar PV facility are used to determine the impacts to the surrounding landscape. Typically, a location with close proximity to the proposed facility, a high viewer incidence, a predominantly negative perception and high visual exposure would have a high value on the index, thereby signifying a high visual impact.

The identification and assessment of environmental impacts is a multi-faceted process, using a combination of quantitative and qualitative descriptions and evaluations. It involves applying scientific measurements and professional judgement to determine the significance of environmental impacts associated with the proposed project. The process involves consideration of, inter alia: the purpose and need for the Project; views and concerns of interested and affected parties (I&APs); social and political norms, and the public’s interest.

The following tables summarise the consequence and significance of the visual impact of the Project. These results are based on worst-case scenario when the impacts of all aspects of the Project are taken together (PV facilities, grid connection and battery systems). Consequence of impact is a function of intensity, duration, and spatial extent (SLR 2020). Intensity of impact is taken from the worst-case situation. These facilities are rated together, from a visual impact perspective, as the one would not exist without the other and they must be understood as the collective / cumulative.

The Nature of the Visual Impact of the PV facility is rated Negative. The proposed PV landscape has the potential to generate strong levels of color, form, texture and line contrast to the existing rural landscape. The following visual impacts could take place during the lifetime of the proposed PV facility:

### Construction Phase:

- Impact on landscape character and sense of place due to the removal of vegetation and the construction of the PV structures and associated infrastructure.
- Impact on Roads
- Impact on Businesses, homes, or facilities in close proximity
- Visual impact from vegetation removal, dust generation and litter

#### 7.2.1. Construction Phase

*Table 2: Impact on landscape character and sense of place due to the removal of vegetation and the construction of the PV structures and associated infrastructure.*

The proposed Project may impact on the existing landscape and visual character of the region and Sense of Place associated with the proposed development and its immediate surroundings. This impact is however regarded as being very low as the character of the landscape in the region of the development is currently severely transformed by mining activity. There are currently various power lines within the proposed route corridor. The overall character of the landscape is therefore at low risk to be altered by the proposed activities.

Solar Plants and associated powerlines and substations are generally experienced as having a negative impact on landscape aesthetics as it will introduce an industrial aspect to a landscape. This area is however dominated by mining activities and

has industrial features present, thus the visual intrusion of the proposed solar PV facility will be moderately low after mitigation.			
It is important to note that renewable energy structures are becoming increasingly important features in the South African landscapes and an important source of electricity for the growing population of South Africa. The significance of the impact is assessed in the table below.			
	Rating	Motivation	Significance
<b>Prior to Mitigation</b>			
<b>Duration</b>	Short (2)	Construction is estimated to last or 12 -18 months	<b>Low (30)</b>
<b>Extent</b>	Very Short Distance (4)	The visual intrusion will only potentially be experienced by receptors within the immediate vicinity.	
<b>Magnitude</b>	Moderate (4)	The visual environment during the construction phase, may lead to moderate levels of visual intrusion, this will however be a temporary impact as the proposed construction activities are estimated to be one year.	
<b>Probability</b>	Probable (3)	If development is approved there is a high probability the landscape will be impacted	
<b>Mitigation/Enhancement Measures</b>			
<p>Mitigation:</p> <ul style="list-style-type: none"> <li>• Avoid complete clearing of parts of the construction site that will be cleared of vegetation, and only clear vegetation in a phased manner.</li> <li>• Regular dust suppression must be applied on the construction site where earth is exposed, and along unsurfaced access roads to the construction site.</li> <li>• Construction vehicle speed limits must be strictly adhered to avoid the creation of excessive dust</li> <li>• Retain and maintain natural vegetation immediately adjacent to the development footprint.</li> <li>• Plan the placement of laydown areas and temporary construction equipment camps in order to minimise vegetation clearing (i.e., in already disturbed areas) where possible.</li> <li>• Restrict the activities and movement of construction workers and vehicles to the immediate construction site and existing access roads.</li> <li>• Reduce construction activities between 07:00 and 18:00, where possible, in order to reduce the impacts of construction lighting.</li> <li>• Rehabilitate all disturbed areas (if present / if required) immediately after the completion of construction works.</li> </ul>			
<b>Post Mitigation/Enhancement Measures</b>			
<b>Duration</b>	Short (2)	Construction is estimated to last or 12 -18 months	<b>Low (27)</b>
<b>Extent</b>	Very Short Distance (3)	The visual intrusion will only potentially be experienced by receptors within the immediate vicinity, however mitigation will serve as buffer to decrease the impact	
<b>Magnitude</b>	Moderate (4)	The visual environment during the construction phase, may lead to moderate levels of visual intrusion, this will however be a temporary impact as the proposed construction activities are estimated to be one year.	
<b>Probability</b>	Probable (3)	If development is approved there is a high probability the landscape will be impacted	
<b>Residual Risks:</b>			
None anticipated should the mitigation measures be implemented			

Table 3: Impact of PV facility on the Roads in Close Proximity

Table 3: Impact of PV facility on the Roads in Close Proximity			
The Harmony One PV has an unnamed road which runs directly adjacent to it and will be a major visual receptor if constructed. These roads are however expected to be frequented primarily by local users going about their daily business (i.e. not sight-seeing), potentially lessening the probability of the impact significance.			
	Rating	Motivation	Significance
<b>Prior to Mitigation</b>			
<b>Duration</b>	Long term (4)	Development of the PV facility will be visible for its entire lifespan	<b>Moderate (48)</b>
<b>Extent</b>	Local (4)	Only road users in the area will be subjected to the impact	
<b>Magnitude</b>	High (8)	The development will impact the traffic on the road during development.	
<b>Probability</b>	Probable (3)	Road users will most likely be able to see the PV Development when using the roads	
<b>Mitigation/Enhancement Measures</b>			
<p><b>Mitigation:</b></p> <p><b>Mitigation of this impact is possible</b> and both specific measures as well as general “best practice” measures are recommended in order ensure that a lower moderate impact is achieved.</p> <p>The table below illustrates this impact assessment.</p> <p><b>General mitigation / management:</b></p> <p>Planning:</p> <ul style="list-style-type: none"> <li>Retain and maintain natural vegetation in all areas outside of the development footprint.</li> </ul> <p>Operations:</p> <ul style="list-style-type: none"> <li>Maintain the general appearance of the facility as a whole.</li> </ul> <p>Decommissioning:</p> <ul style="list-style-type: none"> <li>Remove infrastructure not required for the post-decommissioning use of the facility.</li> <li>Rehabilitate all areas. Consult an ecologist regarding rehabilitation specifications.</li> <li>Monitor rehabilitated areas post-decommissioning and implement remedial actions.</li> </ul>			
<b>Post Mitigation/Enhancement Measures</b>			
<b>Duration</b>	Local (4)	Development of the PV facility will be visible for its entire lifespan	<b>Moderate (36)</b>
<b>Extent</b>	Long Term (4)	Only road users in the area will be subjected to the impact	
<b>Magnitude</b>	Low (4)	The development will impact the traffic on the road during development.	
<b>Probability</b>	Probable (3)	Road users will most likely be able to see the PV Development when using the roads	
<p><b>Residual Risks:</b></p> <p>The visual impact will be removed after decommissioning, provided the development infrastructure is removed and the site is rehabilitated to its original (current) status. Failing this, the visual impact will remain.</p>			

Table 4: Visual Impact on Impact on Businesses, homes or facilities in close proximity

Table 4: Visual Impact on Impact on Businesses, homes or facilities in close proximity
<p>The proposed land use is not expected to create high levels of discord between the project and its surroundings, since various mining activities, disturbed areas, infrastructure development and powerlines are already present in the region. The perceived overall compatibility of the proposed project with the surrounding land uses and existing infrastructure is therefore considered to be acceptable.</p> <p>Considering the above it must be noted that some places of <b>high visual sensitivity</b> were identified during the visual analysis within the 1 to 6km observation zone, most noticeably being Diggers into the East of the site as well as the Mwelase lifestyle farm to the west.</p>

In addition to physical infrastructure, impacts from clearing of vegetation, potential erosion as a result of bare soils, maintenance activities and the alteration of local topography will also create contrast in the landscape and may be visible to receptors. It is however important to note, that although the long term, operational visual impact of the Project is unlikely to be highly significant due to power lines being common features of South African landscapes.

These impacts associated may achieve lower moderate significance levels through the implementation of mitigation measures and provided that progressive revegetation of impacted areas take place.

	Rating	Motivation	Significance
<b>Prior to Mitigation</b>			
<b>Duration</b>	Long term (5)	The residence surrounding the development will be able to see the Solar PV facility	<b>Moderate (48)</b>
<b>Extent</b>	Local (4)	The development is proposed to only disrupt local visual receptors	
<b>Magnitude</b>	Moderate (7)	The visual receptors in the area are limited and are predicted to be naturally mitigated by the existing mining development, however, features of high significance do exist.	
<b>Probability</b>	Probable (3)	The Topography is very flat, and some areas are not subjected to protection from vegetation or mine heaps	
<b>Mitigation/Enhancement Measures</b>			
<p><b>Mitigation:</b></p> <p><b>General mitigation/management:</b></p> <p>Planning:</p> <ul style="list-style-type: none"> <li>Retain and maintain natural vegetation in all areas outside of the development footprint.</li> </ul> <p>Operations:</p> <ul style="list-style-type: none"> <li>Maintain the general appearance of the facility as a whole.</li> </ul> <p>Decommissioning:</p> <ul style="list-style-type: none"> <li>Remove infrastructure not required for the post-decommissioning use of the facility.</li> <li>Rehabilitate all areas. Consult an ecologist regarding rehabilitation specifications.</li> <li>Monitor rehabilitated areas post-decommissioning and implement remedial actions.</li> </ul> <p><b>Site specific mitigation measures:</b></p> <ul style="list-style-type: none"> <li>Plant vegetation barriers along the western borders of the PV development in order to shield the structures from observers residing at the above-mentioned homesteads and residential settlements (The lifestyle farm).</li> </ul>			
<b>Post Mitigation/Enhancement Measures</b>			
<b>Duration</b>	Long term (4)	The residence surrounding the development will be able to see the Solar PV facility	<b>Moderate (39)</b>
<b>Extent</b>	Local (4)	The development is proposed to only disrupt local visual receptors.	
<b>Magnitude</b>	Moderate (5)	The visual receptors in the area are limited and are predicted to be naturally mitigated by the existing mining development, however, features of high significance do exist.	
<b>Probability</b>	Probable (3)	The Topography is very flat, and some areas are not subjected to protection from vegetation or mine heaps	
<b>Residual Risks:</b>			
None			

### 7.2.2. Operational Phase

#### Operational Phase:

- Glint and Glare
- Visual Exposure and Intrusion
- Impact on Sense of Place

*Table 5: Glint and Glare / Night and Daytime lighting*

<p>The visual impact of glint and glare relates to the potential it has to negatively affect sensitive visual receptors in relatively close proximity to the source (e.g., residents of neighbouring properties), or aviation safety risk for pilots (especially where the source interferes with the approach angle to the runway).</p> <p>Lighting associated with the proposed project may be visible during both day and night, with lighting being more likely to have a visual impact during the night-time. Lighting may be visible for some distance and can be associated with indirect lighting impacts, such as sky glow (the scattering of light in the sky).</p> <p>It is however important to note that the development area is situated within a suburban region and adjacent to the Harmony Free gold Mine, thus the area is currently already impacted by night-time lighting and although some level of cumulative impact is likely, the impact will not be highly significant.</p> <p>With improved technology and design techniques, PV facilities are no longer associated with glare, however PV plants can create increased visibility and contrast through the creation of geometric patterns of reflected light caused by simultaneous reflection of sunlight from regularly spaced metal surfaces in the collector array. The reflected light may not necessarily cause discomfort to the viewer, during the daytime, and may change dramatically as the observer moves.</p> <p>It should be noted that the PV panels will not contribute to night time light pollution in the area, since no reflection of the sun occurs at night.</p> <p>The proposed PV facility is located approximately 9km from a semi operational airfield and 5km from a major road whilst being directly next to a secondary road.</p> <p>No impacts are predicted towards pilots along any of the assessed approach paths and no ATC Tower was identified.</p> <p>The potential visual impact related to solar glint and glare as an air / road travel hazard is expected to be of low significance. No mitigation of this impact is required since the PV facility is not expected to interfere with aircraft operations or impact the safety of road users.</p>			
	Rating	Motivation	Significance
<b>Prior to Mitigation</b>			
<b>Duration</b>	Long term (4)	This will be a possible risk for the entire life cycle of the development.	<b>Low (24)</b>
<b>Extent</b>	Very short distance (4)	This will only be a problem from short distances and at sustain times of day	
<b>Magnitude</b>	Low (4)	The impact is not regarded to be of significance	
<b>Probability</b>	Improbable (2)	Reflection from sunlight, cars traveling on adjacent roads or night time elimination will trigger this risk	
<b>Mitigation/Enhancement Measures</b>			
<b>Mitigation:</b> N/A			
<b>Post Mitigation/Enhancement Measures</b>			
<b>Duration</b>	N/A		
<b>Extent</b>	N/A		
<b>Magnitude</b>	N/A		
<b>Probability</b>	N/A		
<b>Residual Risks:</b> N/A			

Table 6: Visual Exposure

Table 6: Visual Exposure			
<p>Visual exposure is determined by qualifying the visibility of an object, with a distance rating to indicate the degree of intrusion and visual acuity. As distance between the viewer and the object increases, the visual perception of the object reduces.</p> <p>Since the Mines in the area has significantly altered the landscape of the area and is visible from various receptors in the surrounding region, it will aid in absorbing the impact on the visual environment caused by the proposed Harmony One PV.</p> <p>The basic areas of concern are:</p> <ul style="list-style-type: none"> <li>• The public roads including the unnamed road next to the site, and local roads generally servicing the farms, towns and mines throughout the study area.</li> <li>• Diggers Inn</li> <li>• Mwelase lifestyle farm</li> </ul>			
	Rating	Motivation	Significance
<b>Prior to Mitigation</b>			
<b>Duration</b>	Long term (4)	The development will be visible for its life cycle duration	<b>Moderate (42)</b>
<b>Extent</b>	Local (4)	Visual receptors within the local area will be subjected to this impact	
<b>Magnitude</b>	Moderate (6)	The visual receptors in the area are limited and are predicted to be naturally mitigated by the existing mining development, however, features of high significance do exist.	
<b>Probability</b>	Probable (3)	Without mitigation there is a high level of certainty that this impact will take place	
<b>Mitigation/Enhancement Measures</b>			
<p><b>Mitigation:</b></p> <p><b>General mitigation/management:</b></p> <p>Planning:</p> <ul style="list-style-type: none"> <li>• Retain and maintain natural vegetation in all areas outside of the development footprint.</li> </ul> <p>Operations:</p> <ul style="list-style-type: none"> <li>• Maintain the general appearance of the facility as a whole.</li> </ul> <p>Decommissioning:</p> <ul style="list-style-type: none"> <li>• Remove infrastructure not required for the post-decommissioning use of the facility.</li> <li>• Rehabilitate all areas. Consult an ecologist regarding rehabilitation specifications.</li> <li>• Monitor rehabilitated areas post-decommissioning and implement remedial actions.</li> </ul>			
<b>Post Mitigation/Enhancement Measures</b>			
<b>Duration</b>	Long term (4)	The development will be visible for its life cycle duration	<b>Moderate (36)</b>
<b>Extent</b>	Local (4)	Visual receptors within the local area will be subjected to this impact	
<b>Magnitude</b>	Low (4)	The visual receptors in the area are limited and are predicted to be naturally mitigated by the existing mining development, however, features of high significance do exist.	
<b>Probability</b>	Probable (3)	With Mitigation this impact is likely to be significantly reduced	
<b>Residual Risks:</b>			
None			

Table 7: Sense of place

Table 7: Sense of place
<p>Sense of place refers to a unique experience of an environment by a user, based on his or her cognitive experience of the place. Visual criteria, specifically the visual character of an area (informed by a combination of aspects such as topography, level of development, vegetation, noteworthy features, cultural / historical features, etc.), plays a significant role.</p>



An impact on the sense of place is one that alters the visual landscape to such an extent that the user experiences the environment differently, and more specifically, in a less appealing or less positive light. The environment surrounding the proposed PV is predominantly developed by mining activities represents existing visual disturbances.			
	<b>Rating</b>	<b>Motivation</b>	<b>Significance</b>
<b>Prior to Mitigation</b>			
<b>Duration</b>	Long term (4)	The development will be visible for its life cycle duration	<b>Low (22)</b>
<b>Extent</b>	Regional (3)	Visual receptors within the local area will be subjected to this impact	
<b>Magnitude</b>	Low (4)	The PV development will not infringe on the sense of place	
<b>Probability</b>	Improbable (2)	There is a small chance that this will impact visual receptors.	
<b>Mitigation/Enhancement Measures</b>			
<b>Mitigation:</b> N/A			
<b>Post Mitigation/Enhancement Measures</b>			
<b>Duration</b>	N/A		
<b>Extent</b>	N/A		
<b>Magnitude</b>	N/A		
<b>Probability</b>	N/A		
<b>Residual Risks:</b> The visual impact will be removed after decommissioning, provided the PV facility infrastructure is removed. Failing this, the visual impact will remain.			

### 7.2.3. Cumulative Effects

Cumulative landscape and visual effects (impacts) result from additional changes to the landscape or visual amenity caused by the proposed development in conjunction with other developments (associated with or separate to it), or actions that occurred in the past, present or are likely to occur in the foreseeable future. They may also affect how the landscape is experienced. Cumulative effects may be positive or negative. Where they comprise a range of benefits, they may be considered to form part of the mitigation measures.

Cumulative effects can also arise from the intervisibility of a range of developments and /or the combined effects of individual components of the proposed development occurring in different locations or over some time. The separate effects of such individual components or developments may not be significant, but together they may create an unacceptable degree of adverse effect on visual receptors within their combined visual envelopes. Intervisibility depends upon general topography, aspect, tree cover or other visual obstruction, elevation, and distance as this affects visual acuity, which is also influenced by weather and light conditions (LI-IEMA (2013)).

#### Cumulative effect of the Project

The cumulative impact of the Project, the facilities and infrastructure taken together, is significant, along with the existing power infrastructure (ESKOM sub-station and transmission lines) that exists in the study area. Intervisibility for the proposed Project and the existing infrastructure would be evident.

*Table 8: Cumulative Impact*

<b>Nature of Impact:</b>		
The potential cumulative visual impact of the PV facility on the visual quality of the landscape.		
The proposed Harmony One PV will increase the cumulative impact of electricity related infrastructure within the region. The cumulative impact of additional traffic on the local and regional roads as well as combined impacts from potential night-time lighting will also affect the sense of place of the larger region. The Development will however shift the development trend of away from mining creating different landscape features.		
	<b>Overall impact of the proposed project considered in isolation (without mitigation)</b>	<b>Cumulative impact of the project and other projects within the area (with mitigation)</b>

<b>Extent</b>	Very short distance <b>(4)</b>	Medium to longer distance <b>(2)</b>
<b>Duration</b>	Long term <b>(4)</b>	Long term <b>(4)</b>
<b>Magnitude</b>	Moderate <b>(6)</b>	Moderate <b>(6)</b>
<b>Probability</b>	Probable <b>(3)</b>	Probable <b>(3)</b>
<b>Significance</b>	<b>Moderate (42)</b>	<b>Moderate (36)</b>
<b>Status (positive, neutral or negative)</b>	Negative	Negative
<b>Reversibility</b>	Reversible <b>(1)</b>	Reversible <b>(1)</b>
<b>Irreplaceable loss of resources?</b>	No	No
<b>Can impacts be mitigated?</b>	No, only best practise measures can be implemented	
<b>Generic best practise mitigation/management measures:</b>		
<u>Planning:</u> <ul style="list-style-type: none"> <li>Retain/re-establish and maintain natural vegetation (if present) immediately adjacent to the development footprint where possible.</li> </ul>		
<u>Operations:</u> <ul style="list-style-type: none"> <li>Maintain the general appearance of the facility as a whole.</li> </ul>		
<u>Decommissioning:</u> <ul style="list-style-type: none"> <li>Remove infrastructure not required for the post-decommissioning use.</li> <li>Rehabilitate all affected areas. Consult an ecologist regarding rehabilitation specifications.</li> </ul>		
<b>Residual impacts:</b>		
The visual impact will be removed after decommissioning, provided the PV facility infrastructure is removed. Failing this, the visual impact will remain.		

### 7.3. Impact Statement

The findings of the Visual Impact Assessment undertaken for the proposed 30Mw PV facility is that the visual environment surrounding the site, especially within a 1 - 6km radius, may be visually impacted during the anticipated operational lifespan of the facility (i.e., a minimum of 25 years).

This impact is primarily applicable to the individual Harmony One Plant Facility and the cumulative impact of the Project, and the existing infrastructure would be evident. The VAC for the study area is relatively low, and the combined effect over time of these developments would result in the study area being impacted upon in a moderate manner beyond the anticipated of the proposed Project alone.

- The anticipated **visual** impact is not considered to be a fatal flaw, considering the low incidence of visual receptors occurring within the region.

The anticipated visual impacts listed above (i.e., post mitigation impacts) range from **moderate** to **low** significance. **Anticipated visual impacts on sensitive visual receptors (if and where present) in close proximity to the proposed facility are not considered to be fatal flaws for the proposed PV facility.**

Considering all factors, it is recommended that the development of the facility as proposed be supported; subject to the implementation of the recommended mitigation measures (**Section 7.2.**) and management programme (**Section 9.**).

## 8. CONCLUSION

---

The objective of this study was to provide sufficient information on the visual environment of the area, in order for the relevant authorities to apply the principles of Integrated Environmental Management (IEM) and the concept of sustainable development. Based on the findings of the visual assessment, the proposed project is expected to be moderately visually intrusive in portions of the surrounding environment.

The following is evident from the viewshed analyses:

0 – 1 KM (**Very High sensitivity area**) which contain only a portion of the unnamed road.

1 – 3 KM (**High Sensitivity to Medium**) This zone contains Diggers Inn Venue Hire, the Mwelase Lifestyle farm, some key mining establishments, The Brand Mashie Golf club and part of the Oppenheimer Golf Club as well as the Witpan dam.

3 - 6KM (**Moderate to low Sensitivity**)

Some agricultural holdings exist to the West of the proposed development. The majority of the eastern area is comprised of existing mine heaps or infrastructure which severely influences the characteristics of the landscape.

6 – 10 KM (**Very Low Sensitivity**)

At distances exceeding 6km the intensity of visual exposure is expected to be very low and highly unlikely due to the distance between the object (development) and the observer. The only point of interest which has been accounted for in this report within this zone is the Witbank Airfield.

It is believed that renewable energy resources are essential to the environmental well-being of the country and planet (WESSA, 2012). Taking into account all positive factors of such a development including economic factors, social factors and sustainability factors, especially in an arid country, the visual impact of this proposed development will be insignificant and is suggested that the development commence, from a visual impact point of view.

The overall value and sense of place of the receiving environment is considered of low significance. It is the opinion of the specialist that the project be considered favourably from a visual resource management perspective, provided that the required mitigation and management measures be implemented and that it is ensured that the best long-term use of the resources in the project area will be made in support of the principle of sustainable development.

PLEASE NOTE that the details of the project should be submitted with to the South African Civil Aviation Authority (SACAA).

## 9. MITIGATION AND MANAGEMENT MEASURES

---

In considering mitigation measures three rules are considered - the measures should be feasible (economically), effective (how long will it take to implement and what provision is made for management / maintenance), and acceptable (within the framework of the existing landscape and land use policies for the area). To address these, the following principles have been established:

- Mitigation measures should be designed to suit the existing landscape character and needs of the locality.
- They should respect and build upon landscape distinctiveness.
- It should be recognized that many mitigation measures, especially the establishment of planted screens and rehabilitation, are not immediately effective.

The primary visual impact, namely the appearance of the Solar PV Facility is not possible to mitigate. The functional design of the PV panels cannot be changed in order to reduce visual impacts. Mitigation is however possible if the recommended general actions are followed.

### 9.1. Preparatory Works and Construction Concerns

Mitigation of visual impacts associated with the construction phase, albeit temporary, would entail proper planning, management and rehabilitation of the construction site. Recommended mitigation measures include the following:

- Ensure that vegetation is not unnecessarily cleared or removed during the construction period.
- Reduce the construction period through careful logistical planning and productive implementation of resources.
- Plan the placement of lay-down areas and any potential temporary construction camps in order to minimise vegetation clearing (i.e., in already disturbed areas) wherever possible.
- Restrict the activities and movement of construction workers and vehicles to the immediate construction site and existing access roads.
- Ensure that rubble, litter, and disused construction materials are appropriately stored (if not removed daily) and then disposed regularly at licensed waste facilities.
- Reduce and control construction dust through the use of approved dust suppression techniques as and when required (i.e., whenever dust becomes apparent).
- Restrict construction activities to daylight hours in order to negate or reduce the visual impacts associated with lighting.
- Rehabilitate all disturbed areas, construction areas, roads, slopes, etc. immediately after the completion of construction works. If necessary, an ecologist should be consulted to assist or give input into rehabilitation specifications.
- With the preparation of the portions of land onto which activities will take place the minimum amount of existing vegetation and topsoil should be removed. Large trees should be saved where possible, specifically along the R73.
- Ensure, wherever possible, natural indigenous vegetation is retained and incorporated into the site rehabilitation.
- All topsoil that occurs within the proposed footprint of an activity must be removed and stockpiled for later use. The construction contract must include the stripping and stockpiling of topsoil. Topsoil would be used later during the rehabilitation phase of disturbed areas. The presence of degraded areas and disused construction roads, which are not rehabilitated, will increase the overall visual impact.
- Specifications with regards to the placement of construction camps, as well as a site plan of the construction camp, indicating waste areas, storage areas, and placement of ablution facilities should be included in the EMPr. These areas should either be screened or positioned in areas where they would be less visible from human settlements and main roads.
- Construction activities should be limited to between 08:00 and 17:00 or in conjunction with the ECO.
- Adopt responsible construction practices aimed at strictly containing the construction / establishment

activities to specifically demarcated areas.

- Building or waste material discarded should be undertaken at an authorised location, which should not be within any sensitive areas.

### 9.2. Earthworks

- Earthworks should be executed in such a way that only the footprint and a small 'construction buffer zone' around the proposed activities are exposed. In all other areas, the naturally occurring vegetation should be retained, especially along the periphery of the sites.
- All cut and fill slopes (if any) and areas affected by construction work should be progressively top soiled and re-vegetated as soon as possible.
- Any soil must be exposed for the minimum time possible once cleared of vegetation to avoid prolonged exposure to wind and water erosion and to minimise dust generation.

### 9.3. Landscaping and Ecological Approach

- It is recommended that the existing vegetation cover be maintained / established in all areas outside of the actual development footprint, both during construction and operation of the proposed facility. This will minimise visual impact as a result of cleared areas, power line servitudes and areas denuded of vegetation.
- Where new vegetation is proposed to be introduced to the site, an ecological approach to rehabilitation as opposed to a horticultural approach should be adopted. For example, communities of indigenous plants will enhance biodiversity, a desirable outcome for the area. This approach can significantly reduce long-term costs as less maintenance would be required over conventional landscaping methods as well as the introduced landscape being more sustainable.
- Progressive rehabilitation of all construction areas should be carried out immediately after they have been established.
- Undertake planting of screening vegetation along the eastern and southern boundaries of the Project sites.

### 9.4. Mounting Structures and Associated Infrastructure

- Paint the mounting structures with colours that reflect and compliment the colours of the surrounding landscape.
- Ensure the perimeter fence is of a 'see through' variety and that its colour blends with the environment.

### 9.5. Good housekeeping

- "Housekeeping" procedures should be developed for the Project to ensure that the Project site and lands adjacent to the Project site are kept clean of debris, garbage, graffiti, fugitive trash, or waste generated onsite; procedures should extend to control "track out" of dirt on vehicles leaving the active construction site and controlling sediment in stormwater runoff
- During construction, temporary fences surrounding the material storage yards and laydown areas should be covered with 'shack' cloth (khaki coloured).
- Operating facilities should be actively maintained during operation.

### 9.6. Operation Phase

- During operation, the maintenance of the PV panels, ancillary structures and infrastructure will ensure that the facility does not degrade, preventing aggravation of the visual impact. Roads must be maintained to forego erosion and to suppress dust, and rehabilitated areas must be monitored for rehabilitation failure. Remedial actions must be implemented as and when required. Once the facility has exhausted its life span, the main facility and all associated infrastructure not required for the post rehabilitation use of the site should be removed and all disturbed areas appropriately rehabilitated. An ecologist should be consulted to give input into rehabilitation specifications. All rehabilitated areas should be monitored for at least a year following decommissioning, and remedial actions implemented as and when required. Where sensitive

visual receptors are likely affected, it is recommended that the developer enter into negotiations regarding the potential screening of visual impacts, either at the receptor site or along the perimeter of the facility. This may entail the planting of vegetation or the construction of landscaped berms or screens.

### 9.7. Lighting

Light pollution is largely the result of bad lighting design, which allows artificial light to shine outward and upward into the sky, where it is not wanted, instead of focusing the light downward, where it is needed. Ill- designed lighting washes out the darkness of the night sky and radically alters the light levels in rural areas where light sources shine as 'beacons' against the dark sky and are generally not wanted.

Of all the pollutions faced, light pollution is perhaps the most easily remedied. Simple changes in lighting design and installation yield immediate changes in the amount of light spilled into the atmosphere. The following are measures that must be considered in the lighting design of the Project, particularly at the management and service platforms:

Mitigation measures include the following:

- Shielding the sources of light by physical barriers (walls, vegetation, or the structure itself);
- Limiting mounting heights of lighting fixtures, or alternatively using foot-lights or bollard level lights;
- Making use of downward directional lighting fixtures;
- Making use of minimum lumen or wattage in fixtures;
- Making use of down-lighters, or shielded fixtures;
- Making use of Low Pressure Sodium lighting or other types of low impact lighting.
- Making use of motion detectors on security lighting. This will allow the site to remain in relative darkness, until lighting is required for security or maintenance purposes.

In terms of ancillary infrastructure, it is recommended that access roads and other on-site infrastructure be planned so that the clearing of vegetation is minimised. Consolidate infrastructure as much as possible and make use of already disturbed areas rather than pristine sites, wherever possible. Mitigation of lighting impacts includes the pro-active design, planning and specification lighting for the facility. The correct specification and placement of lighting and light fixtures for the proposed Solar PV Facility and ancillary infrastructure will go far to contain rather than spread the light.

### 9.8. MANAGEMENT PROGRAMME

The following management plan tables aim to summarise the key findings of the visual impact report and suggest possible management actions in order to mitigate the potential visual impacts. Refer to the tables below.

Table 9: Management programme – Planning.

**OBJECTIVE: The mitigation and possible negation of visual impacts associated with the planning of the proposed PV facility.**

<b>Project Component/s</b>	The Solar PV facility and ancillary infrastructure (i.e., PV panels, access roads, transformers, security lighting, workshop, power line, etc.).	
<b>Potential Impact</b>	Primary visual impact of the facility due to the presence of the PV panels and associated infrastructure as well as the visual impact of lighting at night.	
<b>Activity/Risk Source</b>	The viewing of the above mentioned by observers on or near the site (i.e., within 1km of the site) as well as within the region.	
<b>Mitigation: Target/Objective</b>	Optimal planning of infrastructure to minimise the visual impact.	
<b>Mitigation: Action/control</b>	<b>Responsibility</b>	<b>Timeframe</b>
Plan the placement of laydown areas and temporary construction equipment camps in order to minimise vegetation clearing (i.e., in already disturbed areas) wherever possible.	Project proponent / contractor	Early in the planning phase.

Retain and maintain natural vegetation (if present) immediately adjacent to the development footprint.	Project proponent/ design consultant	Early in the planning phase.
Make use of existing roads wherever possible and plan the layout and construction of roads and infrastructure with due cognisance of the topography to limit cut and fill requirements.	Project proponent/ design consultant	Early in the planning phase.
Plan all roads, ancillary buildings and ancillary infrastructure in such a way that clearing of vegetation is minimised.	Project proponent/ design consultant	Early in the planning phase.
Consolidate infrastructure and make use of already disturbed sites rather than undisturbed areas.		
Consult a lighting engineer in the design and planning of lighting to ensure the correct specification and placement of lighting and light fixtures for the PV Facility and the ancillary infrastructure. The following is recommended: <ul style="list-style-type: none"> <li>○ Shield the sources of light by physical barriers (walls, vegetation, or the structure itself).</li> <li>○ Limit mounting heights of fixtures or use footlights or bollard lights.</li> <li>○ Make use of minimum lumen or wattage in fixtures.</li> <li>○ Making use of down-lighters or shielded fixtures.</li> <li>○ Make use of Low-Pressure Sodium lighting or other low impact lighting.</li> <li>○ Make use of motion detectors on security lighting, so allowing the site to remain in darkness until lighting is required for security or maintenance purposes.</li> </ul>	Project proponent / design consultant	Early in the planning phase.
<b>Performance Indicator</b>	Minimal exposure (limited or no complaints from I&APs) of ancillary infrastructure and lighting at night to observers on or near the site (i.e., within 3km) and within the region.	
<b>Monitoring</b>	Monitor the resolution of complaints on an ongoing basis (i.e., during all phases of the project).	

Table 10: Management programme – Construction.

**OBJECTIVE: The mitigation and possible negation of visual impacts associated with the construction of the proposed Harmony One Plant Solar Facility**

<b>Project Component/s</b>	Construction site and activities	
<b>Potential Impact</b>	Visual impact of general construction activities, and the potential scarring of the landscape due to vegetation clearing and resulting erosion.	
<b>Activity/Risk Source</b>	The viewing of the above mentioned by observers on or near the site.	
<b>Mitigation: Target/Objective</b>	Minimal visual intrusion by construction activities and intact vegetation cover outside of immediate construction work areas.	
<b>Mitigation: Action/control</b>	<b>Responsibility</b>	<b>Timeframe</b>
Ensure that vegetation cover adjacent to the development footprint (if present) is not unnecessarily removed during the construction phase, where possible.	Project proponent / contractor	Early in the construction phase.

Reduce the construction phase through careful logistical planning and productive implementation of resources wherever possible.	Project proponent / contractor	Early in the construction phase.
Restrict the activities and movement of construction workers and vehicles to the immediate construction site and existing access roads.	Project proponent / contractor	Throughout the construction phase.
Ensure that rubble, litter, and disused construction materials are appropriately stored (if not removed daily) and then disposed regularly at licensed waste facilities.	Project proponent / contractor	Throughout the construction phase.
Reduce and control construction dust through the use of approved dust suppression techniques as and when required (i.e., whenever dust becomes apparent).	Project proponent / contractor	Throughout the construction phase.
Restrict construction activities to daylight hours in order to negate or reduce the visual impacts associated with lighting, where possible.	Project proponent / contractor	Throughout the construction phase.
Rehabilitate all disturbed areas (if present/if required) immediately after the completion of construction works.	Project proponent / contractor	Throughout and at the end of the construction phase.
<b>Performance Indicator</b>	Vegetation cover on and in the vicinity of the site is intact (i.e., full cover as per natural vegetation present within the environment) with no evidence of degradation or erosion.	
<b>Monitoring</b>	Monitoring of vegetation clearing during construction (by contractor as part of construction contract). Monitoring of rehabilitated areas quarterly for at least a year following the end of construction (by contractor as part of construction contract).	

Table 11: Management programme – Operation.

**OBJECTIVE: The mitigation and possible negation of visual impacts associated with the operation of the proposed Harmony One Plant Solar Facility**

<b>Project Component/s</b>	The Solar PV facility and ancillary infrastructure (i.e., PV panels, access roads, workshop, etc.).	
<b>Potential Impact</b>	Visual impact of facility degradation and vegetation rehabilitation failure.	
<b>Activity/Risk Source</b>	The viewing of the above mentioned by observers on or near the site.	
<b>Mitigation: Target/Objective</b>	Well maintained and neat facility.	
<b>Mitigation: Action/control</b>	<b>Responsibility</b>	<b>Timeframe</b>
If specific sensitive visual receptors are identified during operation, investigate screening at the receptor site.	Project proponent / operator	Throughout the operation phase.
Investigate the potential to screen the PV facility from the Secunda secondary road (located within 1km of the facility) with planted vegetation cover or solid fencing, where possible/if required.	Project proponent / operator	Throughout the operation phase.
Maintain the general appearance of the facility as a whole, including the PV panels, servitudes, and the ancillary structures.	Project proponent / operator	Throughout the operation phase.
Maintain roads and servitudes to forego erosion and to suppress dust.	Project proponent / operator	Throughout the operation phase.
Monitor rehabilitated areas and implement remedial action as and when required.	Project proponent / operator	Throughout the operation phase.



Investigate and implement (should it be required) the potential to screen visual impacts at affected receptor sites.	Project proponent / operator	Throughout the operation phase.
<b>Performance Indicator</b>	Well maintained and neat facility with intact vegetation on and in the vicinity of the facility.	
<b>Monitoring</b>	Monitoring of the entire site on an ongoing basis (by operator).	

Table 12: Management programme – Decommissioning.

**OBJECTIVE: The mitigation and possible negation of visual impacts associated with the decommissioning of the proposed Harmony One Plant PV Facility**

<b>Project Component/s</b>	The solar PV facility and ancillary infrastructure (i.e., PV panels, access roads, workshop, transformers, etc.).	
<b>Potential Impact</b>	Visual impact of residual visual scarring and vegetation rehabilitation failure.	
<b>Activity/Risk Source</b>	The viewing of the above mentioned by observers on or near the site.	
<b>Mitigation: Target/Objective</b>	Only the infrastructure required for post decommissioning use of the site retained and rehabilitated vegetation in all disturbed areas.	
<b>Mitigation: Action/control</b>	<b>Responsibility</b>	<b>Timeframe</b>
Remove infrastructure not required for the post-decommissioning use of the site.	Project proponent / operator	During the decommissioning phase.
Rehabilitate access roads and servitudes not required for the post-decommissioning use of the site. If necessary, an ecologist should be consulted to give input into rehabilitation specifications.	Project proponent / operator	During the decommissioning phase.
Monitor rehabilitated areas quarterly for at least a year following decommissioning and implement remedial action as and when required.	Project proponent / operator	Post decommissioning.
<b>Performance Indicator</b>	Vegetation cover on and in the vicinity of the site is intact (i.e. full cover as per natural vegetation within the environment) with no evidence of degradation or erosion.	
<b>Monitoring</b>	Monitoring of rehabilitated areas quarterly for at least a year following decommissioning.	

## REFERENCES

---

Amir, S. & Gidalizon, E. 1990. Expert-based method for the evaluation of visual absorption capacity of the landscape. *Journal of Environmental Management*. Vol. 30, Issue 3: 251 – 263.

BRE National Solar Centre. 2013. Planning guidance for the development of large-scale ground-mounted solar PV systems. Cornwall, UK. October 2013. Report available at [www.bre.co.uk/nsc](http://www.bre.co.uk/nsc).

Crawford, D., 1994. Using remotely sensed data in landscape visual quality assessment. *Landscape and Urban Planning*. 30: 71-81.

Hull, R.B. & Bishop, I.E., 1988. Scenic Impacts of Electricity Transmission Towers: The Influence of Landscape Type and Observer Distance. *Journal of Environmental Management*. 27: 99-108.

Ittelson, W.H., Proshansky, H.M., Rivlin, L.G. and Winkel, G.H., 1974. *An Introduction to Environmental Psychology*. Holt, Rinehart and Winston, New York.

Landscape Institute – Institute of Environmental Management and Assessment (LI-IEMA), 2013. *Guidelines for Landscape & Visual Impact Assessment*. 3rd Edition, Routledge, London.

Lange, E., 1994. Integration of computerized visual simulation and visual assessment in environmental planning. *Landscape and Environmental Planning*. 30: 99-112.

Llobera, Marcos (2007). 'Modelling visibility through vegetation', *International Journal of Geographical Information Science*, 21:7, 799 – 810 To link to this article: DOI: 10.1080/13658810601169865 URL: <http://dx.doi.org/10.1080/13658810601169865>

Lynch, K., 1992. *Good City Form*, The MIT Press, London. (131)

Mucina, L. & Rutherford, M.C. (eds) 2006. The vegetation of South Africa, Lesotho, and Swaziland. *Strelitzia* 19. South African National Biodiversity Institute, Pretoria.

Oberholzer, B., 2005. Guideline for involving visual & aesthetic specialists in EIA processes: Edition 1. CSIR Report No ENV-S-C 2005 053 F. Republic of South Africa, Provincial Government of the Western Cape, Department of Environmental Affairs & Development Planning, Cape Town.

PagerPower. *Solar Photovoltaic Glint and Glare Study, SA Mainstream Renewable Power Developments Ltd Scafell Cluster Solar Development*. Report 10268A, December 2020.

Ramsay, J. (October 1993), Identification and assessment of aesthetic values in two Victorian forest regions. *More than meets the eye: identifying and assessing aesthetic value*. Report of the Aesthetic Value Workshop held at the University of Melbourne.

Sama, J. (2000), Program Policy, *Assessing and Mitigating Visual Impact*, Department of Environmental Conservation. New York.

Sheppard, S.R.J. (2005). Validity, reliability, and ethics in visualisation. In Bishop, I. & Lange, E. (Eds.) *Visualisation in Landscape and Environmental Planning: Technology and Applications*. Taylor and Francis, London.

Schapper, J. (October 1993), The importance of aesthetic value in the assessment of landscape heritage. *More than meets the eye: identifying and assessing aesthetic value*. Report of the Aesthetic Value Workshop held at the University of Melbourne.

Tata. *A Brief on Tempered Glass with Anti-Reflective Coating (ARC) on Solar Modules*, Tata Power Solar 25 November 2015.

United States Department of the Interior. 2013. Best Management Practices for Reducing Visual Impacts of Renewable Energy Facilities on BLM-Administered Lands. Bureau of Land Management. Cheyenne, Wyoming. 342 pp, April. First Edition.

Warnock, S. & Brown, N., 1998. Putting Landscape First. *Landscape Design*. 268: 44-46.