

# SITE SENSITIVITY VERIFICATION & HYDROLOGICAL COMPLIANCE STATEMENT

PROPOSED CONSTRUCTION AND OPERATION OF THE BATTERY ENERGY STORAGE SYSTEM (BESS) AND ASSOCIATED INFRASTRUCTURE FOR THE AUTHORISED LOERIESFONTEIN 3 PV SOLAR ENERGY FACILITY LOCATED NEAR LOERIESFONTEIN IN THE HANTAM LOCAL MUNICIPALITY, NAMAKWA DISTRICT IN THE NORTHERN CAPE PROVINCE OF SOUTH AFRICA

## Compiled by

Dr Bruce Scott-Shaw NatureStamp (Pty) Ltd Tel 078 399 9139 Email bruce@naturestamp.com

## Compiled for

Liandra Scott-Shaw SiVEST Environmental Division – PMB Tel 033 3471600 Email JackieJ@sivest.co.za

# November 2020



The White House, 22 Hilton Ave • PO Box 949, Hilton, 3245 • Tel: 033 343 1352 • Cell: 083 289 4912 susan@naturestamp.com • www.naturestamp.com

# **EXECUTIVE SUMMARY**

## **Objective**

The development is located near Loeriesfontein in the Hantam Local Municipality, Namakwa District in the Northern Cape Province of South Africa.

The Loeriesfontein 3 PV BESS will be located adjacent to the approved Loeriesfontein 3 PV substation associated with the approved Loeriesfontein 3 PV. To reduce electrical losses the BESS must be in close proximity to the on-site 33/132kV substation. The objective is to assess the impacts associated with the installation of a BESS on the Loeriesfontein Energy Facility (12/12/20/2321/2/AM4).

## <u>Key Findings</u>

Through the impact assessment, the risks identified during construction have the highest impact although it would still be considered to be of low risk. The construction and operation phase associated impacts of the access roads, PV modules, substation, maintenance building and power lines have already been approved by the respective authorities. Therefore, the addition of the BESS to the existing proposed development will have a minimal impact as it falls within the original developable area and is relatively small. The location of the proposed BESS has been strategically placed to be situated away from watercourses. There is a risk of groundwater contamination in the event of leaks from the batteries. However, if solid state batteries are used, this risk will be reduced.

## **Recommendation**

The proposed BESS has been strategically placed to be more than 500 meters from surface water resources. This location has taken cognisance of alternative locations and "no go" areas and is deemed to be the best possible location. The is a risk for groundwater contamination in the event of battery spillage. However, in this area, given the low water use requirement on-site and adherence to specialist recommendations, the site is of low risk of negative groundwater impacts during construction and operation. Furthermore, should solid state batteries be used rather than redox flow, this risk would be significantly lowered as redox flow batteries use vanadium electrolyte solution which is potentially hazardous to groundwater.

The previously approved specialist reports and the subsequent environmental authorisation (EA) are still relevant and these studies covered the proposed BESS footprint. NatureStamp strongly confirms that the hydrological impacts associated with the BESS would be minimal and acceptable and hence the EA should be granted to include the BESS.

Table 1 National Environmental Management Act, 1998 (Act No. 107 Of 1998) and Environmental Impact Regulations, 2014 (As Amended) – Requirements For Specialist Reports (Appendix 6)

Regulations, 2014 (As Amended) – Requirements For Specialist Reports (Appendix 6)	
Regulation GNR 326 of 4 December 2014, as amended 7 April 2017, Appendix 6	<b>Relevant Section</b>
<ul> <li>A specialist report prepared in terms of these Regulations must contain details of –</li> <li>i. the specialist who prepared the report; and</li> <li>ii. the expertise of that specialist to compile a specialist report including a curriculum vitae;</li> </ul>	Appendix 1
A declaration that the specialist is independent in a form as may be specified by the competent authority;	Appendix 2
<ul> <li>An indication of the scope of, and the purpose for which, the report was prepared –</li> <li>i. an indication of the quality and age of base data used for the specialist report;</li> <li>ii. a description of existing impacts on the site, cumulative impacts</li> <li>iii. of the proposed development and levels of acceptable change;</li> </ul>	Section 2, 8
The date and season of the site investigation and the relevance of the season to the outcome of the assessment;	Section 2
A description of the methodology adopted in preparing the report or carrying out the specialised process inclusive of equipment and modelling used;	Section 2
Details of an assessment of the specific identified sensitivity of the site related to the proposed activity or activities and its associated structures and infrastructure, inclusive of a site plan identifying site alternatives;	Section 7
An identification of any areas to be avoided, including buffers;	N/A
A map superimposing the activity including the associated structures and infrastructure on the environmental sensitivities of the site including areas to be avoided, including buffers;	Section 1
A description of any assumptions made and any uncertainties or gaps in knowledge;	Section 3
A description of the findings and potential implications of such findings on the impact of the proposed activity, (including identified alternatives on the environment) or activities;	Section 8
Any mitigation measures for inclusion in the EMPr;	Section 8
Any conditions for inclusion in the environmental authorisation;	None
Any monitoring requirements for inclusion in the EMPr or environmental authorisation;	Section 8
<ul> <li>A reasoned opinion <ul> <li>(as to) whether the proposed activity, activities or portions thereof should be authorized regarding the acceptability of the proposed activity or activities; and</li> <li>ii. ii. if the opinion is that the proposed activity, activities or portions thereof should be authorised, any avoidance, management and mitigation measures that should be included in the EMPr, and where applicable, the closure plan;</li> </ul></li></ul>	Section 9
A description of any consultation process that was undertaken during the course of preparing the specialist report;	No feedback has yet been received from the public participation process.
A summary and copies of any comments received during any consultation process and where applicable all responses thereto	No feedback has yet been received from the public participation process.
Any other information requested by the competent authority.	N/A
Where a government notice gazetted by the Minister provides for any protocol or minimum information requirement to be applied to a specialist report, the requirements as indicated in such notice will apply	N/A

# Specialist Details & Declaration

This report has been prepared in accordance with Section 13: General Requirements for Environmental Assessment Practitioners (EAPs) and Specialists as well as per Appendix 6 of GNR 982 – Environmental Impact Assessment Regulations and the National Environmental Management Act (NEMA, No. 107 of 1998 as amended 2017) and Government Notice 704 (GN 704). It has been prepared independently of influence or prejudice by any parties.

The details of Specialists are as follows -

Table 1 Details of Specialist												
Specialist	Task	Qualification and accreditation	Client	Signature								
Bruce Scott-Shaw NatureStamp SACNASP:118673	Design, GIS & report	BSc, BSc Hon, MSc, PhD Hydrology	SiVest	Date: 28/10/2020								

#### Details of Authors:

Bruce is a hydrologist, whose focus is broadly on hydrological perspectives of land use management and climate change. He completed his MSc under Prof. Roland Schulze in the School of Bioresources Engineering and Environmental Hydrology (BEEH) at the University of KwaZulu-Natal, South Africa. Throughout his university career he has mastered numerous models and tools relating to hydrology, soil science and GIS. Some of these include ACRU, SWAT, ArcMap, Idrisi, SEBAL, MatLab and Loggernet. He has some basic programming skills on the Java and CR Basic platforms. Bruce completed his PhD at the Center for Water Resources Research (UKZN), which focused on rehabilitation of alien invaded riparian zones and catchments using indigenous trees. Bruce is currently affiliated to the University of KwaZulu-Natal where he is a post-doctoral student where he runs and calibrates hydrological and soil erosion models. Bruce has presented his research around the world, including the European Science Foundation (Amsterdam, 2010), COP17 (Durban, 2011), World Water Forum (Marseille, 2012), MatLab advanced modelling (Luxembourg, 2013), World Water Week (Singapore, 2014), Forests & Water, British Colombia, (Canada, 2015), World Forestry Congress (Durban, 2015), Society for Ecological Restoration (Brazil, 2017). Conservation Symposium (Howick, South Africa, 2018) and SWAT modelling in Siem Reap (Cambodia, 2019). As a consultant, Bruce is the director and principal hydrologist of NatureStamp (PTY) Ltd. In this capacity he undertakes flood studies, calculates hydrological flows, performs general hydrological modelling, stormwater design, dam designs, wetland assessments, water quality assessments, groundwater studies and soil surveys.

# Table of Contents

EXECL	JTIVE SUMMARY	2
Specie	alist Details & Declaration	4
1.	INTRODUCTION	6
1.1	Project Background and Description of the Activity	6
1.2	Scope and Objectives	7
1.3	Terms of Reference	7
2.	METHODOLOGY	7
3.	LIMITATIONS AND ASSUMPTIONS	8
4.	TECHNICAL DESCRIPTION	9
4.1	Project Location	9
4.2	Site Description	9
4.3	Location and Technology Alternatives	11
4.4	'No-Go' Alternatives	12
5.	LEGAL REQUIREMENTS AND GUIDELINES	12
6.	DESCRIPTION OF THE RECEIVING ENVIRONMENT	12
7.	SITE SENSITIVITY VERIFICATION	12
7.1	Preferred Site Location	12
7.2	Confirmation of Site Sensitivity	14
8.	SPECIALIST FINDINGS/ASSESSMENT OF IMPACTS	15
8.1	Significance of impacts	15
8.2	Environmental Management Programme (EMPr) Input	19
9.	CONCLUSION AND SUMMARY	19
9.1	Summary of Findings	19
9.2	Hydrological Impact Statement	20

Appendix A Curriculum Vitae

Appendix B Declaration of Independence

# **1. INTRODUCTION**

#### 1.1 Project Background and Description of the Activity

South Africa Mainstream Renewable Power Developments (Pty) Ltd appointed SiVEST to undertake a specialist surface water impact assessment for the proposed establishment of a wind farm and photovoltaic (PV) facility near Loeriesfontein in the Northern Cape Province of South Africa. The site is approximately 60km north of Loeriesfontein. This study formed part of a wider Environmental Impact Assessment (Scoping and Environmental Impact Assessment) undertaken by Mainstream to identify and assess all the potential environmental impacts associated with the proposed project.

The detailed surface water/aquatic assessment was undertaken by SiVest (2012) did not include a Battery Energy Storage System (BESS). Authorisation has been granted for the energy facility and will consist of the following infrastructure:

- Wind turbines
- o Solar field
- o Buildings
- Electrical connections
- o Substation
- o Roads
- Temporary construction camp.

In accordance with Appendix 6 of the National Environmental Management Act (Act 107 of 1998, as amended) (NEMA) Environmental Impact Assessment (EIA) Regulations of 2014, a site sensitivity verification has been undertaken in order to confirm the current land use and environmental sensitivity of the proposed project area as identified by the National Web-Based Environmental Screening Tool (Screening Tool). The purpose of this report/statement is to verify the site sensitivity as identified by the screening tool and compile a statement confirming the identified impacts and any changes with the revised layout.

The BESS will be located on a previously identified buildable area. It will be contained within shipping containers placed on a raised concrete plinth. The BESS allows for the storage of electricity and supply thereof during peak-demand will mean that the facility is more efficient, reliable and electricity supply more constant. The layout of the site is indicated in Figure 1.



Figure 1 The Loeriesfontein site prior to the Energy Facility

## 1.2 Scope and Objectives

Assess the hydrological impacts associated with the installation and operation of a BESS on the Loeriesfontein 3 PV Facility (hereafter referred to as "Loeriesfontein 3 PV" that received environmental Authorisation in 2012 (21/12/20/2321/2).

## 1.3 Terms of Reference

The terms of reference for the assessment consist of the Site Verification Report and a specialist study/compliance statement as per Government Notice 320 of 20 March 2020. The Terms of Reference (ToR) applicable to this specialist study are:

- i. A Site Verification Report and Compliance Statement / Specialist Report in line with the DEA Screening Tool Specialist theme Protocols (As gazetted 20 March 2020) if they apply. If they do not, the report is written in accordance with Appendix 6 of the EIA Regulations, 2014 (as amended);
- ii. A thorough overview of all applicable legislation, policies, guidelines. etc.;
- iii. Identification of sensitive and/or 'no-go' areas to be avoided;
- iv. Recommend mitigation measures in order to minimise the impact of the proposed development;
- v. Provide implications of specialist findings for the proposed development (e.g. permits, licenses etc.);
- vi. Specify if any further assessment will be required;
- vii. Include an Impact Statement, concluding whether any fatal flaws have been identified and ultimately whether the proposed development can be authorised or not (i.e. whether EA should be granted / issued or not); and
- viii. A copy of the Specialist Declaration of Interest (DoI) form, containing original signatures.

# 2. METHODOLOGY

A detailed description of the methods has been provided. The regional context and desktop analysis were used as the point of departure. A detailed site visit was undertaken by SiVest in 2012, prior to the approval of the wind facility. Much of this information was used to confirm the sensitivity of this site.

The verification assessment of these systems considered the following databases where relevant:

Data Type	Year	Source/Reference
Aerial Imagery	2013, 2016, present	Surveyor General
1:50 000 Topographical	2011	Surveyor General
5m Contour	2010	Surveyor General
River Shapefile	2011	NFEPA
Geology Shapefile	2011	Council of Geoscience, 2015/National Groundwater Archive
Borehole Data	Ongoing	National Groundwater Archive, WARMS
Land Cover	2006/present	SANBI
Water Registration	2013, 2016	WARMS - DWS
Previous Assessments	2012	SiVest

Table 2 Data type and source for the site verification assessment

\*Data will be provided on request

The following methods were used to undertake the site verification:

- General area desktop site inspection;
- Site photographs from previous studies;
- Satellite imagery (Google Earth/Landsat);
- Review of existing approvals/authorisations for the site.

The following methods were used to undertake the compliance statement:

- Assessment of alternative sites and "no go" areas;
- o summarize previous assessment and identify any areas not covered by this assessment;
- $\circ$   $\;$  revision of impacts as per the additional BESS; and
- Final recommendations and compliance statement.

The aim of the impact assessment is to identify the impacts that the proposed activity, including the construction and operational phase, will have on the receiving environment. If avoidance is not possible, mitigation is required in the form of practical actions (Ramsar Convention, 2008). Mitigation actions can be grouped into the following:

- i. **Pre-construction:** This may take the form of changes in the scale of the development (e.g. reduce the size of the development), location of development (e.g. find an alternative area with less impact), and design (e.g. change the structural design to accommodate flows and continuity).
- ii. **Construction:** This may take the form of a process change (e.g. changes in construction methods), siting (e.g. locality to sensitive areas), sequencing and phasing (e.g. construction during seasonal periods).
- iii. **Operational:** This may take the form of changes in post management (e.g. change management to match unpredicted impacts), monitoring (e.g. frequent checks by an ECO), rehabilitation (e.g. if mitigation actions are not effective).

An impact rating table is derived through the population of the following parameters, pre- and post-mitigation measures:

- Extent The area over which the impact will be expressed
- Probability The chance of occurrence of an impact
- Reversibility The degree to which an impact on an environmental parameter can be successfully reversed upon completion of the proposed activity
- Irreplaceable loss of resources The degree to which resources will be irreplaceably lost as a result of a proposed activity
- Duration The lifetime of the impact as a result of the proposed activity
- Intensity/Magnitude A brief description of whether the impact has the ability to alter the functionality or quality of a system permanently or temporarily
- Significance Rating A brief description of the importance of an impact which in turn dictates the level of mitigation required (Extent + probability + reversibility + irreplaceability + duration) x magnitude/intensity).

## 3. LIMITATIONS AND ASSUMPTIONS

In order to apply generalized and often rigid scientific methods or techniques to natural, dynamic environments, a number of assumptions are made. Furthermore, a number of limitations exist when assessing such complex ecological systems. The following constraints may have affected this assessment –

- As an extensive site visit has already been undertaken by SiVest, an additional site visit was not required.
- The impacts for the site are specific to the BESS.
- The databases used may not, at times, be recent as is the nature of these databases.
- This statement assumes that the work undertaken by SiVest (2012) is unbiased and the methods adopted appropriately followed.

# 4. TECHNICAL DESCRIPTION


## 4.1 Project Location

The BESS is located on the authorised Loeriesfontein hybrid Energy Facility WEF (12/12/20/2321/2/AM4), near Loeriesfontein in the Hantam Local Municipality, Namakwa District in the Northern Cape Province of South Africa.

## 4.2 Site Description

The Loeriesfontein study site is situated within the Hantam Local Municipality in the greater Namakwa District Municipality, Northern Cape Province. The town of Loeriesfontein is within a basin surrounded by mountains, and it is accessed from the N7 highway (north out of Cape Town), turning off on the R27 at Van Rhynsdorp to Nieuwoudtville, then following the R357 to Loeriesfontein (a further 65 km north). The site can be accessed via a secondary road (Granaatboskolk Rd) from Loeriesfontein Town and a railway line from Cape Town. The study site is approximately 49 km north of the town of Loeriesfontein. The study area is located in the greater Nama Karroo Biome but is more specifically located within the Bushmanland Basin Shrubland bioregion.

The climate of the bioregion depicts a rainfall pattern occurring in late summer and early autumn with the Mean Annual Precipitation (MAP) ranging from about 100-200mm. The Mean maximum and minimum monthly temperatures in Brandvlei are 39.5° C and -4.6° C respectively.

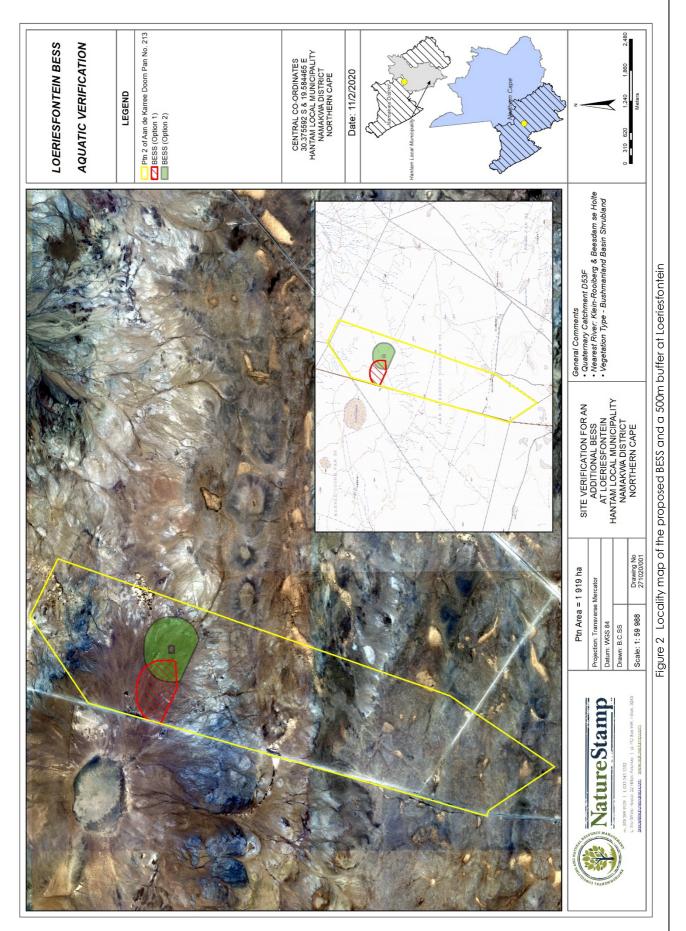

Page | 10

### 4.3 Location and Technology Alternatives

No site alternatives for this proposed development were considered as the placement of the proposed BESS is dependent on the location of the Loeriesfontein WEF infrastructure.

Technology alternatives are limited to two battery options. These are solid state Li-ion and Vanadium Redox flow batteries. For Li-ion batteries, prevailing site temperature instability can have an impact on these battery types which can include fire, or permanent structural damage to the batteries. The volatility of the battery system, prior to any mitigation, could result in significant fire danger. In addition to this, there is a risk associated with the chemicals contained within the actual battery storage system itself.

	BESS Specifications
BESS Footprint	Up to 2Ha
BESS Capacity	200MWh
BESS Technology	Lithium Ion
BESS Type Alternative- Solid State	Containerised systems assembled within shipping containers and delivered to the project site.
Batteries	Dimensions are approximately 17 m long x 3.5 m wide x 4 m high. Containers will be placed on a
	raised concrete plinth (30 cm) and may be stacked on top of each other to a maximum height
	of approximately 15 m. Additional instrumentation, including inverters and temperature control
	equipment, may be positioned between the battery containers.

Redox Flow batteries can have a corrosive character, the vanadium electrolyte solution is classified as toxic and hazardous to groundwater. The electrolyte is used in a closed system and vanadium can escape solely through electrolyte leaks. There will always be a small amount of hydrogen produced during charging at high states of charge, which is a safety risk due to the possible explosive reaction with atmospheric oxygen. The amount is extremely small, but must be taken into account when installing the battery.

Both battery types were assessed separately for risk associated with surface water resources.

The design of the Li-ion system includes:

- Insulated containers
- High powered HVAC (Heating, Ventilation and Air-Conditioning) System, monitored centrally
- o Multiple temperature sensors for both the cells and air temperature
- Automated shut down mechanism if temperatures get too high
- o Containers sealed and douse in case of fire to prevent the spread
- Battery management system to prevent overuse and maintain good battery condition
- Fire detection and suppressant systems
- Gas level monitoring for several different gases (related to degradation of the batteries that increases risk of fire)
- o Heat sensors
- o Battery condition monitoring
- $\circ$   $\;$  Dousing mechanism for emergency cooling and fire suppression
- o Density limits in the containers
- Spacing limits between containers

The design of the Vanadium Redox Flow Battery Technology (VRFBs) includes:

- Battery condition monitoring
- Fire detection and suppressant systems
- Leak detection and monitoring system
- A secondary containment to prevent the escape of vanadium solution into the environment during operation (storage and refilling when required). The VRFBs will be placed within a 2.5 m high berm wall.
- Hydrogen gas is discharged from the negative tank into the environment through a simple pipe and the battery room or container is well ventilated and flushed with fresh air to prevent any build-up of hydrogen gas.
- A Major Hazards Risk Assessment must be undertaken prior to construction (should VRFBs be used), and the recommendations of the assessment implemented.

## 4.4 'No-Go' Alternatives

The 'no-go' alternative is the option of not constructing and operating a BESS in support of the authorised Renewable Energy (RE) facility. This alternative would result in no additional environmental impact other than that assessed during the EIA for the RE facility

The 'no-go' option is an option; however, this would prevent the Loeriesfontein wind Energy Facility from contributing to the environmental, social and economic benefits associated with the development of the renewables sector.

The areas identified as "no go" areas by SiVest (2012), are still relevant for the additional area. However, the BESS does not encroach upon "no go" areas.

## 5. LEGAL REQUIREMENTS AND GUIDELINES

In terms of the Environmental Impact Assessment (EIA) Regulations, which were published on 04 December 2014 and amended on 07 April 2017 [promulgated in Government Gazette 40772 and Government Notice (GN) R326, R327, R325 and R324 on 7 April 2017], various aspects of the proposed development are considered listed activities under GNR 327 and GNR 324 which may have an impact on the environment and therefore require authorisation from the National Competent Authority (CA), namely the Department of Environment, Forestry and Fisheries (DEFF), prior to the commencement of such activities.

## 6. DESCRIPTION OF THE RECEIVING ENVIRONMENT

The development is located ±43km south west of Prieska in a rural part of the Northern Cape. Access to the proposed development will be via the existing farm access located on the R357 Provincial Road. The provincial road is a surfaced road from the N10 National Road running past Prieska which eventually becomes a gravel road up to the access road of the development.

# 7. SITE SENSITIVITY VERIFICATION

The site verification aims to confirm or dispute the **very high sensitivity** identified by the screening tool. This is done through a desktop investigation using more recent databases and aerial/remote imaging.

## 7.1 Preferred Site Location

An extensive investigation has been undertaken at the site. The land cover is uniform throughout the site. The selected site is located from NFEPA systems. However, as per the delineation undertaken by SiVest, both

alternatives fall within drainage lines. As such, these options are not considered the best location for this particular site. The nearest NFEPA wetland is 283 m from the edge of the BESS (Figure 3 & 4).

Several alternatives have been proposed for the two phases of the wind farm and the PV Power Plant. For the BESS, NatureStamp proposes a shift in the BESS area so that the site is outside of the 500 m BESS range (Figure 5). If this shift is adopted, the site could be considered to have a low sensitivity.

NatureStamp proposes that the BESS is sited in the best possible location as it has been placed to be more than 500m from any site delineated watercourse. If this location is adopted, the site could be considered to have a **low sensitivity**.



Figure 3 Previous watercourse study developable area

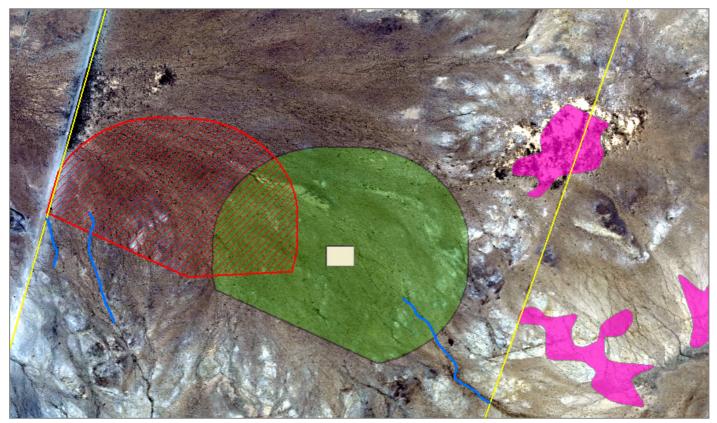


Figure 4 Proximity of NFEPA wetlands (pink) in relation to the preferred BESS site

The areas identified as "no go" areas by Taylor (2012), are still relevant for the additional area. However, the BESS does not encroach upon "no go" areas.

#### 7.2 Confirmation of Site Sensitivity

Through the interrogation of various databases, imagery and the previous surface water assessment, and should the shifted BESS be considered, it is clear that no wetlands are present within or near the proposed footprint. As such, NatureStamp confirms that the site should be considered to have **Low Sensitivity**.

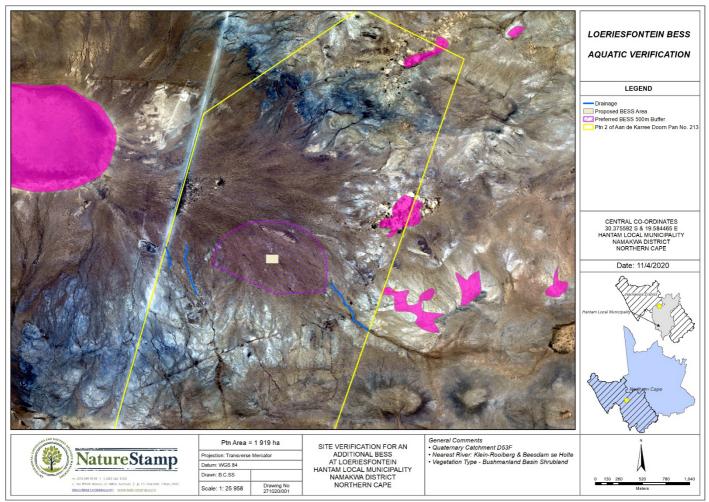


Figure 5 Aquatic verification showing the preferred Loeriesfontein BESS location

# 8. SPECIALIST FINDINGS/ASSESSMENT OF IMPACTS

## 8.1 Significance of impacts

The key impacts identified for the proposed BESS are:

- Increase in impervious surface reducing the infiltration/groundwater recharge;
- Abstraction of groundwater for construction;
- Abstraction of groundwater for operation;
- o Increase in stormwater leading to an increase of peak flows entering watercourse systems;
- Potential oil spills/leaks during construction; and
- $\circ$   $\;$  Potential for leaks from batteries leading to contamination of watercourses.
- $\circ$   $\;$  Potential for leaks from batteries leading to contamination of groundwater.

			AL S					Low													Low														LOW				
	IIFICANCE	NO	TOTAL				:	00													œ							$\downarrow$						~	`				-
	ENVIRONMENTAL SIGNIFICANCE	AFTER MITIGATION	STATUS (+ OR -)	_				'													'														I				
	RONM	AFTE	- \ ¥		<u> </u>			33				_									- ო							_						-	-				
	ENVI		-	1	⊢			2													_													-					
			R	]				2													_													-	-				
			<u>е</u> ш	-	⊢			ლ 													- 2													-	-				
				Construction Phase	<ul> <li>The development must recycle water on site and reuse it for plant maintenance but stay within</li> </ul>	catchment limits. Dhe development must follow suitchle	contamination measures to ensur	occurs.	<ul> <li>Storm water structures should promote infiltration to</li> </ul>	ensure the recharge of the groundwater aquifer.	<ul> <li>Existing boreholes should be used in order to not over utilize anoundwater resources</li> </ul>	<ul> <li>The mitiaation measures required relates to the</li> </ul>	development and implementation of an adequate st	water management plan to be designed by an	appropriate engineer.	<ul> <li>The engineer should account for both natural run-off (that</li> </ul>	which can be released into the natural landscape with no	detrimental effect) and excess artificial run-off generated	by the proposed BESS development structures.	<ul> <li>Attenuation dams and evaporation ponds are examples</li> </ul>	that can contain storm water run-off. Other structures that	may be considered are semi-permeable surfaces that can	absorb artiticial run-off but releases a certain amount into	the landscape. Energy dissipating structures can also be	<ul> <li>Such structures can reduce the amount and rate of excess</li> </ul>	wetlands and thereby prevent the onset of erosion.	<ul> <li>The development must stay outside of the 1:100 year flood</li> </ul>	extent.	<ul> <li>All vehicles will need to be checked for leakage before</li> </ul>	and after entering the construction area.	<ul> <li>Areas where fuels are either kept or transferred will need to</li> </ul>	be bunded so as to contain spillage.	<ul> <li>Cement mixing sites will also need to be strategically</li> </ul>	positioned and bunded to prevent spillage.	<ul> <li>Ablution facilities must be provided to prevent workers</li> </ul>	urinating near or in the wetlands.	<ul> <li>Ablution facilities must be positioned at least 100metres</li> </ul>	away irom ine weilana areas ana purter zones.	
			s					Low													Low														LCW				
	ANCE		TOTAL		04			24							3%																								
	ENVIRONMENTAL SIGNIFICANCE	<b>BEFORE MITIGATION</b>	STATUS (+ OR -)							,																													
	MENTA	ORE M	- ~ ₹					4				L									т													ç	<b>)</b>				
	VIRON	BEF						5													с -													°					•
ance	EN		<u>ہ</u>		┢			2			_	$\left  \right $									-					 	_	┥						ہ م					
gnifico			₽.					m	_			L									2							1						c				_	
risk sig					⊢			_		q	n	╞	c							╉						-	_												
Impact rating table and risk significance		ISSUE / IMPACT /	EFFECT/ NATURE		Change in	impervious surface	preventing	infiltration and	harvesting of	rainwater/ground	water abstraction		Increase in Storm Water												General	spills/Leaks				•									
Table 3 Impact ro													Flood Hvdrologv/	Storm Water								Surface and Groundwater Water Quality																	

pg. 16

	LO		ΓŐ
	σ		0
	_		-
	m		-
	-		-
	-	-	4
			N
Operational Phase –Solid State Li-Ion	<ul> <li>BESS component oils/chemicals mitigation measures - Standard measures are typically accommodated in the design of the BESS to measures are typically accommodate spills.</li> <li>Solid State Batterias are unlikely to leak, as they are housed in containers that accommodate spills.</li> <li>Solid State Batterias are unlikely to leak, as they are housed in containers that accommodate spills.</li> <li>Solid State Batterias are unlikely to leak, as they are housed in containers that accommodate spills.</li> <li>Solid State Batterias are unlikely to leak, as they are housed in containers that accommodate spills.</li> <li>Should contaminated water leak from the batteries, this would typically be removed from the site, and would be recycled off-site as incorporated into the BESS design to minimise the fisk of any oil/chemical spillage being transported off the site.</li> <li>Implement the storm-water management plan and ensure appropriate water diversion systems are put in place.</li> <li>Compile (and adhere to) a procedure for the safe handling of battery cells.</li> <li>Compile an emergency response plan and implement should an energency occur.</li> <li>Ensure that spill kits (if appropriate) are available on site for clean-up of pills and leaks.</li> <li>Dispose of waste appropriately to prevent pollution of soil and incensed waste disposal facility.</li> <li>Dispose of waste appropriately to prevent pollution of soil and incensed waste disposed facility.</li> <li>Dispose of appropriately to prevent pollution of soil and incensed waster appropriate of the tay of appropriate disposed of appropriate should be done over appropriate disposed of appropriate should be done over appropriate dispresed of appropriate clean-up measures and any hazardous substances must be disposed of appropriate spond wasteries and appropriate clean-up measures and any hazardous substances must be disposed of appropriately.</li> </ul>	Operational Phase – Redox Flow	<ul> <li>BESS component oils/chemicals mitigation measures - Standard measures are typically accommodated in the design of the BESS to ensure that should an accidental spillage occur, it would not pollute the surrounding soils or any nunoff from the BESS.</li> <li>Flow batteries are typically housed within a concrete bund that would a accommodated write the surrounding soils or any nunoff from the BESS.</li> <li>Should contaminated write leak from the batteries, this would typically be removed from the site, and would be recycled off-site as part of the remediation process.</li> <li>It is important that such design-telated mitigation measures be incorporated into the BESS design to minimise the risk of any conformation that shorm-water management plan and ensure appropriate water diversion systems are put in place.</li> <li>Compile (and adhere to) a procedure for the safe handling of battery cells.</li> </ul>
•	P		Low
	39		42
	,		,
	<u>ო</u>		<i>σ</i>
	4		4
	ო ო		4
	N		0
			0
	Battery Spilis/Leaks during Operation		Battery Spills/Leaks during Operation
	Surface Water Quality		Surface Water Quality

Page | 17

		Low		Low		Low
		10		œ		/
		I		1		
			-			~
		m		2		~
		l		_		/
		4		7		/
		-		-		~
			-	7		`
<ul> <li>Ensure that spill kits (if appropriate) are available on site for clean-up of spills and leaks.</li> <li>Dip-trays or containment measures must be placed under equipment that poses a risk when not in use.</li> <li>Immediately clean up spills and dispose of contaminated soil at a licensed waste disposal facility.</li> <li>Dispose of waste appropriately to prevent pollution of soil and groundwater.</li> <li>Install monitoring systems to detect leaks or emissions.</li> <li>On-site battery maintenance should be done over appropriate drip trays/containment measures and any hazardous substances must be disposed of appropriately.</li> <li>Record and report all fuel, oil, hydraulic fluid or electrolyte spills to the PM / Engineer / ERP so that appropriate clean-up measures can be implemented.</li> </ul>	Decommissioning Phase	<ul> <li>All vehicles will need to be checked for leakage before and after entering the construction area.</li> <li>Areas where fuels are either kept or transferred will need to be bunded so as to contain spillage.</li> <li>Ablution facilities must be provided to prevent workers uninating near or in the wetlands.</li> <li>Ablution facilities roust be positioned at least 100metres away from the wetland areas and buffer zones.</li> <li>Reveedation must occur immediately following the decommission.</li> </ul>		<ul> <li>The mitigation measures required relates to the development and implementation of an adequate storm water management plan/structures to be designed by an appropriate engineer.</li> <li>Such structures can reduce the amount and rate of excess un-off generated by the proposed development entering wetlands and thereby prevent the onset of erosion downstream.</li> </ul>	No-go options	The No-Go alternative entails no change to the status quo.
0 0 0 0 0 0 0		0 0 0 0 0		0 0		o Low
		ΓC		۲۲ 		Ľ
		10	-	10		~
		1		1		~
				-		
		e		m		/
		-		-		~
		4		7		~
		- I		7		~
		-		7		~
		Sediments and spills entering water resources		Compounded impacts from surrounding development		∀/N
		Water Quality/ Hydrology		Water Quality/ Hydrology		Water Quality/ Hydrology

#### 8.2 Environmental Management Programme (EMPr) Input

The objectives of the amendment to the EMPr is to ensure that any impacts remain at a low risk/sensitivity. Furthermore, this also allows for the additional battery area to be incorporated into the existing EMPr.

Table 4 Rehabilitation actions fo Objective	Action	Timing
Manage Surface and	1. Use existing boreholes to abstract groundwater	With immediate effect (Construction & Operation)
groundwater Water Usage	2. Ensure storm water structures promote infiltration	With immediate effect (Construction)
Mitigate any flood risk	3. Ensure structure is outside of 1:100 year flood event	Planning and Construction
Ensure groundwater quality is not impacted upon	<ol> <li>In the event of a spill, implement a spill contingency plan and monitor groundwater for 6 months if spill is not contained.</li> </ol>	Construction and Operation
	<ol> <li>Ensure appropriate storm water infrastructure is installed to dissipate flow and direct away from concentrated paths.</li> </ol>	During winter months
Manage stormwater from the BESS	<ol> <li>Ensure drip trays are used under vehicles/machinery and that impervious floor surfaces are constructed to ensure chemicals and waste do not enter the sub-surface.</li> </ol>	With immediate effect throughout construction.
	<ol> <li>Where practical, plant obligate wetland species or dissipation structures in drains around the BESS.</li> </ol>	With immediate effect
Manage spills during construction	<ol> <li>8. Ensure drip trays are used under vehicles/machinery and erosion control measures are implemented.</li> <li>9. Ensure a spill contingency plan is put into place.</li> </ol>	With immediate effect ECO to check every 2 months
Manage spills during operation	<ol> <li>Completely lined infrastructure (concrete bunded area), with the capacity to contain 120% of the total amount of chemicals stored within the BESS.</li> <li>Spills must be completely removed from the site.</li> <li>Fire extinguisher equipment installed within the BESS.</li> <li>Temperature of battery systems monitored continually.</li> <li>Ensure air circulation to prevent the buildup of chemicals.</li> <li>Implement the storm-water management plan and ensure appropriate water diversion systems are put in place.</li> <li>Compile (and adhere to) a procedure for the safe handling of battery cells.</li> <li>Compile an emergency response plan and implement should an emergency occur.</li> <li>Ensure that spill kits (if appropriate) are available on site for clean-up of spills and leaks.</li> <li>Drip-trays or containment measures must be placed under equipment that poses a risk when not in use.</li> <li>Immediately clean up spills and dispose of contaminated soil at a licensed waste disposal facility.</li> <li>Dispose of waste appropriately to prevent pollution of soil and groundwater.</li> <li>Install monitoring systems to detect leaks or emissions.</li> <li>On-site battery maintenance should be done over appropriate drip trays/containment measures and any hazardous substances must be disposed of appropriately.</li> <li>Record and report all fuel, oil, hydraulic fluid or electrolyte spills to the PM / Engineer / ERP so that appropriate clean-up measures can be implemented.</li> </ol>	With immediate effect/Ongoing

Table 4 Rehabilitation actions for inclusion into the EMPr

# 9. CONCLUSION AND SUMMARY

#### 9.1 Summary of Findings

Through the impact assessment, the risks identified during construction have the highest impact although it would still be considered to be low. The construction and operation phase associated impacts of the access roads, turbines, crane pads/lay down areas, substation, maintenance building and power lines have already been approved by the respective authorities. Therefore, the addition of the BESS to the existing proposed development will have a minimal impact as it falls within the original developable area and is relatively small. The location of the proposed BESS has been strategically placed to be situated away from watercourses. There is a risk of groundwater contamination in the event of leaks from the batteries. However, if solid state batteries are used, this risk will be reduced.

## 9.2 Hydrological Impact Statement

With reference to this report and previous assessments done on the site, including that of SiVest (2015), the approved EA for the greater development footprint and the impact assessment undertaken in this report, NatureStamp is of the opinion that the impacts of the BESS would be minimal and acceptable and hence the EA should be granted for this EIA process.

Additionally, the following are confirmed by the specialist:

- 1. The site was identified as very high sensitivity by the screening tool as there are watercourses within the Loeriesfontein property, which is a very large property.
- 2. The preferred BESS site is however of low sensitivity in an aquatic and hydrological context.
- 3. The proposed BESS is more than 500 m from any watercourse/wetland.
- 4. Given the low water use requirement on-site and adherence to specialist recommendations, the site is of low risk of negative groundwater impacts during construction and operation. However, appropriate preventative measured need to be taken to ensure that this low risk is still minimised.
- 5. The proposed location of the BESS is the best possible location on the site.
- 6. The site is mostly flat, located on sparse vegetation and is a significant distance from wetlands/watercourse. This is confirmed by SiVest (2015) who's study covered the whole BESS area.
- 7. Impacts have been identified with proposed mitigation measures. Should these measures be adhered to, the additional BESS area would remain a low sensitivity.
- 8. A list of conditions has been provided that should be included in the EMPr.
- 9. For nearby wind energy facilities, there have been no visible impacts from the existing development areas, indicating that the impact of this activity is low and that the EMPr has been adhered to in such cases.
- 10. Although potential spillage from batteries has been noted, the recent technology upgrades and enclosed nature of solid state batteries further reduces the risk of contamination, particularly of groundwater resources.
- 11. No further assessments are required given the location of the BESS.
- 12. NatureStamp hereby acknowledges that there are no fatal flaws associated with the proposed BESS and should be authorized.

#### Appendix A Curriculum Vitae



Dr Bruce Scott-Shaw Hydrologist



**Carter High School** Pietermaritzburg, South Africa



The University of KwaZulu-Natal Pietermaritzburg, South Africa

BSc, BSc Honours, MSc, PhD Hydrology

#### REFERENCES

Prof. Roland Schulze Emeritus Professor Phone: +2782 5727 937 E-mail: SchulzeR@ukzn.ac.za Prof. Colin Everson Professor Phone: +2783 320 9570 E-mail: eversonc@ukzn.ac.za **Nick Davis** Hydrologist/Director (Isikhungusethu Environmental Services) Phone: +27 79 490 6963 Email: nick@isik.co.za

#### CONTACT INFORMATION

Phone: +2778 3999 139 E-mail: bruce@naturestamp.com Linkedin: www.linkedin.com/in/bruce-scottshaw-58b20231 Address: 22 Hilton Ave, Hilton, 3245, South Africa

#### ABOUT ME

I am an experienced, motivated and dynamic hydrologist, with a passion for sustainable land-use management and global change issues. Throughout my academic and consult-ing career I have mastered numerous models and tools relating to hydrology, soil science and GIS. Some of these include ACRU, SWAT, HEC-RAS, ArcGIS, WRSM, Idrisi, SEBAL, MatLab and Loggernet. I have basic programming skills on the Java and CR Basic platforms. I have vast experience in hydro-meteorological monitoring, including automatic weather stations, eddy covariance, heat pulse velocity, flow and ecological monitoring.

I completed my MSc under Prof Roland Schulze where I developed an agro-hydrological grassland biomass model for applications in management and climate change studies. Subsequently, I completed my PhD at the School of Bioresources Engineering and Environmental Hydrology (BEEH) which focused on quantifying the water-use of alien invaded riparian forests and catchments for rehabilitation programmes. I have presented my re-search around the world, where I have gained a wide network of academic contacts and experience

As a consultant, I am the director and principal hydrologist of NatureStamp (PTY) Ltd. In this capacity I undertake flood studies, calculate hydrological flows, perform general hydrological modelling, stormwater design, dam designs, wetland assessments, water quality assess-ments, groundwater studies and soil surveys.

I am affiliated to the University of KwaZulu-Natal where I am a part-time lecturer for undergraduate hydrology and dam design. I am also a post-doctoral student where I run and calibrate hydrological and soil erosion models.

#### SKILLS

Hydrological Modelling	GIS	General Computing Skills
MS Office	Field Assessments	Soil Surveys
Communication Skills	Networking	Scientific Writing

#### WORK EXPERIENCE

.....


March 2015 - Present



Director NatureStamp (PTY) Ltd.

]

Environmental consulting company, offering a range of services to promote sound natural resource management. We are a team of qualified, experienced and dedicated people, who take pride in producing a high quality of work and providing a personalized, professional service.



January 2016 - Present Hydrology Lecturer University of KwaZulu-Natal

.....

Part-time lecturer for Hydrology modules. This includes dam design, hydrology basics and modelling. I also run a Soil Water Assessment Toll (SWAT) workshop through ArcGIS to provide students with the skills to run the model for their research purposes.



٤.

Post-doctoral Researcher June 2018 – Present University of KwaZulu-Natal

Assess the impact of erosion and sediment yield from different land uses in farming and forestry systems and their effect on water resources in selected catchments of South Africa. This is done by measuring and modelling soil erosion losses under different land uses and management practices. 

Page | 21

#### PUBLICATIONS

- Paper for the 14th SANCHIAS symposium, 2009. Development and Verification of a Dynamic Grassland Biomass Model for Agrohydrological 1. Applications under Different Scenarios of Climate and Management, B.C. Scott-Shaw and R.E. Schulze
- Water-Use Dynamics of a Peat Swamp Forest and a Dune Forest in Maputaland, South Africa. A.D. Clulow, C.S. Everson, J.S. Price, G.P.W. Jewitt, 2 and B.C. Scott-Shaw. Hydrol. Earth Syst. Sci - 2013-31.
- Use of an Agrohydrological Model for Applications in Management Studies Related to Tall and Short Grassveld in South Africa. B.C. Scott-Shaw 3 and R.E. Schulze (In Press).
- Water-Use Dynamics of An Alien Invaded Riparian Forest Within the Mediterranean Climate Zone of the Western Cape, South Africa, Hydrol. 4 Earth Syst. Sci., 21, 4551-4562, 2017. Scott-Shaw, B.C., Everson, C. S., and Clulow, A. D.
- Handbook on Adaptation to Climate Change for Farmers, Officials and Others in the Agriculture Sector of South Africa (Released 2018): Short 5. and Tall Natural Grasslands in South Africa and Climate Change, B.C. Scott-Shaw and R. E. Schulze.
- Water-use dynamics of an alien invaded riparian forest within the summer rainfall zone of South Africa. Hydrol. Earth Syst. Sci., Discussion, 2018. 6. Scott-Shaw, B.C., Everson, C.S.
- 7. Rehabilitation of alien invaded riparian zones and catchments using indigenous trees: an assessment of indigenous tree water-use. Scott-Shaw B.C, Everson C.S, Geldenhuys C.J, Starke, A, Atsame-Edda A, Schutte S, R, Mupemba Mwamba. Water Research Commission Report K5/2081. 2016.
- 8. Water-efficient production methods and systems in agroforestry, woodlands and forestry plantations. Everson C.S., Scott-Shaw B.C, Kelbe, B.E, Starke, A, Pearton T, Geldenhuys, C, Vather, T, Maguire, M. Water Research Commission Report K5/2554. 2018.
- Assessing the impact of erosion and sediment yield from different land uses in farming and forestry systems and their effect on water resources in selected catchments of South Africa. This is done by measuring and modeling soil erosion losses under different land uses and management practices. Hill, T.R., Scott-Shaw B.C., Gilham, J.S., Dickey, M, Duncan, G.E., Everson, C.S., Everson, T.M., Zuma, K, Birkett, C.K., Water Research Commission Report K5/2402. 2019.
- 10. Assessment of soil erosion under rainfed sugarcane in KwaZulu-Natal, South Africa" by Abdalla, Khatab; Dickey, Matthew; Hill, Trevor; Scott-Shaw, Bruce. Natural Resources Forum. Under Review.

#### Research and Training

- Hydro-pedological characterization of degraded soils with the Institute de recherche pour le development (IRD)
- Advanced international training programme on Climate Change: Mitigation and Adaptation in Norkoping, Sweden at the Swedish Mete-orological and Hydrological Institute (SMHI) 0
- Advanced international training programme on Climate Change: Mitigation and Adaptation in Kasane, Botswana. Regional follow up course. Swedish Meteorological and Hydrological Institute (SMHI) 0
- Advanced MatLab @ course: Model building, inference and hypothesis testing in hydrology. Gabriel Lippmann, Luxembourg. April 2013.
- Advanced training course on Eddy Covariance, Mike Savage, Pietermaritzburg, 2018. õ
- Advanced training course on Surface Renewal. Mike Savage, Pietermaritzburg, 2018.
- Environmental Law training: 2014 E+EIA Regulations in Context. Shepstone & Wylie, Umhlanga. 2016. 0
- KZN Wetlands Forum Buffers workshop, Umngeni Valley, September, 2014.
- Advanced SWAT modelling course, Siem Reap, Cambodia, 2019. 0

#### Presentations/Showcase/Awards

- European Science Foundation (Amsterdam, 2010),
- COP17 (Durbon, 2011)
- World Water Forum (Marseille, 2012),
- MatLab advanced modelling (Luxembourg, 2013), ~
- World Water Week (Singapore, 2014), Forests & Water, British Colombia, (Canada, 2015),
- World Forestry Congress (Durban, 2015), Society for Ecological Restoration (Brazil, 2017). 0
- Conservation Symposium (Howick, South Africa, 2018)
- ~
- Roland Schulze award for the top third year hydrology student. Golden Key award for obtaining marks in the top 15 % of the University of KwaZulu-Natal. 0
- NRF scholarship for being a top achiever.

#### Personal Information

7th January 1986
Pietermaritzburg, South Africa
South African, UK Ancestry, Italian citizen pending (through marriage)
English
Male
Married
Two
All sports & outdoors, tree species, geology

#### Appendix B Declaration of Independence



environmental affairs

Department: Environmental Affairs REPUBLIC OF SOUTH AFRICA

## DETAILS OF THE SPECIALIST, DECLARATION OF INTEREST AND UNDERTAKING UNDER OATH

(For official use only)

File Reference Number: NEAS Reference Number: Date Received:

DEA/EIA/

Application for authorisation in terms of the National Environmental Management Act, Act No. 107 of 1998, as amended and the Environmental Impact Assessment (EIA) Regulations, 2014, as amended (the Regulations)

#### **PROJECT TITLE**

PROPOSED CONSTRUCTION AND OPERATION OF THE BATTERY ENERGY STORAGE SYSTEM (BESS) AND ASSOCIATED INFRASTRUCTURE FOR THE AUTHORISED LOERIESFONTEIN 3 PV SOLAR ENERGY FACILITY LOCATED NEAR LOERIESFONTEIN IN THE HANTAM LOCAL MUNICIPALITY, NAMAKWA DISTRICT IN THE NORTHERN CAPE PROVINCE OF SOUTH AFRICA

#### Kindly note the following:

- 1. This form must always be used for applications that must be subjected to Basic Assessment or Scoping & Environmental Impact Reporting where this Department is the Competent Authority.
- 2. This form is current as of 01 September 2018. It is the responsibility of the Applicant / Environmental Assessment Practitioner (EAP) to ascertain whether subsequent versions of the form have been published or produced by the Competent Authority. The latest available Departmental templates are available at https://www.environment.gov.za/documents/forms.
- 3. A copy of this form containing original signatures must be appended to all Draft and Final Reports submitted to the department for consideration.
- 4. All documentation delivered to the physical address contained in this form must be delivered during the official Departmental Officer Hours which is visible on the Departmental gate.
- 5. All EIA related documents (includes application forms, reports or any EIA related submissions) that are faxed; emailed; delivered to Security or placed in the Departmental Tender Box will not be accepted, only hardcopy submissions are accepted.

#### **Departmental Details**

Postal address: Department of Environmental Affairs Attention: Chief Director: Integrated Environmental Authorisations Private Bag X447 Pretoria 0001

Physical address: Department of Environmental Affairs Attention: Chief Director: Integrated Environmental Authorisations Environment House 473 Steve Biko Road Arcadia

Queries must be directed to the Directorate: Coordination, Strategic Planning and Support at:

## 1. SPECIALIST INFORMATION

Specialist Company Name:	NatureStamp (PTY) Ltd								
B-BBEE	Contribution level (indicate 1 to	4	Percenta	ge	0				
	8 or non-compliant)		Procurem	nent					
			recognitio	on					
Specialist name:	Dr Bruce Scott-Shaw								
Specialist Qualifications:	BSc, BSc Hons, MSc, PhD Hydr	ology							
Professional	KZN Wetland Forum, Natural Sc	ientist (11	8673)						
affiliation/registration:									
Physical address:	22 Hilton Avenue, Hilton, PMB								
Postal address:	22 Hilton Avenue, Hilton, PMB								
Postal code:	: 3245 Cell: 0783999139								
Telephone:	ephone: 033 343 1352 Fax:								
E-mail:	bruce@naturestamp.com								

## 2. DECLARATION BY THE SPECIALIST

#### I, Bruce Scott-Shaw, declare that -

- I act as the independent specialist in this application;
- I will perform the work relating to the application in an objective manner, even if this results in views and findings that are not favourable to the applicant;
- I declare that there are no circumstances that may compromise my objectivity in performing such work;
- I have expertise in conducting the specialist report relevant to this application, including knowledge of the Act, Regulations and any guidelines that have relevance to the proposed activity;
- I will comply with the Act, Regulations and all other applicable legislation;
- I have no, and will not engage in, conflicting interests in the undertaking of the activity;
- I undertake to disclose to the applicant and the competent authority all material information in my possession that reasonably
  has or may have the potential of influencing any decision to be taken with respect to the application by the competent
  authority; and the objectivity of any report, plan or document to be prepared by myself for submission to the competent
  authority;
- all the particulars furnished by me in this form are true and correct; and
- I realise that a false declaration is an offence in terms of regulation 48 and is punishable in terms of section 24F of the Act.

man )

Signature of the Specialist

NatureStamp (PTY) Ltd

Name of Company:

#### 09/11/2020

Date

## 3. UNDERTAKING UNDER OATH/ AFFIRMATION

I, Bruce Scott-Shaw, swear under oath / affirm that all the information submitted or to be submitted for the purposes of this application is true and correct.

Sur >

Signature of the Specialist

NatureStamp (PTY) Ltd

Name of Company

10/11/20

Date

Signature of the Commissioner of Oaths

11/11/20

Date