

GENERIC ENVIRONMENTAL MANAGEMENT PROGRAMME (EMPr) FOR THE DEVELOPMENT AND EXPANSION OF SUBSTATION INFRASTRUCTURE FOR THE TRANSMISSION AND DISTRIBUTION OF ELECTRICITY



environmental affairs

Department:
Environmental Affairs
REPUBLIC OF SOUTH AFRICA

TABLE OF CONTENTS

- INTRODUCTION 1
 - 1. Background 1
 - 2. Purpose 1
 - 3. Objective..... 1
 - 4. Scope 1
 - 5. Structure of this document 2
 - 6. Completion of part B: section 1: the pre-approved generic EMPr template..... 4
 - 7. Amendments of the impact management outcomes and impact management actions..... 4
 - 8. Documents to be submitted as part of part B: section 2 site specific information and declaration 5
 - (a) Amendments to Part B: Section 2 – site specific information and declaration 5
- PART A – GENERAL INFORMATION..... 2
 - 1. DEFINITIONS 2
 - 2. ACRONYMS and ABBREVIATIONS 3
 - 3. ROLES AND RESPONSIBILITIES FOR ENVIRONMENTAL MANAGEMENT PROGRAMME (EMPr) IMPLEMENTATION 4
 - 4. ENVIRONMENTAL DOCUMENTATION REPORTING AND COMPLIANCE 10
 - 4.1 Document control/Filing system 10
 - 4.2 Documentation to be available..... 10
 - 4.3 Weekly Environmental Checklist 10
 - 4.4 Environmental site meetings 11
 - 4.5 Required Method Statements 11
 - 4.6 Environmental Incident Log (Diary) 12
 - 4.7 Non-compliance 12
 - 4.8 Corrective action records 13
 - 4.9 Photographic record 13
 - 4.10 Complaints register 14
 - 4.11 Claims for damages 14
 - 4.12 Interactions with affected parties 14
 - 4.13 Environmental audits..... 15
 - 4.14 Final environmental audits..... 15

PART B: SECTION 1: Pre-approved generic EMPr template	16
5. IMPACT MANAGEMENT OUTCOMES AND IMPACT MANAGEMENT ACTIONS	16
5.1 Environmental awareness training	17
5.2 Site Establishment development	19
5.3 Access restricted areas	20
5.4 Access roads	20
5.5 Fencing and Gate installation.....	21
5.6 Water Supply Management	23
5.7 Storm and waste water management	24
5.8 Solid and hazardous waste management	25
5.9 Protection of watercourses and estuaries	26
5.10 Vegetation clearing	28
5.11 Protection of fauna	30
5.12 Protection of heritage resources	31
5.13 Safety of the public	32
5.14 Sanitation.....	33
5.15 Prevention of disease.....	34
5.16 Emergency procedures.....	35
5.17 Hazardous substances.....	36
5.18 Workshop, equipment maintenance and storage	39
5.19 Batching plants.....	40
5.20 Dust emissions.....	41
5.21 Blasting	42
5.22 Noise	43
5.23 Fire prevention	44
5.24 Stockpiling and stockpile areas	45
5.25 Civil works	46
5.26 Excavation of foundation, cable trenching and drainage systems	47
5.27 Installation of foundations, cable trenching and drainage systems.....	48
5.28 Installation of equipment (circuit breakers, current Transformers, Isolators, Insulators, surge arresters, voltage transformers, earth switches)	48
5.30 Cabling and Stringing	50
5.31 Testing and Commissioning (all equipment testing, earthing system, system integration)	51

5.32	Socio-economic	51
5.33	Temporary closure of site	52
5.34	Dismantling of old equipment	53
5.35	Landscaping and rehabilitation	54
6.	ACCESS TO THE GENERIC EMPr.....	56
PART B: SECTION 2		57
7.	SITE SPECIFIC INFORMATION AND DECLARATION	57
7.1	Sub-section 1: contact details and description of the project.....	57
7.2	Sub-section 2: Development footprint site map	60
7.3	Sub-section 3: Declaration	66
7.4	Sub-section 4: amendments to site specific information (Part B; section 2).....	67
PART C		68
8.	SITE SPECIFIC ENVIRONMENTAL ATTRIBUTES.....	68
8.1	Pre-Construction Phase	69
8.1.1.	Terrestrial	69
8.1.2.	Agricultural.....	70
8.1.3.	Social	70
8.1.4.	Transportation.....	71
8.2	Construction Phase.....	72
8.2.1.	Aquatic	72
8.2.2.	Terrestrial	74
8.2.3.	Avifaunal.....	74
8.2.4.	Agricultural.....	76
8.2.5.	Geotechnical.....	78
8.2.6.	Social	79
8.2.7.	Heritage	81
8.2.8.	Visual.....	82
8.2.9.	Transportation.....	83
8.2.10.	Risk	84
8.2.11.	Hydrological.....	86
8.3	Operational Phase.....	87
8.3.1.	Aquatic	87
8.3.2.	Terrestrial	90

8.3.3.	Avifaunal.....	91
8.3.4.	Agricultural.....	94
8.3.5.	Geotechnical.....	95
8.3.6.	Social	95
8.3.7.	Visual.....	96
8.3.8.	Transportation.....	96
8.3.9.	Risk	97
8.3.10.	Hydrological.....	99
8.4	Decommissioning Phase	100
8.4.1.	Aquatic	100
8.4.2.	Terrestrial	102
8.4.3.	Agriculture and Soils.....	102
8.4.4.	Geotechnical.....	104
8.4.5.	Visual.....	104
8.4.6.	Risk	105
8.4.7.	Hydrological.....	106
APPENDIX 1: METHOD STATEMENTS.....		108

List of tables

Table 1:	<i>Guide to roles and responsibilities for implementation of an EMPr</i>	4
----------	--	---

INTRODUCTION

1. Background

The National Environmental Management Act, 1998 (Act No. 107 of 1998) (NEMA) requires that an environmental management programme (EMPr) be submitted where an environmental impact assessment (EIA) has been identified as the environmental instrument to be utilised as the basis for a decision on an application for environmental authorisation (EA). The content of an EMPr must either contain the information set out in Appendix 4 of the Environmental Impact Assessment Regulations, 2014, as amended (EIA Regulations) or must be a generic EMPr relevant to an application as identified and gazetted by the Minister in a government notice. Once the Minister has identified, through a government notice that a generic EMPr is relevant to an application for EA, that generic EMPr must be applied by all parties involved in the EA process, including but not limited to the applicant and the competent authority (CA).

2. Purpose

This document constitutes a generic EMPr relevant to applications for the development or expansion of substation infrastructure for the transmission and distribution of electricity, and all listed and specified activities necessary for the realisation of such infrastructure.

3. Objective

The objective of this generic EMPr is to prescribe and pre-approve generally accepted impact management outcomes and impact management actions, which can commonly and repeatedly be used for the avoidance, management and mitigation of impacts and risks associated with the development or expansion of substation infrastructure for the transmission and distribution of electricity. The use of a generic EMPr is intended to reduce the need to prepare and review individual EMPrs for applications of a similar nature.

4. Scope

The scope of this generic EMPr applies to the development or expansion of substation infrastructure for the transmission and distribution of electricity requiring EA in terms of NEMA. This generic EMPr applies to activities requiring EA, mainly activity 11 and 47 of the Environmental Impact Assessment Regulations Listing Notice 1 of 2014, as amended, and activity 9 of the Environmental Impact Assessment Regulations Listing Notice 2 of 2014, as amended, and all associated listed or specified activities necessary for the realization of such infrastructure.

5. Structure of this document

This document is structured in three parts with an Appendix as indicated in the table below:

Part	Section	Heading	Content
A		Provides general guidance and information and is not legally binding	Definitions, acronyms, roles & responsibilities and documentation and reporting.
B	1	Pre-approved generic EMPr template	<p>Contains generally accepted impact management outcomes and impact management actions required for the avoidance, management and mitigation of impacts and risks associated with the development or expansion of substation infrastructure for the transmission and distribution of electricity, which are presented in the form of a template that has been pre-approved.</p> <p>The template in this section is to be completed by the contractor, with each completed page signed and dated by the holder of the EA prior to commencement of the activity.</p> <p>Where an impact management outcome is not relevant, the words "not applicable" can be inserted in the template under the "responsible persons" column.</p> <p>Once completed and signed, the template represents the EMPr for the activity approved by the CA and is legally binding. The template is not required to be submitted to the CA as once the generic EMPr is gazetted for implementation, it has been approved by the CA.</p> <p>To allow interested and affected parties access to the pre-approved EMPr template for consideration through the decision-making process, the EAP on behalf of the applicant /proponent must make the hard copy of this EMPr available at a public location and where the applicant has a website, the EMPr should also be made available on such publicly accessible website.</p>
	2	Site specific information	Contains preliminary infrastructure layout and a declaration that the applicant/holder of the EA

Part	Section	Heading	Content
			<p>will comply with the pre-approved generic EMPr template contained in <u>Part B: Section 1</u>, and understands that the impact management outcomes and impact management actions are legally binding. The preliminary infrastructure layout must be finalized to inform the final EMPr that is to be submitted with the basic assessment report (BAR) or environmental impact assessment report (EIAR), ensuring that all impact management outcomes and impact management actions have been either pre-approved or approved in terms of <u>Part C</u>.</p> <p>This section must be submitted to the CA together with the final BAR or EIAR. The information submitted to the CA will be considered to be incomplete should a signed copy of <u>Part B: section 2</u> not be submitted. Once approved, this Section forms part of the EMPr for the development and is legally binding.</p>
C		Site specific sensitivities/ attributes	<p>If any specific environmental sensitivities/ attributes are present on the site which require site specific impact management outcomes and impact management actions, not included in the pre-approved generic EMPr, to manage impacts, these specific impact management outcomes and impact management actions must be included in this section. These specific environmental attributes must be referenced spatially and impact management outcomes and impact management actions must be provided. These specific impact management outcomes and impact management actions must be presented in the format of the pre-approved EMPr template (<u>Part B: section 1</u>)</p> <p>This section will not be required should the site contain no specific environmental sensitivities or attributes. However, if <u>Part C</u> is applicable to the site, it is required to be submitted together with the BAR or EIAR, for consideration of, and decision on, the application for EA. The information in this section must be prepared by an EAP and must contain his/her name and expertise including a curriculum vitae. Once</p>

Part	Section	Heading	Content
			<p>approved, Part C forms part of the EMPr for the site and is legally binding.</p> <p>This section applies only to additional impact management outcomes and impact management actions that are necessary for the avoidance, management and mitigation of impacts and risks associated with the specific development or expansion and which are not already included in <u>Part B: section 1</u>.</p>
		Appendix 1	<p>Contains the method statements to be prepared prior to commencement of the activity. The method statements are not required to be submitted to the competent authority.</p>

6. Completion of part B: section 1: the pre-approved generic EMPr template

The template is to be completed prior to commencement of the activity, by providing the following information for each environmental impact management action:

- For implementation
 - a 'responsible person',
 - a method for implementation,
 - a timeframe for implementation
- For monitoring
 - a responsible person
 - frequency
 - evidence of compliance.

The completed template must be signed and dated by the holder of the EA prior to commencement of the activity. The method statements prepared and agreed to by the holder of the EA must be appended to the template as Appendix 1. Each method statement must be signed and dated on each page by the holder of the EA. This template once signed and dated is legally binding. The holder of the EA will remain responsible for its implementation.

7. Amendments of the impact management outcomes and impact management actions

Once the activity has commenced, a holder of an EA may make amendments to the impact management outcomes and impact management actions in the following manner:

- Amendment of the impact management outcomes: in line with the process contemplated in Regulation 37 of the EIA Regulations; and
- Amendment of the impact management actions: in line with the process contemplated in Regulation 36 of the EIA Regulations.

8. Documents to be submitted as part of part B: section 2 site specific information and declaration

Part B: Section 2 has three distinct sub-sections. The first and third sub-sections are in a template format. Sub-section two requires a map to be produced.

Sub-section 1 contains the project name, the applicant's name and contact details, the site information, which includes coordinates of the property or farm in which the proposed substation infrastructure is proposed as well as the 21-digit Surveyor General code of each cadastral land parcel and, where available, the farm name.

Sub-section 2 is to be prepared by an EAP and must contain his/her name and expertise including a curriculum vitae. This sub-section must include a map of the site sensitivity overlaid with the preliminary infrastructure layout using the national web based environmental screening tool, when available for compulsory use at: <https://screening.environment.gov.za/screeningtool>. The sensitivity map shall identify the nature of each sensitive feature e.g. threatened plant species, archaeological site, etc. Sensitivity maps shall identify features both within the planned working area and any known sensitive features and within 50 m from the development footprint.

Sub-section 3 is the declaration that the applicant (s)/proponent (s) or holder of the EA in the case of a change of ownership must complete which confirms that the applicant/EA holder will comply with the pre-approved 'generic EMPr' template in Section 1 and understands that the impact management outcomes and impact management actions are legally binding.

(a) Amendments to Part B: Section 2 – site specific information and declaration

Should the EA be transferred, Part B: Section 2 must be completed by the new applicant/proponent and submitted with the application for an amendment of the EA in terms of regulations 29 or 31 of the EIA Regulations, whichever applies. The information submitted as part of such an application for an amendment to an EA will be considered to be incomplete should a signed copy of Part B: Section 2 not be submitted. Once approved, Part B: Section 2 forms part of the EMPr for the development and the EMPr becomes legally binding to the new EA holder.

PART A – GENERAL INFORMATION

1. DEFINITIONS

In this EMPr any word or expression to which a meaning has been assigned in the NEMA or EIA Regulations has that meaning, and unless the context requires otherwise –

"clearing" means the clearing and removal of vegetation, whether partially or in whole, including trees and shrubs, as specified;

"construction camp" is the area designated for key construction infrastructure and services, including but not limited to offices, overnight vehicle parking areas, stores, the workshop, stockpile and lay down areas, hazardous storage areas (including fuels), the batching plant (if one is located at the construction camp), designated access routes, equipment cleaning areas and the placement of staff accommodation, cooking and ablution facilities, waste and wastewater management;

"contractor" - The Contractor has overall responsibility for ensuring that all work, activities, and actions linked to the delivery of the contract, are in line with the Environmental Management Programme and that Method Statements are implemented as described.

"hazardous substance" is a substance governed by the Hazardous Substances Act, 1973 (Act No. 15 of 1973) as well as the Hazardous Chemical and Substances Regulations, 1995;

"method statement" means a written submission by the Contractor to the Project Manager in response to this EMPr or a request by the Project Manager and ECO. The method statement must set out the equipment, materials, labour and method(s) the Contractor proposes using to carry out an activity identified by the Project Manager when requesting the Method Statement. This must be done in such detail that the Project Manager and ECO is able to assess whether the Contractor's proposal is in accordance with this specification and/or will produce results in accordance with this specification;

The method statement must cover as a minimum applicable details with regard to:

- (i) Construction procedures;
- (ii) Plant, materials and equipment to be used;
- (iii) Transporting the equipment to and from site;
- (iv) How the plant/ material/ equipment will be moved while on site;
- (v) How and where the plant/ material/ equipment will be stored;
- (vi) The containment (or action to be taken if containment is not possible) of leaks or spills of any liquid or material that may occur;
- (vii) Timing and location of activities;
- (viii) Compliance/ non-compliance; and
- (ix) Any other information deemed necessary by the Project Manager.

"slope" means the inclination of a surface expressed as one unit of rise or fall for so many horizontal units;

“solid waste” means all solid waste, including construction debris, hazardous waste, excess cement/ concrete, wrapping materials, timber, cans, drums, wire, nails, food and domestic waste (e.g. plastic packets and wrappers);

“spoil” means excavated material which is unsuitable for use as material in the construction works or is material which is surplus to the requirements of the construction works;

“topsoil” means a varying depth (up to 300 mm) of the soil profile irrespective of the fertility, appearance, structure, agricultural potential, fertility and composition of the soil;

“works” means the works to be executed in terms of the Contract

2. ACRONYMS and ABBREVIATIONS

CA	Competent Authority
cEO	Contractors Environmental Officer
dEO	Developer Environmental Officer
DPM	Developer Project Manager
DSS	Developer Site Supervisor
EAR	Environmental Audit Report
ECA	Environmental Conservation Act No. 73 of 1989
ECO	Environmental Control Officer
EA	Environmental Authorisation
EIA	Environmental Impact Assessment
ERAP	Emergency Response Action Plan
EMPr	Environmental Management Programme Report
EAP	Environmental Assessment Practitioner
FPA	Fire Protection Agency
HCS	Hazardous chemical Substance
NEMA	National Environmental Management Act, 1998 (Act No. 107 of 1998)
NEMBA	National Environmental Management: Biodiversity Act ,2004 (Act No. 10 of 2004)
NEMWA	National Environmental Management: Waste Act, 2008 (Act No. 59 of 2008)
MSDS	Material Safety Data Sheet
RI&AP's	Registered Interested and affected parties

3. ROLES AND RESPONSIBILITIES FOR ENVIRONMENTAL MANAGEMENT PROGRAMME (EMPr) IMPLEMENTATION

The effective implementation of this generic EMPr is dependent on established and clear roles, responsibilities and reporting lines within an institutional framework. This section of the EMPr gives guidance to the various environmental roles and reporting lines, however, project specific requirements will ultimately determine the need for the appointment of specific person(s) to undertake specific roles and or responsibilities. As such, it must be noted that in the event that no specific person, for example, an environmental control officer (ECO) is appointed, the holder of the EA remains responsible for ensuring that the duties indicated in this document for action by the ECO are undertaken.

Table 1: Guide to roles and responsibilities for implementation of an EMPr

Responsible Person(s)	Role and Responsibilities
Developer's Project Manager (DPM)	<p><u>Role</u></p> <p>The Project Developer is accountable for ensuring compliance with the EMPr and any conditions of approval from the competent authority (CA). Where required, an environmental control officer (ECO) must be contracted by the Project Developer to objectively monitor the implementation of the EMPr according to relevant environmental legislation, and the conditions of the environmental authorisation (EA). The Project Developer is further responsible for providing and giving mandate to enable the ECO to perform responsibilities, and he must ensure that the ECO is integrated as part of the project team while remaining independent.</p> <p><u>Responsibilities</u></p> <ul style="list-style-type: none"> - Be fully conversant with the conditions of the EA; - Ensure that all stipulations within the EMPr are communicated and adhered to by the Developer and its Contractor(s); - Issuing of site instructions to the Contractor for corrective actions required; - Monitor the implementation of the EMPr throughout the project by means of site inspections and meetings. Overall management of the project and EMPr implementation; and - Ensure that periodic environmental performance audits are undertaken on the project implementation.

Responsible Person(s)	Role and Responsibilities
Developer Site Supervisor (DSS)	<p><u>Role</u> The DSS reports directly to the DPM, oversees site works, liaises with the contractor(s) and the ECO. The DSS is responsible for the day to day implementation of the EMPr and for ensuring the compliance of all contractors with the conditions and requirements stipulated in the EMPr.</p> <p><u>Responsibilities</u></p> <ul style="list-style-type: none"> - Ensure that all contractors identify a contractor's Environmental Officer (cEO); - Must be fully conversant with the conditions of the EA. Oversees site works, liaison with Contractor, DPM and ECO; - Must ensure that all landowners have the relevant contact details of the site staff, ECO and cEO; - Issuing of site instructions to the Contractor for corrective actions required; - Will issue all non-compliances to contractors; and - Ratify the Monthly Environmental Report.
Environmental Control Officer (ECO)	<p><u>Role</u> The ECO should have appropriate training and experience in the implementation of environmental management specifications. The primary role of the ECO is to act as an independent quality controller and monitoring agent regarding all environmental concerns and associated environmental impacts. In this respect, the ECO is to conduct periodic site inspections, attend regular site meetings, pre-empt problems and suggest mitigation and be available to advise on incidental issues that arise. The ECO is also required to conduct compliance audits, verifying the monitoring reports submitted by the cEO. The ECO provides feedback to the DSS and Project Manager regarding all environmental matters. The Contractor, cEO and dEO are answerable to the Environmental Control Officer for non-compliance with the Performance Specifications as set out in the EA and EMPr.</p> <p>The ECO provides feedback to the DSS and Project Manager, who in turn reports back to the Contractor and potential and Registered Interested & Affected Parties' (RI&AP's), as required. Issues of non-compliance raised by the ECO must be taken up by the Project Manager, and resolved with the Contractor as per the conditions of his contract. Decisions regarding environmental procedures, specifications and requirements which have a cost implication (i.e. those that are deemed to be a variation, not allowed for in the</p>

Responsible Person(s)	Role and Responsibilities
	<p>Performance Specification) must be endorsed by the Project Manager. The ECO must also, as specified by the EA, report to the relevant CA as and when required.</p> <p><u>Responsibilities</u></p> <p>The responsibilities of the ECO will include the following:</p> <ul style="list-style-type: none"> - Be aware of the findings and conclusions of all EA related to the development; - Be familiar with the recommendations and mitigation measures of this EMPr; - Be conversant with relevant environmental legislation, policies and procedures, and ensure compliance with them; - Undertake regular and comprehensive site inspections / audits of the construction site according to the generic EMPr and applicable licenses in order to monitor compliance as required; - Educate the construction team about the management measures contained in the EMPr and environmental licenses; - Compilation and administration of an environmental monitoring plan to ensure that the environmental management measures are implemented and are effective; - Monitoring the performance of the Contractors and ensuring compliance with the EMPr and associated Method Statements; - In consultation with the Developer Site Supervisor order the removal of person(s) and/or equipment which are in contravention of the specifications of the EMPr and/or environmental licenses; - Liaison between the DPM, Contractors, authorities and other lead stakeholders on all environmental concerns; - Compile a regular environmental audit report highlighting any non-compliance issues as well as satisfactory or exceptional compliance with the EMPr; - Validating the regular site inspection reports, which are to be prepared by the contractor Environmental Officer (cEO); - Checking the cEO's record of environmental incidents (spills, impacts, legal transgressions etc.) as well as corrective and preventive actions taken; - Checking the cEO's public complaints register in which all complaints are recorded, as well as action taken;

Responsible Person(s)	Role and Responsibilities
	<ul style="list-style-type: none"> - Assisting in the resolution of conflicts; - Facilitate training for all personnel on the site – this may range from carrying out the training, to reviewing the training programmes of the Contractor; - In case of non-compliances, the ECO must first communicate this to the Senior Site Supervisor, who has the power to ensure this matter is addressed. Should no action or insufficient action be taken, the ECO may report this matter to the authorities as non-compliance; - Maintenance, update and review of the EMPr; - Communication of all modifications to the EMPr to the relevant stakeholders.
<p>developer Environmental Officer (dEO)</p>	<p><u>Role</u></p> <p>The dEOs will report to the Project Manager and are responsible for implementation of the EMPr, environmental monitoring and reporting, providing environmental input to the Project Manager and Contractor's Manager, liaising with contractors and the landowners as well as a range of environmental coordination responsibilities.</p> <p><u>Responsibilities</u></p> <ul style="list-style-type: none"> - Be fully conversant with the EMPr; - Be familiar with the recommendations and mitigation measures of this EMPr, and implement these measures; - Ensure that all stipulations within the EMPr are communicated and adhered to by the Employees, Contractor(s) - Confine the development site to the demarcated area; - Conduct environmental internal audits with regards to EMPr and authorisation compliance (on cEO); - Assist the contractors in addressing environmental challenges on site; - Assist in incident management: - Reporting environmental incidents to developer and ensuring that corrective action is taken, and lessons learnt shared; - Assist the contractor in investigating environmental incidents and compile investigation reports; - Follow-up on pre-warnings, defects, non-conformance reports; - Measure and communicate environmental performance to the Contractor;

Responsible Person(s)	Role and Responsibilities
	<ul style="list-style-type: none"> - Conduct environmental awareness training on site together with ECO and cEO; - Ensure that the necessary legal permits and / or licenses are in place and up to date; - Acting as Developer's Environmental Representative on site and work together with the ECO and contractor;
Contractor	<p><u>Role</u></p> <p>The Contractor appoints the cEO and has overall responsibility for ensuring that all work, activities, and actions linked to the delivery of the contract are in line with the EMPr and that Method Statements are implemented as described. External contractors must ensure compliance with this EMPr while performing the onsite activities as per their contract with the Project Developer. The contractors are required, where specified, to provide Method Statements setting out in detail how the impact management actions contained in the EMPr will be implemented during the development or expansion of substation infrastructure for the transmission and distribution of electricity activities.</p> <p><u>Responsibilities</u></p> <ul style="list-style-type: none"> - project delivery and quality control for the development services as per appointment; - employ a suitably qualified person to monitor and report to the Project Developer's appointed person on the daily activities on-site during the construction period; - ensure that safe, environmentally acceptable working methods and practices are implemented and that equipment is properly operated and maintained, to facilitate proper access and enable any operation to be carried out safely; - attend on site meeting(s) prior to the commencement of activities to confirm the procedure and designated activity zones; - ensure that contractors' staff repair, at their own cost, any environmental damage as a result of a contravention of the specifications contained in EMPr, to the satisfaction of the ECO.
contractor Environmental Officer (cEO)	<p><u>Role</u></p> <p>Each Contractor affected by the EMPr should appoint a cEO, who is responsible for the on-site implementation of the EMPr (or relevant sections of the EMPr). The Contractor's representative can be the site agent; site engineer; a dedicated environmental officer; or an independent consultant. The Contractor must ensure that the Contractor's Representative is suitably qualified to perform the necessary tasks and is</p>

Responsible Person(s)	Role and Responsibilities
	<p>appointed at a level such that she/he can interact effectively with other site Contractors, labourers, the Environmental Control Officer and the public. As a minimum the cEO shall meet the following criteria:</p> <p><u>Responsibilities</u></p> <ul style="list-style-type: none"> - Be on site throughout the duration of the project and be dedicated to the project; - Ensure all their staff are aware of the environmental requirements, conditions and constraints with respect to all of their activities on site; - Implementing the environmental conditions, guidelines and requirements as stipulated within the EA, EMPr and Method Statements; - Attend the Environmental Site Meeting; - Undertaking corrective actions where non-compliances are registered within the stipulated timeframes; - Report back formally on the completion of corrective actions; - Assist the ECO in maintaining all the site documentation; - Prepare the site inspection reports and corrective action reports for submission to the ECO; - Assist the ECO with the preparing of the monthly report; and - Where more than one Contractor is undertaking work on site, each company appointed as a Contractor will appoint a cEO representing that company.

4. ENVIRONMENTAL DOCUMENTATION REPORTING AND COMPLIANCE

To ensure accountable and demonstrated implementation of the EMPr, a number of reporting systems, documentation controls and compliance mechanisms must be in place for all substation infrastructure projects as a minimum requirement.

4.1 Document control/Filing system

The holder of the EA is solely responsible for the upkeep and management of the EMPr file. As a minimum, all documentation detailed below will be stored in the EMPr file. A hard copy of all documentation shall be filed, while an electronic copy may be kept where relevant. A duplicate file will be maintained in the office of the DSS (where applicable). This duplicate file must remain current and up-to-date. The filing system must be updated and relevant documents added as required. The EMPr file must be made available at all times on request by the CA or other relevant authorities. The EMPr file will form part of any environmental audits undertaken as prescribed in the EIA Regulations.

4.2 Documentation to be available

At the outset of the project the following preliminary list of documents shall be placed in the filing system and be accessible at all times:

- Full copy of the signed EA from the CA in terms of NEMA, granting approval for the development or expansion;
 - Copy of the generic and site specific EMPr as well as any amendments thereof;
- Copy of declaration of implementing generic EMPr and subsequent approval of site specific EMPr and amendments thereof;
 - All method statements;
 - Completed environmental checklists;
 - Minutes and attendance register of environmental site meetings;
 - An up-to-date environmental incident log;
 - A copy of all instructions or directives issued;
- A copy of all corrective actions signed off. The corrective actions must be filed in such a way that a clear reference is made to the non-compliance record;
 - Complaints register.

4.3 Weekly Environmental Checklist

The ECOs are required to complete a Weekly Environmental Checklist, the format of which is to be agreed prior to commencement of the activity. The ECOs are required to sign and date the checklist, retain a copy in the EMPr file and submit a copy of the completed checklist to the DSS on a weekly basis.

The checklists will form the basis for the Monthly Environmental Reports. Copies of all completed checklists will be attached as Annexures to the Environmental Audit Report as required in terms of the EIA Regulations.

4.4 Environmental site meetings

Minutes of the environmental site meetings shall be kept. The minutes must include an attendance register and will be attached to the Monthly Report that is distributed to attendees. Each set of minutes must clearly record "Matters for Attention" that will be reviewed at the next meeting.

4.5 Required Method Statements

The method statement will be done in such detail that the ECOs are enabled to assess whether the contractor's proposal is in accordance with the EMPr.

The method statement must cover applicable details with regard to:

- development procedures;
- materials and equipment to be used;
- getting the equipment to and from site;
- how the equipment/ material will be moved while on site;
- how and where material will be stored;
- the containment (or action to be taken if containment is not possible) of leaks or spills of any liquid or material that may occur;
- timing and location of activities;
- compliance/ non-compliance with the EMPr; and
- any other information deemed necessary by the ECOs.

Unless indicated otherwise by the Project Manager, the Contractor shall provide the following method statements to the Project Manager no less than 14 days prior to the commencement date of the activity:

- Site establishment – Camps, Lay-down or storage areas, satellite camps, infrastructure;
- Batch plants;
- Workshop or plant servicing;
- Handling, transport and storage of Hazardous Chemical Substance's;
- Vegetation management – Protected, clearing, aliens, felling;
- Access management – Roads, gates, crossings etc.;
- Fire plan;
- Waste management – transport, storage, segregation, classification, disposal (all waste streams);
- Social interaction – complaints management, compensation claims, access to properties etc.;
- Water – use (source, abstraction and disposal), access and all related information, crossings and mitigation;
- Emergency preparedness – Spills, training, other environmental emergencies;
- Dust and noise management methodologies;
- Fauna interaction and risk management – only if the risk was identified – wildlife interaction especially on game farms; and
- Heritage and palaeontology management.

The ECOs shall monitor and ensure that the contractors perform in accordance with these method statements. Completed and agreed method statements between the holder of the EA and the contractor shall be captured in Appendix 1.

4.6 Environmental Incident Log (Diary)

The ECOs are required to maintain an up-to-date and current Environmental Incident Log (environmental diary). The Environmental Incident Log is a means to record all environmental incidents and/or all non-compliance notice would not be issued. An environmental incident is defined as:

- Any deviation from the listed impact management actions (listed in this EMPr) that may be addressed immediately by the ECOs. (For example a contractor's staff member littering or a drip tray that has not been emptied);
- Any environmental impact resulting from an action or activity by a contractor in contravention of the environmental stipulations and guidelines listed in the EMPr which as a single event would have a minor impact but which if cumulative and continuous would have a significant effect (for example no toilet paper available in the ablutions for an afternoon); and
- General environmental information such as road kills or injured wildlife.

The ECOs are to record all environmental incidents in the Environmental Incident Log. All incidents regardless of severity must be reported to the Developer. The Log is to be kept in the EMPr file and at a minimum the following will be recorded for each environmental incident:

- The date and time of the incident;
- Description of the incident;
- The name of the Contractor responsible;
- The incident must be listed as significant or minor;
- If the incident is listed as significant, a non-compliance notice must be issued, and recorded in the log;
- Remedial or corrective action taken to mitigate the incident; and
- Record of repeat minor offences by the same contractor or staff member.

The Environmental Incident Log will be captured in the EAR.

4.7 Non-compliance

A non-compliance notice will be issued to the responsible contractor by the ECOs via the DSS or Project Manager. The non-compliance notice will be issued in writing; a copy filed in the EMPr file and will at a minimum include the following:

- Time and date of the non-compliance;
- Name of the contractor responsible;
- Nature and description of the non-compliance;
- Recommended / required corrective action; and
- Date by which the corrective action to be completed.
- The contractors shall act immediately when a notice of non-compliance is received and correct whatever is the cause for the issuing of the notice. Complaints received regarding activities on the development site pertaining to the environment shall be

recorded in a dedicated register and the response noted with the date and action taken. The ECO should be made aware of any complaints. Any non-compliance with the agreed procedures of the EMPr is a transgression of the various statutes and laws that define the manner by which the environment is managed. Failure to redress the cause shall be reported to the relevant CA for them to deal with the transgression, as it deems fit. The contractor is deemed not to have complied with the EMPr if, inter alia, There is a deviation from the environmental conditions, impact management outcomes and impact management actions activities, as approved in generic and site specific EMPr as relevant as set out in the EMPr, which deviation has, or may cause, an environmental impact.

4.8 Corrective action records

For each non-compliance notice issued, a documented corrective action must be recorded. On receiving a non-compliance notice from the DSS, the contractor's cEO will ensure that the corrective actions required take place within the stipulated timeframe. On completion of the corrective action the cEO is to issue a Corrective Action Report in writing to the ECOs. If satisfied that the corrective action has been completed, the ECOs are to sign-off on the Corrective Action Report, and attach the report to the non-compliance notice in the EMPr file. A corrective action is considered complete once the report has signed off by the ECOs.

4.9 Photographic record

A digital photographic record will be kept. The photographic record will be used to show before, during and post rehabilitation evidence of the project as well used in cases of damages claims if they arise. Each image must be dated and a brief description note attached.

The Contractor shall:

1. Allow the ECOs access to take photographs of all areas, activities and actions.

The ECOs shall keep an electronic database of photographic records which will include:

1. Pictures of all areas designated as work areas, camp areas, development sites and storage areas taken before these areas are set up;
2. All bunding and fencing;
3. Road conditions and road verges;
4. Condition of all farm fences;
5. Topsoil storage areas;
6. All areas to be cordoned off during construction;
7. Waste management sites;
8. Ablution facilities (inside and out);
9. Any non-conformances deemed to be "significant";
10. All completed corrective actions for non-compliances;
11. All required signage;
12. Photographic recordings of incidents;
13. All areas before, during and post rehabilitation; and
14. Include relevant photographs in the Final Environmental Audit Report.

4.10 Complaints register

The ECOs shall keep a current and up-to-date complaints register. The complaints register is to be a record of all complaints received from communities, stakeholders and individuals. The Complaints Record shall:

1. Record the name and contact details of the complainant;
2. Record the time and date of the complaint;
3. Contain a detailed description of the complaint;
4. Where relevant and appropriate, contain photographic evidence of the complaint or damage (ECOs to take relevant photographs); and
5. Contain a copy of the ECOs written response to each complaint received and keep a record of any further correspondence with the complainant. The ECO's written response will include a description of any corrective action to be taken and must be signed by the Contractor, ECO and affected party. Where a damage claim is issued by the complainant, the ECOs shall respond as described in **(section 4.11)** below.

4.11 Claims for damages

In the event that a Claim for Damages is submitted by a community, landowner or individual, the ECOs shall:

1. Record the full detail of the complaint as described in **(section 4.10)** above;
2. The DPM will evaluate the claim and associated damage and submit the evaluation to the Senior Site Representative for approval;
3. Following consideration by the DPM, the claim is to be resolved and settled immediately, or the reason for not accepting the claim communicated in writing to the claimant. Should the claimant not accept this, the ECO shall, in writing report the incident to the Developer's negotiator and legal department; and
4. A formal record of the response by the ECOs to the claimant as well as the rectification of the method of making payments not amount will be recorded in the EMPr file.

4.12 Interactions with affected parties

Open, transparent and good relations with affected landowners, communities and regional staff are an essential aspect to the successful management and mitigation of environmental impacts.

The ECOs shall:

1. Ensure that all queries, complaints and claims are dealt within an agreed timeframe;
2. Ensure that any or all agreements are documented, signed by all parties and a record of the agreement kept in the EMPr file;
3. Ensure that a complaints telephone numbers are made available to all landowners and affected parties; and
4. Ensure that contact with affected parties is courteous at all times;

4.13 Environmental audits

Internal environmental audits of the activity and implementation of the EMPr must be undertaken. The findings and outcomes included in the EMPr file and submitted to the CA at intervals as indicated in the EA.

The ECOs must prepare a monthly EAR. The report will be tabled as the key point on the agenda of the Environmental Site Meeting. The Report is submitted for acceptance at the meeting and the final report will be circulated to the Project Manager and filed in the EMPr file. At a frequency determined by the EA, the ECOs shall submit the monthly reports to the CA. At a minimum the monthly report is to cover the following:

- Weekly Environmental Checklists;
- Deviations and non-compliances with the checklists;
- Non-compliances issued;
- Completed and reported corrective actions;
- Environmental Monitoring;
- General environmental findings and actions; and
- Minutes of the Bi-monthly Environmental Site Meetings.

4.14 Final environmental audits

On final completion of the rehabilitation and/or requirements of the EA a final EAR is to be prepared and submitted to the CA. The EAR must comply with Appendix 7 of the EIA Regulations.

PART B: SECTION 1: Pre-approved generic EMPr template

5. IMPACT MANAGEMENT OUTCOMES AND IMPACT MANAGEMENT ACTIONS

This section provides a pre-approved generic EMPr template with aspects that are common to the development of substation infrastructure for the transmission and distribution of electricity. There is a list of aspects identified for the development or expansion of substation infrastructure for the transmission and distribution of electricity, and for each aspect a set of prescribed impact management outcomes and associated impact management actions have been identified. Holders of EAs are responsible to ensure the implementation of these outcomes and actions for all projects as a minimum requirement, in order to mitigate the impact of such aspects identified for the development or expansion of substation infrastructure for the transmission and distribution of electricity.

The template provided below is to be completed by providing the information under each heading for each environmental impact management action.

The completed template must be signed and dated on each page by both the contractor and the holder of the EA prior to commencement of the activity. The method statements prepared and agreed to by the holder of the EA must be appended to the template as Appendix 1. Each method statement must also be duly signed and dated on each page by the contractor and the holder of the EA. This template, once signed and dated, is legally binding. The holder of the EA will remain responsible for its implementation.

5.1 Environmental awareness training

Impact management outcome: All onsite staff are aware and understands the individual responsibilities in terms of this EMP.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - All staff must receive environmental awareness training prior to commencement of the activities; - The Contractor must allow for sufficient sessions to train all personnel with no more than 20 personnel attending each course; - Refresher environmental awareness training is available as and when required; - All staff are aware of the conditions and controls linked to the EA and within the EMP and made aware of their individual roles and responsibilities in achieving compliance with the EA and EMP; - The Contractor must erect and maintain information posters at key locations on site, and the posters must include the following information as a minimum: <ul style="list-style-type: none"> a) Safety notifications; and b) No littering. - Environmental awareness training must include as a minimum the following: <ul style="list-style-type: none"> a) Description of significant environmental impacts, actual or potential, related to their work activities; 	ECO and cEO	Environmental Induction training; Toolbox talks; other pertinent training aids	Initially prior to construction commencing ECO to induct Construction Management and cEO, and thereafter repeated for all new employees and yearly. Toolbox talks to be presented weekly	ECO	Monthly	Signed induction and toolbox talk, or training registers

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<p>b) Mitigation measures to be implemented when carrying out specific activities;</p> <p>c) Emergency preparedness and response procedures;</p> <p>d) Emergency procedures;</p> <p>e) Procedures to be followed when working near or within sensitive areas;</p> <p>f) Wastewater management procedures;</p> <p>g) Water usage and conservation;</p> <p>h) Solid waste management procedures;</p> <p>i) Sanitation procedures;</p> <p>j) Fire prevention; and</p> <p>k) Disease prevention.</p> <p>– A record of all environmental awareness training courses undertaken as part of the EMPr must be available;</p> <p>– Educate workers on the dangers of open and/or unattended fires;</p> <p>– A staff attendance register of all staff to have received environmental awareness training must be available.</p> <p>– Course material must be available and presented in appropriate languages that all staff can understand.</p>						

5.2 Site Establishment development

Impact management outcome: Impacts on the environment are minimised during site establishment and the development footprint are kept to demarcated development area.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> – A method statement must be provided by the contractor prior to any onsite activity that includes the layout of the construction camp in the form of a plan showing the location of key infrastructure and services (where applicable), including but not limited to offices, overnight vehicle parking areas, stores, the workshop, stockpile and lay down areas, hazardous materials storage areas (including fuels), the batching plant (if one is located at the construction camp), designated access routes, equipment cleaning areas and the placement of staff accommodation, cooking and ablution facilities, waste and wastewater management; – Location of camps must be within approved area to ensure that the site does not impact on sensitive areas identified in the environmental assessment or site walk through; – Sites must be located where possible on previously disturbed areas; – The camp must be fenced in accordance with Section 5.5: Fencing and gate installation; and – The use of existing accommodation for contractor staff, where possible, is encouraged. 	Contractor	Method Statement compilation and communication of Method Statements to employees. Use of EIA and Specialist Studies to locate site camps	Prior to construction	ECO	Monthly	Signed Method Statements; signed proof of communication register; Liaison with ECO regarding site camp placement

5.3 Access restricted areas

Impact management outcome: Access to restricted areas prevented.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> – Identification of access restricted areas is to be informed by the environmental assessment, site walk through and any additional areas identified during development; – Erect, demarcate and maintain a temporary barrier with clear signage around the perimeter of any access restricted area, colour coding could be used if appropriate; and – Unauthorised access and development related activity inside access restricted areas is prohibited. 	Contractor	Use of EIA/BA and Specialist Studies to locate sensitive areas and 'no-go' areas	Prior to construction in new areas	ECO	Monthly	Contractor compliance with sensitive areas and 'no-go' areas identified in EIA/BA and Specialist Studies

5.4 Access roads

Impact management outcome: Minimise impact to the environment through the planned and restricted movement of vehicles on site.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance

<ul style="list-style-type: none"> - An access agreement must be formalised and signed by the DPM, Contractor and landowner before commencing with the activities; - All private roads used for access to the servitude must be maintained and upon completion of the works, be left in at least the original condition - All contractors must be made aware of all these access routes. - Any access route deviation from that in the written agreement must be closed and re-vegetated immediately, at the contractor's expense; - Maximum use of both existing servitudes and existing roads must be made to minimize further disturbance through the development of new roads; - In circumstances where private roads must be used, the condition of the said roads must be recorded in accordance with section 4.9: photographic record; prior to use and the condition thereof agreed by the landowner, the DPM, and the contractor; - Access roads in flattish areas must follow fence lines and tree belts to avoid fragmentation of vegetated areas or croplands - Access roads must only be developed on a pre-planned and approved roads. 	Contractor	Implementation of mitigation measures	Ongoing.	ECO	Monthly	Signed access agreements and maintenance of access roads
---	-------------------	--	-----------------	------------	----------------	---

5.5 Fencing and Gate installation

Impact management outcome: Minimise impact to the environment and ensure safe and controlled access to the site through the erection of fencing and gates where required.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - Use existing gates provided to gain access to all parts of the area authorised for development, where possible; - Existing and new gates to be recorded and documented in accordance with section 4.9: photographic record; - All gates must be fitted with locks and be kept locked at all times during the development phase, unless otherwise agreed with the landowner; - At points where the line crosses a fence in which there is no suitable gate within the extent of the line servitude, on the instruction of the DPM, a gate must be installed at the approval of the landowner; - Care must be taken that the gates must be so erected that there is a gap of no more than 100 mm between the bottom of the gate and the ground; - Where gates are installed in jackal proof fencing, a suitable reinforced concrete sill must be provided beneath the gate; - Original tension must be maintained in the fence wires; - All gates installed in electrified fencing must be re-electrified; - All demarcation fencing and barriers must be maintained in good working order for the duration of the development activities; - Fencing must be erected around the camp, batching plants, hazardous storage areas, and all designated access restricted areas, where applicable; - Any temporary fencing to restrict the movement of life-stock must only be erected with the permission of the land owner. 	Contractor and Applicant	Implementation of the mitigation measures	Ongoing.	ECO	Monthly	Site observation; public complaints register

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - All fencing must be developed of high quality material bearing the SABS mark; - The use of razor wire as fencing must be avoided; - Fenced areas with gate access must remain locked after hours, during weekends and on holidays if staff is away from site. Site security will be required at all times; - On completion of the development phase all temporary fences are to be removed; - The contractor must ensure that all fence uprights are appropriately removed, ensuring that no uprights are cut at ground level but rather removed completely. 						

5.6 Water Supply Management

Impact management outcome: Undertake responsible water usage.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - All abstraction points or bore holes must be registered with the DWS and suitable water meters installed to ensure that the abstracted volumes are measured on a daily basis; - The Contractor must ensure the following: <ul style="list-style-type: none"> a. The vehicle abstracting water from a river does not enter or cross it and does not operate from within the river; b. No damage occurs to the river bed or banks and that the abstraction of water does not entail stream diversion activities; and c. All reasonable measures to limit pollution or sedimentation of the downstream watercourse are implemented. - Ensure water conservation is being practiced by: <ul style="list-style-type: none"> a. Minimising water use during cleaning of equipment; b. Undertaking regular audits of water systems; and c. Including a discussion on water usage and conservation during environmental awareness training. d. The use of grey water is encouraged. 	Contractor and Applicant	Application to DWS where applicable. Implementation of mitigation measures	Construction	ECO	Monthly	Proof of water source used; submission of above proof to DWS

5.7 Storm and waste water management

Impact management outcome: Impacts to the environment caused by storm water and wastewater discharges during construction are avoided.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - Runoff from the cement/ concrete batching areas must be strictly controlled, and contaminated water must be collected, stored and either treated or disposed of off-site, at a location approved by the project manager; - All spillage of oil onto concrete surfaces must be controlled by the use of an approved absorbent material and the used absorbent material disposed of at an appropriate waste disposal facility; - Natural storm water runoff not contaminated during the development and clean water can be discharged directly to watercourses and water bodies, subject to the Project Manager's approval and support by the ECO; - Water that has been contaminated with suspended solids, such as soils and silt, may be released into watercourses or water bodies only once all suspended solids have been removed from the water by settling out these solids in settlement ponds. The release of settled water back into the environment must be subject to the Project Manager's approval and support by the ECO. 	Contractor	Employ methods to prevent water pollution	Construction	ECO	Weekly	Inspection of areas where construction takes place near watercourses

5.8 Solid and hazardous waste management

Impact management outcome: Wastes are appropriately stored, handled and safely disposed of at a recognised waste facility.

Impact Management Actions	Implementation	Monitoring
---------------------------	----------------	------------

	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - All measures regarding waste management must be undertaken using an integrated waste management approach; - Sufficient, covered waste collection bins (scavenger and weatherproof) must be provided; - A suitably positioned and clearly demarcated waste collection site must be identified and provided; - The waste collection site must be maintained in a clean and orderly manner; - Waste must be segregated into separate bins and clearly marked for each waste type for recycling and safe disposal; - Staff must be trained in waste segregation; - Bins must be emptied regularly; - General waste produced onsite must be disposed of at registered waste disposal sites/ recycling company; - Hazardous waste must be disposed of at a registered waste disposal site; - Certificates of safe disposal for general, hazardous and recycled waste must be maintained. 	Contractor	Following good waste management practices outlined in approved method statement	Construction	ECO	Weekly	Waste safe disposal slips; Service Level Agreements

5.9 Protection of watercourses and estuaries

Impact management outcome: Pollution and contamination of the watercourse environment and or estuary erosion are prevented.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - All watercourses must be protected from direct or indirect spills of pollutants such as solid waste, sewage, cement, oils, fuels, chemicals, aggregate tailings, wash and contaminated water or organic material resulting from the Contractor's activities; - In the event of a spill, prompt action must be taken to clear the polluted or affected areas; - Where possible, no development equipment must traverse any seasonal or permanent wetland - No return flow into the estuaries must be allowed and no disturbance of the Estuarine functional Zone should occur; - Development of permanent watercourse or estuary crossing must only be undertaken where no alternative access to lower position is available; - There must not be any impact on the long term morphological dynamics of watercourses or estuaries; - Existing crossing points must be favored over the creation of new crossings (including temporary access) - When working in or near any watercourse or estuary, the following environmental controls and consideration must be taken: <ul style="list-style-type: none"> a) Water levels during the period of construction; No altering of the bed, banks, course or characteristics of a watercourse b) During the execution of the works, appropriate measures to prevent pollution and contamination of the riparian 	Contractor	Method statements; Stormwater Management Plan	Construction	ECO	Weekly	Method Statement compliance

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<p>environment must be implemented e.g. including ensuring that construction equipment is well maintained;</p> <p>c) Where earthwork is being undertaken in close proximity to any watercourse, slopes must be stabilised using suitable materials, i.e. sandbags or geotextile fabric, to prevent sand and rock from entering the channel; and</p> <p>d) Appropriate rehabilitation and re-vegetation measures for the watercourse banks must be implemented timeously. In this regard, the banks should be appropriately and incrementally stabilised as soon as development allows.</p>						

5.10 Vegetation clearing

Impact management outcome: Vegetation clearing is restricted to the authorised development footprint of the proposed infrastructure.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<p>General:</p> <ul style="list-style-type: none"> Indigenous vegetation which does not interfere with the development must be left undisturbed; Protected or endangered species may occur on or near the development site. Special care should be taken not to 	Contractor and Applicant	Specialist recommendations; Method statement; Search and Rescue Plan;	Pre-Construction and Construction and Operation	ECO	Pre-Construction and weekly during	Compliance to method statements and Search and Rescue

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<p>damage such species;</p> <ul style="list-style-type: none"> - Search, rescue and replanting of all protected and endangered species likely to be damaged during project development must be identified by the relevant specialist and completed prior to any development or clearing; - Permits for removal must be obtained from the relevant CA prior to the cutting or clearing of the affected species, and they must be filed; - The Environmental Audit Report must confirm that all identified species have been rescued and replanted and that the location of replanting is compliant with conditions of approvals; - Trees felled due to construction must be documented and form part of the Environmental Audit Report; - Rivers and watercourses must be kept clear of felled trees, vegetation cuttings and debris; - Only a registered pest control operator may apply herbicides on a commercial basis and commercial application must be carried out under the supervision of a registered pest control operator, supervision of a registered pest control operator or is appropriately trained; - A daily register must be kept of all relevant details of herbicide usage; - No herbicides must be used in estuaries; - All protected species and sensitive vegetation not removed must be clearly marked and such areas fenced off in accordance to Section 5.3: Access restricted areas. 		<p>Alien vegetation removal Plan (approved plans and strategies used by Eskom), site awareness</p>			<p>construction</p>	<p>Plan; Alien vegetation removal Plan. Approved plans and strategies used by Eskom.</p>

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
Alien invasive vegetation must be removed and disposed of at a licensed waste management facility.						

5.11 Protection of fauna

Impact management outcome: Disturbance to fauna is minimised.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - No interference with livestock must occur without the landowner's written consent and with the landowner or a person representing the landowner being present; - The breeding sites of raptors and other wild birds species must be taken into consideration during the planning of the development programme; - Breeding sites must be kept intact and disturbance to breeding birds must be avoided. Special care must be taken where nestlings or fledglings are present; - Special recommendations of the avian specialist must be adhered to at all times to prevent unnecessary disturbance of birds; 	Contractor	Method statement and adherence to exclusion/no-go zones; site awareness	Construction	ECO	Weekly	Public complaints register; adherence to exclusion/no-go zones and method statements

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> No poaching must be tolerated under any circumstances. All animal dens in close proximity to the works areas must be marked as Access restricted areas; No deliberate or intentional killing of fauna is allowed; In areas where snakes are abundant, snake deterrents to be deployed on the pylons to prevent snakes climbing up, being electrocuted and causing power outages; and No Threatened or Protected species (ToPs) and/or protected fauna as listed according NEMBA (Act No. 10 of 2004) and relevant provincial ordinances may be removed and/or relocated without appropriate authorisations/permits. 						

5.12 Protection of heritage resources

Impact management outcome: Impact to heritage resources is minimised.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> Identify, demarcate and prevent impact to all known sensitive heritage features on site in accordance with the No-Go procedure in Section 5.3: Access restricted areas; Carry out general monitoring of excavations for potential fossils, artefacts and material of heritage importance; 	Contractor	Method Statement; Heritage management plan	Pre-construction and construction	ECO	Weekly and daily for zones highlighted by	Monitoring of construction areas, adherence

<ul style="list-style-type: none"> - All work must cease immediately, if any human remains and/or other archaeological, palaeontological and historical material are uncovered. Such material, if exposed, must be reported to the nearest museum, archaeologist/palaeontologist (or the South African Police Services), so that a systematic and professional investigation can be undertaken. Sufficient time must be allowed to remove/collect such material before development recommences. 					Heritage Specialist where potsherds were found	to management plan if change finds found.
--	--	--	--	--	---	--

5.13 Safety of the public

Impact management outcome: All precautions are taken to minimise the risk of injury, harm or complaints.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - Identify fire hazards, demarcate and restrict public access to these areas as well as notify the local authority of any potential threats e.g. large brush stockpiles, fuels etc.; - All unattended open excavations must be adequately fenced or demarcated; - Adequate protective measures must be implemented to prevent unauthorised access to and climbing of partly constructed towers and protective scaffolding; - Ensure structures vulnerable to high winds are secured; - Maintain an incidents and complaints register in which all incidents or complaints involving the public are logged. 	Contractor	Landowner agreements; Method Statement	Construction	ECO	Weekly	Site works barricaded, safe working site maintained, public complaints register.

5.14 Sanitation

Impact management outcome: Clean and well maintained toilet facilities are available to all staff in an effort to minimise the risk of disease and impact to the environment.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - Mobile chemical toilets are installed onsite if no other ablution facilities are available; - The use of ablution facilities and or mobile toilets must be used at all times and no indiscriminate use of the veld for the purposes of ablutions must be permitted under any circumstances; - Where mobile chemical toilets are required, the following must be ensured: <ul style="list-style-type: none"> a) Toilets are located no closer than 100 m to any watercourse or water body; b) Toilets are secured to the ground to prevent them from toppling due to wind or any other cause; c) No spillage occurs when the toilets are cleaned or emptied and the contents are managed in accordance with the EMPr; d) Toilets have an external closing mechanism and are closed and secured from the outside when not in use to prevent toilet paper from being blown out; e) Toilets are emptied before long weekends and workers holidays, and must be locked after working hours; 	Contractor	Service level agreement with Service provider; Method statement; site awareness	Construction	ECO	Weekly	Service level agreement with service provider, proof of safe disposal of waste

f) Toilets are serviced regularly and the ECO must inspect toilets to ensure compliance to health standards; – A copy of the waste disposal certificates must be maintained.						
---	--	--	--	--	--	--

5.15 Prevention of disease

Impact Management outcome: All necessary precautions linked to the spread of disease are taken.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> – Undertake environmentally-friendly pest control in the camp area; – Ensure that the workforce is sensitised to the effects of sexually transmitted diseases, especially HIV AIDS; – The Contractor must ensure that information posters on AIDS are displayed in the Contractor Camp area; – Information and education relating to sexually transmitted diseases to be made available to both construction workers and local community, where applicable; – Free condoms must be made available to all staff on site at central points; – Medical support must be made available; – Provide access to Voluntary HIV Testing and Counselling Services. 	Contractor	Method statement, awareness training	Construction	ECO	Monthly	Method statement, proof of awareness training

5.16 Emergency procedures

Impact management outcome: Emergency procedures are in place to enable a rapid and effective response to all types of environmental emergencies.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - Compile an Emergency Response Action Plan (ERAP) prior to the commencement of the proposed project; - The Emergency Plan must deal with accidents, potential spillages and fires in line with relevant legislation; - All staff must be made aware of emergency procedures as part of environmental awareness training; - The relevant local authority must be made aware of a fire as soon as it starts; - In the event of emergency necessary mitigation measures to contain the spill or leak must be implemented (see Hazardous Substances section 5.17). 	Contractor	Environmental Emergency Response Action Plan	Construction	ECO	Monthly	Adherence /compliance to ERAP

5.17 Hazardous substances

Impact management outcome: Safe storage, handling, use and disposal of hazardous substances.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - The use and storage of hazardous substances to be minimised and non-hazardous and non-toxic alternatives substituted where possible; - All hazardous substances must be stored in suitable containers as defined in the Method Statement; - Containers must be clearly marked to indicate contents, quantities and safety requirements; - All storage areas must be bunded. The bunded area must be of sufficient capacity to contain a spill / leak from the stored containers; - Bunded areas to be suitably lined with a SABS approved liner; - An Alphabetical Hazardous Chemical Substance (HCS) control sheet must be drawn up and kept up to date on a continuous basis; - All hazardous chemicals that will be used on site must have Material Safety Data Sheets (MSDS); - All employees working with HCS must be trained in the safe use of the substance and according to the safety data sheet; - Employees handling hazardous substances / materials must be aware of the potential impacts and follow appropriate safety measures. Appropriate personal protective equipment must be made available; 	Contractor	Method Statement, OHS requirements; adequate and responsible use and storage of Hazardous Substances, Hazardous Substances storage register	Construction	ECO	Weekly	Hazardous Substance Storage Register, MSDS, Method Statement

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - The Contractor must ensure that diesel and other liquid fuel, oil and hydraulic fluid is stored in appropriate storage tanks or in bowsers; - The tanks/ bowsers must be situated on a smooth impermeable surface (concrete) with a permanent bund. The impermeable lining must extend to the crest of the bund and the volume inside the bund must be 110% of the total capacity of all the storage tanks/ bowsers; - The floor of the bund must be sloped, draining to an oil separator; - Provision must be made for refueling at the storage area by protecting the soil with an impermeable groundcover. Where dispensing equipment is used, a drip tray must be used to ensure small spills are contained; - All empty externally dirty drums must be stored on a drip tray or within a bunded area; - No unauthorised access into the hazardous substances storage areas must be permitted; - No smoking must be allowed within the vicinity of the hazardous storage areas; - Adequate fire-fighting equipment must be made available at all hazardous storage areas; - Where refueling away from the dedicated refueling station is required, a mobile refueling unit must be used. Appropriate ground protection such as drip trays must be used; 						

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - An appropriately sized spill kit kept onsite relevant to the scale of the activity/s involving the use of hazardous substance must be available at all times; - The responsible operator must have the required training to make use of the spill kit in emergency situations; - An appropriate number of spill kits must be available and must be located in all areas where activities are being undertaken; - In the event of a spill, contaminated soil must be collected in containers and stored in a central location and disposed of according to the National Environmental Management: Waste Act 59 of 2008. Refer to Section 5.7 for procedures concerning storm and waste water management and 5.8 for solid and hazardous waste management. 						

5.18 Workshop, equipment maintenance and storage

Impact management outcome: Soil, surface water and groundwater contamination is minimised.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - Where possible and practical all maintenance of vehicles and equipment must take place in the workshop area; - During servicing of vehicles or equipment, especially where emergency repairs are effected outside the workshop area, a suitable drip tray must be used to prevent spills onto the soil. The relevant local authority must be made aware of a fire as soon as it starts; - Leaking equipment must be repaired immediately or be removed from site to facilitate repair; - Workshop areas must be monitored for oil and fuel spills; - Appropriately sized spill kit kept onsite relevant to the scale of the activity taking place must be available; - The workshop area must have a bunded concrete slab that is sloped to facilitate runoff into a collection sump or suitable oil / water separator where maintenance work on vehicles and equipment can be performed; - Water drainage from the workshop must be contained and managed in accordance Section 5.7: Storm and waste water management. 	Contractor	Method Statement, OHS requirements; Hazardous Substances storage register, vehicle daily checklist, vehicle service register	Construction	ECO	Weekly	Method Statement, Hazardous Substances storage register, vehicle daily checklist, vehicle service register

5.19 Batching plants

Impact management outcome: Minimise spillages and contamination of soil, surface water and groundwater.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - Concrete mixing must be carried out on an impermeable surface; - Batching plants areas must be fitted with a containment facility for the collection of cement laden water. - Dirty water from the batching plant must be contained to prevent soil and groundwater contamination - Bagged cement must be stored in an appropriate facility and at least 10 m away from any water courses, gullies and drains; - A washout facility must be provided for washing of concrete associated equipment. Water used for washing must be restricted; - Hardened concrete from the washout facility or concrete mixer can either be reused or disposed of at an appropriate licenced disposal facility; - Empty cement bags must be secured with adequate binding material if these will be temporarily stored on site; - Sand and aggregates containing cement must be kept damp to prevent the generation of dust (Refer to Section 5.20: Dust emissions) - Any excess sand, stone and cement must be removed or reused from site on completion of construction period and disposed at a registered disposal facility; 	Contractor	Method Statement	Construction	ECO	Weekly	Compliance to mitigation and method statement

– Temporary fencing must be erected around batching plants in accordance with Section 5.5: Fencing and gate installation .						
---	--	--	--	--	--	--

5.20 Dust emissions

Impact management outcome: Dust prevention measures are applied to minimise the generation of dust.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> – Take all reasonable measures to minimise the generation of dust as a result of project development activities to the satisfaction of the ECO; – Removal of vegetation must be avoided until such time as soil stripping is required and similarly exposed surfaces must be re-vegetated or stabilised as soon as is practically possible; – Excavation, handling and transport of erodible materials must be avoided under high wind conditions or when a visible dust plume is present; – During high wind conditions, the ECO must evaluate the situation and make recommendations as to whether dust-damping measures are adequate, or whether working will cease altogether until the wind speed drops to an acceptable level; – Where possible, soil stockpiles must be located in sheltered areas where they are not exposed to the erosive effects of the wind; 	Contractor	Method Statement, Vehicle Speed limit, dust suppression	Construction	ECO	Monthly	Site observations, dust suppression register

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - Where erosion of stockpiles becomes a problem, erosion control measures must be implemented at the discretion of the ECO; - Vehicle speeds must not exceed 40 km/h along dust roads or 20 km/h when traversing unconsolidated and non-vegetated areas; - Straw stabilisation must be applied at a rate of one bale/10 m² and harrowed into the top 100 mm of top material, for all completed earthworks; - For significant areas of excavation or exposed ground, dust suppression measures must be used to minimise the spread of dust. 						

5.21 Blasting

Impact management outcome: Impact to the environment is minimised through a safe blasting practice.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - Any blasting activity must be conducted by a suitably licensed blasting contractor; and 	Contractor	Relevant legislation and regulation	Construction	ECO	Monthly	Public complaints register; proof of

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> – Notification of surrounding landowners, emergency services site personnel of blasting activity 24 hours prior to such activity taking place on Site. 						registration of blasting contractor.

5.22 Noise

Impact Management outcome: Prevent unnecessary noise to the environment by ensuring that noise from development activity is mitigated.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> – The Contractor must keep noise level within acceptable limits, Restrict the use of sound amplification equipment for communication and emergency only; – All vehicles and machinery must be fitted with appropriate silencing technology and must be properly maintained; – Any complaints received by the Contractor regarding noise must be recorded and communicated. Where possible or applicable, provide transport to and from the site on a daily basis for construction workers; – Develop a Code of Conduct for the construction phase in terms of behaviour of construction staff. Operating hours as determined by the environmental authorisation are adhered 	Contractor	Restriction of site hours to working hours Monday to Friday	Construction	ECO	Monthly	Public Complaints Register

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
to during the development phase. Where not defined, it must be ensured that development activities must still meet the impact management outcome related to noise management.						

5.23 Fire prevention

Impact management outcome: Prevention of uncontrollable fires.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - Designate smoking areas where the fire hazard could be regarded as insignificant; - Firefighting equipment must be available on all vehicles located on site; - The local Fire Protection Agency (FPA) must be informed of construction activities; - Contact numbers for the FPA and emergency services must be communicated in environmental awareness training and displayed at a central location on site; - Two-way swap of contact details between ECO and FPA. 	Contractor	Emergency Response Action Plan; Method Statement	Construction	ECO	Monthly	Public complaints register; compliance to ERAP

5.24 Stockpiling and stockpile areas

Impact management outcome: Reduce erosion and sedimentation as a result of stockpiling.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - All material that is excavated during the project development phase (either during piling (if required) or earthworks) must be stored appropriately on site in order to minimise impacts to watercourses, watercourses and water bodies; - All stockpiled material must be maintained and kept clear of weeds and alien vegetation growth by undertaking regular weeding and control methods; - Topsoil stockpiles must not exceed 2 m in height; - During periods of strong winds and heavy rain, the stockpiles must be covered with appropriate material (e.g. cloth, tarpaulin etc.); - Where possible, sandbags (or similar) must be placed at the bases of the stockpiled material in order to prevent erosion of the material. 	Contractor	Method Statement	Construction	ECO	Monthly	Method Statement and site observations

5.25 Civil works

Impact management outcome: Impact to the environment minimised during civil works to create the substation terrace.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - Where terracing is required, topsoil must be collected and retained for the purpose of re-use later to rehabilitate disturbed areas not covered by yard stone; - Areas to be rehabilitated include terrace embankments and areas outside the high voltage yards; - Where required, all sloped areas must be stabilised to ensure proper rehabilitation is effected and erosion is controlled; - These areas can be stabilised using design structures or vegetation as specified in the design to prevent erosion of embankments. The contract design specifications must be adhered to and implemented strictly; - Rehabilitation of the disturbed areas must be managed in accordance with Section 5.35: Landscaping and rehabilitation; - All excess spoil generated during terracing activities must be disposed of in an appropriate manner and at a recognised landfill site; and - Spoil can however be used for landscaping purposes and must be covered with a layer of 150 mm topsoil for rehabilitation purposes. 	Contractor	Method Statement	Construction	ECO	Monthly	Site observation

5.26 Excavation of foundation, cable trenching and drainage systems

Impact management outcome: No environmental degradation occurs as a result of excavation of foundation, cable trenching and drainage systems.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - All excess spoil generated during foundation excavation must be disposed of in an appropriate manner and at a licensed landfill site, if not used for backfilling purposes; - Spoil can however be used for landscaping purposes and must be covered with a layer of 150 mm topsoil for rehabilitation purposes; - Management of equipment for excavation purposes must be undertaken in accordance with Section 5.18: Workshop, equipment maintenance and storage; and - Hazardous substances spills from equipment must be managed in accordance with Section 5.17: Hazardous substances. 	Contractor	Method Statement and Engineering Drawings	Construction	ECO	Weekly	Adherence to method statements

5.27 Installation of foundations, cable trenching and drainage systems

Impact management outcome: No environmental degradation occurs during the installation of foundation, cable trenching and drainage system.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> – Batching of cement to be undertaken in accordance with Section 5.19: Batching plants; and – Residual solid waste must be disposed of in accordance with Section 5.8: Solid waste and hazardous management. 	Contractor	Method Statement	Construction	Contractor and ECO	Weekly	Method Statement and site observations

5.28 Installation of equipment (circuit breakers, current Transformers, Isolators, Insulators, surge arresters, voltage transformers, earth switches)

Impact management outcome: No environmental degradation occurs as a result of installation of equipment.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> – Management of dust must be conducted in accordance with Section 5.20: Dust emissions; – Management of equipment used for installation must be conducted in accordance with Section 5.18: Workshop, equipment maintenance and storage; – Management hazardous substances and any associated spills must be conducted in accordance with Section 5.17: Hazardous substances; and 	Contractor	Method Statement	Construction	ECO	Weekly	Method Statement and site observation

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> Residual solid waste must be recycled or disposed of in accordance with Section 5.8: Solid waste and hazardous management. 						

5.29 Steelwork Assembly and Erection

Impact management outcome: No environmental degradation occurs as a result of steelwork assembly and erection.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> During assembly, care must be taken to ensure that no wasted/unused materials are left on site e.g. bolts and nuts Emergency repairs due to breakages of equipment must be managed in accordance with Section 5.18: Workshop, equipment maintenance and storage and Section 5.16: Emergency procedures. 	Contractor	Method Statement	Construction	ECO	Weekly	Site Observations

5.30 Cabling and Stringing

Impact management outcome: No environmental degradation occurs as a result of stringing.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - Residual solid waste (off cuts etc.) shall be recycled or disposed of in accordance with Section 6.8: Solid waste and hazardous Management; - Management of equipment used for installation shall be conducted in accordance with Section 5.18: Workshop, equipment maintenance and storage; - Management hazardous substances and any associated spills shall be conducted in accordance with Section 5.17: Hazardous substances. 	Contractor	Method Statement, adherence to exclusion zones	Construction	ECO	Weekly	Site observations

5.31 Testing and Commissioning (all equipment testing, earthing system, system integration)

Impact management outcome: No environmental degradation occurs as a result of Testing and Commissioning.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> Residual solid waste must be recycled or disposed of in accordance with Section 5.8: Solid waste and hazardous management. 	Contractor	Method Statement	Construction	ECO	Weekly	Site observation

5.32 Socio-economic

Impact management outcome: enhanced socio-economic development.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> Develop and implement communication strategies to facilitate public participation; Develop and implement a collaborative and constructive approach to conflict resolution as part of the external stakeholder engagement process; Sustain continuous communication and liaison with neighboring owners and residents 	Contractor	Landowner Agreements; Issues and Complaints Register	Construction	ECO	Monthly	Landowner Agreement; Issues and Complaints Register

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> – Create work and training opportunities for local stakeholders; and – Where feasible, no workers, with the exception of security personnel, must be permitted to stay over-night on the site. This would reduce the risk to local farmers. 						

5.33 Temporary closure of site

Impact management outcome: Minimise the risk of environmental impact during periods of site closure greater than five days.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> – Bunds must be emptied (where applicable) and need to be undertaken in accordance with the impact management actions included in sections 5.17: Hazardous substances and 5.18: Workshop, equipment maintenance and storage; – Hazardous storage areas must be well ventilated; – Fire extinguishers must be serviced and accessible. Service records to be filed and audited at last service; – Emergency and contact details displayed must be displayed; – Security personnel must be briefed and have the facilities to contact or be contacted by relevant management and emergency personnel; 	Contractor	Method statement	Construction – when applicable	ECO	Monthly – when applicable	Method statement ECO reports

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - Night hazards such as reflectors, lighting, traffic signage etc. must have been checked; - Fire hazards identified and the local authority must have been notified of any potential threats e.g. large brush stockpiles, fuels etc.; - Structures vulnerable to high winds must be secured; - Wind and dust mitigation must be implemented; - Cement and materials stores must have been secured; - Toilets must have been emptied and secured; - Refuse bins must have been emptied and secured; - Drip trays must have been emptied and secured. 						

5.34 Dismantling of old equipment

Impact management outcome: Impact to the environment to be minimised during the dismantling, storage and disposal of old equipment commissioning.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - All old equipment removed during the project must be stored in such a way as to prevent pollution of the environment; - Oil containing equipment must be stored to prevent leaking or be stored on drip trays; 	Contractor	Method statement	Construction and decommissioning	ECO	Monthly – when applicable	Site observation

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - All scrap steel must be stacked neatly and any disused and broken insulators must be stored in containers; - Once material has been scrapped and the contract has been placed for removal, the disposal Contractor must ensure that any equipment containing pollution causing substances is dismantled and transported in such a way as to prevent spillage and pollution of the environment; - The Contractor must also be equipped to contain and clean up any pollution causing spills; and - Disposal of unusable material must be at a licensed waste disposal site. 						

5.35 Landscaping and rehabilitation

Impact management outcome: Areas disturbed during the development phase are returned to a state that approximates the original condition.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - All areas disturbed by construction activities must be subject to landscaping and rehabilitation; All spoil and waste must be disposed of to a registered waste site; 	Contractor	Method Statements; erosion protection; alien eradication plan	Concurrent with Construction	ECO	Monthly	Adequately revegetated work areas; no erosion or

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - All slopes must be assessed for contouring, and to contour only when the need is identified in accordance with the Conservation of Agricultural Resources Act, No 43 of 1983 - All slopes must be assessed for terracing, and to terrace only when the need is identified in accordance with the Conservation of Agricultural Resources Act, No 43 of 1983; - Berms that have been created must have a slope of 1:4 and be replanted with indigenous species and grasses that approximates the original condition; - Where new access roads have crossed cultivated farmlands, that lands must be rehabilitated by ripping which must be agreed to by the holder of the EA and the landowners; - Rehabilitation of access roads outside of farmland; - Indigenous species must be used for with species and/grasses to where it compliments or approximates the original condition; - Stockpiled topsoil must be used for rehabilitation (refer to Section 5.24: Stockpiling and stockpiled areas); - Stockpiled topsoil must be evenly spread so as to facilitate seeding and minimise loss of soil due to erosion; - Before placing topsoil, all visible weeds from the placement area and from the topsoil must be removed; - Subsoil must be ripped before topsoil is placed; - The rehabilitation must be timed so that rehabilitation can take place at the optimal time for vegetation establishment; 						invasive plant species

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - Where impacted through construction related activity, all sloped areas must be stabilised to ensure proper rehabilitation is effected and erosion is controlled; - Sloped areas stabilised using design structures or vegetation as specified in the design to prevent erosion of embankments. The contract design specifications must be adhered to and implemented strictly; - Spoil can be used for backfilling or landscaping as long as it is covered by a minimum of 150 mm of topsoil. - Where required, re-vegetation including hydro-seeding can be enhanced using a vegetation seed mixture as described below. A mixture of seed can be used provided the mixture is carefully selected to ensure the following: <ul style="list-style-type: none"> a) Annual and perennial plants are chosen; b) Pioneer species are included; c) Species chosen must be indigenous to the area with the seeds used coming from the area; d) Root systems must have a binding effect on the soil; e) The final product must not cause an ecological imbalance in the area 						

6. ACCESS TO THE GENERIC EMPr

Once completed and signed, to allow the public access to the generic EMPr, the holder of the EA must make the EMPr available to the public in accordance with the requirements of Regulation 26(h) of the EIA Regulations.

PART B: SECTION 2

7. SITE SPECIFIC INFORMATION AND DECLARATION

7.1 Sub-section 1: contact details and description of the project

7.1.1 Details of the applicant: **Lesaka 1 Solar Energy Facility (Pty) Ltd**

Name of applicant: **Mercia Grimbeek / Michael Barnes**

Tel No: **+27 (0) 21 207 2181**

Fax No: **n/a**

Postal Address: **Suite 104, Albion Springs | 183 Main Road | Rondebosch | Cape Town**

Physical Address: **Suite 104, Albion Springs | 183 Main Road | Rondebosch | Cape Town**

7.1.2 Details and expertise of the EAP:

Name of applicant: **SiVEST SA (Pty) Ltd**

Tel No: **+27 31 581 1500**

Fax No: **N/A**

E-mail address: michelleg@sivest.com

Expertise of the EAP (Curriculum Vitae included): **Yes, included in the EIA Application**

7.1.3 Project name:

Proposed Development of the Lesaka 1 Solar Energy Facility (SEF) and Associated Infrastructure near Loeriesfontein in the Northern Cape Province

7.1.4 Description of the project:

Lesaka 1 Solar Energy Facility (Pty) Ltd is proposing to construct the Lesaka 1 Solar Energy Facility (SEF) and associated infrastructure approximately 35 km north of Loeriesfontein in the Hantam Local Municipality and the Namakwa District Municipality, in the Northern Cape Province (Figure 1) (DFFE Reference Number: 14/12/16/3/3/2/2327). The overall objective of the proposed development is to supply suitable private off-taker initiatives (direct supply or wheeling agreements, as applicable), or be bid into the government coordinated Renewable Independent Power Producer Programme (REIPPP) or similar procurement program under the Integrated Resource Plan (IRP). The proposed development will have a maximum total export capacity of up to 240 megawatt (MW).

SiVEST Environmental Division has subsequently been appointed as the independent Environmental Assessment Practitioner (EAP) to undertake the Environmental Impact Assessment (EIA) process for the proposed construction and operation of the Lesaka 1 Solar Energy Facility (SEF) and associated infrastructure. The proposed development requires an Environmental Authorisation (EA) from the National Department Forestry, Fisheries and the Environment (DFFE). However, the provincial authority (i.e. the Northern Cape Department of Agriculture,

Environmental Affairs, Rural Development and Land Reform (NCDAEARDLR)) will also be consulted. The EIA for the proposed development will be conducted in terms of the EIA Regulations, 2014 (as amended) promulgated in terms of Chapter 5 of the NEMA. In terms of these regulations, a full EIA process is required for the proposed development. All relevant legislation and guidelines will be consulted during the EIA process and will be complied with at all times.

One additional SEF is currently being considered on the same property by way of a separate environmental impact assessment process contained in the 2014 Environmental Impact Assessment Regulations (GN No. R982, as amended) for listed activities contained Listing Notices 1, 2 and 3 (GN R983, R984 and R985, as amended). This project is known as Lesaka 2 Solar Energy Facility (DFFE Reference Number: 14/12/16/3/3/2/2328).

In order to evacuate the energy generated by the SEF's to supplement the national grid, the applicant is proposing a new 132/400kV Main Transmission Substation which will be constructed on site. This MTS will connect to the existing Helios Juno 1 400kV line crossing the site via a Loop-In-Loop-Out connection.

The grid connection will be assessed in a separate application once a preferred solution is identified.

7.1.5 Project location:

The Lesaka 1 Solar Energy Facility (SEF) and associated infrastructure approximately 35 km north of Loeriesfontein in the Hantam Local Municipality and the Namakwa District Municipality, in the Northern Cape Province.

The proposed development will affect the following farm / property:

SG CODE	DESCRIPTION
C0150000000026400000	PORTION 0 OF THE FARM KLUITJES KRAAL NO. 264

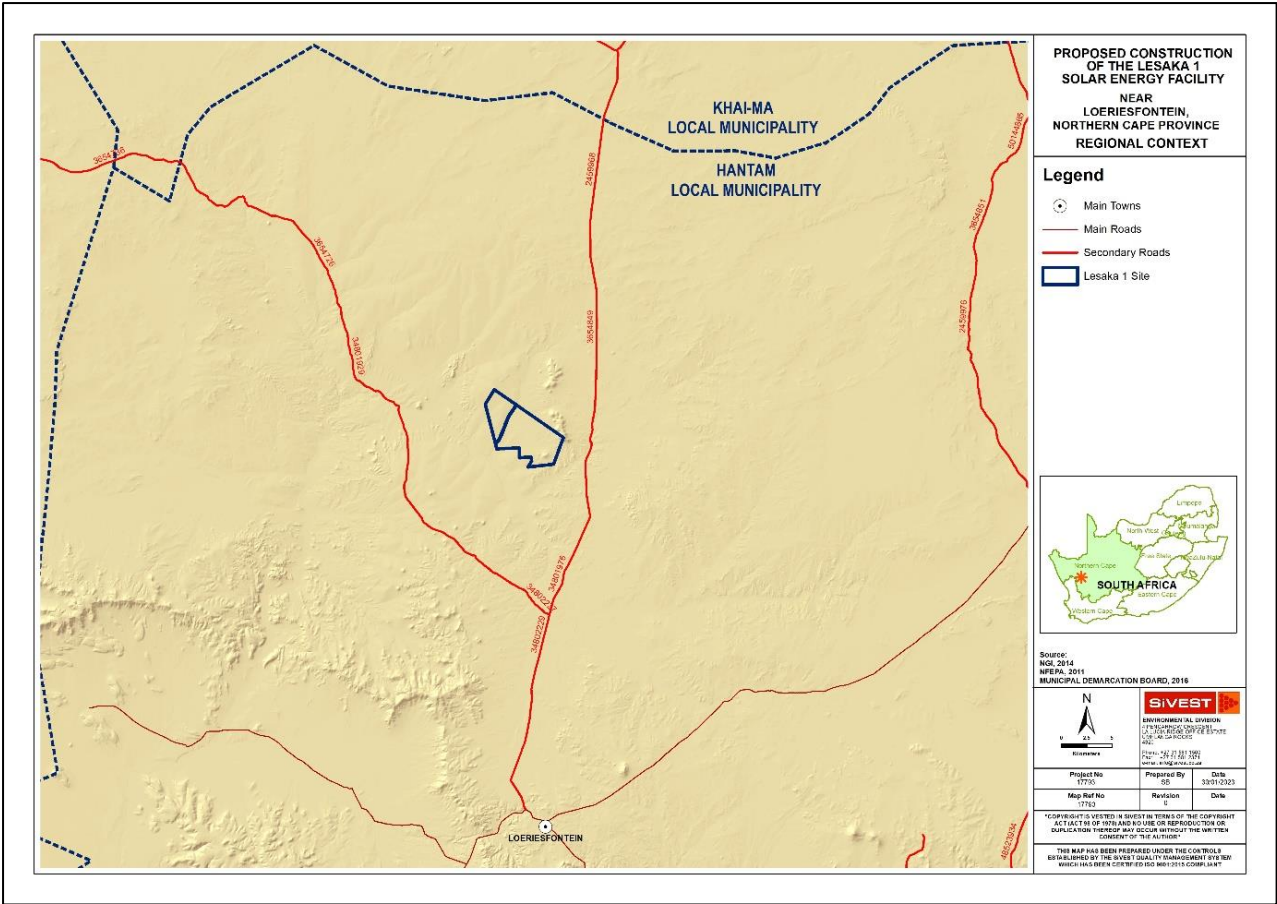


Figure 1: Regional Context

7.2 Sub-section 2: Development footprint site map

This sub-section must include a map of the site sensitivity overlaid with the preliminary infrastructure layout. The sensitivity map must be prepared from the national web based environmental screening tool, when available for compulsory use at: <https://screening.environment.gov.za/screeningtool>. The sensitivity map shall identify the nature of each sensitive feature e.g. threatened plant species, archaeological site, etc. Sensitivity maps shall identify features both within the planned working area and any known sensitive features within 50 m from the development footprint.

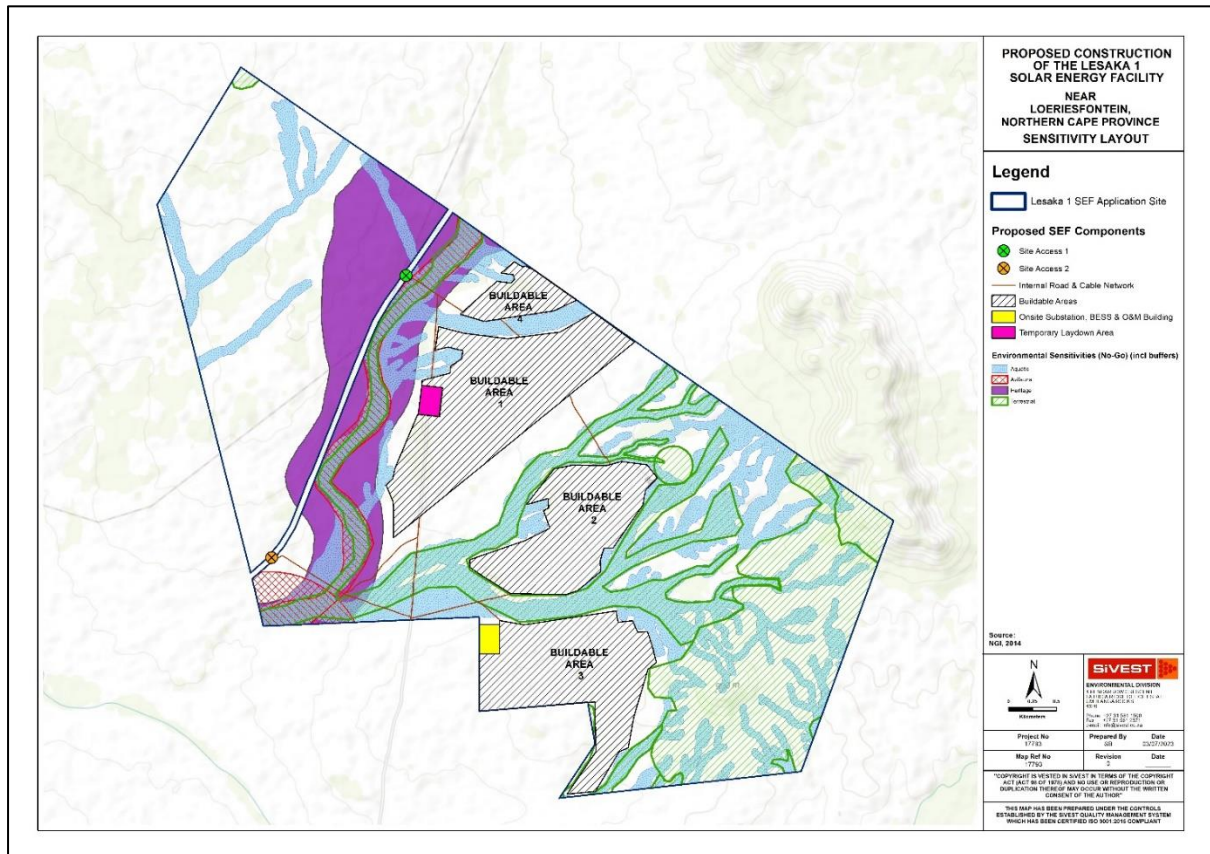


Figure 2: Environmental Sensitivity Overlay (Final)

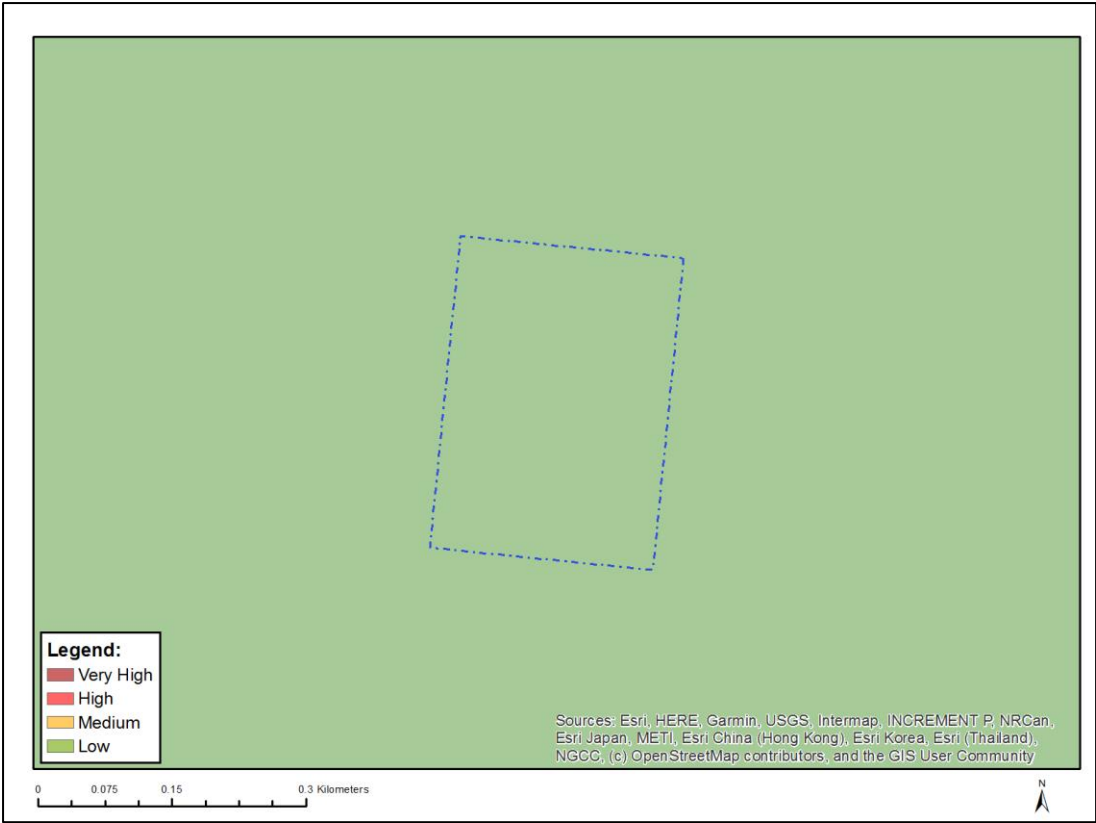


Figure 3: Map showing substation location in relation to the Agriculture Theme Sensitivity (DFE Screening Tool)

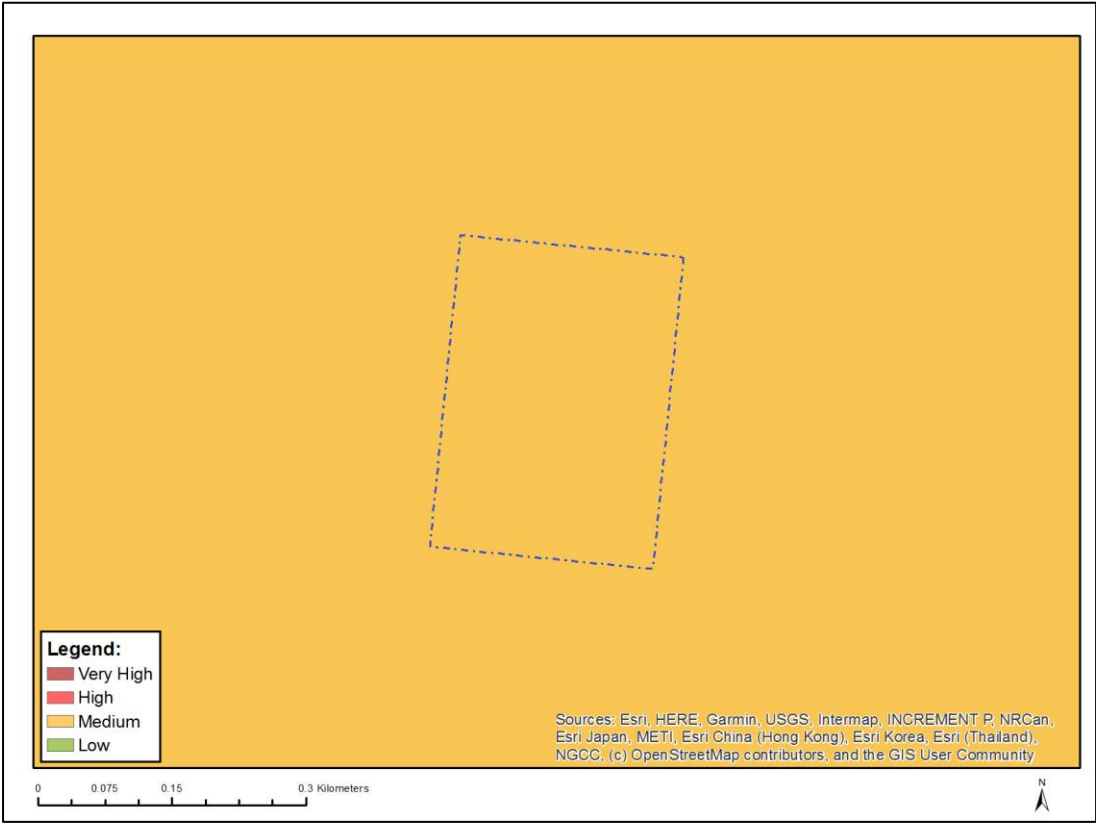


Figure 4: Map showing substation location in relation to the Animal Species Theme Sensitivity (DFE Screening Tool)



Figure 5: Map showing substation location in relation to the Aquatic Biodiversity Theme Sensitivity (DFFE Screening Tool)

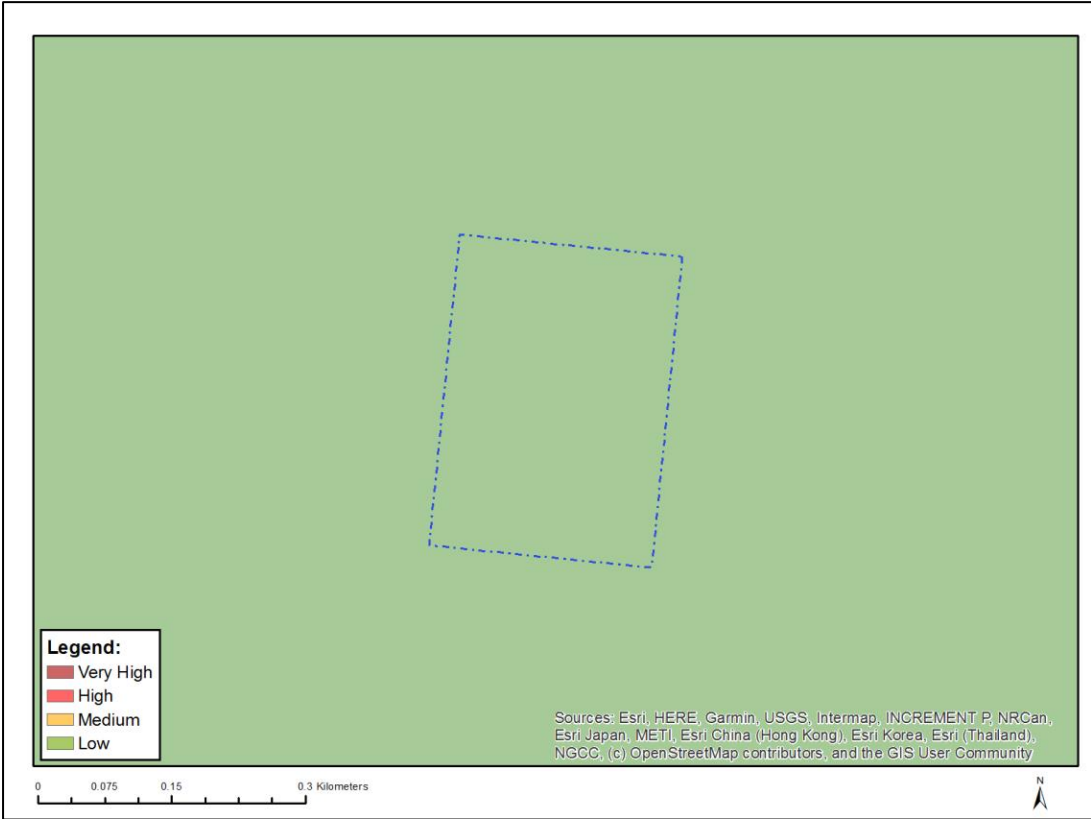


Figure 6: Map showing substation location in relation to the Archaeological and Cultural Heritage Theme Sensitivity (DFFE Screening Tool)

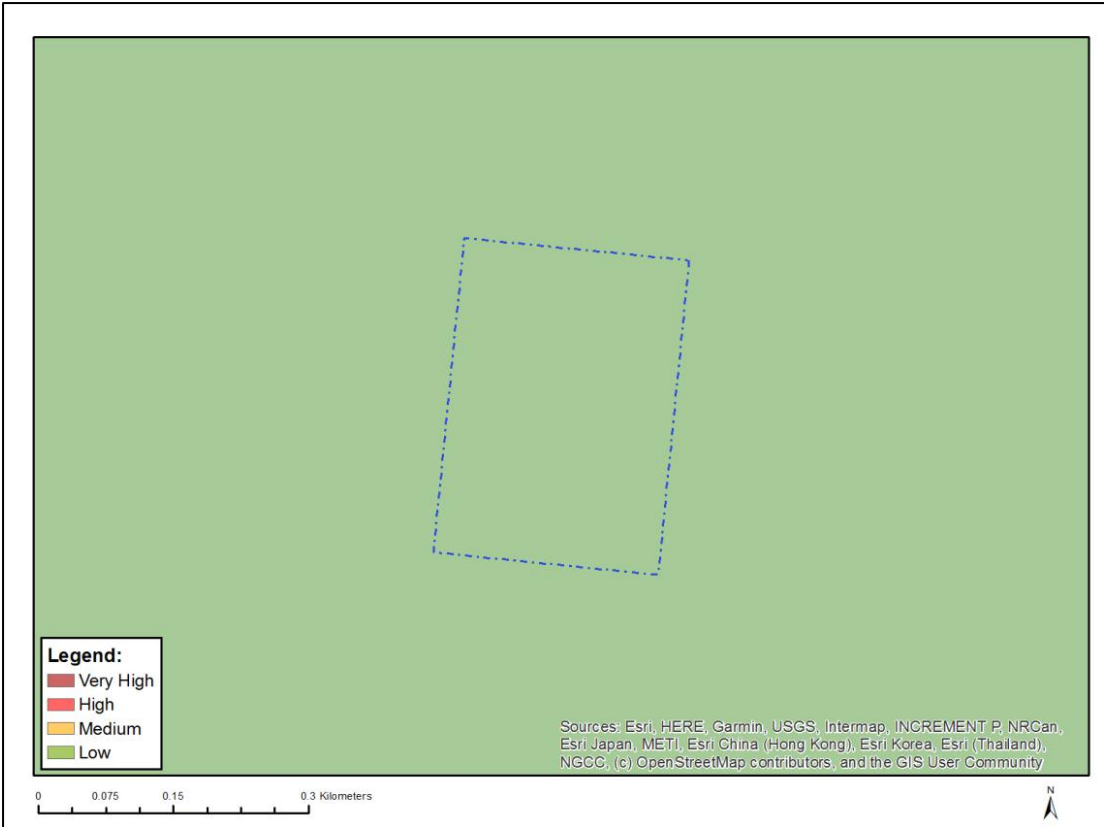


Figure 8: Map showing substation location in relation to the Civil Aviation Theme Sensitivity (DFFE Screening Tool)

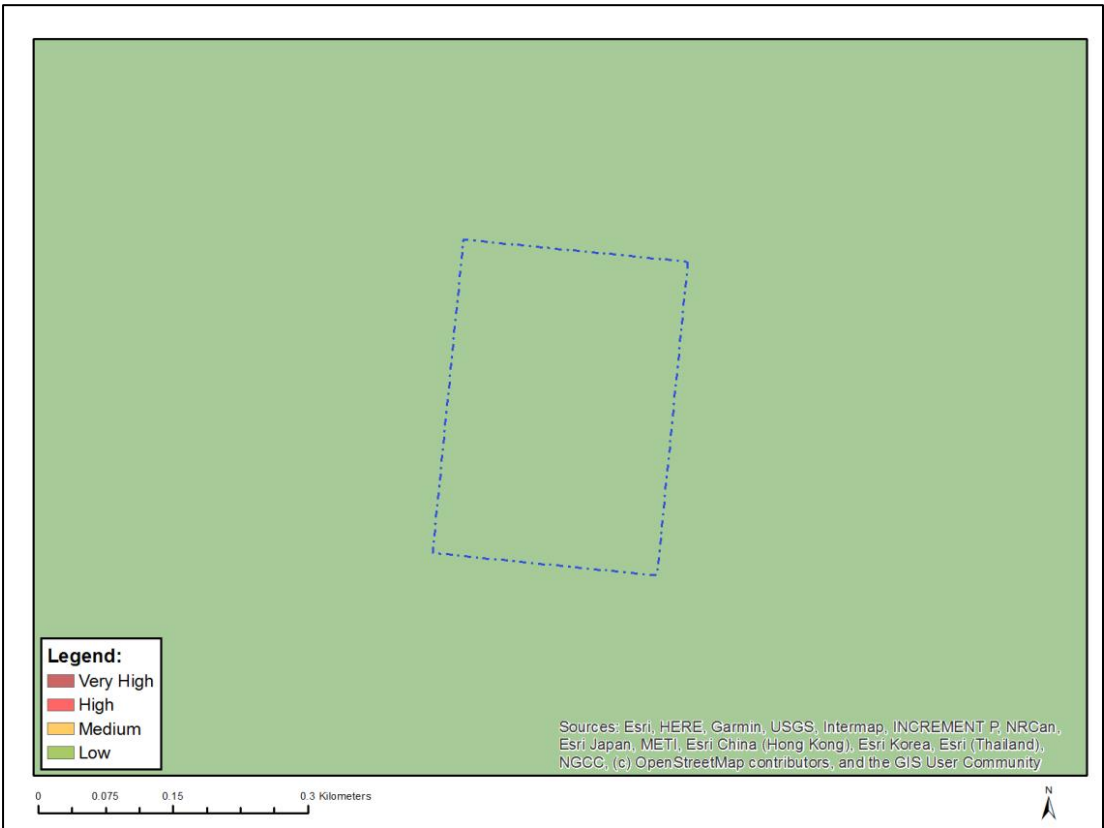


Figure 8: Map showing substation location in relation to the Defence Theme Sensitivity (DFFE Screening Tool)

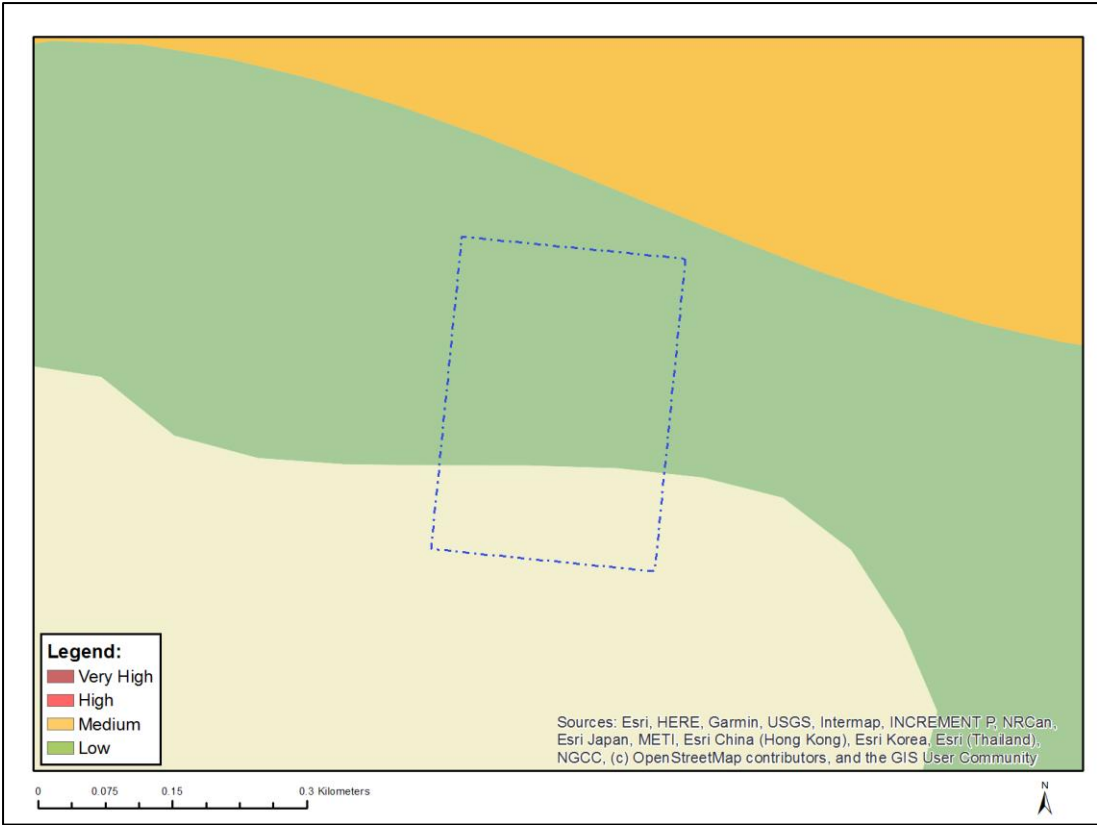


Figure 11: Map showing substation location in relation to the Palaeontology Theme Sensitivity (DFFE Screening Tool)

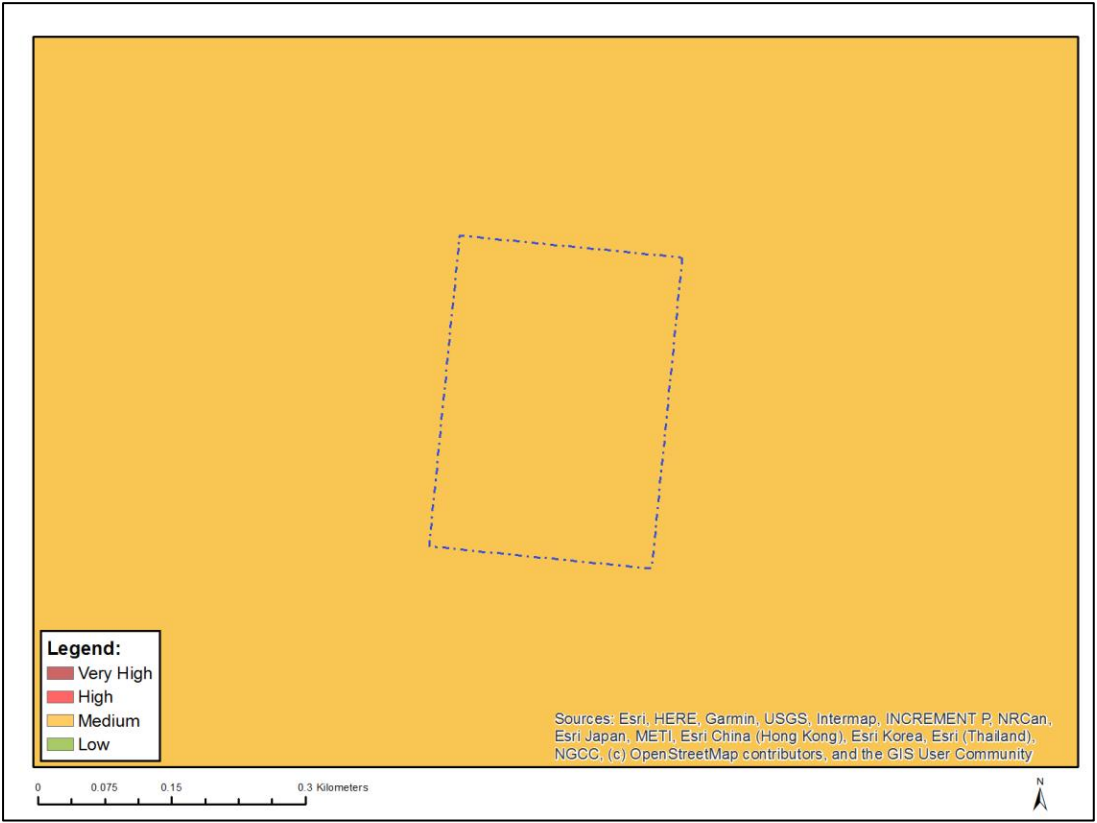


Figure 12: Map showing substation location in relation to the Plant Species Theme Sensitivity (DFFE Screening Tool)



Figure 13 Map showing substation location in relation to the Terrestrial Biodiversity Theme Sensitivity (DFFE Screening Tool)

7.3 Sub-section 3: Declaration

The proponent/applicant or holder of the EA affirms that he/she will abide and comply with the prescribed impact management outcomes and impact management actions as stipulated in part B: section 1 of the generic EMPr and have the understanding that the impact management outcomes and impact management actions are legally binding. The proponent/applicant or holder of the EA affirms that he/she will provide written notice to the CA 14 day prior to the date on which the activity will commence of commencement of construction to facilitate compliance inspections.

Signature Proponent/applicant/holder of EA

Date:

7.4 Sub-section 4: amendments to site specific information (Part B; section 2)

Should the EA be transferred to a new holder, Part B: Section 2 must be completed by the new holder and submitted with the application for an amendment of the EA in terms of Regulations 29 or 31 of the EIA Regulations, whichever applies. The information submitted for an amendment to an environmental authorisation will be considered to be incomplete should a signed copy of Part B: Section 2 not be submitted. Once approved, Part B: Section 2 forms part of the EMPr for the development and the EMPr becomes legally binding to the new EA holder.

PART C

8. SITE SPECIFIC ENVIRONMENTAL ATTRIBUTES

If any specific environmental sensitivities/attributes are present on the site which require more specific impact management outcomes and actions, not included in the pre-approved generic EMPr template, to manage impacts, those impact management outcomes and impact management actions must be included in this section. These specific management controls must be referenced spatially, and must include impact management outcomes and impact management actions. The management controls including impact management outcomes and impact management actions must be presented in the format of the pre-approved generic EMPr template. This applies only to additional impact management outcomes and impact management actions that are necessary.

If Part C is applicable to the development as authorised in the EA, it is required to be submitted to the CA together with the BAR or EIAR, for consideration of, and decision on, the application for EA. The information in this section must be prepared by an EAP and the name and expertise of the EAP, including the curriculum vitae are to be included. Once approved, Part C forms part of the EMPr for the site and is legally binding.

This section will **not be required** should the site contain no specific environmental sensitivities or attributes.

The following specialist studies were undertaken as part of this project:

- Aquatic/Freshwater Impact Assessment
- Terrestrial Biodiversity Impact Assessment
- Agriculture and Soils Impact Assessment
- Avifaunal Impact Assessment
- Hydrological Impact Assessment
- Desktop Geotechnical Investigation
- Social Impact Assessment
- Heritage Impact Assessment (including Paleontology, Archaeology and Cultural)
- Visual Impact Assessment
- Transportation Impact Assessment
- Risk Assessment

The mitigation measures provide by the Specialists through the Impact Assessment process are included below.

Pre-construction walk-through of the approved development footprint will be conducted to ensure that sensitive habitats and species are avoided where possible.

8.1 Pre-Construction Phase

8.1.1. Terrestrial

This section deals with the issues relative to the terrestrial biodiversity during the pre-construction phase.

ASPECT/ IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAMES/ FREQUENCY
Vegetation Loss	<ul style="list-style-type: none"> Blanket clearing of vegetation must be limited to the site. No clearing outside of footprint to take place. The boundaries of the development footprint areas are to be clearly demarcated and it must be ensured that all activities remain within the demarcated footprint area. Topsoil must be striped and stockpiled separately during site preparation and replaced on completion where revegetation will take place. Erosion prevention is key thus runoff must be controlled and managed by use of proper stormwater management measures. Any site camps and laydown areas requiring clearing must be located within already disturbed areas away from sensitive areas. 	Holder of EA / Project Manager	Adhere to impact managemen t actions.	To minimize vegetation loss	Planning and Design phase prior to construction commencing
Loss of flora SCC	<ul style="list-style-type: none"> A flora walkdown is required for permit applications prior to commencement of construction activities. Respective permits to be obtained beforehand. Provincially protected species can be replanted and re-established post construction. 	Holder of EA	To adhere to impact managemen t actions	To minimize loss of flora SCC	Prior to construction commencing

8.1.2. Agricultural

This section deals with the issues relative to the agricultural landscape during the pre-construction phase.

ASPECT/ IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAMES/ FREQUENCY
Protection of soil resources – Erosion	Design an effective system of storm water run-off control, where it is required - that is at any points where run-off water might accumulate. The system must effectively collect and safely disseminate any run-off water from all accumulation points and it must prevent any potential down slope erosion.	Holder of the EA	Ensure that the storm water run-off control is included in the engineering design.	That disturbance and existence of hard surfaces causes no erosion on or downstream of the site.	Once-off during the design phase.

8.1.3. Social

This section deals with the issues relative to the social landscape during the pre-construction phase.

ASPECT/ IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAMES/ FREQUENCY
Social / Socio-Economic Nature: employment and business opportunities	<ul style="list-style-type: none"> Preparation and implementation of a Stakeholder Engagement Plan (SEP) prior to and during the construction phase. Liaise with the Hantam Municipality to identify potential opportunities in this regard. 	Holder of EA / Contractor	Stakeholder Engagement Plan (SEP)	Maximize local community employment benefits in the local economy.	On-going

8.1.4. Transportation

This section deals with the issues relative to the transportation aspects during the pre-construction phase.

ASPECT / IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAMES / FREQUENCY
Increase in road traffic.	Identify type and condition of affected roads.	Developer	Transportation study	Establish baseline	Once off
	Deduce current traffic			Establish baseline conditions	
	Deduce expected additional traffic			Understand extent of impact	
	Confirm ability of existing road network to absorb additional traffic.			Ensure containment of impact.	
Increase in traffic incidents with pedestrians and livestock.	Assess current pedestrian conditions.	Developer	Transportation study	Establish baseline	Once off
	Confirm ability of existing road network to safely accommodate pedestrians.			Ensure containment of impact	Once off
Traffic disruptions and road damage due to abnormal loads	Identify required abnormal loads.	Developer	Transportation study, Abnormal Load study	Understand extent of impact	Once off
	Identify suitable routes.		Transportation study	Ensure containment of impact	Once off
	Apply for abnormal load permits with the relevant authorities		Application	Ensure containment of impact	Once off
Access and internal roads	Assess suitability of existing accesses and internal roads.	Developer	Transportation study	Establish baseline	Once off
	Design accesses and internal roads as per applicable criteria and standards.		Civil engineering design	Ensure containment of impact	Once off
	Design access and internal roads to minimize earthworks.			Reduction of environmental disturbance	Once off
	Design access and internal roads to minimise stormwater damage.			Reduction of environmental disturbance	Once off
	Submit access and road designs for approval with relevant authorities prior to construction.		Application	Ensure compliance	Once off

8.2 Construction Phase

8.2.1. Aquatic

This section deals with the issues relative to the aquatic biodiversity during the construction phase.

ASPECT/ IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAMES/ FREQUENCY
Erosion control and sedimentation	<p>To monitor the extent of erosion and sedimentation of the freshwater ecosystems. Provide a report addressing the following:</p> <ul style="list-style-type: none"> • Brief indication of the method of assessment; • Assumptions and Limitations must be listed; • Photographs and GPS point locations taken of existing erosion prior to and post rehabilitation activities must be incorporated into the report; • Any erosion observed must be discussed in detail; • Map indicating where erosion is present; and • Recommended mitigation and remediation actions should be presented and dates when remediation actions were undertaken. 	Holder of EA	Adhere to impact management actions.	Reporting to be included as part of the annual ECO monitoring report and submitted to the competent authority.	Visual inspections must take place after rainfall events.
Alien Invasive Species Plant Control	<p>Monitoring must be undertaken as per an Alien and Invasive plant species plan. This must include:</p> <ul style="list-style-type: none"> • Visual inspections must take place monthly during the winter rainy season for 	Holder of EA	Adhere to impact management actions.	Reporting to be included as part of the annual ECO monitoring report and submitted to	Monitoring must be undertaken as per an Alien and Invasive plant

ASPECT/ IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAMES/ FREQUENCY
	three years after the completion of construction to monitor the establishment of alien or invasive plant species, specifically at the freshwater ecosystems in the vicinity of the buildable areas (1-4), but also surrounding the BESS and substation.			the competent authority.	species plan. This must include: <ul style="list-style-type: none"> Visual inspection of construction footprint areas once a month during the construction phase.
Revegetation	To monitor the germination of AIPs at freshwater ecosystem road crossings and surrounding the buildable areas, BESS and substation. The report needs to address the following: <ul style="list-style-type: none"> A list of species identified within the focus areas; Discuss the density of species; Fixed point photo (Taking photo at specific point within focus area where AIPs was identified); and Focus areas requiring AIP control and proposed AIP control measures. 	Holder of EA	Adhere to impact management actions.	Reporting to be included as part of the annual ECO monitoring report and submitted to the competent authority.	A vegetation assessment to be undertaken one year post rehabilitation (during the growing season) to ensure plant survival and to ensure that no AIPs are outcompeting indigenous species.

8.2.2. Terrestrial

This section deals with the issues relative to the terrestrial biodiversity during the construction phase.

ASPECT/ IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAMES/ FREQUENCY
Alien Invasive Species Invasion	<ul style="list-style-type: none"> • Alien invasive species (AIS) and weeds must be removed from the site as per CARA/NEMBA requirements. • A suitable AIS and weed management strategy to be implemented during construction and operation phases. • After clearing and construction is completed, an appropriate cover may be required, should natural re-establishment of grasses not take place in a timely manner along road verges. This will also minimise dust. 	Holder of EA / Project Manager / ECO	Adhere to impact management actions	To minimize regeneration of AIS and weeds	Quarterly during the construction phase.

8.2.3. Avifaunal

This section deals with the issues relative to the avifaunal biodiversity during the construction phase.

ASPECT/ IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAMES/ FREQUENCY
Disturbance of bird roosts	As with other impacts, this impact can be mitigated by timing of any panel construction to not commence in November, December and January in order to avoid breeding	Client Appointed ECO.	<ul style="list-style-type: none"> • Drive Transects (species lists) – all species seen to be recorded along set transects to be driven during dawn till pre 10 am; and • Walked Transects (species lists) – all species heard and seen to be 	Loss/ decrease in any SCC parameter, unnatural decline (cannot be explained by stochastic weather changes) in species densities and/or richness.	Twice weekly during construction.

ASPECT/ IMPACT	IMPACT ACTIONS	MANAGEMENT	RESPONSIBILITY	METHOD	IMPACT OUTCOMES	MANAGEMENT	TIMEFRAMES/ FREQUENCY
	periods of species within the sensitive drainage lines, wetlands and the general region.			<p>recorded along set transects to be walked at dawn chorus.</p> <ul style="list-style-type: none"> All variables acquired should be statistically and graphically compared to the available data and the original targeted baseline data. Photographs should be taken of as many SCC observed in the field. Quarterly reporting presenting data analysis results and mapping indicating locations of change. Specific reporting on negative change detection not directly attributable to Project activities (Solar Facility Operation) and their cause. All reporting to be accompanied by GIS shapefiles and any original photographs. 	Similarly, positive changes (e.g, unusual presence in high densities of nomadic species such as Bustards or establishment of SCC breeding populations (not yet sighted), Large SCC Raptors and Secretary Bird) in species densities and/or richness that indicate disturbance. Rapid surveys of greater surrounding area should be conducted to attempt to determine cause of change detected.		
Disturbance due to noise such as, machinery movements and maintenance operations	As with other impacts, this impact can be mitigated by timing of any panel construction to not commence in November, December and January in order to avoid breeding periods of species within the sensitive drainage lines,		Client Appointed ECO.	<ul style="list-style-type: none"> Drive Transects (species lists) – all species seen to be recorded along set transects to be driven during dawn till pre 10 am; and Walked Transects (species lists) – all species heard and seen to be recorded along set transects to be walked at dawn chorus. All variables acquired should be statistically and graphically compared to the available data and 	Loss/ decrease in any SCC parameter, unnatural decline (cannot be explained by stochastic weather changes) in species densities and/or richness. Similarly, positive changes (e.g, unusual presence in high densities of nomadic species such as Bustards		Twice weekly during construction.

ASPECT/ IMPACT	IMPACT ACTIONS	MANAGEMENT	RESPONSIBILITY	METHOD	IMPACT OUTCOMES	MANAGEMENT	TIMEFRAMES/ FREQUENCY
	wetlands and the general region.			<p>the original targeted baseline data. Photographs should be taken of as many SCC observed in the field.</p> <ul style="list-style-type: none"> Quarterly reporting presenting data analysis results and mapping indicating locations of change. Specific reporting on negative change detection not directly attributable to Project activities (Solar Facility Operation) and their cause. All reporting to be accompanied by GIS shapefiles and any original photographs. 	or establishment of SCC breeding populations (not yet sighted), Large SCC Raptors and Secretary Bird) in species densities and/or richness that indicate disturbance. Rapid surveys of greater surrounding area should be conducted to attempt to determine cause of change detected.		

8.2.4. Agricultural

This section deals with the issues relative to the agricultural landscape during the construction phase.

ASPECT/ IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAMES/ FREQUENCY
Protection of soil resources – Erosion	Implement an effective system of storm water run-off control, where it is required - that is at any points where run-off water might accumulate. The system must effectively collect and safely disseminate any run-off water from	Environmental Control Officer (ECO)	Undertake a periodic site inspection to verify and inspect the effectiveness and integrity of the storm water run-off control system and to specifically record the occurrence of any erosion on	That disturbance and existence of hard surfaces causes no erosion on or downstream of the site.	Every 2 months during the construction phase.

ASPECT/ IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAMES/ FREQUENCY
	all accumulation points and it must prevent any potential down slope erosion.		site or downstream. Corrective action must be implemented to the run-off control system in the event of any erosion occurring.		
Protection of soil resources – Erosion	Maintain where possible all vegetation cover and facilitate re-vegetation of denuded areas throughout the site, to stabilize disturbed soil against erosion.	Environmental Control Officer (ECO)	Undertake a periodic site inspection to record the occurrence of and re-vegetation progress of all areas that require re-vegetation.	That vegetation clearing does not pose a high erosion risk.	Every 4 months during the construction phase
Protection of soil resources – Topsoil loss	If an activity will mechanically disturb the soil below surface in any way, then any available topsoil should first be stripped from the entire surface to be disturbed and stockpiled for re-spreading during rehabilitation. During rehabilitation, the stockpiled topsoil must be evenly spread over the entire disturbed surface.	Environmental Control Officer (ECO)	Record GPS positions of all occurrences of below-surface soil disturbance (e.g. excavations). Record the date of topsoil stripping and replacement. Check that topsoil covers the entire disturbed area.	That topsoil loss is minimised	As required, whenever areas are disturbed.

8.2.5. Geotechnical

This section deals with the issues relative to the geotechnical landscape during the construction phase.

ASPECT/ IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAMES/ FREQUENCY
Disturbance and removal of rock and soil	Design access roads, platforms and post locations to minimis earthworks and levelling. The design must be based on high resolution ground contour information.	Design Team	Adhere to impact management actions	Reduce the need for large bulk earthworks and reduce the amount of spoiled material quantities.	Once
	Correct topsoil and spoil management.	Construction Contractor	Adhere to impact management actions	Stockpile organic rich topsoil during construction. Place topsoil on dead soil typically found at bulk earthworks areas.	Once
Soil Erosion	Avoid development in preferential drainage paths. Temporary berms and drainage channels to divert surface runoff where needed. Landscape and rehabilitate disturbed areas timeously (e.g. regressing). Use designated access and laydown areas only to minimize disturbance to surrounding areas.	Design Team / Construction Contractor	Adhere to impact management actions	Reduce the impact and intensity of soil erosion in areas where vegetation and natural drainage channels have been removed. Maintain site areas to reduce run-away rills and gullies	Once Monthly

8.2.6. Social

This section deals with the issues relative to the social landscape during the construction phase.

ASPECT/ IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAME/ FREQUENCY
Social / Socio-Economic Nature: employment and business opportunities	<ul style="list-style-type: none"> • Preparation and implementation of a Stakeholder Engagement Plan (SEP) prior to and during the construction phase. • The proponent should appoint local contractors and implement a 'locals first' policy, especially for semi and low-skilled job categories. However, due to the low skills levels in the area, the majority of skilled posts are likely to be filled by people from outside the area. • Where feasible, efforts should be made to employ local contractors that are compliant with Broad Based Black Economic Empowerment (BBBEE) criteria. • Where feasible, training and skills development programmes for locals should be initiated prior to the initiation of the construction phase. • The recruitment selection process should seek to promote gender equality and the employment of women wherever possible. • Liaise with the Hantam Municipality to identify potential opportunities in this regard. 	Holder of EA / Contractor	Stakeholder Engagement Plan (SEP)	Maximise local community employment benefits in the local economy.	On-going
Social / Socio-Economic Nature: family	<ul style="list-style-type: none"> • Preparation and implementation of a Stakeholder Engagement Plan (SEP) prior to and during the construction phase. 	Holder of EA / Contractor	Stakeholder Engagement Plan (SEP)	Reduce the risk posed to local family structures and social network	On-going

ASPECT/ IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAME/ FREQUENCY
structures and social networks	<ul style="list-style-type: none"> Preparation and implementation of a Community Health, Safety and Security Plan (CHSSP) prior to and during the construction phase. The proponent and the contractor should implement an HIV/AIDS and COVID-19 awareness programme for all construction workers at the outset of the construction phase. Liaise with the Hantam Municipality to identify potential opportunities in this regard. 		<p>Community Health, Safety and Security Plan (CHSSP)</p> <p>HIV/AIDS and COVID-19 awareness programme</p>		
Social / Socio-Economic Nature: safety of farmers and farm workers, livestock and damage to farm infrastructure	<ul style="list-style-type: none"> Preparation and implementation of a Stakeholder Engagement Plan (SEP) prior to and during the construction phase. Preparation and implementation of a Community Health, Safety and Security Plan (CHSSP) prior to and during the construction phase. 	Holder of EA / Contractor	<p>Stakeholder Engagement Plan (SEP)</p> <p>Community Health, Safety and Security Plan (CHSSP)</p>	Reduce the risk to farm workers, livestock and infrastructure	On-going

8.2.7. Heritage

This section deals with the issues relative to the heritage landscape during the construction phase.

ASPECT/ IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAMES/ FREQUENCY
Impact to significant archaeology	If any evidence of archaeological sites or remains (e.g. remnants of stone-made structures, indigenous ceramics, bones, stone artefacts, ostrich eggshell fragments, charcoal and ash concentrations), fossils, burials or other categories of heritage resources are found during the proposed development, work must cease in the vicinity of the find and SAHRA must be alerted immediately to determine an appropriate way forward.	ECO	n/a	Conservation of significant resources	Daily
Impact to significant palaeontology	If Palaeontological Heritage is uncovered during surface clearing and excavations ECO should be informed immediately. Fossil discoveries ought to be protected and the ECO/site manager must report to South African Heritage Resources Agency (SAHRA) so that mitigation (recording and collection) can be carried out.	ECO	n/a	Conservation of significant resources	Daily

8.2.8. Visual

This section deals with the issues relative to visual during the construction phase.

ASPECT/ IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAMES/ FREQUENCY
Visual quality	Limit vegetation clearance and the footprint of construction to what is absolutely essential.	Contractor	<ul style="list-style-type: none"> Plan which areas require the clearance of vegetation. Only clear vegetation when works in the area will be undertaken 	Limited dust generation.	Throughout construction.
	Consolidate the footprint of the construction camp to a functional minimum.		Ensure that the construction camp is consolidated (in size) during the design phase	Small construction camp footprint.	
	Avoid excavation, handling and transport of materials which may generate dust under very windy conditions.		During very windy conditions cease excavation, handling and transportation of materials which may generate dust.	No dust generated by activities undertaken during very windy conditions.	
	Keep stockpiled aggregates and sand covered to minimise dust generation.		<ul style="list-style-type: none"> Stockpile all aggregate and sand. Keep stockpiles covered when not in use. 	No airborne dust entrained from stockpiles.	
	Keep construction site tidy.		Implement measures to keep the site tidy	No wind-blown litter originating from the site.	

8.2.9. Transportation

This section deals with the issues relative to transportation aspects during the construction phase.

ASPECT / IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAMES/ FREQUENCY
Increase in road traffic	Group transportation of staff	Contractor	Planning	Reduce the magnitude of additional road traffic	Daily
	Stagger material, plant and equipment deliveries		Programming of works	Reduce the concentration of additional road traffic	Weekly
	Schedule deliveries for off-peak times			Reduce the concentration of additional road traffic	Weekly
	Adequate traffic law enforcement		Traffic management plan	Safely manage additional road traffic	Daily
Increase in traffic incidents with pedestrian and livestock	Reduce and control speed of vehicle	Contractor	Traffic management plan	Avoid incidents with pedestrians and livestock	Daily
	Safe accommodation of pedestrians			Avoid incidents with pedestrians	Daily
	Implement pedestrian safety initiatives		Social facilitation	Avoid incidents with pedestrians	Monthly
	Regularly maintain farm fences and access cattle grids		Inspections and communications	Avoid incidents with livestock	Monthly
Increase in road degeneration	Regularly conduct conditional assessments on gravel roads	Contractor	Visual inspections	Identify deterioration of local roads timeously	Monthly
	Implement a road maintenance programme under the auspices of the respective transport department	Contractor, local authority	Road maintenance	Reduce / address deterioration of local roads	Bi-annually

ASPECT / IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAMES/ FREQUENCY
Addition of abnormal loads	Stagger abnormal load deliveries	Contractor	Programming of works	Reduce the disturbance of road users associated with the transporting of abnormal loads	
	Schedule abnormal load deliveries for off- peak time			Reduce the disturbance of road users associated with the transporting of abnormal loads	
	Ensure compliance with permits		Inspections	Safely manage abnormal loads	
	Adequate traffic law enforcement		Traffic management plan	Safely manage abnormal loads	

8.2.10. Risk

This section deals with the issues relative to risk aspects during the construction phase.

ASPECT/ IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAMES/ FREQUENCY
Environment: Emissions to air	<ul style="list-style-type: none"> Use dampening on roads etc. as per normal construction practices. PPE (dust masks) for specific construction workers. 	Holder of the EA/Contractor	Adhere to impact management actions	Limited dust generation.	Daily
Environment: Emissions to water	<ul style="list-style-type: none"> Normal construction site practices for preventing and containing fuels/paint/oil etc spills. Bunding under any temporary tanks, curbing under truck offloading areas and sealed surfaces (e.g., concrete) under 	Holder of the EA/Contractor	Adhere to impact management actions	Protection of water resources	Daily

ASPECT/ IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT OUTCOMES	MANAGEMENT	TIMEFRAMES/ FREQUENCY
	<p>truck parking area is particularly important.</p> <ul style="list-style-type: none"> • Spill clean-up procedures to be in place before commencing construction. • Sewage and any kitchen liquids - containment and suitable treatment/disposal 					
Environment: Emissions to earth	<ul style="list-style-type: none"> • Packaging materials that will need to be disposed of after the entire system is connected and commissioned as well as after regular maintenance. • Waste segregation (e.g., electronic equipment, chemicals) and management on the site. 	Holder of the EA/Contractor	Adhere to impact management actions	Reduction in environmental damage		Monthly
Environment: Waste of resources / BESS	<ul style="list-style-type: none"> • Water usage to be monitored on site during construction. • Handling protocols to be provided by battery supplier. • End of Life plan needs to be in place before any battery containers enter the country as there may be damaged battery unit from day 1. • Water management plan and spill containment plans to be in place. 	Holder of the EA/Contractor	<p>Adhere to impact management actions</p> <p>End of Life Plan</p> <p>Water Management Plan</p> <p>Spill Containment Plan</p>	Reduction in environmental damage		Daily

8.2.11. Hydrological

This section deals with the issues relative to hydrological aspects during the construction phase.

ASPECT/ IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAME/ FREQUENCY
Impeding or diverting the flow of water in a watercourse	Storm water management infrastructure development such as diversion berms channels and silt management through silt traps and silt fences.	Engineer/ Contractor/ ECO	Ensure berms, channels and silt traps are built in accordance with design specs, and their integrity is maintained	Diversion of surface/stream flow away from construction footprints, site camps, and laydown/storage areas	Initial construction / Monthly / After major rainfall event
Erosion from disturbed open ground areas, unconsolidated soil and stockpiles	All exposed soil, including stockpiles, must be protected for the duration of the construction phase with a suitable geotextile (e.g., Geojute or hessian sheeting).	Contractor / ECO	Inspect stockpiles and exposed ground areas, particularly during wind or rainy conditions	To prevent excessive erosion, and sedimentation of the receiving freshwater environment	Weekly / After major rainfall event
Contamination of the watercourses and down slope stream areas by spills of hydrocarbons from construction vehicles and workshop areas	Ensure adequate training of all machine operators and conduct daily checks on vehicles/machinery. Breakdowns to be fixed offsite. Spill kits to be readily available. Ongoing sampling/monitoring of nearby water resources.	Contractor/ ECO/ Water Scientist	Do spot checks on vehicle checklists / operational compliance. Collect & analyse. water quality parameters at specified monitoring points.	Water monitoring points should be located both upstream and downstream of the proposed development site to ensure any impacts can be identified with appropriate responsive mitigation measures implemented.	Monthly / After major spill event
Disturbance to natural vegetation cover	All footprint areas must remain as small as possible and vegetation clearing to be limited to what is absolutely	ECO	Monitoring of grass germination and soil amelioration.	To ensure adequate and fast surface	Weekly

ASPECT/ IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAME/ FREQUENCY
	essential to ensure as much indigenous vegetation is retained. Adequate re-vegetation to those disturbed areas.		Ensure that no natural vegetation on site is disturbed unnecessarily.	coverage, to minimise erosion potential.	
An increase in impervious areas	All excavated areas must be compacted to natural soil compaction levels to prevent the formation of preferential surface flow paths and subsequent erosion. Conversely, areas compacted as a result of construction must be loosened to natural soil compaction levels.	ECO	Non-footprint areas to be assessed for adequate rehabilitation. Grass berms around solar infrastructure to be closely monitored.	To reduce the impact and erosive potential of water flowing off hardened surfaces.	Weekly

8.3 Operational Phase

8.3.1. Aquatic

This section deals with the issues relative to the aquatic biodiversity during the operational phase.

ASPECT/ IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAMES/ FREQUENCY
Erosion and sedimentation	To monitor the extent of erosion and sedimentation of the freshwater ecosystems. Provide a report addressing the following: <ul style="list-style-type: none"> Brief indication of the method of assessment; Assumptions and Limitations must be listed; 	Holder of EA	Adhere to impact management actions	Reporting to be included as part of the annual ECO monitoring report and submitted to the competent authority.	Visual inspections must take place monthly during the winter rainy season for three years after the completion of construction to monitor and remove debris, sediment deposits and

ASPECT/ IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAMES/ FREQUENCY
	<ul style="list-style-type: none"> • Photographs and GPS point locations taken of existing erosion prior to and post rehabilitation activities must be incorporated into the report; • Any erosion observed must be discussed in detail; • Map indicating where erosion is present; and • Recommended mitigation and remediation actions should be presented and dates when remediation actions were undertaken. 				erosion along the freshwater ecosystem crossings.
Alien Invasive Species Plant Control	<p>Monitoring must be undertaken as per an Alien and Invasive plant species plan. This must include:</p> <ul style="list-style-type: none"> • Visual inspections must take place monthly during the winter rainy season for three years after the completion of construction to monitor the establishment of alien or invasive plant species, specifically at the freshwater ecosystems in the vicinity of the buildable areas (1-4), but also surrounding the BESS and substation. 	Holder of the EA	Adhere to impact management actions	Reporting to be included as part of the annual ECO monitoring report and submitted to the competent authority.	<p>Monitoring must be undertaken as per an Alien and Invasive plant species plan. This must include:</p> <ul style="list-style-type: none"> • Visual inspections must take place monthly during the winter rainy season for three years after the completion of construction to monitor the establishment of alien or invasive plant species, specifically at the freshwater ecosystems in the

ASPECT/ IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAMES/ FREQUENCY
					vicinity of the buildable areas (1-4), but also surrounding the BESS and substation.
Revegetation	<p>To monitor the reinstatement of vegetation. The report needs to address the following:</p> <ul style="list-style-type: none"> • A list of species occurring within the focus areas; • Discuss the density of species; • Fixed point photo (Taking photo at specific point within focus area to identify the success of revegetation; and • Focus areas requiring remedial action and proposed corrective actions. 	Holder of the EA	Adhere to impact management actions	Reporting to be included as part of the annual ECO monitoring report and submitted to the competent authority.	A vegetation assessment to be undertaken one year post rehabilitation (during the growing season) to ensure plant survival and to ensure that no AIPs are outcompeting indigenous species.

8.3.2. Terrestrial

This section deals with the issues relative to the terrestrial biodiversity during the operational phase.

ASPECT/ IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAMES/ FREQUENCY
Alien Invasive Species Invasion	<ul style="list-style-type: none"> • Alien invasive species (AIS) and weeds must be removed from the site as per CARA/NEMBA requirements. • A suitable AIS and weed management strategy to be implemented during construction and operation phases. • After clearing and construction is completed, an appropriate cover may be required, should natural re-establishment of grasses not take place in a timely manner along road verges. This will also minimise dust. 	Holder of EA/ Project Manager / ECO	Adhere to impact management actions	To minimise regeneration of AIS and weeds	Annually during the operational phase.
Rehabilitation of bare and exposed areas	<ul style="list-style-type: none"> • Minimise any disturbance of areas undergoing rehabilitation. • Use plant species that are indigenous to the vegetation type and that were found there before the construction process. This will increase the likelihood of the area's functional integrity to return to a state similar to that of before the Construction Phase. 	Holder of EA/ Project Manager / ECO	Adhere to impact management actions	To avoid degradation of the environment and regenerate habitat	Life of Rehabilitation

8.3.3. Avifaunal

This section deals with the issues relative to avifaunal biodiversity during the operation phase.

ASPECT/ IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAMES/ FREQUENCY
Bird mortalities	Impacts due to bird mortalities during the operational phase are practically unavoidable for any large facility, but with the appropriate mitigation measures these impacts can be minimised. It is likely that most of the avifaunal populations will be largely displaced from the majority of the project infrastructure, although significant risks are associated with the likelihood of project vehicles flushing birds into fencing infrastructure as well as collisions of large bodied species with powerlines. Although the current overall bird activity qualifies the proposed solar development boundary as a high-density area, there are certain times of the year (and day) when it appears that large flocks of birds (such as cranes, bustards and large birds of prey) are far more prevalent. All powerline infrastructure must be fitted with approved bird diverters in order to provide visibility for large-bodied birds. In all areas where service road intersects with semi natural or natural habitat, all fences must be set back at least (strictly) 75 metres from the edge of	Company Appointed ECO, trained by SACNASP registered Zoologist.	<ul style="list-style-type: none"> For panel location sites: weekly inspection on foot of cleared areas for birds killed during the operation process. Location and species must be recorded (a georeferenced photograph as evidence is also required). Monthly reporting presenting data analysis results and mapping indicating locations of change. Specific reporting on 	Collision frequency and intensity (# kills per species per unit time) will need to be assessed per species by specialist. However, any non-specific collision concentrations (> 10 kills per month clustering in a stretch of powerline) must initiate investigation and corrective measures (including retrofitting of mitigation measures).	Weekly for panels between November and March.

ASPECT/ IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAMES/ FREQUENCY
	<p>every service road in order to allow for vulnerable species such as bustards, raptors and korhaans to obtain adequate height after being flushed by vehicle traffic. An Alternative mitigation measure and where a 75-metre buffer is not possible, new fences must be set back no more than 5 metres (directly adjacent) from the edge of service roads. Through the essential elimination of habitat, this will limit any chance of vulnerable species foraging on verge side vegetation and causing subsequent fence collisions.</p>		<p>negative change detection not directly attributable to Project activities (Solar Facility Operation) and their cause. All reporting to be accompanied by GIS shapefiles and any original photographs.</p>		
<ul style="list-style-type: none"> • Disruption of bird migratory pathways • The attraction of some novel bird species due to the development of a solar farm with associated infrastructure such as lake effect, perches, nest and shade 	<ul style="list-style-type: none"> • Migratory pathways of birds cannot be changed, and the resulting impacts are unavoidable. However, severity of the impacts can be reduced with appropriate mitigation measures. Some significant discernible migratory flight pathways were able to be established which could be explained by large areas of generic habitats punctuated by some distinguishing geographic features in the landscape, such as large ridges, large impoundments, wetlands and drainage lines. The linear drainage line habitats must be buffered in accordance with the EIA sensitivity mapping. • Essentially, all habitat attractants should be 	<p>Company Appointed ECO, trained by a SACNASP registered Zoologist.</p>	<ul style="list-style-type: none"> • For panel location sites: Monthly inspection using Drive and Walking Transects. • CWAC counts 	<p>Species inventories and passage rate data collection.</p>	<p>Monthly SCC and species inventories during November, December, January and February</p>

ASPECT/ IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAMES/ FREQUENCY
<p>opportunities.</p> <ul style="list-style-type: none"> Disturbance due to noise such as, machinery movements and maintenance operations. 	<p>eliminated so that avifaunal populations will not embedded themselves within the infrastructure over time. This includes bird diverters, perch deterrents and the application of Non-polarising white tape can be used around and/or across panels to minimise reflection which can attract aquatic birds and insects (food) as panels mimic reflective surfaces of waterbodies.</p>				
<p>Chemical pollution</p>	<ul style="list-style-type: none"> The application of strict chemical control protocols 	<p>Company appointed ECO.</p>	<ul style="list-style-type: none"> For panel location sites: weekly inspection on foot Yearly soil analysis sent to accredited lab 	<ul style="list-style-type: none"> Spill Records Yearly chemical analysis results matched to prescribed thresholds 	<p>Weekly spill detection for panels</p>

8.3.4. Agricultural

This section deals with the issues relative to agricultural aspects during the operation phase.

ASPECT/ IMPACT	IMPACT ACTIONS	MANAGEMENT	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAMES/ FREQUENCY
Protection of soil resources – Erosion	Maintain the storm water run-off control system. Monitor erosion and remedy the storm water control system in the event of any erosion occurring.		Facility Environmental Manager	Undertake a periodic site inspection to verify and inspect the effectiveness and integrity of the storm water run-off control system and to specifically record the occurrence of any erosion on site or downstream. Corrective action must be implemented to the run-off control system in the event of any erosion occurring.	That existence of hard surfaces causes no erosion on or downstream of the site.	Bi-annually
Protection of soil resources – Erosion	Facilitate re-vegetation of denuded areas throughout the site.		Facility Environmental Manager	Undertake a periodic site inspection to record the progress of all areas that require re-vegetation.	That denuded areas are re-vegetated to stabilise soil against erosion.	Bi-annually

8.3.5. Geotechnical

This section deals with the issues relative to geotechnical aspects during the operation phase.

ASPECT/ IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAMES/ FREQUENCY
Soil Erosion	Maintain access roads including drainage features. Monitor for erosion and remediate and rehabilitate timeously.	Operations team	Adhere to impact management actions	Maintain site areas to reduce run-away rills and gullies.	Monthly

8.3.6. Social

This section deals with the issues relative to social aspects during the operation phase.

ASPECT/ IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAME/ FREQUENCY
Social / Socio-Economic Nature: improve energy security and support renewable sector	<ul style="list-style-type: none"> Implement a skills development and training programme aimed at maximizing the number of employment opportunities for local community members. Maximise opportunities for local content, procurement, and community shareholding. Liaise with the Hantam Municipality to identify potential opportunities in this regard. 	Holder of EA / Contractor	Skills development and training programme	Maximise local community employment benefits in the local economy.	On-going

8.3.7. Visual

This section deals with the issues relative to visual aspects during the operation phase.

ASPECT/ IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAMES/ FREQUENCY
Altered sense of place and visual intrusion	Install the powerlines underground, where possible.	Developer	Incorporate underground powerlines in the design.	Reduced visual clutter interrupting views.	On completion of construction activities. Throughout operation phase.
	Fence the perimeter of the site with green or black fencing.		Install a perimeter fence.	The site is screened by the fence.	
	Ensure that the roof color of the proposed buildings blends into the landscape.		Incorporate color requirements in the design.	The roof visibly blends into the landscape.	
Altered visual quality	Reduce the height of lighting masts to a workable minimum.	Developer and contractor	Incorporate lighting requirements in the design.	Limited light pollution caused by the SEF.	Once construction activities have concluded. Throughout operational phase.
	Direct lighting inwards and downwards to limit light pollution.				

8.3.8. Transportation

This section deals with the issues relative to transportation aspects during the operation phase.

APECT/IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAMES/ FREQUENCY
Increase in road traffic	Group transportation of staff	Operator	Planning	Reduce the magnitude of additional road traffic	When required

APECT/IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAMES/ FREQUENCY
Increase in traffic incidents with pedestrians and livestock	Safe accommodation of pedestrians	Operator	Monitoring	Avoid incidents with pedestrians	Weekly
	Reduce vehicle speed			Avoid incidents with pedestrians and livestock	Daily
	Regularly maintain farm fences and access cattle grids		Inspections and reporting	Avoid incidents with livestock	Monthly
Addition of abnormal loads	Schedule abnormal load deliveries for off-peak time	Operator	Programming of maintenance	Reduce the disturbance of road users associated with the transporting of abnormal loads	When required
	Ensure compliance with permits	Contractor	Inspections	Safely manage abnormal loads	When required
	Adequate traffic law enforcement		Traffic management plan	Safely manage abnormal loads	When required

8.3.9. Risk

This section deals with the issues relative to risk aspects during the operation phase.

ASPECT/ IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAMES/ FREQUENCY
Environment: Emissions to water	<ul style="list-style-type: none"> Bunding under any outdoors tanks, curbing under truck offloading areas and sealed surfaces (e.g., concrete) under truck parking area is particularly important. Sewage and any kitchen liquids - containment and suitable treatment/disposal. 	Holder of the EA/Contractor	Adhere to impact management actions Water Management Plan Spill Containment Plan	Protection of water resources Compliance with National Environment Management Act (NEMA)	As required

ASPECT/ IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAMES/ FREQUENCY
	<ul style="list-style-type: none"> • Procedures for dealing with damaged/leaking equipment as well as clean-up of spills. • Normal site practices for preventing and containing diesel/paint etc spills. • Waste management plan to be in place e.g., liquid waste treatment or suitable removal and disposal will be provided. • Spill clean-up procedures to be in place before bringing container on site, including spill kits – non-combustible materials, hazmat disposal. • The National Environment Management Act (NEMA) has a list of substances with Reportable spill Quantities, ensure compliance with this. 				
Environment: Emissions to earth	<ul style="list-style-type: none"> • Waste segregation (e.g., electronic equipment, chemicals) and management on the site. 	Holder of the EA/Contractor	Adhere to impact management actions	Reduction in environmental damage	Monthly
Environment: Waste of resources / BESS	<ul style="list-style-type: none"> • Water usage to be monitored on site. • Handling protocols to be provided by supplier of batteries. • Water management plan and spill containment plans to be in place. • Investigate end of Life plan for solid state batteries - reuse / recovery / reconditioning. 	Holder of the EA/Contractor	Adhere to impact management actions End of Life Plan Water Management Plan Spill Containment Plan	Reduction in environmental damage	Monthly

8.3.10. Hydrological

This section deals with the issues relative to hydrological aspects during the operation phase.

ASPECT/ IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAME/ FREQUENCY
Natural vegetation disturbance/ loss resulting in the emergence of invasive alien vegetation.	Alien and invasive plant species identified must be removed and disposed of as per an Alien and Invasive Species Control Plan and the area must be revegetated with suitable indigenous vegetation.	ECO	Regular inspection of the area surrounding the surface infrastructure (proposed PV facility and grid connection infrastructure) should occur to monitor the establishment of vegetation, prevent the establishment of alien and invasive vegetation species, and their potential spread into the surrounding freshwater ecosystem.	Reintroduce indigenous vegetation during rehabilitation, to outcompete in emerging aliens. Ensure that invasive species do not become established on site and further impact freshwater systems.	Monthly
Contamination of the watercourses and down slope stream areas by spills from chemicals used to clean or maintain the facility's assets.	Ensure adequate training of all cleaning staff. conduct daily checks on cleaning equipment. Spill kits to be readily available. Ongoing sampling/monitoring of nearby water resources.	Contractor / ECO / Water Scientist	Do spot checks on cleaning equipment checklists / storage facilities. Collect & analyse water quality parameters at specified monitoring points.	Water monitoring points should be located both upstream and downstream of the proposed development site to ensure any impacts can be identified	Monthly / After major spill event

ASPECT/ IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAME/ FREQUENCY
				with appropriate responsive mitigation measures implemented.	
An increase in impervious areas, in the form of internal access roads and service infrastructure.	All footprint areas must remain as small as possible and vegetation clearing to be limited to what is absolutely essential to ensure as much indigenous vegetation is retained. Vegetated berms to be placed along the downslope of solar infrastructure, so slow the accelerated runoff from hardened surfaces.	ECO	Assess and document vegetation growth at the base of solar infrastructure. Record areas of erosion, subsidence, or soil loss. Ensure surface runoff is adequately channelled.	To reduce the rates of increased surface flow velocity, thus decreasing the risk of erosion and sediment reaching the natural water resources.	Monthly

8.4 Decommissioning Phase

8.4.1. Aquatic

This section deals with the issues relative to aquatic biodiversity during the decommissioning phase.

ASPECT/ IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAMES/ FREQUENCY
Alien Invasive Species Plant Control	Monitoring must be undertaken as per an Alien and Invasive plant species plan. This must include:	Holder of the EA	Adhere to impact	Reporting to be included as part of the annual ECO	Monitoring must be undertaken as per an Alien and Invasive plant

ASPECT/ IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAMES/ FREQUENCY
	<ul style="list-style-type: none"> Visual inspections must take place monthly during the winter rainy season for three years after the completion of construction to monitor the establishment of alien or invasive plant species, specifically at the freshwater ecosystems in the vicinity of the buildable areas (1-4), but also surrounding the BESS and substation. 		management actions	monitoring report and submitted to the competent authority.	species plan. This must include: <ul style="list-style-type: none"> Visual inspection of decommission footprint areas once a month during the decommissioning phase.
Revegetation	To monitor the reinstatement of vegetation. The report needs to address the following: <ul style="list-style-type: none"> A list of species occurring within the focus areas; Discuss the density of species; Fixed point photo (Taking photo at specific point within focus area to identify the success of revegetation; and Focus areas requiring remedial action and proposed corrective actions. 	Holder of the EA	Adhere to impact management actions	Reporting to be included as part of the annual ECO monitoring report and submitted to the competent authority.	A vegetation assessment to be undertaken one year post rehabilitation (during the growing season) to ensure plant survival and to ensure that no AIPs are outcompeting indigenous species.

8.4.2. Terrestrial

This section deals with the issues relative to terrestrial biodiversity during the decommissioning phase.

ASPECT/ IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAMES/ FREQUENCY
Alien Invasive Species Invasion	<ul style="list-style-type: none"> • Alien invasive species (AIS) and weeds must be removed from the site as per CARA/NEMBA requirements. • A suitable AIS and weed management strategy to be implemented during construction and operation phases. • After clearing and construction is completed, an appropriate cover may be required, should natural re-establishment of grasses not take place in a timely manner along road verges. This will also minimise dust. 	Holder of EA/ Project Manager/ ECO	Adhere to impact managem ent actions	To minimise regeneration of AIS and weeds	Once-off during the decommissioni ng phase.

8.4.3. Agriculture and Soils

This section deals with the issues relative to agriculture and soils during the decommissioning phase.

ASPECT/ IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAMES/ FREQUENCY
Protection of soil resources – Erosion	Implement an effective system of storm water run-off control, where it is required - that is at any points where run-off water might accumulate. The system must effectively collect and safely disseminate	Environmental Control Officer (ECO)	Undertake a periodic site inspection to verify and inspect the effectiveness and integrity of the storm water run-off control system and to specifically record the occurrence of any erosion on	That disturbance and existence of hard surfaces causes no erosion on or downstream of the site.	Every 2 months during the decommissioning phase, and then every 6 months after completion of

ASPECT/ IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAMES/ FREQUENCY
	any run-off water from all accumulation points and it must prevent any potential down slope erosion.		site or downstream. Corrective action must be implemented to the run-off control system in the event of any erosion occurring.		decommissioning, until final sign-off is achieved.
Protection of soil resources – Erosion	Maintain where possible all vegetation cover and facilitate re-vegetation of denuded areas throughout the site, to stabilize disturbed soil against erosion.	Environmental Control Officer (ECO)	Undertake a periodic site inspection to record the occurrence of and re-vegetation progress of all areas that require re-vegetation.	That vegetation clearing does not pose a high erosion risk.	Every 4 months during the decommissioning phase, and then every 6 months after completion of decommissioning, until final sign-off is achieved.
Protection of soil resources – Topsoil loss	If an activity will mechanically disturb the soil below surface in any way, then any available topsoil should first be stripped from the entire surface to be disturbed and stockpiled for re-spreading during rehabilitation. During rehabilitation, the stockpiled topsoil must be evenly spread over the entire disturbed surface.	Environmental Control Officer (ECO)	Record GPS positions of all occurrences of below-surface soil disturbance (e.g. excavations). Record the date of topsoil stripping and replacement. Check that topsoil covers the entire disturbed area.	That topsoil loss is minimized.	As required, whenever areas are disturbed.

8.4.4. Geotechnical

This section deals with the issues relative to geotechnical aspects during the decommissioning phase.

ASPECT/ IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAMES/ FREQUENCY
Disturbance and removal of rock and soil	Restore natural site topography. Landscape and rehabilitate access roads and disturbed areas timeously (e.g. egressing).	Operations Team	Adhere to impact management actions	Reduce ponding of water and soil erosion by reinstating natural drainage channels.	Yearly
Soil Erosion	Temporary berms and drainage channels to divert surface runoff where needed. Restore natural site topography. Use designated access and laydown areas only to minimize disturbance to surrounding areas.	Operations Team	Adhere to impact management actions	Reduce ponding of water and soil erosion by reinstating natural drainage channels. Maintain remaining access roads.	Yearly

8.4.5. Visual

This section deals with the issues relative to visual aspects during the decommissioning phase.

ASPECT/ IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAMES/ FREQUENCY
Visual quality	Limited vegetation clearance and the footprint of decommissioning to what is absolutely essential.	Contractor	<ul style="list-style-type: none"> Plan which areas require the clearance of vegetation. Only clear the vegetation when works in the area will be undertaken. 	Limited clearance of exposed ground.	Throughout decommissioning
	Consolidate the footprint of the decommissioning camp to a		Ensure that the decommissioning camp footprint is consolidated	Reduced project footprint.	

ASPECT/ IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAMES/ FREQUENCY
	functional minimum.		where possible.		
	Avoid excavation, handling and transport of materials which may generate dust under very windy conditions.		During very windy conditions cease excavation, handling and transportation of materials which may generate dust	No dust generated by activities during very windy conditions.	
	Keep stockpiled aggregates and sand covered to minimise dust generation.		<ul style="list-style-type: none"> Stockpile all aggregates and sand. Keep stockpiles covered when not in use. 	No airborne dust entrained from stockpiles.	
	Keep site tidy.		Implement measures to keep the site tidy.	No wind-blown litter originating from the site.	

8.4.6. Risk

This section deals with the issues relative to risk aspects during the decommissioning phase.

ASPECT/ IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAMES/ FREQUENCY
Environment: Waste of resources / BESS	<ul style="list-style-type: none"> End of Life shutdown procedure including a Risk Assessment of the specific activities involved. Where possible re-purpose the solid-state batteries / containers and equipment with associated environmental impact considered. Disposal according to local regulations and other directives 	Holder of the EA/Contractor	Adhere to impact management actions End of Life Plan	Reduction in environmental damage	During decommissioning

ASPECT/ IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT OUTCOMES	MANAGEMENT TIMEFRAMES/FR EQUENCY
	<p>such as the European Batteries Directive.</p> <ul style="list-style-type: none"> • End of life, which is affected by temperature and time, cycles etc, should be predefined and the monitoring should be in place to determine if it has been reached. 				

8.4.7. Hydrological

This section deals with the issues relative to hydrological aspects during the decommissioning phase.

ASPECT/ IMPACT	IMPACT MANAGEMENT ACTIONS	RESPONSIBILITY	METHOD	IMPACT MANAGEMENT OUTCOMES	TIMEFRAME/ FREQUENCY
Contamination of the watercourses and down slope stream areas by spills of hydrocarbons from an increase in decommissioning machinery or loading / transport vehicles.	Ensure adequate training of all machine operators and conduct daily checks on vehicles/machinery. Breakdowns to be fixed off-site. Spill kits to be readily available. Ongoing sampling/monitoring of nearby water resources.	Contractor / ECO / Water Scientist	Do spot checks on vehicle checklists / operational compliance. Collect & analyse water quality parameters at specified monitoring points	Water monitoring points should be located both upstream and downstream of the proposed development site to ensure any impacts can be identified with appropriate responsive mitigation measures implemented.	Monthly / After major spill event
Disturbance to the site's established vegetation cover, resulting in bare soil exposure, and thus increasing the risk of erosion and sediment reaching downstream drainage lines.	All excavated areas must be compacted to natural soil compaction levels to prevent the formation of preferential surface flow paths and subsequent erosion. Conversely, areas compacted as a result of construction activities must be loosened to natural soil compaction levels. Adequate re-vegetation to those disturbed areas.	ECO	Monitoring of grass germination and soil amelioration. Ensure that no natural vegetation on site is disturbed unnecessarily.	To ensure adequate and fast surface coverage, to minimise erosion potential.	Weekly

APPENDIX 1: METHOD STATEMENTS

To be prepared by the contractor prior to commencement of the activity. The method statements are **not required** to be submitted to the CA.