


Appendix 7: Environmental Management Programme (EMPr)

APPENDIX 1
GENERIC ENVIRONMENTAL MANAGEMENT PROGRAMME (EMPr) FOR THE
DEVELOPMENT AND EXPANSION FOR OVERHEAD ELECTRICITY
TRANSMISSION AND DISTRIBUTION INFRASTRUCTURE

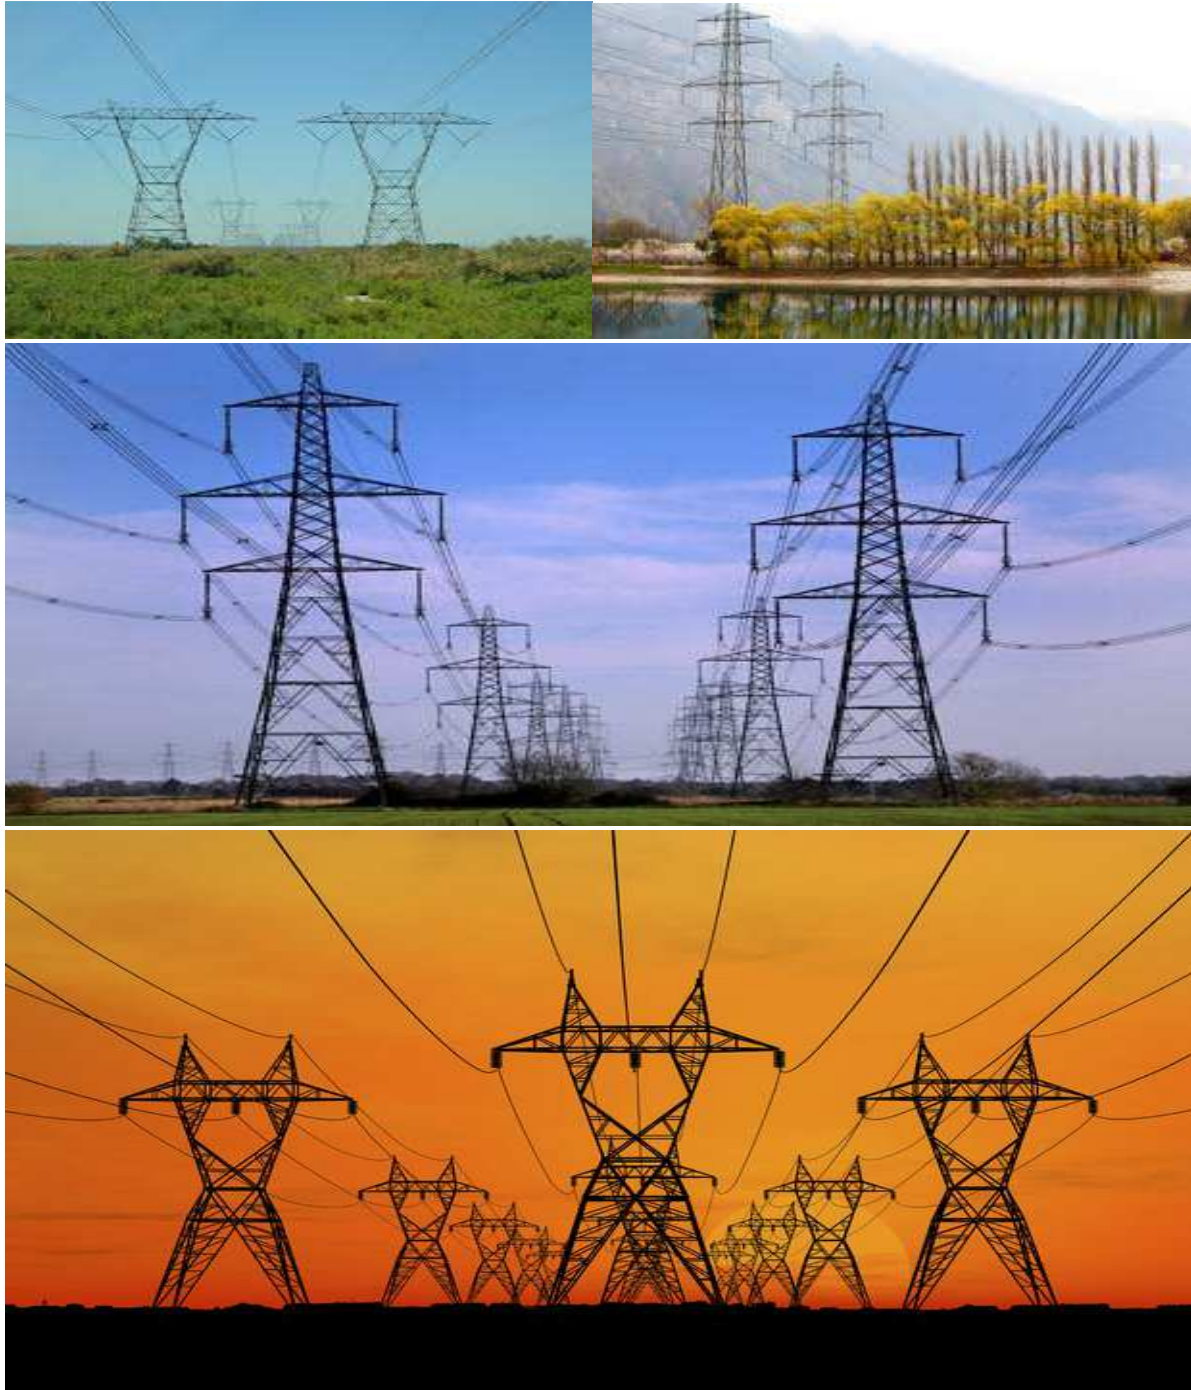

environmental affairs

Department:
Environmental Affairs
REPUBLIC OF SOUTH AFRICA

TABLE OF CONTENTS

INTRODUCTION.....	1
1. Background.....	1
2. Purpose	1
3. Objective	1
4. Scope	1
5. Structure of this document.....	2
6. Completion of part B: section 1: the pre-approved generic EMPr template.....	4
7. Amendments of the impact management outcomes and impact management actions.....	4
8. Documents to be submitted as part of part B: section 2 site specific information and declaration	4
(a) Amendments to Part B: Section 2 – site specific information and declaration.....	5
PART A – GENERAL INFORMATION.....	6
1. DEFINITIONS.....	6
2. ACRONYMS and ABBREVIATIONS	7
National Environmental Management: Biodiversity Act ,2004 (Act No. 10 of 2004).....	7
3. ROLES AND RESPONSIBILITIES FOR ENVIRONMENTAL MANAGEMENT PROGRAMME (EMPr) IMPLEMENTATION	8
4. ENVIRONMENTAL DOCUMENTATION REPORTING AND COMPLIANCE	14
4.1 Document control/Filing system	14
4.2 Documentation to be available.....	14
4.3 Weekly Environmental Checklist	14
4.4 Environmental site meetings.....	15
4.5 Required Method Statements	15
4.6 Environmental Incident Log (Diary).....	16
4.7 Non-compliance.....	16
4.8 Corrective action records.....	17
4.9 Photographic record	17
4.10 Complaints register.....	18
4.11 Claims for damages.....	18
4.12 Interactions with affected parties	18
4.13 Environmental audits.....	19
4.14 Final environmental audits.....	19
PART B: SECTION 1: Pre-approved generic EMPr template.....	20
5. IMPACT MANAGEMENT OUTCOMES AND IMPACT MANAGEMENT ACTIONS	20
5.1 Environmental awareness training	21

5.2	Site Establishment development	23
5.3	Access restricted areas	24
5.4	Access roads	27
5.5	Fencing and Gate installation	28
5.6	Water Supply Management.....	30
5.7	Storm and waste water management	32
5.8	Solid and hazardous waste management.....	33
5.9	Protection of watercourses and estuaries	34
5.10	Vegetation clearing.....	36
5.11	Protection of fauna	39
5.12	Protection of heritage resources	41
5.13	Safety of the public.....	42
5.14	Sanitation	42
5.15	Prevention of disease.....	44
5.16	Emergency procedures.....	45
5.17	Hazardous substances.....	46
5.18	Workshop, equipment maintenance and storage.....	49
5.19	Batching plants	50
5.20	Dust emissions	51
5.21	Blasting.....	53
5.22	Noise.....	53
5.23	Fire prevention.....	54
5.24	Stockpiling and stockpile areas	55
5.25	Finalising tower positions	56
5.26	Excavation and Installation of foundations.....	57
5.27	Assembly and erecting towers.....	58
5.28	Stringing	60
5.29	Socio-economic	62
5.30	Temporary closure of site	63
5.31	Landscaping and rehabilitation	65
6	ACCESS TO THE GENERIC EMPr.....	67
PART B: SECTION 2.....		68
7	SITE SPECIFIC INFORMATION AND DECLARATION	68
7.1	Sub-section 1: contact details and description of the project.....	68
7.2	Sub-section 2: Development footprint site map.....	69
7.3	Sub-section 3: Declaration.....	75

7.4	Sub-section 4: amendments to site specific information (Part B; section 2)	75
	PART C.....	76
8	SITE SPECIFIC ENVIRONMENTAL ATTRIBUTES	76
	APPENDIX 1: METHOD STATEMENTS.....	93

List of figures

Figure 1:	Terrestrial ecological sensitivity map	70
Figure 2:	Heritage, Protected Areas, and IBA sensitivity map of the study area.....	71
Figure 3:	Sensitivity Map – Surface Water.....	71
Figure 4:	Sensitivity Map – Wetlands associated with Towers 8-10.....	72
Figure 5:	Sensitivity Map – Wetlands associated with Towers 89-90.....	72
Figure 6:	Sensitivity Map – Wetlands associated with Towers 222-223	73
Figure 7:	Sensitivity Map – Wetlands associated with Towers 228	73
Figure 8:	Sensitivity Map – Wetlands associated with Towers 260	74
Figure 9:	Sensitivity Map – Wetlands associated with Towers 284-296	74

List of tables

Table 1:	Guide to roles and responsibilities for implementation of an EMPr	8
----------	---	---

INTRODUCTION

1. Background

The National Environmental Management Act, 1998 (Act No. 107 of 1998) (NEMA) requires that an environmental management programme (EMPr) be submitted where an environmental impact assessment (EIA) has been identified as the environmental instrument to be utilised as the basis for a decision on an application for environmental authorisation (EA). The content of an EMPr must either contain the information set out in Appendix 4 of the Environmental Impact Assessment Regulations, 2014, as amended, (EIA Regulations) or must be a generic EMPr relevant to an application as identified and gazetted by the Minister in a government notice. Once the Minister has identified, through a government notice, that a generic EMPr is relevant to an application for EA, that generic EMPr must be applied by all parties involved in the EA process, including, but not limited to, the applicant and the competent authority (CA).

2. Purpose

This document constitutes a generic EMPr relevant to applications for the development or expansion of overhead electricity transmission and distribution infrastructure, and all listed and specified activities necessary for the realisation of such infrastructure.

3. Objective

The objective of this generic EMPr is to prescribe and pre-approve generally accepted impact management outcomes and impact management actions, which can commonly and repeatedly be used for the avoidance, management and mitigation of impacts and risks associated with the development or expansion of overhead electricity transmission and distribution infrastructure. The use of a generic EMPr is intended to reduce the need to prepare and review individual EMPrs for applications of a similar nature.

4. Scope

The scope of this generic EMPr applies to the development or expansion of overhead electricity transmission and distribution infrastructure requiring EA in terms of NEMA, i.e. with a capacity of 33 kilovolts or more. This generic EMPr applies to activities requiring EA, mainly activity 11 and 47 of the Environmental Impact Assessment Regulations Listing Notice 1 of 2014, as amended, and activity 9 of the Environmental Impact Assessment Regulations Listing Notice 2 of 2014, as amended, and all associated listed or specified activities necessary for the realisation of such infrastructure.

5. Structure of this document

This document is structured in three parts with an Appendix as indicated in the table below:

Part	Section	Heading	Content
A		Provides general guidance and information and is not legally binding	Definitions, acronyms, roles & responsibilities and documentation and reporting.
B	1	Pre-approved generic EMPr template	<p>Contains generally accepted impact management outcomes and impact management actions required for the avoidance, management and mitigation of impacts and risks associated with the development or expansion of overhead electricity transmission and distribution infrastructure, which are presented in the form of a template that has been pre-approved.</p> <p>The template in this section is to be completed by the contractor, with each completed page signed and dated by the holder of the EA prior to commencement of the activity.</p> <p>Where an impact management outcome is not relevant, the words "not applicable" can be inserted in the template under the "responsible persons" column.</p> <p>Once completed and signed, the template represents the EMPr for the activity approved by the CA and is legally binding. The template is not required to be submitted to the CA as once the generic EMPr is gazetted for implementation, it has been approved by the CA.</p> <p>To allow interested and affected parties access to the pre-approved EMPr template for consideration through the decision-making process, the EAP on behalf of the applicant /proponent must make the hard copy of this EMPr available at a public location and where the applicant has a website, the EMPr should also be made available on such publicly accessible website.</p>
	2	Site specific information	Contains preliminary infrastructure layout and a declaration that the applicant/holder of the EA will comply with the pre-approved generic EMPr template contained in <u>Part B: Section 1</u> , and understands that the impact management

Part	Section	Heading	Content
			<p>outcomes and impact management actions are legally binding. The preliminary infrastructure layout must be finalized to inform the final EMPr that is to be submitted with the basic assessment report (BAR) or environmental impact assessment report (EIAR), ensuring that all impact management outcomes and actions have been either pre-approved or approved in terms of <u>Part C</u>.</p> <p>This section must be submitted to the CA together with the final BAR or EIAR. The information submitted to the CA will be considered to be incomplete should a signed copy of <u>Part B: section 2</u> not be submitted. Once approved, this Section forms part of the EMPr for the development and is legally binding.</p>
C		Site specific sensitivities/ attributes	<p>If any specific environmental sensitivities/ attributes are present on the site which require site specific impact management outcomes and impact management actions, not included in the pre-approved generic EMPr, to manage impacts, these specific impact management outcomes and impact management actions must be included in this section. These specific environmental attributes must be referenced spatially and impact management outcomes and impact management actions must be provided. These specific impact management outcomes and impact management actions must be presented in the format of the pre-approved EMPr template (<u>Part B: section 1</u>)</p> <p>This section will not be required should the site contain no specific environmental sensitivities or attributes. However, if <u>Part C</u> is applicable to the site, it is required to be submitted together with the BAR or EIAR, for consideration of, and decision on, the application for EA. The information in this section must be prepared by an EAP, and must contain his/her name and expertise including a curriculum vitae. Once approved, Part C forms part of the EMPr for the site and is legally binding.</p> <p>This section applies only to additional impact management outcomes and impact</p>

Part	Section	Heading	Content
			management actions that are necessary for the avoidance, management and mitigation of impacts and risks associated with the specific development or expansion and which are not already included in <u>Part B: section 1</u> .
	Appendix 1		Contains the method statements to be prepared prior to commencement of the activity. The method statements are not required to be submitted to the competent authority.

6. Completion of part B: section 1: the pre-approved generic EMPr template

The template is to be completed prior to commencement of the activity, by providing the following information for each environmental impact management action:

- For implementation
 - a 'responsible person',
 - a method for implementation,
 - a timeframe for implementation
- For monitoring
 - a responsible person
 - frequency
 - evidence of compliance.

The completed template must be signed and dated by the holder of the EA prior to commencement of the activity. The method statements prepared and agreed to by the holder of the EA must be appended to the template as Appendix 1. Each method statement must be signed and dated on each page by the holder of the EA. This template, once signed and dated, is legally binding. The holder of the EA will remain responsible for its implementation.

7. Amendments of the impact management outcomes and impact management actions

Once the activity has commenced, a holder of an EA may make amendments to the impact management outcomes and impact management actions in the following manner:

- Amendment of the impact management outcomes: in line with the process contemplated in regulation 37 of the EIA Regulations; and
- Amendment of the impact management actions: in line with the process contemplated in regulation 36 of the EIA Regulations.

8. Documents to be submitted as part of part B: section 2 site specific information and declaration

Part B: Section 2 has three distinct sub-sections. The first and third sub-sections are in a template format. Sub-section two requires a map to be produced.

Sub-section 1 contains the project name, the applicant's name and contact details, the site information, which includes coordinates of the corridor in which the proposed overhead electricity transmission and distribution infrastructure is proposed as well as the 21-digit Surveyor General code of each cadastral land parcel and, where available, the farm name.

Sub-section 2 is to be prepared by an EAP and must contain his/her name and expertise including a curriculum vitae. This sub-section must include a map of the site sensitivity overlaid with the preliminary infrastructure layout using the national web based environmental screening tool, when available for compulsory use at: <https://screening.environment.gov.za/screeningtool>. The sensitivity map shall identify the nature of each sensitive feature e.g. raptor nest, threatened plant species, archaeological site, etc. Sensitivity maps must identify features both within the planned working area and any known sensitive features in the surrounding landscape within 50m from the development footprint. The overhead transmission and distribution profile must be illustrated at an appropriate resolution to enable fine scale interrogation. It is recommended that <20 km of overhead transmission and distribution length is illustrated per page in A3 landscape format. Where considered appropriate, photographs of sensitive features in the context of tower positions must be used.

Sub-section 3 is the declaration that the applicant/proponent or holder of the EA in the case of a change of ownership must complete, which confirms that the applicant/EA holder will comply with the pre-approved generic EMPr template in Section 1 and understands that the impact management outcomes and actions are legally binding.

(a) Amendments to Part B: Section 2 – site specific information and declaration

Should the EA be transferred, Part B: Section 2 must be completed by the new applicant/proponent and submitted with the application for an amendment of the EA in terms of Regulations 29 or 31 of the EIA Regulations, whichever applies. The information submitted as part of such an application for an amendment to an EA will be considered to be incomplete should a signed copy of Part B: Section 2 not be submitted. Once approved, Part B: Section 2 forms part of the EMPr for the development and the EMPr becomes legally binding to the new EA holder.

PART A – GENERAL INFORMATION

1. DEFINITIONS

In this EMPr any word or expression to which a meaning has been assigned in the NEMA or EIA Regulations has that meaning, and unless the context requires otherwise –

"clearing" means the clearing and removal of vegetation, whether partially or in whole, including trees and shrubs, as specified;

"construction camp" is the area designated for key construction infrastructure and services, including but not limited to offices, overnight vehicle parking areas, stores, the workshop, stockpile and lay down areas, hazardous storage areas (including fuels), the batching plant (if one is located at the construction camp), designated access routes, equipment cleaning areas and the placement of staff accommodation, cooking and ablution facilities, waste and wastewater management;

"contractor" - The Contractor has overall responsibility for ensuring that all work, activities, and actions linked to the delivery of the contract, are in line with the Environmental Management Programme and that Method Statements are implemented as described.

"hazardous substance" is a substance governed by the Hazardous Substances Act, 1973 (Act No. 15 of 1973) as well as the Hazardous Chemical and Substances Regulations, 1995;

"method statement" means a written submission by the Contractor to the Project Manager in response to this EMPr or a request by the Project Manager and ECO. The method statement must set out the equipment, materials, labour and method(s) the Contractor proposes using to carry out an activity identified by the Project Manager when requesting the Method Statement. This must be done in such detail that the Project Manager and ECO is able to assess whether the Contractor's proposal is in accordance with this specification and/or will produce results in accordance with this specification;

The method statement must cover applicable details with regard to:

- (i) Construction procedures;
- (ii) Plant, materials and equipment to be used;
- (iii) Transporting the equipment to and from site;
- (iv) How the plant/ material/ equipment will be moved while on site;
- (v) How and where the plant/ material/ equipment will be stored;
- (vi) The containment (or action to be taken if containment is not possible) of leaks or spills of any liquid or material that may occur;
- (vii) Timing and location of activities;
- (viii) Compliance/ non-compliance; and
- (ix) Any other information deemed necessary by the Project Manager.

"slope" means the inclination of a surface expressed as one unit of rise or fall for so many horizontal units;

“solid waste” means all solid waste, including construction debris, hazardous waste, excess cement/ concrete, wrapping materials, timber, cans, drums, wire, nails, food and domestic waste (e.g. plastic packets and wrappers);

“spoil” means excavated material which is unsuitable for use as material in the construction works or is material which is surplus to the requirements of the construction works;

“topsoil” means a varying depth (up to 300 mm) of the soil profile irrespective of the fertility, appearance, structure, agricultural potential, fertility and composition of the soil; and

“works” means the works to be executed in terms of the Contract

2. ACRONYMS and ABBREVIATIONS

CA	Competent Authority
cEO	Contractors Environmental Officer
dEO	Developer Environmental Officer
DPM	Developer Project Manager
DSS	Developer Site Supervisor
EAR	Environmental Audit Report
ECA	Environmental Conservation Act No. 73 of 1989
ECO	Environmental Control Officer
EA	Environmental Authorisation
EIA	Environmental Impact Assessment
ERAP	Emergency Response Action Plan
EMPr	Environmental Management Programme Report
EAP	Environmental Assessment Practitioner
FPA	Fire Protection Agency
HCS	Hazardous chemical Substance
NEMA	National Environmental Management Act, 1998 (Act No. 107 of 1998)
NEMBA	National Environmental Management: Biodiversity Act ,2004 (Act No. 10 of 2004)
NEMWA	National Environmental Management: Waste Act, 2008 (Act No. 59 of 2008)
MSDS	Material Safety Data Sheet
RI&AP's	Registered interested and affected parties

3. ROLES AND RESPONSIBILITIES FOR ENVIRONMENTAL MANAGEMENT PROGRAMME (EMPr) IMPLEMENTATION

The effective implementation of this generic EMPr is dependent on established and clear roles, responsibilities and reporting lines within an institutional framework. This section of the EMPr gives guidance to the various environmental roles and reporting lines, however, project specific requirements will ultimately determine the need for the appointment of specific person(s) to undertake specific roles and or responsibilities. As such, it must be noted that in the event that no specific person, for example, an environmental control officer (ECO) is appointed, the holder of the EA remains responsible for ensuring that the duties indicated in this document for action by the ECO are undertaken.

Table 1: Guide to roles and responsibilities for implementation of an EMPr

Responsible Person (s)	Role and Responsibilities
Developer's Project Manager (DPM)	<p><u>Role</u></p> <p>The Project Developer is accountable for ensuring compliance with the EMPr and any conditions of approval from the competent authority (CA). Where required, an environmental control officer (ECO) must be contracted by the Project Developer to objectively monitor the implementation of the EMPr according to relevant environmental legislation, and the conditions of the environmental authorisation (EA). The Project Developer is further responsible for providing and giving mandate to enable the ECO to perform responsibilities, and he must ensure that the ECO is integrated as part of the project team while remaining independent.</p> <p><u>Responsibilities</u></p> <ul style="list-style-type: none"> - Be fully conversant with the conditions of the EA; - Ensure that all stipulations within the EMPr are communicated and adhered to by the Developer and its Contractor(s); - Issuing of site instructions to the Contractor for corrective actions required; - Monitor the implementation of the EMPr throughout the project by means of site inspections and meetings. Overall management of the project and EMPr implementation; and - Ensure that periodic environmental performance audits are undertaken on the project implementation.
Developer Site Supervisor (DSS)	<u>Role</u>

Responsible Person (s)	Role and Responsibilities
	<p>The DSS reports directly to the DPM, oversees site works, liaises with the contractor(s) and the ECO. The DSS is responsible for the day to day implementation of the EMPr and for ensuring the compliance of all contractors with the conditions and requirements stipulated in the EMPr.</p> <p><u>Responsibilities</u></p> <ul style="list-style-type: none"> - Ensure that all contractors identify a contractor's Environmental Officer (cEO); - Must be fully conversant with the conditions of the EA. Oversees site works, liaison with Contractor, DPM and ECO; - Must ensure that all landowners have the relevant contact details of the site staff, ECO and cEO; - Issuing of site instructions to the Contractor for corrective actions required; - Will issue all non-compliances to contractors; and - Ratify the Monthly Environmental Report.
Environmental Control Officer (ECO)	<p><u>Role</u></p> <p>The ECO should have appropriate training and experience in the implementation of environmental management specifications. The primary role of the ECO is to act as an independent quality controller and monitoring agent regarding all environmental concerns and associated environmental impacts. In this respect, the ECO is to conduct periodic site inspections, attend regular site meetings, pre-empt problems and suggest mitigation and be available to advise on incidental issues that arise. The ECO is also required to conduct compliance audits, verifying the monitoring reports submitted by the cEO. The ECO provides feedback to the DSS and Project Manager regarding all environmental matters. The Contractor, cEO and dEO are answerable to the Environmental Control Officer for non-compliance with the Performance Specifications as set out in the EA and EMPr.</p> <p>The ECO provides feedback to the DSS and Project Manager, who in turn reports back to the Contractor and potential and Registered Interested & Affected Parties' (RI&AP's), as required. Issues of non-compliance raised by the ECO must be taken up by the Project Manager, and resolved with the Contractor as per the conditions of his contract. Decisions regarding environmental procedures, specifications and requirements which have a cost implication (i.e. those that are deemed to be a variation, not allowed for in the Performance Specification) must be endorsed by the Project Manager. The ECO must also, as specified by the EA, report to the relevant CA as and when required.</p>

Responsible Person (s)	Role and Responsibilities
	<p><u>Responsibilities</u></p> <p>The responsibilities of the ECO will include the following:</p> <ul style="list-style-type: none"> - Be aware of the findings and conclusions of all EA related to the development; - Be familiar with the recommendations and mitigation measures of this EMPr; - Be conversant with relevant environmental legislation, policies and procedures, and ensure compliance with them; - Undertake regular and comprehensive site inspections / audits of the construction site according to the generic EMPr and applicable licenses in order to monitor compliance as required; - Educate the construction team about the management measures contained in the EMPr and environmental licenses; - Compilation and administration of an environmental monitoring plan to ensure that the environmental management measures are implemented and are effective; - Monitoring the performance of the Contractors and ensuring compliance with the EMPr and associated Method Statements; - In consultation with the Developer Site Supervisor order the removal of person(s) and/or equipment which are in contravention of the specifications of the EMPr and/or environmental licenses; - Liaison between the DPM, Contractors, authorities and other lead stakeholders on all environmental concerns; - Compile a regular environmental audit report highlighting any non-compliance issues as well as satisfactory or exceptional compliance with the EMPr; - Validating the regular site inspection reports, which are to be prepared by the contractor Environmental Officer (cEO); - Checking the cEO's record of environmental incidents (spills, impacts, legal transgressions etc) as well as corrective and preventive actions taken; - Checking the cEO's public complaints register in which all complaints are recorded, as well as action taken; - Assisting in the resolution of conflicts; - Facilitate training for all personnel on the site – this may range from carrying out the training, to reviewing the training programmes of the Contractor; - In case of non-compliances, the ECO must first communicate this to the Senior Site Supervisor, who has the power to ensure this matter is addressed. Should no action or insufficient action be taken, the ECO may report this matter to the authorities as non-compliance; - Maintenance, update and review of the EMPr; - Communication of all modifications to the EMPr to the relevant stakeholders.

Responsible Person (s)	Role and Responsibilities
<p>developer Environmental Officer (dEO)</p>	<p><u>Role</u></p> <p>The dEOs will report to the Project Manager and are responsible for implementation of the EMPr, environmental monitoring and reporting, providing environmental input to the Project Manager and Contractor's Manager, liaising with contractors and the landowners as well as a range of environmental coordination responsibilities.</p> <p><u>Responsibilities</u></p> <ul style="list-style-type: none"> - Be fully conversant with the EMPr; - Be familiar with the recommendations and mitigation measures of this EMPr, and implement these measures; - Ensure that all stipulations within the EMPr are communicated and adhered to by the Employees, Contractor(s) ; - Confine the development site to the demarcated area; - Conduct environmental internal audits with regards to EMPr and authorisation compliance (on cEO); - Assist the contractors in addressing environmental challenges on site; - Assist in incident management: - Reporting environmental incidents to developer and ensuring that corrective action is taken, and lessons learnt shared; - Assist the contractor in investigating environmental incidents and compile investigation reports; - Follow-up on pre-warnings, defects, non-conformance reports; - Measure and communicate environmental performance to the Contractor; - Conduct environmental awareness training on site together with ECO and cEO; - Ensure that the necessary legal permits and / or licenses are in place and up to date; - Acting as Developer's Environmental Representative on site and work together with the ECO and contractor;
<p>Contractor</p>	<p><u>Role</u></p> <p>The Contractor appoints the cEO and has overall responsibility for ensuring that all work, activities, and actions linked to the delivery of the contract are in line with the EMPr and that Method Statements are implemented as described. External contractors must ensure compliance with this EMPr while performing the onsite activities as per their contract with the Project Developer. The contractors are required, where</p>

Responsible Person (s)	Role and Responsibilities
	<p>specified, to provide Method Statements setting out in detail how the impact management actions contained in the EMPr will be implemented during the development or expansion for overhead electricity transmission and distribution infrastructure activities.</p> <p><u>Responsibilities</u></p> <ul style="list-style-type: none"> - project delivery and quality control for the development services as per appointment; - employ a suitably qualified person to monitor and report to the Project Developer's appointed person on the daily activities on-site during the construction period; - ensure that safe, environmentally acceptable working methods and practices are implemented and that equipment is properly operated and maintained, to facilitate proper access and enable any operation to be carried out safely; - attend on site meeting(s) prior to the commencement of activities to confirm the procedure and designated activity zones; - ensure that contractors' staff repair, at their own cost, any environmental damage as a result of a contravention of the specifications contained in EMPr, to the satisfaction of the ECO.
contractor Environmental Officer (cEO)	<p><u>Role</u></p> <p>Each Contractor affected by the EMPr should appoint a cEO, who is responsible for the on-site implementation of the EMPr (or relevant sections of the EMPr). The Contractor's representative can be the site agent; site engineer; a dedicated environmental officer; or an independent consultant. The Contractor must ensure that the Contractor's Representative is suitably qualified to perform the necessary tasks and is appointed at a level such that she/he can interact effectively with other site Contractors, labourers, the Environmental Control Officer and the public. As a minimum the cEO shall meet the following criteria:</p> <p><u>Responsibilities</u></p> <ul style="list-style-type: none"> - Be on site throughout the duration of the project and be dedicated to the project; - Ensure all their staff are aware of the environmental requirements, conditions and constraints with respect to all of their activities on site; - Implementing the environmental conditions, guidelines and requirements as stipulated within the EA, EMPr and Method Statements; - Attend the Environmental Site Meeting;

Responsible Person (s)	Role and Responsibilities
	<ul style="list-style-type: none"> - Undertaking corrective actions where non-compliances are registered within the stipulated timeframes; - Report back formally on the completion of corrective actions; - Assist the ECO in maintaining all the site documentation; - Prepare the site inspection reports and corrective action reports for submission to the ECO; - Assist the ECO with the preparing of the monthly report; and - Where more than one Contractor is undertaking work on site, each company appointed as a Contractor will appoint a cEO representing that company.

4. ENVIRONMENTAL DOCUMENTATION REPORTING AND COMPLIANCE

To ensure accountable and demonstrated implementation of the EMPr, a number of reporting systems, documentation controls and compliance mechanisms must be in place for all overhead electricity transmission and distribution infrastructure projects as a minimum requirement.

4.1 Document control/Filing system

The holder of the EA is solely responsible for the upkeep and management of the EMPr file. At a minimum, all documentation detailed below will be stored in the EMPr file. A hard copy of all documentation shall be filed, while an electronic copy may be kept where relevant. A duplicate file will be maintained in the office of the DSS (where applicable). This duplicate file must remain current and up-to-date. The filing system must be updated and relevant documents added as required. The EMPr file must be made available at all times on request by the CA or other relevant authorities. The EMPr file will form part of any environmental audits undertaken as prescribed in the EIA Regulations.

4.2 Documentation to be available

At the outset of the project the following preliminary list of documents shall be placed in the filing system and be accessible at all times:

- Full copy of the signed EA from the CA in terms of NEMA, granting approval for the development or expansion;
- Copy of the generic and site specific EMPr as well as any amendments thereof;
- Copy of declaration of implementing generic EMPr and subsequent approval of site specific EMPr and amendments thereof;
- All method statements;
- Completed environmental checklists;
- Minutes and attendance register of environmental site meetings;
- An up-to-date environmental incident log;
- A copy of all instructions or directives issued;
- A copy of all corrective actions signed off. The corrective actions must be filed in such a way that a clear reference is made to the non-compliance record;
- Complaints register.

4.3 Weekly Environmental Checklist

The ECOs are required to complete a Weekly Environmental Checklist, the format of which is to be agreed prior to commencement of the activity. The ECOs are required to sign and date the checklist, retain a copy in the EMPr file and submit a copy of the completed checklist to the DSS on a weekly basis.

The checklists will form the basis for the Monthly Environmental Reports. Copies of all completed checklists will be attached as Annexures to the Environmental Audit Report as required in terms of the EIA Regulations.

4.4 Environmental site meetings

Minutes of the environmental site meetings shall be kept. The minutes must include an attendance register and will be attached to the Monthly Report that is distributed to attendees. Each set of minutes must clearly record "Matters for Attention" that will be reviewed at the next meeting.

4.5 Required Method Statements

The method statement will be done in such detail that the ECOs are enabled to assess whether the contractor's proposal is in accordance with the EMPr.

The method statement must cover applicable details with regard to:

- development procedures;
- materials and equipment to be used;
- getting the equipment to and from site;
- how the equipment/ material will be moved while on site;
- how and where material will be stored;
- the containment (or action to be taken if containment is not possible) of leaks or spills of any liquid or material that may occur;
- timing and location of activities;
- compliance/ non-compliance with the EMPr; and
- any other information deemed necessary by the ECOs.

Unless indicated otherwise by the Project Manager, the Contractor shall provide the following method statements to the Project Manager no less than 14 days prior to the commencement date of the activity:

- Site establishment – Camps, Lay-down or storage areas, satellite camps, infrastructure;
- Batch plants;
- Workshop or plant servicing;
- Handling, transport and storage of Hazardous Chemical Substance's;
- Vegetation management – Protected, clearing, aliens, felling;
- Access management – Roads, gates, crossings etc.;
- Fire plan;
- Waste management – transport, storage, segregation, classification, disposal (all waste streams);
- Social interaction – complaints management, compensation claims, access to properties etc.;
- Water – use (source, abstraction and disposal), access and all related information, crossings and mitigation;
- Emergency preparedness – Spills, training, other environmental emergencies;
- Dust and noise management methodologies;
- Fauna interaction and risk management – only if the risk was identified – wildlife interaction especially on game farms; and
- Heritage and palaeontology management.

The ECOs shall monitor and ensure that the contractors perform in accordance with these method statements. Completed and agreed method statements between the holder of the EA and the contractor shall be captured in Appendix 1.

4.6 Environmental Incident Log (Diary)

The ECOs are required to maintain an up-to-date and current Environmental Incident Log (environmental diary). The Environmental Incident Log is a means to record all environmental incidents and/or all non-compliance notice would not be issued. An environmental incident is defined as:

- Any deviation from the listed impact management actions (listed in this EMPr) that may be addressed immediately by the ECOs. (For example a contractor's staff member littering or a drip tray that has not been emptied);
- Any environmental impact resulting from an action or activity by a contractor in contravention of the environmental stipulations and guidelines listed in the EMPr which as a single event would have a minor impact but which if cumulative and continuous would have a significant effect (for example no toilet paper available in the ablutions for an afternoon); and
- General environmental information such as road kills or injured wildlife.

The ECOs are to record all environmental incidents in the Environmental Incident Log. All incidents regardless of severity must be reported to the Developer. The Log is to be kept in the EMPr file and at a minimum the following will be recorded for each environmental incident:

- The date and time of the incident;
- Description of the incident;
- The name of the Contractor responsible;
- The incident must be listed as significant or minor;
- If the incident is listed as significant, a non-compliance notice must be issued, and recorded in the log;
- Remedial or corrective action taken to mitigate the incident; and
- Record of repeat minor offences by the same contractor or staff member.

The Environmental Incident Log will be captured in the EAR.

4.7 Non-compliance

A non-compliance notice will be issued to the responsible contractor by the ECOs via the DSS or Project Manager. The non-compliance notice will be issued in writing; a copy filed in the EMPr file and will at a minimum include the following:

- Time and date of the non-compliance;
- Name of the contractor responsible;
- Nature and description of the non-compliance;
- Recommended / required corrective action; and
- Date by which the corrective action to be completed.
- The contractors shall act immediately when a notice of non-compliance is received and correct whatever is the cause for the issuing of the notice. Complaints received regarding activities on the development site pertaining to the environment shall be

recorded in a dedicated register and the response noted with the date and action taken. The ECO should be made aware of any complaints. Any non-compliance with the agreed procedures of the EMPr is a transgression of the various statutes and laws that define the manner by which the environment is managed. Failure to redress the cause shall be reported to the relevant CA for them to deal with the transgression, as it deems fit. The contractor is deemed not to have complied with the EMPr if, inter alia, There is a deviation from the environmental conditions, impact management outcomes and impact management actions , as approved in generic and site specific EMPr as relevant as set out in the EMPr, which deviation has, or may cause, an environmental impact.

4.8 Corrective action records

For each non-compliance notice issued, a documented corrective action must be recorded. On receiving a non-compliance notice from the DSS, the contractor's cEO will ensure that the corrective actions required take place within the stipulated timeframe. On completion of the corrective action the cEO is to issue a Corrective Action Report in writing to the ECOs. If satisfied that the corrective action has been completed, the ECOs are to sign-off on the Corrective Action Report, and attach the report to the non-compliance notice in the EMPr file. A corrective action is considered complete once the report has signed off by the ECOs.

4.9 Photographic record

A digital photographic record will be kept. The photographic record will be used to show before, during and post rehabilitation evidence of the project as well used in cases of damages claims if they arise. Each image must be dated and a brief description note attached.

The Contractor shall:

1. Allow the ECOs access to take photographs of all areas, activities and actions.

The ECOs shall keep an electronic database of photographic records which will include:

1. Pictures of all areas designated as work areas, camp areas, development sites and storage areas taken before these areas are set up;
2. All bunding and fencing;
3. Road conditions and road verges;
4. Condition of all farm fences;
5. Topsoil storage areas;
6. All areas to be cordoned off during construction;
7. Waste management sites;
8. Ablution facilities (inside and out);
9. Any non-conformances deemed to be "significant";
10. All completed corrective actions for non-compliances;
11. All required signage;
12. Photographic recordings of incidents;
13. All areas before, during and post rehabilitation; and
14. Include relevant photographs in the Final Environmental Audit Report.

4.10 Complaints register

The ECOs shall keep a current and up-to-date complaints register. The complaints register is to be a record of all complaints received from communities, stakeholders and individuals. The Complaints Record shall:

1. Record the name and contact details of the complainant;
2. Record the time and date of the complaint;
3. Contain a detailed description of the complaint;
4. Where relevant and appropriate, contain photographic evidence of the complaint or damage (ECOs to take relevant photographs); and
5. Contain a copy of the ECOs written response to each complaint received and keep a record of any further correspondence with the complainant. The ECO's written response will include a description of any corrective action to be taken and must be signed by the Contractor, ECO and affected party. Where a damage claim is issued by the complainant, the ECOs shall respond as described in **(section 4.11)** below.

4.11 Claims for damages

In the event that a Claim for Damages is submitted by a community, landowner or individual, the ECOs shall:

1. Record the full detail of the complaint as described in **(section 4.10)** above;
2. The DPM will evaluate the claim and associated damage and submit the evaluation to the Senior Site Representative for approval;
3. Following consideration by the DPM, the claim is to be resolved and settled immediately, or the reason for not accepting the claim communicated in writing to the claimant. Should the claimant not accept this, the ECO shall, in writing report the incident to the Developer's negotiator and legal department; and
4. A formal record of the response by the ECOs to the claimant as well as the rectification of the method of making payments not amount will be recorded in the EMPr file.

4.12 Interactions with affected parties

Open, transparent and good relations with affected landowners, communities and regional staff are an essential aspect to the successful management and mitigation of environmental impacts.

The ECOs shall:

1. Ensure that all queries, complaints and claims are dealt within an agreed timeframe;
2. Ensure that any or all agreements are documented, signed by all parties and a record of the agreement kept in the EMPr file;
3. Ensure that a complaints telephone numbers are made available to all landowners and affected parties; and
4. Ensure that contact with affected parties is courteous at all times;

4.13 Environmental audits

Internal environmental audits of the activity and implementation of the EMPr must be undertaken. The findings and outcomes must be included in the EMPr file and be submitted to the CA at intervals as indicated in the EA.

An Environmental Audit Report must be prepared monthly. The report will be tabled as the key point on the agenda of the Environmental Site Meeting. The Report is submitted for acceptance at the meeting and the final report will be circulated to the Project Manager and filed in the EMPr file. At a frequency determined by the EA, the ECOs shall submit the monthly reports to the CA. At a minimum the monthly report is to cover the following:

- Weekly Environmental Checklists;
- Deviations and non-compliances with the checklists;
- Non-compliances issued;
- Completed and reported corrective actions;
- Environmental Monitoring;
- General environmental findings and actions; and
- Minutes of the Bi-monthly Environmental Site Meetings.

4.14 Final environmental audits

On final completion of the rehabilitation and/or requirements of the EA a final EAR is to be prepared and submitted to the CA. The EAR must comply with Appendix 7 of the EIA Regulations.

PART B: SECTION 1: Pre-approved generic EMPr template

5. IMPACT MANAGEMENT OUTCOMES AND IMPACT MANAGEMENT ACTIONS

This section provides a pre-approved generic EMPr template with aspects that are common to the development of overhead electricity transmission and distribution infrastructure. There is a list of aspects identified for the development or expansion of overhead electricity transmission and distribution infrastructure, and for each aspect a set of prescribed impact management outcomes and associated impact management actions have been identified. Holders of EAs are responsible to ensure the implementation of these outcomes and actions for all projects as a minimum requirement, in order to mitigate the impact of such aspects identified for the development or expansion of overhead electricity transmission and distribution infrastructure.

The template provided below is to be completed by providing the information under each heading for each environmental impact management action.

The completed template must be signed and dated on each page by both the contractor and the holder of the EA prior to commencement of the activity. The method statements prepared and agreed to by the holder of the EA must be appended to the template as Appendix 1. Each method statement must also be duly signed and dated on each page by the contractor and the holder of the EA. This template, once signed and dated, is legally binding. The holder of the EA will remain responsible for its implementation.

onsite staff are aware and understands the individual responsibilities in terms of this EMPr.

	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<p>ntal awareness ement of the</p> <p>fficient sessions more than 20 e; ness training is ; conditions and within the EMPr idual roles and pliance with</p> <p>and maintain ons on site, and the following</p>	ECO and cEO	Environmental Induction training; Toolbox talks; other pertinent training aids.	Initially prior to construction commencing ECO to induct Construction Management and cEO, and thereafter repeated for all new employees and yearly. Toolbox talks to be presented weekly.	ECO	Monthly	Signed induction and toolbox talk, or training registers.

<p>a) Description of significant environmental impacts, actual or potential, related to their work activities;</p> <p>b) Mitigation measures to be implemented when carrying out specific activities;</p> <p>c) Emergency preparedness and response procedures;</p> <p>d) Emergency procedures;</p> <p>e) Procedures to be followed when working near or within sensitive areas;</p> <p>f) Wastewater management procedures;</p> <p>g) Water usage and conservation;</p> <p>h) Solid waste management procedures;</p> <p>i) Sanitation procedures;</p> <p>j) Fire prevention; and</p> <p>k) Disease prevention.</p> <p>– A record of all environmental awareness training courses undertaken as part of the EMPr must be available;</p> <p>– Educate workers on the dangers of open and/or unattended fires;</p> <p>– A staff attendance register of all staff to have received environmental awareness training must be available.</p>						
---	--	--	--	--	--	--

- Course material must be available and presented in appropriate languages that all staff can understand.						
---	--	--	--	--	--	--

5.2 Site Establishment development

Impact management outcome: Impacts on the environment are minimised during site establishment and the development footprint are kept to demarcated development area.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
- A method statement must be provided by the contractor prior to any onsite activity that includes the layout of the construction camp in the form of a plan showing the location of key infrastructure and services (where applicable), including but not limited to offices, overnight vehicle parking areas, stores, the workshop, stockpile and lay down areas, hazardous materials storage areas (including fuels), the batching plant (if one is located at the construction camp), designated access routes, equipment cleaning areas and the placement of staff accommodation,	Contractor	Method Statement compilation and communication of Method Statements to employees. Use of EIA and Specialist Studies to locate site camps.	Prior to construction.	ECO	Monthly	Signed Method Statements; signed proof of communication register; Liaison with ECO regarding site camp placement.

<p>cooking and ablution facilities, waste and wastewater management;</p> <ul style="list-style-type: none"> - Location of camps must be within approved area to ensure that the site does not impact on sensitive areas identified in the environmental assessment or site walk through; - Sites must be located where possible on previously disturbed areas; - The camp must be fenced in accordance with Section 5.5: Fencing and gate installation; and - The use of existing accommodation for contractor staff, where possible, is encouraged. - Avoid placing site camps in high visual impact areas. - Rehabilitate affected areas immediately after construction. - Implement erosion protection on slopes. 						
--	--	--	--	--	--	--

5.3 Access restricted areas

Impact management outcome: Access to restricted areas prevented.

Impact Management Actions	Implementation	Monitoring
----------------------------------	-----------------------	-------------------

	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - Identification of access restricted areas is to be informed by the environmental assessment, site walk through and any additional areas identified during development; - Erect, demarcate and maintain a temporary barrier with clear signage around the perimeter of any access restricted area, colour coding could be used if appropriate; and - Unauthorised access and development related activity inside access restricted areas is prohibited. - No activities should take place in the watercourses and associated buffer zone. Where the above is unavoidable, only a tower footprint and no access roads can be considered. This is subjected to authorization by means of a water use license. - Construction in and around watercourses should be restricted to the dry season. - Prevent pedestrian and vehicular access into the wetland areas as well as riparian areas. - It is recommended that prior to construction, <i>Boophane disticha</i> and <i>Hypoxis hemerocallidea</i> plant species recorded within the project area must be searched and rescued and then following construction 	Contractor	Use of EIA and Specialist Studies to locate sensitive areas and 'no-go' areas.	Prior to construction in new areas.	ECO	Monthly	Contractor compliance with sensitive areas and 'no-go' areas identified in EIA and Specialist Studies

<p>activities, they can be re-established within the study area.</p> <ul style="list-style-type: none"> - Permits from DAFF and LEDET are required before construction commences in order to cut, disturb, destroy or remove the several protected trees noted within the project area. - It is recommended that search, rescue and relocation be conducted taking into consideration flora and fauna species of conservation concern - River and wetland systems must be spanned and no towers should be placed within the buffer zones dictated by the surface water studies. - The most significant way to mitigate the loss of habitat is to limit the construction footprint within the natural habitat areas remaining. Disturbance of vegetation must be limited to the servitude area acquired for the project. - Avoid active irrigated cultivated lands as far as possible. - If any towers are positioned on the identified locations where potshards were found, then the position of the tower must be adjusted to avoid impacting on the heritage resources. - Ensure that any chance finds of cultural, archaeological, and historical significance are demarcated on the site layout plan, and marked as no-go areas. No known or protected sites were recorded in the HIA. 						
--	--	--	--	--	--	--

--	--	--	--	--	--	--

5.4 Access roads

Impact management outcome: Minimise impact to the environment through the planned and restricted movement of vehicles on site.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - Access to the servitude and tower positions must be negotiated with the relevant landowner and must fall within the assessed and authorised area; - An access agreement must be formalised and signed by the DPM, Contractor and landowner before commencing with the activities; - The access roads to tower positions must be signposted after access has been negotiated and before the commencement of the activities; - All private roads used for access to the servitude must be maintained and upon completion of the works, be left in at least the original condition - All contractors must be made aware of all these access routes. - Any access route deviation from that in the written agreement must be closed 	Contractor	Implementation of mitigation measures.	Ongoing.	ECO	Monthly	Signed access agreements and maintenance of access roads.

<p>and re-vegetated immediately, at the contractor's expense;</p> <ul style="list-style-type: none"> - Maximum use of both existing servitudes and existing roads must be made to minimize further disturbance through the development of new roads; - In circumstances where private roads must be used, the condition of the said roads must be recorded in accordance with section 4.9: photographic record; prior to use and the condition thereof agreed by the landowner, the DPM, and the contractor; - Access roads in flattish areas must follow fence lines and tree belts to avoid fragmentation of vegetated areas or croplands - Access roads must only be developed on pre-planned and approved roads. - Speed limits for construction vehicles of no more than 40 km/h must be enforced on access roads. 						
---	--	--	--	--	--	--

5.5 Fencing and Gate installation

Impact management outcome: Minimise impact to the environment and ensure safe and controlled access to the site through the erection of fencing and gates where required.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - Use existing gates provided to gain access to all parts of the area authorised for development, where possible; - Existing and new gates to be recorded and documented in accordance with section 4.9: photographic record; - All gates must be fitted with locks and be kept locked at all times during the development phase, unless otherwise agreed with the landowner; - At points where the line crosses a fence in which there is no suitable gate within the extent of the line servitude, on the instruction of the DPM, a gate must be installed at the approval of the landowner; - Care must be taken that the gates must be so erected that there is a gap of no more than 100 mm between the bottom of the gate and the ground; - Where gates are installed in jackal proof fencing, a suitable reinforced concrete sill must be provided beneath the gate; - Original tension must be maintained in the fence wires; - All gates installed in electrified fencing must be re-electrified; 	Contractor and Applicant	Implementation of the mitigation measures	Ongoing	ECO	Monthly	Site observation; public complaints register

<ul style="list-style-type: none"> - All demarcation fencing and barriers must be maintained in good working order for the duration of overhead transmission and distribution electricity infrastructure development activities; - Fencing must be erected around the camp, batching plants, hazardous storage areas, and all designated access restricted areas, where appropriate and would not cause harm to the sensitive flora; - Any temporary fencing to restrict the movement of life-stock must only be erected with the permission of the land owner. - All fencing must be developed of high quality material bearing the SABS mark; - The use of razor wire as fencing must be avoided; - Fenced areas with gate access must remain locked after hours, during weekends and on holidays if staff is away from site. Site security will be required at all times; - On completion of the development phase all temporary fences are to be removed; - The contractor must ensure that all fence uprights are appropriately removed, ensuring that no uprights are cut at ground level but rather removed completely. 						
--	--	--	--	--	--	--

5.6 Water Supply Management

Impact management outcome: Undertake responsible water usage.



Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - All abstraction points or bore holes must be registered with the DWS and suitable water meters installed to ensure that the abstracted volumes are measured on a daily basis; - The Contractor must ensure the following: <ul style="list-style-type: none"> a. The vehicle abstracting water from a river does not enter or cross it and does not operate from within the river; b. No damage occurs to the river bed or banks and that the abstraction of water does not entail stream diversion activities; and c. All reasonable measures to limit pollution or sedimentation of the downstream watercourse are implemented. - Ensure water conservation is being practiced by: <ul style="list-style-type: none"> a. Minimising water use during cleaning of equipment; b. Undertaking regular audits of water systems; and c. Including a discussion on water usage and conservation during environmental awareness training. d. The use of grey water is encouraged. 	Contractor and Applicant	Application to DWS where applicable. Implementation of mitigation measures	Construction	ECO	Monthly	Proof of water source used; submission of above proof to DWS.

5.7 Storm and waste water management

Impact management outcome: Impacts to the environment caused by storm water and wastewater discharges during construction are avoided.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - Runoff from the cement/ concrete batching areas must be strictly controlled, and contaminated water must be collected, stored and either treated or disposed of off-site, at a location approved by the project manager; - All spillage of oil onto concrete surfaces must be controlled by the use of an approved absorbent material and the used absorbent material disposed of at an appropriate waste disposal facility; - Natural storm water runoff not contaminated during the development and clean water can be discharged directly to watercourses and water bodies, subject to the Project Manager's approval and support by the ECO; - Water that has been contaminated with suspended solids, such as soils and silt, may be released into watercourses or water bodies only once all suspended solids have 	Contractor	Employ methods to prevent water pollution	Construction	ECO	Weekly	Inspection of areas where construction takes place near watercourses.

been removed from the water by settling out these solids in settlement ponds. The release of settled water back into the environment must be subject to the Project Manager's approval and support by the ECO.						
--	--	--	--	--	--	--

5.8 Solid and hazardous waste management

Impact management outcome: Waste is appropriately stored, handled and safely disposed of at a recognised waste facility.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> – All measures regarding waste management must be undertaken using an integrated waste management approach; – Sufficient, covered waste collection bins (scavenger and weatherproof) must be provided; – A suitably positioned and clearly demarcated waste collection site must be identified and provided; – The waste collection site must be maintained in a clean and orderly manner; – Waste must be segregated into separate bins and clearly marked for each waste type for recycling and safe disposal; 	Contractor	Following good waste management practices outlined in approved method Statement	Construction	ECO	Weekly	Waste Safe disposal slips; Service Level Agreements

<ul style="list-style-type: none"> - Staff must be trained in waste segregation; - Bins must be emptied regularly; - General waste produced onsite must be disposed of at registered waste disposal sites/ recycling company; - Hazardous waste must be disposed of at a registered waste disposal site; - Certificates of safe disposal for general, hazardous and recycled waste must be maintained. 						
---	--	--	--	--	--	--

5.9 Protection of watercourses and estuaries

Impact management outcome: Pollution and contamination of the watercourse environment and or estuary erosion are prevented.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - All watercourses must be protected from direct or indirect spills of pollutants such as solid waste, sewage, cement, oils, fuels, chemicals, aggregate tailings, wash and contaminated water or organic material resulting from the Contractor's activities; - In the event of a spill, prompt action must be taken to clear the polluted or affected areas; 	Contractor	Method statements; Stormwater Management Plan;	Construction	ECO	Weekly	Method Statement compliance

<ul style="list-style-type: none"> - Where possible, no development equipment must traverse any seasonal or permanent wetland - No return flow into the estuaries must be allowed and no disturbance of the Estuarine Functional Zone should occur; - Development of permanent watercourse or estuary crossing must only be undertaken where no alternative access to tower position is available; - There must not be any impact on the long term morphological dynamics of watercourses or estuaries; - Existing crossing points must be favored over the creation of new crossings (including temporary access) - When working in or near any watercourse or estuary, the following environmental controls and consideration must be taken: <ul style="list-style-type: none"> a) Water levels during the period of construction; No altering of the bed, banks, course or characteristics of a watercourse b) During the execution of the works, appropriate measures to prevent pollution and contamination of the riparian environment must be implemented e.g. including ensuring that construction equipment is well maintained; c) Where earthwork is being undertaken in close proximity to any watercourse, slopes 						
---	--	--	--	--	--	--

<p>must be stabilised using suitable materials, i.e. sandbags or geotextile fabric, to prevent sand and rock from entering the channel; and</p> <p>d) Appropriate rehabilitation and re-vegetation measures for the watercourse banks must be implemented timeously. In this regard, the banks should be appropriately and incrementally stabilised as soon as development allows.</p>						
--	--	--	--	--	--	--

5.10 Vegetation clearing

Impact management outcome: Vegetation clearing is restricted to the authorised development footprint of the proposed infrastructure.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<p>General:</p> <ul style="list-style-type: none"> – Indigenous vegetation which does not interfere with the development must be left undisturbed; – Protected or endangered species may occur on or near the development site. Special care should be taken not to damage such species; – Search, rescue and replanting of all protected and endangered species 	<p>Contractor And Applicant</p>	<p>Specialist recommendations; Method statement; Search and Rescue Plan; Alien vegetation removal Plan (approved plans and strategies used by Eskom), site awareness</p>	<p>Pre-Construction and Construction and Operation</p>	<p>ECO</p>	<p>Pre-Construction and weekly during construction</p>	<p>Compliance to method statements and Search and Rescue Plan; Alien vegetation removal Plan. approved plans and</p>

<p>likely to be damaged during project development must be identified by the relevant specialist and completed prior to any development or clearing;</p> <ul style="list-style-type: none"> - Permits for removal must be obtained from the Department of Agriculture, Forestry and Fisheries prior to the cutting or clearing of the affected species, and they must be filed; - The Environmental Audit Report must confirm that all identified species have been rescued and replanted and that the location of replanting is compliant with conditions of approvals; - Trees felled due to construction must be documented and form part of the Environmental Audit Report; - Rivers and watercourses must be kept clear of felled trees, vegetation cuttings and debris; - Only a registered pest control operator may apply herbicides on a commercial basis and commercial application must be carried out under the supervision of a registered pest control operator, supervision of a registered pest control operator or is appropriately trained; - A daily register must be kept of all relevant details of herbicide usage; - No herbicides must be used in estuaries; 						<p>strategies used by Eskom)</p>
---	--	--	--	--	--	---

<ul style="list-style-type: none"> - All protected species and sensitive vegetation not removed must be clearly marked and such areas fenced off in accordance to Section 5.3: Access restricted areas. <p>Servitude:</p> <ul style="list-style-type: none"> - Vegetation that does not grow high enough to cause interference with overhead transmission and distribution infrastructures, or cause a fire hazard to any plantation, must not be cut or trimmed unless it is growing in the road access area, and then only at the discretion of the Project Manager; - Where clearing for access purposes is essential, the maximum width to be cleared within the servitude must be in accordance to distance as agreed between the land owner and the EA holder - Alien invasive vegetation must be removed according to a plan (in line with relevant municipal and provincial procedures, guidelines and recommendations) and disposed of at a recognised waste disposal facility; - Vegetation must be trimmed where it is likely to intrude on the minimum vegetation clearance distance (MVCD) or will intrude on this distance before the 						
--	--	--	--	--	--	--

<p>next scheduled clearance. MVCD is determined from SANS 10280;</p> <ul style="list-style-type: none"> - Debris resulting from clearing and pruning must be disposed of at a recognised waste disposal facility, unless the landowners wish to retain the cut vegetation; - In the case of the development of new overhead transmission and distribution infrastructures, a one metre "trace-line" must be cut through the vegetation for stringing purposes only and no vehicle access must be cleared along the "trace-line". Alternative methods of stringing which limit impact to the environment must always be considered. 						
--	--	--	--	--	--	--

5.11 Protection of fauna

Impact management outcome: Minimise disturbance to fauna.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - No interference with livestock must occur without the landowner's written consent and with the landowner or a person representing the landowner being present; 	Contractor	Method statement and adherence to exclusion/ no-	Construction	ECO	Weekly	Public complaints register; adherence

<ul style="list-style-type: none"> - The breeding sites of raptors and other wild birds species must be taken into consideration during the planning of the development programme; - Breeding sites must be kept intact and disturbance to breeding birds must be avoided. Special care must be taken where nestlings or fledglings are present; - Nesting sites on existing parallel lines must be documented; - Special recommendations of the avian specialist must be adhered to at all times to prevent unnecessary disturbance of birds; - Bird guards and diverters must be installed on the new line as per the recommendations of the specialist; - No poaching must be tolerated under any circumstances. All animal dens in close proximity to the works areas must be marked as Access restricted areas; - No deliberate or intentional killing of fauna is allowed; - In areas where snakes are abundant, snake deterrents to be deployed on the pylons to prevent snakes climbing up, being electrocuted and causing power outages; and - No Threatened or Protected species (ToPs) and/or protected fauna as listed according NEMBA (Act No. 10 of 2004) and relevant provincial ordinances may be removed 		<p>go zones. site awareness</p>				<p>to exclusion/ no-go zones and method statements</p>
--	--	--	--	--	--	---

and/or relocated without appropriate authorisations/permits.						
--	--	--	--	--	--	--

5.12 Protection of heritage resources

Impact management outcome: Minimise impact to heritage resources.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - Identify, demarcate and prevent impact to all known sensitive heritage features on site in accordance with the No-Go procedure in Section 5.3: Access restricted areas; - Carry out general monitoring of excavations for potential fossils, artefacts and material of heritage importance; - All work must cease immediately, if any human remains and/or other archaeological, palaeontological and historical material are uncovered. Such material, if exposed, must be reported to the nearest museum, archaeologist/palaeontologist (or the South African Police Services), so that a systematic and professional investigation can be undertaken. Sufficient time must be allowed to remove/collect such material before development recommences. 	Contractor	Method Statement; Heritage management plan	Pre-construction and construction	ECO	Weekly and daily for zones highlighted by Heritage Specialist where potsherds were found.	Monitoring of construction areas, adherence to management plan if chance finds found.

5.13 Safety of the public

Impact management outcome: All precautions are taken to minimise the risk of injury, harm or complaints.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> – Identify fire hazards, demarcate and restrict public access to these areas as well as notify the local authority of any potential threats e.g. large brush stockpiles, fuels etc.; – All unattended open excavations must be adequately fenced or demarcated; – Adequate protective measures must be implemented to prevent unauthorised access to and climbing of partly constructed towers and protective scaffolding; – Ensure structures vulnerable to high winds are secured; – Maintain an incidents and complaints register in which all incidents or complaints involving the public are logged. 	Contractor	Landowner agreements; Method Statement	Construction	ECO	Weekly	Site works barricaded, safe working site maintained, public complaints register.

5.14 Sanitation

Impact management outcome: Clean and well maintained toilet facilities are available to all staff in an effort to minimise the risk of disease and impact to the environment.



Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - Mobile chemical toilets are installed onsite if no other ablution facilities are available; - The use of ablution facilities and or mobile toilets must be used at all times and no indiscriminate use of the veld for the purposes of ablutions must be permitted under any circumstances; - Where mobile chemical toilets are required, the following must be ensured: <ul style="list-style-type: none"> a) Toilets are located no closer than 100 m to any watercourse or water body; b) Toilets are secured to the ground to prevent them from toppling due to wind or any other cause; c) No spillage occurs when the toilets are cleaned or emptied and the contents are managed in accordance with the EMPr; d) Toilets have an external closing mechanism and are closed and secured from the outside when not in use to prevent toilet paper from being blown out; e) Toilets are emptied before long weekends and workers holidays, and must be locked after working hours; 	Contractor	Service level agreement with Service provider; Method statement; site awareness	Construction	ECO	Weekly	Service level agreement with Service provider, proof of safe disposal of waste.

f) Toilets are serviced regularly and the ECO must inspect toilets to ensure compliance to health standards; – A copy of the waste disposal certificates must be maintained.						
---	--	--	--	--	--	--

5.15 Prevention of disease

Impact Management outcome: All necessary precautions linked to the spread of disease are taken.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> – Undertake environmentally-friendly pest control in the camp area; – Ensure that the workforce is sensitised to the effects of sexually transmitted diseases, especially HIV AIDS; – The Contractor must ensure that information posters on AIDS are displayed in the Contractor Camp area; – Information and education relating to sexually transmitted diseases to be made available to both construction workers and local community, where applicable; – Free condoms must be made available to all staff on site at central points; – Medical support must be made available; 	Contractor	Method statement, awareness training.	Construction	ECO	Monthly	Method statement, proof of awareness training.

- Provide access to Voluntary HIV Testing and Counselling Services.						
---	--	--	--	--	--	--

5.16 Emergency procedures

Impact management outcome: Emergency procedures are in place to enable a rapid and effective response to all types of environmental emergencies.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - Compile an Emergency Response Action Plan (ERAP) prior to the commencement of the proposed project; - The Emergency Plan must deal with accidents, potential spillages and fires in line with relevant legislation; - All staff must be made aware of emergency procedures as part of environmental awareness training; - The relevant local authority must be made aware of a fire as soon as it starts; - In the event of emergency necessary mitigation measures to contain the spill or leak must be implemented (see Hazardous Substances section 5.17). 	Contractor	Environmental Emergency Response Action Plan	Construction	ECO	Monthly	Adherence/compliance to ERAP

5.17 Hazardous substances

Impact management outcome: Safe storage, handling, use and disposal of hazardous substances.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - The use and storage of hazardous substances to be minimised and non-hazardous and non-toxic alternatives substituted where possible; - All hazardous substances must be stored in suitable containers as defined in the Method Statement; - Containers must be clearly marked to indicate contents, quantities and safety requirements; - All storage areas must be bunded. The bunded area must be of sufficient capacity to contain a spill / leak from the stored containers; - Bunded areas to be suitably lined with a SABS approved liner; - An Alphabetical Hazardous Chemical Substance (HCS) control sheet must be drawn up and kept up to date on a continuous basis; 	Contractor	Method Statement, OHS requirements; adequate and responsible use and storage of Hazardous Substances, Hazardous Substances storage register.	Construction	ECO	Weekly	Hazardous Substance Storage Register, MSDS, Method Statement.

<ul style="list-style-type: none"> - All hazardous chemicals that will be used on site must have Material Safety Data Sheets (MSDS); - All employees working with HCS must be trained in the safe use of the substance and according to the safety data sheet; - Employees handling hazardous substances / materials must be aware of the potential impacts and follow appropriate safety measures. Appropriate personal protective equipment must be made available; - The Contractor must ensure that diesel and other liquid fuel, oil and hydraulic fluid is stored in appropriate storage tanks or in bowsers; - The tanks/ bowsers must be situated on a smooth impermeable surface (concrete) with a permanent bund. The impermeable lining must extend to the crest of the bund and the volume inside the bund must be 130% of the total capacity of all the storage tanks/ bowsers (110% statutory requirement plus an allowance for rainfall); - The floor of the bund must be sloped, draining to an oil separator; - Provision must be made for refueling at the storage area by protecting the soil with an impermeable groundcover. Where dispensing equipment is used, a drip tray must be used to ensure small spills are contained; 						
---	--	--	--	--	--	--

<ul style="list-style-type: none"> - All empty externally dirty drums must be stored on a drip tray or within a bunded area; - No unauthorised access into the hazardous substances storage areas must be permitted; - No smoking must be allowed within the vicinity of the hazardous storage areas; - Adequate fire-fighting equipment must be made available at all hazardous storage areas; - Where refueling away from the dedicated refueling station is required, a mobile refueling unit must be used. Appropriate ground protection such as drip trays must be used; - An appropriately sized spill kit kept onsite relevant to the scale of the activity/s involving the use of hazardous substance must be available at all times; - The responsible operator must have the required training to make use of the spill kit in emergency situations; - An appropriate number of spill kits must be available and must be located in all areas where activities are being undertaken; - In the event of a spill, contaminated soil must be collected in containers and stored in a central location and disposed of according to the National Environmental Management: Waste Act 59 of 2008. Refer to Section 5.7 for procedures concerning storm and waste 						
--	--	--	--	--	--	--

water management and 5.8 for solid and hazardous waste management.						
---	--	--	--	--	--	--

5.18 Workshop, equipment maintenance and storage

Impact management outcome: Soil, surface water and groundwater contamination is minimised.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - Where possible and practical all maintenance of vehicles and equipment must take place in the workshop area; - During servicing of vehicles or equipment, especially where emergency repairs are effected outside the workshop area, a suitable drip tray must be used to prevent spills onto the soil. The relevant local authority must be made aware of a fire as soon as it starts; - Leaking equipment must be repaired immediately or be removed from site to facilitate repair; - Workshop areas must be monitored for oil and fuel spills; - Appropriately sized spill kit kept onsite relevant to the scale of the activity taking place must be available; 	Contractor	Method Statement, OHS requirements; Hazardous Substances storage register, vehicle daily checklist, vehicle service register.	Construction	ECO	Weekly	Method Statement, Hazardous Substances storage register, vehicle daily checklist, vehicle service register.

<ul style="list-style-type: none"> - The workshop area must have a bunded concrete slab that is sloped to facilitate runoff into a collection sump or suitable oil / water separator where maintenance work on vehicles and equipment can be performed; - Water drainage from the workshop must be contained and managed in accordance Section 5.7: storm and waste water management. 						
--	--	--	--	--	--	--

5.19 Batching plants

Impact management outcome: Minimise spillages and contamination of soil, surface water and groundwater.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - Concrete mixing must be carried out on an impermeable surface; - Batching plants areas must be fitted with a containment facility for the collection of cement laden water. - Dirty water from the batching plant must be contained to prevent soil and groundwater contamination - Bagged cement must be stored in an appropriate facility and at least 10 m away from any water courses, gullies and drains; 	Contractor	Method statement	Construction	ECO	Weekly	Compliance to mitigation and method statement

<ul style="list-style-type: none"> - A washout facility must be provided for washing of concrete associated equipment. Water used for washing must be restricted; - Hardened concrete from the washout facility or concrete mixer can either be reused or disposed of at an appropriate licenced disposal facility; - Empty cement bags must be secured with adequate binding material if these will be temporarily stored on site; - Sand and aggregates containing cement must be kept damp to prevent the generation of dust (Refer to Section 5.20: Dust emissions) - Any excess sand, stone and cement must be removed or reused from site on completion of construction period and disposed at a registered disposal facility; - Temporary fencing must be erected around batching plants in accordance with Section 5.5: Fencing and gate installation. 						
--	--	--	--	--	--	--

5.20 Dust emissions

Impact management outcome: Dust prevention measures are applied to minimise the generation of dust.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance

<ul style="list-style-type: none"> - Take all reasonable measures to minimise the generation of dust as a result of project development activities to the satisfaction of the ECO; - Removal of vegetation must be avoided until such time as soil stripping is required and similarly exposed surfaces must be re-vegetated or stabilised as soon as is practically possible; - Excavation, handling and transport of erodible materials must be avoided under high wind conditions or when a visible dust plume is present; - During high wind conditions, the ECO must evaluate the situation and make recommendations as to whether dust-damping measures are adequate, or whether working will cease altogether until the wind speed drops to an acceptable level; - Where possible, soil stockpiles must be located in sheltered areas where they are not exposed to the erosive effects of the wind; - Where erosion of stockpiles becomes a problem, erosion control measures must be implemented at the discretion of the ECO; - Vehicle speeds must not exceed 40 km/h along dust roads or 20 km/h when traversing unconsolidated and non-vegetated areas; 	Contractor	Method Statement, Vehicle Speed limit, dust suppression.	Construction	ECO	Monthly	Site observations, dust suppression register.
---	-------------------	---	---------------------	------------	----------------	--

<ul style="list-style-type: none"> - Straw stabilisation must be applied at a rate of one bale/10 m² and harrowed into the top 100 mm of top material, for all completed earthworks; - For significant areas of excavation or exposed ground, dust suppression measures must be used to minimise the spread of dust. 						
---	--	--	--	--	--	--

5.21 Blasting

Impact management outcome: Impact to the environment is minimised through a safe blasting practice.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - Any blasting activity must be conducted by a suitably licensed blasting contractor; and - Notification of surrounding landowners, emergency services site personnel of blasting activity 24 hours prior to such activity taking place on Site. 	Contractor	Relevant legislation and regulation.	Construction	ECO	Monthly	Public complaints register; proof of registration of blasting contractor.

5.22 Noise

Impact Management outcome: Unnecessary noise is prevented by ensuring that noise from construction activities is mitigated.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - The Contractor must keep noise level within acceptable limits, Restrict the use of sound amplification equipment for communication and emergency only; - All vehicles and machinery must be fitted with appropriate silencing technology and must be properly maintained; - Any complaints received by the Contractor regarding noise must be recorded and communicated. Where possible or applicable, provide transport to and from the site on a daily basis for construction workers; - Develop a Code of Conduct for the construction phase in terms of behaviour of construction staff. Operating hours as determined by the environmental authorisation are adhered to during the development phase. Where not defined, it must be ensured that development activities must still meet the impact management outcome related to noise management. 	Contractor	Restriction of site hours to working hours Monday to Friday	Construction	ECO	Monthly	Public Complaints Register.

5.23 Fire prevention

Impact management outcome: Prevention of uncontrollable fires.

Impact Management Actions	Implementation	Monitoring
---------------------------	----------------	------------

	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - Designate smoking areas where the fire hazard could be regarded as insignificant; - Firefighting equipment must be available on all vehicles located on site; - The local Fire Protection Agency (FPA) must be informed of construction activities; - Contact numbers for the FPA and emergency services must be communicated in environmental awareness training and displayed at a central location on site; - Two way swop of contact details between ECO and FPA. 	Contractor	Emergency Response Action Plan; Method Statement	Construction	ECO	Monthly	Public complaints register; compliance to ERAP

5.24 Stockpiling and stockpile areas

Impact management outcome: Erosion and sedimentation as a result of stockpiling are reduced.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - All material that is excavated during the project development phase (either during piling (if required) or earthworks) must be stored appropriately on site in order to 	Contractor	Method Statement	Construction	ECO	Monthly	Method Statement and site observations

<p>minimise impacts to watercourses, watercourses and water bodies;</p> <ul style="list-style-type: none"> - All stockpiled material must be maintained and kept clear of weeds and alien vegetation growth by undertaking regular weeding and control methods; - Topsoil stockpiles must not exceed 2 m in height; - During periods of strong winds and heavy rain, the stockpiles must be covered with appropriate material (e.g. cloth, tarpaulin etc.); - Where possible, sandbags (or similar) must be placed at the bases of the stockpiled material in order to prevent erosion of the material. 						
---	--	--	--	--	--	--

5.25 Finalising tower positions

Impact management outcome: No environmental degradation occurs as a result of the survey and pegging operations.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - No vegetation clearing must occur during survey and pegging operations; - No new access roads must be developed to facilitate access for survey and pegging purposes; 	Applicant	Findings of the EIA Specialist Studies	Pre-Construction	ECO	Once off	Final pegging of tower positions.

<ul style="list-style-type: none"> - Project manager, botanical specialist and contractor to agree on final tower positions based on survey within assessed and approved areas; - The surveyor is to demarcate (peg) access roads/tracks in consultation with ECO. No deviations will be allowed without the prior written consent from the ECO. 						
--	--	--	--	--	--	--

5.26 Excavation and Installation of foundations

Impact management outcome: No environmental degradation occurs as a result of excavation or installation of foundations.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - All excess spoil generated during foundation excavation must be disposed of in an appropriate manner and at a recognised disposal site, if not used for backfilling purposes; - Spoil can however be used for landscaping purposes and must be covered with a layer of 150 mm topsoil for rehabilitation purposes; - Management of equipment for excavation purposes must be undertaken in accordance with Section 5.18: Workshop equipment maintenance and storage; and 	Contractor	Method Statement and Engineering Drawings	Construction	ECO	Weekly	Adherence to method statements

<ul style="list-style-type: none"> - Hazardous substances spills from equipment must be managed in accordance with Section 5.17: Hazardous substances. - Batching of cement to be undertaken in accordance with Section 5.19 : Batching plants; - Residual cement must be disposed of in accordance with Section 5.8: Solid and hazardous waste management. 						
---	--	--	--	--	--	--

5.27 Assembly and erecting towers

Impact management outcome: No environmental degradation occurs as a result of assembly and erecting of towers.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - Prior to erection, assembled towers and tower sections must be stored on elevated surface (suggest wooden blocks) to minimise damage to the underlying vegetation; - In sensitive areas, tower assembly must take place off-site or away from sensitive positions; - The crane used for tower assembly must be operated in a manner which minimises impact to the environment; 	Contractor	Method Statement	Construction	ECO	Weekly	Site observations

<ul style="list-style-type: none"> - The number of crane trips to each site must be minimised; - Wheeled cranes must be utilised in preference to tracked cranes; - Consideration must be given to erecting towers by helicopter or by hand where it is warranted to limit the extent of environmental impact; - Access to tower positions to be undertaken in accordance with access requirements in specified in Section 8.4: Access Roads; - Vegetation clearance to be undertaken in accordance with general vegetation clearance requirements specified in Section 8.10: Vegetation clearing; - No levelling at tower sites must be permitted unless approved by the Development Project Manager or Developer Site Supervisor; - Topsoil must be removed separately from subsoil material and stored for later use during rehabilitation of such tower sites; - Topsoil must be stored in heaps not higher than 1m to prevent destruction of the seed bank within the topsoil; - Excavated slopes must be no greater than 1:3, but where this is unavoidable, appropriate measures must be undertaken to stabilise the slopes; - Fly rock from blasting activity must be minimised and any pieces greater than 150 						
---	--	--	--	--	--	--

<p>mm falling beyond the Working Area, must be collected and removed;</p> <ul style="list-style-type: none"> - Only existing disturbed areas are utilised as spoil areas; - Drainage is provided to control groundwater exit gradient with the spill areas such that migration of fines is kept to a minimum; - Surface water runoff is appropriately channeled through or around spoil areas; - During backfilling operations, care must be taken not to dump the topsoil at the bottom of the foundation and then put spoil on top of that; - The surface of the spoil is appropriately rehabilitated in accordance with the requirements specified in Section 5.29: Landscaping and rehabilitation; - The retained topsoil must be spread evenly over areas to be rehabilitated and suitably compacted to effect re-vegetation of such areas to prevent erosion as soon as construction activities on the site is complete. Spreading of topsoil must not be undertaken at the beginning of the dry season. 						
--	--	--	--	--	--	--

5.28 Stringing

Impact management outcome: No environmental degradation occurs as a result of stringing.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - Where possible, previously disturbed areas must be used for the siting of winch and tensioner stations. In all other instances, the siting of the winch and tensioner must avoid Access restricted areas and other sensitive areas; - The winch and tensioner station must be equipped with drip trays in order to contain any fuel, hydraulic fuel or oil spills and leaks; - Refueling of the winch and tensioner stations must be undertaken in accordance with Section 5.17: Hazardous substances; - In the case of the development of overhead transmission and distribution infrastructure, a one metre "trace-line" may be cut through the vegetation for stringing purposes only and no vehicle access must be cleared along "trace-lines". Vegetation clearing must be undertaken by hand, using chainsaws and hand held implements, with vegetation being cut off at ground level. No tracked or wheeled mechanised equipment must be used; - Alternative methods of stringing which limit impact to the environment must always be considered e.g. by hand or by using a helicopter; 	Contractor	Method Statement, adherence to exclusion zones	Construction	ECO	Weekly	Site observations

<ul style="list-style-type: none"> - Where the stringing operation crosses a public or private road or railway line, the necessary scaffolding/ protection measures must be installed to facilitate access. If, for any reason, such access has to be closed for any period(s) during development, the persons affected must be given reasonable notice, in writing; - No services (electrical distribution lines, telephone lines, roads, railways lines, pipelines fences etc.) must be damaged because of stringing operations. Where disruption to services is unavoidable, persons affected must be given reasonable notice, in writing; - Where stringing operations cross cultivated land, damage to crops is restricted to the minimum required to conduct stringing operations, and reasonable notice (10 work days minimum), in writing, must be provided to the landowner; - Necessary scaffolding protection measures must be installed to prevent damage to the structures supporting certain high value agricultural areas such as vineyards, orchards, nurseries. 						
--	--	--	--	--	--	--

5.29 Socio-economic

Impact management outcome: Socio-economic development is enhanced.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - Develop and implement communication strategies to facilitate public participation; - Develop and implement a collaborative and constructive approach to conflict resolution as part of the external stakeholder engagement process; - Sustain continuous communication and liaison with neighboring owners and residents - Create work and training opportunities for local stakeholders; and - Where feasible, no workers, with the exception of security personnel, must be permitted to stay over-night on the site. This would reduce the risk to local farmers. 	Contractor	Landowner Agreements; Issues and Complaints Register.	Construction	ECO	Monthly	Landowner Agreement; Issues and Complaints Register.

5.30 Temporary closure of site

Impact management outcome: Minimise the risk of environmental impact during periods of site closure greater than five days.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - Bunds must be emptied (where applicable) and need to be undertaken in accordance with the impact management actions 	Contractor	Method statement	Construction - When applicable	ECO	Monthly - when applicable	Method Statement

<p>included in sections 5.17: management of hazardous substances and 5.18 workshop, equipment maintenance and storage;</p> <ul style="list-style-type: none"> - Hazardous storage areas must be well ventilated; - Fire extinguishers must be serviced and accessible. Service records to be filed and audited at last service; - Emergency and contact details displayed must be displayed; - Security personnel must be briefed and have the facilities to contact or be contacted by relevant management and emergency personnel; - Night hazards such as reflectors, lighting, traffic signage etc. must have been checked; - Fire hazards identified and the local authority must have been notified of any potential threats e.g. large brush stockpiles, fuels etc.; - Structures vulnerable to high winds must be secured; - Wind and dust mitigation must be implemented; - Cement and materials stores must have been secured; - Toilets must have been emptied and secured; - Refuse bins must have been emptied and secured; 					
---	--	--	--	--	--

- Drip trays must have been emptied and secured.						
--	--	--	--	--	--	--

5.31 Landscaping and rehabilitation

Impact management outcome: Areas disturbed during the development phase are returned to a state that approximates the original condition.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - All areas disturbed by construction activities must be subject to landscaping and rehabilitation; All spoil and waste must be disposed to a registered waste site and certificates of disposal provided; - All slopes must be assessed for contouring, and to contour only when the need is identified in accordance with the Conservation of Agricultural Resources Act, No 43 of 1983 - All slopes must be assessed for terracing, and to terrace only when the need is identified in accordance with the Conservation of Agricultural Resources Act, No 43 of 1983; - Berms that have been created must have a slope of 1:4 and be replanted with indigenous species and grasses that approximates the original condition; 	Contractor	Method Statements; erosion protection, alien eradication plan.	Concurrent with Construction	ECO	Monthly	Adequately revegetated work areas; no erosion or invasive plant species.

<ul style="list-style-type: none"> - Where new access roads have crossed cultivated farmlands, that lands must be rehabilitated by ripping which must be agreed to by the holder of the EA and the landowners; - Rehabilitation of tower sites and access roads outside of farmland; - Indigenous species must be used for with species and/grasses to where it compliments or approximates the original condition; - Stockpiled topsoil must be used for rehabilitation (refer to Section 5.24: Stockpiling and stockpiled areas); - Stockpiled topsoil must be evenly spread so as to facilitate seeding and minimise loss of soil due to erosion; - Before placing topsoil, all visible weeds from the placement area and from the topsoil must be removed; - Subsoil must be ripped before topsoil is placed; - The rehabilitation must be timed so that rehabilitation can take place at the optimal time for vegetation establishment; - Where impacted through construction related activity, all sloped areas must be stabilised to ensure proper rehabilitation is effected and erosion is controlled ; - Sloped areas stabilised using design structures or vegetation as specified in the design to prevent erosion of embankments. 						
---	--	--	--	--	--	--

<p>The contract design specifications must be adhered to and implemented strictly;</p> <ul style="list-style-type: none"> - Spoil can be used for backfilling or landscaping as long as it is covered by a minimum of 150 mm of topsoil. - Where required, re-vegetation including hydro-seeding can be enhanced using a vegetation seed mixture as described below. A mixture of seed can be used provided the mixture is carefully selected to ensure the following: <ul style="list-style-type: none"> a) Annual and perennial plants are chosen; b) Pioneer species are included; c) Species chosen must be indigenous to the area with the seeds used coming from the area; d) Root systems must have a binding effect on the soil; e) The final product must not cause an ecological imbalance in the area 						
--	--	--	--	--	--	--

6 ACCESS TO THE GENERIC EMPr

Once completed and signed, to allow the public access to the generic EMPr, the holder of the EA must make the EMPr available to the public in accordance with the requirements of regulation 26(h) of the EIA Regulations.

PART B: SECTION 2

7 SITE SPECIFIC INFORMATION AND DECLARATION

7.1 Sub-section 1: contact details and description of the project

7.1.1 Details of the applicant:

Name of applicant: **Eskom Holdings SOC Ltd.**

Tel No: **011 800 4057**

Fax No: **011 800 3917**

Postal Address: **P O Box 1091, Johannesburg**

Physical Address: **Megawatt Park, Maxwell Drive, Sunninghill, Johannesburg**

7.1.2 Details and expertise of the EAP:

Name of EAP: **Jacqui Davis**

Tel No: **011 781 1730**

Fax No: **011 781 1731**

E-mail address: **jacquid@nema.co.za**

Expertise of the EAP (Curriculum Vitae included): **Yes, included in EIA Application and EIA Report.**

7.1.3 Project name:

EMKHIWENI SUBSTATION AND 400KV LINE FROM EMKHIWENI SUBSTATION TO SILIMELA

7.1.4 Description of the project:

The scope of the project includes:

- **Construction of the Emkhiweni Substation, with 2x500MVA 400/132kV transformers and loop-in lines; and**
- **Construction of the Emkhiweni-Silimela 400kV line.**

A power line typically consists of pylons, which are tower-like structures that support electrical cables above the ground. The distance between each pylon is dependent on the type of terrain the lines cross. The standard width of a servitude for a 400kV Transmission line is 55m (27.5m on either side of the power line).

In order for maintenance staff to access the lines and undertake routine maintenance or repair faults, it may be necessary to construct access roads. Eskom have advised that these access roads do not exceed any thresholds in terms of the EIA Regulations of 2014, as amended (07 April 2017).

There are several types of towers/pylons. The types of pylons chosen for the project depend on several factors, these include terrain; expense; and recommendations from the visual specialist. Eskom tries not to bind themselves to one tower/pylon type during the environmental assessment in case another type, based on the factors mentioned above, would be more suitable.

The Emkhiweni-Silimela 400kV powerline would link into the proposed Silimela substation in the north and the proposed Emkhiweni substation in the south.

The proposed Emkhiweni Substation would support the existing Rockdale substation. The proposed Emkhiweni Substation would have a 600m x 600m footprint which would include the following:

- Two 400kV loop-in lines;
- Loop-in lines to the Arnot Kendal power line;
- Offices and control rooms;
- Transformers;
- Communications mast tower;
- Breakers; and
- Other equipment necessary for connecting the 400kV lines to the substation and the 132kV lines out of the substation.

The loop-in lines would traverse approximately 3km to loop into the existing Arnot - Kendal 400kV line.

7.1.5 Project location:

NO	FARM NAME(if applicable)	FARM NUMBER(if applicable)	PORTION NAME	PORTION NUMBER	LATITUDE	LONGITUDE
1	Farm Rietfontein 314 JS	TOJS00000000031400014	Portion 14	Portion 14	25°52'22.73"S	29°24'2.89"E
2	Farm Loskop Noord 12 JS	TOJS00000000001201208	Portion 1208	Portion 1208	25°5'10.31"S	29°17'55.02"E

Start and end points of the project provided. Refer to EIA for a list of all Landowners and farms.

7.1.6 Preliminary technical specification of the overhead transmission and distribution:

- Length – **110 km**
- Tower parameters
 - Number and types of towers – **302 towers**
 - Tower spacing (mean and maximum) – **To be confirmed**
 - Tower height (lowest, mean and height) – **To be confirmed**
 - Conductor attachment height (mean) – **To be confirmed**
 - Minimum ground clearance – **To be confirmed**

7.2 Sub-section 2: Development footprint site map

This sub-section must include a map of the site sensitivity overlaid with the preliminary infrastructure layout. The sensitivity map must be prepared from the national web based environmental screening tool, when available for compulsory use at: <https://screening.environment.gov.zg/screeningtool>. The sensitivity map shall identify the nature of each sensitive feature e.g. raptor nest, threatened plant species, archaeological site, etc. Sensitivity maps shall identify features both within the planned working area and any known sensitive features in the surrounding landscape. The overhead transmission and distribution profile shall be illustrated at an appropriate resolution to enable fine scale interrogation. It is recommended that <20 km of overhead transmission and distribution length is illustrated per page in A3 landscape format. Where considered appropriate, photographs of sensitive features in the context of tower positions shall be used.

The Environmental Screening Tool was not used since the project commenced prior to the promulgation of the Government Notice. Sensitivity maps were generated using the GIS data available and the input from the various Specialist Studies, and are included below.

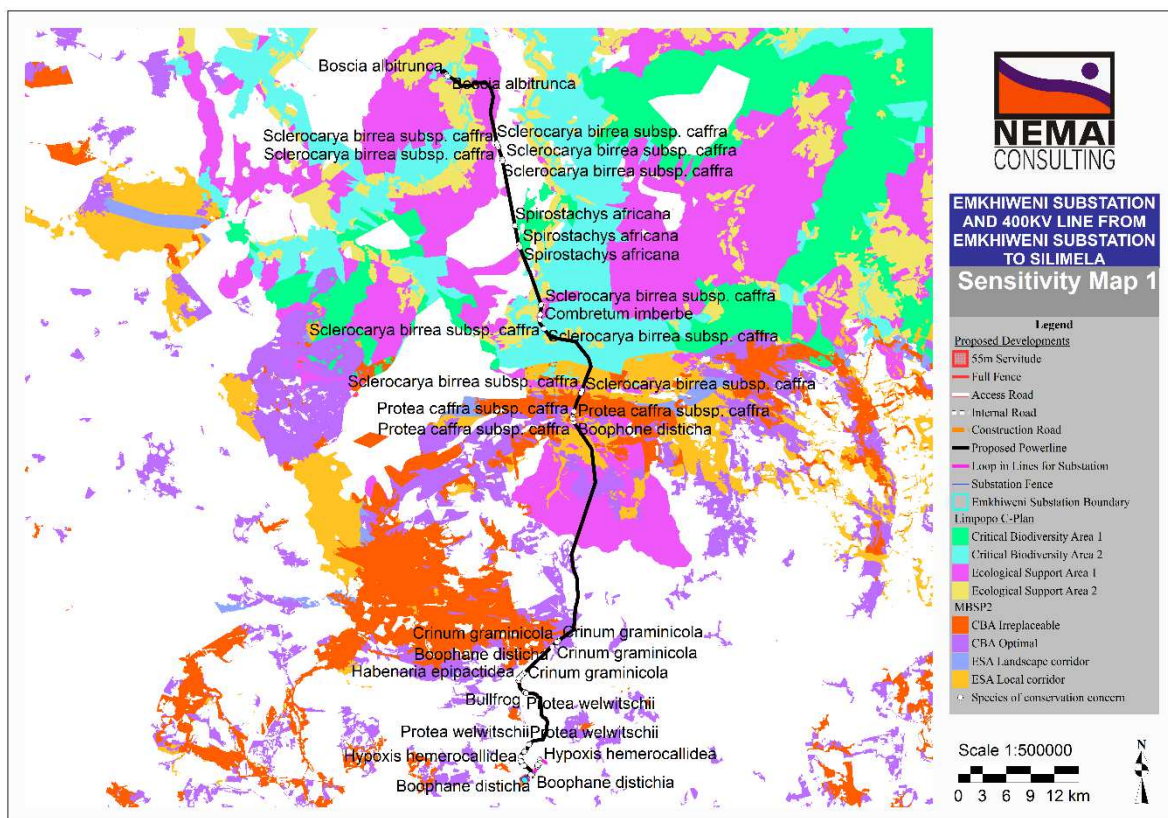


Figure 1: Terrestrial ecological sensitivity map

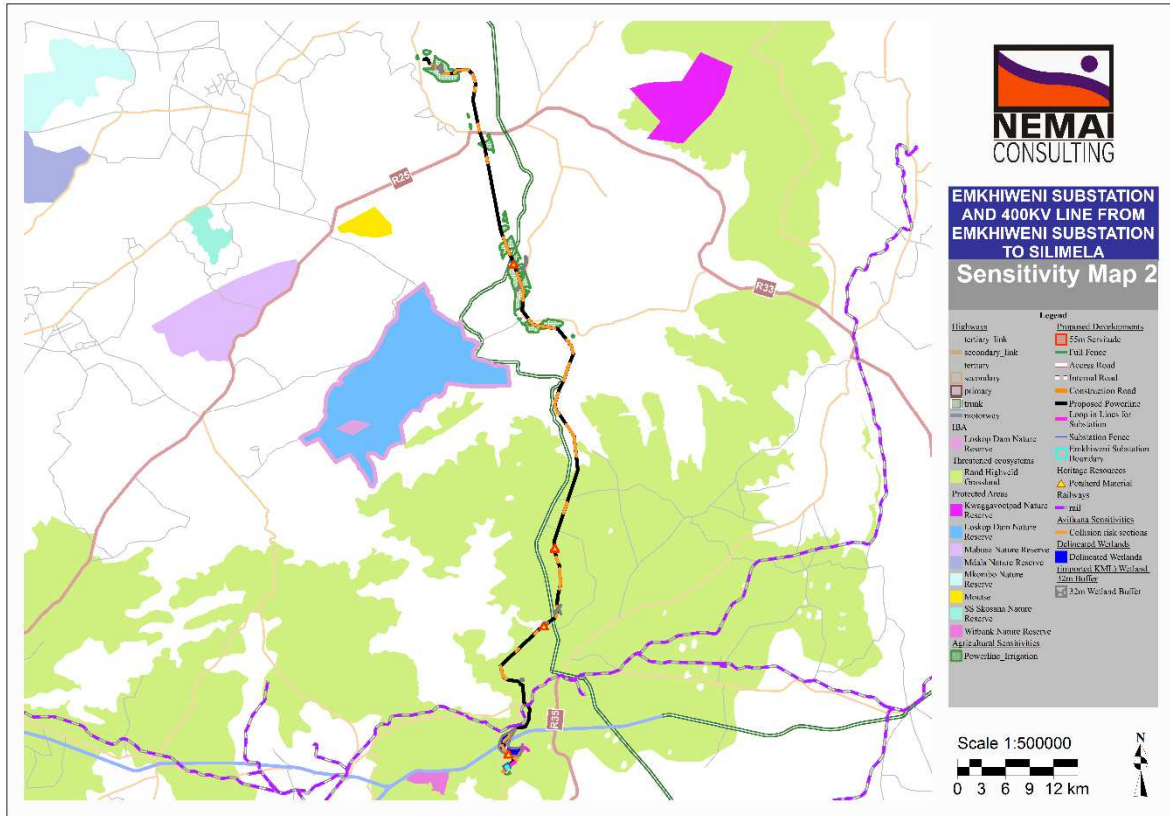


Figure 2: Heritage, Protected Areas, and IBA sensitivity map of the study area

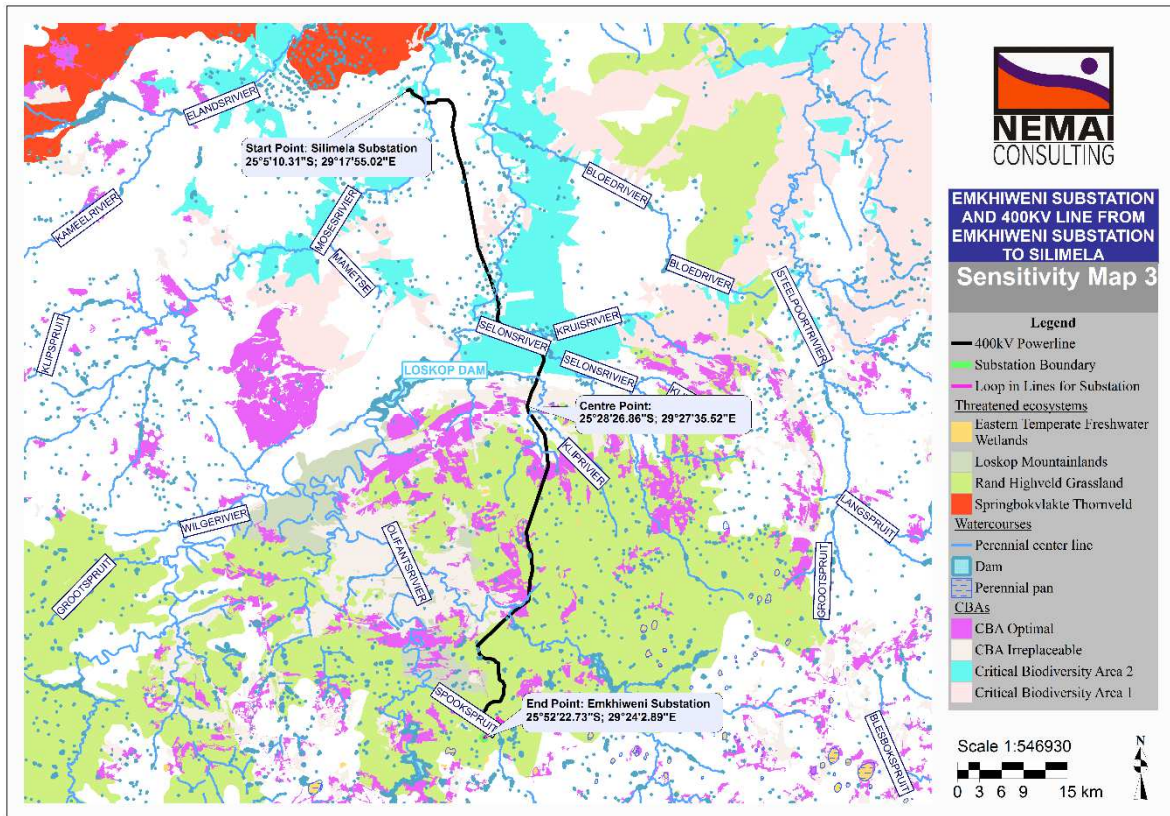


Figure 3: Sensitivity Map – Surface Water

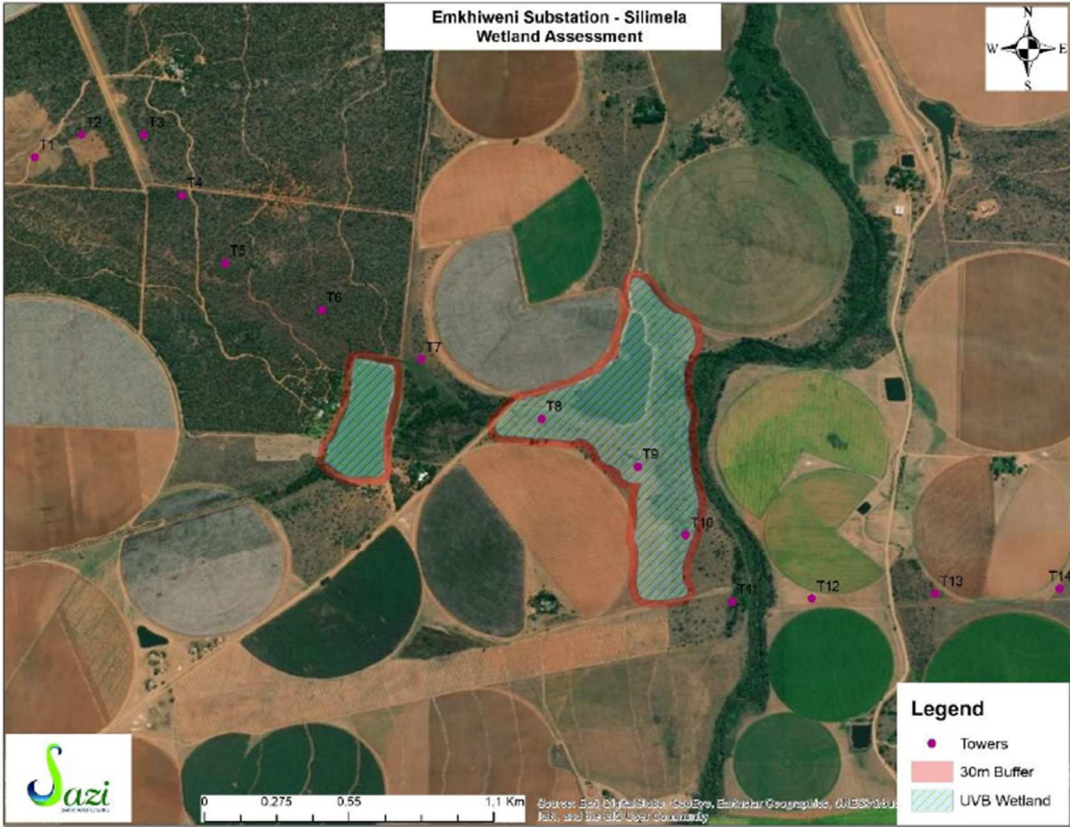


Figure 4: Sensitivity Map – Wetlands associated with Towers 8-10

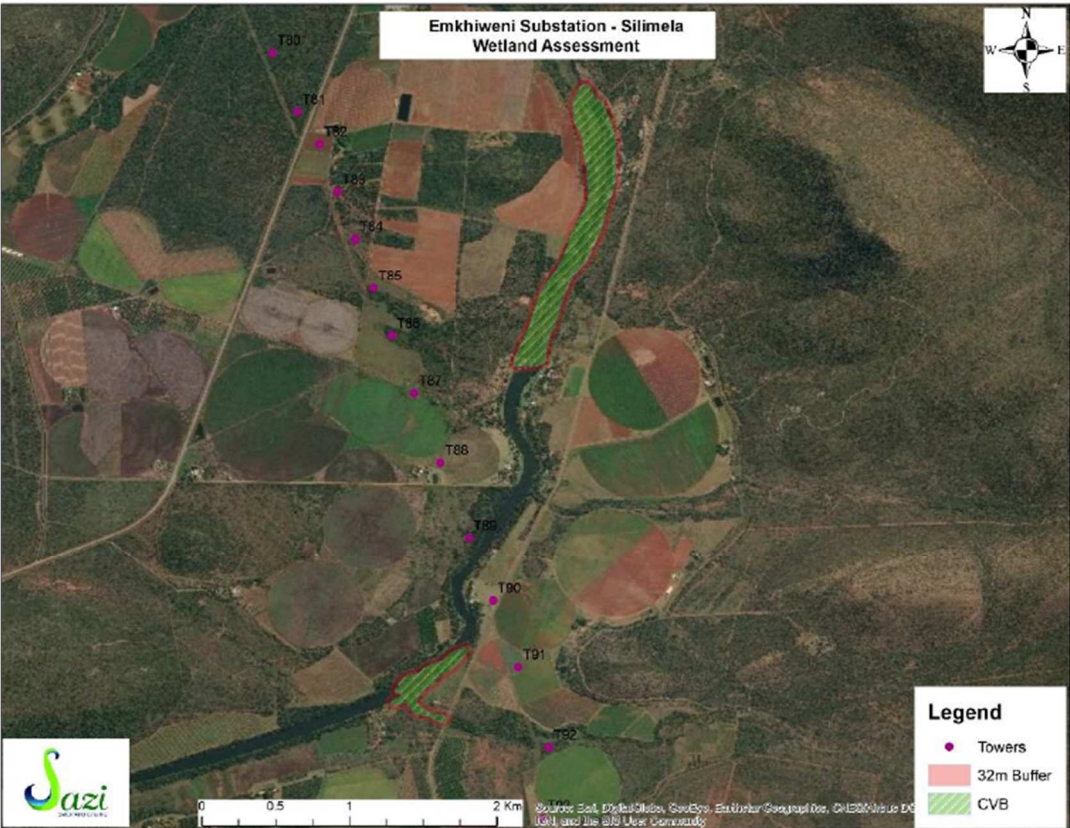


Figure 5: Sensitivity Map – Wetlands associated with Towers 89-90

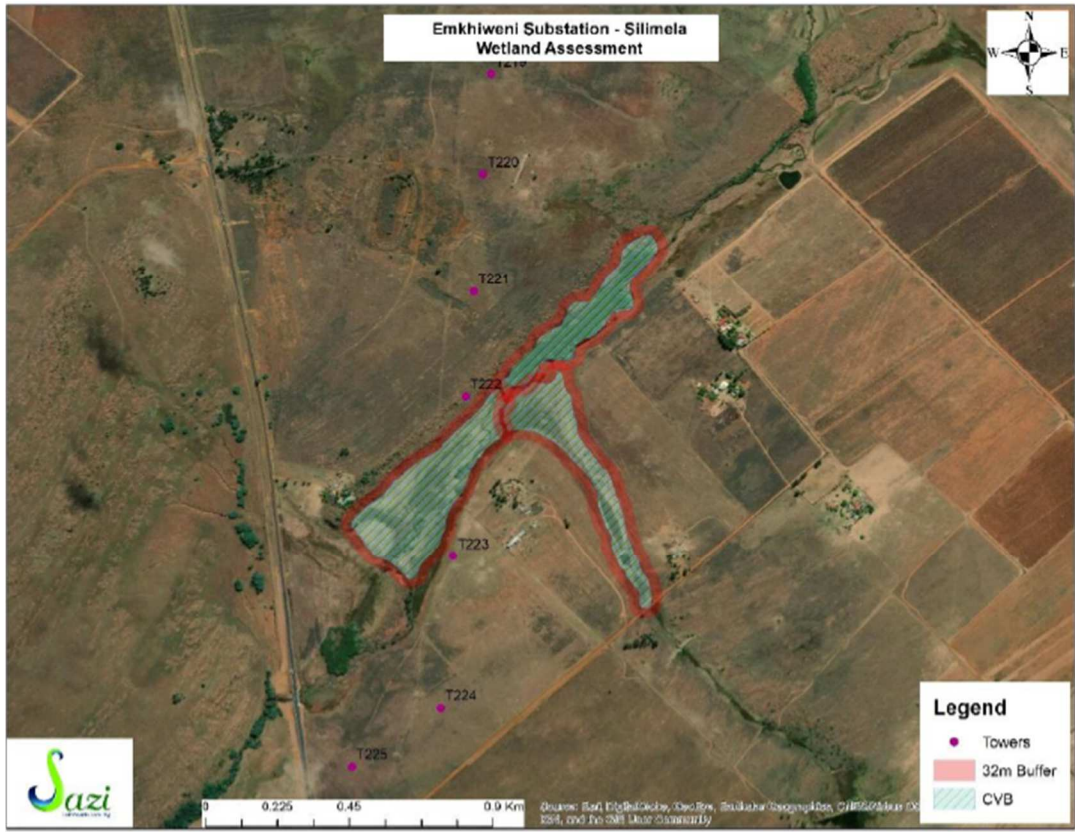


Figure 6: Sensitivity Map – Wetlands associated with Towers 222-223

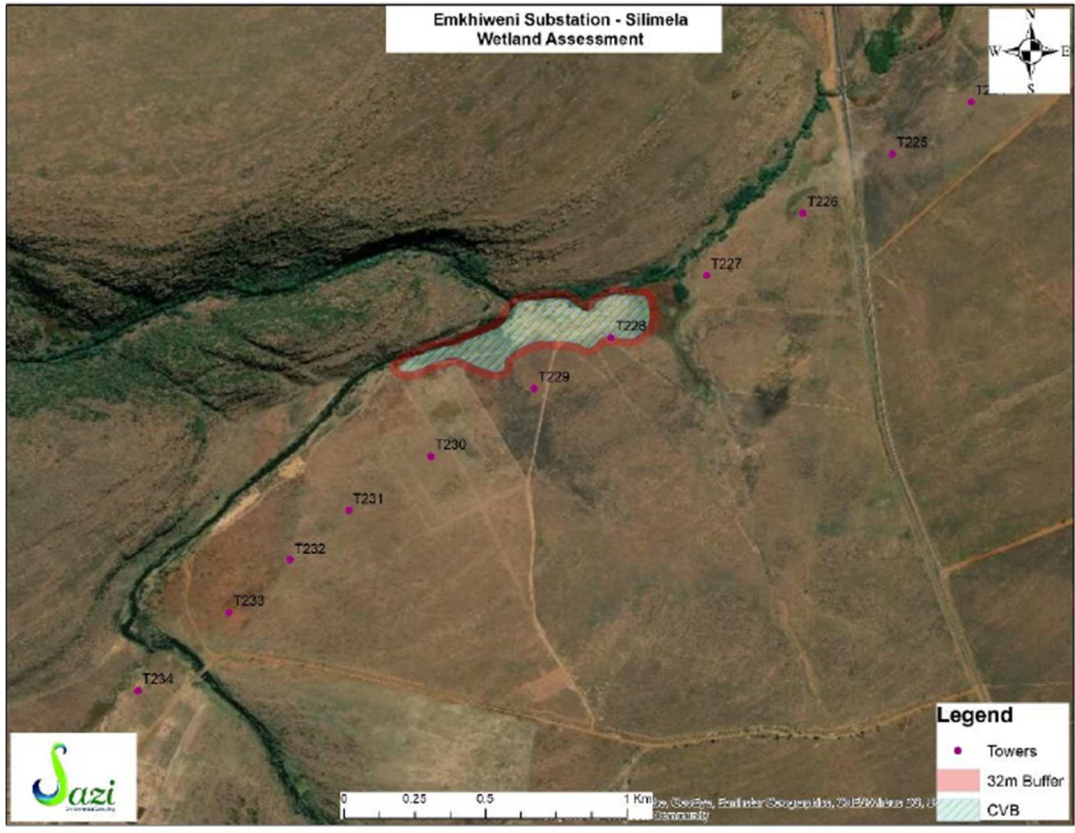


Figure 7: Sensitivity Map – Wetlands associated with Tower 228



Figure 8: Sensitivity Map – Wetlands associated with Towers 260

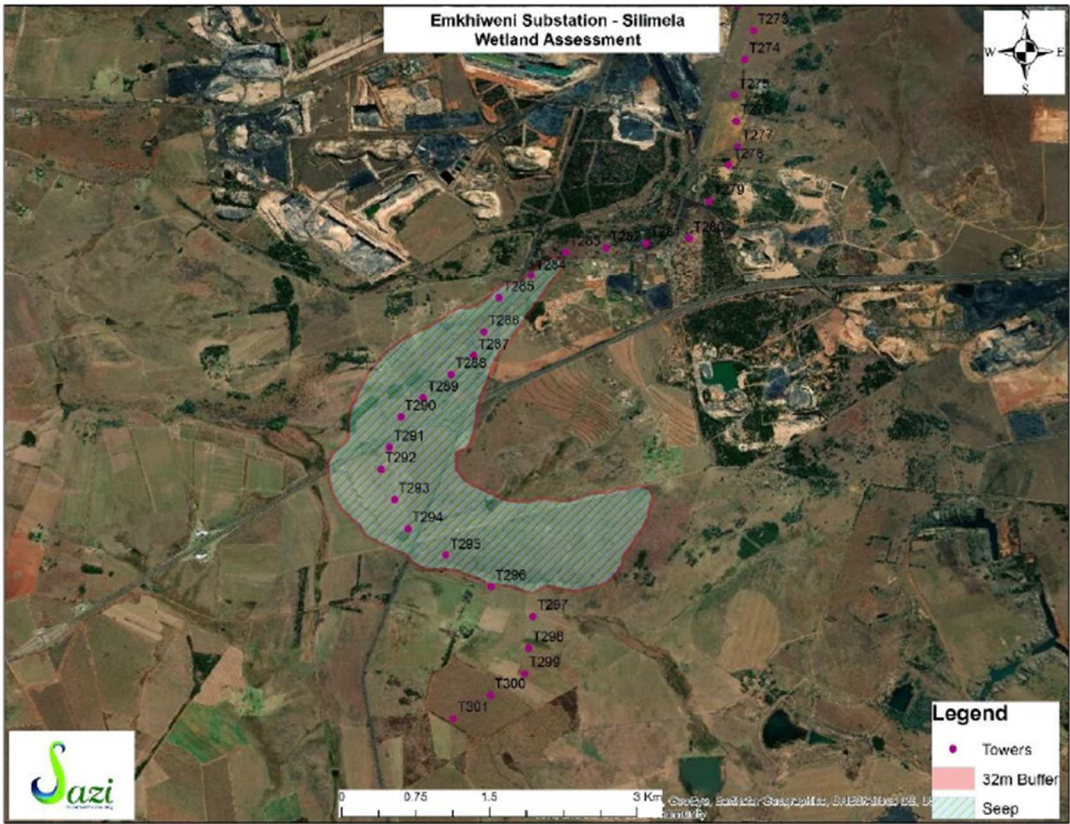


Figure 9: Sensitivity Map – Wetlands associated with Towers 284-296

7.3 Sub-section 3: Declaration

The proponent/applicant or holder of the EA affirms that he/she will abide and comply with the prescribed impact management outcomes and impact management actions as stipulated in part B: section 1 of the generic EMPr and have the understanding that the impact management outcomes and impact management actions are legally binding. The proponent/applicant or holder of the EA affirms that he/she will provide written notice to the CA 14 days prior to the date on which the activity will commence of commencement of construction to facilitate compliance inspections.

Signature Proponent/applicant/ holder of EA

Date:

7.4 Sub-section 4: amendments to site specific information (Part B; section 2)

Should the EA be transferred to a new holder, Part B: Section 2 must be completed by the new holder and submitted with the application for an amendment of the EA in terms of Regulations 29 or 31 of the EIA Regulations, whichever applies. The information submitted for an amendment to an environmental authorisation will be considered to be incomplete should a signed copy of Part B: Section 2 not be submitted. Once approved, Part B: Section 2 forms part of the EMPr for the development and the EMPr becomes legally binding to the new EA holder.

EA has not been transferred to a new holder, therefore the current information under Part B: Section 2 is relevant.

PART C

8 SITE SPECIFIC ENVIRONMENTAL ATTRIBUTES

If any specific environmental sensitivities/attributes are present on the site which require more specific impact management outcomes and impact management actions, not included in the pre-approved generic EMPr template, to manage impacts, those impact management outcomes and actions must be included in this section. These specific management controls must be referenced spatially, and must include impact management outcomes and impact management actions. The management controls including impact management outcomes and impact management actions must be presented in the format of the pre-approved generic EMPr template. This applies only to additional impact management outcomes and impact management actions that are necessary.

If Part C is applicable to the development as authorised in the EA, it is required to be submitted to the CA together with the BAR or EIAR, for consideration of, and decision on, the application for EA. The information in this section must be prepared by an EAP and the name and expertise of the EAP, including the curriculum vitae are to be included. Once approved, Part C forms part of the EMPr for the site and is legally binding.

This section will **not be required** should the site contain no specific environmental sensitivities or attributes.

Specific Environmental Attributes for the proposed development include (refer to sensitivity maps under Sub-section 2):

- 1) **Wetlands and watercourses associated with the development;**
- 2) **Irrigated cultivated land traversed by the powerline;**
- 3) **Protected trees and plants of conservation concern;**
- 4) **Sections of the line identified by the Avifauna Specialist requiring bird flight deflectors;**
- 5) **Sections of the powerline route where potsherds of negligible to low heritage value were identified.**

The mitigation measures provided by the Specialists through the Impact Assessment are included below:

Geology and Soil	
Project Life-cycle:	Construction and Operation
Potential Impact:	Soil erosion
Proposed Mitigation:	<ul style="list-style-type: none">• Stabilisation of cleared areas to prevent and control erosion. The method chosen (e.g. watering, planting, retaining structures, commercial anti-erosion compounds) will be selected according to the site specific conditions. Drainage management should also be implemented to ensure the minimization of potential erosion.• Rehabilitate all areas disturbed immediately after construction.• Monitoring to be conducted to detect erosion.

Geology and Soil	
Project Life-cycle:	Construction and Operation
Potential Impact:	Loss of agricultural soil
Proposed Mitigation:	<ul style="list-style-type: none"> • Avoid siting the towers in irrigated lands, especially rotational irrigated lands. • Plan construction activities in consultation with affected Landowners practicing agricultural practices on the affected properties. • Limit construction footprint in agricultural lands. • Strip topsoil before construction and replace topsoil in impacted areas around completed towers as part of rehabilitation. • Rehabilitate all areas disturbed immediately after construction.

Geology and Soil	
Project Life-cycle:	Construction and Operation
Potential Impact:	Contamination of Soil
Proposed Mitigation:	<ul style="list-style-type: none"> • Hazardous chemical substances must be stored and managed according to the relevant legislation and regulations in order to prevent spillages which may contaminate soil. • After excavation, all soils must be replaced in the same order as they were removed. • Remove, stockpile and preserve topsoil for re-use during rehabilitation. • Topsoil should be temporarily stockpiled, separately from subsoil and rocky material, when areas are cleared. If mixed with sub-soil the usefulness of the topsoil for rehabilitation of the site will be lost. • Stockpiled topsoil should not be compacted and should be replaced as the final soil layer. No vehicles are allowed access onto the stockpiles after they have been placed. • Topsoil stripped from different sites must be stockpiled separately and clearly identified as such. Topsoil obtained from sites with different soil types must not be mixed. • Topsoil stockpiles must not be contaminated with oil, diesel, petrol, waste or any other foreign matter, which may inhibit the later growth of vegetation and microorganisms in the soil. • Soil must not be stockpiled on drainage lines or near watercourses. • Soil should be exposed for the minimum time possible and kept free of invasive vegetation, that is the timing of clearing and grubbing should be coordinated as much as possible to avoid prolonged exposure of soils to wind and water erosion.

Topography	
Project Life-cycle:	Construction and Operation
Potential Impact:	<ul style="list-style-type: none"> • Visual impact • Erosion on sloped areas
Proposed Mitigation:	<ul style="list-style-type: none"> • Avoid placing site camps in high visual impact areas. • Rehabilitate affected areas immediately after construction. • Implement erosion protection on slopes. • Erecting a fence with controlled access around the open spaces and natural areas will prevent access of vagrants and criminals into these areas.

Surface Water	
Project Life-cycle:	Construction and Operation
Potential Impact:	Damage to riparian habitat as part of the clearing of the servitude and stringing operations.
Proposed Mitigation:	<ul style="list-style-type: none"> • No activities should take place in the watercourses and associated buffer zone. Where the above is unavoidable, only a tower footprint and no access roads can be considered. This is subjected to authorization by means of a water use license; • Construction in and around watercourses should be restricted to the dry season; • A temporary fence or demarcation must be erected around the works area to prevent access to sensitive environs. The works areas generally include the servitude, construction camps, areas where material is stored and the actual footprint of the tower; • Prevent pedestrian and vehicular access into the wetland areas as well as riparian areas; • Alien plant eradication and follow-up control activities prior to construction, to prevent spread into disturbed soils, as well as follow-up control during construction; • Restrict the construction footprint to minimum area required to undertake the work. • Keep clearance of vegetation to a minimum. • Plan stringing through watercourses to take place at pre-determined points such as where the wetland width (and thus area to be impacted) is the smallest; • Access roads and bridges should span the wetland area, without impacting on the permanent or seasonal zones; • Consider the various methods of stringing and select whichever method(s) that will have the least impact on watercourses e.g. shooting a pilot cable and pull cables with a winch, or flying cables over; • Stringing should preferably not make use of vehicles in watercourses. If unavoidable, plan stringing activities in wetlands areas to take place within the drier winter months and use equipment with the smallest possible footprint.

Surface Water	
Project Life-cycle:	Construction and Operation
Potential Impact:	Contamination of surface water through sedimentation from silt-laden runoff from disturbed areas.
Proposed Mitigation:	<ul style="list-style-type: none"> • Conduct water quality monitoring (baseline and during construction) at suitable up- and downstream sites when working close to watercourses. • Where necessary, install in-stream silt traps during construction within the watercourse channel and along the riparian habitat. The style of silt trap will depend on materials used and the water movement patterns. • Implement suitable stormwater measures during construction to manage ingress of runoff into watercourses. • Reduce sediment loads in water from dewatering operations. All dewatering should be done through temporary sediment traps (e.g. constructed out of geo-textiles and hay bales). • Select appropriate crossing points (geotechnical conditions, sensitivity of riparian habitat and in-stream habitat), depending on technical feasibility. • No activities should take place in the watercourses and associated buffer zone. Where the above is unavoidable, only a tower footprint and no access roads can be considered. This is subjected to authorization by means of a water use license; • Construction in and around watercourses should be restricted to the dry season;

	<ul style="list-style-type: none"> • Consider the various methods of stringing and select whichever method(s) that will have the least impact on watercourses e.g. shooting a pilot cable and pull cables with a winch, or flying cables over; • Stringing should preferably not make use of vehicles in watercourses. If unavoidable, plan stringing activities in wetlands areas to take place within the drier winter months and use equipment with the smallest possible footprint e.g. quad bikes; • Management of on-site water use and prevent stormwater or contaminated water directly entering the watercourses; • Clearing of vegetation within Riparian zones around watercourses should be kept to a minimum. • Cleared areas near watercourses should be rehabilitated as soon as possible to prevent erosion of bare soil, which could lead to sedimentation and siltation.
--	---

Surface Water	
Project Life-cycle:	Construction and Operation
Potential Impact:	Contamination through spillage of fuel, hazardous chemicals, leaking vehicles, herbicides, etc.
Proposed Mitigation:	<ul style="list-style-type: none"> • All construction activities to comply with the National Water Act (Act No. 36 of 1998). • Ensure that all hazardous storage containers and storage areas comply with the relevant SABS standards to prevent leakage. • Storage area and ablution facilities to be located 50m from edge of riparian habitat. • Ensure proper storage of material (including fuel, paint) that could cause water pollution. Ensure proper storage and careful handling of hazardous substances with spill prevention materials at hand. • Formalise access roads and make use of existing roads and tracks where feasible, rather than creating new routes through watercourses; • Regularly inspect all vehicles for leaks. • Re-fuelling of vehicles must take place off-site. • Herbicides, if used to control weeds during construction or operation, must be an approved and registered product and application must be under the direct supervision of a qualified technician or trained personnel. • All surplus herbicide shall be disposed of in accordance with the supplier's specifications. • Littering must be prohibited by providing adequate number of rubbish bins during the construction and operational phases to ensure proper disposal of rubbish. • Staff must be trained to deal with fuel/chemical spills and spill kits must be easily available at all times.

Surface Water	
Project Life-cycle:	Construction and Operation
Potential Impact:	Inadequate stormwater management due to lack of maintenance
Proposed Mitigation:	<ul style="list-style-type: none"> • Existing stormwater infrastructure should be maintained during construction activities to prevent the deterioration and subsequent failure of current infrastructure. • Temporary berms should be constructed on the downstream perimeter of the site to channel runoff containing silt to a location where silt is allowed to settle prior to discharging into the existing stormwater infrastructure or natural watercourse. • The main contractor is to control stormwater during construction by installing berms at the top of all cut and fill embankments.

	<ul style="list-style-type: none"> Runoff is to be diverted into the site and, either discharged by gravity or, if required, pumped to the Municipal stormwater network.
--	---

FLORA PRE-CONSTRUCTION PHASE	
Potential Impact	Mitigation
Loss of plant species of conservation concern and protected trees	<ul style="list-style-type: none"> It is recommended that prior to construction, <i>Boophane disticha</i> and <i>Hypoxis hemerocallidea</i> plant species recorded within the project area must be searched and rescued and then following construction activities, they can be re-established within the study area. Permits from DAFF and LEDET are required before construction commences in order to cut, disturb, destroy or remove the several protected trees noted within the project area. It is recommended that search, rescue and relocation be conducted taking into consideration flora and fauna species of conservation concern. For flora species, the following factors need to be considered (amongst others) as part of this plan: <ul style="list-style-type: none"> Detailed plan of action (including timeframes, methodology and costs); Site investigations; Consultation with authorities and stakeholders; Marking of species to be relocated; Applying for permits (LEDET/MTPA); Identification of suitable areas for relocation; Aftercare; and Monitoring (including targets and indicators to measure success).

FAUNA PRE-CONSTRUCTION & CONSTRUCTION PHASE	
Potential Impact	Mitigation
Loss of <i>Protected species</i> listed in terms of the National Environmental Management: Biodiversity Act, 2004 (Act No. 10 of 2004) Threatened or Protected Species regulations	<ul style="list-style-type: none"> In order to protect Southern African Python on or around the site, should this species be encountered or exposed during the construction phase, it should be removed and relocated to natural areas in the vicinity. This remedial action requires the engagement of a herpetologist and or ecologist to oversee the removal of any herpetofauna during the initial ground clearing phase of construction (i.e. initial ground-breaking by earthmoving equipment). However, if this species is found during winter period, when it is in hibernation, then a permit from LEDET/MTPA would be required in order to catch and release it to a safer environment. The conservation of the Giant Bullfrog and of amphibians in general will be met by the protected area network as well as the designation of priority habitats, i.e. pans or quaternary catchments, with associated restrictions on land use. Any impacts on a specimen of this species or that may negatively affect the survival of the species would require a permit from MTPA for relocation if avoidance is not possible. A permit is required from MTPA in order catch, handle, collect, transport and/or relocate the species.

FAUNA PRE-CONSTRUCTION & CONSTRUCTION PHASE	
Potential Impact	Mitigation
	<ul style="list-style-type: none"> • River and wetland systems must be spanned and no towers should be placed within the buffer zones dictated by the surface water studies.

FLORA PRE-CONSTRUCTION PHASE	
Potential Impact	Mitigation
Loss of CBA and ESA habitats	<ul style="list-style-type: none"> • The most significant way to mitigate the loss of habitat is to limit the construction footprint within the natural habitat areas remaining. Disturbance of vegetation must be limited to the servitude area acquired for the project. • Where possible, sensitive habitats must not be cleared and encouraged to grow. • Disturbance of vegetation must be limited only to areas of construction. • Areas cleared of vegetation must be re-vegetated prior to contractor leaving the site. • All stockpiles, construction vehicles, equipment and machinery should be situated away from the natural vegetation. • Prevent contamination of natural areas by any pollution. • Although it is unavoidable that sections of the project infrastructure development will need to traverse areas of potential high sensitivity, the clearing of vegetation must be limited to the servitude area acquired for the project.

FLORA PRE-CONSTRUCTION PHASE	
Potential Impact	Mitigation
Loss of topsoil	<ul style="list-style-type: none"> • During site preparation, topsoil and subsoil are to be stripped separately from each other and must be stored separately from spoil material for use in the rehabilitation phase. It should be protected from wind and rain, as well as contamination from diesel, concrete or wastewater. • Records of all environmental incidents must be maintained and a copy of these records must be made available to authorities on request throughout the project execution.

FLORA CONSTRUCTION PHASE	
Potential Impact	Mitigation
Destruction of indigenous flora during site establishment	<ul style="list-style-type: none"> • Indigenous plants naturally growing within the project area, but that would be otherwise destroyed during clearing for development purposes, should be incorporated into landscaped areas. • Vegetation clearing should be kept to a minimum, and this should only occur where it is absolutely necessary and the use of a brush-cutter is highly preferable to the use of earth-moving equipment. • Where possible, natural vegetation must not be cleared and encouraged to grow. • Ensure that all personnel have the appropriate level of environmental awareness and competence to ensure continued environmental due diligence and on-going minimisation of

FLORA CONSTRUCTION PHASE	
Potential Impact	Mitigation
	<p>environmental harm and this can be achieved through provision of appropriate awareness to all personnel.</p> <ul style="list-style-type: none"> • Disturbance of vegetation must be limited only to areas of construction. • Prevent contamination of natural vegetation by any pollution. • Areas cleared of vegetation must be re-vegetated prior to contractor leaving the site. • Any fauna (mammal and reptile) that becomes trapped in the trenches or in any construction or operational related activity may not be harmed and must be placed rescued and relocated by an experienced person. • Proliferation of alien and invasive species is expected within the disturbed areas and they should be eradicated and controlled to prevent further spread. • No trapping or any other method of catching of any fauna may be performed on site • No storage of building materials or rubbles are allowed in the sensitive areas. • Areas showing dense natural vegetation can be avoided/ spanned in order to reduce vegetation loss. • Avoid translocating stockpiles of topsoil from one place to sensitive areas in order to avoid translocating soil seed banks of alien species. • Rehabilitate all disturbed areas as soon as the construction is completed within the study area

FAUNA CONSTRUCTION PHASE	
Potential Impact	Mitigation
Loss and displacement of animals on site	<ul style="list-style-type: none"> • Training of construction workers to recognise threatened animal species will reduce the probability of fauna being harmed unnecessarily. • The contractor must ensure that no faunal species are disturbed, trapped, hunted or killed during the construction phase. • All construction and maintenance vehicles must stick to properly demarcated and prepared roads. Off-road driving should be strictly prohibited. • A low speed limit should be enforced on site to reduce wildlife collisions. • No fires should be allowed at the site • No dogs or other domestic pets should be allowed at the site.

FLORA AND FAUNA CONSTRUCTION PHASE	
Potential Impact	Mitigation
Loss of habitat and habitat fragmentation	<ul style="list-style-type: none"> • The most significant way to mitigate the loss of habitat is to limit the footprint within the natural habitat areas remaining. • No structures should be built outside the area demarcated for the development. • Although it is unavoidable that sections of the project infrastructure development will need to traverse areas of potential high sensitivity, the clearing of vegetation must be limited to the servitude area acquired for the project.

FLORA AND FAUNA CONSTRUCTION PHASE	
Potential Impact	Mitigation
	<ul style="list-style-type: none"> • Where possible, the proposed linear infrastructure (powerline) should be aligned with existing linear infrastructure or routed through already transformed/degraded areas. • All stockpiles, construction vehicles, equipment and machinery should be situated away from the natural vegetation.

FLORA CONSTRUCTION PHASE	
Potential Impact	Mitigation
Loss of vegetation due to fuel and chemical spills	<ul style="list-style-type: none"> • Appropriate measures should be implemented in order to prevent potential soil pollution through fuel, oil leaks and spills and then compliance monitored by an appropriate person. • Make sure construction vehicles are maintained and serviced to prevent oil and fuel leaks. • Emergency on-site maintenance should be done over appropriate drip trays and all oil or fuel must be disposed of according to waste regulations. Drip-trays must be placed under vehicles and equipment when not in use.

FLORA CONSTRUCTION PHASE	
Potential Impact	Mitigation
Destruction of alien vegetation	<ul style="list-style-type: none"> • All alien seedlings and saplings must be removed as they become evident for the duration of construction phase. • Manual / mechanical removal is preferred to chemical control.

FLORA CONSTRUCTION PHASE	
Potential Impact	Mitigation
Increased soil erosion	<ul style="list-style-type: none"> • Topsoil should be stored in such a way that does not compromise its plant-support capacity. • Topsoil from the construction activities should be stored for post-construction rehabilitation work and should not be disturbed more than is absolutely necessary. • Protect topsoil in order to avoid erosion loss on steep slopes. • Protect topsoil from contamination by aggregate, cement, concrete, fuels, litter, oils, domestic and wastes. • An ecologically-sound storm water management plan must be implemented during construction and appropriate water diversion systems put in place.

FLORA CONSTRUCTION PHASE	
Potential Impact	Mitigation
Loss of CBA and ESA habitats	<ul style="list-style-type: none"> • The most significant way to mitigate the loss of habitat is to limit the construction footprint within the natural habitat areas remaining. Disturbance of vegetation must be limited to the servitude area acquired for the project. • Where possible, sensitive habitats must not be cleared and encouraged to grow.

FLORA CONSTRUCTION PHASE	
Potential Impact	Mitigation
	<ul style="list-style-type: none"> • Disturbance of vegetation must be limited only to areas of construction. • Areas cleared of vegetation must be re-vegetated prior to contractor leaving the site. • All stockpiles, construction vehicles, equipment and machinery should be situated away from the natural vegetation. • Prevent contamination of natural areas by any pollution. • Although it is unavoidable that sections of the project infrastructure development will need to traverse areas of potential high sensitivity, the clearing of vegetation must be limited to the servitude area acquired for the project.

FLORA AND FAUNA CONSTRUCTION PHASE	
Potential Impact	Mitigation
Damage to plant and animal life outside of the powerline servitude	<ul style="list-style-type: none"> • Any fauna (mammal, reptile and amphibian) that becomes trapped in the trenches or in any construction or operational related activity may not be harmed and must be placed rescued and relocated by an experienced person. • Proliferation of alien and invasive species is expected within the disturbed areas and they should be eradicated and controlled to prevent their spread. • No unauthorised vehicles should be allowed to drive through the site during the construction activities. • No trapping or any other method of catching of any animal may be performed on site. • Illegal hunting is prohibited. • No dumping of any form is permitted. • No damage and/or removal/trapping/snaring of indigenous plant or animal species for cooking and other purposes will be allowed. • All areas to be affected by the project will be rehabilitated by indigenous vegetation. • Construction activities should be restricted to the development footprint area and then the compliance in terms of footprint can be monitored by Environmental Control Officer (ECO). • River systems must be spanned and no towers should be placed within the buffer zones dictated by the surface water studies. • Natural areas which could be deemed as no go should be clearly marked.

FAUNA CONSTRUCTION PHASE	
Potential Impact	Mitigation
Disturbance to animals	<ul style="list-style-type: none"> • Animals residing within the designated area shall not be unnecessarily disturbed. • During construction, refresher training should be conducted to construction workers with regards to littering and poaching. • The Contractor and his/her employees shall not bring any domestic animals onto site. • Toolbox talks should be provided to contractors regarding disturbance to animals. Particular emphasis should be placed on talks regarding snakes.

FLORA CONSTRUCTION/POST CONSTRUCTION PHASE	
Potential Impact	Mitigation
Loss of habitat due to construction activities	<ul style="list-style-type: none"> All areas to be affected by the project will be rehabilitated after construction and all waste generated by the construction activities will be stored in a temporary demarcated storage area, prior to disposal thereof at a licensed registered landfill site. As much vegetation growth as possible should be promoted within the servitude in order to protect soils and to reduce the percentage of the surface area which is left as bare ground. In this regard special mention is made of the need to use indigenous vegetation species as the first choice during landscaping. In terms of the percentage of coverage required during rehab and also the grass mix to be used for rehab, the EMPr will be consulted for guidance. However, the plant material to be used for rehabilitation should be similar to what is found in the surrounding area.

FAUNA OPERATIONAL PHASE	
Potential Impact	Mitigation
Disturbance of faunal species	<ul style="list-style-type: none"> The disturbance of fauna should be minimized. Animals residing within the designated area shall not be unnecessarily disturbed.

FLORA OPERATIONAL PHASE	
Potential Impact	Mitigation
Destruction of alien vegetation	<ul style="list-style-type: none"> All alien seedlings and saplings must be removed as they become evident for the duration of operational phase. Manual / mechanical removal is preferred to chemical control.

Nature: *Loss of potentially productive agricultural land (both construction and operation phase)*

Mitigation: The main mitigation measures would be:

- To minimise the footprint of construction as much as possible.
- Avoid highly productive and/or irrigated areas (see Figure 2)

Nature: *Loss of soil through erosion due to action of water*

Mitigation: The main mitigation measures would be:

- To minimise the footprint of construction as much as possible.
- Identify potentially highly erodible soils and avoid such areas
- Avoid disturbance of watercourses, steep slopes
- Re-vegetate bare areas as soon as possible
- Practice sustainable soil conservation measures where necessary (contours, geotextiles, soil stabilization)

Nature: *Loss of potentially productive irrigated areas (both construction and operation phase)*

Mitigation: The main mitigation measures would be:

- To minimise the footprint of construction as much as possible.
- Avoid active irrigated areas (see Figure 2), since irrigation cannot be carried out adjacent to transmission lines or under the route.

Land Capability – Agricultural Potential	
Project Life-cycle:	Construction and Operation
Potential Impact:	Risk of harm to livestock from construction activities (e.g. open excavations) and Loss of livestock through improper access control and theft.
Proposed Mitigation:	<ul style="list-style-type: none"> • Access control on farms and private properties must be maintained. • Additional access control, if required, should be implemented. • All excavations, especially deep excavations, must be barricaded to ensure livestock cannot fall in. • Consultation with landowners should be undertaken, especially during construction to ensure that construction is planned in synergy with farming practices, as far as reasonably possible.

Land Use	
Project Life-cycle:	Construction and Operation
Potential Impact:	Land acquisition and servitude restrictions
Proposed Mitigation:	<ul style="list-style-type: none"> • Engage and negotiate with affected landowners. • Eskom will need to conform to all its legal obligations as part of the acquisition of land for the construction and operation of the project.

Heritage	
Project Life-cycle:	Construction and Operation
Potential Impact:	Negative impact on change finds of heritage value during construction and maintenance of the infrastructure and servitude.
Proposed Mitigation:	<ul style="list-style-type: none"> • If any towers are positioned on the identified locations where potshards were found, then the position of the tower must be adjusted to avoid impacting on the heritage resources. • Ensure that any chance finds of cultural, archaeological, and historical significance are demarcated on the site layout plan, and marked as no-go areas. No known or protected sites were recorded in the HIA. • The ECO must monitor construction of towers to ensure that any chance finds can be identified timeously and the necessary steps taken to ensure their protection. • Should any archaeological, cultural property heritage resources be exposed during excavation or be found on development site, a registered heritage specialist or SAHRA official must be called to site for inspection. • A buffer of 20 m must be placed around all heritage resources to ensure that during the construction of the powerline, these sites are not damaged. • The management plan submitted by the Heritage Specialist must be followed.

Air Quality	
Project Life-cycle:	Construction
Potential Impact:	Excessive dust levels as a result of construction activities
Proposed Mitigation:	<ul style="list-style-type: none"> • Appropriate dust suppression measures or temporary stabilising mechanisms to be used when dust generation is unavoidable (e.g. dampening with water, chemical soil binders, straw, brush packs, chipping), particularly during prolonged periods of dry weather. Dust suppression to be undertaken for all bare areas, including construction area and access roads. Note that all dust suppression requirements should be based on the results from the dust monitoring and the proximity of sensitive receptors. • Speed limits to be strictly adhered to. • The Contractor will take preventative measures to minimise complaints regarding dust nuisances (e.g. screening, dust control, timing, pre-notification of affected parties). • Air quality to be monitored (baseline and during construction) for dust fallout and particulate matter. Sampling locations to consider major sources of dust and sensitive receptors.

Noise	
Project Life-cycle:	Construction
Potential Impact:	Excessive noise levels as a result of construction and operation activities
Proposed Mitigation:	<ul style="list-style-type: none"> • The provisions of SANS 10103:2008 will apply to all areas at the perimeter of the site, within audible distance of residents. • Construction work should take place during working hours – defined as 07h00 to 17h00 on weekdays and 07h00 to 14h00 on Saturdays. Should overtime work be required, that will generate noise, consultation with the affected community or landowner should take place.. • No amplified music will be allowed on the site. The use of radios, tape recorders, compact disc players, television sets etc. will not be permitted unless at a level that does not serve as an intrusion to adjacent landowners. • Construction activities generating output levels of 85 dB or more will be confined to the hours during normal working hours. • The Contractor shall inform local communities and residents of any activity that could cause a nuisance to them. • Noise rules must be established for construction areas. These rules must continue into the operation phase. • The Contractor shall take preventative measures (e.g. screening, muffling, timing, pre-notification of affected parties) to minimise complaints regarding noise and vibration nuisances from sources such as power tools. • No noise generating activity outside of normal hours, regardless of its proximity to residences, can take place without application to the Engineer for approval. The application shall be accompanied by the noise containment measures proposed. • Restrict construction activities and vehicle movement to normal working hours. • Where necessary engage with the land owner to ensure livestock are not in close proximity to the construction activity during times where noise levels are of significance. • Disturbances during the construction phase can be successfully mitigated through contractor specifications issued at tender stage and through monitoring of contractor performance during the construction phase.

Existing Infrastructure	
Project Life-cycle:	Construction
Potential Impact:	Damage to property, crops, infrastructure, services, etc. due to construction activities
Proposed Mitigation:	<ul style="list-style-type: none"> • If a risk exists of damage taking place on a property as a result of construction, a condition survey should be undertaken prior to construction; • The contractor is to make good / repair and acknowledge any damage that occurs on any property as a result of construction work; • Where crops and agricultural machinery are damaged, compensation is to be paid to the farmer for the loss; • The farmer should be compensated for any loss of income experienced at the account of the contractor.

Environmental Feature	Disturbance arising from the construction phase
Project life-cycle	Construction phase
Potential Impact	Proposed Management Objectives / Mitigation Measures
Traffic	<ul style="list-style-type: none"> • Ensure that the necessary signage and traffic measures are implemented for safe and convenient access to the site; • Additional creation of routes and access roads must be implemented to reduce heavy traffic flow; • The EMPr must include restrictions on the Contractor and its sub-contractors related to minimising impacts on the safety of road users; Restrictions should include appropriate speed limitations, restricting travel times to daylight hours, communication measures and the establishment of haul routes.; • Measures must be put in place to prevent construction vehicles from entraining dirt onto public roads; • Traffic control personnel must be assigned where deemed necessary, this will be to control the movement of construction vehicles in relation to local vehicles to ensure maximum safety and coherence.
Local Road Condition	<ul style="list-style-type: none"> • A continuous condition survey of the local roads to be used during the construction phase should be made prior to construction; • Delivery routes should be defined and adhered to during the construction phase; • Maintenance of local roads should take place during the construction phase, ensuring that the local roads used by the contractor are left in the same or better condition than they were prior to the start of construction.

Nature of impact: Potential visual impact significance of the Construction Camps

Mitigation:	The visual impact can be minimized by the creation of a visual barrier. The construction area will be cleared as soon as construction of the infrastructure is finished.
--------------------	--

Nature of impact: Potential visual impact significance of the Powerlines

Mitigation:	The visual impact can be minimized by the creation of a visual barrier during construction. The steel of the pylons can be painted a darker colour than galvanized steel to reduce the visual impact. Placing Powerlines next to existing linear features as far as possible. Clearing of vegetation should only be done by cutting and not earth moving equipment to reduce the visual impact of the vegetation scars.
--------------------	---

Nature of impact: Potential visual impact significance of the Substation

Mitigation:	The visual impact can be minimized by the creation of a visual barrier.
--------------------	---

Nature of impact: Potential visual impact significance of the Access Roads

Mitigation:	The visual impact can be minimized by using existing roads.
--------------------	---

Environmental Feature	Impacts Created by Providing a Secure, Sufficient Power Supply					
Project life-cycle	Operational Phase					
Potential Impact	Proposed Management Objectives / Mitigation Measures					
Economic	<ul style="list-style-type: none"> Increased business productivity; Economic growth; 					
Social Benefits	<ul style="list-style-type: none"> Convenient and less time-consuming daily tasks; Facilitation of education Facilitation of mass transport; Health care. 					
	Nature	Extent	Magnitude	Duration	Probability	Significance
Before Mitigation	Positive	Regional	High	Long Term	Likely	3
After Mitigation	Positive	Regional	High	Long Term	Likely	3
Significance of Impact and Preferred Alternatives	<p>Mitigation is not necessary for this positive impact.</p> <p>This mitigation measure does not influence the choice of alternatives considered in the study.</p>					

Environmental Feature	Impact owing to Land and Rights Acquisition					
Relevant Alternatives & Activities	Acquisition of land					
Project life-cycle	Pre-construction					
Potential Impact	Proposed Management Objectives / Mitigation Measures					
Loss of income from the acquisition of land	<ul style="list-style-type: none"> Where-ever possible, the final routing of the project infrastructure should be adjusted to avoid impacts. If the powerline servitude is such that it allows powerline alignment to the extent that an impact on a dwelling can be avoided, this should be done. The alternative, the relocation of communities, is very disruptive to the affected residents. Where impacts cannot be avoided, all negotiations and payments relating to compensating affected landowners should be conducted and concluded before construction begins. 					

	<ul style="list-style-type: none"> Those landowners who will be required to sell their property to Eskom SOC Ltd must be compensated for any business that is operating on the premises. All landowners whose businesses will be affected by the proposed project should be compensated to the full value of their immovable assets and any loss of income. Negotiations should take place between the landowner and Eskom for any compensation of potential income denied as a result of the servitude agreements. 																					
Relocation of Households	<ul style="list-style-type: none"> In the event that household relocation will be necessary, the process to be followed is as follows: <ul style="list-style-type: none"> A Resettlement Action Plan to be drawn up providing detail on the impacted households, households needs and how these will be catered for during and after the relocation, provides detail on the area to which they are to be relocated and the timeframes associated with the relocation; The relocation action plan is to be discussed with every impacted household and agreed to in writing; The relocation action plan is to be discussed with every impacted landowner (if this is not the same as the impacted household) and agreed to in writing; Relocation is to be effected in strict accordance with the relocation action plan; and An independent audit, carried out by a suitably qualified relocation expert, is to be conducted after every relocation to: determine the relocation's effectiveness and to identify shortfalls in adhering to the relocation action plan; and Shortfalls are to be addressed by the proponent within the duration of the construction period of the project. 																					
Construction Period and time frame	<ul style="list-style-type: none"> Careful planning should be adopted to reduce the impact of land acquisition on the overall programme for the works 																					
	<table border="1"> <thead> <tr> <th></th> <th>Nature</th> <th>Extent</th> <th>Magnitude</th> <th>Duration</th> <th>Probability</th> <th>Significance</th> </tr> </thead> <tbody> <tr> <td>Before Mitigation</td> <td>Negative</td> <td>Regional</td> <td>High</td> <td>Long term</td> <td>Almost Certain</td> <td>3</td> </tr> <tr> <td>After Mitigation</td> <td>Negative</td> <td>Regional</td> <td>Low</td> <td>Medium term</td> <td>Likely</td> <td>1</td> </tr> </tbody> </table>		Nature	Extent	Magnitude	Duration	Probability	Significance	Before Mitigation	Negative	Regional	High	Long term	Almost Certain	3	After Mitigation	Negative	Regional	Low	Medium term	Likely	1
	Nature	Extent	Magnitude	Duration	Probability	Significance																
Before Mitigation	Negative	Regional	High	Long term	Almost Certain	3																
After Mitigation	Negative	Regional	Low	Medium term	Likely	1																
Significance of Impact and Preferred Alternatives	<p>The final routing of the powerline is the primary mitigation measure that should be adopted. The final routing should be amended to avoid impacts on dwellings.</p> <p>Relocation should be undertaken with great circumspection.</p>																					

Environmental Feature	Impact of the siting Emkhiweni substation
Project life-cycle	Planning Phase
Potential Impact	Proposed Management Objectives / Mitigation Measures
Loss of productive land due to site selection	<ul style="list-style-type: none"> Landowner to be compensated for the loss of productive land

Environmental Feature	Economic opportunities arising from the construction phase
Project life-cycle	Construction phase
Potential Impact	Proposed Management Objectives / Mitigation Measures
SMME Creation	<ul style="list-style-type: none"> Local SMMEs should be given an opportunity to participate in the construction of the project through the supply of services, material or equipment.
Job Creation and Skills Development	<ul style="list-style-type: none"> The main contractor should employ non-core labour from the Main places as far as possible during the construction phase. The principles of Expanded Public Works Programme can be used for guiding the construction.
Indirect Employment Impacts	<ul style="list-style-type: none"> Spaza/informal trader shops may open next to the site as a consequence of construction. These should be controlled by the contractor to limit their footprint and to ensure that the local Municipalities – Informal Trading By-laws are complied with.

Environmental Feature	Disturbance arising from the construction phase
Project life-cycle	Construction phase
Potential Impact	Proposed Management Objectives / Mitigation Measures
Traffic	<ul style="list-style-type: none"> Ensure that the necessary signage and traffic measures are implemented for safe and convenient access to the site; Additional creation of routes and access roads must be implemented to reduce heavy traffic flow; The EMPr must include restrictions on the Contractor and its sub-contractors related to minimising impacts on the safety of road users; Restrictions should include appropriate speed limitations, restricting travel times to daylight hours, communication measures and the establishment of haul routes.; Measures must be put in place to prevent construction vehicles from entraining dirt onto public roads; Traffic control personnel must be assigned where deemed necessary, this will be to control the movement of construction vehicles in relation to local vehicles to ensure maximum safety and coherence.
Local Road Condition	<ul style="list-style-type: none"> A continuous condition survey of the local roads to be used during the construction phase should be made prior to construction; Delivery routes should be defined and adhered to during the construction phase; Maintenance of local roads should take place during the construction phase, ensuring that the local roads used by the contractor are left in the same or better condition than they were prior to the start of construction.
Increase in Dust	<ul style="list-style-type: none"> Dust and disturbance can be mitigated through the use of appropriate dust suppression mechanisms; Adherence to road signage can be added as an advantage and a measure to manage the increase in dust levels; Mitigation measures management should be adhered to according to the relevant specialist studies.
Influx of workers	<ul style="list-style-type: none"> All employment of locally sourced labour should be controlled on a contractual basis. If possible, and if the relevant Ward Councillors deem it necessary, the employment process should include the affected Ward Councillors.

Environmental Feature	Disturbance arising from the construction phase
Project life-cycle	Construction phase
Potential Impact	Proposed Management Objectives / Mitigation Measures
	<ul style="list-style-type: none"> • People in search of work may move into the area, however, the project will create a limited number of job opportunities. Locally based people should be given opportunities and preferences over others; • No staff accommodation should be allowed on site; • Influx of workers could may lead to increased diseases and HIV/AIDSs & STI as well as STD infections, therefore awareness programmes should be implemented through the local educational institutions and for the workers as well.
Worker Health and Safety	<ul style="list-style-type: none"> • The provisions of the OHS Act 85 of 1993 and the Construction Regulations of 2014 should be implemented on all sites; • Account should be taken of the safety impacts on the local community when carrying out the longitudinal aspects of the project, such as the pipelines; • Contractors should establish HIV/AIDSs awareness programmes at their site camps.
Security	<ul style="list-style-type: none"> • The sites of the substations should be fenced for the duration of construction; • All contractors' staff should be easily identifiable through their respective uniforms; • A security policy should be developed which amongst others requires that permission be obtained prior to entering any property and provisions controlling trespassing by contractor staff; • Security staff should only be allowed to reside at contractor camps and no other employees; • Contractors should establish crime awareness programmes at their site camps.
Noise impacts	<ul style="list-style-type: none"> • Prior notice should be given to surrounding communities of drilling events; • Construction work should take place during working hours – defined as 07h00 to 17h00 on weekdays and 07h00 to 14h00 on Saturdays. Should overtime work be required, that will generate noise, consultation with the affected community or landowner should take place.
Damage to property	<ul style="list-style-type: none"> • If a risk existing of damage taking place on a property as a result of construction, a condition survey should be undertaken prior to construction; • The contractor is to make good and acknowledge any damage that occurs on any property as a result of construction work; • Where crops and agricultural machinery are damaged, compensation is to be paid to the farmer for the loss of these crops; • The farmer should be compensated for any loss of income experienced at the account of the contractor.

APPENDIX 1: METHOD STATEMENTS

To be prepared by the contractor prior to commencement of the activity. The method statements are **not required** to be submitted to the CA.

To be prepared by the Contractor once appointed, and placed as an addendum to this EMPr.

GENERIC ENVIRONMENTAL MANAGEMENT PROGRAMME (EMPr) FOR THE DEVELOPMENT AND EXPANSION OF SUBSTATION INFRASTRUCTURE FOR THE TRANSMISSION AND DISTRIBUTION OF ELECTRICITY



environmental affairs

Department:
Environmental Affairs
REPUBLIC OF SOUTH AFRICA

TABLE OF CONTENTS

INTRODUCTION.....	1
1. Background.....	1
2. Purpose	1
3. Objective	1
4. Scope	1
5. Structure of this document.....	2
6. Completion of part B: section 1: the pre-approved generic EMPr template.....	4
7. Amendments of the impact management outcomes and impact management actions.....	4
8. Documents to be submitted as part of part B: section 2 site specific information and declaration	5
(i) Amendments to Part B: Section 2 – site specific information and declaration	5
PART A – GENERAL INFORMATION.....	2
1. DEFINITIONS.....	2
2. ACRONYMS and ABBREVIATIONS	3
3. ROLES AND RESPONSIBILITIES FOR ENVIRONMENTAL MANAGEMENT PROGRAMME (EMPr) IMPLEMENTATION	4
4. ENVIRONMENTAL DOCUMENTATION REPORTING AND COMPLIANCE	10
4.1 Document control/Filing system	10
4.2 Documentation to be available.....	10
4.3 Weekly Environmental Checklist.....	10
4.4 Environmental site meetings.....	11
4.5 Required Method Statements.....	11
4.6 Environmental Incident Log (Diary).....	12
4.7 Non-compliance.....	12
4.8 Corrective action records.....	13
4.9 Photographic record	13
4.10 Complaints register.....	14
4.11 Claims for damages.....	14
4.12 Interactions with affected parties	14
4.13 Environmental audits.....	15
4.14 Final environmental audits.....	15
PART B: SECTION 1: Pre-approved generic EMPr template.....	16
5. IMPACT MANAGEMENT OUTCOMES AND IMPACT MANAGEMENT ACTIONS	16
5.1 Environmental awareness training	17
5.2 Site Establishment development	19

5.3	Access restricted areas	20
5.4	Access roads	20
5.5	Fencing and Gate installation	22
5.6	Water Supply Management.....	24
5.7	Storm and waste water management	25
5.8	Solid and hazardous waste management.....	26
5.9	Protection of watercourses and estuaries	27
5.10	Vegetation clearing.....	29
5.11	Protection of fauna	31
5.12	Protection of heritage resources	33
5.13	Safety of the public	34
5.14	Sanitation	34
5.15	Prevention of disease.....	36
5.16	Emergency procedures.....	37
5.17	Hazardous substances.....	38
5.18	Workshop, equipment maintenance and storage.....	40
5.19	Batching plants	42
5.20	Dust emissions	43
5.21	Blasting.....	44
5.22	Noise.....	45
5.23	Fire prevention.....	46
5.24	Stockpiling and stockpile areas.....	47
5.25	Civil works	48
5.26	Excavation of foundation, cable trenching and drainage systems	49
5.27	Installation of foundations, cable trenching and drainage systems.....	50
5.28	Installation of equipment (circuit breakers, current Transformers, Isolators, Insulators, surge arresters, voltage transformers, earth switches)	51
5.30	Cabling and Stringing.....	53
5.31	Testing and Commissioning (all equipment testing, earthing system, system integration).....	53
5.32	Socio-economic	54
5.33	Temporary closure of site	55
5.34	Dismantling of old equipment.....	56
5.35	Landscaping and rehabilitation	57
6	ACCESS TO THE GENERIC EMPr.....	60
PART B: SECTION 2.....		61
7	SITE SPECIFIC INFORMATION AND DECLARATION	61

7.1	Sub-section 1: contact details and description of the project.....	61
7.2	Sub-section 2: Development footprint site map.....	63
7.3	Sub-section 3: Declaration.....	63
7.4	Sub-section 4: amendments to site specific information (Part B; section 2)	65
PART C.....		66
8	SITE SPECIFIC ENVIRONMENTAL ATTRIBUTES	66
APPENDIX 1: METHOD STATEMENTS.....		83

List of figures

Figure 1:	Terrestrial ecological sensitivity map	63
Figure 2:	Heritage, Protected Areas, and IBA sensitivity map of the study area	64
Figure 3:	Sensitivity Map – Surface Water.....	64

List of tables

Table 1:	Guide to roles and responsibilities for implementation of a generic EMPr	4
----------	--	---

INTRODUCTION

1. Background

The National Environmental Management Act, 1998 (Act No. 107 of 1998) (NEMA) requires that an environmental management programme (EMPr) be submitted where an environmental impact assessment (EIA) has been identified as the environmental instrument to be utilised as the basis for a decision on an application for environmental authorisation (EA). The content of an EMPr must either contain the information set out in Appendix 4 of the Environmental Impact Assessment Regulations, 2014, as amended (EIA Regulations) or must be a generic EMPr relevant to an application as identified and gazetted by the Minister in a government notice. Once the Minister has identified, through a government notice that a generic EMPr is relevant to an application for EA, that generic EMPr must be applied by all parties involved in the EA process, including but not limited to the applicant and the competent authority (CA).

2. Purpose

This document constitutes a generic EMPr relevant to applications for the development or expansion of substation infrastructure for the transmission and distribution of electricity, and all listed and specified activities necessary for the realisation of such infrastructure.

3. Objective

The objective of this generic EMPr is to prescribe and pre-approve generally accepted impact management outcomes and impact management actions, which can commonly and repeatedly be used for the avoidance, management and mitigation of impacts and risks associated with the development or expansion of substation infrastructure for the transmission and distribution of electricity. The use of a generic EMPr is intended to reduce the need to prepare and review individual EMPrs for applications of a similar nature.

4. Scope

The scope of this generic EMPr applies to the development or expansion of substation infrastructure for the transmission and distribution of electricity requiring EA in terms of NEMA. This generic EMPr applies to activities requiring EA, mainly activity 11 and 47 of the Environmental Impact Assessment Regulations Listing Notice 1 of 2014, as amended, and activity 9 of the Environmental Impact Assessment Regulations Listing Notice 2 of 2014, as amended, and all associated listed or specified activities necessary for the realization of such infrastructure.

5. Structure of this document

This document is structured in three parts with an Appendix as indicated in the table below:

Part	Section	Heading	Content
A		Provides general guidance and information and is not legally binding	Definitions, acronyms, roles & responsibilities and documentation and reporting.
B	1	Pre-approved generic EMPr template	<p>Contains generally accepted impact management outcomes and impact management actions required for the avoidance, management and mitigation of impacts and risks associated with the development or expansion of substation infrastructure for the transmission and distribution of electricity, which are presented in the form of a template that has been pre-approved.</p> <p>The template in this section is to be completed by the contractor, with each completed page signed and dated by the holder of the EA prior to commencement of the activity.</p> <p>Where an impact management outcome is not relevant, the words “not applicable” can be inserted in the template under the “responsible persons” column.</p> <p>Once completed and signed, the template represents the EMPr for the activity approved by the CA and is legally binding. The template is not required to be submitted to the CA as once the generic EMPr is gazetted for implementation, it has been approved by the CA.</p> <p>To allow interested and affected parties access to the pre-approved EMPr template for consideration through the decision-making process, the EAP on behalf of the applicant /proponent must make the hard copy of this EMPr available at a public location and where the applicant has a website, the EMPr should also be made available on such publicly accessible website.</p>
	2	Site specific information	Contains preliminary infrastructure layout and a declaration that the applicant/holder of the EA

Part	Section	Heading	Content
			<p>will comply with the pre-approved generic EMPr template contained in <u>Part B: Section 1</u>, and understands that the impact management outcomes and impact management actions are legally binding. The preliminary infrastructure layout must be finalized to inform the final EMPr that is to be submitted with the basic assessment report (BAR) or environmental impact assessment report (EIAR), ensuring that all impact management outcomes and impact management actions have been either pre-approved or approved in terms of <u>Part C</u>.</p> <p>This section must be submitted to the CA together with the final BAR or EIAR. The information submitted to the CA will be considered to be incomplete should a signed copy of <u>Part B: section 2</u> not be submitted. Once approved, this Section forms part of the EMPr for the development and is legally binding.</p>
C		Site specific sensitivities/ attributes	<p>If any specific environmental sensitivities/ attributes are present on the site which require site specific impact management outcomes and impact management actions, not included in the pre-approved generic EMPr, to manage impacts, these specific impact management outcomes and impact management actions must be included in this section. These specific environmental attributes must be referenced spatially and impact management outcomes and impact management actions must be provided. These specific impact management outcomes and impact management actions must be presented in the format of the pre-approved EMPr template (<u>Part B: section 1</u>)</p> <p>This section will not be required should the site contain no specific environmental sensitivities or attributes. However, if <u>Part C</u> is applicable to the site, it is required to be submitted together with the BAR or EIAR, for consideration of, and decision on, the application for EA. The</p>

Part	Section	Heading	Content
			<p>information in this section must be prepared by an EAP and must contain his/her name and expertise including a curriculum vitae. Once approved, Part C forms part of the EMPr for the site and is legally binding.</p> <p>This section applies only to additional impact management outcomes and impact management actions that are necessary for the avoidance, management and mitigation of impacts and risks associated with the specific development or expansion and which are not already included in <u>Part B: section 1</u>.</p>
		Appendix 1	Contains the method statements to be prepared prior to commencement of the activity. The method statements are not required to be submitted to the competent authority.

6. Completion of part B: section 1: the pre-approved generic EMPr template

The template is to be completed prior to commencement of the activity, by providing the following information for each environmental impact management action:

- For implementation
 - a 'responsible person',
 - a method for implementation,
 - a timeframe for implementation
- For monitoring
 - a responsible person
 - frequency
 - evidence of compliance.

The completed template must be signed and dated by the holder of the EA prior to commencement of the activity. The method statements prepared and agreed to by the holder of the EA must be appended to the template as Appendix 1. Each method statement must be signed and dated on each page by the holder of the EA. This template once signed and dated is legally binding. The holder of the EA will remain responsible for its implementation.

7. Amendments of the impact management outcomes and impact management actions

Once the activity has commenced, a holder of an EA may make amendments to the impact management outcomes and impact management actions in the following manner:

- Amendment of the impact management outcomes: in line with the process contemplated in Regulation 37 of the EIA Regulations; and
- Amendment of the impact management actions: in line with the process contemplated in Regulation 36 of the EIA Regulations.

8. Documents to be submitted as part of part B: section 2 site specific information and declaration

Part B: Section 2 has three distinct sub-sections. The first and third sub-sections are in a template format. Sub-section two requires a map to be produced.

Sub-section 1 contains the project name, the applicant's name and contact details, the site information, which includes coordinates of the property or farm in which the proposed substation infrastructure is proposed as well as the 21-digit Surveyor General code of each cadastral land parcel and, where available, the farm name.

Sub-section 2 is to be prepared by an EAP and must contain his/her name and expertise including a curriculum vitae. This sub-section must include a map of the site sensitivity overlaid with the preliminary infrastructure layout using the national web based environmental screening tool, when available for compulsory use at: <https://screening.environment.gov.za/screeningtool>. The sensitivity map shall identify the nature of each sensitive feature e.g. threatened plant species, archaeological site, etc. Sensitivity maps shall identify features both within the planned working area and any known sensitive features and within 50 m from the development footprint.

Sub-section 3 is the declaration that the applicant (s)/proponent (s) or holder of the EA in the case of a change of ownership must complete which confirms that the applicant/EA holder will comply with the pre-approved 'generic EMPr' template in Section 1 and understands that the impact management outcomes and impact management actions are legally binding.

(a) Amendments to Part B: Section 2 – site specific information and declaration

Should the EA be transferred, Part B: Section 2 must be completed by the new applicant/proponent and submitted with the application for an amendment of the EA in terms of regulations 29 or 31 of the EIA Regulations, whichever applies. The information submitted as part of such an application for an amendment to an EA will be considered to be incomplete should a signed copy of Part B: Section 2 not be submitted. Once approved, Part B: Section 2 forms part of the EMPr for the development and the EMPr becomes legally binding to the new EA holder.

PART A – GENERAL INFORMATION

1. DEFINITIONS

In this EMPr any word or expression to which a meaning has been assigned in the NEMA or EIA Regulations has that meaning, and unless the context requires otherwise –

"clearing" means the clearing and removal of vegetation, whether partially or in whole, including trees and shrubs, as specified;

"construction camp" is the area designated for key construction infrastructure and services, including but not limited to offices, overnight vehicle parking areas, stores, the workshop, stockpile and lay down areas, hazardous storage areas (including fuels), the batching plant (if one is located at the construction camp), designated access routes, equipment cleaning areas and the placement of staff accommodation, cooking and ablution facilities, waste and wastewater management;

"contractor" - The Contractor has overall responsibility for ensuring that all work, activities, and actions linked to the delivery of the contract, are in line with the Environmental Management Programme and that Method Statements are implemented as described.

"hazardous substance" is a substance governed by the Hazardous Substances Act, 1973 (Act No. 15 of 1973) as well as the Hazardous Chemical and Substances Regulations, 1995;

"method statement" means a written submission by the Contractor to the Project Manager in response to this EMPr or a request by the Project Manager and ECO. The method statement must set out the equipment, materials, labour and method(s) the Contractor proposes using to carry out an activity identified by the Project Manager when requesting the Method Statement. This must be done in such detail that the Project Manager and ECO is able to assess whether the Contractor's proposal is in accordance with this specification and/or will produce results in accordance with this specification;

The method statement must cover as a minimum applicable details with regard to:

- (i) Construction procedures;
- (ii) Plant, materials and equipment to be used;
- (iii) Transporting the equipment to and from site;
- (iv) How the plant/ material/ equipment will be moved while on site;
- (v) How and where the plant/ material/ equipment will be stored;
- (vi) The containment (or action to be taken if containment is not possible) of leaks or spills of any liquid or material that may occur;
- (vii) Timing and location of activities;
- (viii) Compliance/ non-compliance; and
- (ix) Any other information deemed necessary by the Project Manager.

“**slope**” means the inclination of a surface expressed as one unit of rise or fall for so many horizontal units;

“**solid waste**” means all solid waste, including construction debris, hazardous waste, excess cement/ concrete, wrapping materials, timber, cans, drums, wire, nails, food and domestic waste (e.g. plastic packets and wrappers);

“**spoil**” means excavated material which is unsuitable for use as material in the construction works or is material which is surplus to the requirements of the construction works;

“**topsoil**” means a varying depth (up to 300 mm) of the soil profile irrespective of the fertility, appearance, structure, agricultural potential, fertility and composition of the soil;

“**works**” means the works to be executed in terms of the Contract

2. ACRONYMS and ABBREVIATIONS

CA	Competent Authority
cEO	Contractors Environmental Officer
dEO	Developer Environmental Officer
DPM	Developer Project Manager
DSS	Developer Site Supervisor
EAR	Environmental Audit Report
ECA	Environmental Conservation Act No. 73 of 1989
ECO	Environmental Control Officer
EA	Environmental Authorisation
EIA	Environmental Impact Assessment
ERAP	Emergency Response Action Plan
EMPr	Environmental Management Programme Report
EAP	Environmental Assessment Practitioner
FPA	Fire Protection Agency
HCS	Hazardous chemical Substance
NEMA	National Environmental Management Act, 1998 (Act No. 107 of 1998)
NEMBA	National Environmental Management: Biodiversity Act ,2004 (Act No. 10 of 2004)
NEMWA	National Environmental Management: Waste Act, 2008 (Act No. 59 of 2008)
MSDS	Material Safety Data Sheet
RI&AP's	Registered Interested and affected parties

3. ROLES AND RESPONSIBILITIES FOR ENVIRONMENTAL MANAGEMENT PROGRAMME (EMPr) IMPLEMENTATION

The effective implementation of this generic EMPr is dependent on established and clear roles, responsibilities and reporting lines within an institutional framework. This section of the EMPr gives guidance to the various environmental roles and reporting lines, however, project specific requirements will ultimately determine the need for the appointment of specific person(s) to undertake specific roles and or responsibilities. As such, it must be noted that in the event that no specific person, for example, an environmental control officer (ECO) is appointed, the holder of the EA remains responsible for ensuring that the duties indicated in this document for action by the ECO are undertaken.

Table 1: Guide to roles and responsibilities for implementation of an EMPr

Responsible Person(s)	Role and Responsibilities
Developer's Project Manager (DPM)	<p><u>Role</u></p> <p>The Project Developer is accountable for ensuring compliance with the EMPr and any conditions of approval from the competent authority (CA). Where required, an environmental control officer (ECO) must be contracted by the Project Developer to objectively monitor the implementation of the EMPr according to relevant environmental legislation, and the conditions of the environmental authorisation (EA). The Project Developer is further responsible for providing and giving mandate to enable the ECO to perform responsibilities, and he must ensure that the ECO is integrated as part of the project team while remaining independent.</p> <p><u>Responsibilities</u></p> <ul style="list-style-type: none"> - Be fully conversant with the conditions of the EA; - Ensure that all stipulations within the EMPr are communicated and adhered to by the Developer and its Contractor(s); - Issuing of site instructions to the Contractor for corrective actions required; - Monitor the implementation of the EMPr throughout the project by means of site inspections and meetings. Overall management of the project and EMPr implementation; and - Ensure that periodic environmental performance audits are undertaken on the project implementation.

Responsible Person(s)	Role and Responsibilities
Developer Site Supervisor (DSS)	<p><u>Role</u> The DSS reports directly to the DPM, oversees site works, liaises with the contractor(s) and the ECO. The DSS is responsible for the day to day implementation of the EMPr and for ensuring the compliance of all contractors with the conditions and requirements stipulated in the EMPr.</p> <p><u>Responsibilities</u></p> <ul style="list-style-type: none"> - Ensure that all contractors identify a contractor's Environmental Officer (cEO); - Must be fully conversant with the conditions of the EA. Oversees site works, liaison with Contractor, DPM and ECO; - Must ensure that all landowners have the relevant contact details of the site staff, ECO and cEO; - Issuing of site instructions to the Contractor for corrective actions required; - Will issue all non-compliances to contractors; and - Ratify the Monthly Environmental Report.
Environmental Control Officer (ECO)	<p><u>Role</u> The ECO should have appropriate training and experience in the implementation of environmental management specifications. The primary role of the ECO is to act as an independent quality controller and monitoring agent regarding all environmental concerns and associated environmental impacts. In this respect, the ECO is to conduct periodic site inspections, attend regular site meetings, pre-empt problems and suggest mitigation and be available to advise on incidental issues that arise. The ECO is also required to conduct compliance audits, verifying the monitoring reports submitted by the cEO. The ECO provides feedback to the DSS and Project Manager regarding all environmental matters. The Contractor, cEO and dEO are answerable to the Environmental Control Officer for non-compliance with the Performance Specifications as set out in the EA and EMPr.</p> <p>The ECO provides feedback to the DSS and Project Manager, who in turn reports back to the Contractor and potential and Registered Interested & Affected Parties' (RI&AP's), as required. Issues of non-compliance raised by the ECO must be taken up by the Project Manager, and resolved with the Contractor as per the conditions of his contract. Decisions regarding environmental procedures, specifications and requirements which have a cost implication (i.e. those that are deemed to be a</p>

Responsible Person(s)	Role and Responsibilities
	<p>variation, not allowed for in the Performance Specification) must be endorsed by the Project Manager. The ECO must also, as specified by the EA, report to the relevant CA as and when required.</p> <p><u>Responsibilities</u></p> <p>The responsibilities of the ECO will include the following:</p> <ul style="list-style-type: none"> - Be aware of the findings and conclusions of all EA related to the development; - Be familiar with the recommendations and mitigation measures of this EMPr; - Be conversant with relevant environmental legislation, policies and procedures, and ensure compliance with them; - Undertake regular and comprehensive site inspections / audits of the construction site according to the generic EMPr and applicable licenses in order to monitor compliance as required; - Educate the construction team about the management measures contained in the EMPr and environmental licenses; - Compilation and administration of an environmental monitoring plan to ensure that the environmental management measures are implemented and are effective; - Monitoring the performance of the Contractors and ensuring compliance with the EMPr and associated Method Statements; - In consultation with the Developer Site Supervisor order the removal of person(s) and/or equipment which are in contravention of the specifications of the EMPr and/or environmental licenses; - Liaison between the DPM, Contractors, authorities and other lead stakeholders on all environmental concerns; - Compile a regular environmental audit report highlighting any non-compliance issues as well as satisfactory or exceptional compliance with the EMPr; - Validating the regular site inspection reports, which are to be prepared by the contractor Environmental Officer (cEO); - Checking the cEO's record of environmental incidents (spills, impacts, legal transgressions etc.) as well as corrective and preventive actions taken; - Checking the cEO's public complaints register in which all complaints are recorded, as well as action taken;

Responsible Person(s)	Role and Responsibilities
	<ul style="list-style-type: none"> - Assisting in the resolution of conflicts; - Facilitate training for all personnel on the site – this may range from carrying out the training, to reviewing the training programmes of the Contractor; - In case of non-compliances, the ECO must first communicate this to the Senior Site Supervisor, who has the power to ensure this matter is addressed. Should no action or insufficient action be taken, the ECO may report this matter to the authorities as non-compliance; - Maintenance, update and review of the EMPr; - Communication of all modifications to the EMPr to the relevant stakeholders.
<p>developer Environmental Officer (dEO)</p>	<p><u>Role</u></p> <p>The dEOs will report to the Project Manager and are responsible for implementation of the EMPr, environmental monitoring and reporting, providing environmental input to the Project Manager and Contractor’s Manager, liaising with contractors and the landowners as well as a range of environmental coordination responsibilities.</p> <p><u>Responsibilities</u></p> <ul style="list-style-type: none"> - Be fully conversant with the EMPr; - Be familiar with the recommendations and mitigation measures of this EMPr, and implement these measures; - Ensure that all stipulations within the EMPr are communicated and adhered to by the Employees, Contractor(s) ; - Confine the development site to the demarcated area; - Conduct environmental internal audits with regards to EMPr and authorisation compliance (on cEO); - Assist the contractors in addressing environmental challenges on site; - Assist in incident management: - Reporting environmental incidents to developer and ensuring that corrective action is taken, and lessons learnt shared; - Assist the contractor in investigating environmental incidents and compile investigation reports; - Follow-up on pre-warnings, defects, non-conformance reports;

Responsible Person(s)	Role and Responsibilities
	<ul style="list-style-type: none"> - Measure and communicate environmental performance to the Contractor; - Conduct environmental awareness training on site together with ECO and cEO; - Ensure that the necessary legal permits and / or licenses are in place and up to date; - Acting as Developer's Environmental Representative on site and work together with the ECO and contractor;
Contractor	<p><u>Role</u></p> <p>The Contractor appoints the cEO and has overall responsibility for ensuring that all work, activities, and actions linked to the delivery of the contract are in line with the EMPr and that Method Statements are implemented as described. External contractors must ensure compliance with this EMPr while performing the onsite activities as per their contract with the Project Developer. The contractors are required, where specified, to provide Method Statements setting out in detail how the impact management actions contained in the EMPr will be implemented during the development or expansion of substation infrastructure for the transmission and distribution of electricity activities.</p> <p><u>Responsibilities</u></p> <ul style="list-style-type: none"> - project delivery and quality control for the development services as per appointment; - employ a suitably qualified person to monitor and report to the Project Developer's appointed person on the daily activities on-site during the construction period; - ensure that safe, environmentally acceptable working methods and practices are implemented and that equipment is properly operated and maintained, to facilitate proper access and enable any operation to be carried out safely; - attend on site meeting(s) prior to the commencement of activities to confirm the procedure and designated activity zones; - ensure that contractors' staff repair, at their own cost, any environmental damage as a result of a contravention of the specifications contained in EMPr, to the satisfaction of the ECO.

Responsible Person(s)	Role and Responsibilities
contractor Environmental Officer (cEO)	<p><u>Role</u></p> <p>Each Contractor affected by the EMPr should appoint a cEO, who is responsible for the on-site implementation of the EMPr (or relevant sections of the EMPr). The Contractor's representative can be the site agent; site engineer; a dedicated environmental officer; or an independent consultant. The Contractor must ensure that the Contractor's Representative is suitably qualified to perform the necessary tasks and is appointed at a level such that she/he can interact effectively with other site Contractors, labourers, the Environmental Control Officer and the public. As a minimum the cEO shall meet the following criteria:</p> <p><u>Responsibilities</u></p> <ul style="list-style-type: none"> - Be on site throughout the duration of the project and be dedicated to the project; - Ensure all their staff are aware of the environmental requirements, conditions and constraints with respect to all of their activities on site; - Implementing the environmental conditions, guidelines and requirements as stipulated within the EA, EMPr and Method Statements; - Attend the Environmental Site Meeting; - Undertaking corrective actions where non-compliances are registered within the stipulated timeframes; - Report back formally on the completion of corrective actions; - Assist the ECO in maintaining all the site documentation; - Prepare the site inspection reports and corrective action reports for submission to the ECO; - Assist the ECO with the preparing of the monthly report; and - Where more than one Contractor is undertaking work on site, each company appointed as a Contractor will appoint a cEO representing that company.

4. ENVIRONMENTAL DOCUMENTATION REPORTING AND COMPLIANCE

To ensure accountable and demonstrated implementation of the EMPr, a number of reporting systems, documentation controls and compliance mechanisms must be in place for all substation infrastructure projects as a minimum requirement.

4.1 Document control/Filing system

The holder of the EA is solely responsible for the upkeep and management of the EMPr file. As a minimum, all documentation detailed below will be stored in the EMPr file. A hard copy of all documentation shall be filed, while an electronic copy may be kept where relevant. A duplicate file will be maintained in the office of the DSS (where applicable). This duplicate file must remain current and up-to-date. The filing system must be updated and relevant documents added as required. The EMPr file must be made available at all times on request by the CA or other relevant authorities. The EMPr file will form part of any environmental audits undertaken as prescribed in the EIA Regulations.

4.2 Documentation to be available

At the outset of the project the following preliminary list of documents shall be placed in the filing system and be accessible at all times:

- Full copy of the signed EA from the CA in terms of NEMA, granting approval for the development or expansion;
- Copy of the generic and site specific EMPr as well as any amendments thereof;
- Copy of declaration of implementing generic EMPr and subsequent approval of site specific EMPr and amendments thereof;
- All method statements;
- Completed environmental checklists;
- Minutes and attendance register of environmental site meetings;
- An up-to-date environmental incident log;
- A copy of all instructions or directives issued;
- A copy of all corrective actions signed off. The corrective actions must be filed in such a way that a clear reference is made to the non-compliance record;
- Complaints register.

4.3 Weekly Environmental Checklist

The ECOs are required to complete a Weekly Environmental Checklist, the format of which is to be agreed prior to commencement of the activity. The ECOs are required to sign and date the checklist, retain a copy in the EMPr file and submit a copy of the completed checklist to the DSS on a weekly basis.

The checklists will form the basis for the Monthly Environmental Reports. Copies of all completed checklists will be attached as Annexures to the Environmental Audit Report as required in terms of the EIA Regulations.

4.4 Environmental site meetings

Minutes of the environmental site meetings shall be kept. The minutes must include an attendance register and will be attached to the Monthly Report that is distributed to attendees. Each set of minutes must clearly record "Matters for Attention" that will be reviewed at the next meeting.

4.5 Required Method Statements

The method statement will be done in such detail that the ECOs are enabled to assess whether the contractor's proposal is in accordance with the EMPr.

The method statement must cover applicable details with regard to:

- development procedures;
- materials and equipment to be used;
- getting the equipment to and from site;
- how the equipment/ material will be moved while on site;
- how and where material will be stored;
- the containment (or action to be taken if containment is not possible) of leaks or spills of any liquid or material that may occur;
- timing and location of activities;
- compliance/ non-compliance with the EMPr; and
- any other information deemed necessary by the ECOs.

Unless indicated otherwise by the Project Manager, the Contractor shall provide the following method statements to the Project Manager no less than 14 days prior to the commencement date of the activity:

- Site establishment – Camps, Lay-down or storage areas, satellite camps, infrastructure;
- Batch plants;
- Workshop or plant servicing;
- Handling, transport and storage of Hazardous Chemical Substance's;
- Vegetation management – Protected, clearing, aliens, felling;
- Access management – Roads, gates, crossings etc.;
- Fire plan;
- Waste management – transport, storage, segregation, classification, disposal (all waste streams);
- Social interaction – complaints management, compensation claims, access to properties etc.;
- Water – use (source, abstraction and disposal), access and all related information, crossings and mitigation;
- Emergency preparedness – Spills, training, other environmental emergencies;
- Dust and noise management methodologies;
- Fauna interaction and risk management – only if the risk was identified – wildlife interaction especially on game farms; and
- Heritage and palaeontology management.

The ECOs shall monitor and ensure that the contractors perform in accordance with these method statements. Completed and agreed method statements between the holder of the EA and the contractor shall be captured in Appendix 1.

4.6 Environmental Incident Log (Diary)

The ECOs are required to maintain an up-to-date and current Environmental Incident Log (environmental diary). The Environmental Incident Log is a means to record all environmental incidents and/or all non-compliance notice would not be issued. An environmental incident is defined as:

- Any deviation from the listed impact management actions (listed in this EMPr) that may be addressed immediately by the ECOs. (For example a contractor's staff member littering or a drip tray that has not been emptied);
- Any environmental impact resulting from an action or activity by a contractor in contravention of the environmental stipulations and guidelines listed in the EMPr which as a single event would have a minor impact but which if cumulative and continuous would have a significant effect (for example no toilet paper available in the ablutions for an afternoon); and
- General environmental information such as road kills or injured wildlife.

The ECOs are to record all environmental incidents in the Environmental Incident Log. All incidents regardless of severity must be reported to the Developer. The Log is to be kept in the EMPr file and at a minimum the following will be recorded for each environmental incident:

- The date and time of the incident;
- Description of the incident;
- The name of the Contractor responsible;
- The incident must be listed as significant or minor;
- If the incident is listed as significant, a non-compliance notice must be issued, and recorded in the log;
- Remedial or corrective action taken to mitigate the incident; and
- Record of repeat minor offences by the same contractor or staff member.

The Environmental Incident Log will be captured in the EAR.

4.7 Non-compliance

A non-compliance notice will be issued to the responsible contractor by the ECOs via the DSS or Project Manager. The non-compliance notice will be issued in writing; a copy filed in the EMPr file and will at a minimum include the following:

- Time and date of the non-compliance;
- Name of the contractor responsible;
- Nature and description of the non-compliance;
- Recommended / required corrective action; and
- Date by which the corrective action to be completed.
- The contractors shall act immediately when a notice of non-compliance is received and correct whatever is the cause for the issuing of the notice.

Complaints received regarding activities on the development site pertaining to the environment shall be recorded in a dedicated register and the response noted with the date and action taken. The ECO should be made aware of any complaints. Any non-compliance with the agreed procedures of the EMPr is a transgression of the various statutes and laws that define the manner by which the environment is managed. Failure to redress the cause shall be reported to the relevant CA for them to deal with the transgression, as it deems fit. The contractor is deemed not to have complied with the EMPr if, inter alia, There is a deviation from the environmental conditions, impact management outcomes and impact management actions activities, as approved in generic and site specific EMPr as relevant as set out in the EMPr, which deviation has, or may cause, an environmental impact.

4.8 Corrective action records

For each non-compliance notice issued, a documented corrective action must be recorded. On receiving a non-compliance notice from the DSS, the contractor's cEO will ensure that the corrective actions required take place within the stipulated timeframe. On completion of the corrective action the cEO is to issue a Corrective Action Report in writing to the ECOs. If satisfied that the corrective action has been completed, the ECOs are to sign-off on the Corrective Action Report, and attach the report to the non-compliance notice in the EMPr file. A corrective action is considered complete once the report has signed off by the ECOs.

4.9 Photographic record

A digital photographic record will be kept. The photographic record will be used to show before, during and post rehabilitation evidence of the project as well used in cases of damages claims if they arise. Each image must be dated and a brief description note attached.

The Contractor shall:

1. Allow the ECOs access to take photographs of all areas, activities and actions.

The ECOs shall keep an electronic database of photographic records which will include:

1. Pictures of all areas designated as work areas, camp areas, development sites and storage areas taken before these areas are set up;
2. All bunding and fencing;
3. Road conditions and road verges;
4. Condition of all farm fences;
5. Topsoil storage areas;
6. All areas to be cordoned off during construction;
7. Waste management sites;
8. Ablution facilities (inside and out);
9. Any non-conformances deemed to be "significant";
10. All completed corrective actions for non-compliances;
11. All required signage;
12. Photographic recordings of incidents;
13. All areas before, during and post rehabilitation; and

14. Include relevant photographs in the Final Environmental Audit Report.

4.10 Complaints register

The ECOs shall keep a current and up-to-date complaints register. The complaints register is to be a record of all complaints received from communities, stakeholders and individuals. The Complaints Record shall:

1. Record the name and contact details of the complainant;
2. Record the time and date of the complaint;
3. Contain a detailed description of the complaint;
4. Where relevant and appropriate, contain photographic evidence of the complaint or damage (ECOs to take relevant photographs); and
5. Contain a copy of the ECOs written response to each complaint received and keep a record of any further correspondence with the complainant. The ECO's written response will include a description of any corrective action to be taken and must be signed by the Contractor, ECO and affected party. Where a damage claim is issued by the complainant, the ECOs shall respond as described in **(section 4.11)** below.

4.11 Claims for damages

In the event that a Claim for Damages is submitted by a community, landowner or individual, the ECOs shall:

1. Record the full detail of the complaint as described in **(section 4.10)** above;
2. The DPM will evaluate the claim and associated damage and submit the evaluation to the Senior Site Representative for approval;
3. Following consideration by the DPM, the claim is to be resolved and settled immediately, or the reason for not accepting the claim communicated in writing to the claimant. Should the claimant not accept this, the ECO shall, in writing report the incident to the Developer's negotiator and legal department; and
4. A formal record of the response by the ECOs to the claimant as well as the rectification of the method of making payments not amount will be recorded in the EMPr file.

4.12 Interactions with affected parties

Open, transparent and good relations with affected landowners, communities and regional staff are an essential aspect to the successful management and mitigation of environmental impacts.

The ECOs shall:

1. Ensure that all queries, complaints and claims are dealt within an agreed timeframe;
2. Ensure that any or all agreements are documented, signed by all parties and a record of the agreement kept in the EMPr file;
3. Ensure that a complaints telephone numbers are made available to all landowners and affected parties; and

4. Ensure that contact with affected parties is courteous at all times;

4.13 Environmental audits

Internal environmental audits of the activity and implementation of the EMPr must be undertaken. The findings and outcomes included in the EMPr file and submitted to the CA at intervals as indicated in the EA.

The ECOs must prepare a monthly EAR. The report will be tabled as the key point on the agenda of the Environmental Site Meeting. The Report is submitted for acceptance at the meeting and the final report will be circulated to the Project Manager and filed in the EMPr file. At a frequency determined by the EA, the ECOs shall submit the monthly reports to the CA. At a minimum the monthly report is to cover the following:

- Weekly Environmental Checklists;
- Deviations and non-compliances with the checklists;
- Non-compliances issued;
- Completed and reported corrective actions;
- Environmental Monitoring;
- General environmental findings and actions; and
- Minutes of the Bi-monthly Environmental Site Meetings.

4.14 Final environmental audits

On final completion of the rehabilitation and/or requirements of the EA a final EAR is to be prepared and submitted to the CA. The EAR must comply with Appendix 7 of the EIA Regulations.

PART B: SECTION 1: Pre-approved generic EMPr template

5. IMPACT MANAGEMENT OUTCOMES AND IMPACT MANAGEMENT ACTIONS

This section provides a pre-approved generic EMPr template with aspects that are common to the development of substation infrastructure for the transmission and distribution of electricity. There is a list of aspects identified for the development or expansion of substation infrastructure for the transmission and distribution of electricity, and for each aspect a set of prescribed impact management outcomes and associated impact management actions have been identified. Holders of EAs are responsible to ensure the implementation of these outcomes and actions for all projects as a minimum requirement, in order to mitigate the impact of such aspects identified for the development or expansion of substation infrastructure for the transmission and distribution of electricity.

The template provided below is to be completed by providing the information under each heading for each environmental impact management action.

The completed template must be signed and dated on each page by both the contractor and the holder of the EA prior to commencement of the activity. The method statements prepared and agreed to by the holder of the EA must be appended to the template as Appendix 1. Each method statement must also be duly signed and dated on each page by the contractor and the holder of the EA. This template, once signed and dated, is legally binding. The holder of the EA will remain responsible for its implementation.

5.1 Environmental awareness training

Impact management outcome: All onsite staff are aware and understands the individual responsibilities in terms of this EMPr.						
Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> – All staff must receive environmental awareness training prior to commencement of the activities; – The Contractor must allow for sufficient sessions to train all personnel with no more than 20 personnel attending each course; – Refresher environmental awareness training is available as and when required; – All staff are aware of the conditions and controls linked to the EA and within the EMPr and made aware of their individual roles and responsibilities in achieving compliance with the EA and EMPr; – The Contractor must erect and maintain information posters at key locations on site, and the posters must include the following information as a minimum: <ul style="list-style-type: none"> a) Safety notifications; and b) No littering. – Environmental awareness training must include as a minimum the following: <ul style="list-style-type: none"> a) Description of significant environmental impacts, actual or potential, related to their work activities; 	ECO and cEO	Environmental Induction training; Toolbox talks; other pertinent training aids.	Initially prior to construction commencing ECO to induct Construction Management and cEO, and thereafter repeated for all new employees and yearly. Toolbox talks to be presented weekly.	ECO	Monthly	Signed induction and toolbox talk, or training registers.

<p>b) Mitigation measures to be implemented when carrying out specific activities;</p> <p>c) Emergency preparedness and response procedures;</p> <p>d) Emergency procedures;</p> <p>e) Procedures to be followed when working near or within sensitive areas;</p> <p>f) Wastewater management procedures;</p> <p>g) Water usage and conservation;</p> <p>h) Solid waste management procedures;</p> <p>i) Sanitation procedures;</p> <p>j) Fire prevention; and</p> <p>k) Disease prevention.</p> <p>– A record of all environmental awareness training courses undertaken as part of the EMPr must be available;</p> <p>– Educate workers on the dangers of open and/or unattended fires;</p> <p>– A staff attendance register of all staff to have received environmental awareness training must be available.</p> <p>– Course material must be available and presented in appropriate languages that all staff can understand.</p>						
---	--	--	--	--	--	--

5.2 Site Establishment development

Impact management outcome: Impacts on the environment are minimised during site establishment and the development footprint are kept to demarcated development area.						
Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - A method statement must be provided by the contractor prior to any onsite activity that includes the layout of the construction camp in the form of a plan showing the location of key infrastructure and services (where applicable), including but not limited to offices, overnight vehicle parking areas, stores, the workshop, stockpile and lay down areas, hazardous materials storage areas (including fuels), the batching plant (if one is located at the construction camp), designated access routes, equipment cleaning areas and the placement of staff accommodation, cooking and ablution facilities, waste and wastewater management; - Location of camps must be within approved area to ensure that the site does not impact on sensitive areas identified in the environmental assessment or site walk through; - Sites must be located where possible on previously disturbed areas; 	Contractor	Method Statement compilation and communication of Method Statements to employees. Use of EIA and Specialist Studies to locate site camps.	Prior to construction.	ECO	Monthly	Signed Method Statements; signed proof of communication register; Liaison with ECO regarding site camp placement.

<ul style="list-style-type: none"> - The camp must be fenced in accordance with Section 5.5: Fencing and gate installation; and - The use of existing accommodation for contractor staff, where possible, is encouraged. 						
---	--	--	--	--	--	--

5.3 Access restricted areas

Impact management outcome: Access to restricted areas prevented.						
Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - Identification of access restricted areas is to be informed by the environmental assessment, site walk through and any additional areas identified during development; - Erect, demarcate and maintain a temporary barrier with clear signage around the perimeter of any access restricted area, colour coding could be used if appropriate; and - Unauthorised access and development related activity inside access restricted areas is prohibited. 	Contractor	Use of EIA and Specialist Studies to locate sensitive areas and 'no-go' areas.	Prior to construction in new areas.	ECO	Monthly	Contractor compliance with sensitive areas and 'no-go' areas identified in EIA and Specialist Studies

5.4 Access roads

--

Impact management outcome: Minimise impact to the environment through the planned and restricted movement of vehicles on site.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - An access agreement must be formalised and signed by the DPM, Contractor and landowner before commencing with the activities; - All private roads used for access to the servitude must be maintained and upon completion of the works, be left in at least the original condition - All contractors must be made aware of all these access routes. - Any access route deviation from that in the written agreement must be closed and re-vegetated immediately, at the contractor's expense; - Maximum use of both existing servitudes and existing roads must be made to minimize further disturbance through the development of new roads; - In circumstances where private roads must be used, the condition of the said roads must be recorded in accordance with section 4.9: photographic record; prior to use and the condition thereof agreed by the landowner, the DPM, and the 	Contractor	Implementation of mitigation measures.	Ongoing.	ECO	Monthly	Signed access agreements and maintenance of access roads.

contractor; – Access roads in flattish areas must follow fence lines and tree belts to avoid fragmentation of vegetated areas or croplands – Access roads must only be developed on a pre-planned and approved roads.						
---	--	--	--	--	--	--

5.5 Fencing and Gate installation

Impact management outcome: Minimise impact to the environment and ensure safe and controlled access to the site through the erection of fencing and gates where required.						
Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> – Use existing gates provided to gain access to all parts of the area authorised for development, where possible; – Existing and new gates to be recorded and documented in accordance with section 4.9: photographic record; – All gates must be fitted with locks and be kept locked at all times during the development phase, unless otherwise agreed with the landowner; 	Contractor and Applicant	Implementation of the mitigation measures	Ongoing	ECO	Monthly	Site observation; public complaints register

<ul style="list-style-type: none"> - At points where the line crosses a fence in which there is no suitable gate within the extent of the line servitude, on the instruction of the DPM, a gate must be installed at the approval of the landowner; - Care must be taken that the gates must be so erected that there is a gap of no more than 100 mm between the bottom of the gate and the ground; - Where gates are installed in jackal proof fencing, a suitable reinforced concrete sill must be provided beneath the gate; - Original tension must be maintained in the fence wires; - All gates installed in electrified fencing must be re-electrified; - All demarcation fencing and barriers must be maintained in good working order for the duration of the development activities; - Fencing must be erected around the camp, batching plants, hazardous storage areas, and all designated access restricted areas, where applicable; - Any temporary fencing to restrict the movement of life-stock must only be erected with the permission of the land owner. - All fencing must be developed of high quality material bearing the SABS mark; - The use of razor wire as fencing must be avoided; - Fenced areas with gate access must remain 						
--	--	--	--	--	--	--

<p>locked after hours, during weekends and on holidays if staff is away from site. Site security will be required at all times;</p> <ul style="list-style-type: none"> - On completion of the development phase all temporary fences are to be removed; - The contractor must ensure that all fence uprights are appropriately removed, ensuring that no uprights are cut at ground level but rather removed completely. 						
--	--	--	--	--	--	--

5.6 Water Supply Management

Impact management outcome: Undertake responsible water usage.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - All abstraction points or bore holes must be registered with the DWS and suitable water meters installed to ensure that the abstracted volumes are measured on a daily basis; - The Contractor must ensure the following: <ul style="list-style-type: none"> a. The vehicle abstracting water from a river does not enter or cross it and does not operate from within the river; b. No damage occurs to the river bed or banks and that the abstraction of water does not entail stream diversion activities; and 	Contractor and Applicant	Application to DWS where applicable. Implementation of mitigation measures	Construction	ECO	Monthly	Proof of water source used; submission of above proof to DWS.

<ul style="list-style-type: none"> c. All reasonable measures to limit pollution or sedimentation of the downstream watercourse are implemented. - Ensure water conservation is being practiced by: <ul style="list-style-type: none"> a. Minimising water use during cleaning of equipment; b. Undertaking regular audits of water systems; and c. Including a discussion on water usage and conservation during environmental awareness training. d. The use of grey water is encouraged. 						
--	--	--	--	--	--	--

5.7 Storm and waste water management

<p>Impact management outcome: Impacts to the environment caused by storm water and wastewater discharges during construction are avoided.</p>						
Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - Runoff from the cement/ concrete batching areas must be strictly controlled, and contaminated water must be collected, stored and either treated or disposed of off-site, at a location approved by the project manager; 	<p>Contractor</p>	<p>Employ methods to prevent water pollution</p>	<p>Construction</p>	<p>ECO</p>	<p>Weekly</p>	<p>Inspection of areas where construction takes place near</p>

<ul style="list-style-type: none"> - All spillage of oil onto concrete surfaces must be controlled by the use of an approved absorbent material and the used absorbent material disposed of at an appropriate waste disposal facility; - Natural storm water runoff not contaminated during the development and clean water can be discharged directly to watercourses and water bodies, subject to the Project Manager's approval and support by the ECO; - Water that has been contaminated with suspended solids, such as soils and silt, may be released into watercourses or water bodies only once all suspended solids have been removed from the water by settling out these solids in settlement ponds. The release of settled water back into the environment must be subject to the Project Manager's approval and support by the ECO. 						watercourses.
--	--	--	--	--	--	----------------------

5.8 Solid and hazardous waste management

<p>Impact management outcome: Wastes are appropriately stored, handled and safely disposed of at a recognised waste facility.</p>							
<p>Impact Management Actions</p>	<p>Implementation</p>			<p>Monitoring</p>			
	Responsible	Method	of	Timeframe	for	Responsible	Frequency

	person	implementation	implementation	person		compliance
<ul style="list-style-type: none"> - All measures regarding waste management must be undertaken using an integrated waste management approach; - Sufficient, covered waste collection bins (scavenger and weatherproof) must be provided; - A suitably positioned and clearly demarcated waste collection site must be identified and provided; - The waste collection site must be maintained in a clean and orderly manner; - Waste must be segregated into separate bins and clearly marked for each waste type for recycling and safe disposal; - Staff must be trained in waste segregation; - Bins must be emptied regularly; - General waste produced onsite must be disposed of at registered waste disposal sites/ recycling company; - Hazardous waste must be disposed of at a registered waste disposal site; - Certificates of safe disposal for general, hazardous and recycled waste must be maintained. 	Contractor	Following good waste management practices outlined in approved method Statement	Construction	ECO	Weekly	Waste Safe disposal slips; Service Level Agreements

5.9 Protection of watercourses and estuaries

Impact management outcome: Pollution and contamination of the watercourse environment and or estuary erosion are prevented.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - All watercourses must be protected from direct or indirect spills of pollutants such as solid waste, sewage, cement, oils, fuels, chemicals, aggregate tailings, wash and contaminated water or organic material resulting from the Contractor's activities; - In the event of a spill, prompt action must be taken to clear the polluted or affected areas; - Where possible, no development equipment must traverse any seasonal or permanent wetland - No return flow into the estuaries must be allowed and no disturbance of the Estuarine functional Zone should occur; - Development of permanent watercourse or estuary crossing must only be undertaken where no alternative access to tower position is available; - There must not be any impact on the long term morphological dynamics of watercourses or estuaries; - Existing crossing points must be favored over the creation of new crossings (including temporary access) - When working in or near any watercourse or estuary, the following environmental controls 	Contractor	Method statements; Stormwater Management Plan;	Construction	ECO	Weekly	Method Statement compliance

<p>and consideration must be taken:</p> <p>a) Water levels during the period of construction; No altering of the bed, banks, course or characteristics of a watercourse</p> <p>b) During the execution of the works, appropriate measures to prevent pollution and contamination of the riparian environment must be implemented e.g. including ensuring that construction equipment is well maintained;</p> <p>c) Where earthwork is being undertaken in close proximity to any watercourse, slopes must be stabilised using suitable materials, i.e. sandbags or geotextile fabric, to prevent sand and rock from entering the channel; and</p> <p>d) Appropriate rehabilitation and re-vegetation measures for the watercourse banks must be implemented timeously. In this regard, the banks should be appropriately and incrementally stabilised as soon as development allows.</p>						
--	--	--	--	--	--	--

5.10 Vegetation clearing

<p>Impact management outcome: Vegetation clearing is restricted to the authorised development footprint of the proposed infrastructure.</p>		
<p>Impact Management Actions</p>	<p>Implementation</p>	<p>Monitoring</p>

	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<p>General:</p> <ul style="list-style-type: none"> - Indigenous vegetation which does not interfere with the development must be left undisturbed; - Protected or endangered species may occur on or near the development site. Special care should be taken not to damage such species; - Search, rescue and replanting of all protected and endangered species likely to be damaged during project development must be identified by the relevant specialist and completed prior to any development or clearing; - Permits for removal must be obtained from the relevant CA prior to the cutting or clearing of the affected species, and they must be filed; - The Environmental Audit Report must confirm that all identified species have been rescued and replanted and that the location of replanting is compliant with conditions of approvals; - Trees felled due to construction must be documented and form part of the Environmental Audit Report; - Rivers and watercourses must be kept 	<p>Contractor And Applicant</p>	<p>Specialist recommendations; Method statement; Search and Rescue Plan; Alien vegetation removal Plan (approved plans and strategies used by Eskom), site awareness</p>	<p>Pre-Construction and Construction and Operation</p>	<p>ECO</p>	<p>Pre-Construction and weekly during construction</p>	<p>Compliance to method statements and Search and Rescue Plan; Alien vegetation removal Plan. approved plans and strategies used by Eskom)</p>

<p>clear of felled trees, vegetation cuttings and debris;</p> <ul style="list-style-type: none"> - Only a registered pest control operator may apply herbicides on a commercial basis and commercial application must be carried out under the supervision of a registered pest control operator, supervision of a registered pest control operator or is appropriately trained; - A daily register must be kept of all relevant details of herbicide usage; - No herbicides must be used in estuaries; - All protected species and sensitive vegetation not removed must be clearly marked and such areas fenced off in accordance to Section 5.3: Access restricted areas. <p>Alien invasive vegetation must be removed and disposed of at a licensed waste management facility.</p>						
---	--	--	--	--	--	--

5.11 Protection of fauna

<p>Impact management outcome: Disturbance to fauna is minimised.</p>						
<p>Impact Management Actions</p>	<p>Implementation</p>			<p>Monitoring</p>		
	<p>Responsible person</p>	<p>Method of implementation</p>	<p>Timeframe for implementation</p>	<p>Responsible person</p>	<p>Frequency</p>	<p>Evidence of compliance</p>

<ul style="list-style-type: none"> - No interference with livestock must occur without the landowner's written consent and with the landowner or a person representing the landowner being present; - The breeding sites of raptors and other wild birds species must be taken into consideration during the planning of the development programme; - Breeding sites must be kept intact and disturbance to breeding birds must be avoided. Special care must be taken where nestlings or fledglings are present; - Special recommendations of the avian specialist must be adhered to at all times to prevent unnecessary disturbance of birds; - No poaching must be tolerated under any circumstances. All animal dens in close proximity to the works areas must be marked as Access restricted areas; - No deliberate or intentional killing of fauna is allowed; - In areas where snakes are abundant, snake deterrents to be deployed on the pylons to prevent snakes climbing up, being electrocuted and causing power outages; and - No Threatened or Protected species (ToPs) and/or protected fauna as listed according NEMBA (Act No. 10 of 2004) and relevant provincial ordinances may be removed and/or relocated without appropriate 	Contractor	Method statement and adherence to exclusion/ no-go zones. Site awareness	Construction	ECO	Weekly	Public complaints register; adherence to exclusion/ no-go zones and method statements
--	-------------------	---	---------------------	------------	---------------	--

authorisations/permits.

5.12 Protection of heritage resources

Impact management outcome: Impact to heritage resources is minimised.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - Identify, demarcate and prevent impact to all known sensitive heritage features on site in accordance with the No-Go procedure in Section 5.3: Access restricted areas; - Carry out general monitoring of excavations for potential fossils, artefacts and material of heritage importance; - All work must cease immediately, if any human remains and/or other archaeological, palaeontological and historical material are uncovered. Such material, if exposed, must be reported to the nearest museum, archaeologist/palaeontologist (or the South African Police Services), so that a systematic and professional investigation can be undertaken. Sufficient time must be allowed to remove/collect such material before development recommences. 	Contractor	Method Statement; Heritage management plan	Pre-construction and construction	ECO	Weekly and daily for zones highlighted by Heritage Specialist where potsherds were found.	Monitoring of construction areas, adherence to management plan if chance finds found.

5.13 Safety of the public

Impact management outcome: All precautions are taken to minimise the risk of injury, harm or complaints.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - Identify fire hazards, demarcate and restrict public access to these areas as well as notify the local authority of any potential threats e.g. large brush stockpiles, fuels etc.; - All unattended open excavations must be adequately fenced or demarcated; - Adequate protective measures must be implemented to prevent unauthorised access to and climbing of partly constructed towers and protective scaffolding; - Ensure structures vulnerable to high winds are secured; - Maintain an incidents and complaints register in which all incidents or complaints involving the public are logged. 	Contractor	Landowner agreements; Method Statement	Construction	ECO	Weekly	Site works barricaded, safe working site maintained, public complaints register.

5.14 Sanitation

Impact management outcome: Clean and well maintained toilet facilities are available to all staff in an effort to minimise the risk of disease and impact to the environment.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - Mobile chemical toilets are installed onsite if no other ablution facilities are available; - The use of ablution facilities and or mobile toilets must be used at all times and no indiscriminate use of the veld for the purposes of ablutions must be permitted under any circumstances; - Where mobile chemical toilets are required, the following must be ensured: <ul style="list-style-type: none"> a) Toilets are located no closer than 100 m to any watercourse or water body; b) Toilets are secured to the ground to prevent them from toppling due to wind or any other cause; c) No spillage occurs when the toilets are cleaned or emptied and the contents are managed in accordance with the EMPr; d) Toilets have an external closing mechanism and are closed and secured from the outside when not in use to prevent toilet paper from being blown out; e) Toilets are emptied before long weekends and workers holidays, and must be locked after working hours; 	Contractor	Service level agreement with Service provider; Method statement; site awareness	Construction	ECO	Weekly	Service level agreement with Service provider, proof of safe disposal of waste.

f) Toilets are serviced regularly and the ECO must inspect toilets to ensure compliance to health standards; <ul style="list-style-type: none"> - A copy of the waste disposal certificates must be maintained. 						
--	--	--	--	--	--	--

5.15 Prevention of disease

Impact Management outcome: All necessary precautions linked to the spread of disease are taken.						
Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - Undertake environmentally-friendly pest control in the camp area; - Ensure that the workforce is sensitised to the effects of sexually transmitted diseases, especially HIV AIDS; - The Contractor must ensure that information posters on AIDS are displayed in the Contractor Camp area; - Information and education relating to sexually transmitted diseases to be made available to both construction workers and local community, where applicable; - Free condoms must be made available to all staff on site at central points; - Medical support must be made available; 	Contractor	Method statement, awareness training.	Construction	ECO	Monthly	Method statement, proof of awareness training.

- Provide access to Voluntary HIV Testing and Counselling Services.						
---	--	--	--	--	--	--

5.16 Emergency procedures

Impact management outcome: Emergency procedures are in place to enable a rapid and effective response to all types of environmental emergencies.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - Compile an Emergency Response Action Plan (ERAP) prior to the commencement of the proposed project; - The Emergency Plan must deal with accidents, potential spillages and fires in line with relevant legislation; - All staff must be made aware of emergency procedures as part of environmental awareness training; - The relevant local authority must be made aware of a fire as soon as it starts; - In the event of emergency necessary mitigation measures to contain the spill or leak must be implemented (see Hazardous Substances section 5.17). 	Contractor	Environmental Emergency Response Action Plan	Construction	ECO	Monthly	Adherence/compliance to ERAP

5.17 Hazardous substances

Impact management outcome: Safe storage, handling, use and disposal of hazardous substances.						
Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - The use and storage of hazardous substances to be minimised and non-hazardous and non-toxic alternatives substituted where possible; - All hazardous substances must be stored in suitable containers as defined in the Method Statement; - Containers must be clearly marked to indicate contents, quantities and safety requirements; - All storage areas must be bunded. The bunded area must be of sufficient capacity to contain a spill / leak from the stored containers; - Bunded areas to be suitably lined with a SABS approved liner; - An Alphabetical Hazardous Chemical Substance (HCS) control sheet must be drawn up and kept up to date on a continuous basis; - All hazardous chemicals that will be used on site must have Material Safety Data Sheets (MSDS); 	Contractor	Method Statement, OHS requirements; adequate and responsible use and storage of Hazardous Substances, Hazardous Substances storage register.	Construction	ECO	Weekly	Hazardous Substance Storage Register, MSDS, Method Statement.

<ul style="list-style-type: none"> - All employees working with HCS must be trained in the safe use of the substance and according to the safety data sheet; - Employees handling hazardous substances / materials must be aware of the potential impacts and follow appropriate safety measures. Appropriate personal protective equipment must be made available; - The Contractor must ensure that diesel and other liquid fuel, oil and hydraulic fluid is stored in appropriate storage tanks or in bowsers; - The tanks/ bowsers must be situated on a smooth impermeable surface (concrete) with a permanent bund. The impermeable lining must extend to the crest of the bund and the volume inside the bund must be 130% of the total capacity of all the storage tanks/ bowsers (110% statutory requirement plus an allowance for rainfall); - The floor of the bund must be sloped, draining to an oil separator; - Provision must be made for refueling at the storage area by protecting the soil with an impermeable groundcover. Where dispensing equipment is used, a drip tray must be used to ensure small spills are contained; - All empty externally dirty drums must be stored on a drip tray or within a bunded area; - No unauthorised access into the hazardous substances storage areas must be permitted; - No smoking must be allowed within the vicinity 						
--	--	--	--	--	--	--

<p>of the hazardous storage areas;</p> <ul style="list-style-type: none"> - Adequate fire-fighting equipment must be made available at all hazardous storage areas; - Where refueling away from the dedicated refueling station is required, a mobile refueling unit must be used. Appropriate ground protection such as drip trays must be used; - An appropriately sized spill kit kept onsite relevant to the scale of the activity/s involving the use of hazardous substance must be available at all times; - The responsible operator must have the required training to make use of the spill kit in emergency situations; - An appropriate number of spill kits must be available and must be located in all areas where activities are being undertaken; - In the event of a spill, contaminated soil must be collected in containers and stored in a central location and disposed of according to the National Environmental Management: Waste Act 59 of 2008. Refer to Section 5.7 for procedures concerning storm and waste water management and 5.8 for solid and hazardous waste management. 						
--	--	--	--	--	--	--

5.18 Workshop, equipment maintenance and storage

Impact management outcome: Soil, surface water and groundwater contamination is minimised.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - Where possible and practical all maintenance of vehicles and equipment must take place in the workshop area; - During servicing of vehicles or equipment, especially where emergency repairs are effected outside the workshop area, a suitable drip tray must be used to prevent spills onto the soil. The relevant local authority must be made aware of a fire as soon as it starts; - Leaking equipment must be repaired immediately or be removed from site to facilitate repair; - Workshop areas must be monitored for oil and fuel spills; - Appropriately sized spill kit kept onsite relevant to the scale of the activity taking place must be available; - The workshop area must have a bunded concrete slab that is sloped to facilitate runoff into a collection sump or suitable oil / water separator where maintenance work on vehicles and equipment can be performed; - Water drainage from the workshop must be contained and managed in accordance 	Contractor	Method Statement, OHS requirements; Hazardous Substances storage register, vehicle daily checklist, vehicle service register.	Construction	ECO	Weekly	Method Statement, Hazardous Substances storage register, vehicle daily checklist, vehicle service register.

Section 5.7: Storm and waste water management.						
---	--	--	--	--	--	--

5.19 Batching plants

Impact management outcome: Minimise spillages and contamination of soil, surface water and groundwater.						
Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - Concrete mixing must be carried out on an impermeable surface; - Batching plants areas must be fitted with a containment facility for the collection of cement laden water. - Dirty water from the batching plant must be contained to prevent soil and groundwater contamination - Bagged cement must be stored in an appropriate facility and at least 10 m away from any water courses, gullies and drains; - A washout facility must be provided for washing of concrete associated equipment. Water used for washing must be restricted; - Hardened concrete from the washout facility or concrete mixer can either be reused or disposed of at an appropriate licenced disposal facility; - Empty cement bags must be secured with 	Contractor	Method statement	Construction	ECO	Weekly	Compliance to mitigation and method statement

<p>adequate binding material if these will be temporarily stored on site;</p> <ul style="list-style-type: none"> - Sand and aggregates containing cement must be kept damp to prevent the generation of dust (Refer to Section 5.20: Dust emissions) - Any excess sand, stone and cement must be removed or reused from site on completion of construction period and disposed at a registered disposal facility; - Temporary fencing must be erected around batching plants in accordance with Section 5.5: Fencing and gate installation. 						
--	--	--	--	--	--	--

5.20 Dust emissions

<p>Impact management outcome: Dust prevention measures are applied to minimise the generation of dust.</p>						
Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - Take all reasonable measures to minimise the generation of dust as a result of project development activities to the satisfaction of the ECO; - Removal of vegetation must be avoided until such time as soil stripping is required and similarly exposed surfaces must be re-vegetated or stabilised as soon as is practically possible; 	<p>Contractor</p>	<p>Method Statement, Vehicle Speed limit, dust suppression.</p>	<p>Construction</p>	<p>ECO</p>	<p>Monthly</p>	<p>Site observations, dust suppression register.</p>

<ul style="list-style-type: none"> - Excavation, handling and transport of erodible materials must be avoided under high wind conditions or when a visible dust plume is present; - During high wind conditions, the ECO must evaluate the situation and make recommendations as to whether dust-damping measures are adequate, or whether working will cease altogether until the wind speed drops to an acceptable level; - Where possible, soil stockpiles must be located in sheltered areas where they are not exposed to the erosive effects of the wind; - Where erosion of stockpiles becomes a problem, erosion control measures must be implemented at the discretion of the ECO; - Vehicle speeds must not exceed 40 km/h along dust roads or 20 km/h when traversing unconsolidated and non-vegetated areas; - Straw stabilisation must be applied at a rate of one bale/10 m² and harrowed into the top 100 mm of top material, for all completed earthworks; - For significant areas of excavation or exposed ground, dust suppression measures must be used to minimise the spread of dust. 						
--	--	--	--	--	--	--

5.21 Blasting

<p>Impact management outcome: Impact to the environment is minimised through a safe blasting practice.</p>		
<p>Impact Management Actions</p>	<p>Implementation</p>	<p>Monitoring</p>

	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - Any blasting activity must be conducted by a suitably licensed blasting contractor; and - Notification of surrounding landowners, emergency services site personnel of blasting activity 24 hours prior to such activity taking place on Site. 	Contractor	Relevant legislation and regulation.	Construction	ECO	Monthly	Public complaints register; proof of registration of blasting contractor.

5.22 Noise

Impact Management outcome: Prevent unnecessary noise to the environment by ensuring that noise from development activity is mitigated.						
Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - The Contractor must keep noise level within acceptable limits, Restrict the use of sound amplification equipment for communication and emergency only; - All vehicles and machinery must be fitted with 	Contractor	Restriction of site hours to working hours Monday to	Construction	ECO	Monthly	Public Complaints Register.

<p>appropriate silencing technology and must be properly maintained;</p> <ul style="list-style-type: none"> - Any complaints received by the Contractor regarding noise must be recorded and communicated. Where possible or applicable, provide transport to and from the site on a daily basis for construction workers; - Develop a Code of Conduct for the construction phase in terms of behaviour of construction staff. Operating hours as determined by the environmental authorisation are adhered to during the development phase. Where not defined, it must be ensured that development activities must still meet the impact management outcome related to noise management. 		<p>Friday</p>				
---	--	----------------------	--	--	--	--

5.23 Fire prevention

<p>Impact management outcome: Prevention of uncontrollable fires.</p>						
<p>Impact Management Actions</p>	<p>Implementation</p>			<p>Monitoring</p>		
	<p>Responsible</p>	<p>Method of</p>	<p>Timeframe for</p>	<p>Responsible</p>	<p>Frequency</p>	<p>Evidence of</p>

	person	implementation	implementation	person		compliance
<ul style="list-style-type: none"> – Designate smoking areas where the fire hazard could be regarded as insignificant; – Firefighting equipment must be available on all vehicles located on site; – The local Fire Protection Agency (FPA) must be informed of construction activities; – Contact numbers for the FPA and emergency services must be communicated in environmental awareness training and displayed at a central location on site; – Two way swop of contact details between ECO and FPA. 	Contractor	Emergency Response Action Plan; Method Statement	Construction	ECO	Monthly	Public complaints register; compliance to ERAP

5.24 Stockpiling and stockpile areas

Impact management outcome: Reduce erosion and sedimentation as a result of stockpiling.						
Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> – All material that is excavated during the project development phase (either during piling (if required) or earthworks) must be stored appropriately on site in order to minimise impacts to watercourses, 	Contractor	Method Statement	Construction	ECO	Monthly	Method Statement and site observations

<p>watercourses and water bodies;</p> <ul style="list-style-type: none"> - All stockpiled material must be maintained and kept clear of weeds and alien vegetation growth by undertaking regular weeding and control methods; - Topsoil stockpiles must not exceed 2 m in height; - During periods of strong winds and heavy rain, the stockpiles must be covered with appropriate material (e.g. cloth, tarpaulin etc.); - Where possible, sandbags (or similar) must be placed at the bases of the stockpiled material in order to prevent erosion of the material. 						
---	--	--	--	--	--	--

5.25 Civil works

<p>Impact management outcome: Impact to the environment minimised during civil works to create the substation terrace.</p>						
Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - Where terracing is required, topsoil must be collected and retained for the purpose of re-use later to rehabilitate disturbed areas not covered by yard stone; - Areas to be rehabilitated include terrace 	Contractor	Method Statement, Engineering Drawings, stormwater management	Construction	ECO	Weekly	Method statement compliance; site observations

<p>embankments and areas outside the high voltage yards;</p> <ul style="list-style-type: none"> - Where required, all sloped areas must be stabilised to ensure proper rehabilitation is effected and erosion is controlled; - These areas can be stabilised using design structures or vegetation as specified in the design to prevent erosion of embankments. The contract design specifications must be adhered to and implemented strictly; - Rehabilitation of the disturbed areas must be managed in accordance with Section 5.35: Landscaping and rehabilitation; - All excess spoil generated during terracing activities must be disposed of in an appropriate manner and at a recognised landfill site; and - Spoil can however be used for landscaping purposes and must be covered with a layer of 150 mm topsoil for rehabilitation purposes. 		<p>plan</p>				
---	--	--------------------	--	--	--	--

5.26 Excavation of foundation, cable trenching and drainage systems

Impact management outcome: No environmental degradation occurs as a result of excavation of foundation, cable trenching and drainage systems.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> – All excess spoil generated during foundation excavation must be disposed of in an appropriate manner and at a licensed landfill site, if not used for backfilling purposes; – Spoil can however be used for landscaping purposes and must be covered with a layer of 150 mm topsoil for rehabilitation purposes; – Management of equipment for excavation purposes must be undertaken in accordance with Section 5.18: Workshop, equipment maintenance and storage; and – Hazardous substances spills from equipment must be managed in accordance with Section 5.17: Hazardous substances. 	Contractor	Method Statement, Engineering Drawings, stormwater management plan	Construction	ECO	Weekly	Method statement compliance; site observations

5.27 Installation of foundations, cable trenching and drainage systems

Impact management outcome: No environmental degradation occurs during the installation of foundation, cable trenching and drainage system.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> – Batching of cement to be undertaken in accordance with Section 5.19: Batching plants; and – Residual solid waste must be disposed of in accordance with Section 5.8: Solid waste and hazardous management. 	Contractor	Method Statement	Construction	ECO	Weekly	Method statement compliance; site observation; proof of waste disposal slips

5.28 Installation of equipment (circuit breakers, current Transformers, Isolators, Insulators, surge arresters, voltage transformers, earth switches)

Impact management outcome: No environmental degradation occurs as a result of installation of equipment.						
Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> – Management of dust must be conducted in accordance with Section 5. 20: Dust emissions; – Management of equipment used for installation must be conducted in accordance with Section 5.18: Workshop, 	Contractor	Method Statement	Construction	ECO	Monthly	Method statement compliance; site observation; proof of

<p>equipment maintenance and storage;</p> <ul style="list-style-type: none"> – Management hazardous substances and any associated spills must be conducted in accordance with Section 5.17: Hazardous substances; and – Residual solid waste must be recycled or disposed of in accordance with Section 5.8: Solid waste and hazardous management. 						<p>waste disposal slips</p>
---	--	--	--	--	--	------------------------------------

5.29 Steelwork Assembly and Erection

Impact management outcome: No environmental degradation occurs as a result of steelwork assembly and erection.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> – During assembly, care must be taken to ensure that no wasted/unused materials are left on site e.g. bolts and nuts – Emergency repairs due to breakages of equipment must be managed in accordance with Section 5. 18: Workshop, equipment maintenance and storage and Section 5.16: Emergency procedures. 	Contractor	Method Statement	Construction	ECO	Monthly	<p>Method statement compliance; site observation; proof of waste disposal slips</p>

5.30 Cabling and Stringing

<p>Impact management outcome: No environmental degradation occurs as a result of stringing.</p>						
<p>Impact Management Actions</p>	<p>Implementation</p>			<p>Monitoring</p>		
	<p>Responsible person</p>	<p>Method of implementation</p>	<p>Timeframe for implementation</p>	<p>Responsible person</p>	<p>Frequency</p>	<p>Evidence of compliance</p>
<ul style="list-style-type: none"> - Residual solid waste (off cuts etc.) shall be recycled or disposed of in accordance with Section 6.8: Solid waste and hazardous Management; - Management of equipment used for installation shall be conducted in accordance with Section 5.18: Workshop, equipment maintenance and storage; - Management hazardous substances and any associated spills shall be conducted in accordance with Section 5.17: Hazardous substances. 	<p>Contractor</p>	<p>Method Statement, adherence to exclusion zones</p>	<p>Construction</p>	<p>ECO</p>	<p>Weekly</p>	<p>Site observations</p>

5.31 Testing and Commissioning (all equipment testing, earthing system, system integration)

<p>Impact management outcome: No environmental degradation occurs as a result of Testing and Commissioning.</p>						
<p>Impact Management Actions</p>	<p>Implementation</p>			<p>Monitoring</p>		

	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> Residual solid waste must be recycled or disposed of in accordance with Section 5.8: Solid waste and hazardous management. 	Contractor	Method Statement, adherence to exclusion zones	Construction	ECO	Weekly	Site observations

5.32 Socio-economic

Impact management outcome: enhanced socio-economic development.						
Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> Develop and implement communication strategies to facilitate public participation; Develop and implement a collaborative and constructive approach to conflict resolution as part of the external stakeholder engagement process; Sustain continuous communication and liaison with neighboring owners and residents Create work and training opportunities for local stakeholders; and Where feasible, no workers, with the exception 	Contractor	Landowner Agreements; Issues and Complaints Register.	Construction	ECO	Monthly	Landowner Agreement; Issues and Complaints Register.

of security personnel, must be permitted to stay over-night on the site. This would reduce the risk to local farmers.						
---	--	--	--	--	--	--

5.33 Temporary closure of site

Impact management outcome: Minimise the risk of environmental impact during periods of site closure greater than five days.						
Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - Bunds must be emptied (where applicable) and need to be undertaken in accordance with the impact management actions included in sections 5.17: Hazardous substances and 5.18: Workshop, equipment maintenance and storage; - Hazardous storage areas must be well ventilated; - Fire extinguishers must be serviced and accessible. Service records to be filed and audited at last service; - Emergency and contact details displayed must be displayed; - Security personnel must be briefed and have 	Contractor	Method statement	Construction - When applicable	ECO	Monthly - when applicable	Method Statement

<p>the facilities to contact or be contacted by relevant management and emergency personnel;</p> <ul style="list-style-type: none"> - Night hazards such as reflectors, lighting, traffic signage etc. must have been checked; - Fire hazards identified and the local authority must have been notified of any potential threats e.g. large brush stockpiles, fuels etc.; - Structures vulnerable to high winds must be secured; - Wind and dust mitigation must be implemented; - Cement and materials stores must have been secured; - Toilets must have been emptied and secured; - Refuse bins must have been emptied and secured; - Drip trays must have been emptied and secured. 						
--	--	--	--	--	--	--

5.34 Dismantling of old equipment

<p>Impact management outcome: Impact to the environment to be minimised during the dismantling, storage and disposal of old equipment commissioning.</p>						
<p>Impact Management Actions</p>	<p>Implementation</p>			<p>Monitoring</p>		
	<p>Responsible person</p>	<p>Method of implementation</p>	<p>Timeframe for implementation</p>	<p>Responsible person</p>	<p>Frequency</p>	<p>Evidence of compliance</p>

<ul style="list-style-type: none"> - All old equipment removed during the project must be stored in such a way as to prevent pollution of the environment; - Oil containing equipment must be stored to prevent leaking or be stored on drip trays; - All scrap steel must be stacked neatly and any disused and broken insulators must be stored in containers; - Once material has been scrapped and the contract has been placed for removal, the disposal Contractor must ensure that any equipment containing pollution causing substances is dismantled and transported in such a way as to prevent spillage and pollution of the environment; - The Contractor must also be equipped to contain and clean up any pollution causing spills; and - Disposal of unusable material must be at a licensed waste disposal site. 	Contractor	Method statement; adherence to exclusion zones.	Construction – When applicable	ECO	Monthly – when applicable	Method Statement
--	-------------------	--	---------------------------------------	------------	----------------------------------	-------------------------

5.35 Landscaping and rehabilitation

<p>Impact management outcome: Areas disturbed during the development phase are returned to a state that approximates the original condition.</p>		
Impact Management Actions	Implementation	Monitoring

	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul style="list-style-type: none"> - All areas disturbed by construction activities must be subject to landscaping and rehabilitation; All spoil and waste must be disposed of to a registered waste site; - All slopes must be assessed for contouring, and to contour only when the need is identified in accordance with the Conservation of Agricultural Resources Act, No 43 of 1983 - All slopes must be assessed for terracing, and to terrace only when the need is identified in accordance with the Conservation of Agricultural Resources Act, No 43 of 1983; - Berms that have been created must have a slope of 1:4 and be replanted with indigenous species and grasses that approximates the original condition; - Where new access roads have crossed cultivated farmlands, that lands must be rehabilitated by ripping which must be agreed to by the holder of the EA and the landowners; - Rehabilitation of access roads outside of farmland; - Indigenous species must be used for with species and/grasses to where it compliments or approximates the original condition; - Stockpiled topsoil must be used for rehabilitation (refer to Section 5.24: Stockpiling) 	Contractor	Method Statements; erosion protection, alien eradication plan.	Concurrent with Construction	ECO	Monthly	Adequately revegetated work areas; no erosion or invasive plant species.

<p>and stockpiled areas);</p> <ul style="list-style-type: none"> - Stockpiled topsoil must be evenly spread so as to facilitate seeding and minimise loss of soil due to erosion; - Before placing topsoil, all visible weeds from the placement area and from the topsoil must be removed; - Subsoil must be ripped before topsoil is placed; - The rehabilitation must be timed so that rehabilitation can take place at the optimal time for vegetation establishment; - Where impacted through construction related activity, all sloped areas must be stabilised to ensure proper rehabilitation is effected and erosion is controlled; - Sloped areas stabilised using design structures or vegetation as specified in the design to prevent erosion of embankments. The contract design specifications must be adhered to and implemented strictly; - Spoil can be used for backfilling or landscaping as long as it is covered by a minimum of 150 mm of topsoil. - Where required, re-vegetation including hydro-seeding can be enhanced using a vegetation seed mixture as described below. A mixture of seed can be used provided the mixture is carefully selected to ensure the following: <ul style="list-style-type: none"> a) Annual and perennial plants are chosen; b) Pioneer species are included; 						
--	--	--	--	--	--	--

c) Species chosen must be indigenous to the area with the seeds used coming from the area; d) Root systems must have a binding effect on the soil; e) The final product must not cause an ecological imbalance in the area						
--	--	--	--	--	--	--

6 ACCESS TO THE GENERIC EMPr

Once completed and signed, to allow the public access to the generic EMPr, the holder of the EA must make the EMPr available to the public in accordance with the requirements of Regulation 26(h) of the EIA Regulations.

PART B: SECTION 2

7 SITE SPECIFIC INFORMATION AND DECLARATION

7.1 Sub-section 1: contact details and description of the project

7.1.1 Details of the applicant:

Name of applicant: **Eskom Holdings SOC Ltd.**

Tel No: **011 800 4057**

Fax No: **011 800 3917**

Postal Address: **P O Box 1091, Johannesburg**

Physical Address: **Megawatt Park, Maxwell Drive, Sunninghill, Johannesburg**

7.1.2 Details and expertise of the EAP:

Name of EAP: **Jacqui Davis**

Tel No: **011 781 1730**

Fax No: **011 781 1731**

E-mail address: **jacquid@nema.co.za**

Expertise of the EAP (Curriculum Vitae included): **Yes, included in EIA Application and EIA Report.**

7.1.3 Project name:

EMKHIWENI SUBSTATION AND 400KV LINE FROM EMKHIWENI SUBSTATION TO SILIMELA

7.1.4 Description of the project:

The scope of the project includes:

- **Construction of the Emkhiweni Substation, with 2x500MVA 400/132kV transformers and loop-in lines; and**
- **Construction of the Emkhiweni-Silimela 400kV line.**

A power line typically consists of pylons, which are tower-like structures that support electrical cables above the ground. The distance between each pylon is dependent on the type of terrain the lines cross. The standard width of a servitude for a 400kV Transmission line is 55m (27.5m on either side of the power line).

In order for maintenance staff to access the lines and undertake routine maintenance or repair faults, it may be necessary to construct access roads. Eskom have advised that these access roads do not exceed any thresholds in terms of the EIA Regulations of 2014, as amended (07 April 2017).

There are several types of towers/pylons. The types of pylons chosen for the project depend on several factors, these include terrain; expense; and recommendations from the visual specialist. Eskom tries not to bind themselves to one tower/pylon type during the environmental assessment in case another type, based on the factors mentioned above, would be more suitable.

The Emkhiweni-Silimela 400kV powerline would link into the proposed Silimela substation in the north and the proposed Emkhiweni substation in the south.

The proposed Emkhiweni Substation would support the existing Rockdale substation. The proposed Emkhiweni Substation would have a 600m x 600m footprint which would include the following:

- Two 400kV loop-in lines;
- Loop-in lines to the Arnot Kendal power line;
- Offices and control rooms;
- Transformers;
- Communications mast tower;
- Breakers; and
- Other equipment necessary for connecting the 400kV lines to the substation and the 132kV lines out of the substation.

The loop-in lines would traverse approximately 3km to loop into the existing Arnot - Kendal 400kV line.

7.1.5 Project location:

NO	FARM NAME(if applicable)	FARM NUMBER(if applicable)	PORTION NAME	PORTION NUMBER	LATITUDE	LONGITUDE
1	Farm Rietfontein 314 JS	TOJS00000000031400014	Portion 14	Portion 14	25°52'22.73"S	29°24'2.89"E
2	Farm Rietfontein 314 JS	TOJS00000000031400014	Portion 14	Portion 14	25°52'25.10"S	29°24'5.55"E
3	Farm Goedehoop 315 JS	TOJS00000000031500034	Portion 34	Portion 34	25°50'58.51"S	29°25'9.49"E
4	Farm Rietfontein 314 JS	TOJS00000000031400002	Portion 2	Portion 2	25°51'20.05"S	29°25'36.43"E

The location of the Emkhiweni Substation is provided, as well as the start and end points of the Loop-in-lines. Refer to EIA for a list of all Landowners and farms.

7.2 Sub-section 2: Development footprint site map

This sub-section must include a map of the site sensitivity overlaid with the preliminary infrastructure layout. The sensitivity map must be prepared from the national web based environmental screening tool, when available for compulsory use at: <https://screening.environment.gov.zg/screeningtool>. The sensitivity map shall identify the nature of each sensitive feature e.g. threatened plant species, archaeological site, etc. Sensitivity maps shall identify features both within the planned working area and any known sensitive features within 50 m from the development footprint.

The Environmental Screening Tool was not used since the project commenced prior to the promulgation of the Government Notice. Sensitivity maps were generated using the GIS data available and the input from the various Specialist Studies, and are included below. Note that the Application for Environmental Authorisation included both the Emkhiweni Substation and the 400kV Line from Emkhiweni Substation to Silimela, therefore the Sensitivity Maps show the entire development. The Substation is located within agricultural fields, and was therefore not located within any CBAs or ESAs.

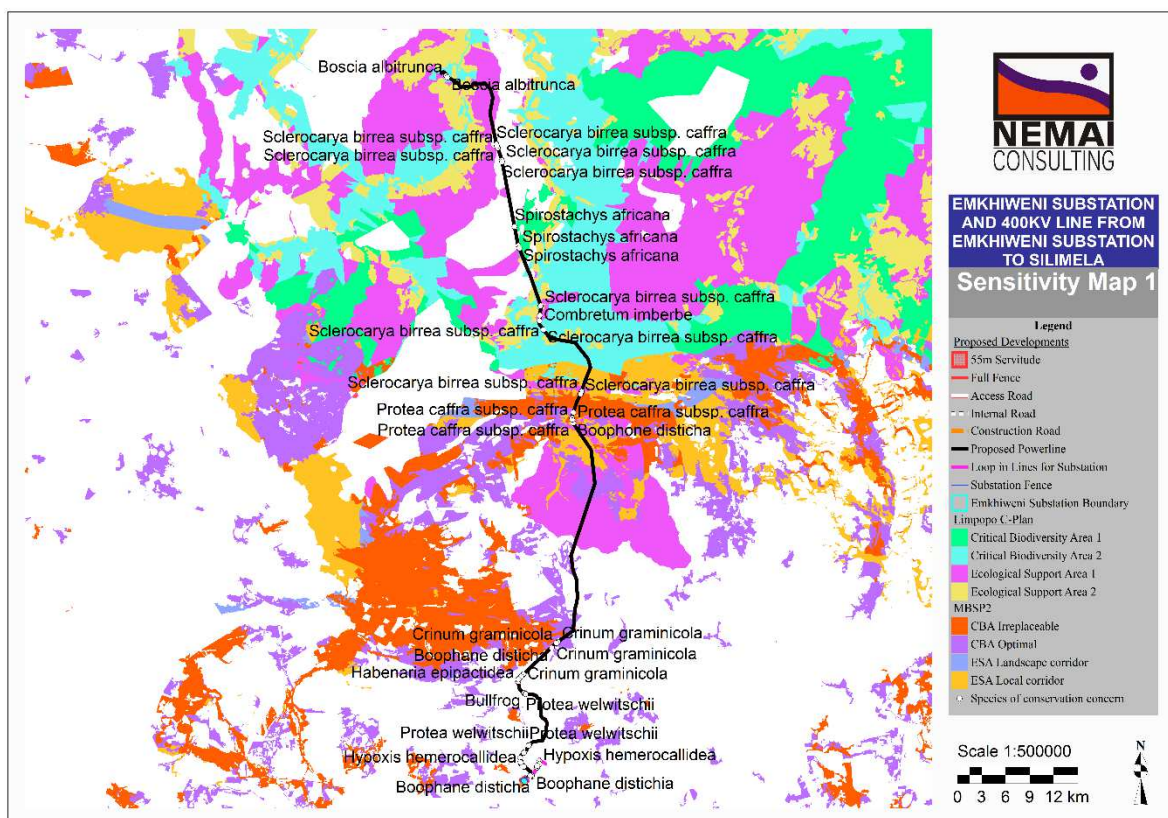


Figure 1: Terrestrial ecological sensitivity map

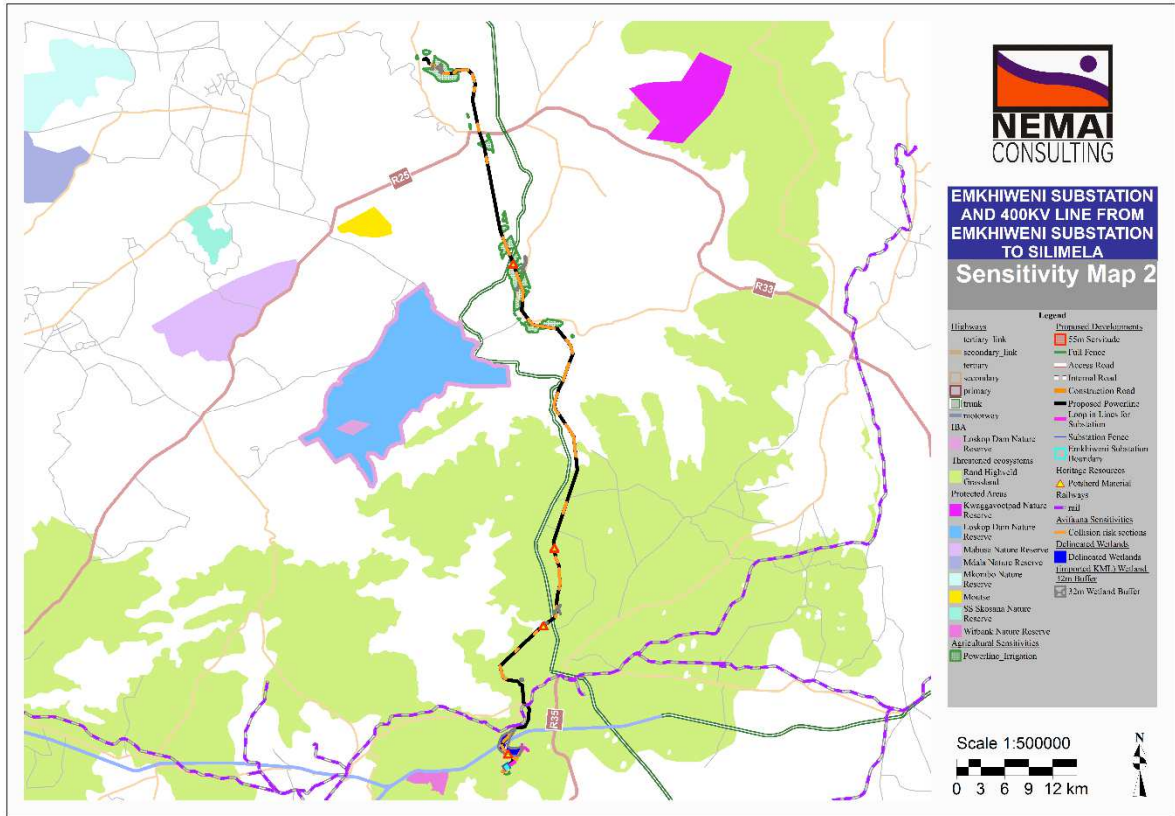


Figure 2: Heritage, Protected Areas, and IBA sensitivity map of the study area

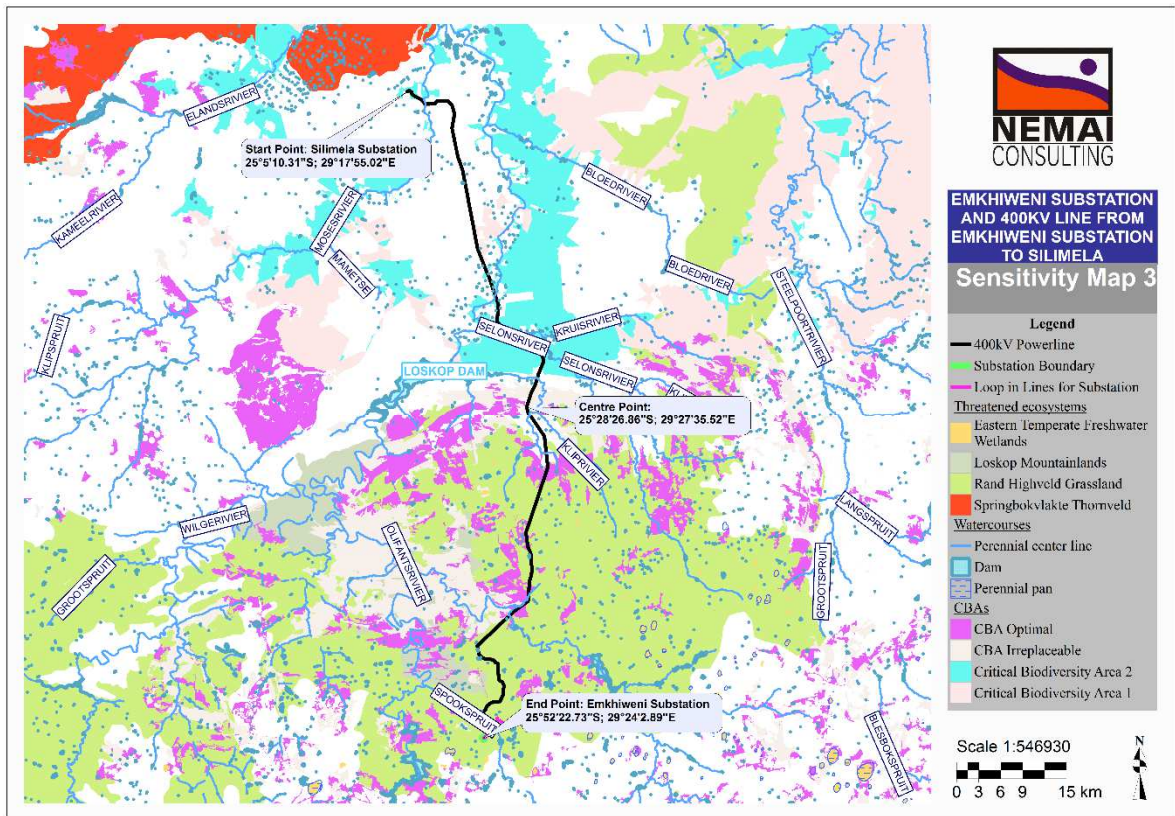


Figure 3: Sensitivity Map – Surface Water

7.3 Sub-section 3: Declaration

The proponent/applicant or holder of the EA affirms that he/she will abide and comply with the prescribed impact management outcomes and impact management actions as stipulated in part B: section 1 of the generic EMPr and have the understanding that the impact management outcomes and impact management actions are legally binding. The proponent/applicant or holder of the EA affirms that he/she will provide written notice to the CA 14 day prior to the date on which the activity will commence of commencement of construction to facilitate compliance inspections.

Signature Proponent/applicant/ holder of EA

Date:

7.4 Sub-section 4: amendments to site specific information (Part B; section 2)

Should the EA be transferred to a new holder, Part B: Section 2 must be completed by the new holder and submitted with the application for an amendment of the EA in terms of Regulations 29 or 31 of the EIA Regulations, whichever applies. The information submitted for an amendment to an environmental authorisation will be considered to be incomplete should a signed copy of Part B: Section 2 not be submitted. Once approved, Part B: Section 2 forms part of the EMPr for the development and the EMPr becomes legally binding to the new EA holder.

EA has not been transferred to a new holder, therefore the current information under Part B: Section 2 is relevant.

PART C

8 SITE SPECIFIC ENVIRONMENTAL ATTRIBUTES

If any specific environmental sensitivities/attributes are present on the site which require more specific impact management outcomes and actions, not included in the pre-approved generic EMPr template, to manage impacts, those impact management outcomes and impact management actions must be included in this section. These specific management controls must be referenced spatially, and must include impact management outcomes and impact management actions. The management controls including impact management outcomes and impact management actions must be presented in the format of the pre-approved generic EMPr template. This applies only to additional impact management outcomes and impact management actions that are necessary.

If Part C is applicable to the development as authorised in the EA, it is required to be submitted to the CA together with the BAR or EIAR, for consideration of, and decision on, the application for EA. The information in this section must be prepared by an EAP and the name and expertise of the EAP, including the curriculum vitae are to be included. Once approved, Part C forms part of the EMPr for the site and is legally binding.

This section will **not be required** should the site contain no specific environmental sensitivities or attributes.

Specific Environmental Attributes for the proposed development include (refer to sensitivity maps under Sub-section 2):

The mitigation measures provided by the Specialists through the Impact Assessment are included below:

Geology and Soil	
Project Life-cycle:	Construction and Operation
Potential Impact:	Soil erosion
Proposed Mitigation:	<ul style="list-style-type: none"> Stabilisation of cleared areas to prevent and control erosion. The method chosen (e.g. watering, planting, retaining structures, commercial anti-erosion compounds) will be selected according to the site specific conditions. Drainage management should also be implemented to ensure the minimization of potential erosion. Rehabilitate all areas disturbed immediately after construction. Monitoring to be conducted to detect erosion.

Geology and Soil	
Project Life-cycle:	Construction and Operation
Potential Impact:	Loss of agricultural soil

Proposed Mitigation:	<ul style="list-style-type: none"> • Avoid siting the towers in irrigated lands, especially rotational irrigated lands. • Plan construction activities in consultation with affected Landowners practicing agricultural practices on the affected properties. • Limit construction footprint in agricultural lands. • Strip topsoil before construction and replace topsoil in impacted areas around completed towers as part of rehabilitation. • Rehabilitate all areas disturbed immediately after construction.
----------------------	--

Geology and Soil	
Project Life-cycle:	Construction and Operation
Potential Impact:	Contamination of Soil
Proposed Mitigation:	<ul style="list-style-type: none"> • Hazardous chemical substances must be stored and managed according to the relevant legislation and regulations in order to prevent spillages which may contaminate soil. • After excavation, all soils must be replaced in the same order as they were removed. • Remove, stockpile and preserve topsoil for re-use during rehabilitation. • Topsoil should be temporarily stockpiled, separately from subsoil and rocky material, when areas are cleared. If mixed with sub-soil the usefulness of the topsoil for rehabilitation of the site will be lost. • Stockpiled topsoil should not be compacted and should be replaced as the final soil layer. No vehicles are allowed access onto the stockpiles after they have been placed. • Topsoil stripped from different sites must be stockpiled separately and clearly identified as such. Topsoil obtained from sites with different soil types must not be mixed. • Topsoil stockpiles must not be contaminated with oil, diesel, petrol, waste or any other foreign matter, which may inhibit the later growth of vegetation and microorganisms in the soil. • Soil must not be stockpiled on drainage lines or near watercourses. • Soil should be exposed for the minimum time possible and kept free of invasive vegetation, that is the timing of clearing and grubbing should be coordinated as much as possible to avoid prolonged exposure of soils to wind and water erosion.

Topography	
Project Life-cycle:	Construction and Operation
Potential Impact:	<ul style="list-style-type: none"> • Visual impact • Erosion on sloped areas
Proposed Mitigation:	<ul style="list-style-type: none"> • Avoid placing site camps in high visual impact areas. • Rehabilitate affected areas immediately after construction. • Implement erosion protection on slopes. • Erecting a fence with controlled access around the open spaces and natural areas will prevent access of vagrants and criminals into these areas.

Surface Water	
Project Life-cycle:	Construction and Operation
Potential	Damage to riparian habitat as part of the clearing of the servitude and stringing

Impact:	operations.
Proposed Mitigation:	<ul style="list-style-type: none"> • No activities should take place in the watercourses and associated buffer zone. Where the above is unavoidable, only a tower footprint and no access roads can be considered. This is subjected to authorization by means of a water use license; • Construction in and around watercourses should be restricted to the dry season; • A temporary fence or demarcation must be erected around the works area to prevent access to sensitive environs. The works areas generally include the servitude, construction camps, areas where material is stored and the actual footprint of the tower; • Prevent pedestrian and vehicular access into the wetland areas as well as riparian areas; • Alien plant eradication and follow-up control activities prior to construction, to prevent spread into disturbed soils, as well as follow-up control during construction; • Restrict the construction footprint to minimum area required to undertake the work. • Keep clearance of vegetation to a minimum. • Plan stringing through watercourses to take place at pre-determined points such as where the wetland width (and thus area to be impacted) is the smallest; • Access roads and bridges should span the wetland area, without impacting on the permanent or seasonal zones; • Consider the various methods of stringing and select whichever method(s) that will have the least impact on watercourses e.g. shooting a pilot cable and pull cables with a winch, or flying cables over; • Stringing should preferably not make use of vehicles in watercourses. If unavoidable, plan stringing activities in wetlands areas to take place within the drier winter months and use equipment with the smallest possible footprint.

Surface Water	
Project Life-cycle:	Construction and Operation
Potential Impact:	Contamination of surface water through sedimentation from silt-laden runoff from disturbed areas.
Proposed Mitigation:	<ul style="list-style-type: none"> • Conduct water quality monitoring (baseline and during construction) at suitable up- and downstream sites when working close to watercourses. • Where necessary, install in-stream silt traps during construction within the watercourse channel and along the riparian habitat. The style of silt trap will depend on materials used and the water movement patterns. • Implement suitable stormwater measures during construction to manage ingress of runoff into watercourses. • Reduce sediment loads in water from dewatering operations. All dewatering should be done through temporary sediment traps (e.g. constructed out of geotextiles and hay bales). • Select appropriate crossing points (geotechnical conditions, sensitivity of riparian habitat and in-stream habitat), depending on technical feasibility. • No activities should take place in the watercourses and associated buffer zone. Where the above is unavoidable, only a tower footprint and no access roads can be considered. This is subjected to authorization by means of a water use license; • Construction in and around watercourses should be restricted to the dry season; • Consider the various methods of stringing and select whichever method(s) that will have the least impact on watercourses e.g. shooting a pilot cable and pull cables with a winch, or flying cables over; • Stringing should preferably not make use of vehicles in watercourses. If unavoidable, plan stringing activities in wetlands areas to take place within the drier winter months and use equipment with the smallest possible footprint e.g. quad bikes; • Management of on-site water use and prevent stormwater or contaminated water

	<p>directly entering the watercourses;</p> <ul style="list-style-type: none"> • Clearing of vegetation within Riparian zones around watercourses should be kept to a minimum. • Cleared areas near watercourses should be rehabilitated as soon as possible to prevent erosion of bare soil, which could lead to sedimentation and siltation.
--	---

Surface Water	
Project Life-cycle:	Construction and Operation
Potential Impact:	Contamination through spillage of fuel, hazardous chemicals, leaking vehicles, herbicides, etc.
Proposed Mitigation:	<ul style="list-style-type: none"> • All construction activities to comply with the National Water Act (Act No. 36 of 1998). • Ensure that all hazardous storage containers and storage areas comply with the relevant SABS standards to prevent leakage. • Storage area and ablution facilities to be located 50m from edge of riparian habitat. • Ensure proper storage of material (including fuel, paint) that could cause water pollution. Ensure proper storage and careful handling of hazardous substances with spill prevention materials at hand. • Formalise access roads and make use of existing roads and tracks where feasible, rather than creating new routes through watercourses; • Regularly inspect all vehicles for leaks. • Re-fuelling of vehicles must take place off-site. • Herbicides, if used to control weeds during construction or operation, must be an approved and registered product and application must be under the direct supervision of a qualified technician or trained personnel. • All surplus herbicide shall be disposed of in accordance with the supplier's specifications. • Littering must be prohibited by providing adequate number of rubbish bins during the construction and operational phases to ensure proper disposal of rubbish. • Staff must be trained to deal with fuel/chemical spills and spill kits must be easily available at all times.

Surface Water	
Project Life-cycle:	Construction and Operation
Potential Impact:	Inadequate stormwater management due to lack of maintenance
Proposed Mitigation:	<ul style="list-style-type: none"> • Existing stormwater infrastructure should be maintained during construction activities to prevent the deterioration and subsequent failure of current infrastructure. • Temporary berms should be constructed on the downstream perimeter of the site to channel runoff containing silt to a location where silt is allowed to settle prior to discharging into the existing stormwater infrastructure or natural watercourse. • The main contractor is to control stormwater during construction by installing berms at the top of all cut and fill embankments. • Runoff is to be diverted into the site and, either discharged by gravity or, if required, pumped to the Municipal stormwater network.

FLORA PRE-CONSTRUCTION PHASE	
Potential Impact	Mitigation

FLORA PRE-CONSTRUCTION PHASE	
Potential Impact	Mitigation
Loss of plant species of conservation concern and protected trees	<ul style="list-style-type: none"> • It is recommended that prior to construction, <i>Boophane disticha</i> and <i>Hypoxis hemerocallidea</i> plant species recorded within the project area must be searched and rescued and then following construction activities, they can be re-established within the study area. • Permits from DAFF and LEDET are required before construction commences in order to cut, disturb, destroy or remove the several protected trees noted within the project area. • It is recommended that search, rescue and relocation be conducted taking into consideration flora and fauna species of conservation concern. For flora species, the following factors need to be considered (amongst others) as part of this plan: <ul style="list-style-type: none"> ○ Detailed plan of action (including timeframes, methodology and costs); ○ Site investigations; ○ Consultation with authorities and stakeholders; ○ Marking of species to be relocated; ○ Applying for permits (LEDET/MTPA); ○ Identification of suitable areas for relocation; ○ Aftercare; and ○ Monitoring (including targets and indicators to measure success).

FAUNA PRE-CONSTRUCTION & CONSTRUCTION PHASE	
Potential Impact	Mitigation
Loss of <i>Protected species</i> listed in terms of the National Environmental Management: Biodiversity Act, 2004 (Act No. 10 of 2004) Threatened or Protected Species regulations	<ul style="list-style-type: none"> • In order to protect Southern African Python on or around the site, should this species be encountered or exposed during the construction phase, it should be removed and relocated to natural areas in the vicinity. This remedial action requires the engagement of a herpetologist and or ecologist to oversee the removal of any herpetofauna during the initial ground clearing phase of construction (i.e. initial ground-breaking by earthmoving equipment). However, if this species is found during winter period, when it is in hibernation, then a permit from LEDET/MTPA would be required in order to catch and release it to a safer environment. • The conservation of the Giant Bullfrog and of amphibians in general will be met by the protected area network as well as the designation of priority habitats, i.e. pans or quaternary catchments, with associated restrictions on land use. Any impacts on a specimen of this species or that may negatively affect the survival of the species would require a permit from MTPA for relocation if avoidance is not possible. A permit is required from MTPA in order catch, handle, collect, transport and/or relocate the species. • River and wetland systems must be spanned and no towers should be placed within the buffer zones dictated by the surface water studies.

FLORA PRE-CONSTRUCTION PHASE	
Potential Impact	Mitigation
Loss of CBA and ESA habitats	<ul style="list-style-type: none"> • The most significant way to mitigate the loss of habitat is to limit the construction footprint within the natural habitat areas remaining. Disturbance of vegetation must be limited to the servitude area acquired for the project. • Where possible, sensitive habitats must not be cleared and encouraged to grow. • Disturbance of vegetation must be limited only to areas of construction. • Areas cleared of vegetation must be re-vegetated prior to contractor leaving the site. • All stockpiles, construction vehicles, equipment and machinery should be situated away from the natural vegetation. • Prevent contamination of natural areas by any pollution. • Although it is unavoidable that sections of the project infrastructure development will need to traverse areas of potential high sensitivity, the clearing of vegetation must be limited to the servitude area acquired for the project.

FLORA PRE-CONSTRUCTION PHASE	
Potential Impact	Mitigation
Loss of topsoil	<ul style="list-style-type: none"> • During site preparation, topsoil and subsoil are to be stripped separately from each other and must be stored separately from spoil material for use in the rehabilitation phase. It should be protected from wind and rain, as well as contamination from diesel, concrete or wastewater. • Records of all environmental incidents must be maintained and a copy of these records must be made available to authorities on request throughout the project execution.

FLORA CONSTRUCTION PHASE	
Potential Impact	Mitigation
Destruction of indigenous flora during site establishment	<ul style="list-style-type: none"> • Indigenous plants naturally growing within the project area, but that would be otherwise destroyed during clearing for development purposes, should be incorporated into landscaped areas. • Vegetation clearing should be kept to a minimum, and this should only occur where it is absolutely necessary and the use of a brush-cutter is highly preferable to the use of earth-moving equipment. • Where possible, natural vegetation must not be cleared and encouraged to grow. • Ensure that all personnel have the appropriate level of environmental awareness and competence to ensure continued environmental due diligence and on-going minimisation of environmental harm and this can be achieved through provision of appropriate awareness to all personnel. • Disturbance of vegetation must be limited only to areas of construction. • Prevent contamination of natural vegetation by any pollution. • Areas cleared of vegetation must be re-vegetated prior to contractor leaving the site. • Any fauna (mammal and reptile) that becomes trapped in the trenches or in any construction or operational related activity may

FLORA CONSTRUCTION PHASE	
Potential Impact	Mitigation
	<p>not be harmed and must be placed rescued and relocated by an experienced person.</p> <ul style="list-style-type: none"> • Proliferation of alien and invasive species is expected within the disturbed areas and they should be eradicated and controlled to prevent further spread. • No trapping or any other method of catching of any fauna may be performed on site • No storage of building materials or rubbles are allowed in the sensitive areas. • Areas showing dense natural vegetation can be avoided/ spanned in order to reduce vegetation loss. • Avoid translocating stockpiles of topsoil from one place to sensitive areas in order to avoid translocating soil seed banks of alien species. • Rehabilitate all disturbed areas as soon as the construction is completed within the study area

FAUNA CONSTRUCTION PHASE	
Potential Impact	Mitigation
Loss and displacement of animals on site	<ul style="list-style-type: none"> • Training of construction workers to recognise threatened animal species will reduce the probability of fauna being harmed unnecessarily. • The contractor must ensure that no faunal species are disturbed, trapped, hunted or killed during the construction phase. • All construction and maintenance vehicles must stick to properly demarcated and prepared roads. Off-road driving should be strictly prohibited. • A low speed limit should be enforced on site to reduce wildlife collisions. • No fires should be allowed at the site • No dogs or other domestic pets should be allowed at the site.

FLORA AND FAUNA CONSTRUCTION PHASE	
Potential Impact	Mitigation
Loss of habitat and habitat fragmentation	<ul style="list-style-type: none"> • The most significant way to mitigate the loss of habitat is to limit the footprint within the natural habitat areas remaining. • No structures should be built outside the area demarcated for the development. • Although it is unavoidable that sections of the project infrastructure development will need to traverse areas of potential high sensitivity, the clearing of vegetation must be limited to the servitude area acquired for the project. • Where possible, the proposed linear infrastructure (powerline) should be aligned with existing linear infrastructure or routed through already transformed/degraded areas. • All stockpiles, construction vehicles, equipment and machinery should be situated away from the natural vegetation.

FLORA CONSTRUCTION PHASE	
Potential Impact	Mitigation
Loss of vegetation due	<ul style="list-style-type: none"> • Appropriate measures should be implemented in order to prevent

FLORA CONSTRUCTION PHASE	
Potential Impact	Mitigation
to fuel and chemical spills	<p>potential soil pollution through fuel, oil leaks and spills and then compliance monitored by an appropriate person.</p> <ul style="list-style-type: none"> • Make sure construction vehicles are maintained and serviced to prevent oil and fuel leaks. • Emergency on-site maintenance should be done over appropriate drip trays and all oil or fuel must be disposed of according to waste regulations. Drip-trays must be placed under vehicles and equipment when not in use.

FLORA CONSTRUCTION PHASE	
Potential Impact	Mitigation
Destruction of alien vegetation	<ul style="list-style-type: none"> • All alien seedlings and saplings must be removed as they become evident for the duration of construction phase. • Manual / mechanical removal is preferred to chemical control.

FLORA CONSTRUCTION PHASE	
Potential Impact	Mitigation
Increased soil erosion	<ul style="list-style-type: none"> • Topsoil should be stored in such a way that does not compromise its plant-support capacity. • Topsoil from the construction activities should be stored for post-construction rehabilitation work and should not be disturbed more than is absolutely necessary. • Protect topsoil in order to avoid erosion loss on steep slopes. • Protect topsoil from contamination by aggregate, cement, concrete, fuels, litter, oils, domestic and wastes. • An ecologically-sound storm water management plan must be implemented during construction and appropriate water diversion systems put in place.

FLORA CONSTRUCTION PHASE	
Potential Impact	Mitigation
Loss of CBA and ESA habitats	<ul style="list-style-type: none"> • The most significant way to mitigate the loss of habitat is to limit the construction footprint within the natural habitat areas remaining. Disturbance of vegetation must be limited to the servitude area acquired for the project. • Where possible, sensitive habitats must not be cleared and encouraged to grow. • Disturbance of vegetation must be limited only to areas of construction. • Areas cleared of vegetation must be re-vegetated prior to contractor leaving the site. • All stockpiles, construction vehicles, equipment and machinery should be situated away from the natural vegetation. • Prevent contamination of natural areas by any pollution. • Although it is unavoidable that sections of the project infrastructure development will need to traverse areas of potential high sensitivity, the clearing of vegetation must be limited to the servitude area acquired for the project.

FLORA AND FAUNA CONSTRUCTION PHASE	
Potential Impact	Mitigation
Damage to plant and animal life outside of the powerline servitude	<ul style="list-style-type: none"> • Any fauna (mammal, reptile and amphibian) that becomes trapped in the trenches or in any construction or operational related activity may not be harmed and must be placed rescued and relocated by an experienced person. • Proliferation of alien and invasive species is expected within the disturbed areas and they should be eradicated and controlled to prevent their spread. • No unauthorised vehicles should be allowed to drive through the site during the construction activities. • No trapping or any other method of catching of any animal may be performed on site. • Illegal hunting is prohibited. • No dumping of any form is permitted. • No damage and/or removal/trapping/snaring of indigenous plant or animal species for cooking and other purposes will be allowed. • All areas to be affected by the project will be rehabilitated by indigenous vegetation. • Construction activities should be restricted to the development footprint area and then the compliance in terms of footprint can be monitored by Environmental Control Officer (ECO). • River systems must be spanned and no towers should be placed within the buffer zones dictated by the surface water studies. • Natural areas which could be deemed as no go should be clearly marked.

FAUNA CONSTRUCTION PHASE	
Potential Impact	Mitigation
Disturbance to animals	<ul style="list-style-type: none"> • Animals residing within the designated area shall not be unnecessarily disturbed. • During construction, refresher training should be conducted to construction workers with regards to littering and poaching. • The Contractor and his/her employees shall not bring any domestic animals onto site. • Toolbox talks should be provided to contractors regarding disturbance to animals. Particular emphasis should be placed on talks regarding snakes.

FLORA CONSTRUCTION/POST CONSTRUCTION PHASE	
Potential Impact	Mitigation
Loss of habitat due to construction activities	<ul style="list-style-type: none"> • All areas to be affected by the project will be rehabilitated after construction and all waste generated by the construction activities will be stored in a temporary demarcated storage area, prior to disposal thereof at a licensed registered landfill site. • As much vegetation growth as possible should be promoted within the servitude in order to protect soils and to reduce the percentage of the surface area which is left as bare ground. In this regard special mention is made of the need to use indigenous vegetation species as the first choice during landscaping. In terms of the percentage of coverage required during rehab and also the grass mix to be used for rehab, the EMPr will be consulted for

FLORA CONSTRUCTION/POST CONSTRUCTION PHASE	
Potential Impact	Mitigation
	guidance. However, the plant material to be used for rehabilitation should be similar to what is found in the surrounding area.

FAUNA OPERATIONAL PHASE	
Potential Impact	Mitigation
Disturbance of faunal species	<ul style="list-style-type: none"> The disturbance of fauna should be minimized. Animals residing within the designated area shall not be unnecessarily disturbed.

FLORA OPERATIONAL PHASE	
Potential Impact	Mitigation
Destruction of alien vegetation	<ul style="list-style-type: none"> All alien seedlings and saplings must be removed as they become evident for the duration of operational phase. Manual / mechanical removal is preferred to chemical control.

Nature: <i>Loss of potentially productive agricultural land (both construction and operation phase)</i>
Mitigation: The main mitigation measures would be: <ul style="list-style-type: none"> To minimise the footprint of construction as much as possible. Avoid highly productive and/or irrigated areas (see Figure 2)

Nature: <i>Loss of soil through erosion due to action of water</i>
Mitigation: The main mitigation measures would be: <ul style="list-style-type: none"> To minimise the footprint of construction as much as possible. Identify potentially highly erodible soils and avoid such areas Avoid disturbance of watercourses, steep slopes Re-vegetate bare areas as soon as possible Practice sustainable soil conservation measures where necessary (contours, geotextiles, soil stabilization)

Nature: <i>Loss of potentially productive irrigated areas (both construction and operation phase)</i>
Mitigation: The main mitigation measures would be: <ul style="list-style-type: none"> To minimise the footprint of construction as much as possible. Avoid active irrigated areas (see Figure 2), since irrigation cannot be carried out adjacent to transmission lines or under the route.

Land Capability – Agricultural Potential	
Project Life-cycle:	Construction and Operation
Potential	Risk of harm to livestock from construction activities (e.g. open excavations) and Loss

Impact:	of livestock though improper access control and theft.
Proposed Mitigation:	<ul style="list-style-type: none"> • Access control on farms and private properties must be maintained. • Additional access control, if required, should be implemented. • All excavations, especially deep excavations, must be barricaded to ensure livestock cannot fall in. • Consultation with landowners should be undertaken, especially during construction to ensure that construction is planned in synergy with farming practices, as far as reasonably possible.

Land Use	
Project Life-cycle:	Construction and Operation
Potential Impact:	Land acquisition and servitude restrictions
Proposed Mitigation:	<ul style="list-style-type: none"> • Engage and negotiate with affected landowners. • Eskom will need to conform to all its legal obligations as part of the acquisition of land for the construction and operation of the project.

Heritage	
Project Life-cycle:	Construction and Operation
Potential Impact:	Negative impact on change finds of heritage value during construction and maintenance of the infrastructure and servitude.
Proposed Mitigation:	<ul style="list-style-type: none"> • If any towers are positioned on the identified locations where potshards were found, then the position of the tower must be adjusted to avoid impacting on the heritage resources. • Ensure that any chance finds of cultural, archaeological, and historical significance are demarcated on the site layout plan, and marked as no-go areas. No known or protected sites were recorded in the HIA. • The ECO must monitor construction of towers to ensure that any chance finds can be identified timeously and the necessary steps taken to ensure their protection. • Should any archaeological, cultural property heritage resources be exposed during excavation or be found on development site, a registered heritage specialist or SAHRA official must be called to site for inspection. • A buffer of 20 m must be placed around all heritage resources to ensure that during the construction of the powerline, these sites are not damaged. • The management plan submitted by the Heritage Specialist must be followed.

Air Quality	
Project Life-cycle:	Construction
Potential Impact:	Excessive dust levels as a result of construction activities
Proposed Mitigation:	<ul style="list-style-type: none"> • Appropriate dust suppression measures or temporary stabilising mechanisms to be used when dust generation is unavoidable (e.g. dampening with water, chemical soil binders, straw, brush packs, chipping), particularly during prolonged periods of dry weather. Dust suppression to be undertaken for all bare areas,

Air Quality	
	<p>including construction area and access roads. Note that all dust suppression requirements should be based on the results from the dust monitoring and the proximity of sensitive receptors.</p> <ul style="list-style-type: none"> • Speed limits to be strictly adhered to. • The Contractor will take preventative measures to minimise complaints regarding dust nuisances (e.g. screening, dust control, timing, pre-notification of affected parties). • Air quality to be monitored (baseline and during construction) for dust fallout and particulate matter. Sampling locations to consider major sources of dust and sensitive receptors.

Noise	
Project Life-cycle:	Construction
Potential Impact:	Excessive noise levels as a result of construction and operation activities
Proposed Mitigation:	<ul style="list-style-type: none"> • The provisions of SANS 10103:2008 will apply to all areas at the perimeter of the site, within audible distance of residents. • Construction work should take place during working hours – defined as 07h00 to 17h00 on weekdays and 07h00 to 14h00 on Saturdays. Should overtime work be required, that will generate noise, consultation with the affected community or landowner should take place.. • No amplified music will be allowed on the site. The use of radios, tape recorders, compact disc players, television sets etc. will not be permitted unless at a level that does not serve as an intrusion to adjacent landowners. • Construction activities generating output levels of 85 dB or more will be confined to the hours during normal working hours. • The Contractor shall inform local communities and residents of any activity that could cause a nuisance to them. • Noise rules must be established for construction areas. These rules must continue into the operation phase. • The Contractor shall take preventative measures (e.g. screening, muffling, timing, pre-notification of affected parties) to minimise complaints regarding noise and vibration nuisances from sources such as power tools. • No noise generating activity outside of normal hours, regardless of its proximity to residences, can take place without application to the Engineer for approval. The application shall be accompanied by the noise containment measures proposed. • Restrict construction activities and vehicle movement to normal working hours. • Where necessary engage with the land owner to ensure livestock are not in close proximity to the construction activity during times where noise levels are of significance. • Disturbances during the construction phase can be successfully mitigated through contractor specifications issued at tender stage and through monitoring of contractor performance during the construction phase.
Existing Infrastructure	
Project Life-cycle:	Construction
Potential Impact:	Damage to property, crops, infrastructure, services, etc. due to construction activities
Proposed Mitigation:	<ul style="list-style-type: none"> • If a risk exists of damage taking place on a property as a result of construction, a condition survey should be undertaken prior to construction; • The contractor is to make good / repair and acknowledge any damage that occurs on any property as a result of construction work;

Existing Infrastructure	
	<ul style="list-style-type: none"> • Where crops and agricultural machinery are damaged, compensation is to be paid to the farmer for the loss; • The farmer should be compensated for any loss of income experienced at the account of the contractor.

Environmental Feature	Disturbance arising from the construction phase
Project life-cycle	Construction phase
Potential Impact	Proposed Management Objectives / Mitigation Measures
Traffic	<ul style="list-style-type: none"> • Ensure that the necessary signage and traffic measures are implemented for safe and convenient access to the site; • Additional creation of routes and access roads must be implemented to reduce heavy traffic flow; • The EMPr must include restrictions on the Contractor and its sub-contractors related to minimising impacts on the safety of road users; Restrictions should include appropriate speed limitations, restricting travel times to daylight hours, communication measures and the establishment of haul routes.; • Measures must be put in place to prevent construction vehicles from entraining dirt onto public roads; • Traffic control personnel must be assigned where deemed necessary, this will be to control the movement of construction vehicles in relation to local vehicles to ensure maximum safety and coherence.
Local Road Condition	<ul style="list-style-type: none"> • A continuous condition survey of the local roads to be used during the construction phase should be made prior to construction; • Delivery routes should be defined and adhered to during the construction phase; • Maintenance of local roads should take place during the construction phase, ensuring that the local roads used by the contractor are left in the same or better condition than they were prior to the start of construction.

Nature of impact: Potential visual impact significance of the Construction Camps

Mitigation:	The visual impact can be minimized by the creation of a visual barrier. The construction area will be cleared as soon as construction of the infrastructure is finished.
--------------------	--

Nature of impact: Potential visual impact significance of the Substation

Mitigation:	The visual impact can be minimized by the creation of a visual barrier.
--------------------	---

Nature of impact: Potential visual impact significance of the Access Roads

Mitigation:	The visual impact can be minimized by using existing roads.
--------------------	---

Environmental Feature	Impacts Created by Providing a Secure, Sufficient Power Supply					
Project life-cycle	Operational Phase					
Potential Impact	Proposed Management Objectives / Mitigation Measures					
Economic	<ul style="list-style-type: none"> Increased business productivity; Economic growth; 					
Social Benefits	<ul style="list-style-type: none"> Convenient and less time-consuming daily tasks; Facilitation of education Facilitation of mass transport; Health care. 					
	Nature	Extent	Magnitude	Duration	Probability	Significance
Before Mitigation	Positive	Regional	High	Long Term	Likely	3
After Mitigation	Positive	Regional	High	Long Term	Likely	3
Significance of Impact and Preferred Alternatives	<p>Mitigation is not necessary for this positive impact.</p> <p>This mitigation measure does not influence the choice of alternatives considered in the study.</p>					

Environmental Feature	Impact owing to Land and Rights Acquisition					
Relevant Alternatives & Activities	Acquisition of land					
Project life-cycle	Pre-construction					
Potential Impact	Proposed Management Objectives / Mitigation Measures					
Loss of income from the acquisition of land	<ul style="list-style-type: none"> Where-ever possible, the final routing of the project infrastructure should be adjusted to avoid impacts. If the powerline servitude is such that it allows powerline alignment to the extent that an impact on a dwelling can be avoided, this should be done. The alternative, the relocation of communities, is very disruptive to the affected residents. Where impacts cannot be avoided, all negotiations and payments relating to compensating affected landowners should be conducted and concluded before construction begins. Those landowners who will be required to sell their property to Eskom SOC Ltd must be compensated for any business that is operating on the premises. All landowners whose businesses will be affected by the proposed project should be compensated to the full value of their immovable assets and any loss of income. Negotiations should take place between the landowner and Eskom for any compensation of potential income denied as a result of the servitude agreements. 					
Relocation of Households	<ul style="list-style-type: none"> In the event that household relocation will be necessary, the process to be followed is as follows: <ul style="list-style-type: none"> A Resettlement Action Plan to be drawn up providing detail on the impacted households, households needs and how these will be catered for during and after the relocation, provides detail on the area to which they are to be relocated and the timeframes associated with the relocation; The relocation action plan is to be discussed with every impacted household and agreed to in writing; The relocation action plan is to be discussed with every 					

	<p>impacted landowner (if this is not the same as the impacted household) and agreed to in writing;</p> <ul style="list-style-type: none"> ○ Relocation is to be effected in strict accordance with the relocation action plan; and ○ An independent audit, carried out by a suitably qualified relocation expert, is to be conducted after every relocation to: determine the relocation's effectiveness and to identify shortfalls in adhering to the relocation action plan; and ○ Shortfalls are to be addressed by the proponent within the duration of the construction period of the project. 					
Construction Period and time frame	<ul style="list-style-type: none"> • Careful planning should be adopted to reduce the impact of land acquisition on the overall programme for the works 					
	Nature	Extent	Magnitude	Duration	Probability	Significance
Before Mitigation	Negative	Regional	High	Long term	Almost Certain	3
After Mitigation	Negative	Regional	Low	Medium term	Likely	1
Significance of Impact and Preferred Alternatives	<p>The final routing of the powerline is the primary mitigation measure that should be adopted. The final routing should be amended to avoid impacts on dwellings.</p> <p>Relocation should be undertaken with great circumspection.</p>					

Environmental Feature	Impact of the siting Emkhiweni substation
Project life-cycle	Planning Phase
Potential Impact	Proposed Management Objectives / Mitigation Measures
Loss of productive land due to site selection	<ul style="list-style-type: none"> • Landowner to be compensated for the loss of productive land

Environmental Feature	Economic opportunities arising from the construction phase
Project life-cycle	Construction phase
Potential Impact	Proposed Management Objectives / Mitigation Measures
SMME Creation	<ul style="list-style-type: none"> • Local SMMEs should be given an opportunity to participate in the construction of the project through the supply of services, material or equipment.
Job Creation and Skills Development	<ul style="list-style-type: none"> • The main contractor should employ non-core labour from the Main places as far as possible during the construction phase. • The principles of Expanded Public Works Programme can be used for guiding the construction.
Indirect Employment Impacts	<ul style="list-style-type: none"> • Spaza/informal trader shops may open next to the site as a consequence of construction. These should be controlled by the contractor to limit their footprint and to ensure that the local Municipalities – Informal Trading By-laws are complied with.

Environmental Feature	Disturbance arising from the construction phase
Project life-cycle	Construction phase
Potential Impact	Proposed Management Objectives / Mitigation Measures

Environmental Feature	Disturbance arising from the construction phase
Project life-cycle	Construction phase
Potential Impact	Proposed Management Objectives / Mitigation Measures
Traffic	<ul style="list-style-type: none"> • Ensure that the necessary signage and traffic measures are implemented for safe and convenient access to the site; • Additional creation of routes and access roads must be implemented to reduce heavy traffic flow; • The EMPr must include restrictions on the Contractor and its sub-contractors related to minimising impacts on the safety of road users; Restrictions should include appropriate speed limitations, restricting travel times to daylight hours, communication measures and the establishment of haul routes.; • Measures must be put in place to prevent construction vehicles from entraining dirt onto public roads; • Traffic control personnel must be assigned where deemed necessary, this will be to control the movement of construction vehicles in relation to local vehicles to ensure maximum safety and coherence.
Local Road Condition	<ul style="list-style-type: none"> • A continuous condition survey of the local roads to be used during the construction phase should be made prior to construction; • Delivery routes should be defined and adhered to during the construction phase; • Maintenance of local roads should take place during the construction phase, ensuring that the local roads used by the contractor are left in the same or better condition than they were prior to the start of construction.
Increase in Dust	<ul style="list-style-type: none"> • Dust and disturbance can be mitigated through the use of appropriate dust suppression mechanisms; • Adherence to road signage can be added as an advantage and a measure to manage the increase in dust levels; • Mitigation measures management should be adhered to according to the relevant specialist studies.
Influx of workers	<ul style="list-style-type: none"> • All employment of locally sourced labour should be controlled on a contractual basis. If possible, and if the relevant Ward Councillors deem it necessary, the employment process should include the affected Ward Councillors. • People in search of work may move into the area, however, the project will create a limited number of job opportunities. Locally based people should be given opportunities and preferences over others; • No staff accommodation should be allowed on site; • Influx of workers could may lead to increased diseases and HIV/AIDSs & STI as well as STD infections, therefore awareness programmes should be implemented through the local educational institutions and for the workers as well.
Worker Health and Safety	<ul style="list-style-type: none"> • The provisions of the OHS Act 85 of 1993 and the Construction Regulations of 2014 should be implemented on all sites; • Account should be taken of the safety impacts on the local community when carrying out the longitudinal aspects of the project, such as the pipelines; • Contractors should establish HIV/AIDSs awareness programmes at their site camps.
Security	<ul style="list-style-type: none"> • The sites of the substations should be fenced for the duration of construction; • All contractors' staff should be easily identifiable through their

Environmental Feature	Disturbance arising from the construction phase
Project life-cycle	Construction phase
Potential Impact	Proposed Management Objectives / Mitigation Measures
	<p>respective uniforms;</p> <ul style="list-style-type: none"> • A security policy should be developed which amongst others requires that permission be obtained prior to entering any property and provisions controlling trespassing by contractor staff; • Security staff should only be allowed to reside at contractor camps and no other employees; • Contractors should establish crime awareness programmes at their site camps.
Noise impacts	<ul style="list-style-type: none"> • Prior notice should be given to surrounding communities of drilling events; • Construction work should take place during working hours – defined as 07h00 to 17h00 on weekdays and 07h00 to 14h00 on Saturdays. Should overtime work be required, that will generate noise, consultation with the affected community or landowner should take place.
Damage to property	<ul style="list-style-type: none"> • If a risk existing of damage taking place on a property as a result of construction, a condition survey should be undertaken prior to construction; • The contractor is to make good and acknowledge any damage that occurs on any property as a result of construction work; • Where crops and agricultural machinery are damaged, compensation is to be paid to the farmer for the loss of these crops; • The farmer should be compensated for any loss of income experienced at the account of the contractor.

APPENDIX 1: METHOD STATEMENTS

To be prepared by the contractor prior to commencement of the activity. The method statements are **not required** to be submitted to the CA.

To be prepared by the Contractor once appointed, and placed as an addendum to this EMPr.