

ENVIRONMENTAL IMPACT ASSESSMENT REPORT AND

ENVIRONMENTAL MANAGEMENT PROGRAMME REPORT

PROSPECTING RIGHT APPLICATION OF DIAMONDS ALLUVIAL &
DIAMONDS GENERAL NEAR SCHWEIZER-RENEKE ON PORTION 10
AND REMAINING EXTENT OF THE FARM GROOTPOORT 83
(EXCLUDING THE MINING PERMIT APPLICATION OF 5 HECTARES),
REGISTRATION DIVISION HO, NORTH WEST PROVINCE.

SUBMITTED FOR ENVIRONMENTAL AUTHORIZATIONS IN TERMS OF THE NATIONAL ENVIRONMENTAL MANAGEMENT ACT, 1998 AND THE NATIONAL ENVIRONMENTAL MANAGEMENT WASTE ACT, 2008 IN RESPECT OF LISTED ACTIVITIES THAT HAVE BEEN TRIGGERED BY APPLICATIONS IN TERMS OF THE MINERAL AND PETROLEUM RESOURCES DEVELOPMENT ACT, 2002 (MPRDA) (AS AMENDED).

NAME OF APPLICANT PGL Boerdery (Pty) Ltd

TEL NO (018) 011 1925

FAX NO 087 231 7021

POSTAL ADDRESS: P.O. Box 1086, Schweizer-Reneke, 2780

PHYSICAL ADDRESS: 4 Botha Street, Schweizer-Reneke, 2780

FILE REFERENCE NUMBER SAMRAD: NW30/5/1/1/2/11840PR

IMPORTANT NOTICE

In terms of the Mineral and Petroleum Resources Development Act (Act 28 of 2002 as amended), the Minister must grant a prospecting or mining right if among others the mining "will not result in unacceptable pollution, ecological degradation or damage to the environment".

Unless an Environmental Authorisation can be granted following the evaluation of an Environmental Impact Assessment and an Environmental Management Programme report in terms of the National Environmental Management Act (Act 107 of 1998) (NEMA), it cannot be concluded that the said activities will not result in unacceptable pollution, ecological degradation or damage to the environment.

In terms of section 16(3)(b) of the EIA Regulations, 2014, any report submitted as part of an application must be prepared in a format that may be determined by the Competent Authority and in terms of section 17 (1) (c) the competent Authority must check whether the application has taken into account any minimum requirements applicable or instructions or guidance provided by the competent authority to the submission of applications.

It is therefore an instruction that the prescribed reports required in respect of applications for an environmental authorisation for listed activities triggered by an application for a right or permit are submitted in the exact format of, and provide all the information required in terms of, this template. Furthermore please be advised that failure to submit the information required in the format provided in this template will be regarded as a failure to meet the requirements of the Regulation and will lead to the Environmental Authorisation being refused.

It is furthermore an instruction that the Environmental Assessment Practitioner must process and interpret his/her research and analysis and use the findings thereof to compile the information required herein. (Unprocessed supporting information may be attached as appendices). The EAP must ensure that the information required is placed correctly in the relevant sections of the Report, in the order, and under the provided headings as set out below, and ensure that the report is not cluttered with un-interpreted information and that it unambiguously represents the interpretation of the applicant.

ENVIRONMENTAL IMPACT ASSESSMENT PROCESS

- (1) The environmental impact assessment process must be undertaken in line with the approved plan of study for environmental impact assessment.
- (2) The environmental impacts, mitigation and closure outcomes as well as the residual risks of the proposed activity must be set out in the environmental impact assessment report.

OBJECTIVE OF THE ENVIRONMENTAL IMPACT ASSESSMENT PROCESS

- 2. The objective of the environmental impact assessment process is to, through a consultative process-
- (a) determine the policy and legislative context within which the activity is located and document how the proposed activity complies with and responds to the policy and legislative context;
- (b) describe the need and desirability of the proposed activity, including the need and desirability of the activity in the context of the preferred location;
- (c) identify the location of the development footprint within the preferred site based on an impact and risk assessment process inclusive of cumulative impacts and a ranking process of all the identified development footprint alternatives focusing on the geographical, physical, biological, social, economic, heritage and cultural aspects of the environment;
- (d) determine the--
- (i) nature, significance, consequence, extent, duration and probability of the impacts occurring to inform identified preferred alternatives; and
- (ii) degree to which these impacts-
- (aa) can be reversed;
- (bb) may cause irreplaceable loss of resources, and
- (cc) can be avoided, managed or mitigated;
- (e) identify the most ideal location for the activity within the preferred site based on the lowest level of environmental sensitivity identified during the assessment;
- (f) identify, assess, and rank the impacts the activity will impose on the preferred location through the life of the activity;
- (g) identify suitable measures to avoid, manage or mitigate identified impacts; and
- (h) identify residual risks that need to be managed and monitored.

OBJECTIVE OF THE ENVIRONMENTAL IMPACT ASSESSMENT

- 1) Contact Person and correspondence address
 - a) Details of:

i) The EAP who prepared the report

Name of Practitioner: Danie Labuschagne

Tel No.: (018) 011 1925 Fax No.: (053) 963 2009

e-mail address: danie@milnex-sa.co.za

Name of Practitioner: Percy Sehaole

Tel No.: (018) 011 1925 Fax No.: (053) 963 2009

e-mail address: percy@milnex-sa.co.za

ii) Expertise of the EAP.

The qualifications of the EAP (With evidence attached as Appendix 1).

Danie Labuschagne holds a Master's Degree in Environmental Management and Geography (refer to **Appendix 1**)

Percy Sehaole holds a Master's Degree in Environmental Science (refer to Appendix 1)

(2) Summary of the EAP's past experience. (Attach the EAP's curriculum vitae as Appendix 2)

Milnex 189 CC was contracted by PGL Boerdery (Pty) Ltd as the independent environmental consultant to undertake the Scoping and EIA process for a prospecting right for the prospecting of diamonds alluvial & diamonds general on Portion 10 and Remaining Extent of the farm Grootpoort 83 (excluding the mining permit application of 5Ha), Registration Division HO, North West Province. Milnex 189 CC does not have any interest in secondary developments that may arise out of the authorisation of the proposed project..

Milnex 189 CC is a specialist environmental consultancy with extensive experience in the mining industry which provides a holostic encironmental management service, including environmental assessment and planning to ensure compliance with relevant environmental legislation. Milnex 189 CC benefits from the pooled resources, diverse skills and experience in the environmental and mining field held by its team that has been actively involved in undertaking environmental studies for a wide variety of mining related projects throughout South Africa. The Milnex 189 CC team has considerable expierence in environmental impact assessment and environmental management, especially in the mining industry.

Danie Labuschagne & Percy Sehaole have experience consulting in the environmental field. Their key focus is on environmental assessment, advice and management and ensuring compliance to legislation and guidelines. They are currently involved in undertaking EIAs for several projects across the country (refer to **Appendix 2** for CV)

b) Description of the property.

Farm Name:	 The remaining extent of the farm Grootpoort 83, excluding the mining permit application of 5 hectares Portion 10 of the farm Grootpoort 83
Application area (Ha)	937.0522 hectares
Magisterial district:	НО
Distance and direction from nearest town	The property is located approximately 10km South of Schweizer – Reneke on the R34 on route to Bloemhof.
21 digit Surveyor	1. T0HO00000008300000
General Code for each	2. T0HO000000008300010
farm portion	

c) Locality map

(show nearest town, scale not smaller than 1:250000 attached as Appendix 3).

A Locality map is attached in **Appendix 3** and on figure 1 below.

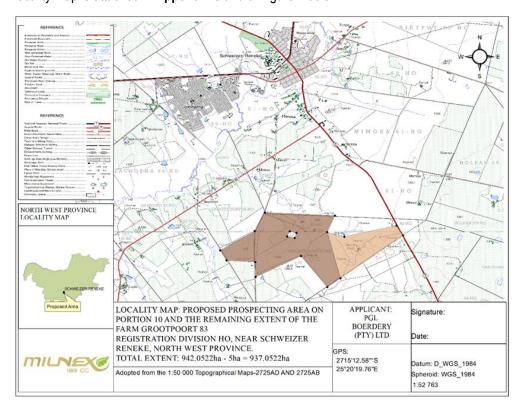


Figure 1: Locality Map

Farm co-ordinates

Farms	Latitude	Longitude
Portion 10 of the farm Grootpoort 83	27°14'52.38"S	25°21'51.51"E
	27°15'4.81"S	25°21'59.03"E
	27°15'58.59"S	25°20'40.02"E
	27°15'0.61"S	25°20'23.23"E
The remaining extent of the farm Grootpoort 83	27°15'59.24"S	25°20'39.14"E
	27°16'10.08"S	25°20'22.92"E
	27°15'30.51"S	25°19'49.15"E
	27°14'39.13"S	25°20'31.90"E
	27°14'59.03"S	25°18'50.22"E
	27°15'30.41"S	25°18'10.57"E

a) Description of the scope of the proposed overall activity.

i) Listed and specified activities

Provide a plan drawn to a scale acceptable to the competent authority but not less than 1: 10 000 that shows the location, and area (hectares) of all the aforesaid main and listed activities, and infrastructure to be placed on site and attach as **Appendix 4**

Refer to Site Plan included within **Appendix 4** and on figure 2 below.

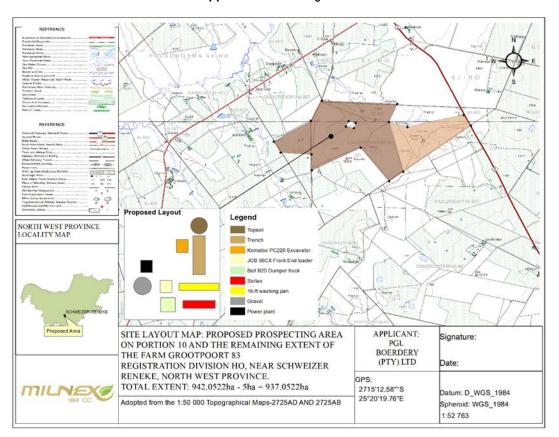


Figure 2: Site Plan Map

NAME OF ACTIVITY (All activities including activities not listed) (E.g. Excavations, blasting, stockpiles, discard dumps or dams, Loading, hauling and transport, Water supply dams and boreholes, accommodation, offices, ablution, stores, workshops, processing plant, storm water control, berms, roads, pipelines, power lines, conveyors, etcetcetc.)	Aerial extent of the Activity Ha or m ²	LISTED ACTIVITY Mark with an X where applicable or affected.	APPLICABLE LISTING NOTICE (GNR 983, GNR 984 or GNR 985)/NOT LISTED
Clearance of indigenous vegetation	937.0522 hectares - Only the areas where prospecting takes place, will be cleared. Concurrent backfilling will take place in order to rehabilitate.	X	GNR. 984
Office and Workshop	50m ²	-	-
Roads	+- 4 km	-	-
Stockpiling op topsoil	937.0522 hectares – 3m x 2m x 2m pit (100 pits), 20m x 10m x 3m trench (40 trenches)	-	-
Prospecting of Diamond Alluvial - Excavations	937.0522 hectares – 3m x 2m x 2m pit (100 pits), 20m x 10m x 3m trench (40 trenches)	Х	GNR. 984
Processing Plant	16 feet washing pan – 48 000 tons to be washed	Х	-

ii) Description of the activities to be undertaken

(Describe Methodology or technology to be employed, and for a linear activity, a description of the route of the activity

PGL Boerdery (Pty) Ltd has embarked on a process for applying for a prospecting right for the prospecting of Diamonds Alluvial and Diamonds General near Schweizer - Reneke on Portion 10 and Remaining Extent of the farm Grootpoort 83 (excluding the mining permit application of 5Ha), Registration Division HO, North West Province are preferred due to the sites mineral resources. PGL Boerdery (Pty) Ltd requires a prospecting right in terms of NEMA and the Mineral and Petroleum Resources Development Act to mine diamonds alluvial, diamonds general within the Mamusa Local Municipality, North West Province (refer to a locality map attached in **Appendix 3**).

Please find the Prospecting Work Programme attached as **Appendix 8**.

Phase 1 – Desktop Studies, Imagery Analysis and Geological Mapping

A formal site visit will be done within 90 days after the prospecting right was executed. Desktop studies will be undertaken after the site investigation was done to determine the target areas including the identification of any infrastructure to be build and any potential problems that may need to be addressed.

Phase 2 - Pitting

The information obtained from the desktop studies will be used to draw up a pitting map. The location and GPS coordinates of where pits will be dug, will be indicated on this map (pitting location map). Pits will then be dug by an excavator on these mapped coordinated points. If gravel is found the applicant will determine the composition and quality of the gravel. It is envisaged that the pits will determine the location and intersection of mineralization.

It is envisaged that 100 pits will be dug. It may be less depending on results.

937.0522 hectares – 3m x 2m x 2m pit (100 pits). It is planned that only 20 pits will be excavated in the first year, but it may be more if the process is quicker than planned for. It should be kept in mind that no more than 100 pits will be excavated.

The total area to be disturbed a year will be-20 pits $x (3m \times 2m) = 0.012Ha$ per year

Phase 3 - Trenches

The applicant will proceed with this way of prospecting by means of the open cast / trenching method, during and or after pitting and depending on the results. The location where the trenches will be dug, will be determined after the gravel has been located by conducting the desktop studies and the digging of pits. The trenches will be dug on the parts of the property where the gravel is located. Trenches will be sited on the resource map according to the coordinate of each of the trenches made. The trenches will be dug to remove and wash the gravel. It will be washed by a washing pan to determine diamond proceeds per 100 ton of gravel. The trenches will be sited to determine the geological representivity. Overburden will be stripped and placed next to the trench as determined in the EMP. Gravel will be removed and transported to the plant to be washed. Tailings will be returned to the excavation to fill it up. Hereafter overburden will be dumped in the excavation where after topsoil will be placed in the excavation.

937.0522 hectares –20m x 10m x 3m trench (40 trenches). It is planned that only 8 trenches will be excavated in the first year, but it may be more if the process is quicker than planned for. It should be kept in mind that no more than 40 trenches will be excavated.

The total area to be disturbed a year will be- 8 trenches x ($20m \times 10m$) = 0.16 Ha per year. No more than 0.172ha will be left as un-rehabilitated in two years. Rehabilitation will be done concurrently.

Phase 4 – Consolidation and interpretation

All data will be consolidated and processed to determine the diamond bearing resource on the property. This will be a continuous process throughout the prospecting work. Each phase of prospecting will be followed by desktop studies involving interpretation and modeling of all data gathered and how the applicant will proceed with the work program in terms of activity, quantity, resources expenditures and duration. A pre-feasibility study will be done to determine the preliminary economic assessment of the resource and to determine whether additional evaluation of the deposit will be warranted to increase confidence in the resource estimation. Prospecting work will be conducted by a multi-disciplinary team to determine whether the resource can be viable exploited and if the results can support an application for a mining right.

Phase 5 – Rehabilitation and Closure

- Remove all prospecting related infrastructure
- Return tailings and overburden to the excavation in order to fill up the excavation.
- Place topsoil on top of the backfilled excavation.
- Rehabilitate disturbed areas appropriately

d) Policy and Legislative Context

APPLICABLE LEGISLATION AND GUIDELINES USED TO COMPILE THE REPORT (a description of the policy and legislative context within which the development is proposed including an identification of all legislation, policies, plans, guidelines, spatial tools, municipal development planning frameworks and instruments that are applicable to this activity and are to be considered in the assessment process);	REFERENCE WHERE APPLIED
The Constitution of South Africa	
(Act No. 108 of 1996)	-
The National Environmental Management Act	S24(1) of NEMA
(Act No. 107 of 1998)	S28(1) of NEMA
The National Water Act (Act No. 36 of 1998)	S21 (a)(b) of NWA
Management: Air Quality Act	S21
(Act No. 39 of 2004)	
The National Heritage Resources Act (Act No. 25 of 1999)	-
Conservation of Agricultural Resources Act (Act No. 85 of 1983)	-
Mineral and Petroleum Resources Development Act (Act No. 28 of 2002)	-
National Infrastructure Plan	-
North West Province Growth and Development Strategy	-
Dr. Ruth Segomotsi Mompati District Municipality Integrated Development Plan (IDP)	-
Mamusa Local Municipality Integrated Development Plan (IDP) Review	-

b) Need and desirability of the proposed activities.

(Motivate the need and desirability of the proposed development including the need and desirability of the activity in the context of the preferred location).

Prospecting rights and mining permits have been applied for all around the proposed site, and the outcome of that studies suggest the possibility of encountering further diamond deposits.

The North West Province is an important supplier of rough diamonds to the international market and is a large corner stone of the South African economy.

c) Motivation for the preferred development footprint within the approved site including a full description of the process followed to reach the proposed development footprint within the approved site.

NB!! – This section is about the determination of the specific site layout and the location of infrastructure and activities on site, having taken into consideration the issues raised by interested and affected parties, and the consideration of alternatives to the initially proposed site layout.

Location of the site

The location of the site is preferred due to the presence of shallow diamond. Access will be obtained from gravel road off the R34

Preferred activity

The prospecting of diamonds alluvial, diamonds general and diamonds is the optimum preferred activity for the site. The shallow diamond deposits makes the site ideal for alluvial diamond mining. The mine will provide significantly more job opportunities than what is providing currently.

Technology alternatives

In terms of the technologies proposed, these have been chosen based on the long term success of their prospecting history. The prospecting activities proposed in the Prospecting Works Programme (**Appendix 9**) is dependent on the preceding phase as previously discussed, therefore no alternatives are indicated, but rather a phased approach of trusted prospecting techniques.

The preferred technology for the proposed mining activity, will be to remove the diamond bearing gravel with an excavator, depositing it in the 10 - 18 feet rotary pan(s) to be washed and sorted. Please find the Prospecting Work Programme attached as **Appendix 9**.

Pros & Cons of the alternative **Dense Media Separation (DMS)**

Advantages	Disadvantages	
DMS plants is used mostly for kimberlite deposits	10 times more expensive than Rotary pan	
	Water consumption is high	
	Operating costs are expensive	

In a Dense Media Separation (DMS) plant, powdered ferrosilicon (an alloy of iron and silicone) is suspended in water to form a fluid near the density of diamond (3.52 g/cm3), to which the diamond bearing material is added to begin the separation process of the heavier minerals from the lighter material. Additional separation of the denser material occurs by centrifuge in "cyclones" that swirl the mixture at low and high speeds, forcing the diamonds and other dense minerals to the walls and then

out the bottom of the cyclone. Waste water rises at the center of the cyclones and is sucked out and screened to remove waste particles. The DMS process results in a concentrate that generally weighs less than one percent of the original material fed into the plant at the beginning of the process.

Pros & Cons of the alternative Rotary Pan Plants

Advantages	Disadvantages
More cost effective	The industry perception that Rotary Pan
	Plants yield poorer diamond recoveries
Readily available	
Generate more work opportunities	
Consume less water	
Rotary Pan Plants are most often used	
when mining alluvial deposits	

In a Rotary Pan plant, crushed ore, when mining kimberlite, or alluvial gravel and soil is mixed with water to create a liquid slurry called "puddle" which has a density in the 1.3 to 1.5 g/cm3 range. The mix is stirred in the pan by angled rotating "teeth". The heavier minerals, or "concentrate", settle to the bottom and are pushed toward an extraction point, while lighter waste remains suspended and overflows out of the centre of the pan as a separate stream of material. The concentrate, representing just a small percentage of the original kimberlite ore or alluvial gravels, is drawn off for final recovery of the diamonds.

Both methods are in actual fact used for bulk material reduction and require a further process for the final diamond recovery however, for this project the Rotary Pan will be used.

When it comes to dust suppression two main methods were considered, namely molasses stillage and the wetting (water) of roads. The table below provides a short summary of the advantages and disadvantages of each.

Water	Molasses stillage
More cost effective	Much more expensive
Could lead to the depleting of water resources	Requires less water
No damage (only if used excessively)	The product may be toxic to aquatic organisms. (As this product could have physical effects on aquatic organisms for e.g. floating, osmotic damage)
No harm to humans or animals(Only a high quantity will have harm to humans or animals)	Not Hazardous or toxic. Could cause irritation to eyes, skin or when ingested and inhaled.
Non-flammable	Non-flammable
Eye-wash fountains not needed	Eye-wash fountains in the work place are strongly recommended
	Working procedures should be designed to minimize worker exposure to this product.
Basic storing methods	Storing methods are a bit more complicated. Should be stored in a plastic, plastic lined or stainless steel, tight closed containers between 5 and 40 degrees Centigrade.

Considering the above mentioned information, water will be used for dust suppression purposes.

i) Details of all alternatives considered.

With reference to the site plan provided as Appendix 4 and the location of the individual activities on site, provide details of the alternatives considered with respect to:

- (a) the property on which or location where it is proposed to undertake the activity;
- (b) the type of activity to be undertaken;
- (c) the design or layout of the activity;
- (d) the technology to be used in the activity;
- (e) the operational aspects of the activity; and
- (f) the option of not implementing the activity.

Consideration of alternatives

The DEAT 2006 guidelines on 'assessment of alternatives and impacts' proposes the consideration of four types of alternatives namely, the no-go, site, activity, and technology alternatives. It is however, important to note that the regulation and guidelines specifically state that only 'feasible' and 'reasonable' alternatives should be explored. It also recognizes that the consideration of alternatives is an iterative process of feedback between the developer, the EAP and Interested and affected parties, which in some instances culminates in a single preferred project proposal. The following sections explore each type of alternative in relation to the proposed activity.

Location alternatives

This alternative asks the question, if there is not, from an environmental perspective, a more suitable location for the proposed activity. No other properties have been secured by PGL Boerdery (Pty) Ltd in the Schweizer - Reneke area to potentially mine diamonds alluvial, diamonds general and diamonds. Also it is expected that the diamonds alluvial, diamonds general and diamonds have been deposited on this farm and therefore the applicant would like to commence with their prospecting activities.

The proposed development falls within an area consisting of consist of grazing land and cultivated land, historical mining (diggings) & tributaries from the hartsrivier and 2 dams. The National Department of Agriculture (2006) classified land capability into two broad categories, namely Arable land (Classes I - IV) and non-arable land (Classes V - VIII). The site falls within Class 4 & 5 - which are arable & non-arable, which is limited in terms of crop production. The site has moderate potential grazing, (refer to figure 3 below and **Appendix 5** for an illustration of the land capability classification).

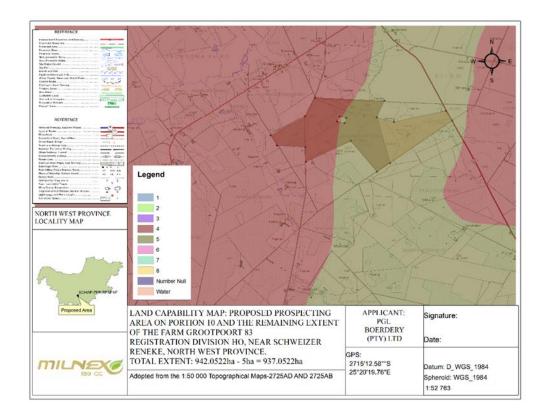


Figure 3: Land Capability Map

Activity alternatives

The environmental impact assessment process also needs to consider if the development of an alluvial diamond mine would be the most appropriate land use for the particular site.

Prospecting of other commodities – Outstanding rehabilitation was visible on the site, but from the surface and desktop assessment there are no indications that there are other commodities to be mined on the site, except alluvial diamond, diamonds general and diamonds.

Agriculture – Due to the site being arable & non-arable, in terms of crop production, the most of the portions of the property is not preferred. It can however be used for low density cattle crazing and small scale agriculture.

Design and layout alternatives

Design alternatives were considered throughout the planning and design phase (i.e. where is the diamond bearing gravel located?). In this regard discussions on the design were held between the EAP and the developer. The layout follows the limitations of the site and aspects such as, roads, site offices and workshop area as well as fencing—refer **Appendix 3**.

Operational alternatives

Due to the nature of the prospecting activities, no permanent services in terms of water supply, electricity, or sewerage services are required.

The activities will commence with a site investigation and desktop studies, which will comprise of non-invasive techniques. This manner of survey will ensure that the applicant can clearly delineate areas which are suitable for further investigation and no unnecessary surface disturbance will be undertaken.

Based on the outcome of the desktop studies and site investigation, pits will be dug by an excavator for the purpouse of soil sampling. If gravel is found, the applicant will determine the the composition and quality of the gravel.

The applicant will proceed with this way of prospecting by means of the open cast/trenching method, simultaneously or after pitting depending on the information obtained from the earlier work done. The trenches will be dug to remove and wash the gravel. It will be washed by a 10-18 feet washing pan to determine diamond proceeds per 100 tons of gravel.

All data will be consolidated and processed to determine the diamond bearing resources on the property. This will be a continuous process throughout the prospecting work programme.

No feasible alternatives to the pitting and trenching method currently exists. Impacts associated with the prospecting operations will be managed through the implementation of a management plan, developed as part of the application for authorisation.

No-go alternative

This alternative considers the option of 'do nothing' and maintaining the status quo. The description provided in section H of this report could be considered the baseline conditions (status quo) to persist should the no-go alternative be preferred. The site is currently zoned for agricultural land uses. Should the proposed activity not proceed, the site will remain unchanged and will continue to be used for low density cattle and game grazing.

ii) Details of the Public Participation Process Followed

Describe the process undertaken to consult interested and affected parties including public meetings and one on one consultation. NB the affected parties must be specifically consulted regardless of whether or not they attended public meetings. (Information to be provided to affected parties must include sufficient detail of the intended operation to enable them to assess what impact the activities will have on them or on the use of their land.

1. Advertisement and Notices

Newspaper advertisement

An advertisement was placed in English in the local newspaper (Stellalander) on the 16 March 2016 (see **Appendix 6**) notifying the public of the EIA process and requesting Interested and Affected Parties (I&APs) to register with, and submit their comments to Milnex 189 CC. I&APs were given the opportunity to raise comments within 30 days of the advertisement.

Site notices

Site notices was placed on site in English to inform surrounding communities and immediately adjacent landowners of the proposed development on the 6th April 2016. I&APs were given the opportunity to raise comments. Photographic evidence of the site notices is included in **Appendix** 6.

Direct notification and circulation of Scoping Report to identified I&APs

Identified I&APs, including key stakeholders representing various sectors, are directly informed of the proposed development and the availability of the Scoping Report via registered post on 11 March 2016 and were requested to submit comments by 13 April 2016. A copy of the report is also available at the Milnex offices, Schweizer-Reneke and Potchefstroom, from 7:30 – 17:00, Monday to Friday. For a complete list of stakeholder details and for proof of registered post see **Appendix 6**. The consultees included:

- North West Department of Economic Development, Environment, Conservation and Tourism (NWDEDECT)
- The Department of Rural, Environmental and Agricultural Development (READ), North West
- The Department of Water & Sanitation (DWS)
- The Department of Mineral Resources
- The North West Department of Agriculture
- The Provincial Heritage Resources Agency (PHRA), North West
- The Wildlife and Environment Society of South Africa (WESSA)
- The Dr. Ruth Segomotsi Mompati District Municipality
- The Municipal Manager at the Mamusa Local Municipality
- The Local Councilor at the Mamusa Local Municipality
- The North West Department of Public Works, Roads and Transport
- NW Department of Rural Development & Land Reform: Land Restitution Support
- South African National Roads Agency (SANRAL)

It is expected from I&APs to provide their inputs and comments within 30 days after receipt of the notification or Scoping Report.

Direct notification of surrounding land owners and occupiers

Written notices and the availability of the Scoping Report are also provided to all surrounding land owners and occupiers on 11 March 2016. The surrounding land owners are given the opportunity to raise comments by 13 April 2016. For a list of surrounding land owners see **Appendix 6**.

Consultation

All I&AP's are invited to attend the public meeting scheduled for 6 April 2016 at the Milnex Offices, 4 Botha Street, Schweizer-Reneke, North-West province for 09:00am–10:00am. This venue was chosen as the farm is only 10 km away from the arranged venue. The public meeting is an opportunity to share information regarding the proposed development and provide I&APs with an opportunity to raise any issues and provide comments. An advertisement will be placed in English in the local newspaper (Stellalander) to notify the public of the public meeting. The following key stakeholders and surrounding land owners are also directly informed of the public meeting via registered post 11 March 2016:

 North West Department of Economic Development, Environment, Conservation and Tourism (NWDEDECT)

- The Department of Rural, Environmental and Agricultural Development (READ), North West
- The Department of Water & Sanitation (DWS)
- The Department of Mineral Resources
- The North West Department of Agriculture
- The Provincial Heritage Resources Agency (PHRA), North West
- The Wildlife and Environment Society of South Africa (WESSA)
- The Dr. Ruth Segomotsi Mompati District Municipality
- The Municipal Manager at the Mamusa Local Municipality
- The Local Councilor at the Mamusa Local Municipality
- The North West Department of Public Works, Roads and Transport
- NW Department of Rural Development & Land Reform: Land Restitution Support
- South African National Roads Agency (SANRAL)
- Land Owner 1: Carlizan CC
- Land Owner 2: PGL Boerdery (Pty) Ltd.
- Muller van der Merwe Trust
- Van Zyl Broers Oersonskraal CC
- Elizabeth Helena Scholtz
- Hendrik Petrus Jacobus Viljoen
- Johann Frederik Scholtz
- JNM Trust (Jacques Nicolaas Moolman Margareta Isabella Moolman)

The public meeting was held at the Milnex Offices, 4 Botha Street, Schweizer-Reneke, North-West province for 09:00am–10:00am and the attendees where Ms. Anica & Jansje.

Circulation of EIR

The following registered I&APs and State Department were informed via a written notice, on the 14 June 2016 until 15 July 2016 and informed about the availability of the EIR (refer to Appendix 6)

- North West Department of Economic Development, Environment, Conservation and Tourism (NWDEDECT)
- The Department of Rural, Environmental and Agricultural Development (READ), North West
- The Department of Water & Sanitation (DWS)
- The Department of Mineral Resources
- The North West Department of Agriculture
- The Provincial Heritage Resources Agency (PHRA), North West
- The Wildlife and Environment Society of South Africa (WESSA)
- The Dr. Ruth Segomotsi Mompati District Municipality
- The Municipal Manager at the Mamusa Local Municipality
- The Local Councilor at the Mamusa Local Municipality
- The North West Department of Public Works, Roads and Transport
- NW Department of Rural Development & Land Reform: Land Restitution Support
- South African National Roads Agency (SANRAL)
- Land Owner 1: Carlizan CC
- Land Owner 2: PGL Boerdery (Pty) Ltd.
- Muller van der Merwe Trust

- Van Zyl Broers Oersonskraal CC
- Elizabeth Helena Scholtz
- Hendrik Petrus Jacobus Viljoen
- Johann Frederik Scholtz
- JNM Trust (Jacques Nicolaas Moolman Margareta Isabella Moolman)

3. <u>Issues Raised by Interested and Affected Parties</u>

All comments will be recorded in the comments & response report & also in the table below (Appendix 6)

iii) Summary of issues raised by I&APs (Complete the table summarising comments and issues raised, and reaction to those responses)

Interested and Affe List the names of person column, and Mark with an X where the	s consulted in this	Date Comments Received	Issues raised	EAPs response to issues as mandated by the applicant	Section and paragraph reference in this report where the issue and or response where incorporated
consulted were in fa					moorporatou
Organisation	Contact person				
Land Owner					
Grootpoort RE/83	Land Owner: Carlizan CC			Email dated 06/04/2016 states that Mr G. Badenhorst could not attend the public meeting thus the PowerPoint presentations and request for comments letter were attached to the email.	
Grootpoort 10/83	Land Owner PGL Boerdery (Pty) Ltd.		No comments so far		
Landowners or lawful occup	iers on adjacent prope	rties			
Grootpoort 7/83	Muller van der Merwe Trust		No comments so far		
Grootpoort 2/83	Van Zyl Broers Oersonskraal CC		No comments so far		
Grootpoort 4/83 Mimosa 40/61 Vaalpoort 3/84	PGL Boerdery (Pty) Ltd.		No comments so far		
Grootpoort 5/83 & 16/83	Elizabeth Helena Scholtz		No comments so far		
Grootpoort 3/83, Vaalpoort 12/84	Hendrik Petrus Jacobus Viljoen		No comments so far		

F		ı		I	
3	Johann Frederik		No comments so far		
	Scholtz				
Mimosa 37/61	JNM Trust		No comments so far		
	Jacques Nicolaas				
	Moolman				
	Margareta Isabella				
	Moolman				
The Municipality in which juriso		ont is located			
Marriage Legal Municipality		lent is located	No commente de for		
	Municipal Manager:		No comments so far		
	Mr Ruben Gincane				
Municipal councilor of the ward		located			
	Councilor:		No comments so far		
	Ward 6				
Organs of state having jurisdic	tion				
	Ouma Skosana		No comments so far		
Development, Environment,					
Conservation and Tourism					
Conservation and Tourism					
The Department of Water	Mrs. Nosie Mazwi		No comments so far		
	and Mr. Abe				
	Abrahams				
	Ms. Lebo Diale		No comments so far		
NW Department of Agriculture	IVIS. LEDO DIAIE		No comments so iai		
Provincial Heritage Resources	Mr. Motlhabane		No comments so far		
	Mosiane		TWO COMMINICATES SO TAI		
Agency (FTIKA) North West	WOSIANE				
Department of Public Works,	HOD: Ms.		No comments so far		
	Mulangaphuma				
	Mr. Pieter Swart	20/04/2016	Letter received 20/04/2016, acknowledges		
Resources – North West		_5,5 ,,25 ,5			
11030d1003 - 1101til 1100st			receipt of application.		
Department of Rural,	Mr. Robert				
	Nemanashi				
Development, North West					

Milnex 189 CC: EIA065 – Draft EIR & EMPr: Prospecting Right Application of diamonds alluvial & diamonds general on the farm Catharina 44 and farm Honesty 43, Registration Division HN, North West Province

South African National Roads Agency (SANRAL)	To whom it may concern			
NW Department of Rural Development & Land Reform: Land Restitution Support	Chief Director: Mr. L.J. Bogatsu	Letter dated 17/03/2016, acknowledges receipt of possible land claims enquiry and if any additional information is required, Ms. K.W. Mothupi can be contacted.	Emails dated 16/03/2016, 07/04/2016 and 18/04/2016 are proof of land claims consultation.	
Other-				
Dr Ruth Segomotsi Mompati	The Municipal			
District Municipality	Manager: Mr.			
	Tshetlho			
WESSA	Mr. Lemson Petha			

iv) The Environmental attributes associated with the sites

(1) Baseline Environment

The baseline environment is described with specific reference to geotechnical conditions, ecological habitat and landscape features, Soil, land capability and agricultural potential, climate and the visual landscape.

(a) Type of environment affected by the proposed activity.

(its current geographical, physical, biological, socio- economic, and cultural character).

From the geological map, the following geological information is obtained:

Ra: Tholelitic and calc-alkaline basalt and andesite; tuff and pyroclastic breccia

Classification

The allanridge formation underlies the Bothaville Formation conformably but where the latter pinches out the Allanridge verstemps onto diverse older lithologies.

The formation consists mainly of two types of lava, i.e. a dark-green amygdaloidal lava and light green-grey porphyritic lava.

Mineralogy

The dark-green lava, which is by far the most prominent unit in the Allanridge formation, also constitutes the greater part of the Ventersdorp supergroup in the area. The lava is fine to medium grained in texture and the plagioclase and augite in it have been replaced by secondary minerals, such as chlorite, eqidote, calcite sericite and uralite. The amygdales in the lava consist of quartz, chalcedony, calcite, chlorite or eqidote, or any combination of these minerals. Where more than one mineral makes up an amygdale, the minerals commonly form concetric zones.

Sedimentary Rocks

The sedimentary rocks of the Allanridge formation consist of a mixture of tuff, agglomerate and volcanic breccia occur interbedded with the lava towards the top of the formation

Ecological habitat and landscape features

In terms of vegetation type the site falls within the Schweizer-Reneke Bushveld Vegetation type (Mucina and Rutherford, 2006). **See figure 4 below and appendix 7**

The Schweizer-Reneke Bushveld vegetation type is described by Mucina and Rutherford (2006) as 'endangered. The Schweizer-Reneke Bushveld vegetation covers the North West Province Schweizer-Reneke area in the east to Amalia in the west and from the farming areas of around Broedersput in the north to Never Mind (Christiana District) in the South Africa. This Bushveld is situated on an altitude of 1250m – 1400m. The region is characterised by plains, slightly undulating plains and some hills, supporting open woodland with a fairly dense shrub layer, with Acacia erioloba, A. karroo, A. tortilis, Rhus lancea trees and A. hebeclada, Diospyros lycioides, Grewia flava, Tarchonanthus camphoratus shrubs. However, this site has little to none vegetation cover due to historical mining practices.

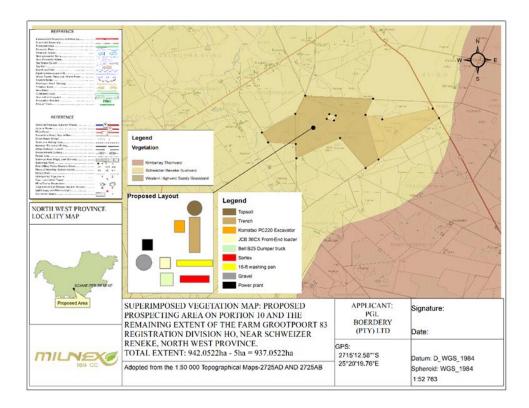


Figure 4: Vegetation Unit Map

According to the protected areas map, the proposed prospecting right area does not fall within any protected areas however it falls within the Schweizer-Reneke Bushveld threatened ecosystem. Below figure 5 depicts areas which are protected areas map.

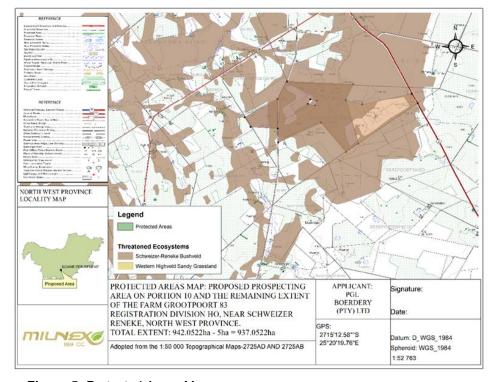


Figure 5: Protected Areas Map

Land capability and agricultural potential

Climate and water availability

The Mamusa Local Municipality (LM) normally receives about 393 to 600mm of rain per year, with most rainfall occurring during mid-summer. It receives the lowest rainfall (0mm) in June and the highest (81mm) in January. The monthly distribution of average daily maximum temperatures shows that the average midday temperatures for Mamusa LM range from 18°C in June to 31°C in January. The municipal area is the coldest during June when the temperature drops to 0°C on average at night. The municipal area is semi-arid, with occasional hail and frost. The area receives variable rain with scattered thunder storms and flooding. During hot summers there is high evaporation and elevated temperatures (Mamusa LM IDP, 2014/2015: 22).

Agricultural / land capability

Land capability is the combination of soil suitability and climate factors. The site and surrounds has a land capability classification, on the 8 category scale, of Class 4 &5 – which are arable & non-arable, which is limited in terms of crop production. The site has moderate potential grazing (refer to Land capability map on figure 6 and attached as Appendix 5).

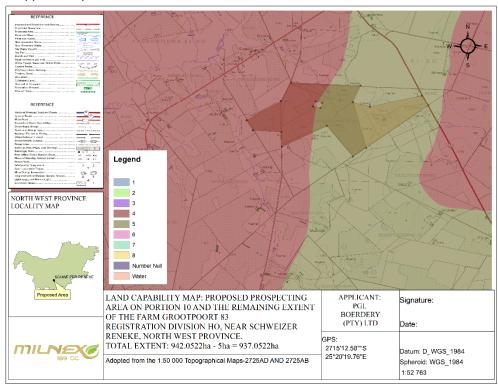


Figure 6: Land capability Map

Critical Biodiversity Area

According to B-GIS "Critical biodiversity areas (CBAs) are areas of the landscape that need to be maintained in a natural or near-natural state in order to ensure the continued existence and functioning of species and ecosystems and the delivery of ecosystem services", therefore the purpose of CBA's is simply to indicate spatially the location of critical or

important areas for biodiversity in the landscape.

According to the map below, the proposed farm portions falls within both CBA type 1 & under CBA type 2.

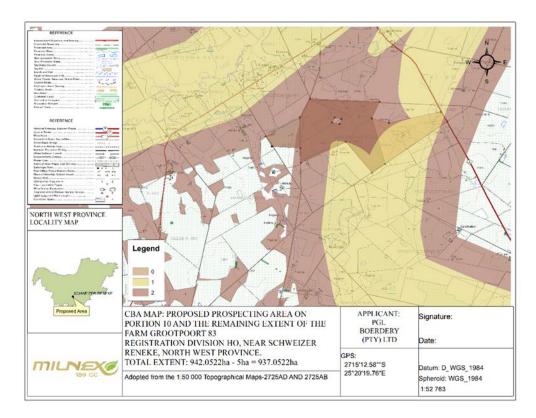


Figure 6: Critical Biodiversity Area Map

Description of the socio-economic environment

Socio-economic conditions

According to the 2014/1 Mamusa Local Municipality's IDP review the municipal area comprises a total area of 3 681 km². The land mass is 7.8% of the total area of the Dr. Ruth S Mompati District Municipality. The administrative Centre of the municipality is in the rural area of Schweizer-Reneke situated on the banks of the Harts River and at the foot of Mamusa hills in the North-West Province. The town of Schweizer-Reneke is the only town in Mamusa Local Municipality `and surrounded by agricultural farms. The municipal area covers the central part of the Southern District municipal area and neighbors the following municipalities: Lekwa-Teemane Local Municipality, Naledi Local Municipality and Greater Taung Local Municipality.

According to census 2011, The Mamusa municipality has a total population of 60 355, this however only contributes only 13% to the total population of the Dr. Ruth S Mompati District Municipality which population totals at 463 815 people. The Global Insight survey 2009 indicated that the population was 48 465 within the Mamusa Local Municipality. The population of MLM is thus increasing and this could be attributed by migration of people from other surrounding local municipalities.

Statistic SA 2011 depicts that the Africans are in majority and constitute about 55195 people of the total population of Mamusa LM. The Whites population group is about 3330 of the total population of Mamusa LM, Coloureds constitute 1356 of the total population of Mamusa LM and the total number of Asians is 290 of the total population of Mamusa LM.

African gender groups dominate the demographic profile of the Mamusa LM. African females are in the majority at 47.4% of the population, followed by African males at 45.6%. White females are dominating at 2.2% compared to the coloureds females at 1.1%. The number of white males is lower at 2.1% and the coloureds males are currently at 0.2%. There is an increase in the Indian/ Asian population at 0.4% overall and this can be attributed to business opportunities within local sector.

According to the Water and Sanitation Backlog study Report of 2007, the total number of households in MLM was 13,676 as compared to 14,968 from the 2001 census and 14,310 as reported by Census 2011 households.

The household structure is measured by the number of households and the average household size. The following describes the household structure. In total there were 14,625 households in MLM. With a total population of 60355, this gives an average household size of 4.9, about 5 people per household.

The Gross Domestic measures the total amount of goods and services produced in a region. The total Gross Domestic Product of MLM in 2009 was R948 461. Gross Domestic Products for Mamusa LM is highly depended on various sectors which include but not limited to Agriculture and hunting, Construction, wholesale, retail, sale and repairs of motor vehicles, restaurants, land and water transport, education, finance, real estates, health and social work and public administration activities. These are some of the sectors highlighted which contribute positively to the growth of Mamusa LM's GDP.

Cultural and heritage aspects

Special attention was given to the identification of possible cultural or heritage resources on site. Proof of such aspects did not occur. However heritage resources including archaeological and paleontological sites over 100 years old, graves older than 60 years, structure older than 60 years are protected by the National Heritage Resources Act no 25 of 1999. Therefore if such resources are found during the prospecting or development activities, they will not be disturbed without a permit from the relevant heritage resource Authority, which means that before such sites are disturbed by development, the developer will ensure that a heritage impact assessment is done and the Provincial Heritage Resources Authority and SAHRA will be contacted immediately.

The habitation of the larger geographical area took place since Early Stone Age times, especially in the region of the Vaal River. However, the biggest legacy dating to the Stone Age are the numerous sites with rock engravings found in the larger region. Some of the farms in the Christiana region known to have rock engravings are the Townlands and Twaalfkameelbomen, to mention but a few. As yet, no sites dating to the Early Iron Age have been reported from the region and most sites date to the Late Iron Age. According to Breutz (1959) stone walled sites dating to the Late Iron Age and which can be linked to the Tswana occupation of the area, are found on a number of farms in the region, e.g. Waai Hoek and Brul Pan. However, the historic most important one, named Dithakong, is

located some distance to the north-west. This site was first visited by early travellers such as Lichtenstein and John Campbell in the early part of the 19th century.

Schweizer-Reneke was formerly part of the old Transvaal province. Founded on 1 October 1888, the town is situated on the banks of the Harts River, with six regional roads exiting the town. The town is named after Captain C.A. Schweizer and Field Cornet C.N. Reneke. Both men distinguished themselves and were among the ten soldiers killed while storming the stronghold of the Khoi Koi Koranna Khoe and their chief David Massouw on the nearby Mamusa Hill on 2 December 1885 during an action to put an end to cattle rustling in the area. The remains of the stone fortifications of Chief David Massouw can still be seen on Mamusa Hill. (Raper 2004).

(b) Description of the current land uses.

The site survey revealed that land uses on and in the immediate vicinity of the proposed development are essentially comprised of crop cultivation and grazing land.

(c) Description of specific environmental features and infrastructure on the site.

The proposed farm portions consist of grazing land and cultivated land, historical mining (diggings) & tributaries from the hartsrivier and 2 dams.

(d) Environmental and current land use map.

(Show all environmental, and current land use features)

A Locality map is attached in **Appendix 3**.

v) Impacts and risks identified including the nature, significance, consequence, extent, duration and probability of the impacts, including the degree to which these impacts

(Provide a list of the potential impacts identified of the activities described in the initial site layout that will be undertaken, as informed by both the typical known impacts of such activities, and as informed by the consultations with affected parties together with the significance, probability, and duration of the impacts. Please indicate the extent to which they can be reversed, the extent to which they may cause irreplaceable loss of resources, and can be avoided, managed or mitigated).

Significance of potential impacts

The following sections present the outcome of the significance rating exercise. The results suggest that almost none of the key issues identified as part of the EIR process had a negative high environmental significance. Instead the overall score indicate a low environmental significance score.

INITIAL CLEARANCE AND SITE PREPARATION PHASE

Direct impacts: During this phase minor negative impacts are foreseen over the short term. The latter refers to a period of weeks. The site preparation may result in the loss or fragmentation of indigenous natural fauna and flora, loss or fragmentation of habitats, soil erosion, hydrology, and temporary noise disturbance, generation of waste, visual

intrusions, increase in heavy vehicle traffic, and risk to safety, livestock and farm infrastructure, and increased risk of veld fires. The abovementioned impacts are discussed in more detail below:

<u>Loss or fragmentation of indigenous natural fauna and flora</u> In terms of vegetation type the site falls within the Schweizer-Reneke Bushveld Vegetation type (Mucina and Rutherford, 2006) (Mucina and Rutherford, 2006).

The Schweizer-Reneke Bushveld vegetation type is described by Mucina and Rutherford (2006) as 'endangered. The Schweizer-Reneke Bushveld vegetation covers the North West Province Schweizer-Reneke area in the east to Amalia in the west and from the farming areas of around Broedersput in the north to Never Mind (Christiana District) in the South Africa. This Bushveld is situated on an altitude of 1250m – 1400m. The region is characterised by plains, slightly undulating plains and some hills, supporting open woodland with a fairly dense shrub layer, with Acacia erioloba, A. karroo, A. tortilis, Rhus lancea trees and A. hebeclada, Diospyros lycioides, Grewia flava, Tarchonanthus camphoratus shrubs. However, this site has little to none vegetation cover due to historical mining practices..

Loss or fragmentation of indigenous natural fauna and flora	Pre-mitigation impact rating	Post mitigation impact rating	
Status (positive or negative)	Negative	Negative	
Extent	Site (1)	Site (1)	
Probability	Definite (4)	Definite (4)	
Duration	Medium term (2)	Medium term (2)	
Magnitude	Medium (2)	Low (1)	
Reversibility	Partly reversible (2)	Partly reversible (2)	
Irreplaceable loss of resources	Significant loss of resource (3)	, J	
Cumulative impact	Negligible cumulative impacts (1), since the pitting and trenching will only be 0.172ha at any given time in extent per year.		
Significance	Negative low (26)	Negative low (12)	
Can impacts be mitigated?	ensure that no mamma trapped, hunted or kil approved, every effort st footprint to the blocks a and have the least po surrounding area. The E	approved, contractors must alian species are disturbed, led. If the development is nould be made to confine the llocated for the development essible edge effects on the MPr also provides numerous fer to section (f) of the EMPr.	
	loss of farmland should aspects that should be contained. The site should	sociated with damage to and be effectively mitigated. The overed include: be fenced off prior to onstruction activities;	

- The footprint associated with the construction related activities (access roads, construction platforms, workshop etc.) should be confined to the fenced off area and minimised where possible; An Environmental Control Officer (ECO) should be appointed to monitor the establishment phase of the construction phase; All areas disturbed by construction related activities, such as access roads on the site, construction platforms, workshop area etc., should be rehabilitated at the end of the construction phase: The implementation of a rehabilitation programme should be included in the terms of reference for the contractor/s appointed. Specifications for the rehabilitation are provided throughout the EMPr section (f) of the EMPr. The implementation of the Rehabilitation Programme should be monitored by the ECO.
 - <u>Loss or fragmentation of habitats</u> Given the low probability of resident threatened species occurring at the footprint site, the low probability of any significant conservation corridor or buffer zone at the footprint site. If it deems necessary a Water Use License Application will be lodged. The site proposed for development could be viewed as less sensitive in the region.

Loss or fragmentation of habitats	Pre-mitigation impact rating	Post mitigation impact rating	
Status (positive or negative)	Negative	Negative	
Extent	Site (1)	Site (1)	
Probability	Definite (4)	Definite (4)	
Duration	Medium term (2)	Medium term (2)	
Magnitude	Low (1)	Low (1)	
Reversibility	Partly reversible (2)	Partly reversible (2)	
Irreplaceable loss of resources	Marginal loss of resource (2)	Marginal loss of resource (2)	
Cumulative impact	Negligible cumulative impacts (1), since the pitting and trenching will only be 0.72 Ha in extent per year.		
Significance	Negative low (12)	Negative low (12)	
Can impacts be mitigated?	to establish, if the develoexotic and invasive plant so continuous eradication so development is approved, exconfine the footprint to development – section (f)	pecies should not be allowed pment is approved. Where pecies are found at the site hould take place. If the very effort should be made to the blocks allocated for of the EMPr also provides res related to fauna and flora.	

Loss of topsoil – Topsoil may be lost due to poor topsoil management (burial, erosion, etc.) during construction related soil profile disturbance (levelling, excavations,

disposal of spoils from excavations etc.) The effect will be the loss of soil fertility on disturbed areas after rehabilitation.

Loss of topsoil	Pre-mitigation impact rating	Post mitigation impact rating
Status (positive or negative)	Negative	Negative
Geographical extent	Site (1)	Site (1)
Probability	Possible (2)	Unlikely (1)
Duration	Medium term (2)	Medium term (2)
Magnitude	High (3)	Medium (2)
Reversibility	Partly reversible (2)	Partly reversible (2)
Irreplaceable loss of resources	Marginal (2)	Marginal (2)
Cumulative impact	Medium cumulative impacts	(3)
Significance	Negative medium (36)	Negative low (22)
Can impacts be mitigated?	The following mitigation or provided: If an activity will surface in any topsoil should entire surface spreading durin Topsoil stockp against losse establishing veg Dispose of al excavations who undisturbed lan During rehability must be even disturbed surface Erosion must necessary on to the disturbed surface is disturbed. Establish an effective record area where soil is disturbed. These records should be performance reports, and slibelow. Record the GPS	management measures are I mechanically disturb below way, then any available first be stripped from the and stockpiled for re- g rehabilitation. biles must be conserved s through erosion by getation cover on them. Il subsurface spoils from here they will not impact on d. ation, the stockpiled topsoil ly spread over the entire be. be controlled where by soiled areas. I'd keeping system for each for constructional purposes. included in environmental mould include all the records S coordinates of each area. For topsoil stripping. S coordinates of where the biled. date of cessation of for operational) activities at te. e area on cessation of

 Photograph the area on completion of rehabilitation and on an annual basis thereafter to show vegetation establishment and evaluate progress of restoration over time.
Section (f) of the EMPr also provide mitigation measures related to topsoil management.

<u>Soil erosion</u> – Soil erosion due to alteration of the land surface run-off characteristics. Alteration of run-off characteristics may be caused by construction related land surface disturbance, vegetation removal and the establishment of roads. Erosion will cause loss and deterioration of soil resources. The erosion risk is low due to the low slope gradients and low to moderate erodibility of the soils.

Soil erosion	Pre-mitigation impact rating	Post mitigation impact rating
Status (positive or negative)	Negative	Negative
Geographical extent	Site (1)	Site (1)
Probability	Possible (2)	Unlikely (1)
Duration	Medium term (2)	Medium term (2)
Magnitude	Medium (2)	Medium (2)
Reversibility	Partly reversible (2)	Partly reversible (2)
Irreplaceable loss of resources	Marginal (2)	Marginal (2)
Cumulative impact	Negligible cumulative impact (1).	
Significance	Negative low (20)	Negative low (18)
Can impacts be mitigated?	The following mitigation or management measures are provided: Implement an effective system of run-off control, where it is required, that collects and safely disseminates run-off water from all hardened surfaces and prevents potential down slope erosion.	
	Include periodical site inspection in environmental performance reporting that inspects the effectiveness of the run-off control system and specifically records the occurrence any erosion on site or downstream – refer to section (f) of the EMPr	

 <u>Temporary noise disturbance</u> - Preparation activities will result in the generation of noise over a period of months. Sources of noise are likely to include vehicles, the use of machinery such as back actors and people working on the site. The noise impact is unlikely to be significant; but activities should be limited to normal working days and hours (6:00 – 18:00).

Temporary noise disturbance	Pre-mitigation impact rating	Post mitigation impact rating
Status (positive or negative)	Negative	Negative
Extent	Local (2)	Local (2)
Probability	Definite (4)	Probable (3)
Duration	Short term (1)	Short term (1)

Magnitude	Medium (2)	Low (1)
Reversibility	Completely reversible (1)	Completely reversible (1)
Irreplaceable loss of resources	No loss of resource (1)	No loss of resource (1)
Cumulative impact	The impact would result in negligible to no cumulative effects (1).	
Significance	Negative low (20)	Negative low (9)
Can impacts be mitigated?	Yes, management actions related to noise pollution are included in section (f) of the EMPr.	

Generation of waste - general waste, construction waste, sewage and grey water
 The workers on site are likely to generate general waste such as food wastes, packaging, bottles, etc. Construction waste is likely to consist of packaging, scrap metals, waste cement, etc If any). The applicant will need to ensure that general and construction waste is appropriately disposed of i.e. taken to the nearest licensed landfill. Sufficient ablution facilities will have to be provided, in the form of portable/VIP toilets. No pit latrines, French drain systems or soak away systems shall be allowed.

Generation of waste	Pre-mitigation impact rating	Post mitigation impact rating
Status (positive or negative)	Negative	Negative
Extent	Local/district (2)	Local/district (2)
Probability	Definite (4)	Definite (4)
Duration	Short term (1)	Short term (1)
Magnitude	Low (1)	Low (1)
Reversibility	Partly reversible (2)	Partly reversible (2)
Irreplaceable loss of resources	No loss of resource (1)	No loss of resource (1)
Cumulative impact	Medium cumulative impact (3) - An additional demand for landfill space could result in significant cumulative impacts if services become unstable or unavailable, which in turn would negatively impact on the local community.	
Significance	Negative medium (13)	Negative low (13)
Can impacts be mitigated?	Yes, it is therefore important that all management actions and mitigation measures included in section (f) of the EMPr are implemented.	

- Impacts on heritage objects No sites, features or objects of cultural significance were found in the study area, and that there would be no impact as a result of the proposed development.
- In terms of the National Heritage Resource Act no 25 of 1999. Heritage resources including archaeological and paleontological sites over 100 years old, graves older than 60 years, structure older than 60 years are protected. They may not be disturbed without a permit from the relevant heritage resource Authority, which means that before such sites are disturbed by development it is incumbent on the developer to ensure that a heritage impact assessment is done and the Provincial Heritage Resources Authority and SAHRA must be contacted immediately and work will stop

Impacts on heritage objects	Pre-mitigation impact rating	Post mitigation impact rating
Status (positive or negative)	Negative	Negative
Extent	Site (1)	Site (1)
Probability	Possible (2)	Possible (2)
Duration	Short term (1)	Short term (1)
Magnitude	Medium (2)	Low (1)
Reversibility	Irreversible (4)	Irreversible (4)
Irreplaceable loss of resources	Marginal loss of resource	Marginal loss of resource
	(2)	(2)
Cumulative impact	Low cumulative impact (2). Should these impacts occur,	
	there may be a cumulative impact on the preservation of	
	heritage objects in the area.	
Significance	Negative low (24)	Negative low (12)
Can impacts be mitigated?	If archaeological sites or graves are exposed during construction work, it should immediately be reported to a	
		that an investigation and
	,	e made. Also refer to section
	(f) of the EMPr.	c made. Also refer to section

Indirect impacts: The nuisance aspects generally associated with the installation of infrastructure or ground preparation will also be applicable to this development, which relates primarily to the increase in vehicle traffic associated with prospecting practices, the influx of job seekers to the area, risk to safety, livestock and farm infrastructure, and increased risk of veld fires.

• Increase in vehicle traffic – The movement of heavy vehicles during the clearance of vegetation and topsoil has the potential to damage local farm roads and create dust and safety impacts for other road users in the area. Access will be obtained from gravel road off the R34. While the volume of traffic along this road is low, the movement of heavy vehicles along this road is likely to damage the road surface and impact on other road users. The contractor should be required to ensure that damage to the road is repaired periodically. The movement of additional heavy vehicle traffic is will add significantly to the current traffic load on the road. The impact on the R34 is therefore likely to be moderate.

Increase in vehicle traffic	Pre-mitigation impact rating	Post mitigation impact rating
Status (positive or negative)	Negative	Negative
Extent	Local (2)	Local (2)
Probability	Probable (3)	Probable (3)
Duration	Short term (1)	Short term (1)
Magnitude	High (3)	Medium (2)
Reversibility	Completely reversible (1)	Completely reversible (1)
Irreplaceable loss of resources	No loss of resource (1)	No loss of resource (1)
Cumulative impact	Medium cumulative impact (3). If damage to roads is not repaired then this will affect the farming activities in the area and result in higher maintenance costs for vehicles of local farmers and other road users. The costs will be	

	borne by road users who were no responsible for the damage.	
Significance	Negative medium impacts Negative low (11) (33)	
Can impacts be mitigated?	The potential impacts associated with heavy vehicles can be effectively mitigated. The mitigation measures include:	
	 The contractor must ensure that damage caused by construction on the gravel road of the R34 is repaired. The costs associated with the repair must be borne by the contractor; Dust suppression measures must be implemented for heavy vehicles such as wetting of gravel roads on a regular basis and ensuring that vehicles used to transport sand and building materials are fitted with tarpaulins or covers; All vehicles must be road-worthy and drivers must be qualified and made aware of the potential road safety issues and need for strict speed limits. 	
	Also refer section (f) of the EMPr. For mitigation measures related to traffic.	

Risk to safety, livestock and farm infrastructure - The presence on and movement of
workers on and off the site poses a potential safety threat to local famer's and farm
workers in the vicinity of the site threat. In addition, farm infrastructure, such as fences
and gates, may be damaged and stock losses may also result from gates being left
open and/or fences being damaged or stock theft linked either directly or indirectly to
the presence of farm workers on the site.

Risk to safety, livestock and	Pre-mitigation impact	Post mitigation impact
farm infrastructure	rating	rating
Status (positive or negative)	Negative	Negative
Extent	Local (2)	Local (2)
Probability	Probable (3)	Probable (3)
Duration	Short term (1)	Short term (1)
Magnitude	Medium (2)	Low (1)
Reversibility	Completely reversible (1)	Completely reversible (1)
Irreplaceable loss of resources	No loss of resource (1)	No loss of resource (1)
Cumulative impact	Negligible cumulative effects (1), provided losses are	
	compensated for.	
Significance	Negative low (22)	Negative low (11)
Can impacts be mitigated?	Key mitigation measures include:	
	PGL Boerdery (Pty) Ltd should enter into an	
	agreement with the local farmers in the area	
	whereby damages to far	m property etc. during the

- construction phase will be compensated for. The agreement should be signed before the construction phase commences;
- The construction area should be fenced off prior to the commencement of the construction phase. The movement of construction workers on the site should be confined to the fenced off area;
- Contractors appointed by PGL Boerdery (Pty) Ltd should provide daily transport for low and semiskilled workers to and from the site. This would reduce the potential risk of trespassing on the remainder of the farm and adjacent properties;
- PGL Boerdery (Pty) Ltd should hold contractors liable for compensating farmers in full for any stock losses and/or damage to farm infrastructure that can be linked to construction workers. This should be contained in the Code of Conduct to be signed between the proponent, the contractors and neighbouring landowners. The agreement should also cover loses and costs associated with fires caused by construction workers or construction related activities (see below);
- The Environmental Management Programme (EMPr) should outline procedures for managing and storing waste on site, specifically plastic waste that poses a threat to livestock if ingested;
- Contractors appointed PGL Boerdery (Pty) Ltd must ensure that all workers are informed at the outset of the construction phase of the conditions contained on the Code of Conduct, specifically consequences of stock theft and trespassing on adjacent farms.
- Contractors appointed by PGL Boerdery (Pty) Ltd must ensure that construction workers who are found guilty of trespassing, stealing livestock and/or damaging farm infrastructure are dismissed and charged. This should be contained in the Code of Conduct. All dismissals must be in accordance with South African labour legislation;
- The housing of construction workers on the site should be strictly limited to security personnel (if any).
- Increased risk of veld fires The presence of construction workers and construction-related activities on the site poses an increased risk of grass fires that could in turn pose a threat to livestock, crops, wildlife and farmsteads in the area. In the process, farm infrastructure may also be damaged or destroyed and human lives threatened. The potential risk of grass fires was heightened by the windy conditions in the area, especially during the dry, windy winter months from May to October. In terms of potential mitigation measures, a fire-break should be constructed around

the perimeter of the site prior to the commencement of the construction phase. In addition, fire-fighting equipment should be provided on site during the construction phase.

Increased risk of veld fires	Pre-mitigation impact rating	Post mitigation impact rating
Status (positive or negative)	Negative	Negative
Extent	Region (3)	Local (2)
Probability	Probable (3)	Probable (3)
Duration	Medium term (2)	Short term (1)
Magnitude	High (3)	Low (1)
Reversibility	Completely reversible (1)	Completely reversible (1)
Irreplaceable loss of resources	No loss of resource (1)	No loss of resource (1)
Cumulative impact	Negligible cumulative effects compensated for.	s (1), provided losses are
Significance	Negative medium (33)	Negative low (9)
Can impacts be mitigated?	No loss of resource (1) No loss of resource (1) Negligible cumulative effects (1), provided losses are compensated for.	

OPERATIONAL PHASE

Direct impacts: During the operational phase the study area will serve as an prospecting area and the impacts are generally associated with soil erosion, change in land use, impacts associated with the, increase in storm water runoff, increased

consumption of water, visual intrusion, the generation of general waste, leakage of hazardous materials, and the change in the sense of place. The operational phase will also have a direct positive impact through the provision of permanent employment opportunities and facilitating a positive economic growth. The abovementioned impacts are discussed in more detail below:

<u>Soil erosion</u> – The largest risk factor for soil erosion will be during the operational phase
when the prospecting activity ensues and soil is left bare until rehabilitation is initiated.
Erosion will be localised within the site. This will ultimately lead to the irretrievable
commitment of this resource. The measurable effect of reducing erosion by utilizing
mitigation measures may reduce possible erosion significantly.

Soil erosion	Pre-mitigation impact rating	Post mitigation impact rating
Status (positive or negative)	Negative	Negative
Extent	Local/Regional (2)	Local/Regional (2)
Probability	Definite (4)	Unlikely (1)
Duration	Long term (3)	Long term (3)
Magnitude	High (3)	Medium (2)
Reversibility	Partly reversible (2)	Partly reversible (2)
Irreplaceable loss of resources	Significant loss of	Marginal loss of resource
	resource (3)	(2)
Cumulative impact	Medium cumulative impact	(3). Should these impacts
	occur, there will be a cumulative impact on the air and	
	water resources in the study area in terms of pollution.	
Significance	Negative High (51)	Negative Low (26)
Can impacts be mitigated?	Yes, to avoid soil erosion it will be a good practice to not remove all the vegetation at once but to only clear the area as it becomes necessary and to implement concurrent rehabilitation.	
	Also refer to section (f) of th	e EMPr.

<u>Change in land-use</u> – The use of the area for the operation of the prospecting activity
will result in the area not being used for livestock grazing anymore. The impact on farm
income due to the loss of grazing will be more than offset by the income from PGL
Boerdery (Pty) Ltd

Change in land use	Pre-mitigation impact rating	Post mitigation impact rating
Status (positive or negative)	Negative	Negative
Extent	Site (1)	Site (1)
Probability	Definite (4)	Definite (4)
Duration	medium term (2)	medium term (2)
Magnitude	Low (1)	Low (1)
Reversibility	Completely reversible (1)	Completely reversible (1)
Irreplaceable loss of resources	Marginal loss of resource (2)	Marginal loss of resource (2)
Cumulative impact	Negligible cumulative impacts (1).	

Significance	Negative low (10)	Negative low (10)
Can impacts be mitigated?	Fund to be used to rehad proposed facility has be fund should be funded by the operational phase of for the establishment of based on the experience	establish a Rehabilitation abilitate the area once the een decommissioned. The revenue generated during the project. The motivation f a Rehabilitation Fund is in the mining sector where have not set aside sufficient commissioning.
	Also refer to section (f) of	of the EMPr.

 Generation of alternative land use income – Income generated through the alluvial diamond mine will provide the farming enterprise with increased cash flow and rural livelihood, and thereby improve the financial sustainability of farming on site.

Generation of alternative land use income	Pre-mitigation impact rating	Post mitigation impact rating
Status (positive or negative)	Positive	Positive
Geographical extent	Site (1)	Site (1)
Probability	Definite (4)	Definite (4)
Duration	Long term (3)	Long term (3)
Magnitude	Medium (2)	Medium (2)
Reversibility	Completely reversible (1)	Completely reversible (1)
Irreplaceable loss of resources	No loss of resources (1)	No loss of resources (1)
Cumulative impact	Low cumulative impact (2).	
Significance	Positive Low (24)	Positive Low (24)
Can impacts be mitigated?	No mitigation required.	

 <u>Increase in storm water runoff</u> – The development will potentially result in an increase in storm water run-off that needs to be managed to prevent soil erosion, especially where vegetation will be cleared. Not all the vegetation should be removed at once. Only the specific trench being excavated at the specific time should be cleared.

Increase in storm water runoff	Pre-mitigation impact rating	Post mitigation impact rating
Status (positive or negative)	Negative	Negative
Extent	Local (2)	Local (2)
Probability	Probable (3)	Unlikely (1)
Duration	Long term (3)	Long term (3)
Magnitude	Medium (2)	Low (1)
Reversibility	Partly reversible (2)	Partly reversible (2)
Irreplaceable loss of resources	Marginal loss of	Marginal loss of resource
	resource (2)	(2)
Cumulative impact	Medium cumulative impact (3) - Should these	
	impacts occur, there wil	I be a cumulative impacts
	on the wider area.	
Significance	Negative medium (30)	Negative low (13)

Can impacts be mitigated?	Yes. It is therefore important that all management
	actions and mitigation measures included in section
	(f) of the EMPr. are implemented to ensure that
	these impacts do not occur

 Increased consumption of water - Approximately 10 000-36 000 liters of water per hour will be required for the washing of the gravel in the rotary pan. The water will be sourced from groundwater sources.

Increased consumption of water	Pre-mitigation impact rating	Post mitigation impact rating
Status (positive or negative)	Negative	Negative
Extent	Region (3)	Region (3)
Probability	Definite (4)	Definite (4)
Duration	Long term (3)	Long term (3)
Magnitude	Medium (2)	Medium (2)
Reversibility	Irreversible (4)	Irreversible (4)
Irreplaceable loss of resources	Marginal loss of	Marginal loss of
	resources (2)	resources (2)
Cumulative impact	High cumulative impacts (4) - An additional demand on water sources could result in a significant cumulative impact with regards to the availability of water.	
Significance	Negative medium (40)	Negative medium (40)
Can impacts be mitigated?	Yes, management actions and mitigation measures related to the use of water are included in section (f) of the EMPr.	

Generation of waste – Approximately 15 Workers will be present on site from 6:00 – 18:00, Monday to Saturday. Sources of general waste will be waste food, packaging, paper, etc. General waste will be stored on the site and removed on a weekly basis by a contractor.

Generation of waste	Pre-mitigation impact rating	Post mitigation impact rating
Status (positive or negative)	Negative	Negative
Extent	Local (2)	Local (2)
Probability	Definite (4)	Definite (4)
Duration	Long term (3)	Long term (3)
Magnitude	Low (1)	Low (1)
Reversibility	Partly reversible (2)	Partly reversible (2)
Irreplaceable loss of resources	No loss of resource (1)	No loss of resource (1)
Cumulative impact	Medium cumulative impact (3) - An additional demand for landfill space could result in significant cumulative impacts with regards to the availability of landfill space.	
Significance	Negative low (15)	Negative low (15)
Can impacts be mitigated?	Yes, management ac management are include	tions related to waste d in section (f) of the EMPr.

 <u>Leakage of hazardous materials</u> - The proposed prospecting activity will make use of machinery that use fuel and oil. Leakage of these oils and fuel can contaminate water supplies and must be prevented by constructing oil and diesel permeable bunds to ensure that any spills are suitably attenuated and not released into the environment.

Leakage of hazardous materials	Pre-mitigation impact rating	Post mitigation impact rating
Status (positive or negative)	Negative	Negative
Extent	Local (2)	Local (2)
Probability	Possible (2)	Unlikely (1)
Duration	Long term (3)	Long term (3)
Magnitude	High (3)	Medium (2)
Reversibility	Partly reversible (2)	Partly reversible (2)
Irreplaceable loss of resources	Marginal loss of	Marginal loss of
	resource (2)	resource (2)
Cumulative impact	The impact would resu	ult in negligible to no
	cumulative effects (1)	
Significance	Negative medium (36)	Negative low (22)
Can impacts be mitigated?	Yes. It is therefore important that all management	
	actions and mitigation measures included in the	
	section (f) of EMPr are implemented to ensure that	
	these impacts do not occu	ır.

Noise disturbance - Prospecting activities will result in the generation of noise over a period of 3-5 years. Sources of noise are likely to include vehicles, the use of machinery such as backactors, rotary pans and people working on the site, as well as occasional blasting. The noise impact is unlikely to be significant as the closest homestead is more than 1km from the site; but prospecting activities should be limited to normal working days and some Saturdays and hours (6:00 – 18:00).

Temporary noise disturbance	Pre-mitigation impact rating	Post mitigation impact rating
Status (positive or negative)	Negative	Negative
Extent	Local (2)	Local (2)
Probability	Definite (4)	Probable (3)
Duration	Medium term (2)	Medium term (2)
Magnitude	Medium (2)	Low (1)
Reversibility	Completely reversible (1)	Completely reversible (1)
Irreplaceable loss of resources	No loss of resource (1)	No loss of resource (1)
Cumulative impact	The impact would result in negligible to no cumulative	
	effects (1).	
Significance	Negative low (22)	Negative low (10)
Can impacts be mitigated?	Yes, management actions related to noise pollution	
	are included in section (f) of the EMPr.	

Indirect impacts: The operational phase will have an indirect negative impact through the change in the sense of place and an indirect positive impact through the provision of additional electrical infrastructure.

• Potential impact on tourism – The tourism sector is regarded as an important economic sector in the NWP and MLM. The tourism potential of the area is linked to the areas natural resources, including the relatively undisturbed scenery and landscape. The impact of the proposed prospecting of diamond alluvial on the areas sense of place with mitigation is likely to be low. In addition, the site will be visible from the R34. The impact of the proposed mine on the tourism potential of the area and the MLM and NWP is therefore likely to be low.

Potential impacts on tourism	Pre-mitigation impact rating	Post mitigation impact rating
Status (positive or negative)	Negative	Negative
Extent	Site (1)	Site (1)
Probability	Possible (2)	Possible (2)
Duration	Medium term (2)	Medium term (2)
Magnitude	Low (1)	Low (1)
Reversibility	Completely reversible (1)	Completely reversible (1)
Irreplaceable loss of resources	N/a	N/a
Cumulative impact	N/a	
Significance	Negative low (6)	Negative low (6)
Can impacts be mitigated?	No mitigation required	

DECOMMISIONING PHASE (MINE CLOSURE AND REHABILITATION)

Direct impacts: Typically, the major social impacts associated with the decommissioning phase are linked to the loss of jobs and associated income. This has implications for the households who are directly affected, the communities within which they live. If infrastructures are removed after a 3/5 year period, the site will be returned to its natural state. Therefore the physical environment will benefit from the closure of the prospecting area.

 Rehabilitation of the physical environment – The physical environment will benefit from the closure of the prospecting area since the site will be restored to its natural state.

Rehabilitation of the physical	Pre-mitigation impact	Post mitigation impact
environment	rating	rating
Status (positive or negative)	Positive	Positive
Extent	Site (1)	Site (1)
Probability	Possible (2)	Probable (3)
Duration	Long term (3)	Long term (3)
Magnitude	Low (1)	Medium (2)
Reversibility	N/A	N/A
Irreplaceable loss of resources	N/A	N/A
Cumulative impact	The impact would result in negligible to no cumulative effects (1)	
Significance	Negative low (7)	Negative low (16)
Can impacts be mitigated?	No mitigation measures	required.

<u>Loss of employment</u> - Given the relatively large number of people employed during the
operational phase, the decommissioning of the facility has the potential to have a negative
social impact on the local community.

Loss of employment	Pre-mitigation impact rating	Post mitigation impact rating
Status (positive or negative)	Negative	Negative
Extent	Local (2)	Local (2)
Probability	Possible (2)	Possible (2)
Duration	Medium term (2)	Short term (1)
Magnitude	High (3)	Medium (2)
Reversibility	Partly reversible (2)	Partly reversible (2)
Irreplaceable loss of resources	No loss of resource (1)	No loss of resource (1)
Cumulative impact	The impact would resu	ılt in negligible to no
	cumulative effects (1)	
Significance	Negative medium (30)	Negative low (18)
Can impacts be mitigated?	The following mitigate recommended:	ation measures are
	the proposed facility s transported off-site on • PGL Boerdery (Pty) Environmental Rehal	Ltd should establish an pilitation Trust Fund to decommissioning and

Indirect impacts: No indirect impacts are anticipated from the decommissioning phase of the proposed development.

vi) Methodology used in determining and ranking the nature, significance, consequences, extent, duration and probability of potential environmental impacts and risks; (Describe how the significance, probability, and duration of the aforesaid identified impacts that were identified through the consultation process was determined in

order to decide the extent to which the initial site layout needs revision).

Method of environmental assessment

The environmental assessment aims to identify the various possible environmental impacts that could results from the proposed development. Different impacts need to be evaluated in terms of its significance and in doing so highlight the most critical issues to be addressed.

Significance is determined through a synthesis of impact characteristics which include context and intensity of an impact. Context refers to the geographical scale i.e. site, local, national or global whereas intensity is defined by the severity of the impact e.g. the magnitude of deviation from background conditions, the size of the area affected, the

duration of the impact and the overall probability of occurrence. Significance is calculated as shown in the Table below.

Significance is an indication of the importance of the impact in terms of both physical extent and time scale, and therefore indicates the level of mitigation required. The total number of points scored for each impact indicates the level of significance of the impact.

Impact Rating System

Impact assessment must take account of the nature, scale and duration of impacts on the environment whether such impacts are positive or negative. Each impact is also assessed according to the following project phases:

- Construction
- Operation
- Decommissioning

Where necessary, the proposal for mitigation or optimisation of an impact should be detailed. A brief discussion of the impact and the rationale behind the assessment of its significance should also be included. The rating system is applied to the potential impacts on the receiving environment and includes an objective evaluation of the mitigation of the impact. In assessing the significance of each impact the following criteria is used:

Table: The rating system

Table. The falling system			
NAT	NATURE		
Include a brief description of the impact of environmental parameter being assessed in the			
	context of the project. This criterion includes a brief written statement of the environmental		
aspe	ct being impacted upon by a part	icular action or activity.	
GEO	GRAPHICAL EXTENT		
This	is defined as the area over which	the impact will be experienced.	
1	Site The impact will only affect the site.		
2	Local/district	Will affect the local area or district.	
3	Province/region	Will affect the entire province or region.	
4	International and National	Will affect the entire country.	
PRO	BABILITY		
This	describes the chance of occurrer	nce of an impact.	
1	Unlikely	The chance of the impact occurring is extremely low	
		(Less than a 25% chance of occurrence).	
2	Possible	The impact may occur (Between a 25% to 50%	
		chance of occurrence).	
3	Probable	The impact will likely occur (Between a 50% to 75%	
		chance of occurrence).	
4	Definite	Impact will certainly occur (Greater than a 75%	
	chance of occurrence).		
DURATION			
This describes the duration of the impacts. Duration indicates the lifetime of the impact as a			
result of the proposed activity.			
1	Short term	The impact will either disappear with mitigation or will	
		be mitigated through natural processes in a span	

	Madium tarm	shorter than the construction phase (0 – 1 years), or the impact will last for the period of a relatively short construction period and a limited recovery time after construction, thereafter it will be entirely negated (0 – 2 years).
2	Medium term	The impact will continue or last for some time after the construction phase but will be mitigated by direct human action or by natural processes thereafter (2 – 10 years).
3	Long term	The impact and its effects will continue or last for the entire operational life of the development, but will be mitigated by direct human action or by natural processes thereafter (10 – 30 years).
4	Permanent	The only class of impact that will be non-transitory. Mitigation either by man or natural process will not occur in such a way or such a time span that the impact can be considered indefinite.
	SITY/ MAGNITUDE	
	pes the severity of an impact.	Improved affects the smalling use and integrably of the
1	Low	Impact affects the quality, use and integrity of the system/component in a way that is barely perceptible.
2	Medium	Impact alters the quality, use and integrity of the system/component but system/component still continues to function in a moderately modified way and maintains general integrity (some impact on integrity).
3	High	Impact affects the continued viability of the system/ component and the quality, use, integrity and functionality of the system or component is severely impaired and may temporarily cease. High costs of rehabilitation and remediation.
4	Very high	Impact affects the continued viability of the system/component and the quality, use, integrity and functionality of the system or component permanently ceases and is irreversibly impaired. Rehabilitation and remediation often impossible. If possible rehabilitation and remediation often unfeasible due to extremely high costs of rehabilitation and remediation.
	RSIBILITY	
	escribes the degree to which an proposed activity.	impact can be successfully reversed upon completion
1	Completely reversible	The impact is reversible with implementation of minor mitigation measures.
2	Partly reversible	The impact is partly reversible but more intense mitigation measures are required.
3	Barely reversible	The impact is unlikely to be reversed even with intense mitigation measures.

4	Irreversible	The impact is irreversible and no mitigation measures
IDDEDI	ACEABLE LOSS OF RESOU	exist.
		resources will be irreplaceably lost as a result of a
	d activity.	resources will be irreplaceably lost as a result of a
1	No loss of resource	The impact will not result in the loss of any resources.
2	Marginal loss of resource	The impact will result in marginal loss of resources.
3	Significant loss of resources	The impact will result in significant loss of resources.
4	Complete loss of resources	The impact is result in a complete loss of all resources.
CUMUL	ATIVE EFFECT	
		the impacts. A cumulative impact is an effect which in
itself ma	y not be significant but may be	ecome significant if added to other existing or potential
impacts question	-	or diverse activities as a result of the project activity in
1	Negligible cumulative	The impact would result in negligible to no cumulative
	impact	effects.
2	Low cumulative impact	The impact would result in insignificant cumulative effects.
3	Medium cumulative impact	The impact would result in minor cumulative effects.
4	High cumulative impact	The impact would result in significant cumulative effects
SIGNIFI	CANCE	
indication therefore impact u	n of the importance of the impa e indicates the level of mitigat ses the following formula:	synthesis of impact characteristics. Significance is an act in terms of both physical extent and time scale, and ion required. The calculation of the significance of an
,	+ probability + reversibility · de/intensity.	+ irreplaceability + duration + cumulative effect) x
value w		will produce a non-weighted value. By multiplying this e resultant value acquires a weighted characteristic a significance rating.
Points	Impact significance rating	Description
6 to 28	Negative low impact	The anticipated impact will have negligible negative effects and will require little to no mitigation.
6 to 28	Positive low impact	The anticipated impact will have minor positive effects.
29 to 50	Negative medium impact	The anticipated impact will have moderate negative effects and will require moderate mitigation measures.

29 to 50	Positive medium impact	The anticipated impact will have moderate positive effects.
51 to 73	Negative high impact	The anticipated impact will have significant effects and will require significant mitigation measures to achieve an acceptable level of impact.
51 to 73	Positive high impact	The anticipated impact will have significant positive effects.
74 to 96	Negative very high impact	The anticipated impact will have highly significant effects and are unlikely to be able to be mitigated adequately. These impacts could be considered "fatal flaws".
74 to 96	Positive very high impact	The anticipated impact will have highly significant positive effects.

vii) The positive and negative impacts that the proposed activity (in terms of the initial site layout) and alternatives will have on the environment and the community that may be affected.

(Provide a discussion in terms of advantages and disadvantages of the initial site layout compared to alternative layout options to accommodate concerns raised by affected parties)

- Increased ambient noise levels resulting from geophysic surveys site flyovers and increased traffic movement during all prospecting phases.
- Potential water and soil pollution impacts resulting from hydrocarbon spills and soil erosion which may impact on environmental resources utilized by communities, landowners and other stakeholders.
- Potential water and soil pollution impacts resulting from hydrocarbon spills and soil erosion which may impact on ecosystem functioning.
- Increased vehicle activity with in the area resulting in the possible destruction and disturbance of fauna and flora.
- Poor access control to farms which may impact on cattle movement, breeding and grazing practices.
- Influx of persons (job seekers) to site as a result of increased activity and the possible resultant increase in opportunistic crime.
- Potential visual impacts caused by prospecting activities.
- Prospecting will be undertaken by specialist sub contractors and it is not anticipated that employment opportunities for local and / or regional communities will result from the prospecting activities.

viii) The possible mitigation measures that could be applied and the level of risk.

(With regard to the issues and concerns raised by affected parties provide a list of the issues raised and an assessment/ discussion of the mitigations or site layout alternatives available to accommodate or address their concerns, together with an assessment of the impacts or risks associated with the mitigation or alternatives considered).

No adverse environmental or social impacts associated with the prospecting activity have been identified through the Scoping & EIR process. Mitigation measures as set out in the Environmental Management Programme (EMPr)

attached in Part B must be implemented in order to minimise any potential impacts.

All comments received during the review period of the Scoping and EIR report, as well as response provided is captured and recorded within the Comments and Response Report and will be attached in the final EIR.

ix) Motivation where no alternative sites were considered.

This alternative asks the question, if there is not, from an environmental perspective, a more suitable location for the proposed activity. No other properties have been secured by PGL Boerdery (Pty) Ltd in the Schweizer-Reneke to potentially prospect for alluvial diamonds. From a local perspective, on the farm Grootpoort 83 is preferred due to the sites underlying diamond & alluvial diamond bearing gravel, therefore there will be no other alternative (i.e. to facilitate the movement of machinery, equipment, infrastructure).

x) Statement motivating the alternative development location within the overall site. (Provide a statement motivating the final site layout that is proposed)

Design alternatives were considered throughout the planning and design phase (i.e. where is the rock bed located?). In this regard discussions on the design were held between the EAP and the developer. The layout follows the limitations of the site and aspects such as, roads, site offices and workshop area as well as fencing.

d) Full description of the process undertaken to identify, assess and rank the impacts and risks the activity will impose on the preferred site (In respect of the final site layout plan) through the life of the activity. (Including (i) a description of all environmental issues and risks that erer identified during the environmental impact assessment process and (ii) an assessment of the significance of each issue and risk and an indication of the extent to which the issue and risk could be avoided or addressed by the adoption of mitigation measures.)

Process for the identification of key issues

The methodology for the identification of key issues aims, as far as possible, to provide a user-friendly analysis of information to allow for easy interpretation.

- <u>Checklist</u>: The checklist consists of a list of structured questions related to the environmental parameters and specific human actions. They assist in ordering thinking, data collection, presentation and alert against the omission of possible impacts.
- Matrix: The matrix analysis provides a holistic indication of the relationship and interaction between the various activities, development phases and the impact thereof on the environment. The method aims at providing a first order cause and effect relationship between the environment and the proposed activity. The matrix is designed to indicate the relationship between the different stressors and receptors which leads to specific impacts. The matrix also indicates the specialist studies, which will be submitted as part of the Environmental Impact Report in order to address the potentially most significant impacts.

Checklist analysis

The site visit was conducted to ensure a proper analysis of the site specific characteristics of the study area. The table below provides a checklist, which is designed to stimulate thought regarding possible consequences of specific actions and so assist scoping of key issues. It consists of a list of structured questions related to the environmental parameters and specific human actions. They assist in ordering thinking, data collection, presentation and alert against the omission of possible impacts. The table highlights certain issues, which are further analysed in matrix format.

Table: Environmental checklist

QUESTION	YES	NO	Un-	Description
			sure	·
1. Are any of the following located on the site of		ed for th	ne develop	
I. A river, stream, dam or wetland	×			The proposed farm portions consist of grazing land and cultivated land, historical mining (diggings) & tributaries from the hartsrivier and 2 dams. Where applicable a Water Use License Application will be launched
				for conducting prospecting
II. A conservation or open space area		×		operations. None.
III. An area that is of cultural importance		×		None but if such objects should be
				found while prospecting, the prospecting activities will stop immediately and a specialist will be appointed to conduct further studies.
IV. Site of geological significance		×		None.
V. Areas of outstanding natural beauty		×		None.
VI. Highly productive agricultural land		×		None.
VII. Floodplain		×		None.
VIII. Indigenous forest		×		None.
IX. Grass land		×		None.
X. Bird nesting sites		×		None.
XI. Red data species		×		None.
XII. Tourist resort		×		None.
2. Will the project potentially result in potent	ial?			
I. Removal of people		×		None.
II. Visual Impacts	×			The visual impact will be managed
III. Noise pollution		×		The noise impact is unlikely to be significant.
IV. Construction of an access road		×		None. Access will be obtained from gravel road off the R34
V. Risk to human or valuable ecosystems due to explosion/fire/ discharge of waste into water or air.		×		None.

VI. Accumulation of large workforce (>50 manual workers) into the site.		×	Approximately 15 employment opportunities will be created during the construction and operational phase of the project.
VII. Utilisation of significant volumes of local raw materials such as water, wood etc.	×		10-18 washing pans which utilise approximately 10 000 - 36 000 L per hour each from which 30% is reused.
VIII. Job creation		×	Approximately 15 employment opportunities will be created during the construction and operational phase of the project.
IX. Traffic generation		×	None.
X. Soil erosion		×	Only areas earmarked for prospecting will be cleared. The prospecting will be phased and the topsoil stockpiled separately. Concurrent rehabilitation will take place. The soil also has a low erosion potential.
XI. Installation of additional bulk telecommunication transmission lines or facilities		×	None.
3. Is the proposed project located near the fo	llowing	?	
I. A river, stream, dam or wetland	×		Yes, the hartsrivier
II. A conservation or open space area		×	None.
III. An area that is of cultural importance		×	None.
IV. A site of geological significance		×	None.
V. An area of outstanding natural beauty		×	None.
VI. Highly productive agricultural land		×	None.
VII. A tourist resort		×	None.
VIII. A formal or informal settlement		×	None.

Matrix analysis

The matrix describes the relevant listed activities, the aspects of the development that will apply to the specific listed activity, a description of the environmental issues and potential impacts, the significance and magnitude of the potential impacts, and the mitigation of the potential impacts. The matrix also highlights areas of particular concern, which requires more in depth assessment. Each cell is evaluated individually in terms of the nature of the impact, duration and its significance – should no mitigation measures be applied. This is important since many impacts would not be considered insignificant if proper mitigation measures were implemented. The matrix also provides an indication if mitigation measures are available.

In order to conceptualise the different impacts the matrix specify the following:

• **Stressor**: Indicates the aspect of the proposed activity, which initiates and cause impacts on elements of the environment.

• **Receptor**: Highlights the recipient and most important components of the environment affected by the stressor.

 Impacts: Indicates the net result of the cause-effect between the stressor and receptor.

• **Mitigation**: Impacts need to be mitigated to minimise the effect on the environment.

Matrix Analysis

LISTED ACTIVITY	ASPECTS OF THE DEVELOPMENT	POTENTIAL IMPACTS			SIGNIFICANCE AND MAGNITUDE OF POTENTIAL IMPACTS		TENTIAL	MITIGATION OF POTENTIAL IMPACTS	SPECIALIST STUDIES		
(The Stressor)	/ACTIVITY		Receptors	Impact description	Minor	Major	Duration	Possible Mitigation	/ INFORMATION		
				CONSTRUCTION PHASE							
<u>Listing Notice GNR 984, Activity</u> <u>15</u> :"The clearance of an area of 20 hectares or more, of indigenous vegetation."	Site clearing and preparation Areas earmarked for prospecting will need to be cleared, topsoil will be stockpiled separately.		Fauna & Flora	 Loss or fragmentation of indigenous natural vegetation. Loss of sensitive species. Loss or fragmentation of habitats. 		-	S	Yes	-		
			Air	 Air pollution due to the increase of traffic of construction vehicles. 	-		S	Yes	-		
		ONMENT	Soil	 Soil degradation, including erosion. Loss of topsoil. Disturbance of soils and existing land use (soil compaction). 		-	S	Yes	-		
		BIOPHYSICAL EN	Geology	It is not foreseen that the removal of indigenous vegetation will impact on the geology or vice versa.		-	S	Yes	-		
			BIOPHYS	ВІОРНУЗ	Existing services infrastructure	 Generation of waste that need to be accommodated at a licensed landfill site. Generation of sewage that need to be accommodated by the local sewage plant. 		-	S	Yes	-
					Ground water	Pollution due to construction vehicles.	-		S	Yes	-
			Surface water	 Increase in storm water run-off. Pollution of water sources due to soil erosion. Destruction of watercourses (pans/dams/streams). 		-	S	Yes	-		
		MENT	Local unemployment rate	Job creation.Business opportunities.Skills development.		+	S	Yes	-		
		IC ENVIRON	Visual landscape	 Potential visual impact on residents of farmsteads and motorists in close proximity to proposed facility. 	-		S	Yes	-		
		SOCIAL/ECONOMIC ENVIRONMENT	Traffic volumes	Increase in construction vehicles.	-		S	Yes	-		
		SOCIA	Health & Safety	 Air/dust pollution. Road safety. Increased risk of veld fires. 		-	S	Yes	-		

			Noise levels	The generation of noise as a result of construction vehicles, the use of machinery such as drills and people working on the site. S	Yes	-											
			Tourism industry	Since there are no tourism facilities in close proximity to the site, the proposed activities will not have an impact on tourism in the area. N/A N/A N/A	N/A	-											
			Heritage resources	 Removal or destruction of archaeological and/or paleontological sites. Removal or destruction of buildings, structures, places and equipment of cultural significance. Removal or destruction of graves, cemeteries and burial grounds. 	Yes	Yes, attached as Appendix 11											
Listing Notice GNR 984, Activity 15:"The clearance of an area of 20 hectares or more, of indigenous vegetation."	Site clearing and preparation Areas earmarked for prospecting will need to be cleared, topsoil will be stockpiled separately. This will inevitably result in the removal of		Fauna & Flora	 Loss or fragmentation of indigenous natural vegetation. Loss of sensitive species. Loss or fragmentation of habitats. 	Yes	-											
	indigenous vegetation located on the site.		Air quality	Air pollution due to the increase of traffic. S	Yes	-											
		BIOPHYSICAL ENVIRONMENT	Soil	 Soil degradation, including erosion. Disturbance of soils and existing land use (soil compaction). Loss of agricultural potential (low significance relative to agricultural potential of the site). 	Yes	-											
			SICAL ENVI	SICAL ENV	Geology	It is not foreseen that the removal of indigenous vegetation will impact on the geology or vice versa. N/A N/A N/A	N/A	-									
			Existing services infrastructure	 Generation of waste that need to be accommodated at a licensed landfill site. Generation of sewage that need to be accommodated by the local sewage plant. 	Yes	-											
														Ground water	 Pollution due to construction vehicles. S 	Yes	-
			Surface water	 Increase in storm water run-off. Pollution of water sources due to soil erosion. Destruction of watercourses (pans/dams/streams). 	Yes	-											
		MIC T	Local unemployment rate	 Job creation. Skills development. 	N/A	-											
		SOCIAL/ECONOMIC ENVIRONMENT	Visual landscape	Potential visual impact on residents of farmsteads and motorists in close proximity to proposed facility due to dust. S	Yes	-											
		SOC	Traffic volumes	Increase in construction vehicles. S	Yes	-											

			Health & Safety		Air/dust pollution. Road safety.		-	S	Yes	-
			Noise levels	•	The generation of noise as a result of construction vehicles, and people working on the site.	-		S	Yes	-
			Tourism industry	•	Since there are no tourism facilities in close proximity to the site, the proposed activity will not have an impact on tourism in the area.	N/A	N/A	N/A	N/A	-
			Heritage resources		Removal or destruction of archaeological and/or paleontological sites. Removal or destruction of buildings, structures, places and equipment of cultural significance. Removal or destruction of graves, cemeteries and burial grounds.	N/A	N/A	N/A	N/A	-
				OPE	RATIONAL PHASE					
<u>Listing Notice GNR 984, Activity</u> <u>19:</u> "The removal and disposal of minerals contemplated in terms	The key components of the proposed project are described below:		Fauna & Flora	•	Fragmentation of habitats. Establishment and spread of declared weeds and alien invader plants (operations).	-		L	Yes	-
Development Act (Act No. 28 of	of section 20 of the Mineral and Petroleum Resource4s Development Act (Act No. 28 of 2002), including associated infrastructure, structures and earthworks, directly related to prospecting of a mineral resource, including activities for • Supporting Infrastructure - A control facility with basic services such as water and electricity will be constructed on the site and will have an approximate footprint 50m² or less. Other supporting infrastructure includes a site office and workshop area.		Air quality	•	Air pollution due to the prospecting activity, crusher plant and transport of the gravel to the designated areas.	N/A	N/A	N/A	N/A	-
infrastructure, structures and earthworks, directly related to			Soil	•	Soil degradation, including erosion. Disturbance of soils and existing land use (soil compaction). Loss of agricultural potential (low significance relative to agricultural potential of the site).		-	L	Yes	-
issued in terms of section 106 of the Mineral and Petroleum Resources Development Act, 2002 (Act No. 28 of 2002)"	 Roads – Access will be obtained from gravel road off the R34. All site roads will require a width of approximately 10m. Fencing - For health, safety and security reasons, the facility will be required to be fenced off from the surrounding farm. 	SICAL ENVIRONMENT	Geology	•	Collapsible soil. Seepage (shallow water table). Active soil (high soil heave). Erodible soil. The presence of undermined ground. Instability due to soluble rock. Steep slopes or areas of unstable natural slopes. Areas subject to seismic activity. Areas subject to flooding.			S	Yes	-
		BIOPHYSICAL	Existing services infrastructure	•	Generation of waste that need to be accommodated at a licensed landfill site. Generation of sewage that need to be accommodated by the municipal sewerage system and the local sewage plant. Increased consumption of water. Approximately 16 000 L per hour			L	Yes	-
			Ground water	•	Leakage of hazardous materials. The machinery on site require oils and fuel to function. Leakage of these oils and fuels can contaminate water supplies.	-		L	Yes	-
			Surface water	•	Increase in storm water runoff. The development will potentially result in an increase in storm water run-off that needs to be managed to prevent soil erosion. Destruction of watercourses (pans/dams/streams).			L	Yes	-

				Leakage of hazardous materials. The machinery					
				on site require oils and fuel to function. Leakage of these oils and fuels can contaminate water supplies.					
		Local unemployment rate	•	hours every day of the week and general laborers will also be required for the cleaning of the panels.		+	L	Yes	-
	SOCIAL/ECONOMIC ENVIRONMENT	Visual landscape	•	Change in land-use/sense of place. The site is characterized by open veldt with a rural agricultural sense of place. The use of the area for the prospecting activity will result in the area not being used for livestock grazing anymore until rehabilitated.			L	Yes	-
	AIC ENVI	Traffic volumes	•	Increase in vehicles collecting gravel for distribution.	-		S	Yes	-
	ECONON	Health & Safety	•	Air/dust pollution. Road safety.	N/A	N/A	N/A	N/A	-
		Noise levels	•	The proposed development will result in noise pollution during the operational phase.	-	-	S	Yes	-
		Tourism industry	•	Since there are no tourism facilities in close proximity to the site, the decommissioning activities will not have an impact on tourism in the area.	N/A	N/A	N/A	N/A	-
		Heritage resources	•		N/A	N/A	N/A	N/A	-
			DECO	MMISSIONING PHASE					
- Mine closure During the mine closure the Mine and its associated infrastructure will be digmented		Fauna & Flora	DECOM	Re-vegetation of exposed soil surfaces to ensure no erosion in these areas.	+		L	Yes	-
During the mine closure the Mine and its associated infrastructure will be dismantled.			DECOM•	Re-vegetation of exposed soil surfaces to ensure no erosion in these areas. Air pollution due to the increase of traffic of	+		L S	Yes Yes	-
During the mine closure the Mine and its	MENT	Fauna & Flora Air quality Soil	DECOM	Re-vegetation of exposed soil surfaces to ensure no erosion in these areas. Air pollution due to the increase of traffic of construction vehicles. Backfilling of all voids Placing of topsoil on backfill	+ - +		L S L		-
During the mine closure the Mine and its associated infrastructure will be dismantled. Rehabilitation of biophysical environment	IRONMENT	Fauna & Flora Air quality	DECOM	Re-vegetation of exposed soil surfaces to ensure no erosion in these areas. Air pollution due to the increase of traffic of construction vehicles. Backfilling of all voids Placing of topsoil on backfill It is not foreseen that the decommissioning phase	-	N/A	L S L N/A	Yes	- - -
During the mine closure the Mine and its associated infrastructure will be dismantled. Rehabilitation of biophysical environment	310PHYSICAL ENVIRONMENT	Fauna & Flora Air quality Soil	•	Re-vegetation of exposed soil surfaces to ensure no erosion in these areas. Air pollution due to the increase of traffic of construction vehicles. Backfilling of all voids Placing of topsoil on backfill It is not foreseen that the decommissioning phase will impact on the geology of the site or vice versa. Generation of waste that need to be accommodated at the local landfill site. Generation of sewage that need to be accommodated by the municipal sewerage system and the local sewage plant.	-	N/A	L	Yes Yes	- - -
During the mine closure the Mine and its associated infrastructure will be dismantled. Rehabilitation of biophysical environment	BIOPHYSICAL ENVIRONMENT	Fauna & Flora Air quality Soil Geology Existing services	•	Re-vegetation of exposed soil surfaces to ensure no erosion in these areas. Air pollution due to the increase of traffic of construction vehicles. Backfilling of all voids Placing of topsoil on backfill It is not foreseen that the decommissioning phase will impact on the geology of the site or vice versa. Generation of waste that need to be accommodated at the local landfill site. Generation of sewage that need to be accommodated by the municipal sewerage system	-	N/A	L N/A	Yes Yes N/A	- - -
During the mine closure the Mine and its associated infrastructure will be dismantled. Rehabilitation of biophysical environment	BIOPHYSICAL ENVIRONMENT	Fauna & Flora Air quality Soil Geology Existing services infrastructure	•	Re-vegetation of exposed soil surfaces to ensure no erosion in these areas. Air pollution due to the increase of traffic of construction vehicles. Backfilling of all voids Placing of topsoil on backfill It is not foreseen that the decommissioning phase will impact on the geology of the site or vice versa. Generation of waste that need to be accommodated at the local landfill site. Generation of sewage that need to be accommodated by the municipal sewerage system and the local sewage plant. Increase in construction vehicles.	+ N/A	N/A	L N/A	Yes Yes N/A Yes	-
During the mine closure the Mine and its associated infrastructure will be dismantled. Rehabilitation of biophysical environment		Fauna & Flora Air quality Soil Geology Existing services infrastructure Ground water Surface water	•	Re-vegetation of exposed soil surfaces to ensure no erosion in these areas. Air pollution due to the increase of traffic of construction vehicles. Backfilling of all voids Placing of topsoil on backfill It is not foreseen that the decommissioning phase will impact on the geology of the site or vice versa. Generation of waste that need to be accommodated at the local landfill site. Generation of sewage that need to be accommodated by the municipal sewerage system and the local sewage plant. Increase in construction vehicles. Pollution due to construction vehicles. Increase in storm water run-off. Pollution of water sources due to soil erosion. Destruction of watercourses (pans/dams/streams).	+ N/A	N/A	L N/A S	Yes Yes N/A Yes	-
During the mine closure the Mine and its associated infrastructure will be dismantled. Rehabilitation of biophysical environment	SOCIAL/ECONOMI BIOPHYSICAL ENVIRONMENT	Fauna & Flora Air quality Soil Geology Existing services infrastructure Ground water Surface water	•	Re-vegetation of exposed soil surfaces to ensure no erosion in these areas. Air pollution due to the increase of traffic of construction vehicles. Backfilling of all voids Placing of topsoil on backfill It is not foreseen that the decommissioning phase will impact on the geology of the site or vice versa. Generation of waste that need to be accommodated at the local landfill site. Generation of sewage that need to be accommodated by the municipal sewerage system and the local sewage plant. Increase in construction vehicles. Pollution due to construction vehicles. Increase in storm water run-off. Pollution of water sources due to soil erosion. Destruction of watercourses (pans/dams/streams).	+ N/A	N/A	L N/A S	Yes Yes N/A Yes Yes Yes	-

Health 8	 Air/dust pollution. Road safety. Increased crime levels. The presence of mine workers on the site may increase security risks associated with an increase in crime levels as a result of influx of people in the rural area. 	-			Yes	-
Noise le	 The generation of noise as a result of construction vehicles, the use of machinery and people working on the site. 	-		S	Yes	-
Tourism	Since there are no tourism facilities in close proximity to the site, the decommissioning activities will not have an impact on tourism in the area.	N/A	N/A	N/A	N/A	-
Heritage resource		N/A	N/A	N/A	N/A	-

(N/A) No impact (+) Positive Impact (-) Negative Impact (S) Short Term (M) Medium Term (L) Long Term

e) Summary of specialist reports.

(This summary must be completed if any specialist reports informed the impact assessment and final site layout process and must be in the following tabular form):-

LIST OF STUDIES UNDERTAKEN	RECOMMENDATIONS OF SPECIALIST REPORTS	SPECIALIST RECOMMENDATIO NS THAT HAVE BEEN INCLUDED IN THE EIA REPORT (Mark with an X where applicable)	

Specialist Report is attached as **Appendix 11**

f) Environmental impact statement

(i) Summary of the key findings of the environmental impact assessment;

This section provides a summary of the assessment and conclusions drawn from the proposed prospecting area. In doing so, it draws on the information gathered as part of the environmental impact assessment process and the knowledge gained by the environmental consultant during the course of the process and presents an informed opinion on the environmental impacts associated with the proposed project. The following conclusions can be drawn for the proposed prospecting activity:

- Potential impacts on biodiversity: According to the map below, the proposed farm portions falls within both CBA type 1 & under CBA type 2. But through implementing mitigation measures, no adverse impacts are expected.
- ➤ Potential impacts on land use: The farm is currently utilised for cattle and game. The activity which will be subject to concurrent rehabilitation will not have any significant impact on the land use nor will it change the sense of place of the area.
- Potential social impacts: The presence of construction workers poses a potential risk to family structures and social networks. While the presence of construction workers does not in itself constitute a social impact, the manner in which construction workers conduct themselves can impact on local communities. The most significant negative impact is associated with the disruption of existing family structures and social networks.
- ➤ Potential negative impacts: (noise, dust, soil degradation, storm water, traffic, health and safety) associated with the operation of the facility are expected to be of low-medium impact, of medium terms and site specific. These can be mitigated or negated through the implementation of practical and appropriate mitigation measures.
- ➤ Positive impacts: The prospecting of alluvial diamonds and diamonds general will have socio-economic benefit to the area.

All possible negative impacts and risks that have been identified in this report can be effectively mitigated and managed by implementing the migratory measures as set out in the Environmental Management Programme (EMPr) attached in Part B. It is therefore recommended that the environmental authorisation for the prospecting right be granted.

(ii) Final Site Map

Provide a map at an appropriate scale which superimposes the proposed overall activity and its associated structures and infrastructure on the environmental sensitivities of the preferred site indicating any areas that should be avoided, including buffers .Attach as **Appendix 4**

Refer to Locality Map attached in **Appendix 3**.

(iii)Summary of the positive and negative implications and risks of the proposed activity and identified alternatives;

There are regional socio economic benefits due to the alluvial diamonds and general diamonds being prospected in the North West Province and greater knowledge is gained on the mineralogy of South Africa. All possible negative impacts and risks that have been identified in this report can be effectively mitigated and managed by implementing the mitigation measures as set out in the Environmental Management Programme (EMPr) attached in Part B. No significantly adverse social or environmental impacts are anticipated.

g) Proposed impact management objectives and the impact management outcomes for inclusion in the EMPr;

Based on the assessment and where applicable the recommendations from specialist reports, the recording of proposed impact management objectives, and the impact management outcomes for the development for inclusion in the EMPr as well as for inclusion as conditions of authorisation.

Management objectives include:

- Ensure that the prospecting activity does not cause pollution to the environment or harm to persons.
- Minimise production of waste.
- All prospecting activities must be conducted in a manner that minimises noise impact, litter, environmental degradation and health hazards i.e. injuries.
- The mine must be kept neat and tidy during waste handling to prevent unsightliness and accidents.

Expected outcomes include:

- Minimum impacts on the environment as a result of alluvial diamond prospecting.
- Compliance with legislative requirements.
- Mine is neat and tidy and well managed.

h) Final proposed alternatives.

(Provide an explanation for the final layout of the infrastructure and activities on the overall site as shown on the final site map together with the reasons why they are the final proposed alternatives which respond to the impact management measures, avoidance, and mitigation measures identified through the assessment)

This alternative asks the question, if there is not, from an environmental perspective, a more suitable location for the proposed activity. No other properties have been secured by PGL Boerdery (Pty) Ltd in the Schweizer-Reneke to potentially prospect for alluvial diamonds.

From a local perspective, on the farm Grootpoort 83 is preferred due to the sites underlying diamond & alluvial diamond bearing gravel, therefore there will be no other alternative (i.e. to facilitate the movement of machinery, equipment, infrastructure).

i) Aspects for inclusion as conditions of Authorisation.

Any aspects which have not formed part of the EMPr that must be made conditions of the Environmental Authorisation

- The operational activities and relevant rehabilitation of disturbed areas should be monitored against the improved EMPr and all other relevant environmental legislation.
- > A copy of the EMP should be made available onsite at all times.
- > Implementation of the proposed mitigation measures set out in the EMPr.

j) Description of any assumptions, uncertainties and gaps in knowledge.

(Which relate to the assessment and mitigation measures proposed)

The uncertainties in results are mostly related to the availability of information, time available to gather the relevant information as well as the sometimes subjective nature of the assessment methodology. In terms of addressing the key issues the EAP is satisfied that there are no major gaps in knowledge and that the specialist reports provide sufficient information to conduct the significance rating and provide the environmental authority with sufficient information to make an informed decision.

k) Reasoned opinion as to whether the proposed activity should or should not be authorised

i) Reasons why the activity should be authorized or not.

It is the opinion of the EAP that the activity may be authorised.

Based on the outcomes of other diamond mines in the area, the possibility to encounter further Diamond Reserves were identified.

The proposed prospecting area is targeted as, historically, several alluvial diamond and diamond general occurrences are known in the area, and a number of these have been exploited in the past. There are also various alluvial diamond operations within the vicinity of the exploration area.

No other properties have been secured by the applicant and the site is therefore regarded as the preferred site, and alternatives are not considered.

The option of not approving the activities will result in a significant loss to valuable diamond deposits being exploited. And all economic benefits will be lost.

ii) Conditions that must be included in the authorisation

- The operational activities and relevant rehabilitation of disturbed areas should be monitored against the improved EMPr and all other relevant environmental legislation.
- A copy of the EMP should be made available onsite at all times.
- Implementation of the proposed mitigation measures set out in the EMPr.

The EMPr should be binding on all managers and contractors operating/utilizing the site.

(1) Specific conditions to be included into the compilation and approval of EMPr

(2) Rehabilitation requirements

Rehabilitation & Closure Plan is attached as appendix 8

Period for which the Environmental Authorisation is required.

For a minimum of 10 years.

m) Undertaking

Confirm that the undertaking required to meet the requirements of this section is provided at the end of the EMPr and is applicable to both the Basic assessment report and the Environmental Management Programme report.

The undertaking required to meet the requirements of this section is provided at the end of the EMPr and is applicable to both the Environmental Impact Assessment report and the Environmental Management Programme report.

n) Financial Provision

State the amount that is required to both manage and rehabilitate the environment in respect of rehabilitation.

#############

It is envisaged that 100 pits will be dug. It may be less depending on results.

937.0522 hectares – 3m x 2m x 2m pit (100 pits). It is planned that only 20 pits will be excavated in the first year, but it may be more if the process is quicker than planned for. It should be kept in mind that no more than 100 pits will be excavated.

The total area to be disturbed a year will be- 20 pits $x (3m \times 2m) = 0.012Ha$ per year

937.0522 hectares –20m x 10m x 3m trench (40 trenches). It is planned that only 8 trenches will be excavated in the first year, but it may be more if the process is quicker than planned for. It should be kept in mind that no more than 40 trenches will be excavated.

The total area to be disturbed a year will be- 8 trenches x ($20m \times 10m$) = 0.16 Ha per year. No more than 0.172ha will be left as un-rehabilitated in two years. Rehabilitation will be done concurrently.

i) Explain how the aforesaid amount was derived.

The closure cost estimate provided above is aligned with the Guideline Document for the Evaluation of Quantum of Closure related Financial Provision Provided by a Mine, by the DMR (January, 2005). The amount was calculated by Milnex 189 CC.

ii) Confirm that this amount can be provided for from operating expenditure. (Confirm that the amount, is anticipated to be an operating cost and is provided for as such in the Mining work programme, Financial and Technical Competence Report or Prospecting Work Programme as the case may be).

Financial Guarantee

The financial guarantee for the rehabilitation for land disturbed by PGL Boerdery (Pty) Ltd was submitted together with the application for a prospecting right.

Rehabilitation Fund

PGL Boerdery (Pty) Ltd will also make provision for rehabilitation during closure by establishing a rehabilitation trust.

- o) Deviations from the approved scoping report and plan of study.
 - Deviations from the methodology used in determining the significance of potential environmental impacts and risks.

(Provide a list of activities in respect of which the approved scoping report was deviated from, the reference in this report identifying where the deviation was made, and a brief description of the extent of the deviation).

- ii) Motivation for the deviation.
- p) Other Information required by the competent Authority
 - i) Compliance with the provisions of sections 24(4)(a) and (b) read with section 24 (3) (a) and (7) of the National Environmental Management Act (Act 107 of 1998). the EIA report must include the:-
 - (1) Impact on the socio-economic conditions of any directly affected person. (Provide the results of Investigation, assessment, and evaluation of the impact of the mining, bulk sampling or alluvial diamond prospecting on any directly affected person including the landowner, lawful occupier, or, where applicable, potential beneficiaries of any land restitution claim, attach the investigation report as **Appendix 2.19.1** and confirm that the applicable mitigation is reflected in 2.5.3; 2.11.6.and 2.12.herein).

The diamonds alluvial, diamonds general and diamonds prospecting will not impact directly on any socio-economic aspects. Indirect socio-economic benefits are expected to be associated with the creation of employment.

(2) Impact on any national estate referred to in section 3(2) of the National Heritage Resources Act. (Provide the results of Investigation, assessment, and evaluation of the impact of the mining, bulk sampling or alluvial diamond

prospecting on any national estate referred to in section 3(2) of the National Heritage Resources Act, 1999 (Act No. 25 of 1999) with the exception of the national estate contemplated in section 3(2)(*i*)(vi) and (vii) of that Act, attach the investigation report as **Appendix 2.19.2** and confirm that the applicable mitigation is reflected in 2.5.3; 2.11.6.and 2.12.herein).

The diamonds alluvial, diamonds general and diamonds prospecting will not impact on any heritage estate referred to in section 3(2) of the National Heritage Resources Act. In terms of the National Heritage Resource Act no 25 of 1999. Heritage resources including archaeological and paleontological sites over 100 years old, graves older than 60 years, structure older than 60 years are protected. They may not be disturbed without a permit from the relevant heritage resource Authority, which means that before such sites are disturbed by development it is incumbent on the developer to ensure that a heritage impact assessment is done and the Provincial Heritage Resources Authority and SAHRA will be contacted immediately and work will stop

q) Other matters required in terms of sections 24(4)(a) and (b) of the Act.

(the EAP managing the application must provide the competent authority with detailed, written proof of an investigation as required by section 24(4)(b)(i) of the Act and motivation if no reasonable or feasible alternatives, as contemplated in sub-regulation 22(2)(h), exist. The EAP must attach such motivation as **Appendix 4**).

From a local perspective, on farm Grootpoort 83, RD HO, North West Province is preferred due to the sites underlying geology and the shallowness of the diamond bearing gravel to the surface as well as site access (i.e. to facilitate the movement of machinery, equipment, infrastructure and people). No other properties have been secured by PGL Boerdery (Pty) Ltd. The specific site has been chosen for its mineral resources thus making an alternative site selection null and void.

PART B

ENVIRONMENTAL MANAGEMENT PROGRAMME REPORT

- 1) Draft environmental management programme.
 - a) **Details of the EAP**, (Confirm that the requirement for the provision of the details and expertise of the EAP are already included in PART A, section 1(a) herein as required).

It is hereby confirmed that the requirements for the provision of the details and expertise of the EAP are contained in Part A, section 1(a) as required. The Curriculum Vitae for the responsible EAP is contained in **Appendix 1 and 2**.

b) **Description of the Aspects of the Activity** (Confirm that the requirement to describe the aspects of the activity that are covered by the draft environmental management programme is already included in PART A, section (1)(h) herein as required).

It is hereby confirmed that the requirements to describe the aspects of the activity that are required by the draft EMP is already included in Part A, section 1(h).

c) Composite Map

(Provide a map (Attached as an Appendix) at an appropriate scale which superimposes the proposed activity, its associated structures, and infrastructure on the environmental sensitivities of the preferred site, indicating any areas that any areas that should be avoided, including buffers)

Refer to Locality Map, attached as in **Appendix 4**.

- d) Description of Impact management objectives including management statements
 - i) **Determination of closure objectives.** (ensure that the closure objectives are informed by the type of environment described in 2.4 herein)

Closure objectives for the alluvial diamond and general diamond mine will aim to ensure that the residual post-closure impacts be minimized and be acceptable to relevant parties. To achieve these closure objectives, the following will be implemented:

- ➤ All prospecting related infrastructure, foundations and concrete areas will be decommissioned, removed from the site and appropriately disposed of. Reclaimable structures such as metal, electrical installations or equipment will be sold for re-use or as scrap.
- ➤ All disturbed areas within the site not already vegetated will be re-vegetated with appropriate indigenous, ecologically adapted species appropriate to the area and the final land use as soon as possible after operation ceases. Progress of vegetation

growth/establishment, stability and drainage/erosion will be monitored and, in the event of adverse trends being identified, corrective measures will be implemented.

Vegetation monitoring will consider, inter alia, the establishment of perennial ground cover and infestation by alien invasive plant species. The encroachment of indigenous vegetation into the area will be used as an indication of a stable, self-sustaining vegetation cover with little risk of retrogressing to a situation where are and water pollution may occur.

Alien invasive management plan

The following are the identified mitigation measures under table 4.2 of the report.

- To replace bare soil at impacted areas with vegetation and functioning as similar as
 possible to the adjacent natural veld and riparian zones to an ecosystem functioning as
 self-sufficient as possible.
- Possible additional impacts by using exotic plant species are avoided as a pre-caution.
- Rationale: This aim almost approaches restoration and the idea is that the area immediate to the proposed impacts would approach self-sufficient and impacted areas a little further away be self-sufficient as soon as possible.

Monitoring is the responsibility of the environmental conservation officer (ECO) or equivalent or contracted specialist.

Table 4.2 Guidelines to monitoring actions during the rehabilitation process

1	Regularly inspect the impacted zones to note the indigenous vegetation properly establish at hitherto
	clearings and formerly impacted areas.
2	Regularly inspect the impacted zones for unwanted damming of water or over-increase of wetness in
	any particular area as a consequence of land use changes, the relevant impacts or the rehabilitation
	effort.
3	Regularly inspect the impacted zones to note establishment of alien invasive species
4	Monitor and inspect the wetlands if impacts are nearby for release of any unwanted sediments into
	the wetland system take place.
5	Regularly inspect and observe if any oil leakages or any other hydrocarbon spillages occur and
	monitor the servicing of vehicles or other equipment or the identification of any vehicles from which
	these spillages originate.

ii) The process for managing any environmental damage, pollution, pumping and treatment of extraneous water or ecological degradation as a result of undertaking a listed activity.

iii) Potential risk of Acid Mine Drainage. (Indicate whether or not the mining can result in acid mine drainage).

The prospecting activities applied for will not result in acid mine drainage. These activities and methods can be seen as a clean process.

- iv) Steps taken to investigate, assess, and evaluate the impact of acid mine drainage.
- v) Engineering or mine design solutions to be implemented to avoid or remedy acid mine drainage.
- vi) Measures that will be put in place to remedy any residual or cumulative impact that may result from acid mine drainage.
- vii) Volumes and rate of water use required for the mining, trenching or bulk sampling operation.

10 000 - 36 000 L per hour required for the rotary pans to operate at the wash plant.

viii) Has a water use licence has been applied for?

A water use license application will be applied for, if required.

ix) Impacts to be mitigated in their respective phases Measures to rehabilitate the environment affected by the undertaking of any listed activity

ACTIVITIES	PHASE	SIZE AND SCALE	MITIGATION MEASURES	COMPLIANCE WITH STANDARDS	TIME PERIOD FOR IMPLEMENTATION
(E.g. For prospecting - drill site, site camp, ablution facility, accommodation, equipment storage, sample storage, site office, access route etcetc E.g. For mining, - excavations, blasting, stockpiles, discard dumps or dams, Loading, hauling and transport, Water supply dams and boreholes, accommodation, offices, ablution, stores, workshops, processing plant, storm water control, berms, roads, pipelines, power lines, conveyors, etcetc)	(of operation in which activity will take place. State; Planning and design, Pre-Construction' Construction, Operational, Rehabilitation, Closure, Post closure).	of disturbance (volumes, tonnages and hectares or m²)	(describe how each of the recommendations in herein will remedy the cause of pollution or degradation and migration of pollutants)	(A description of how each of the recommendations herein will comply with any prescribed environmental management standards or practices that have been identified by Competent Authorities)	Describe the time period when the measures in the environmental management programme must be implemented Measures must be implemented when required. With regard to Rehabilitation specifically this must take place at the earliest opportunity. With regard to Rehabilitation, therefore state either: Upon cessation of the individual activity Or. Upon the cessation of mining, bulk sampling or alluvial diamond prospecting as the case may be.
Clearance of vegetation	Pitting and trenching phase- (construction and operation phase)	1 6666.313 Hectares – 3m x 2m x 3m (100 pits) pit every 16 ha, 30m x 10m x 3m (100 trenches) trench every 16 ha	 Site clearing must take place in a phased manner, as and when required. Areas which are not to be prospected on within two months must not be cleared to reduce erosion risks. The area to be cleared must be clearly demarcated and this footprint strictly maintained. Spoil that is removed from the site must be removed to an approved spoil site or a licensed landfill site. The necessary silt fences and erosion control measures must be implemented in areas where these risks are more prevalent. 	Compliance with Duty of Care as detailed within NEMA	Duration of operations on the prospecting activities.
Construction of roads	Pitting and trenching phase- (construction and operation phase)	+- 500m	Planning of access routes to the site for construction/prospecting purposes shall be done in conjunction with the Contractor and the Landowner. All agreements reached should be documented and no verbal agreements should be made. The Contractor shall clearly mark all access roads. Roads not	Compliance with Duty of Care as detailed within NEMA	Duration of operations on the prospecting activities.

			2.3.4.5.6.	access roads must be clearly defined. Damping down of the un-surfaced roads must be implemented to reduce dust and nuisance. Soils compacted by construction/prospecting activities shall be deep ripped to loosen compacted layers and re-graded to even running levels. The contractor must ensure that damage caused by related traffic to the gravel access road off the R34 is repaired continuously. The costs associated with the repair must be borne by the contractor;		
Prospecting of Alluvial Diamonds – Soils and geology	Pitting and trenching phase- (construction and operation phase)	1 6666.313 Hectares – 3m x 2m x 3m (100 pits) pit every 16 ha, 30m x 10m x 3m (100 trenches) trench every 16 ha	1.	The Contractor should, prior to the commencement of earthworks determine the average depth of topsoil (If topsoil exists), and agree on this with the ECO. The full depth of topsoil should be stripped from areas affected by construction and related activities prior to the commencement of major earthworks. This should include the building footprints, working areas and storage areas. Topsoil must be reused where possible to rehabilitate disturbed areas. Care must be taken not to mix topsoil and subsoil during stripping.	Compliance with Duty of Care as detailed within NEMA	Duration of operations on the mine

Prospecting Alluvial Diamonds – excavations and blasting	Pitting and trenching phase-	1 6666.313 Hectares – 3m x 2m x 3m (100 pits)	3. 4. 5. 6. 7.	The topsoil must be conserved on site in and around the pit/trench area. Subsoil and overburden in the prospecting area should be stockpiled separately to be returned for backfilling in the correct soil horizon order. If stockpiles are exposed to windy conditions or heavy rain, they should be covered either by vegetation or geofabric, depending on the duration of the project. Stockpiles may further be protected by the construction of berms, trenches or low brick walls around their bases. Stockpiles should be kept clear of weeds and alien vegetation growth by regular weeding. Where contamination of soil is expected, analysis must be done prior to disposal of soil to determine the appropriate disposal route. Proof from an approved waste disposal site where contaminated soils are dumped if and when a spillage/leakage occurs should be attained and given to the project manager. The impact on the geology will be permanent. There is no mitigation measure. The prospecting activities must aim to adhere to the relevant noise regulations and limit noise to within standard	Compliance with Duty of Care as detailed within NEMA	Duration of operations on the prospecting area
	phase- (construction and operation phase)	2m x 3m (100 pits) pit every 16 ha, 30m x 10m x 3m (100 trenches) trench every 16 ha	2.	and limit noise to within standard working hours in order to reduce disturbance of dwellings in close proximity to the development. Mine, pans, workshops and other noisy fixed facilities should be located well away from noise sensitive areas. Once the proposed final layouts are made available by the Contractor(s), the sites must be evaluated in detail and specific measures designed in to the system. Truck traffic should be routed away from noise sensitive areas, where possible.		

	4. Noise levels must be kept within
	acceptable limits.
	5. Noisy operations should be combined so
	that they occur where possible at the
	same time.
	6. Mine workers to wear necessary ear
	protection gear.
	7. Noisy activities to take place during
	allocated hours.
	8. Noise from labourers must be controlled.
	9. Noise suppression measures must be
	applied to all equipment. Equipment
	must be kept in good working order and
	where appropriate fitted with silencers
	which are kept in good working order.
	Should the vehicles or equipment not be
	in good working order, the Contractor
	may be instructed to remove the
	offending vehicle or machinery from the
	site.
	10. The Contractor must take measures to
	discourage labourers from loitering in
	the area and causing noise disturbance.
	Where possible labour shall be
	transported to and from the site by the
	Contractor or his Sub-Contractors by the
	Contractors own transport.
	11. Implementation of enclosure and
	cladding of processing plants.
	12. Applying regular and thorough
	maintenance schedules to equipment
	and processes. An increase in noise
	emission levels very often is a sign of the
	imminent mechanical failure of a
	machine.

e) Impact Management Outcomes

(A description of impact management outcomes, identifying the standard of impact management required for the aspects contemplated in paragraph ();

ACTIVITY	POTENTIAL	ASPECTS	PHASE	MITIGATION	STANDARD TO BE ACHIEVED
(whether listed or not listed). (E.g. Excavations, blasting, stockpiles, discard dumps or dams, Loading, hauling and transport, Water supply dams and boreholes, accommodation, offices, ablution, stores, workshops, processing plant, storm water control, berms, roads, pipelines, power lines, conveyors, etcetcetc.).	IMPACT (e.g. dust, noise, drainage surface disturbance, fly rock, surface water contamination, groundwater contamination, air pollution etcetc)	AFFECTED	In which impact is anticipated (e.g. Construction, commissioning, operational Decommissioning, closure, post-closure)	(modify, remedy, control, or stop) through (e.g. noise control measures, storm-water control, dust control, rehabilitation, design measures, blasting controls, avoidance, relocation, alternative activity etc. etc) E.g. Modify through alternative method. Control through noise control Control through management and monitoring Remedy through rehabilitation.	(Impact avoided, noise levels, dust levels, rehabilitation standards, end use objectives) etc.
Clearance of vegetation	Loss or fragmentation of habitats	Fauna & flora	Pitting and trenching phase-(construction and operation phase)	Existing vegetation 1. Vegetation removal must be limited to the prospecting area. 2. Vegetation to be removed as it becomes necessary rather than removal of all vegetation throughout the site in one step. 3. No vegetation to be used for firewood. 4. Exotic and invasive plant species should not be allowed to establish, if the development is approved. Rehabilitation 5. All damaged areas shall be rehabilitated upon completion of the contract. 6. Re-vegetation of the disturbed site is aimed at approximating as near as possible the natural vegetative conditions prevailing prior to construction. 7. All natural areas impacted during construction/prospecting must be rehabilitated with locally indigenous grasses typical of the representative botanical unit.	Minimisation of impacts to acceptable limits

8. Rehabilitation must take place in a phased approach as soon as possible. 9. Rehabilitation process must make use of species indigenous to the area. Seeds from surrounding seed banks can be used for re-seeding. 10. Rehabilitation must be executed in such a manner that surface run-off will not cause erosion of disturbed areas. 11. Planting of indigenous tree species in areas not to be cultivated or built on must be encouraged. Demarcation of prospecting area 12. All plants not interfering with prospecting operations shall be left undisturbed clearly marked and indicated on the site plan.
use of species indigenous to the
Demarcation of prospecting area
prospecting operations shall be left
13. The prospecting area must be well
demarcated and no
construction/prospecting activities must be allowed outside of this
demarcated footprint.
14. Vegetation removal must be phased
in order to reduce impact of
construction/prospecting. 15. Site office and laydown areas must
be clearly demarcated and no
encroachment must occur beyond
demarcated areas.
16. Strict and regular auditing of the prospecting process to ensure
containment of the prospecting and
laydown areas.
17. Soils must be kept free of
petrochemical solutions that may be kept on site during
construction/prospecting. Spillage
can result in a loss of soil functionality
thus limiting the re-establishment of flora.
liota.
Utilisation of resources

18. Gathering of firewood, fruit, muti plants, or any other natural material onsite or in areas adjacent to the site is prohibited unless with prior approval of the ECO.
Exotic vegetation 19. Alien vegetation on the site will need to be controlled. 20. The Contractor should be responsible for implementing a programme of weed control (particularly in areas where soil has been disturbed); and grassing of any remaining stockpiles to prevent weed invasion. 21. The spread of exotic species occurring throughout the site should be controlled.
Herbicides 22. Herbicide use shall only be allowed according to contract specifications. The application shall be according to set specifications and under supervision of a qualified technician. The possibility of leaching into the surrounding environment shall be properly investigated and only environmentally friendly herbicides shall be used. 23. The use of pesticides and herbicides on the site must be discouraged as these impact on important pollinator
species of indigenous vegetation. Fauna 24. Rehabilitation to be undertaken as soon as possible after the prospecting activities have been completed. 25. No trapping or snaring to fauna on the construction/prospecting site should be allowed. 26. No faunal species must be disturbed, trapped, hunted or killed by

	T	ī				
					maintenance staff during any routine	
Prospecting Alluvial Diamonds and diamonds general – excavations and blasting	Loss of topsoil	Soil	Pitting and trenching phase-(construction and operation phase)	3. 4.	maintenance at the development. The Contractor should, prior to the commencement of earthworks determine the average depth of topsoil, and agree on this with the ECO. The full depth of topsoil should be stripped from areas affected by construction and related activities prior to the commencement of major earthworks. This should include the building footprints, working areas and storage areas. Topsoil must be reused where possible to rehabilitate disturbed areas. Care must be taken not to mix topsoil and subsoil during stripping. The topsoil must be conserved on site in and around the pit/trench area. Subsoil and overburden in the prospecting area should be stockpiled separately to be returned for backfilling in the correct soil horizon order. If stockpiles are exposed to windy conditions or heavy rain, they should be covered either by vegetation or geofabric, depending on the duration of the project. Stockpiles may further be protected by the construction of berms or low brick walls around their bases. Stockpiles should be kept clear of weeds and alien vegetation growth by regular weeding. Where contamination of soil is expected, analysis must be done prior to disposal of soil to determine the appropriate disposal route. Proof from an approved waste disposal site where contaminated soils are dumped if and when a spillage/leakage occurs should be attained and given to the project	Minimisation of impacts to acceptable limits
					manager.	

1	T	T	
			Establish an effective record keeping system for each area where soil is disturbed for prospecting purposes. These records should be included in environmental performance reports, and should include all the records below. • Record the GPS coordinates of each area. • Record the date of topsoil stripping. • Record the dependent of the expectation prospecting activities at the particular site. • Photograph the area on cessation of prospecting activities. • Record date and depth of respreading of topsoil. • Photograph the area on completion of rehabilitation and on an annual basis thereafter to show vegetation establishment and evaluate progress of restoration over time.
Erosion	Soil Air Water	Pitting and trenching phase-(construction and operation phase)	An effective system of run-off control should be implemented, where it is required, that collects and safely disseminates run-off water from all hardened surfaces and prevents potential down slope erosion. Periodical site inspection should be included in environmental performance reporting that inspects the effectiveness of the run-off control system and specifically records the occurrence of any erosion on site or downstream. Wind screening and stormwater control should be undertaken to prevent soil loss from the site. Minimisation of impacts to acceptable limits Minimisation of impacts to acceptable limits

4. The use of silt	fences and sand bags
	emented in areas that
are susceptibl	e to erosion.
	control measures that
can be implen	nented are as follows:
o Bru	sh packing with
	ared vegetation
	Ich or chip packing
	nting of vegetation
	droseeding/hand
	ving
	s need to be identified
	ruction/prospecting so
	ssary precautions can
be implemented	
	ntrol mechanisms need
to be regularly	
	topsoil and subsoil
	revent wind and water
erosion of soil	
9. Retention o	vegetation where
	oid soil erosion.
	learance should be
	sure that the minimum
	exposed to potential
erosion at any	one time.
	of disturbed surfaces
	r immediately after
	rospecting activities
are completed	. This should be done
through seed	ling with indigenous
grasses.	
	nt to the natural water
	an approved erosion
control works	
	ormwater damage, the
	stormwater run-off
resulting	from
construction/p	
	ated and the drainage
	sed accordingly.
	ot used in three (3)
	stripping must be
seeded of bar and erosion.	ckfilled to prevent dust
and erosion.	

Air Pollution	Air	Pitting and trenching	Dust control	Minimisation of impacts to acceptable
All Policion		phase-(construction and operation phase)	1. Wheel washing and damping down of un-surfaced and un-vegetated areas. 2. Retention of vegetation where possible will reduce dust travel. 3. Clearing activities must only be done during agreed working times and permitting weather conditions to avoid drifting of sand and dust into neighbouring areas. 4. Damping down of all exposed soil surfaces with a water bowser or sprinklers when necessary to reduce dust. 5. The Contractor shall be responsible for dust control on site to ensure no nuisance is caused to the neighbouring communities. 6. A speed limit of 30km/h must not be exceeded on site. 7. Any complaints or claims emanating from the lack of dust control shall be attended to immediately by the Contractor. 8. Any dirt roads that are utilised by the workers must be regularly maintained to ensure that dust levels	limits
			are controlled. Odour control 9. Regular servicing of vehicles in order to limit gaseous emissions. 10. Regular servicing of onsite toilets to avoid potential odours. Rehabilitation 11. The Contractor should commence rehabilitation of exposed soil surfaces as soon as practical after completion of earthworks. Fire prevention 12. No open fires shall be allowed on site under any circumstance. All cooking shall be done in demarcated areas	

			that are safe and cannot cause	
			runaway fires.	
		13	The Contractor shall have	
		10.	operational fire-fighting equipment	
			available on site at all times. The	
			level of firefighting equipment must	
			be assessed and evaluated through	
			a typical risk assessment process.	
Naiss	Ditting and top police	1		Minimization of imposts to accordable
Noise	Pitting and trenching	1.	The prospecting activities must aim	Minimisation of impacts to acceptable
	phase-(construction and		to adhere to the relevant noise	limits
	operation phase)		regulations and limit noise to within	
			standard working hours in order to	
			reduce disturbance of dwellings in	
		_	close proximity to the development.	
		2.	Mine, crushers, workshops and other	
			noisy fixed facilities should be	
			located well away from noise	
			sensitive areas. Once the proposed	
			final layouts are made available by	
			the Contractor(s), the sites must be	
			evaluated in detail and specific	
			measures designed in to the system.	
		3.	Truck traffic should be routed away	
			from noise sensitive areas, where	
			possible.	
		4.	Noise levels must be kept within	
			acceptable limits.	
		5.	Noisy operations should be	
			combined so that they occur where	
			possible at the same time.	
		6.	Mine workers to wear necessary ear	
			protection gear.	
		7.	Noisy activities to take place during	
			allocated hours.	
		8.	Noise from labourers must be	
			controlled.	
		9.	Noise suppression measures must	
			be applied to all equipment.	
			Equipment must be kept in good	
			working order and where appropriate	
			fitted with silencers which are kept in	
			good working order. Should the	
			vehicles or equipment not be in good	
			working order, the Contractor may be	

Waste management	Pollution	Pitting and trenching	Litter management	Minimisation of impacts to acceptable
		phase-(construction and	1. Refuse bins must be placed at	limits
		operation phase)	strategic positions to ensure that litter	
		operation prices)	does not accumulate within the	
			construction site.	
			The Contractor shall supply waste	
			collection bins where such is not	
			available and all solid waste collected	
			shall be disposed of at	
			registered/licensed landfill.	
			Good housekeeping practices should	
			be implemented to regularly maintain	
			the litter and rubble situation on the	
			construction site.	
			4. If possible and feasible, all waste	
			generated on site must be separated	
			into glass, plastic, paper, metal and	
			wood and recycled. An independent	
			contractor can be appointed to	
			conduct this recycling.	
			5. Littering by the employees of the	
			Contractor shall not be allowed under	
			any circumstances. The ECO shall	
			monitor the neatness of the work	
			sites as well as the Contractor	
			campsite.	
			6. Skip waste containers should be	
			maintained on site. These should be	
			kept covered and arrangements	
			made for them to be collected	
			regularly.	
			1	
			 All waste must be removed from the site and transported to a landfill site 	
			•	
			promptly to ensure that it does not	
			attract vermin or produce odours.	
			8. Where a registered waste site is not	
			available close to the construction	
			site, the Contractor shall provide a	
			method statement with regard to	
			waste management.	
			9. A certificate of disposal shall be	
			obtained by the Contractor and kept	
			on file, if relevant.	
			10. Under no circumstances may solid	
			waste be burnt on site.	

11. All waste must be removed promptly
to ensure that it does not attract
vermin or produce odours.
To min or product steams.
Hazardous waste
12. All waste hazardous materials must
be carefully stored as advised by the
ECO, and then disposed of offsite at
a licensed landfill site, where
practical. Incineration may be used
where relevant.
13. Contaminants to be stored safely to
avoid spillage.
14. Machinery must be properly
maintained to keep oil leaks in check.
15. All necessary precaution measures
shall be taken to prevent soil or
surface water pollution from
hazardous materials used during
construction and any spills shall
immediately be cleaned up and all
affected areas rehabilitated.
Sanitation
Sanitation 16. The Contractor shall install mobile
16. The Contractor shall install mobile
16. The Contractor shall install mobile chemical toilets on the site. 17. Staff shall be sensitised to the fact
16. The Contractor shall install mobile chemical toilets on the site.
16. The Contractor shall install mobile chemical toilets on the site. 17. Staff shall be sensitised to the fact that they should use these facilities at
16. The Contractor shall install mobile chemical toilets on the site. 17. Staff shall be sensitised to the fact that they should use these facilities at all times. No indiscriminate sanitary activities on site shall be allowed.
16. The Contractor shall install mobile chemical toilets on the site. 17. Staff shall be sensitised to the fact that they should use these facilities at all times. No indiscriminate sanitary activities on site shall be allowed. 18. Toilets shall be serviced regularly
16. The Contractor shall install mobile chemical toilets on the site. 17. Staff shall be sensitised to the fact that they should use these facilities at all times. No indiscriminate sanitary activities on site shall be allowed. 18. Toilets shall be serviced regularly and the ECO shall inspect toilets
16. The Contractor shall install mobile chemical toilets on the site. 17. Staff shall be sensitised to the fact that they should use these facilities at all times. No indiscriminate sanitary activities on site shall be allowed. 18. Toilets shall be serviced regularly and the ECO shall inspect toilets regularly.
16. The Contractor shall install mobile chemical toilets on the site. 17. Staff shall be sensitised to the fact that they should use these facilities at all times. No indiscriminate sanitary activities on site shall be allowed. 18. Toilets shall be serviced regularly and the ECO shall inspect toilets regularly. 19. Toilets should be no closer than 50m
16. The Contractor shall install mobile chemical toilets on the site. 17. Staff shall be sensitised to the fact that they should use these facilities at all times. No indiscriminate sanitary activities on site shall be allowed. 18. Toilets shall be serviced regularly and the ECO shall inspect toilets regularly. 19. Toilets should be no closer than 50m or above the 1:100 year flood line
16. The Contractor shall install mobile chemical toilets on the site. 17. Staff shall be sensitised to the fact that they should use these facilities at all times. No indiscriminate sanitary activities on site shall be allowed. 18. Toilets shall be serviced regularly and the ECO shall inspect toilets regularly. 19. Toilets should be no closer than 50m or above the 1:100 year flood line from any natural or manmade water
16. The Contractor shall install mobile chemical toilets on the site. 17. Staff shall be sensitised to the fact that they should use these facilities at all times. No indiscriminate sanitary activities on site shall be allowed. 18. Toilets shall be serviced regularly and the ECO shall inspect toilets regularly. 19. Toilets should be no closer than 50m or above the 1:100 year flood line from any natural or manmade water bodies or drainage lines or
16. The Contractor shall install mobile chemical toilets on the site. 17. Staff shall be sensitised to the fact that they should use these facilities at all times. No indiscriminate sanitary activities on site shall be allowed. 18. Toilets shall be serviced regularly and the ECO shall inspect toilets regularly. 19. Toilets should be no closer than 50m or above the 1:100 year flood line from any natural or manmade water bodies or drainage lines or alternatively located in a place
16. The Contractor shall install mobile chemical toilets on the site. 17. Staff shall be sensitised to the fact that they should use these facilities at all times. No indiscriminate sanitary activities on site shall be allowed. 18. Toilets shall be serviced regularly and the ECO shall inspect toilets regularly. 19. Toilets should be no closer than 50m or above the 1:100 year flood line from any natural or manmade water bodies or drainage lines or alternatively located in a place approved of by the Engineer.
16. The Contractor shall install mobile chemical toilets on the site. 17. Staff shall be sensitised to the fact that they should use these facilities at all times. No indiscriminate sanitary activities on site shall be allowed. 18. Toilets shall be serviced regularly and the ECO shall inspect toilets regularly. 19. Toilets should be no closer than 50m or above the 1:100 year flood line from any natural or manmade water bodies or drainage lines or alternatively located in a place approved of by the Engineer. 20. Under no circumstances may open
16. The Contractor shall install mobile chemical toilets on the site. 17. Staff shall be sensitised to the fact that they should use these facilities at all times. No indiscriminate sanitary activities on site shall be allowed. 18. Toilets shall be serviced regularly and the ECO shall inspect toilets regularly. 19. Toilets should be no closer than 50m or above the 1:100 year flood line from any natural or manmade water bodies or drainage lines or alternatively located in a place approved of by the Engineer.
16. The Contractor shall install mobile chemical toilets on the site. 17. Staff shall be sensitised to the fact that they should use these facilities at all times. No indiscriminate sanitary activities on site shall be allowed. 18. Toilets shall be serviced regularly and the ECO shall inspect toilets regularly. 19. Toilets should be no closer than 50m or above the 1:100 year flood line from any natural or manmade water bodies or drainage lines or alternatively located in a place approved of by the Engineer. 20. Under no circumstances may open areas, neighbours fences or the
16. The Contractor shall install mobile chemical toilets on the site. 17. Staff shall be sensitised to the fact that they should use these facilities at all times. No indiscriminate sanitary activities on site shall be allowed. 18. Toilets shall be serviced regularly and the ECO shall inspect toilets regularly. 19. Toilets should be no closer than 50m or above the 1:100 year flood line from any natural or manmade water bodies or drainage lines or alternatively located in a place approved of by the Engineer. 20. Under no circumstances may open areas, neighbours fences or the surrounding bush be used as a toilet
16. The Contractor shall install mobile chemical toilets on the site. 17. Staff shall be sensitised to the fact that they should use these facilities at all times. No indiscriminate sanitary activities on site shall be allowed. 18. Toilets shall be serviced regularly and the ECO shall inspect toilets regularly. 19. Toilets should be no closer than 50m or above the 1:100 year flood line from any natural or manmade water bodies or drainage lines or alternatively located in a place approved of by the Engineer. 20. Under no circumstances may open areas, neighbours fences or the surrounding bush be used as a toilet facility.
16. The Contractor shall install mobile chemical toilets on the site. 17. Staff shall be sensitised to the fact that they should use these facilities at all times. No indiscriminate sanitary activities on site shall be allowed. 18. Toilets shall be serviced regularly and the ECO shall inspect toilets regularly. 19. Toilets should be no closer than 50m or above the 1:100 year flood line from any natural or manmade water bodies or drainage lines or alternatively located in a place approved of by the Engineer. 20. Under no circumstances may open areas, neighbours fences or the surrounding bush be used as a toilet

				connected to the sewage treatment
				plant.
				22. Potable water must be provided for
				all construction staff.
				Remedial actions
				23. Depending on the nature and extent
				of the spill, contaminated soil must be
				either excavated or treated on-site.
				24. Excavation of contaminated soil must
				involve careful removal of soil using
				appropriate tools/machinery to
				storage containers until treated or
				disposed of at a licensed hazardous landfill site.
				25. The ECO must determine the precise
				method of treatment for polluted soil.
				This could involve the application of
				soil absorbent materials as well as
				oil-digestive powders to the
				contaminated soil.
				26. If a spill occurs on an impermeable
				surface such as cement or concrete,
				the surface spill must be contained
				using oil absorbent material.
				27. If necessary, oil absorbent sheets or
				pads must be attached to leaky
				machinery or infrastructure.
				28. Materials used for the remediation of
				petrochemical spills must be used
				according to product specifications
				and guidance for use.
				29. Contaminated remediation materials
				must be carefully removed from the
				area of the spill so as to prevent
				further release of petrochemicals to
				the environment, and stored in
				adequate containers until appropriate
				disposal.
Water Use and Quality	Water pollution	Water	Pitting and trenching	Water Use
			phase-(construction and	Develop a sustainable water supply
			operation phase)	management plan to minimise the
				impact to natural systems by
				managing water use, avoiding

depletion of aquifers and minimising
impacts to water users.
2. Water must be reused, recycled or
treated where possible.
dedica inicio possibio.
Water Quality
3. The quality and quantity of effluent
streams discharged to the
environment including stormwater
should be managed and treated to
meet applicable effluent discharge
guidelines.
4. Discharge to surface water should
not result in contaminant
concentrations in excess of local
ambient water quality criteria outside
a scientifically established mixing
zone.
5. Efficient oil and grease traps or
sumps should be installed and
maintained at refueling facilities,
workshops, fuel storage depots, and
containment areas and spill kits
should be available with emergency
response plans.
responde plane.
Stormwater
6. The site must be managed in order to
prevent pollution of drains,
downstream watercourses or
groundwater, due to suspended
solids and silt or chemical pollutants.
7. Silt fences should be used to prevent
any soil entering the stormwater
drains.
8. Temporary cut off drains and berms
may be required to capture
stormwater and promote infiltration.
Promote a water saving mind set with
construction/prospecting workers in
order to Contractor ensure less water
wastage.
10. Hazardous substances must be
stored at least 40m from any water
bodies on site to avoid pollution.
Dodies on the te strong periodicin

11. The installation of the stormwater system must take place as soon as
possible to attenuate stormwater from the construction phase as well as the operation phase.
12. Earth, stone and rubble is to be properly disposed of, or utilized on
site so as not to obstruct natural water path ways over the site. i.e.
these materials must not be placed in stormwater channels, drainage lines
or rivers. 13. There should be a periodic checking
of the site's drainage system to ensure that the water flow is
unobstructed. 14. If a batching plant is necessary, run-
off should be managed effectively to avoid contamination of other areas of
the site. Untreated runoff from the batch plant must not be allowed to
get into the storm water system or nearby streams, rivers or erosion
channels or dongas.
Groundwater resource protection 15. Process solution storage ponds and
other impoundments designed to hold non fresh water or non-treated
process effluents should be lined and be equipped with sufficient wells to
enable monitoring of water levels and quality.
Sanitation
16. Adequate sanitary facilities and ablutions must be provided for
construction workers (1 toilet per every 15 workers).
17. The facilities must be regularly serviced to reduce the risk of surface
or groundwater pollution.
Concrete mixing

18. Concrete contaminated water must
not enter soil or any natural drainage
system as this disturbs the natural
acidity of the soil and affects plant
growth.
Public areas
19. Food preparation areas should be
provided with adequate washing
facilities and food refuse should be
stored in sealed refuse bins which
should be removed from site on a
regular basis.
20. The Contractor should take steps to
ensure that littering by
construction/prospecting workers
does not occur and persons should
be employed on site to collect litter
from the site and immediate
surroundings, including litter
accumulating at fence lines.
21. No washing or servicing of vehicles
on site.

f) Impact Management Actions

(A description of impact management actions, identifying the manner in which the impact management objectives and outcomes contemplated in paragraphs (c) and (d) will be achieved).

ACTIVITY	DOTENITIAL IMPACT	MITIOATION	TIME DEDICE FOR	COMPLIANCE WITH CTANDARDS
ACTIVITY	POTENTIAL IMPACT	MITIGATION	TIME PERIOD FOR	COMPLIANCE WITH STANDARDS
Whether listed or not listed.		TYPE	IMPLEMENTATION	
(E.g. Excavations, blasting, stockpiles, discard dumps or dams, Loading, hauling and transport, Water supply dams and boreholes, accommodation, offices, ablution, stores, workshops, processing plant, storm water control, berms, roads, pipelines, power lines, conveyors, etcetc.).	(e.g. dust, noise, drainage surface disturbance, fly rock, surface water contamination, groundwater contamination, air pollution etcetc)	(modify, remedy, control, or stop) through (e.g. noise control measures, storm-water control, dust control, rehabilitation, design measures, blasting controls, avoidance, relocation, alternative activity etc. etc) E.g. • Modify through alternative method. • Control through noise control • Control through management and monitoring Remedy through rehabilitation	Describe the time period when the measures in the environmental management programme must be implemented Measures must be implemented when required. With regard to Rehabilitation specifically this must take place at the earliest opportunity. With regard to Rehabilitation, therefore state either: Upon cessation of the individual activity or. Upon the cessation of mining, bulk sampling or alluvial diamond prospecting as the case may be.	(A description of how each of the recommendations in 2.11.6 read with 2.12 and 2.15.2 herein will comply with any prescribed environmental management standards or practices that have been identified by Competent Authorities)
Clearance of vegetation	Loss or fragmentation of habitats	Existing vegetation 1. Vegetation removal must be limited to the prospecting site. 2. Vegetation to be removed as it becomes necessary rather than removal of all vegetation throughout the site in one step. 3. No vegetation to be used for firewood. 4. Exotic and invasive plant species should not be allowed to establish, if the development is approved. Rehabilitation 5. All damaged areas shall be rehabilitated upon completion of the contract. 6. Re-vegetation of the disturbed site is aimed at approximating as near as possible the natural vegetative	Duration of operation	The implementation of the recommended mitigation measures will result in the minimisation of impacts to acceptable standards, thereby ensuring compliance with NEMA and Duty of Care as prescribed by NEMA.

conditions prevailing prior to
construction.
7. All natural areas impacted during
construction/prospecting must be
rehabilitated with locally
indigenous grasses typical of the
representative botanical unit.
8. Rehabilitation must take place in a
phased approach as soon as
possible.
use of species indigenous to the
area. Seeds from surrounding seed
banks can be used for re-seeding.
10. Rehabilitation must be executed in
such a manner that surface run-off
will not cause erosion of disturbed
areas.
11. Planting of indigenous tree species
in areas not to be cultivated or built
on must be encouraged.
Demarcation of prospecting area
12. All plants not interfering with
prospecting operations shall be left
undisturbed clearly marked and
indicated on the site plan.
13. The prospecting area must be well
demarcated and no construction
activities must be allowed outside
of this demarcated footprint.
14. Vegetation removal must be
phased in order to reduce impact of
construction/prospecting.
15. Site office and laydown areas must
be clearly demarcated and no
encroachment must occur beyond
demarcated areas.
16. Strict and regular auditing of the
prospecting process to ensure
containment of the prospecting and
laydown areas.
17. Soils must be kept free of
petrochemical solutions that may
be kept on site during

	construction/prospecting. Spillage can result in a loss of soil functionality thus limiting the reestablishment of flora.	
	Utilisation of resources 18. Gathering of firewood, fruit, mutiplants, or any other natural material onsite or in areas adjacent to the site is prohibited unless with prior approval of the ECO.	
	19. Alien vegetation on the site will need to be controlled. 20. The Contractor should be responsible for implementing a programme of weed control (particularly in areas where soil has been disturbed); and grassing of any remaining stockpiles to prevent weed invasion. 21. The spread of exotic species occurring throughout the site should be controlled.	
	Herbicides 22. Herbicide use shall only be allowed according to contract specifications. The application shall be according to set specifications and under supervision of a qualified technician. The possibility of leaching into the surrounding environment shall be properly investigated and only environmentally friendly herbicides shall be used. 23. The use of pesticides and herbicides on the site must be discouraged as these impact on important pollinator species of indigenous vegetation.	

		25.	Rehabilitation to be undertaken as soon as possible after prospecting has been completed. No trapping or snaring to fauna on the construction/prospecting site should be allowed. No faunal species must be disturbed, trapped, hunted or killed by maintenance staff during any routine maintenance at the development.		
Prospecting of Alluvial Diamonds – excavations and blasting	Loss of topsoil	2. 3. 4.	The Contractor should, prior to the commencement of earthworks determine the average depth of topsoil, and agree on this with the ECO. The full depth of topsoil should be stripped from areas affected by construction/prospecting and related activities prior to the commencement of major earthworks. This should include the building footprints, working areas and storage areas. Topsoil must be reused where possible to rehabilitate disturbed areas. Care must be taken not to mix topsoil and subsoil during stripping. The topsoil must be conserved on site in and around the pit/trench area. Subsoil and overburden in the prospecting area should be stockpiled separately to be returned for backfilling in the correct soil horizon order. If stockpiles are exposed to windy conditions or heavy rain, they should be covered either by vegetation or geofabric, depending on the duration of the project. Stockpiles may further be protected	Duration of operation	The implementation of the recommended mitigation measures will result in the minimisation of impacts to acceptable standards, thereby ensuring compliance with NEMA and Duty of Care as prescribed by NEMA.

	by the construction of berms or low
	brick walls around their bases.
	6. Stockpiles should be kept clear of
	weeds and alien vegetation growth
	by regular weeding.
	7. Where contamination of soil is
	expected, analysis must be done
	prior to disposal of soil to determine
	the appropriate disposal route.
	Proof from an approved waste
	disposal site where contaminated
	soils are dumped if and when a
	spillage/leakage occurs should be
	attained and given to the project
	manager.
	manager.
	Catablish on offsetive record keeping system
	Establish an effective record keeping system
	for each area where soil is disturbed for
	prospecting purposes. These records should
	be included in environmental performance
	reports, and should include all the records
	below.
	Record the GPS coordinates
	of each area.
	Record the date of topsoil
	stripping.
	Record the GPS coordinates
	of where the topsoil is
	stockpiled.
	Record the date of cessation
	prospecting activities at the
	particular site.
	Photograph the area on
	cessation of prospecting
	activities.
	Record date and depth of re-
	spreading of topsoil.
	Photograph the area on
	completion of rehabilitation
	and on an annual basis
	thereafter to show vegetation
	establishment and evaluate
	progress of restoration over
	time.
l l	

		To " ("	T
Erosion	 An effective system of run-off control should be implemented, 	Duration of operation	The implementation of the recommended mitigation measures will result in the
	where it is required, that collects		minimisation of impacts to acceptable
	and safely disseminates run-off		standards, thereby ensuring compliance
	water from all hardened surfaces		with NEMA and Duty of Care as prescribed
	and prevents potential down slope		by NEMA.
	erosion.		~, INLINU
	2. Periodical site inspection should be		
	included in environmental		
	performance reporting that		
	inspects the effectiveness of the		
	run-off control system and		
	specifically records the occurrence		
	of any erosion on site or		
	downstream.		
	Wind screening and stormwater		
	control should be undertaken to		
	prevent soil loss from the site.		
	4. The use of silt fences and sand		
	bags must be implemented in		
	areas that are susceptible to		
	erosion.		
	5. Other erosion control measures		
	that can be implemented are as		
	follows:		
	o Brush packing with		
	cleared vegetation		
	 Mulch or chip packing 		
	 Planting of vegetation 		
	 Hydroseeding/hand 		
	sowing		
	6. Sensitive areas need to be		
	identified prior to		
	construction/prospecting so that		
	the necessary precautions can be		
	implemented.		
	7. All erosion control mechanisms		
	need to be regularly maintained.		
	Seeding of topsoil and subsoil stockpiles to provent wind and		
	stockpiles to prevent wind and		
	water erosion of soil surfaces. 9. Retention of vegetation where		
	Retention of vegetation where possible to avoid soil erosion.		
	10. Vegetation clearance should be		
	phased to ensure that the minimum		
	priaseu to erisure triat trie minimum	<u></u>	

Air Pollution	area of soil is exposed to potential erosion at any one time. 11. Re-vegetation of disturbed surfaces should occur immediately after construction/prospecting activities are completed. This should be done through seeding with indigenous grasses. 12. No impediment to the natural water flow other than approved erosion control works is permitted. 13. To prevent stormwater damage, the increase in stormwater run-off resulting from construction/prospecting activities must be estimated and the drainage system assessed accordingly. A drainage plan must be submitted to the Engineer for approval and must include the location and design criteria of any temporary stream crossings. 14. Stockpiles not used in three (3) months after stripping must be seeded/backfilled to prevent dust and erosion. Dust control 14. Wheel washing and damping down of un-surfaced and un-vegetated areas. 15. Retention of vegetation where possible will reduce dust travel. 16. Clearing activities must only be done during agreed working times and permitting weather conditions to avoid drifting of sand and dust into neighbouring areas. 17. Damping down of all exposed soil	Duration of operation	The implementation of the recommended mitigation measures will result in the minimisation of impacts to acceptable standards, thereby ensuring compliance with NEMA and Duty of Care as prescribed by NEMA.
	done during agreed working times and permitting weather conditions to avoid drifting of sand and dust into neighbouring areas.		
	Air Pollution	erosion at any one time. 11. Re-vegetation of disturbed surfaces should occur immediately after construction/prospecting activities are completed. This should be done through seeding with indigenous grasses. 12. No impediment to the natural water flow other than approved erosion control works is permitted. 13. To prevent stormwater damage, the increase in stormwater run-off resulting from construction/prospecting activities must be estimated and the drainage system assessed accordingly. A drainage plan must be submitted to the Engineer for approval and must include the location and design criteria of any temporary stream crossings. 14. Stockpiles not used in three (3) months after stripping must be seeded/backfilled to prevent dust and erosion. Air Pollution Dust control 14. Wheel washing and damping down of un-surfaced and un-vegetated areas. 15. Retention of vegetation where possible will reduce dust travel. 16. Clearing activities must only be done during agreed working times and permitting weather conditions to avoid drifting of sand and dust into neighbouring areas. 17. Damping down of all exposed soil surfaces with a water bowser or sprinklers when necessary to reduce dust. 18. The Contractor shall be responsible for dust control on site to ensure no nuisance is caused to	erosion at any one time. 11. Re-vegetation of disturbed surfaces should occur immediately after construction/prospecting activities are completed. This should be done through seeding with indigenous grasses. 12. No impediment to the natural water flow other than approved erosion control works is permitted. 13. To prevent stormwater damage, the increase in stormwater run-off resulting from construction/prospecting activities must be estimated and the drainage system assessed accordingly. A drainage plan must be submitted to the Engineer for approval and must include the location and design criteria of any temporary stream crossings. 14. Stockpiles not used in three (3) months after stripping must be seeded/backfilled to prevent dust and erosion. Air Pollution Dust control 14. Wheel washing and damping down of un-surfaced and un-vegetated areas. 15. Retention of vegetation where possible will reduce dust travel. 16. Clearing activities must only be done during agreed working times and permitting weather conditions to avoid drifting of sand and dust into neighbouring areas. 17. Damping down of all exposed soil surfaces with a water bowser or sprinklers when necessary to reduce dust. 18. The Contractor shall be responsible for dust control on site to ensure no nuisance is caused to

	19. A speed limit of 30km/h must not be exceeded on site. 20. Any complaints or claims emanating from the lack of dust control shall be attended to immediately by the Contractor. 21. Any dirt roads that are utilised by the workers must be regularly maintained to ensure that dust levels are controlled. Odour control 22. Regular servicing of vehicles in order to limit gaseous emissions.		
	23. Regular servicing of onsite toilets to avoid potential odours. Rehabilitation 24. The Contractor should commence rehabilitation of exposed soil surfaces as soon as practical after completion of earthworks. Fire prevention		
	 25. No open fires shall be allowed on site under any circumstance. All cooking shall be done in demarcated areas that are safe and cannot cause runaway fires. 26. The Contractor shall have operational fire-fighting equipment available on site at all times. The level of firefighting equipment must be assessed and evaluated through a typical risk assessment process. 		
Noise	The prospecting activities must aim to adhere to the relevant noise regulations and limit noise to within standard working hours in order to reduce disturbance of dwellings in close proximity to the development. Pans, power plants, crushers, workshops and other noisy fixed facilities should be located well	Duration of operation	The implementation of the recommended mitigation measures will result in the minimisation of impacts to acceptable standards, thereby ensuring compliance with NEMA and Duty of Care as prescribed by NEMA.


away from noise sensitive areas.
Once the proposed final layouts are
made available by the
Contractor(s), the sites must be
evaluated in detail and specific
measures designed in to the
system.
Truck traffic should be routed away
from noise sensitive areas, where
possible.
4. Noise levels must be kept within
acceptable limits.
5. Noisy operations should be
combined so that they occur where
possible at the same time.
6. Mine workers to wear necessary
ear protection gear.
7. Noisy activities to take place during
allocated hours.
8. Noise from labourers must be
controlled.
Noise suppression measures must
be applied to all equipment.
Equipment must be kept in good
working order and where
appropriate fitted with silencers
which are kept in good working
order. Should the vehicles or
equipment not be in good working
order, the Contractor may be
instructed to remove the offending
vehicle or machinery from the site.
10. The Contractor must take
measures to discourage labourers
from loitering in the area and
causing noise disturbance. Where
possible labour shall be
transported to and from the site by
the Contractor or his Sub-
Contractors by the Contractors own
transport.
11. Implementation of enclosure and
cladding of processing plants.
12. Applying regular and thorough
maintenance schedules to

	T	1		T	_
			equipment and processes. An increase in noise emission levels		
			very often is a sign of the imminent		
			mechanical failure of a machine.		
	Impact on potential cultural and	1.	Any finds must be reported to the	Duration of operation	The implementation of the recommended
	heritage artefacts		nearest National Monuments office		mitigation measures will result in the
			to comply with the National		minimisation of impacts to acceptable
			Heritage Resources Act (Act No 25		standards, thereby ensuring compliance
			of 1999) and to DEA.		with NEMA and Duty of Care as prescribed
		2.	Local museums as well as the		by NEMA.
			South African Heritage Resource		,
			Agency (SAHRA) should be		
			informed if any artefacts are		
			uncovered in the affected area.		
		3.	The Contractor must ensure that		
			his workforce is aware of the		
			necessity of reporting any possible		
			historical or archaeological finds to		
			the ECO so that appropriate action		
			can be taken.		
		4.	Any discovered artefacts shall not		
			be removed under any		
			circumstances. Any destruction of		
			a site can only be allowed once a		
			permit is obtained and the site has		
			been mapped and noted. Permits		
			shall be obtained from the SAHRA should the proposed site affect any		
			world heritage sites or if any heritage sites are to be destroyed		
			or altered.		
			or altered.		
Waste Management		Litter ma	nagement	Duration of operation	The implementation of the recommended
Tracto management			Refuse bins must be placed at	Bulation of operation	mitigation measures will result in the
			strategic positions to ensure that		minimisation of impacts to acceptable
			litter does not accumulate within		standards, thereby ensuring compliance
			the construction/prospecting site.		with NEMA and Duty of Care as prescribed
		2.	The Contractor shall supply waste		by NEMA.
			collection bins where such is not		
			available and all solid waste		
			collected shall be disposed of at		
			registered/licensed landfill.		
		3.	Good housekeeping practices		
			should be implemented to regularly		
			maintain the litter and rubble		

situation on the
construction/prospecting site.
4. If possible and feasible, all waste
generated on site must be
separated into glass, plastic, paper,
metal and wood and recycled. An
independent contractor can be
appointed to conduct this recycling.
5. Littering by the employees of the
Contractor shall not be allowed
under any circumstances. The
ECO shall monitor the neatness of
the work sites as well as the
Contractor campsite.
6. Skip waste containers should be
maintained on site. These should
be kept covered and arrangements
made for them to be collected
regularly.
7. All waste must be removed from
the site and transported to a landfill
site promptly to ensure that it does
not attract vermin or produce
odours.
8. Where a registered waste site is
not available close to the
construction/prospecting site, the
Contractor shall provide a method
statement with regard to waste
management.
9. A certificate of disposal shall be
obtained by the Contractor and
kept on file, if relevant.
10. Under no circumstances may solid
waste be burnt on site.
11. All waste must be removed
promptly to ensure that it does not
attract vermin or produce odours.
Hereview wests
Hazardous waste
12. All waste hazardous materials must
be carefully stored as advised by
the ECO, and then disposed of
offsite at a licensed landfill site,

where practical. Incineration may
be used where relevant.
13. Contaminants to be stored safely to
avoid spillage.
14. Machinery must be properly
maintained to keep oil leaks in
check.
15. All necessary precaution measures
shall be taken to prevent soil or
surface water pollution from
hazardous materials used during
construction/prospecting and any
spills shall immediately be cleaned
up and all affected areas
rehabilitated.
Sanitation
16. The Contractor shall install mobile
chemical toilets on the site.
17. Staff shall be sensitised to the fact
that they should use these facilities
at all times. No indiscriminate
sanitary activities on site shall be
allowed.
18. Toilets shall be serviced regularly
and the ECO shall inspect toilets
regularly.
19. Toilets should be no closer than
50m or above the 1:100 year flood
line from any natural or manmade
water bodies or drainage lines or
alternatively located in a place
approved of by the Engineer.
20. Under no circumstances may open
areas, neighbours fences or the
surrounding bush be used as a
toilet facility.
21. The construction of "Long Drop"
toilets is forbidden, but rather toilets
connected to the sewage treatment
plant.
22. Potable water must be provided for
all construction staff.
Remedial actions

		23. Depending on the nature and
		extent of the spill, contaminated
		soil must be either excavated or
		treated on-site.
		24. Excavation of contaminated soil
		must involve careful removal of soil
		using appropriate tools/machinery
		to storage containers until treated
		or disposed of at a licensed
		hazardous landfill site.
		25. The ECO must determine the
		precise method of treatment for
		polluted soil. This could involve the
		application of soil absorbent
		materials as well as oil-digestive
		powders to the contaminated soil.
		26. If a spill occurs on an impermeable
		surface such as cement or
		concrete, the surface spill must be
		contained using oil absorbent
		material.
		27. If necessary, oil absorbent sheets
		or pads must be attached to leaky
		machinery or infrastructure.
		28. Materials used for the remediation
		of petrochemical spills must be
		used according to product
		specifications and guidance for
		use.
		29. Contaminated remediation
		materials must be carefully
		removed from the area of the spill
		so as to prevent further release of
		petrochemicals to the environment,
		and stored in adequate containers
		until appropriate disposal.
Water Use and Quality	Water pollution	Water Use
		Develop a sustainable water supply
		management plan to minimise the
		impact to natural systems by
		managing water use, avoiding
		depletion of aquifers and
		minimising impacts to water users.
		2. Water must be reused, recycled or
		treated where possible.

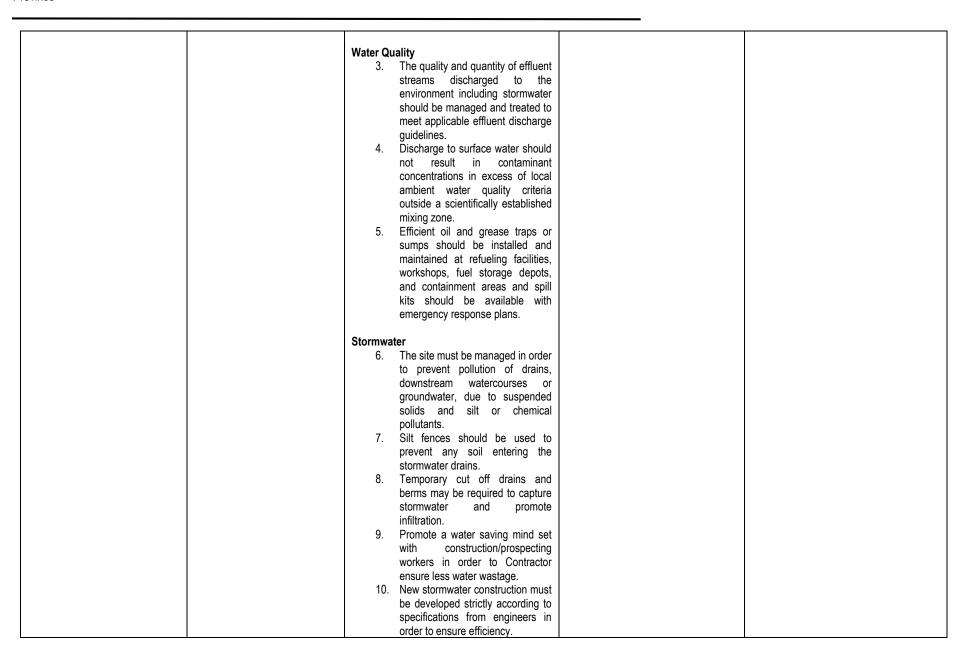

11. Hazardous substances must be
stored at least 20m from any water
bodies on site to avoid pollution.
12. The installation of the stormwater
system must take place as soon as
possible to attenuate stormwater
from the construction phase as well
as the operation phase.
13. Earth, stone and rubble is to be
properly disposed of, or utilized on
site so as not to obstruct natural
water path ways over the site. i.e.
these materials must not be placed
in stormwater channels, drainage
lines or rivers. 14. There should be a periodic
checking of the site's drainage
system to ensure that the water
flow is unobstructed.
15. If a batching plant is necessary,
run-off should be managed
effectively to avoid contamination
of other areas of the site. Untreated
runoff from the batch plant must not
be allowed to get into the storm
water system or nearby streams,
rivers or erosion channels or
dongas.
Groundwater resource protection
16. Process solution storage ponds
and other impoundments designed
to hold non fresh water or un-
treated process effluents should be
lined and be equipped with
sufficient wells to enable
monitoring of water levels and
quality.
Sanitation
17. Adequate sanitary facilities and
ablutions must be provided for
construction workers (1 toilet per
every 15 workers).

18. The facilities must be regularly
serviced to reduce the risk of
surface or groundwater pollution.
Concrete mixing
19. Concrete contaminated water must
not enter soil or any natural
drainage system as this disturbs
the natural acidity of the soil and
affects plant growth.
Public areas
20. Food preparation areas should be
provided with adequate washing
facilities and food refuse should be
stored in sealed refuse bins which
should be removed from site on a
regular basis.
21. The Contractor should take steps
to ensure that littering by
construction workers does not
occur and persons should be
employed on site to collect litter
from the site and immediate
surroundings, including litter
accumulating at fence lines.
22. No washing or servicing of vehicles on site.
UI Site.

i) Financial Provision

- (1) Determination of the amount of Financial Provision.
 - (a) Describe the closure objectives and the extent to which they have been aligned to the baseline environment described under Regulation 22 (2) (d) as described in 2.4 herein.
 - Final landforms must be resilient to perturbation and also be self-sustaining to obviate/limit further/ongoing interventions and maintenance by PGL Boerdery (Pty) Ltd
 - The remaining impacts be of an acceptable nature with minimal deterioration over time.
 - The final outcome of the mine site rehabilitation would be productive systems, where required sustaining either cattle or wildlife.
 - Environmental and human quality of life, including health and safety requirements in general, would not be compromised; and
 - Closure is achieved in an efficient and cost-effective manner as possible and with minimum socioeconomic changes.

The above goal is underpinned by more specific objectives listed below.

1. Upfront planning/development

To provide overall guidance and direction to closure planning and/or the implementation of progressive closure measures over the remaining over the prospecting life.

2. Physical stability

To ensure that surface infrastructure and prospecting residue and/or disturbances that are present at processing plant decommissioning will be removed and/or stabilised in a manner that these will not compromise post-closure land use and be sustainable long-term landforms.

- Closure, removal and disposal of all surface infrastructure that has no beneficial post-closure use.
- Shaping and vegetating the remaining earth embankments, trenches, etc. to stabilise slopes and integrate with surrounding topography.

3. Environmental quality

To ensure that local environmental quality is not adversely affected by possible physical effects arising from prospecting operations and the prospecting site after closure. This will be achieved by:

- Avoiding and/or limiting the following during prospecting operations which could result in adverse effects that could not be readily addressed and/or mitigated at mine closure.
 - Dust fall-out areas surrounding the prospecting site.
 - Wash-off and/or mobilisation of chemically contaminated soils and sediments from the prospecting site that could

have long term adverse effects on local aquatic health and/or other water uses.

- Possible shallow groundwater contamination adversely affecting the quality of the local water resource and its beneficial use.
- Limiting the potential for dust generation on the rehabilitated prospecting site that could cause nuisance and/or health effects to surrounding landowners;
- Limiting the possible adverse water quality and quantity effects arising from the rehabilitated prospecting site to ensure that long term beneficial use of local resources is not compromised;
- Conducting soil clean-up/remediation to ensure that the planned land use could be implemented and maintained;

4. Health and safety

To limit the possible health and safety treats due to terrain hazards to humans and animals utilizing the rehabilitated prospecting site after closure by:

- Demonstrating through upfront soil testing that any resultant inorganic and organic pollution present on the site is acceptable;
- Removal of potential contaminants such as hydrocarbons and chemicals off site;
- Shaping of embankments and trenches to safe slopes and reintegrating of these into surrounding topography.
- Ensuring that the environmental quality as reflected above is achieved.

5. Land capability / land use

To ensure that the required land capability to achieve and support the planned land use can be achieved over the prospecting site by:

- Clean-up and reclamation of contaminated soil areas in order not to compromise the above land use planning earmarked for implementation;
- To ensure that the overall rehabilitated prospecting site is free draining
- Transferring prospecting related surface infrastructure to third parties for beneficial use after closure.

6. Aesthetic quality

To ensure that the rehabilitated prospecting site will display, at a minimum, an acceptable aesthetic appearance that would not compromise the planned land use by leaving behind:

- A prospecting area that is properly cleared-up with no fugitive/scattered waste piles
- Rehabilitated prospecting area that is free draining and disturbed areas that are suitably vegetated.
- Rehabilitated prospecting residues that are suitably landscaped, blending with the surrounding environment as far as possible.
- Shaped and rehabilitated terrace and hard stand areas, roughly emulating the local natural surface topography.

7. Landscape viability

To create a landscape that is self-sustaining and over time will evolve/converge to the desired ecosystem structure, function and composition by:

- Conducing surface profiling, with associated material movement optimisation, to obtain a landscape resembling the natural landscapes to support the succession trajectory towards a climax ecological system.
- Establishing woody patches and create "rough and loose" areas for pioneer specie establishment around the respective patches.
- Establishing pioneer species as follows:
- Collected and prepared seeds for broad casting;
- Seedlings grown on on-site nursery;
- Cuttings collected from surrounding veld areas;
- Conducting rehabilitation monitoring and corrective action as required.

8. Biodiversity

To encourage, where appropriate, the re-establishment of native vegetation on the rehabilitated mine site such the terrestrial biodiversity is largely reinstated over time, by:

- Stabilising disturbed areas to prevent erosion in the short- to medium term until a suitable vegetation cover has established; and
- Establishing viable self-sustaining vegetation communities of local fauna, as far as possible.
- (b) Confirm specifically that the environmental objectives in relation to closure have been consulted with landowner and interested and affected parties.
- Closure objectives within the EMPr have been presented to the public as part of the public participation process and on-going closure planning for prospecting.
- (d) Provide a rehabilitation plan that describes and shows the scale and aerial extent of the main mining activities, including the anticipated mining area at the time of closure.
- (e)
 The Rehabilitation & Closure Plan is attached as Appendix 8.
- (f) Explain why it can be confirmed that the rehabilitation plan is compatible with the closure objectives.

The rehabilitation plan relates to each closure objective identified for the mine. Therefore, the rehabilitation plan is considered to be compatible with the closure objectives.

(g) Calculate and state the quantum of the financial provision required to manage and rehabilitate the environment in accordance with the applicable guideline.

##################

It is envisaged that 100 pits will be dug. It may be less depending on results.

937.0522 hectares – 3m x 2m x 2m pit (100 pits). It is planned that only 20 pits will be excavated in the first year, but it may be more if the process is quicker than planned for. It should be kept in mind that no more than 100 pits will be excavated.

The total area to be disturbed a year will be- 20 pits x $(3m \times 2m) = 0.012$ Ha per year

937.0522 hectares –20m x 10m x 3m trench (40 trenches). It is planned that only 8 trenches will be excavated in the first year, but it may be more if the process is quicker than planned for. It should be kept in mind that no more than 40 trenches will be excavated.

The total area to be disturbed a year will be- 8 trenches x ($20m \times 10m$) = 0.16 Ha per year. No more than 0.172ha will be left as un-rehabilitated in two years. Rehabilitation will be done concurrently.

(h) Confirm that the financial provision will be provided as determined.

Financial Guarantee

The financial guarantee for the rehabilitation for land disturbed PGL Boerdery (Pty) Ltd was submitted together with the application for the prospecting right.

Rehabilitation Fund

PGL Boerdery (Pty) Ltd will also make provision for rehabilitation during closure by establishing a rehabilitation trust.

Mechanisms for monitoring compliance with and performance assessment against the environmental management programme and reporting thereon, including

- g) Monitoring of Impact Management Actions
- h) Monitoring and reporting frequency
- i) Responsible persons
- j) Time period for implementing impact management actions
- k) Mechanism for monitoring compliance

SOURCE ACTIVITY	IMPACTS REQUIRING MONITORING	FUNCTIONAL REQUIREMENTS FOR MONITORING	ROLES AND RESPONSIBILITIES (FOR THE EXECUTION OF THE MONITORING	MONITORING AND REPORTING FREQUENCY and TIME PERIODS
	PROGRAMMES		PROGRAMMES)	FOR IMPLEMENTING IMPACT
				MANAGEMENT ACTIONS
Clearance of vegetation	Loss or fragmentation of habitats	 Conduct regular internal audits Conduct regular external audits 	 Environmental Manager Suitable qualified environmental auditor 	Monitoring should be undertaken for duration of operations. Internal audits should be undertaken at least every 6 months. External audits should be undertaken by a suitably qualified auditor on an annual basis. Reports should be made available to the competent authority if required.
Prospecting of Alluvial Diamonds – excavations	Loss of topsoil Erosion Air Pollution Noise Impact on potential cultural and heritage artefacts	 Conduct regular internal audits Conduct regular external audits 	 Environmental Manager Suitable qualified environmental auditor 	Monitoring should be undertaken for duration of operations. Internal audits should be undertaken at least every 6 months. External audits should be undertaken by a suitably qualified auditor on an annual basis. Reports should be made available to the competent authority if required.
Waste management	Pollution	 Conduct regular internal audits Conduct regular external audits 	 Environmental Manager Suitable qualified environmental auditor 	Monitoring should be undertaken for duration of operations. Internal audits should be undertaken at least every 6 months. External audits

Milnex 189 CC: EIA065 – Draft EIR & EMPr: Prospecting Right Application of diamonds alluvial & diamonds general on the farm Catharina 44 and farm Honesty 43, Registration Division HN, North West Province

				should be undertaken by a suitably qualified auditor on an annual basis. Reports should be made available to the competent authority if required.
Water Use and Quality	Water pollution	 Conduct regular internal audits Conduct regular external audits 	 Environmental Manager Suitable qualified environmental auditor 	Monitoring should be undertaken for duration of operations. Internal audits should be undertaken at least every 6 months. External audits should be undertaken by a suitably qualified auditor on an annual basis. Reports should be made available to the competent authority if required.

m) Indicate the frequency of the submission of the performance assessment report.

External audits should be undertaken by a suitably qualified auditor on an annual basis. Reports should be made available to the Competent Authority if required.

n) Environmental Awareness Plan

(1) Manner in which the applicant intends to inform his or her employees of any environmental risk which may result from their work.

PGL Boerdery (Pty) Ltd will implement an Environmental Awareness Plan which will include various mechanisms for informing employees of environmental risks resulting from their work, including:

- Induction training for full –time staff and contractors;
- In-house training sessions to be held with relevant employees;
- On the job training regarding environmental issues
- Training and skills development

The above measures will be implemented through an Environmental Communication Strategy to be implemented.

(2) Manner in which risks will be dealt with in order to avoid pollution or the degradation of the environment.

PGL Boerdery (Pty) Ltd will implement an incident reporting and reporting procedure in order to identify risks timeously and implement actions to avoid or minimise environmental impacts.

Specific information required by the Competent Authority (Among others, Confirm that the financial provision will be reviewed annually).

No specific information requirements have been detailed by the Competent Authority.

2) UNDERTAKING

Tho	EAD	herewith	confirme
1116		nerewiin	COMMINIS

a)	the correctness of the informat	tion provided in the reports $oxtime$]
----	---------------------------------	---------------------------------------	---

- **b)** the inclusion of comments and inputs from stakeholders and I&APs; \boxtimes
- the inclusion of inputs and recommendations from the specialist reports where relevant; \boxtimes and
- d) the acceptability of the project in relation to the finding of the assessment and level of mitigation proposed; \boxtimes



Pahacle.

Signature of the environmental assessment practitioner:

Milnex 189 CC – Environmental Consultants

Name of company:

26 - 02 - 2016

Date:

-END-