


- TOEGANG NA PROEF IS VAN 8:00 TOT 16:00.
- NIET IYN MOET SAAM MET OORSPRONKELIJK IYN WERF
- GEEN VURE TIJDEN BOU VAN IYN OF DIE GROND.
- ALLE SCRIBE MOET VERWIJDER WORD NA IYN AFBOU IS.



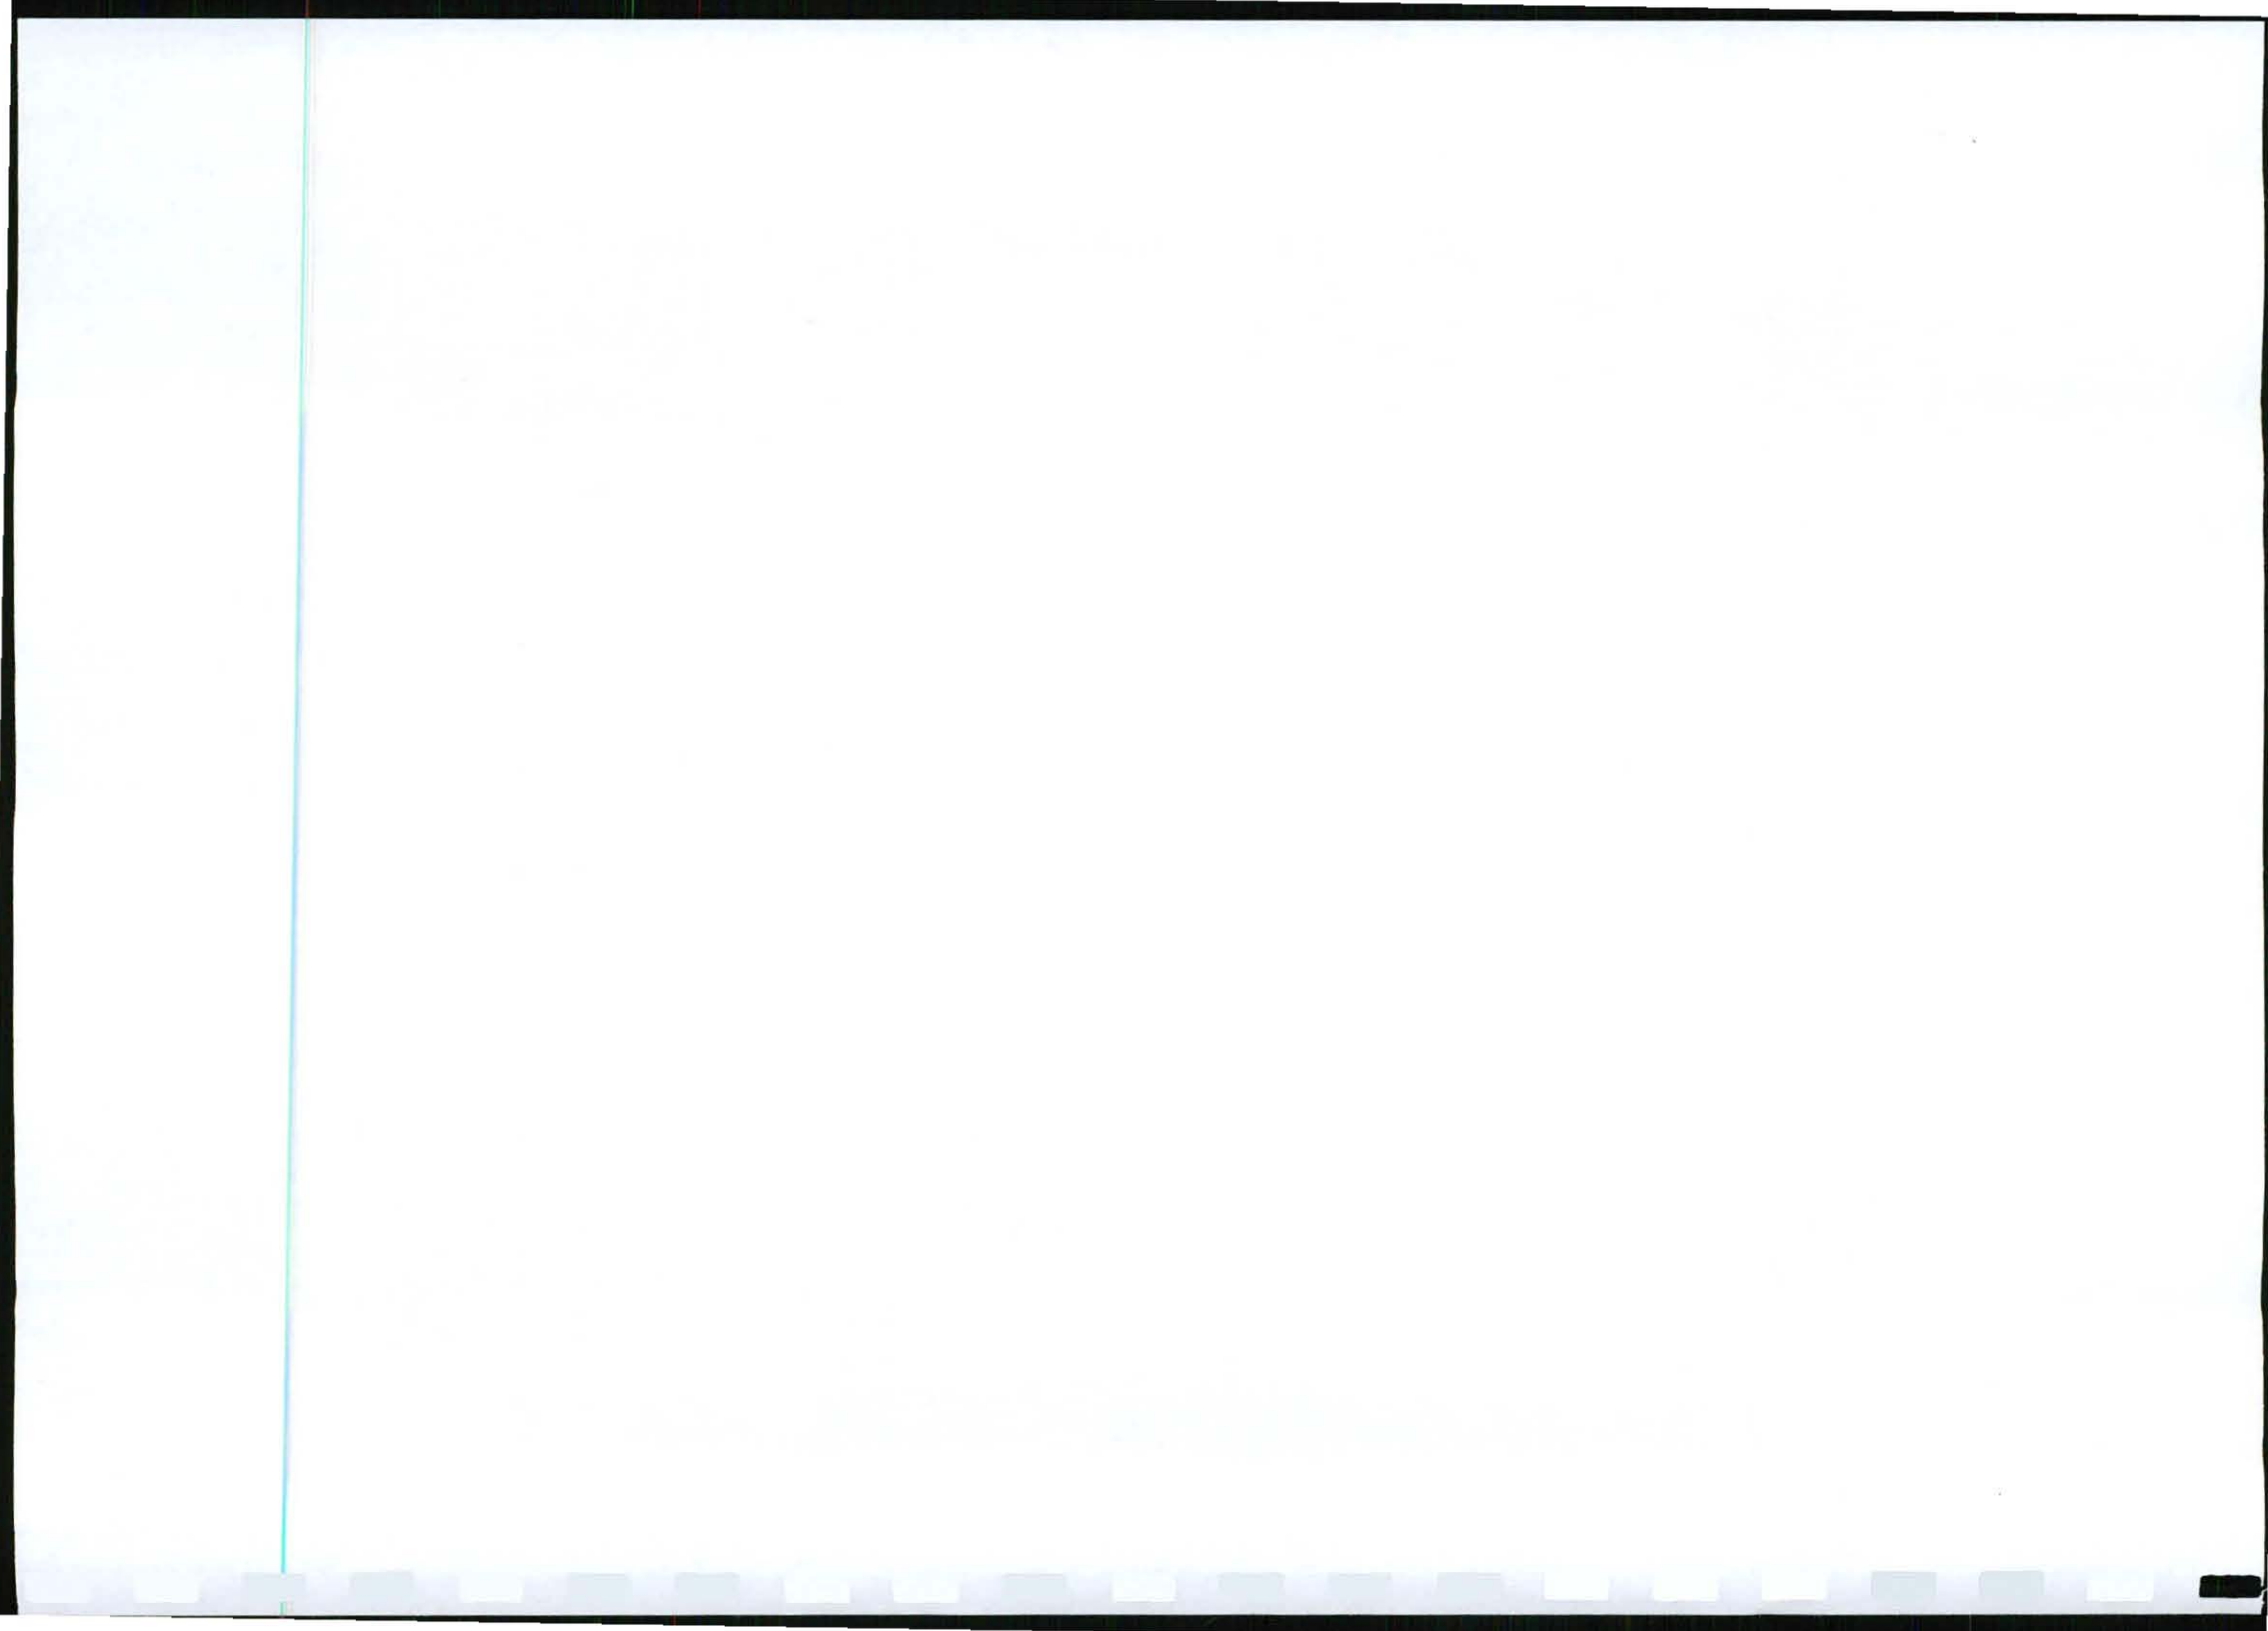

Posbus 36593
Menlo Park
0102

Tel: 082 568 6344/ 012 362 7179
Faks: 086 675 4026
E-pos: riap@peopletexture.net

ESKOM BULGE-DORSET 132KV LYN PROJEK: Ref nr: 12/12/20/2094
OMGEWINGSIMPAKSTUDIE : PUBLIEKE DEELNAME PROGRAM
INLIGTINGSDAG: 22 FEBRUARIE 2011
VERSOEK VIR KOMMENTAAR

U kommentaar is vir ons belangrik.

U word vriendelik versoek om die onderstaande te voltooi en u kommentaar t.o.v. die projek aan te dui. Oorhandig die vorm per hand, stuur per faks, e-pos of pos na Texture (kontak besonderhede op die briefhoof)

NAAM: WALLY HEADON.

NAAM VAN MAATSKAPPY / PLAAS(E) / EIENDOMSBEKRYWING(S):
GROOT WATER 176

KONTAKBESONDERHEDE :

Tel/Sel: 083 509 1003


Faks: —

Posadres : 1059 VAALWATER 0530

E-pos adres : RONICAMEADON@GMAIL.COM

My kommentaar/ aanbevelings/ versoeke t.o.v. die projek is as volg:

GEEN.

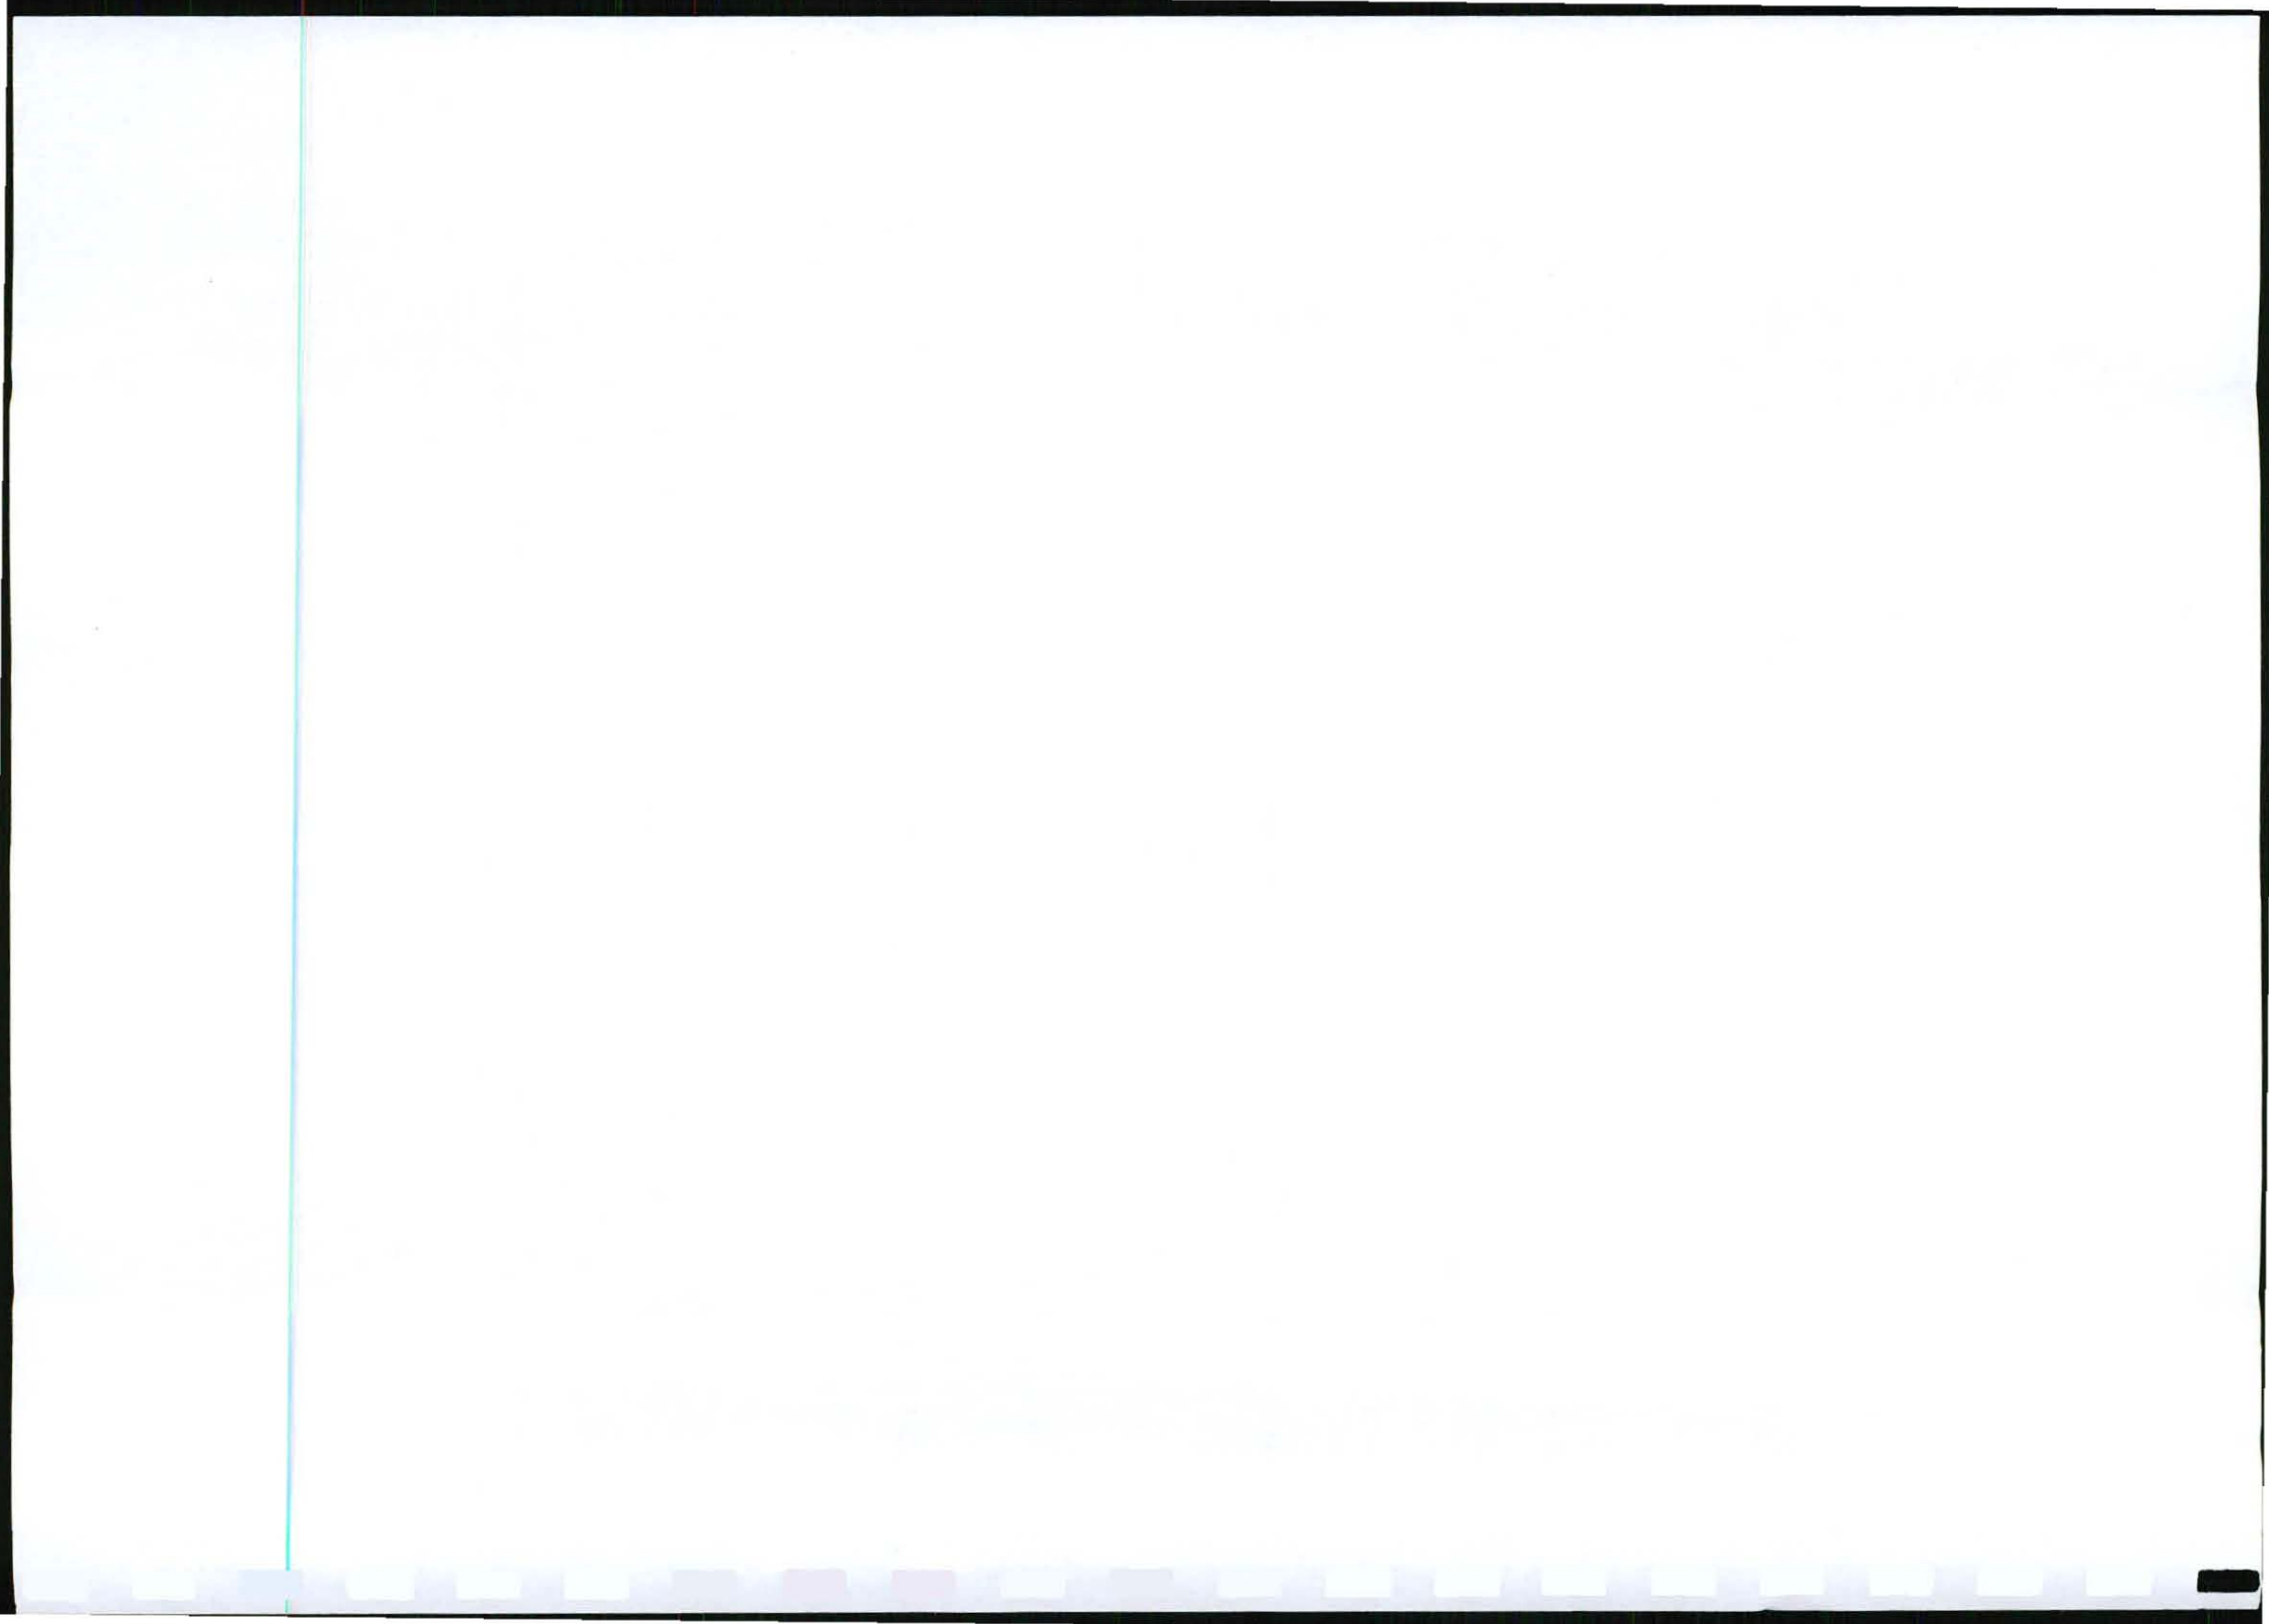

ESKOM BULGE-DORSET 132KV LYN PROJEK: Ref nr: 12/12/20/2094
OMGEWINGSIMPAKSTUDIE : PUBLIEKE DEELNAME PROGRAM
INLIGTINGSDAG: 22 FEBRUARIE 2011
VERSOEK VIR KOMMENTAAR

U kommentaar is vir ons belangrik.

U word vriendelik versoek om die onderstaande te voltooi en u kommentaar t.o.v. die projek aan te dui. Oorhandig die vorm per hand, stuur per faks, e-pos of pos na Texture (kontak besonderhede op die briefhoof)

NAAM: SA. JAHN HEERDEN.

NAAM VAN MAATSKAPPY / PLAAS(E) / EIENDOMSBEKRYWING(S):

KONTAKBESONDERHEDE :

Tel/Sel: 0829214474.


Faks:

Posadres : Posbus 104, Sepuldale, 055.

E-pos adres :

My kommentaar/ aanbevelings/ versoeke t.o.v. die projek is as volg:

*ged 2 van die Plaas Grootwater - Pad Lang is reg.
ged 6 van die Plaas Koffertent NO 178 - Kq
ged 1 van die Plaas Welyfontein 180 Kq - Hengroed
groot 275 Hektar die 1e reglyn gaa. skak die
glasen is nie van voor die Hengroed
word in 2 gedeeltes. word vir wisk gebruik
teel ingagte wil die nie vee enige. om
te gage die Hengroed is wildwerd met klip. wint.
die 1e gedeelte roete is klomp ongelyk en
om te negatiewe effek op die plaas. die in
nie van die 1e gedeelte*

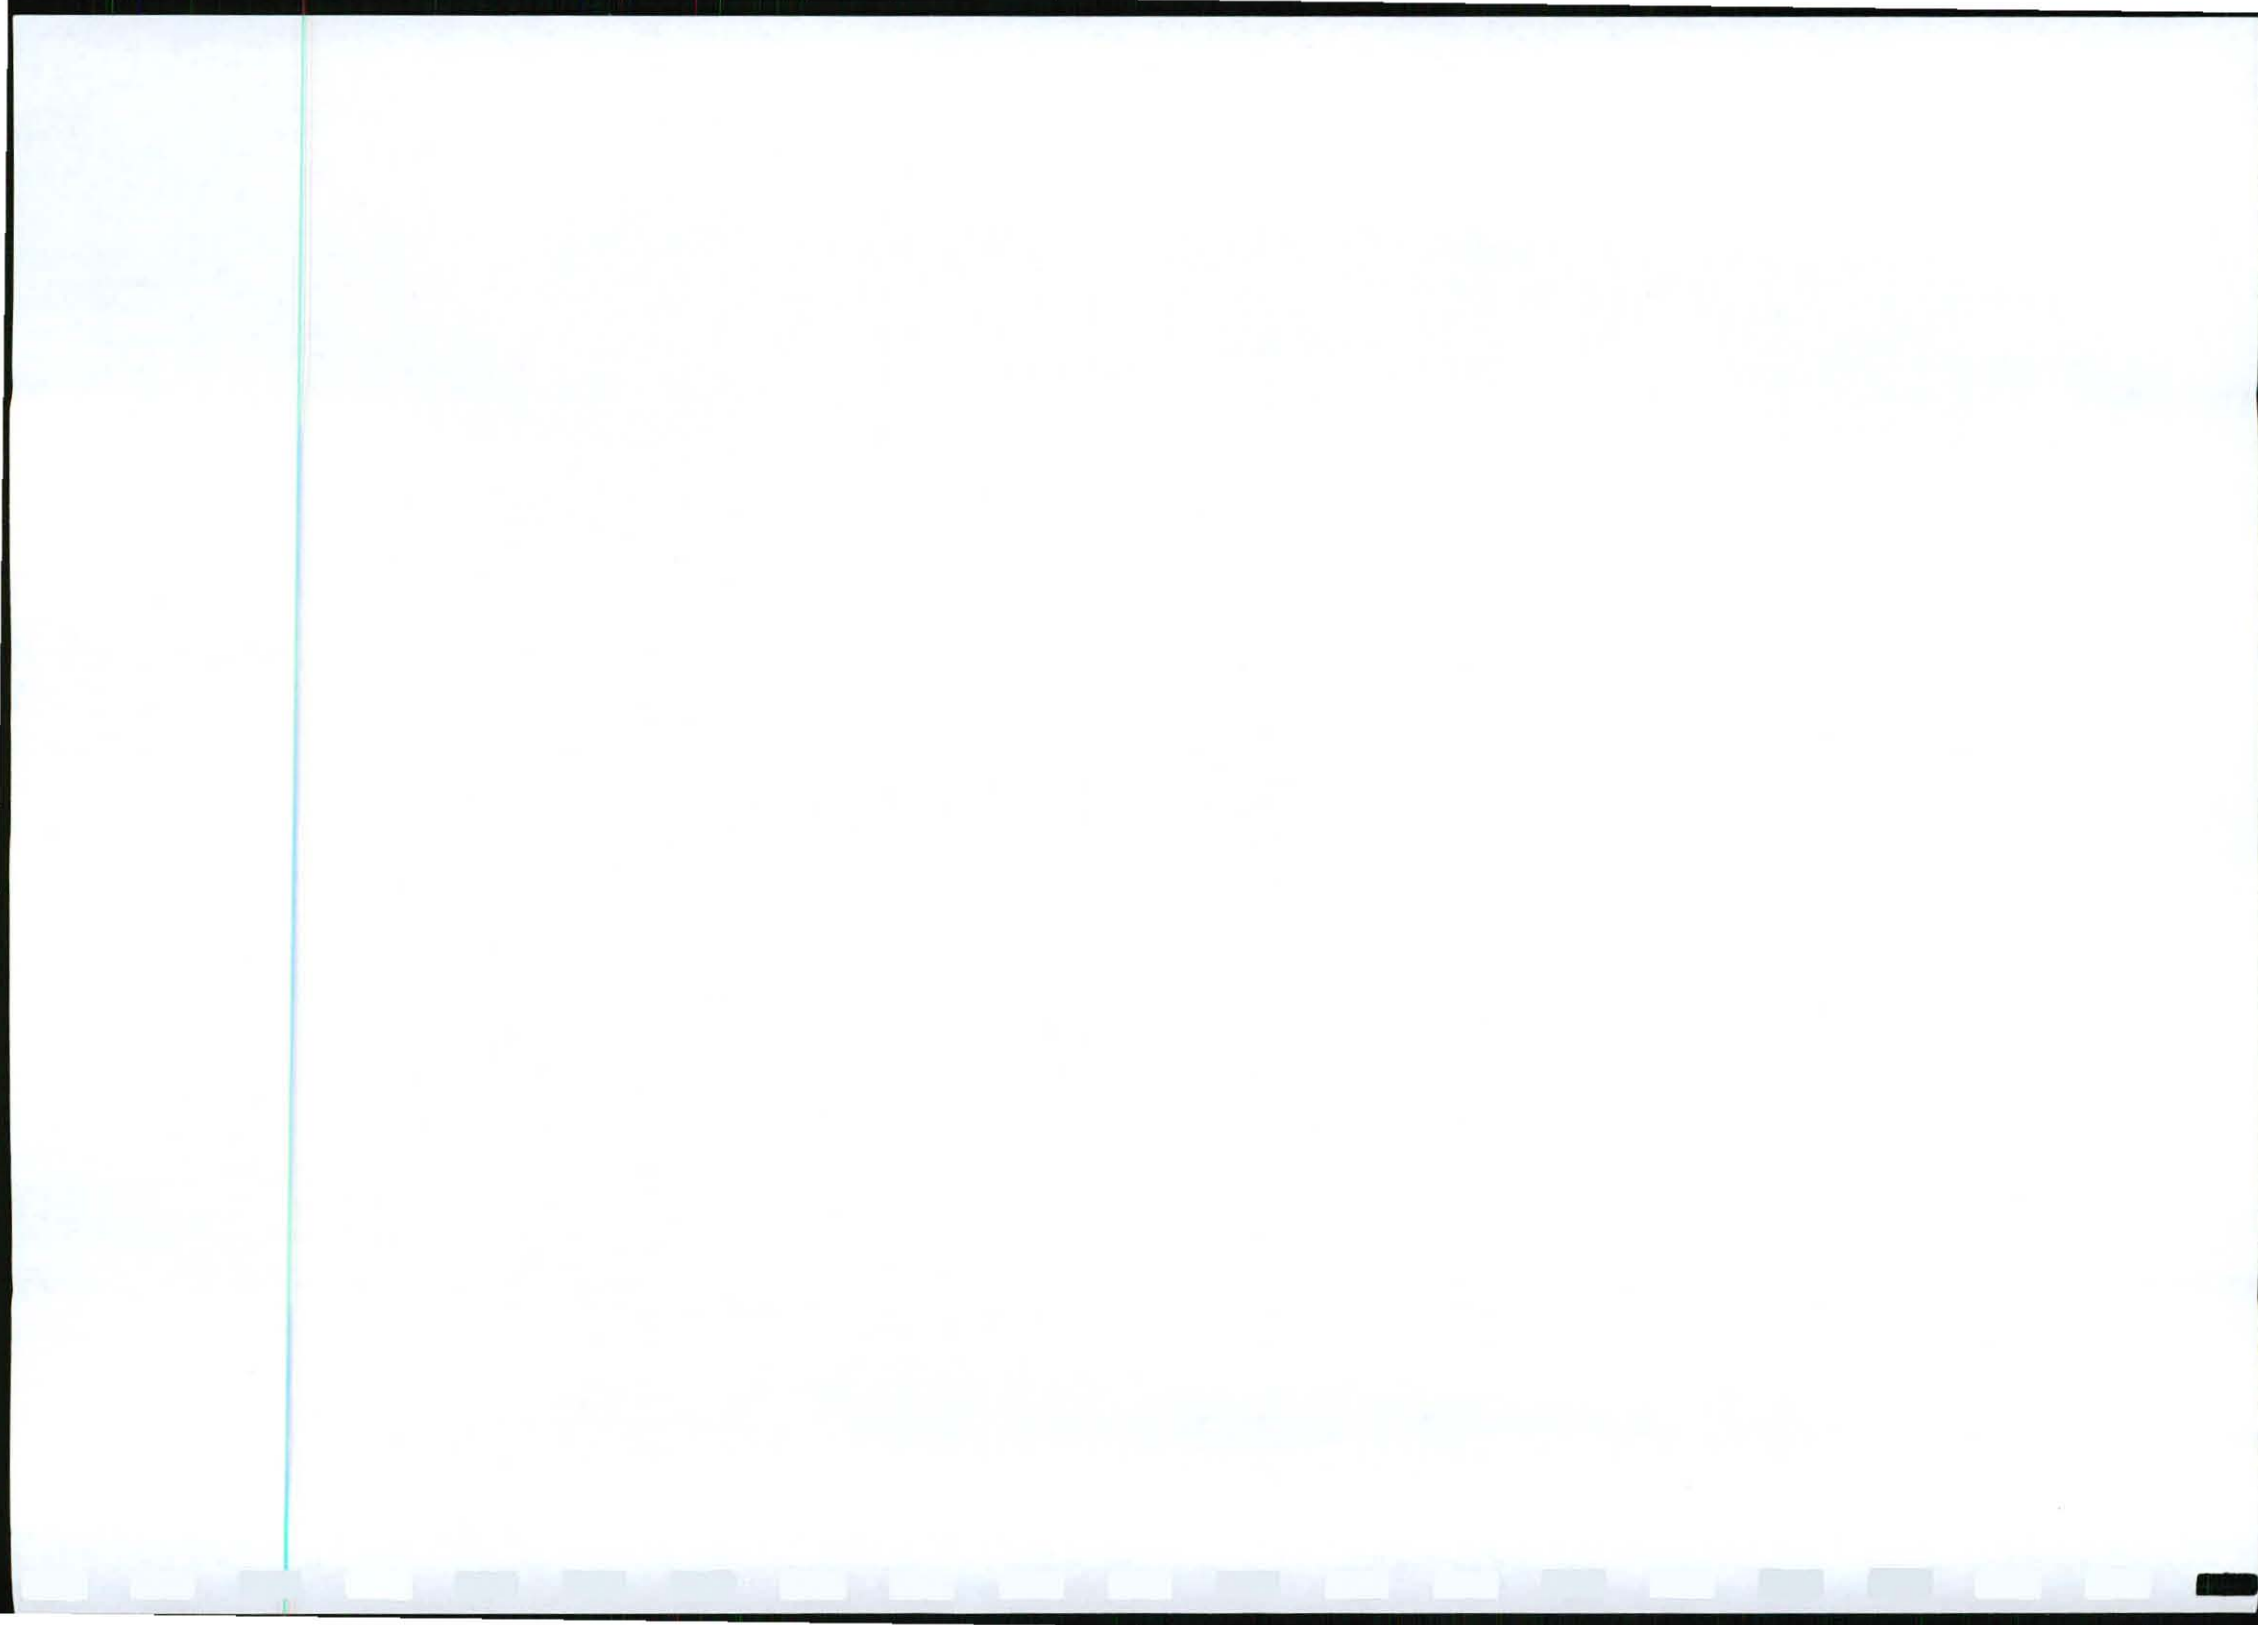

ESKOM BULGE-DORSET 132kV LYN PROJEK: Ref nr: 12/12/20/2094
OMGEWINGSIMPAKSTUDIE : PUBLIEKE DEELNAME PROGRAM
INLIGTINGS DAG: 22 FEBRUARIE 2011
VERSOEK VIR KOMMENTAAR

U kommentaar is vir ons belangrik.

U word vriendelik versoek om die onderstaande te voltooi en u kommentaar t.o.v. die projek aan te dui. Oorhandig die vorm per hand, stuur per faks, e-pos of pos na Texture (kontak besonderhede op die briefhoof)

NAAM: C. L. Pienaar

NAAM VAN MAATSKAPPY / PLAAS(E) / EIENDOMSBEKRYWING(S):

Christo Pienaar Trust Gedeelte 1+2 Kaffersfontein

KONTAKBESONDERHEDE :

Tel/Sel: 0834422404

Faks: -


Posadres : Posbus 24738

Drie Riviere Oos 1941

E-pos adres : _____

My kommentaar/ aanbevelings/ versoeke t.o.v. die projek is as volg:

Toegeruste boorgat word geïmplementeert
Vermydeling van bome op reserwe gedeelte ^{en} vestiging
van weidinggras sal toegepas moet word.
Dik bloelga opsie sal meer aanvaarbaar wees.

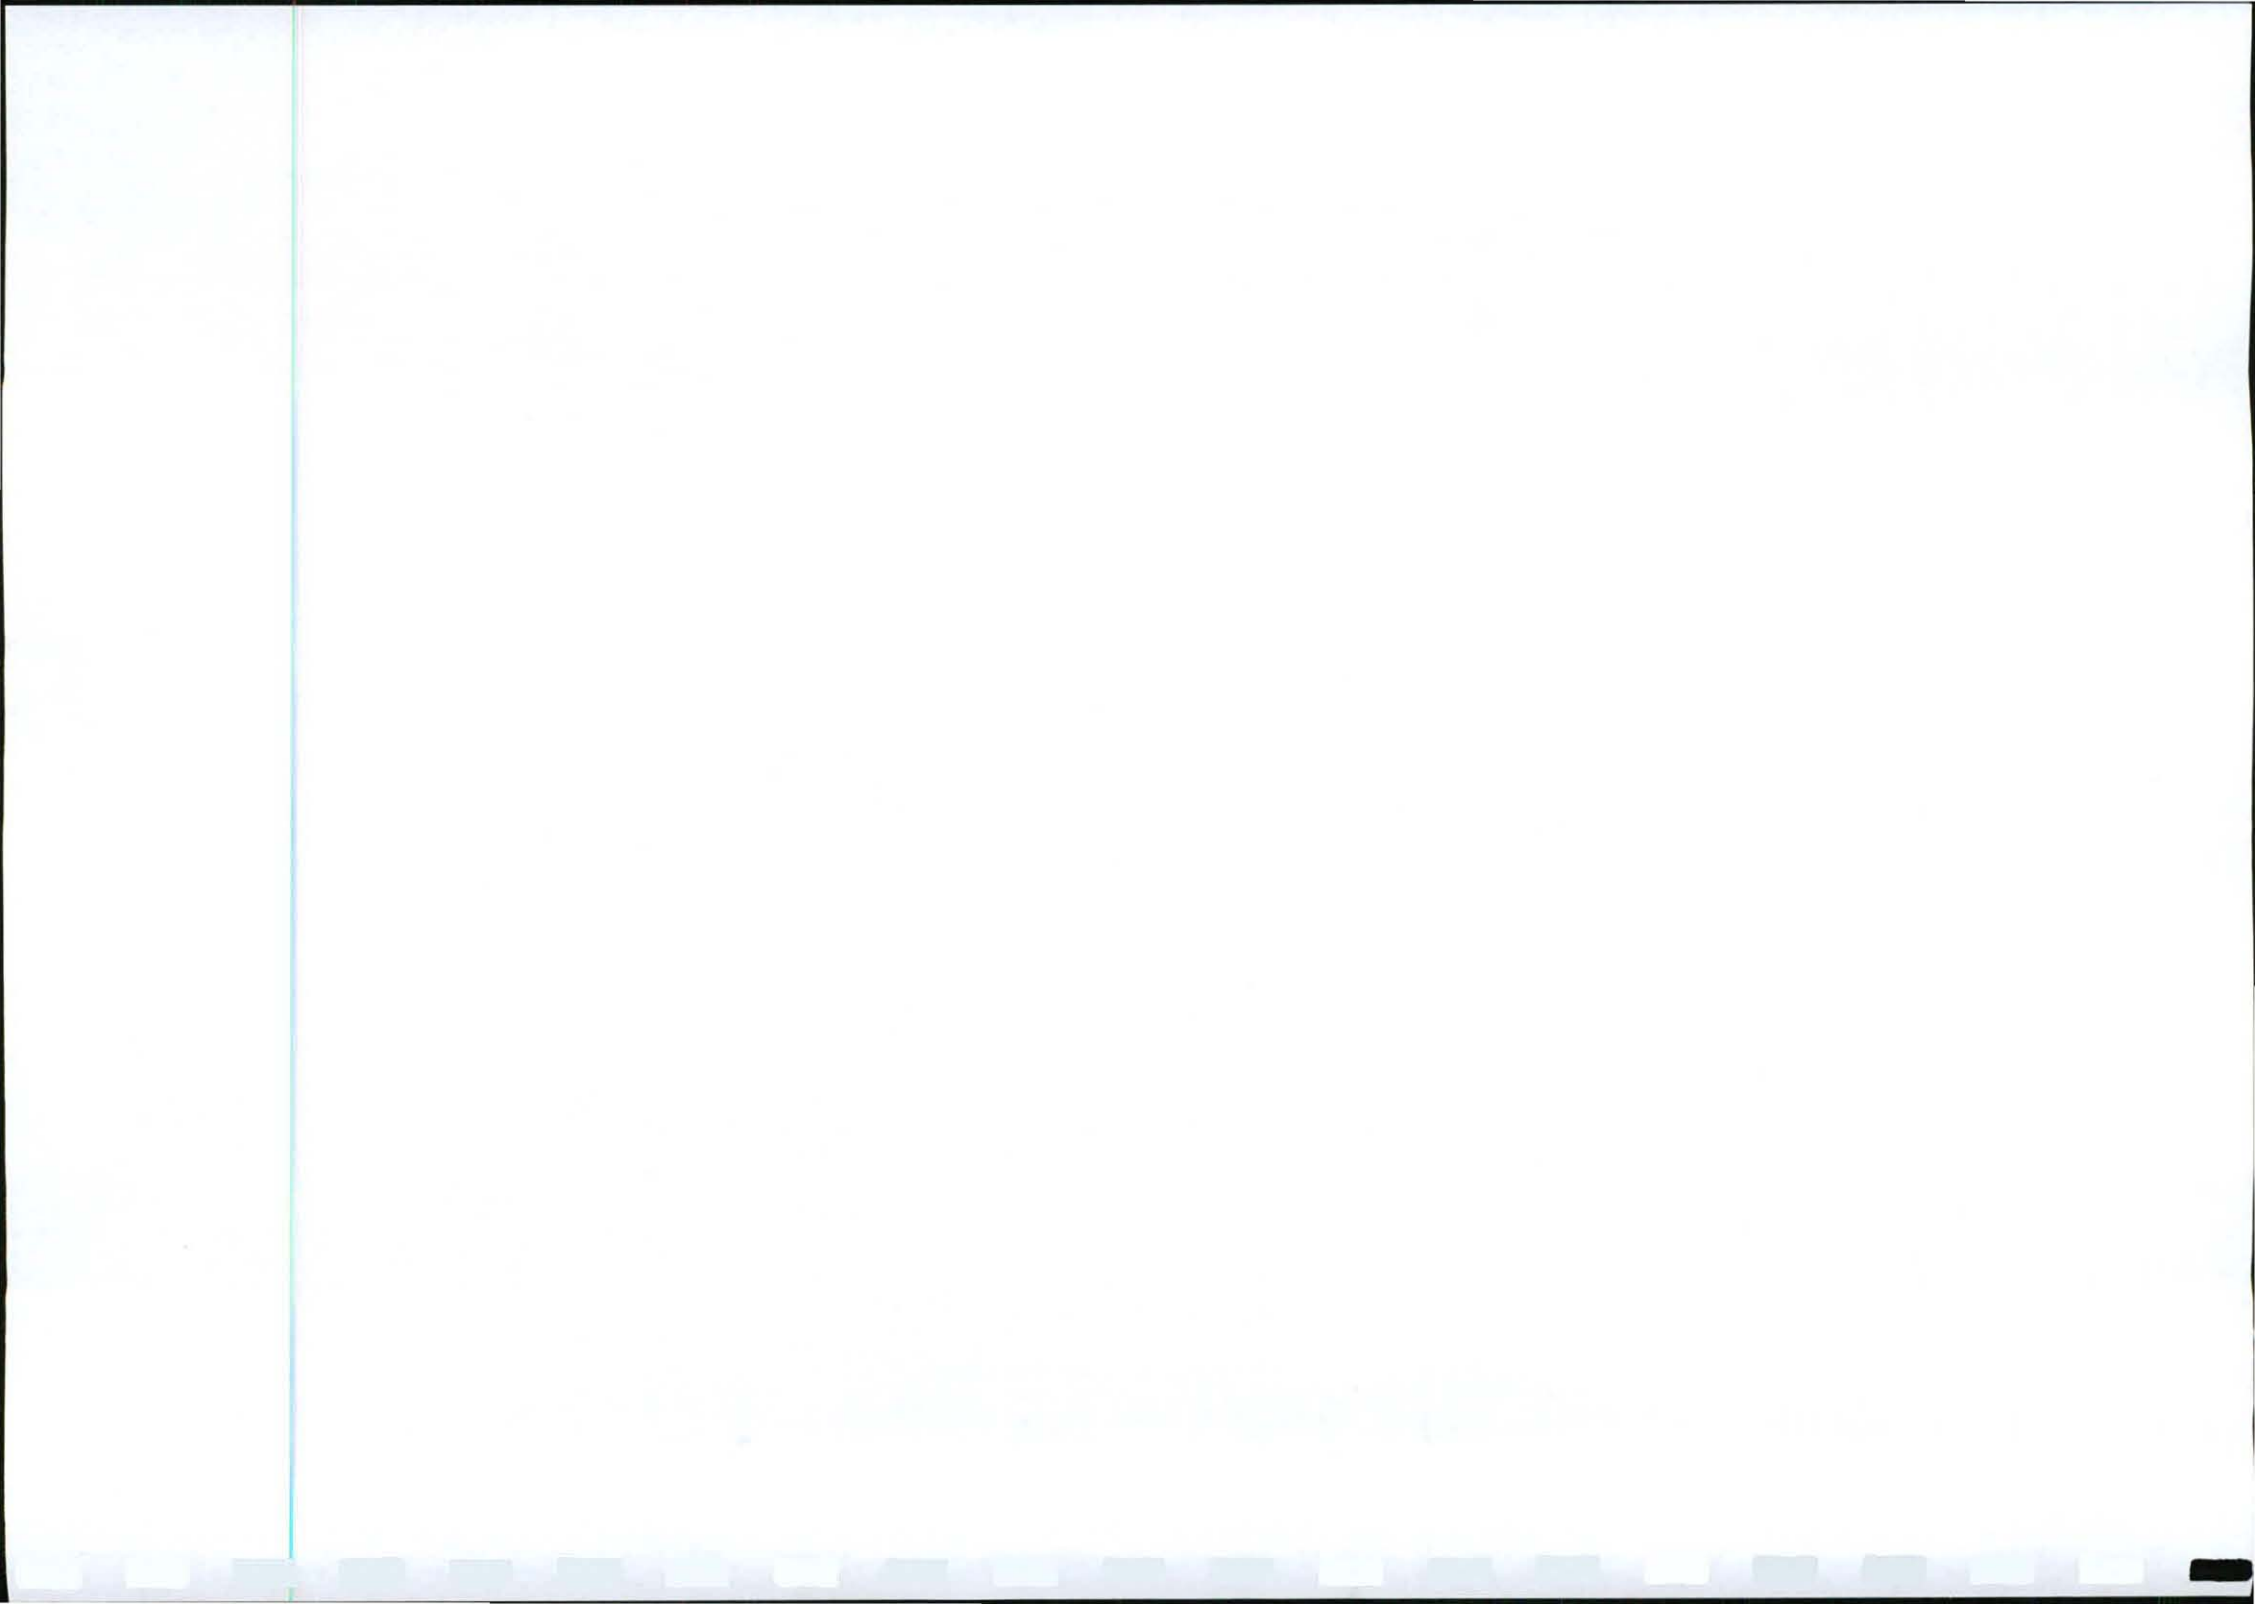

ESKOM BULGE-TOULON 33kV LYN PROJEK: Ref nr: 12/12/20/2097
OMGEWINGSIMPAKSTUDIE : PUBLIEKE DEELNAME PROGRAM
INLIGTINGSDAG: 22 FEBRUARIE 2011
VERSOEK VIR KOMMENTAAR

U kommentaar is vir ons belangrik.

U word vriendelik versoek om die onderstaande te voltooi en u kommentaar t.o.v. die projek aan te dui. Oorhandig die vorm per hand, stuur per faks, e-pos of pos na Texture (kontak besonderhede op die briefhoof)

NAAM: J. J. NEL

NAAM VAN MAATSKAPPY / PLAAS(E) / EIENDOMSBEKRYWING(S):

PLAAS GROOTWATER

KONTAKBESONDERHEDE :

Tel/Sel: 076 888 6355

Faks: _____

Posadres : POSBUS 380

VABLWATER 0530

E-pos adres : _____

My kommentaar/ aanbevelings/ versoeke t.o.v. die projek is as volg:


ONS SAL BLY WEES AS ESKOM

DIE LYN VAN DIE BOORGATE AF

KAN WEG HOU ASB

OF AS EK 'N SKRYFTELIKE


NAARBORG KAN KRY DAT "HY" DIE

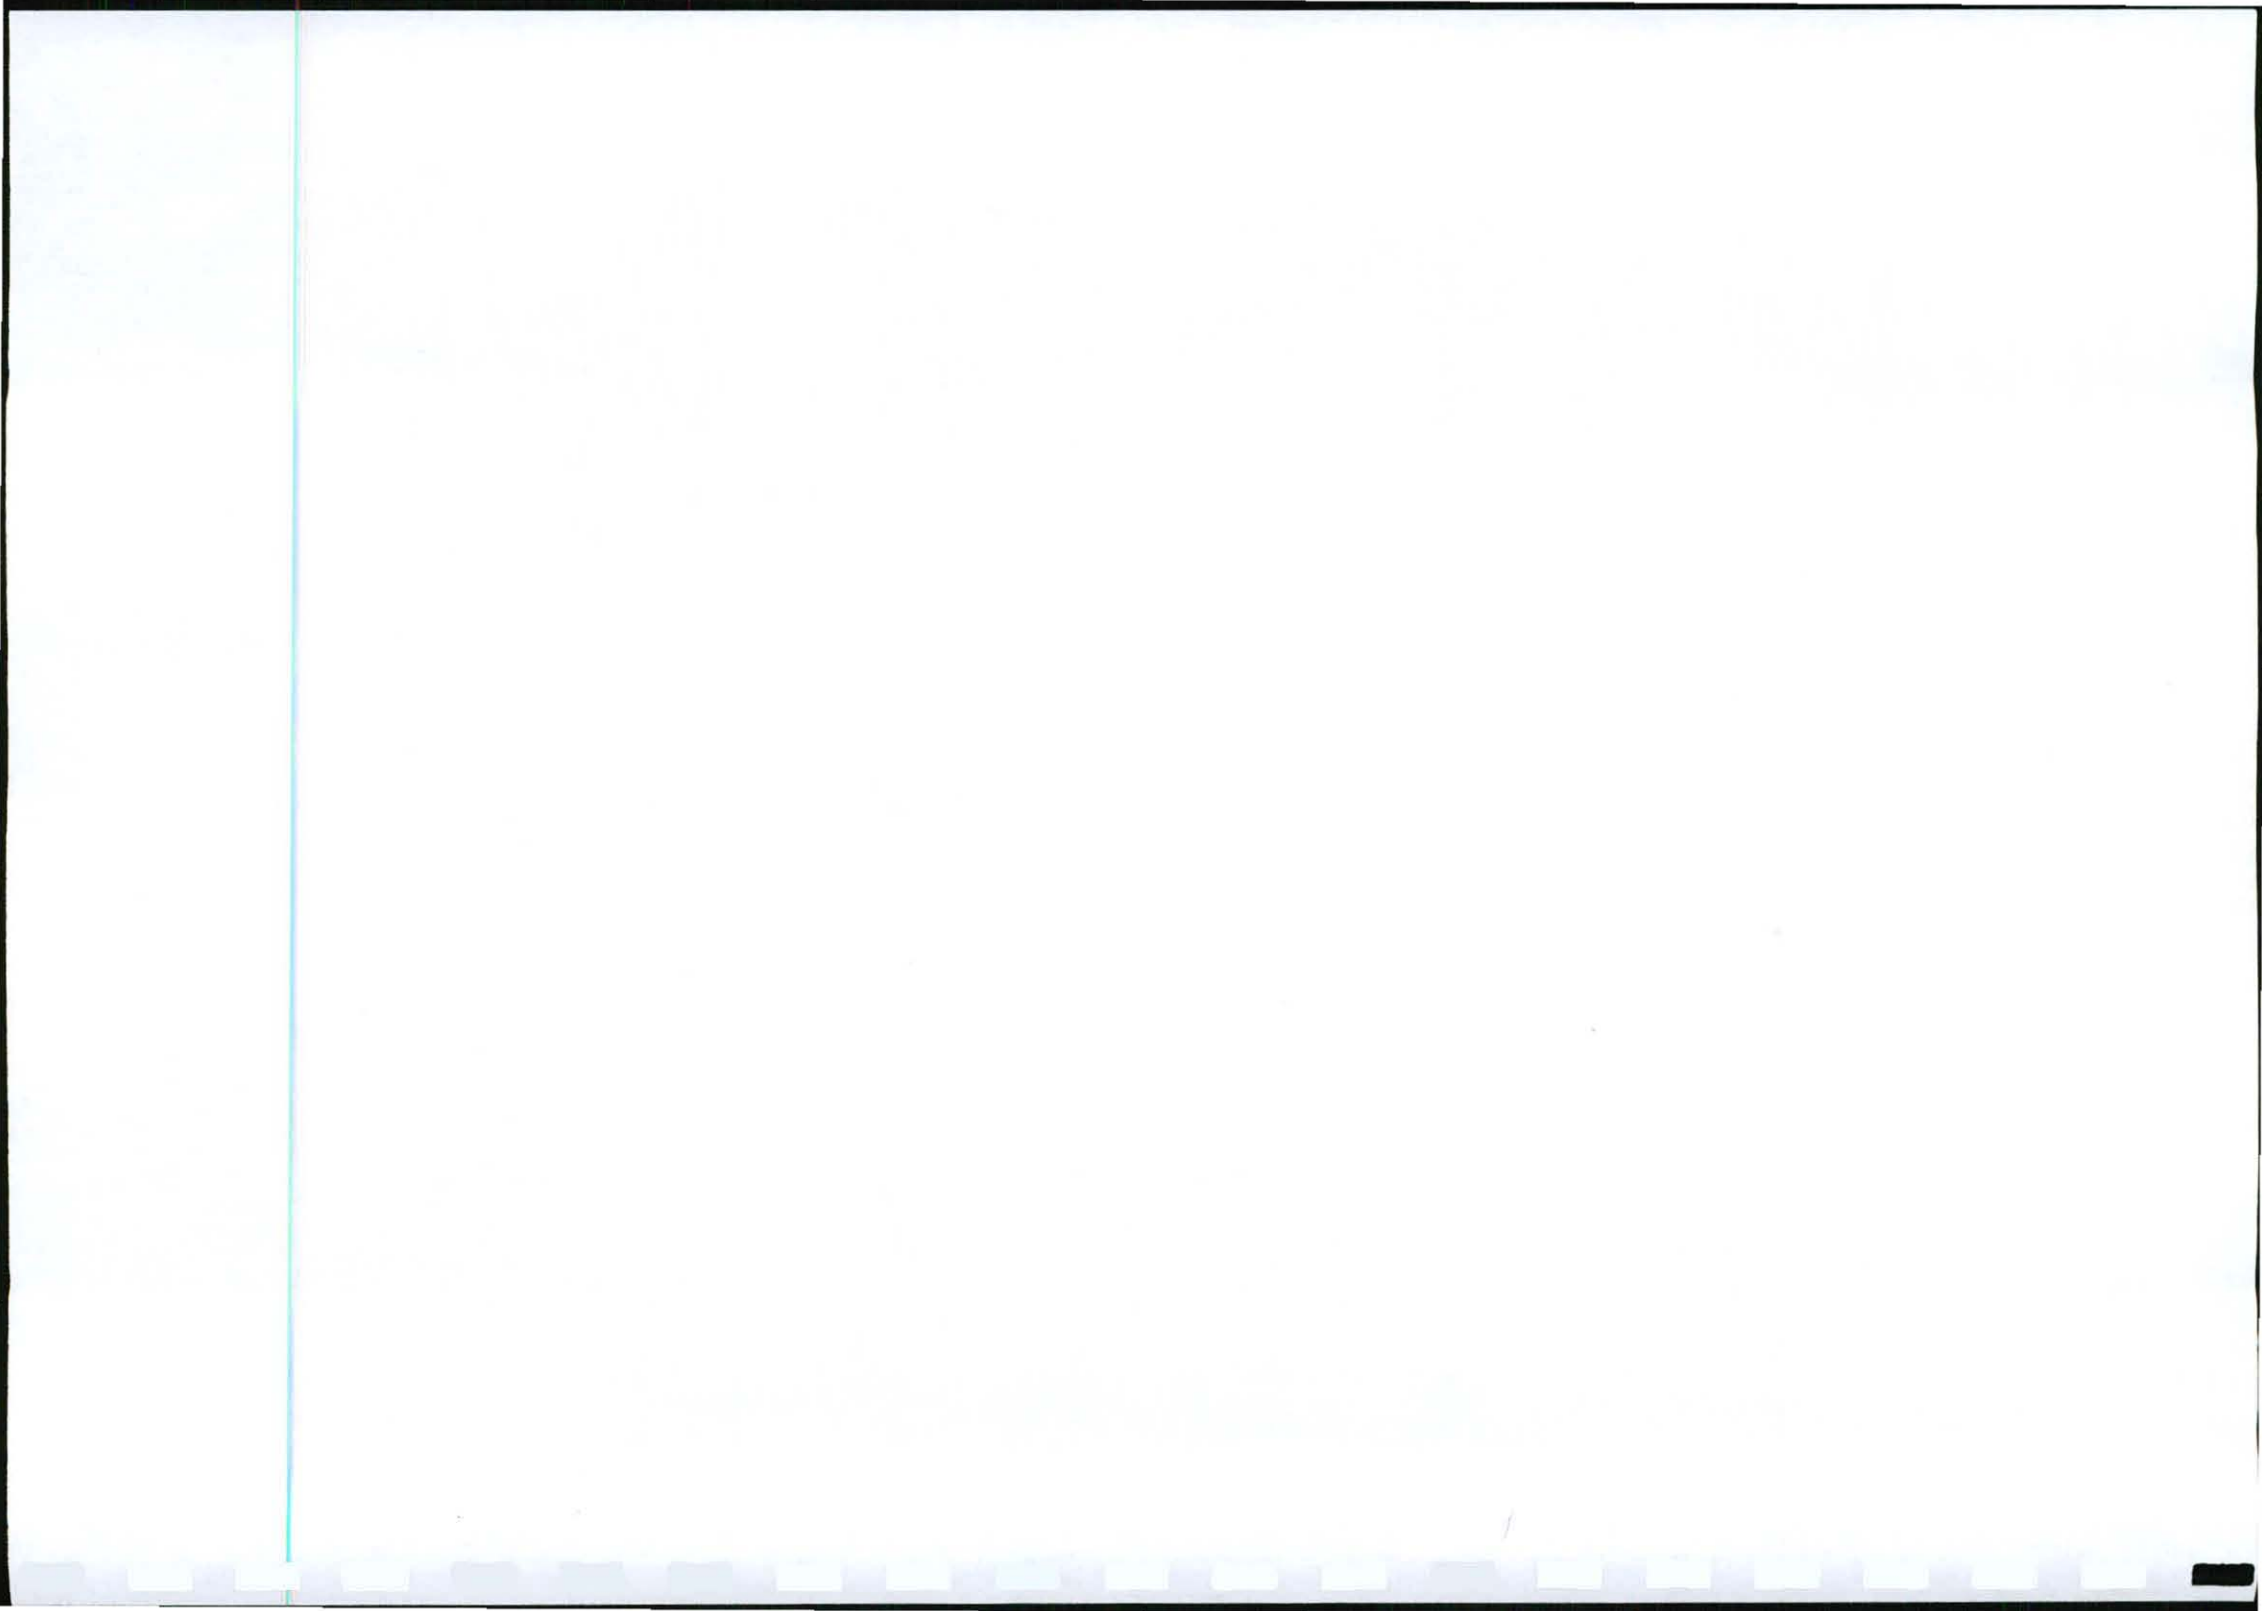

ESKOM LYN NIE MY BOORGAT SAL
AFKLEER OF ENIGE PROBLEEM SAL
VERSKAF.

MOET DAAR DAN ALLE STOMP
BOME MET 'N EKSKEVATOR VER-
WYDER WORD. GATE TOEGEMAAK
EN SMUTSVINGER SAAD GEPLANT
WORD. IN PLEK WAAR BOME-
UIT GEHAAL IS BYVOORBAAD.
BAIE DANKIE J.J. NEL.

(JOLANDA WAS TEGENWOORDIG. NAMENS)
(J.J. NEL.)

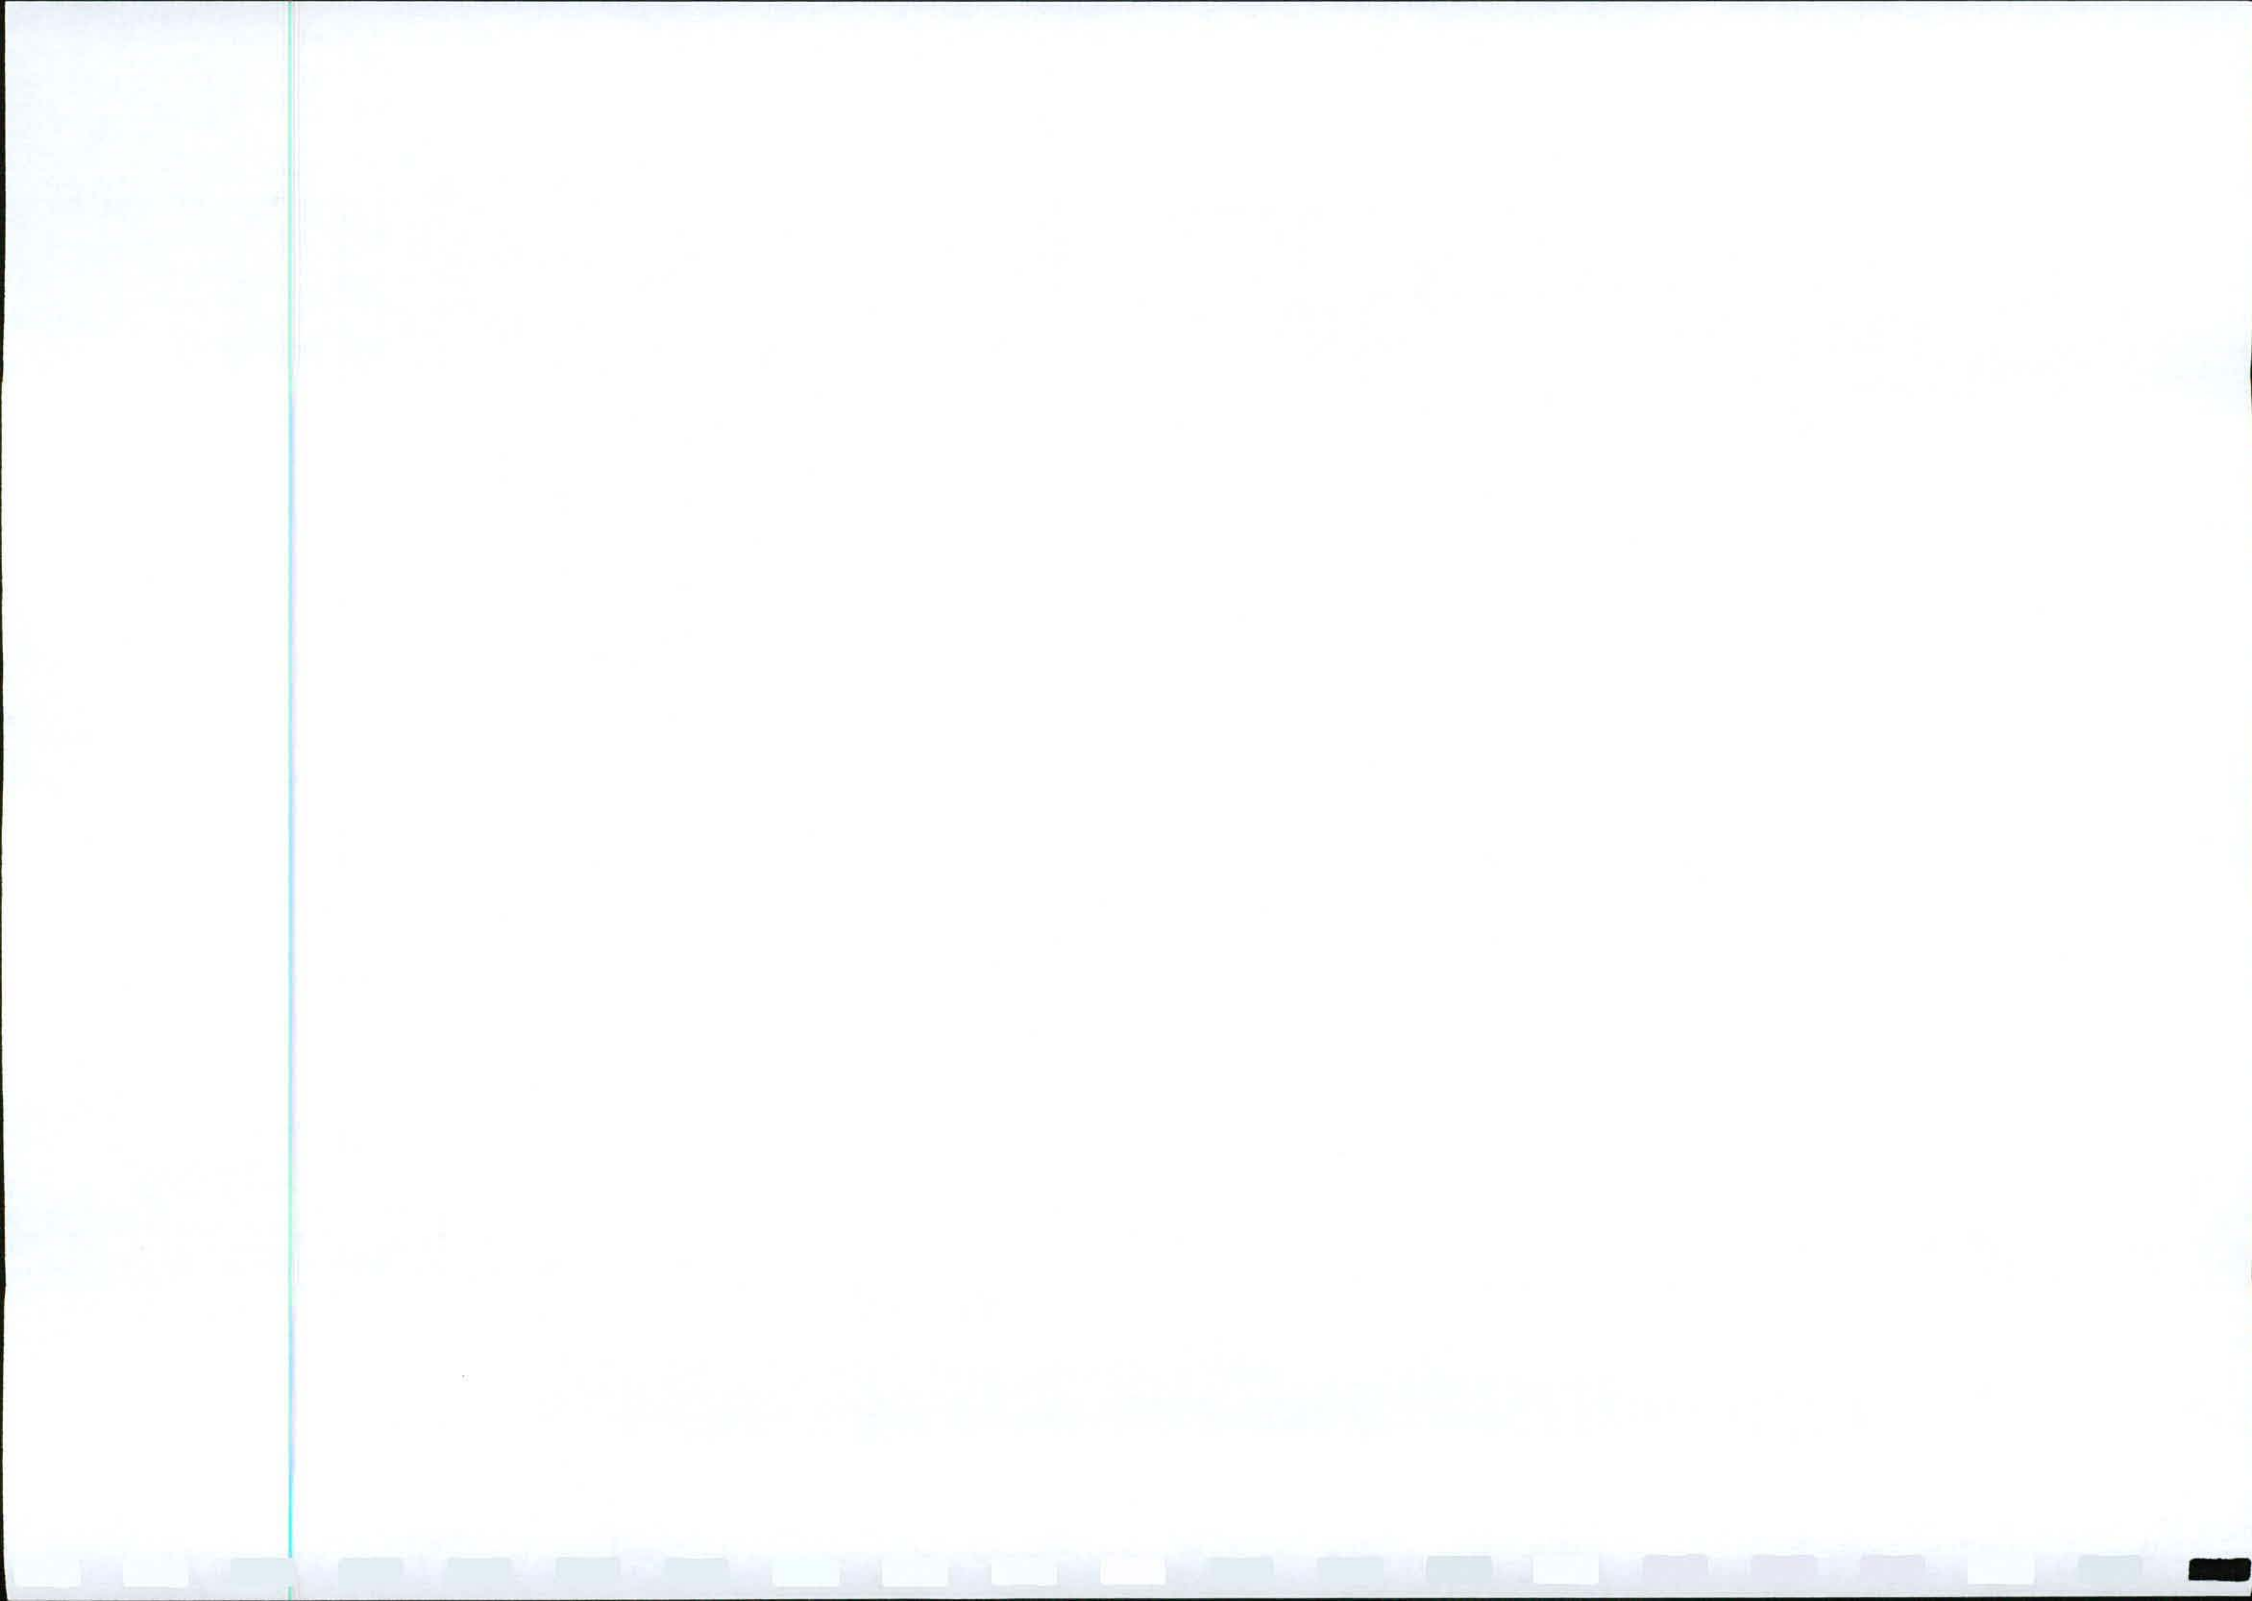

ESKOM BULGE-TOULON 33kV LYN PROJEK: Ref nr: 12/12/20/2097
OMGEWINGSIMPAKSTUDIE : PUBLIEKE DEELNAME PROGRAM
INLIGTINGSDAG: 22 FEBRUARIE 2011
VERSOEK VIR KOMMENTAAR

U kommentaar is vir ons belangrik.

U word vriendelik versoek om die onderstaande te voltooi en u kommentaar t.o.v. die projek aan te dui. Oorhandig die vorm per hand, stuur per faks, e-pos of pos na Texture (kontak besonderhede op die briefhoof)

NAAM: STOFFEL SNIJMAN (LEON JACOBS)

NAAM VAN MAATSKAPPY / PLAAS(E) / EIENDOMSBEKRYWING(S):

NYAKH GAMA LODGE : PLAAS JACOBSHOOPTE (WAS BRACKFONTEIN EN DWARDFONTEIN GEDALTE S (SIE N AKTES AANGEGES.))

KONTAKBESONDERHEDE :

Tel/Sel: 014-7553982


Faks: _____

Posadres : P/B 968 VAALWATER

E-pos adres : Stoffel.Susan@gmail.com

My kommentaar/ aanbevelings/ versoeke t.o.v. die projek is as volg:

DAAR LOOP VANAF DORSET REEDS 'N BESTAANDE
LYN. DIS BESAS AS DIE LYN LANGS DIE BESTAANDE
LYN LOOP. (VAAWIS STIPPEL LYN.)

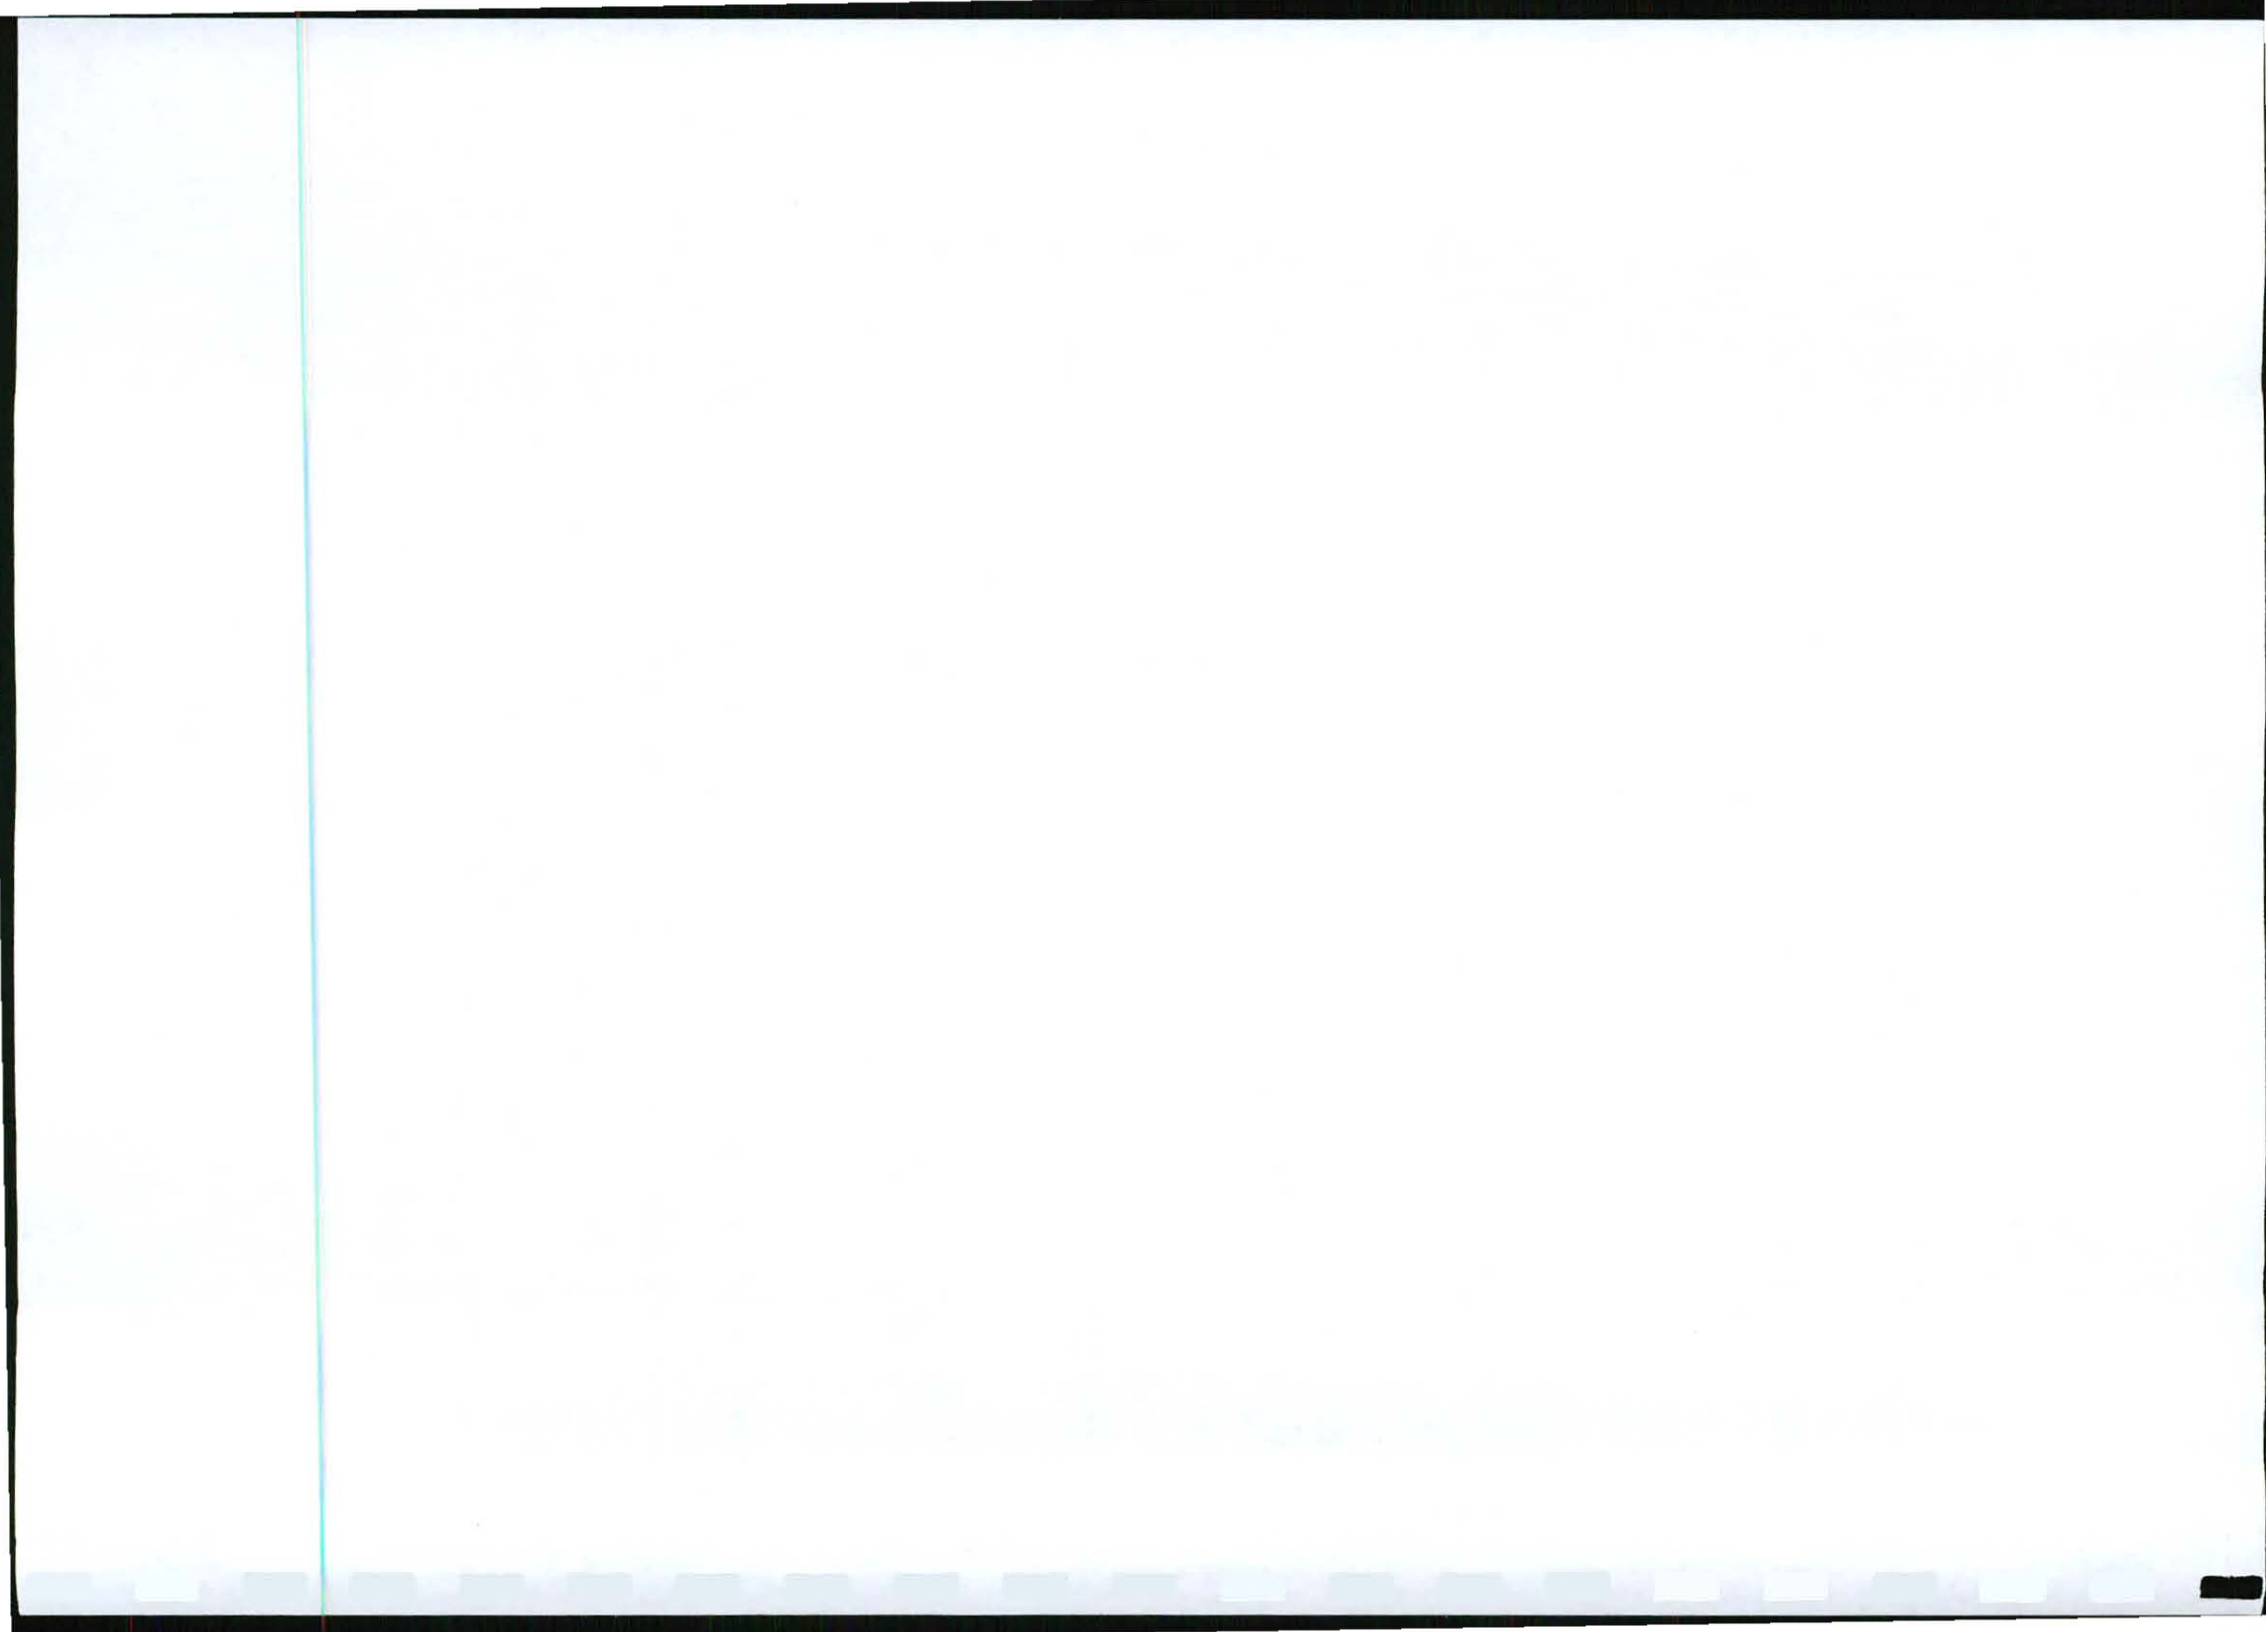

ESKOM BULGE-DORSET 132KV LYN PROJEEK: Ref nr: 12/12/20/2094
OMGEWINGSIMPAKSTUDIE : PUBLIEKE DEELNAME PROGRAM
INLIGTINGSDAG: 22 FEBRUARIE 2011
VERSOEK VIR KOMMENTAAR

U kommentaar is vir ons belangrik.

U word vriendelik versoek om die onderstaande te voltooi en u kommentaar t.o.v. die projek aan te dui. Oorhandig die vorm per hand, stuur per faks, e-pos of pos na Texture (kontak besonderhede op die briefhoof)

NAAM: G.J.P. Buys (DEON)

NAAM VAN MAATSKAPPY / PLAAS(E) / EIENDOMSBEKRYWINGS:

Gems Hills Res PTJ LTD
VISGAT 64 KR

KONTAKBESONDERHEDE :

Tel/Sel: 0825761743

Faks: 0147554121


Posadres : PO Box 104

VAAKWATER 0530


E-pos adres : deomar@bosveld.co.za

My kommentaar/ aanbevelings/ versoeke t.o.v. die projek is as volg:

hou langs bestaande lyn tot
by Visgat. Swanevelder

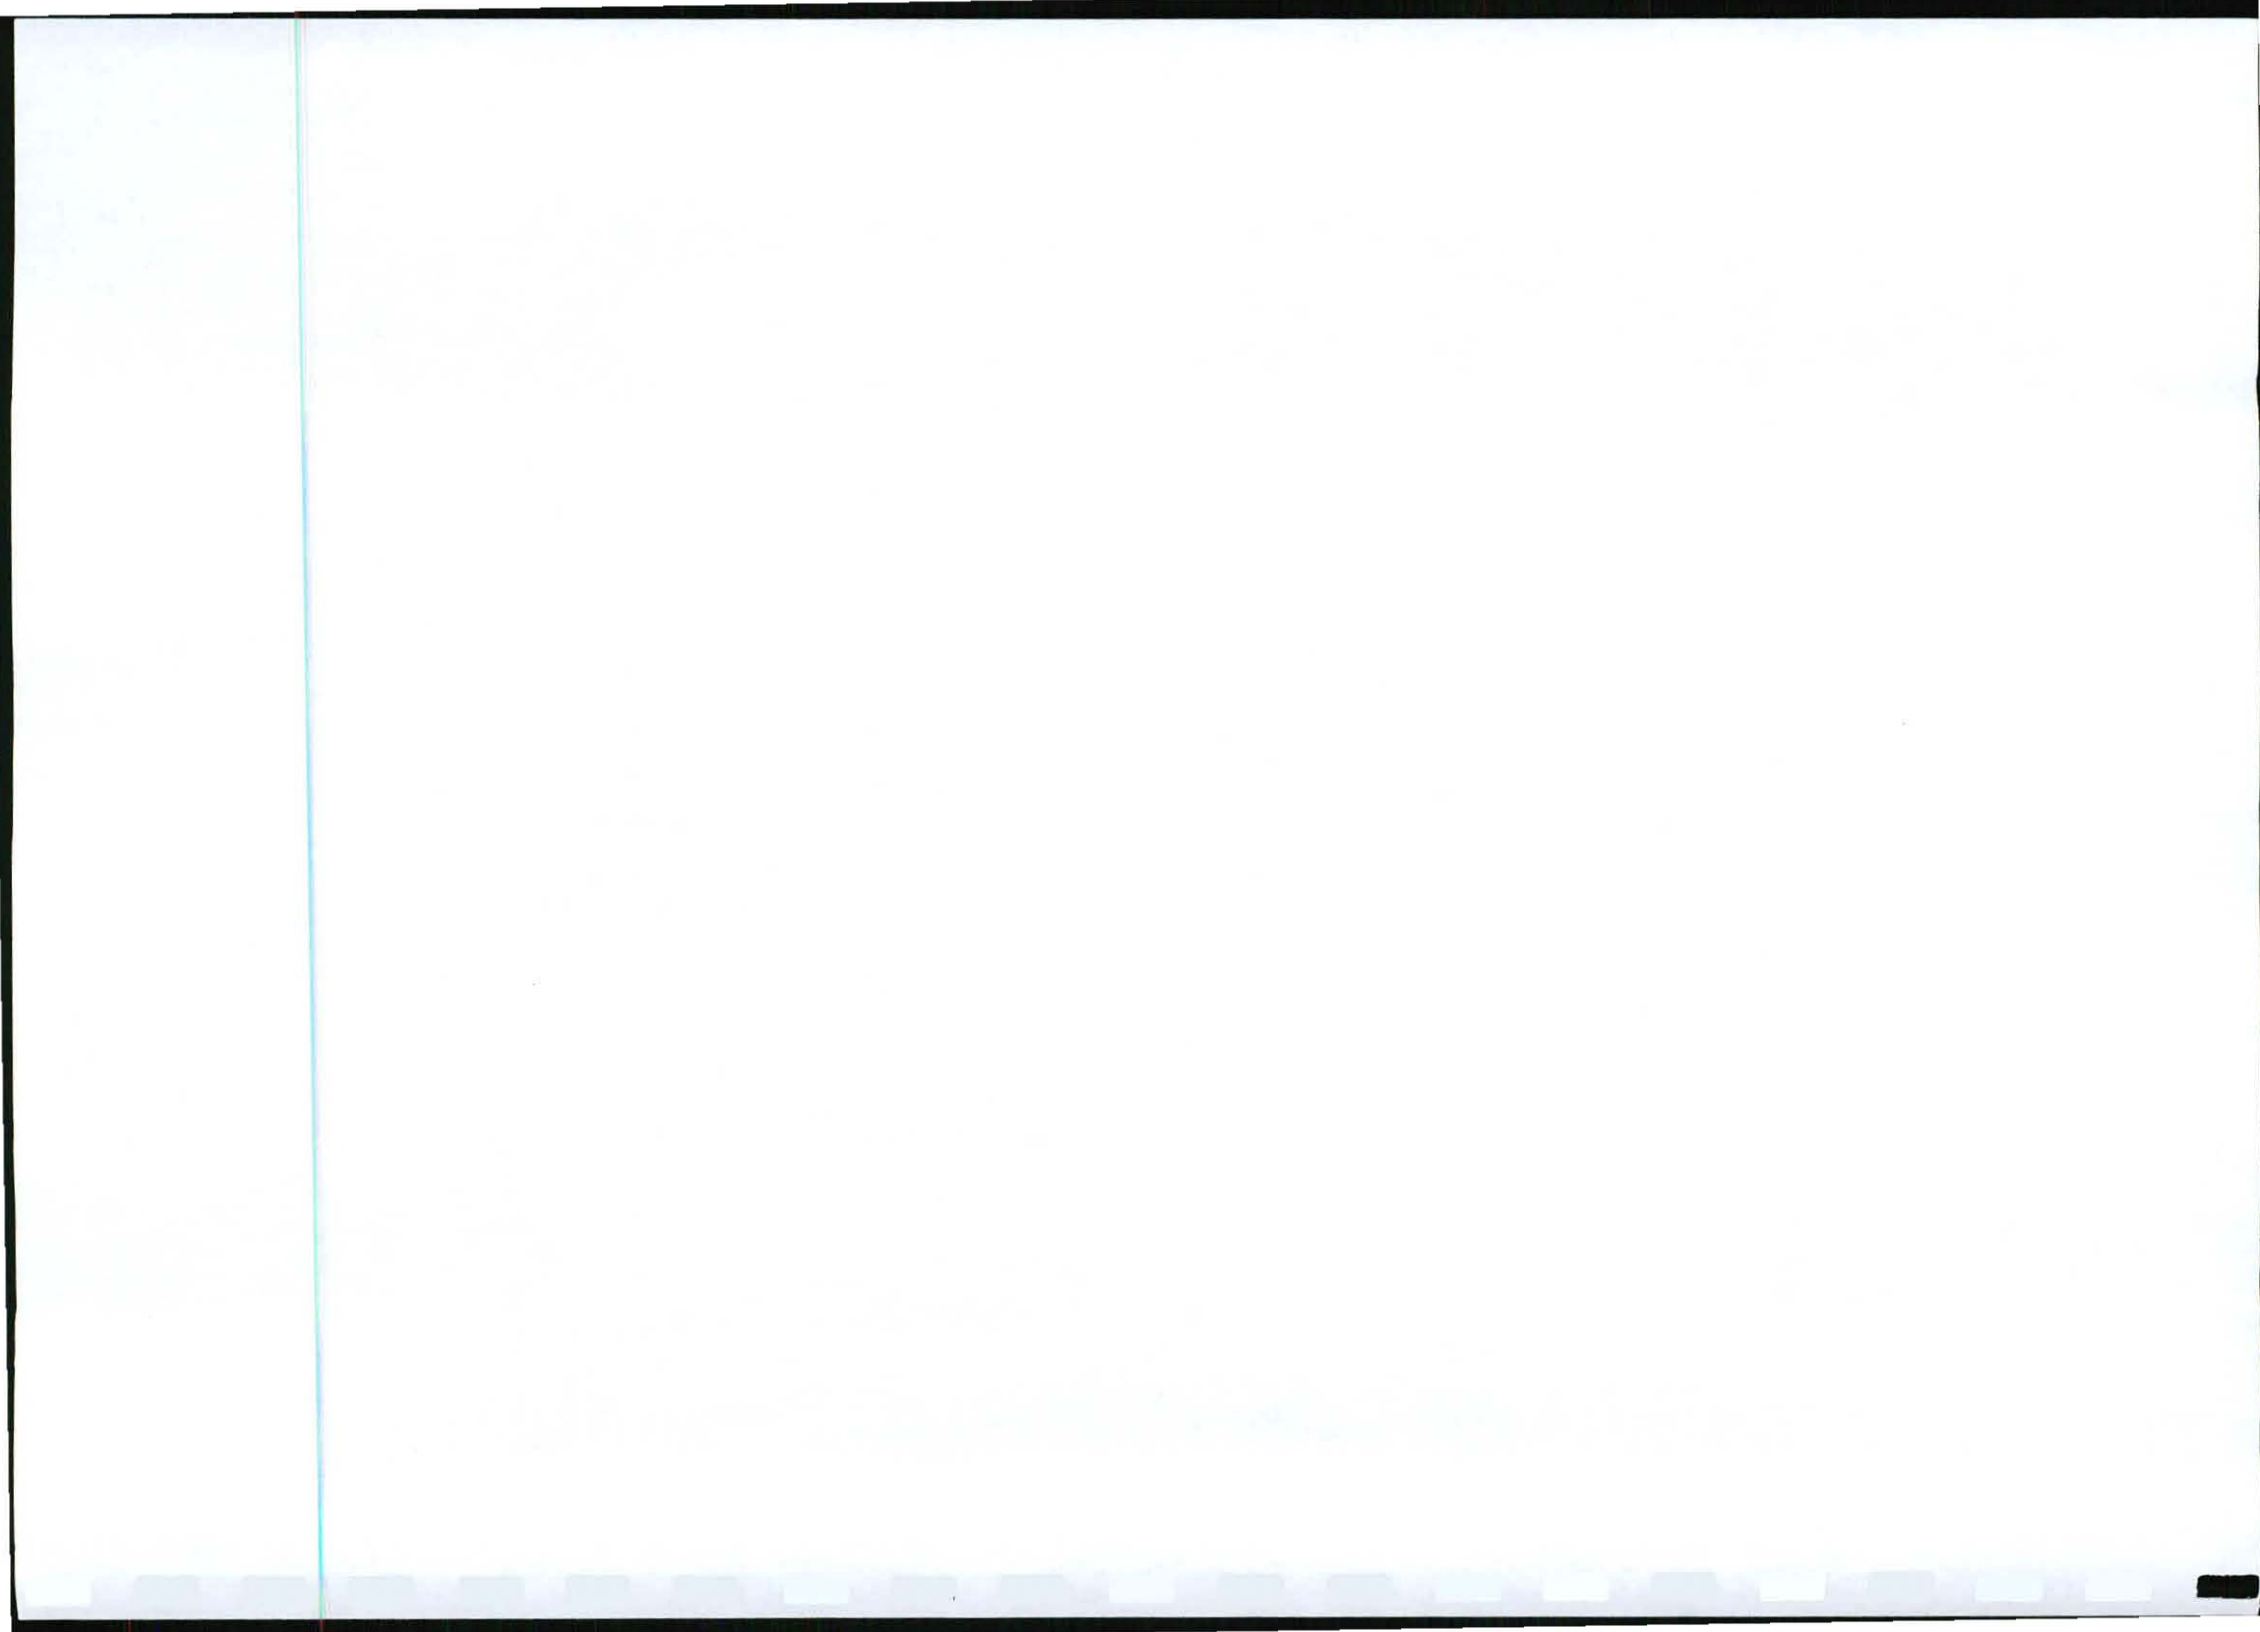


**Appendix E9: Public Participation Information
Register of IAPs**

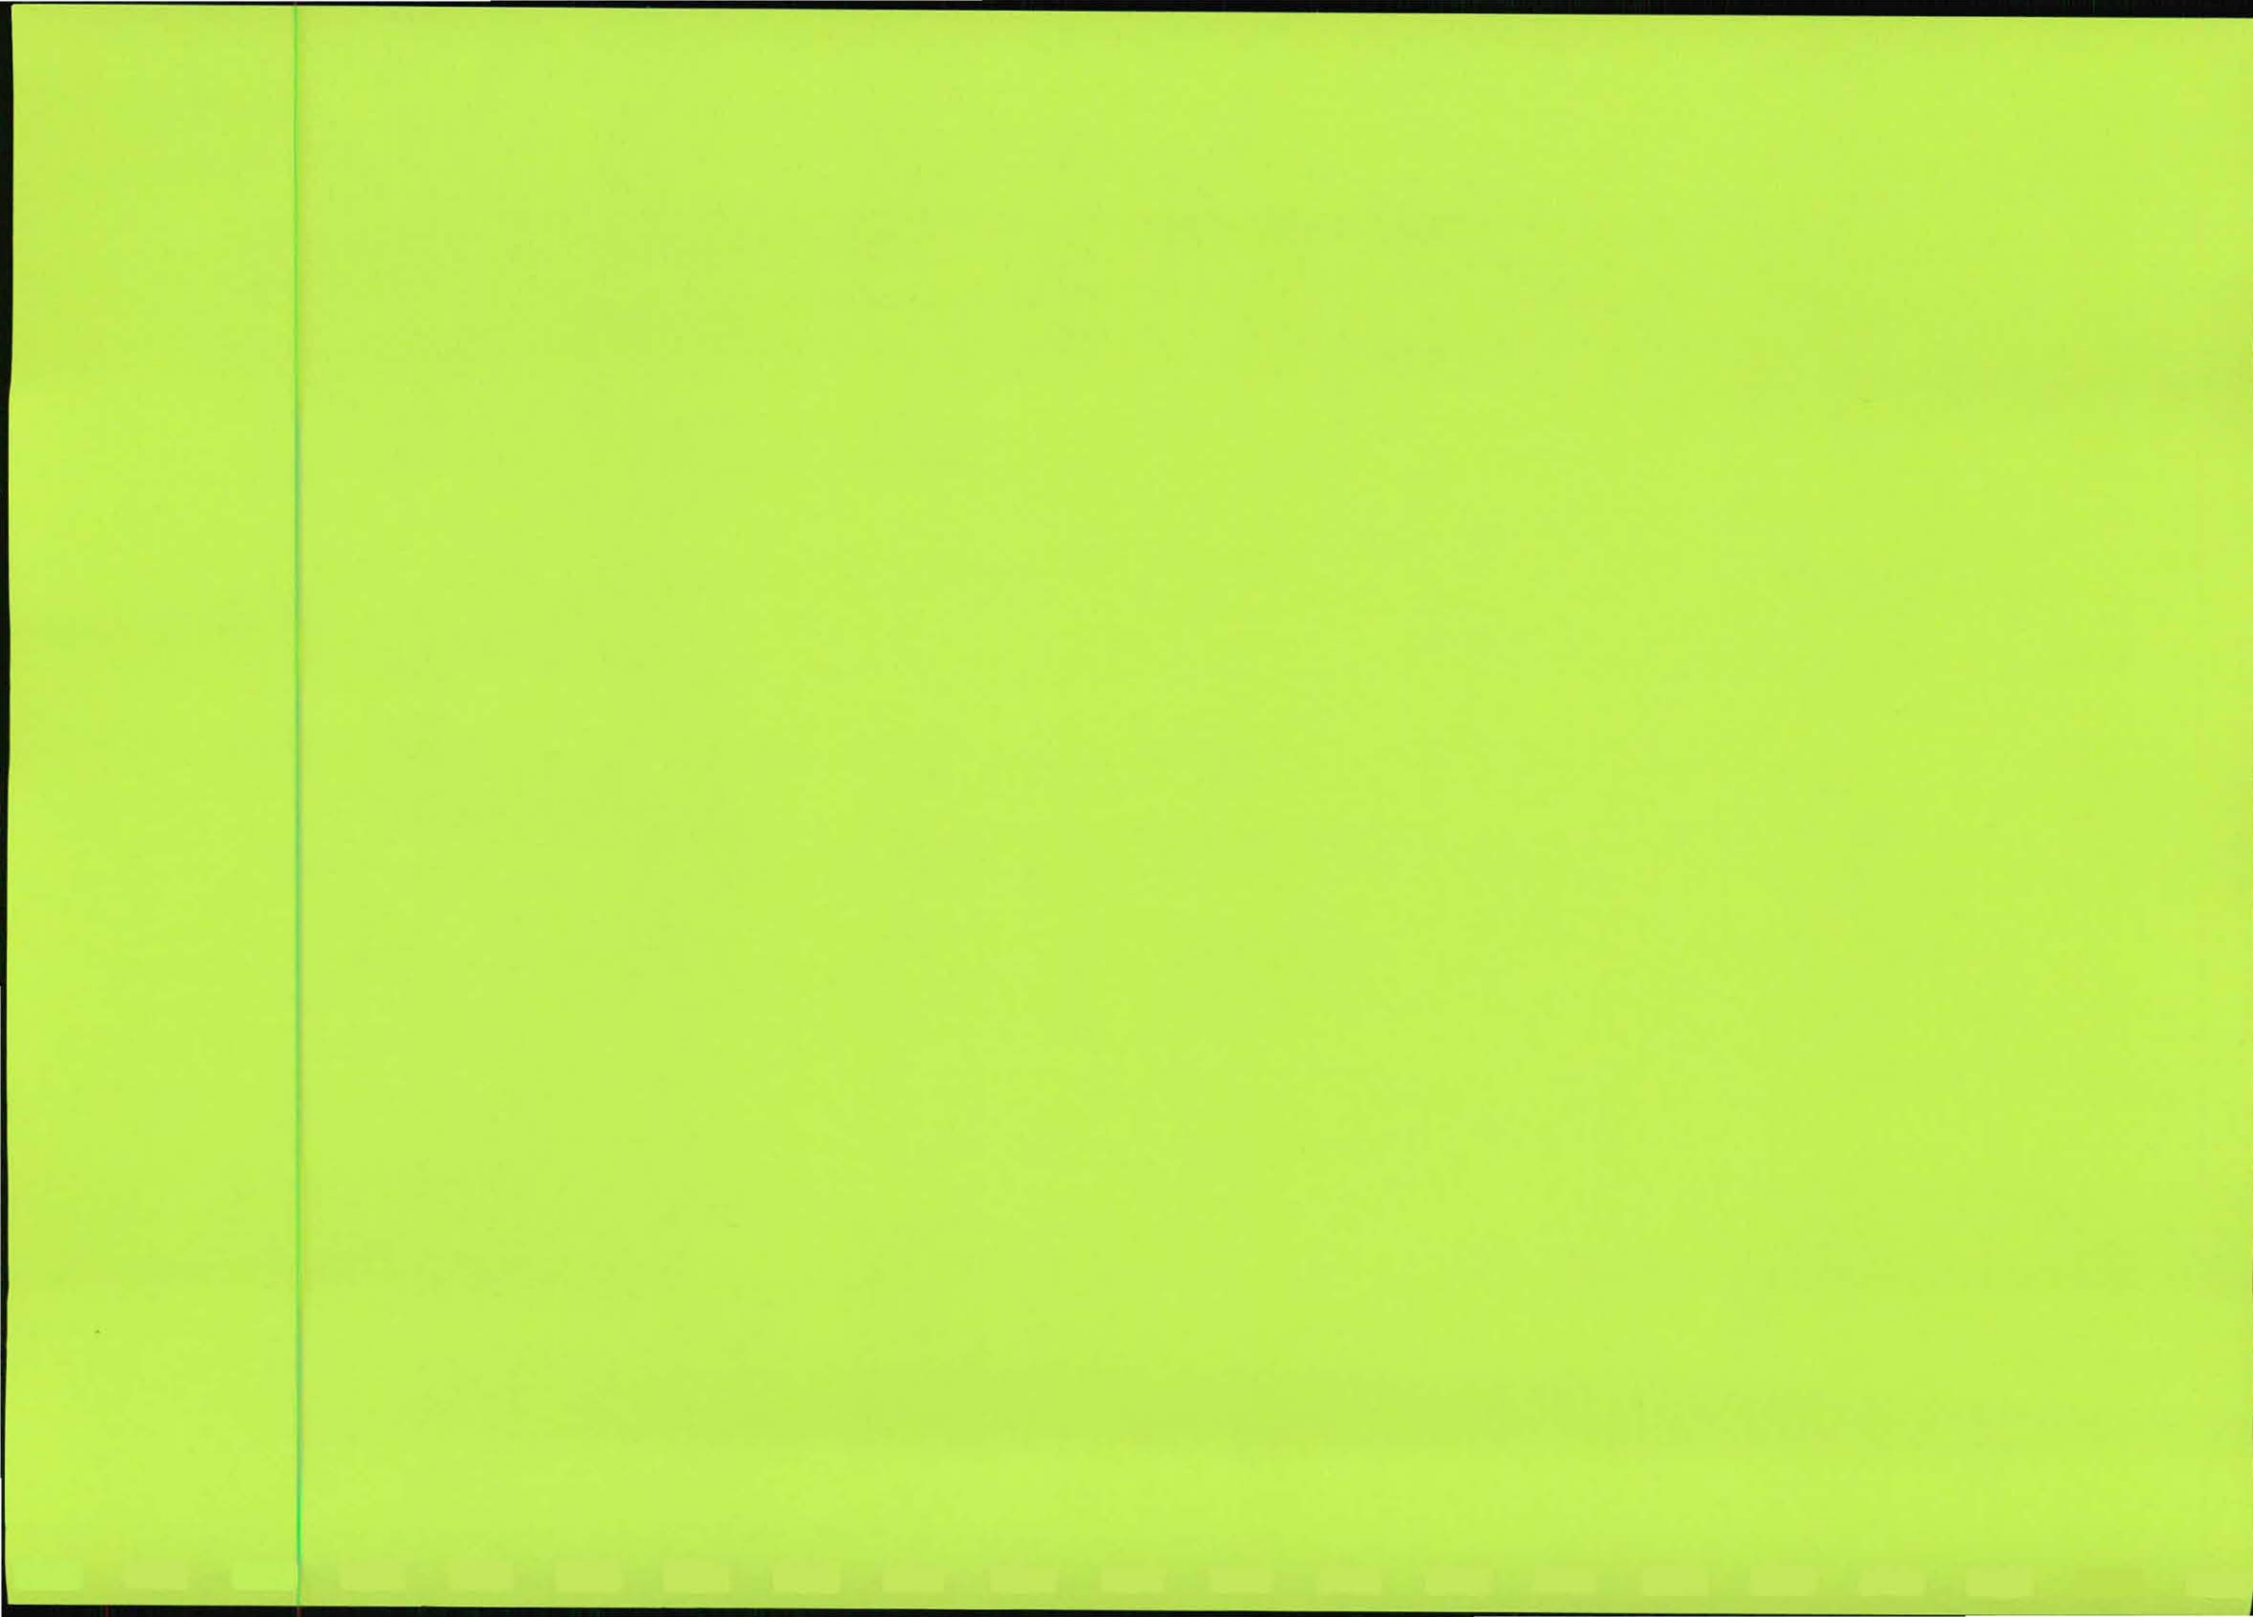


**Environmental Impact Assessment
Bulge-Dorset 132kV line
Register of Interested and affected Parties**


Name	Company/ Interest	Address		Telephone	Fax	
Mr Donald Mabada	The Dep Director : Water Quality	Dept of Water Affairs, Limpopo Regional Office (Ozmo Place, 49 Joubert str)	Private Bag X9506	POLOKWANE	0700 015 290 1200/1402	015 295 3249
Mr Donald Lithole	The Provincial Manager	Limpopo Heritage Resource Authority	PBagX 9307	POLOKWANE	0700 015 284 4013/ 4301/ Donald 072 397 7282	015 291 5628/ litholek@sac.limpopo.gov.za/ 086 607 2020
Mr M Komape	The Director: Water Regulation and Use	Department of Water Affairs, Limpopo Regional Office	Private bag X9506	POLOKWANE	0700 015 290 1463	015 295 2295/ komapem@dwa.gov.za
Mr LJ Mahlatsi	Directorate Land Use and Soil Management	Limpopo Department of Agriculture, Forestry and Fisheries (89 Biccard Street, Polokwane)	PO Box 3620	POLOKWANE	0700 015 287 9944/ 082 733 8076	015 297 7993/ lekgaumah@nda.agric.za
Ms Shoni Tshivhase	Environmental Manager	Road Agency Limpopo (Ral Towers, 26 Rabie str)	Private Bag X9554	POLOKWANE	0700 015 291 4236/ 082 441 5330	086 539 8502/tshivhasesp@ral.co.za
Mr Thabelo Mulaudzi	Deputy Director: Environment (Directorate Mineral Development)	Department of Mineral Resources Limpopo	Private Bag X9467	POLOKWANE	0700 015 287 4700/ 082 561 4758	015 287 4729/ 4706/ azwihangwisi.mulaudzi@dmr.gov.za
Mr Vusi Maluleke Ref nr: 12/1/9/E-W484	Environmental Impact Management	Dept of Economic Development, Environment and Tourism	Private Bag X9484	POLOKWANE	0700 015 295 4013	015 295 4013/ MalulekeEV@ledet.gov.za
Mr Sumawya Cachalia	Acting Chief Director, Limpopo Land Reform Office	Dept of Rural Development and Land Reform	Private Bag X9312	POLOKWANE	0700 015 297 1815	015 297 1815/ scachalia@ruraldevelopment.gov.za
Marie Helm	Streeksbestuurder	Transvaal Agricultural Union - Northern Region (TLU SA Noord)	PO Box 638	POLOKWANE	0700 015 297 3749/ 082 683 2835	015 297 2197/ mariehelm@hotmail.com/ bestuurder@ntlu.co.za
Mr Ntau Letebele	Head of Department	Limpopo Dept of Roads and Transport	Private Bag X9491	POLOKWANE	0700 015 295 1006	015 294 8006
Mr M V Letsoalo/ Phathu Siebe	Municipal Manager	Waterberg District Municipality	Private Bag X1081	MODIMOLLE	0510 014 718 3300/10	psiebe@waterberg.gov.za/ 014 717 4796/ 2931
Mr R Mashego	Environmental Section	Waterberg District Municipality	Private Bag X1018	MODIMOLLE	0510 014 718 3327	014 717 3286
Mr Thabelo Mulaudzi	Dep Dir Environment : Directorate Mineral Development	Dept of Mineral Resources Limpopo	Private Bag X9467	POLOKWANE	0700 015 287 4700	015 287 4729/4706/ 4740/ azwihangwisi.mulaudzi@dmr.gov.za
Mr T.I Malatji/ Tendani Muhanelwa	Limpopo Land Reform Office	Department of Rural Development and Land Reform	Private Bag X9312	POLOKWANE	0700 015 297 3539/ 082 827 0680	015 297 4988/ TIMalatji@dla.gov.za/ TMuhanelwa@ruraldevelopment.gov.za
Mr Ernest Grunewald	Land & Rights	Eskom Transmission				011 800 5732/ 011 800 3917/ 086 655 7036

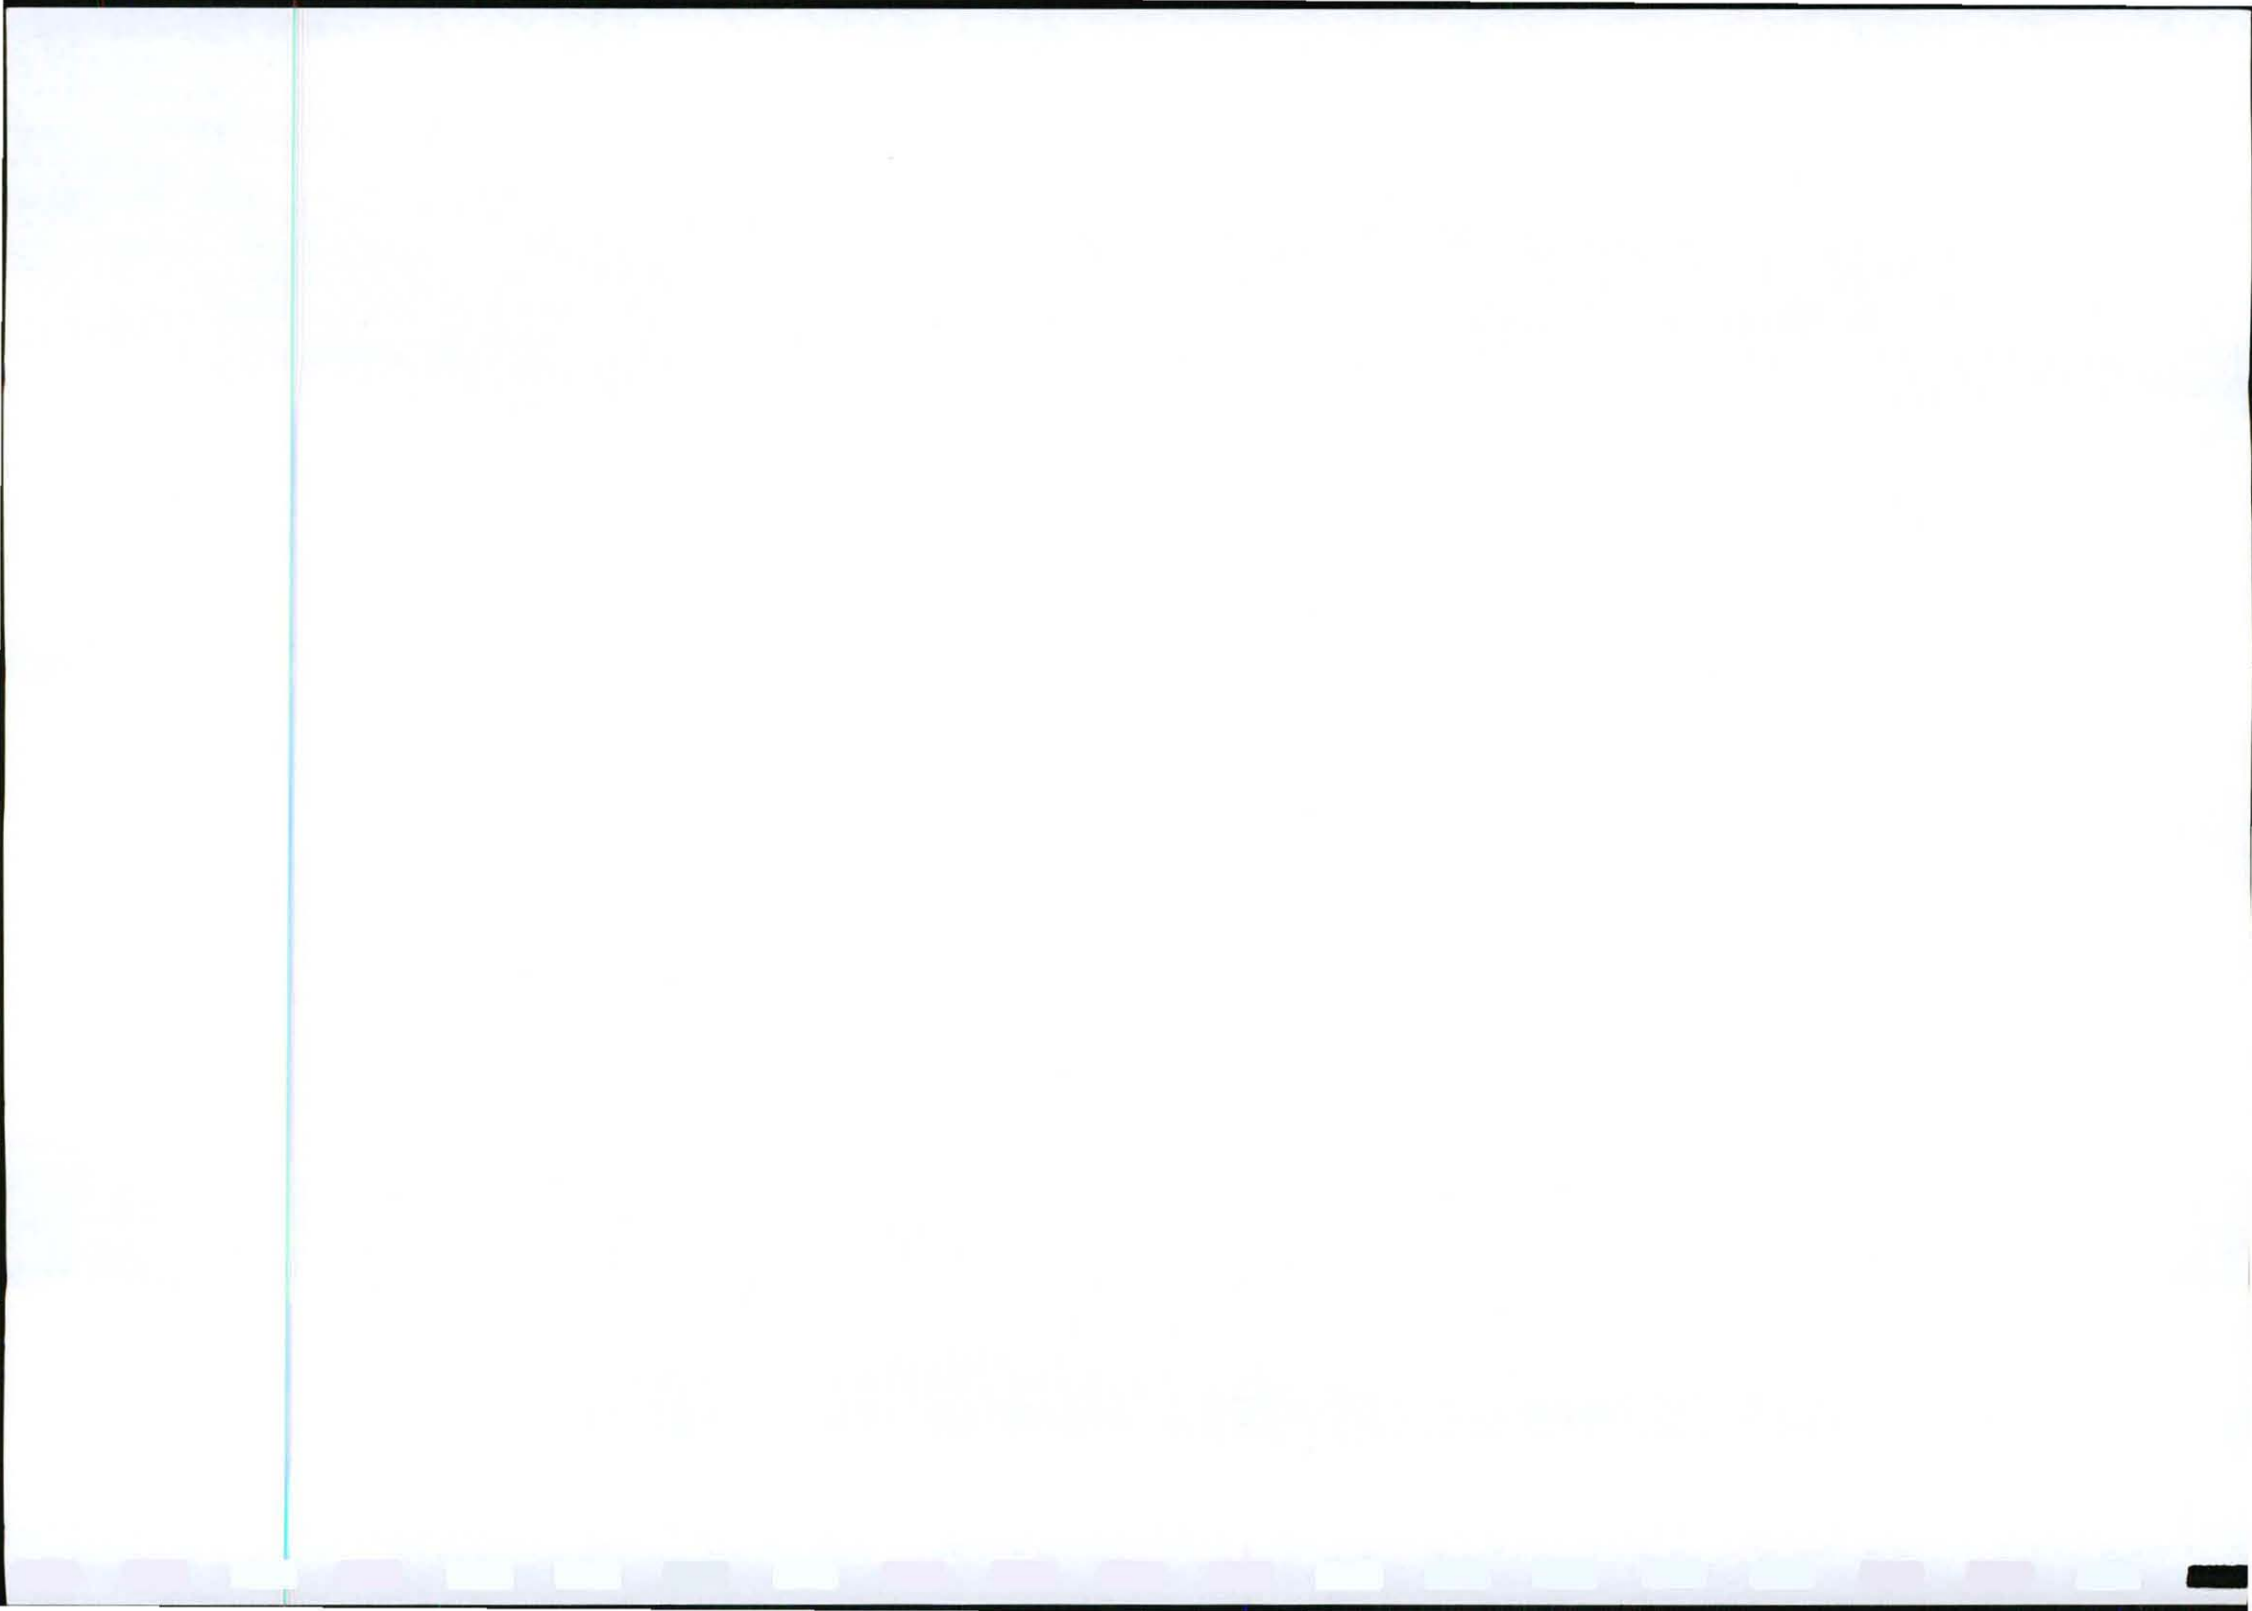


Name	Company/ Interest	Address				Telephone	Fax
						083 632 7668	
Mr Tele Maphoto	Land Claims Commissioner: Limpopo	Dept of Rural Development and Land Reform	Private Bag X9552	POLOKWANE	0700	015 284 6300	015 295 7404/3/ tamaphoto@ruraldevelopment.gov.za
Ms Noxolo Galela/ Lungile Motsise	Senior Advisor: Investigations and Audits	Eskom Transmission Megawatt Park	PO Box 1091	JOHANNESBURG	2000	011 800 5899	086 666 7653/ noxolo.galela@eskom.co.za/ Motsisi@eskom.co.za
Mr Mulatedzi Robert Dali	Dept of Local Government and Housing					015 294 2300/ 082 559 0089	015 291 5331/ dalimr@limdlgh.gov.za
Mr A Matukane	Chief Director	Dept of Water Affairs Limpopo	Private Bag X9506	POLOKWANE	0700	015 290 1215	015 295 2295
Mr Bob Naidoo	Municipal Manager	Lephalale Local Municipality	Private Bag X 136	LEPHALALE	055	014 763 2193/4	014 763 5662
Mr L I Sole	Development Planning	Lephalale Local Municipality	Private Bag X136	LEPHALALE	0555	014 763 2193/4	014 763 5662
Mrs M Cocquyt	Social Services	Lephalale Local Municipality	Private Bag X136	LEPHALALE	0555	014763 2193/4	014 763 5662
Mr J Gafane/ Mr Tshikonelo/ Ms Mulaudzi	Environmental Services	Limpopo Department of Roads and Transport	Privagte Bag X9491	POLOKWANE	0700	015 295 1247/ 082 561 4758 (Mulaudzi)	015 294 8000/ gafanem@dr.limpopo.gov.za/ tshikonelon@dr.limpopo.gov.za/ mulaudzi3@dr.limpopo.gov.za
Mr Tienie Loots	Divisional Head: Electrical	Lephalale Local Municipality	Private Bag X136	LEPHALALE	0555	014 763 2193/4	014 763 5662
Mr Jan Oliver	South African National Roads Agency		Private Bag X17	LYNWOOD RIDGE	0040	012 426 6242	012 348 1512/ oliverj@nra.co.za
Mr Adam Gunn	Legal Advisor	First Uranium Corporate	PO Box 570	Westonaria	1780	011 278 7015/ 072 533 4399	011 278 7026/ adam.gunn@firsturanium.com
Ms TP Malungani Ref nr: 12/1/9/E-W484	Environmental Impact Management: Manager Waterberg District	Department of Economic Development, Environment and Tourism				015 290 7000/ 082 888 9847	MalunganiTP@ledet.gov.za
Kelly Abram/ Richard Wadley		Waterberg Nature Conservancy				083 609 1425 Richard	yeldaw@mweb.co.za/ leopardcreekinfo@yahoo.com
John Hill		Hermanusdoorns Shareblock Limited				082 825 5831	jonahill@yebo.co.za
Berthold von Sethe	Witfontein KQ 154	Witfontein Game Farm (Pty) Ltd	PO Box 405	VAALWATER	0530	014 754 4483/ 083 656 3739	086 645 3139/ berthold.vonsethe@t-online.de
Man & Maya Oosterhoff	Donkerhoek 615LQ	Leopard Leap Lodge	PO Box 182	MABATLANE	0530	014 755 3591/ 076 267 4066	086 544 6707/ maya@leopardleap.co.za
Micky Prince	Rem extent Bergsig 196KQ	The Fold, SA Children's Home	PO Box 1265	VAALWATER	0530	082 333 4870	mickycz@hotmail.com
Annelien Pretorius	Land Development	Eskom Distribution Northern Region	PO BOX 36099	MENLOPARK	0102	012 421 3046	012 421 4793/ pretoann@eskom.co.za
Mr Masungi Tshuketana Ref nr: 12/1/9/E-W484	Environmental Impact Management	Dept of Economic Development, Environment & Tourism	Private Bag X9484	POLOKWANE	0700	015 295 5633/5528	Tshuketanim@ledet.gov.za/ 015 295 5015
KP van der Walt/ AC Greyling	Steenbokfontein 9 KR Ptn 1 & 3	Ruimtevreug Boerdery Edms Bpk	Posbus 317	MOKOPANE	0600		karwalt@mtloaded.co.za/ acmm@icon.co.za
Ben Mostert		DLU Vaalwater	Posbus 361	VAALWATER	0530	082 376 0301	014 755 4197/ bendmostert@gmail.com

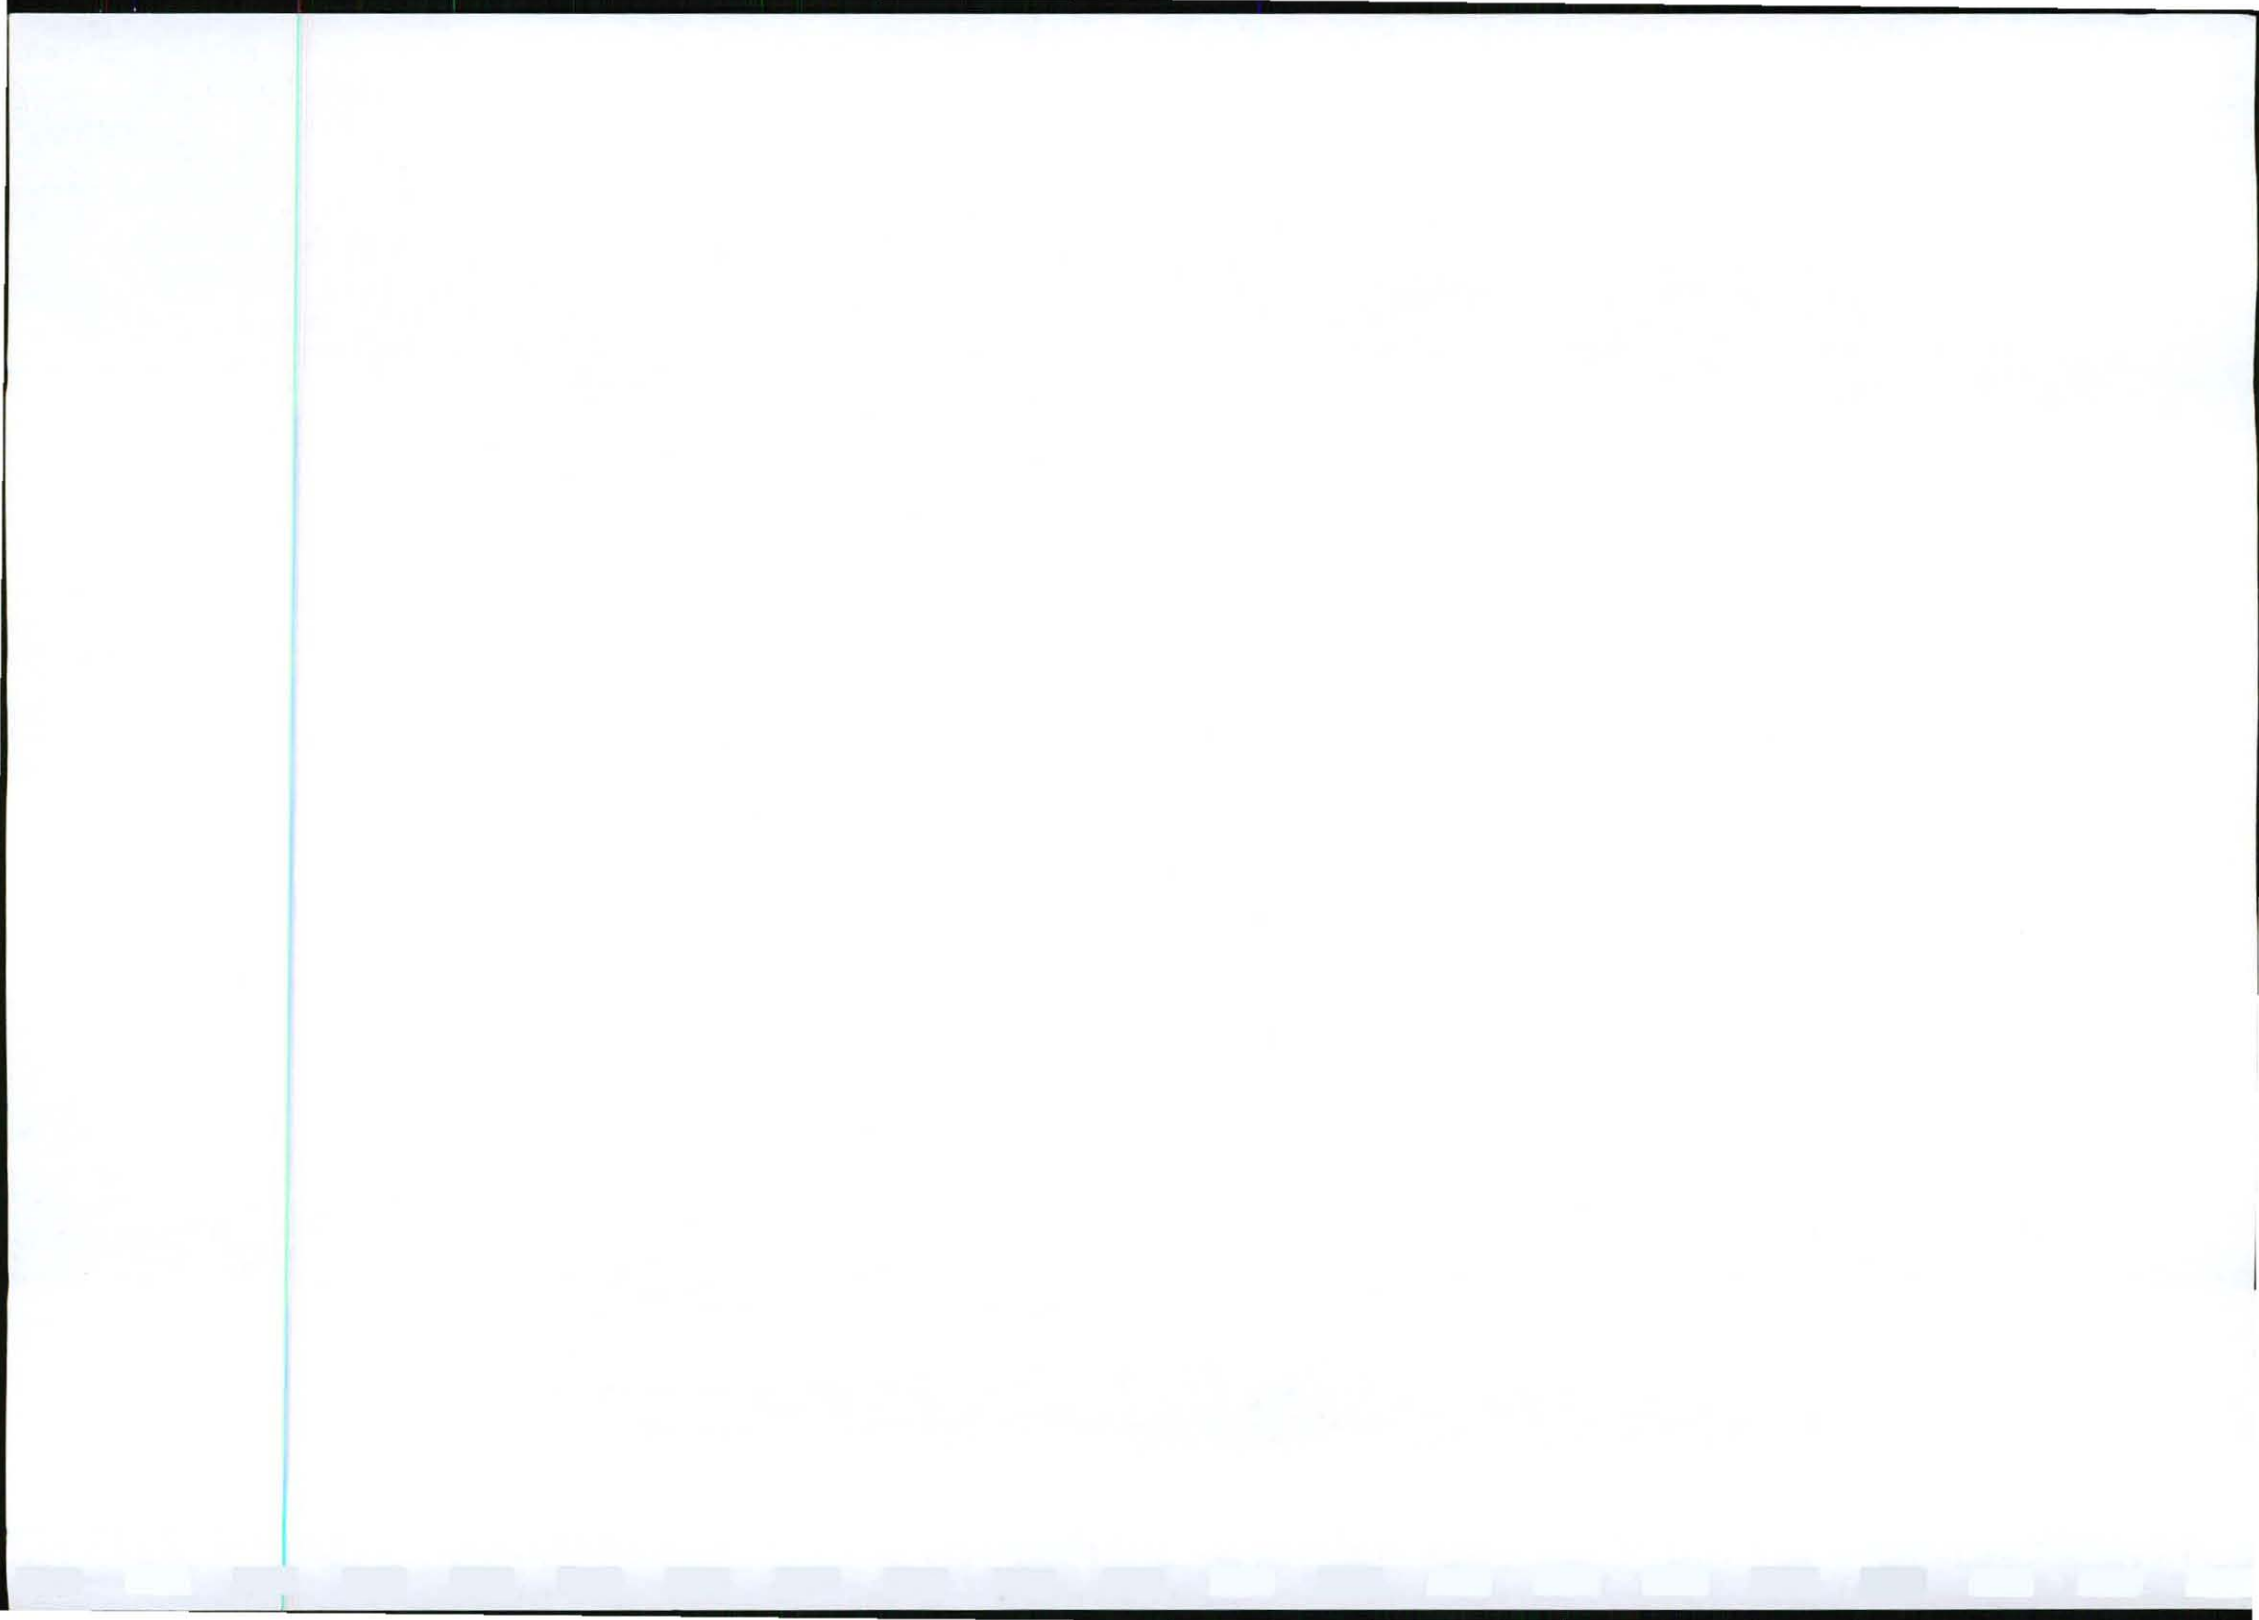


Name	Company/ Interest	Address	Telephone	Fax	
Erna Duvenhage	Sekretaresse	DLU Vaalwater	Posbus 259	VAALWATER 0530 014 755 3771/ 076 105 6271	dluvaalwater@goggaconnect.co.za
Nico Solomon	Voorsitter	Ellisras DLU	Posbus 87	TOM BURKE 0621 014 767 1572/ 082 786 5120	nico@bosveld.co.za
Annalize Vermaak	Sekretaresse	DLU Ellisras	Posbus 939	ELLISRAS 0555 014 763 3263/ 083 204 5206	edlu@lantic.net
Joggie van Bruggen	Voorsitter	DLU Thabazimbi	Posbus 505	THABAZIMBI 0380 014 786 0680/ 082 576 6876	joggievb@lantic.net
Anneke du Plessis	Sekretaresse	DLU Thabazimbi	Posbus 345	THABAZIMBI 0380 014 777 1156/ 072 549 8579	tdlu@mweb.co.za/ annekedp@mtnloaded.co.za
Hans Vreugdenburg	Voorsitter	DLU Vaalwater	Posbus 282	VAALWATER 0530 083 449 7203	
Attie Louwrens		DLU Vaalwater			014 755 3760/ 083 236 4387
Leon Jacobs/Stoffel Snyman	Dwarsfontein/Brakfontein		Posbus 968	VAALWATER 0530 014 755 3982	AJLouwrens@telkom.sa.net/ 014 755 3760 stoffel.susan@gmail.com/ leon.htm@mweb.co.za
Theo Ferreira	? 210 KQ	Wildeman Wildsplaas	Posbus 22225	HELDERKRUIN 1733 082 600 0043	theoferr@netactive.co.za/ 086 615 7535
Michiel & Issabella Van Baalen-Kerklaan	Goudfontein KQ 171 Rem extent	Ama Amanzi Game Lodge (PTY) LTD	PO Box 1204	VAALWATER 0530 071 917 0170 (Issabella)/ 073 923 4989 (Michiel)	info@ama-amanzi.com
NGJ Breed/ Stoffel de Beer	Bulge Rivier 198 KQ Porsie 2		Posbus 1146	LEPHALALE 0555 082 736 8108/ 014 754 4469	
SJ (Faan) van Schalkwyk	Bulge rivier 198 KQ Porsie 16		Posbus 186	LEPHALALE 0555 017 567 5225/ 014 754 4450	faan@bulsriversafaries.co.za
Dr G van Niekerk	Bergsig 202 KQ Porsie 4	Groot Waag Boerdery Cc	Posbus 8348	EDLEEN 1625 083 653 3420/ 011 391 2206	niekerk@icon.co.za/ 086 692 9232
Heidi Bar	Bulge Rivier 199KQ Ptn 6; Mokolo river Nature reserve 660KQ Con	Mogol River Gamefarm Pty Ltd	Po Box 3	VAALWATER 0530 014 754 4479/8	mokoloreserve@yahoo.com
Faan Hartzter	Hermanusdoorns 204 KQ Porsie 5	Ama-Superco 9 CC	Posbus 406	RUIMSIG 1732 082 321 5652/ Andre Cocharen 014 575 4496/ 083 442 5506	faanh@icon.co.za/ 011 958 1272
SP (Faan) van der Merwe	Welgevonden 186 KQ Porsies 0&1		Posbus 389	VAALWATER 0530 082 373 0447/ 014 754 4482	072 646 3220@vodamail.co.za/ 014 754 4524
Michael van Zyl	Keerom 208 KQ Ptn 0/ Hanover 181 KQ Ptn 0	Matswani Game Farm Pty Ltd	Posbus 706	VAALWATER 0530 082 322 3590	info@matswani.co.za/ 086 556 3380

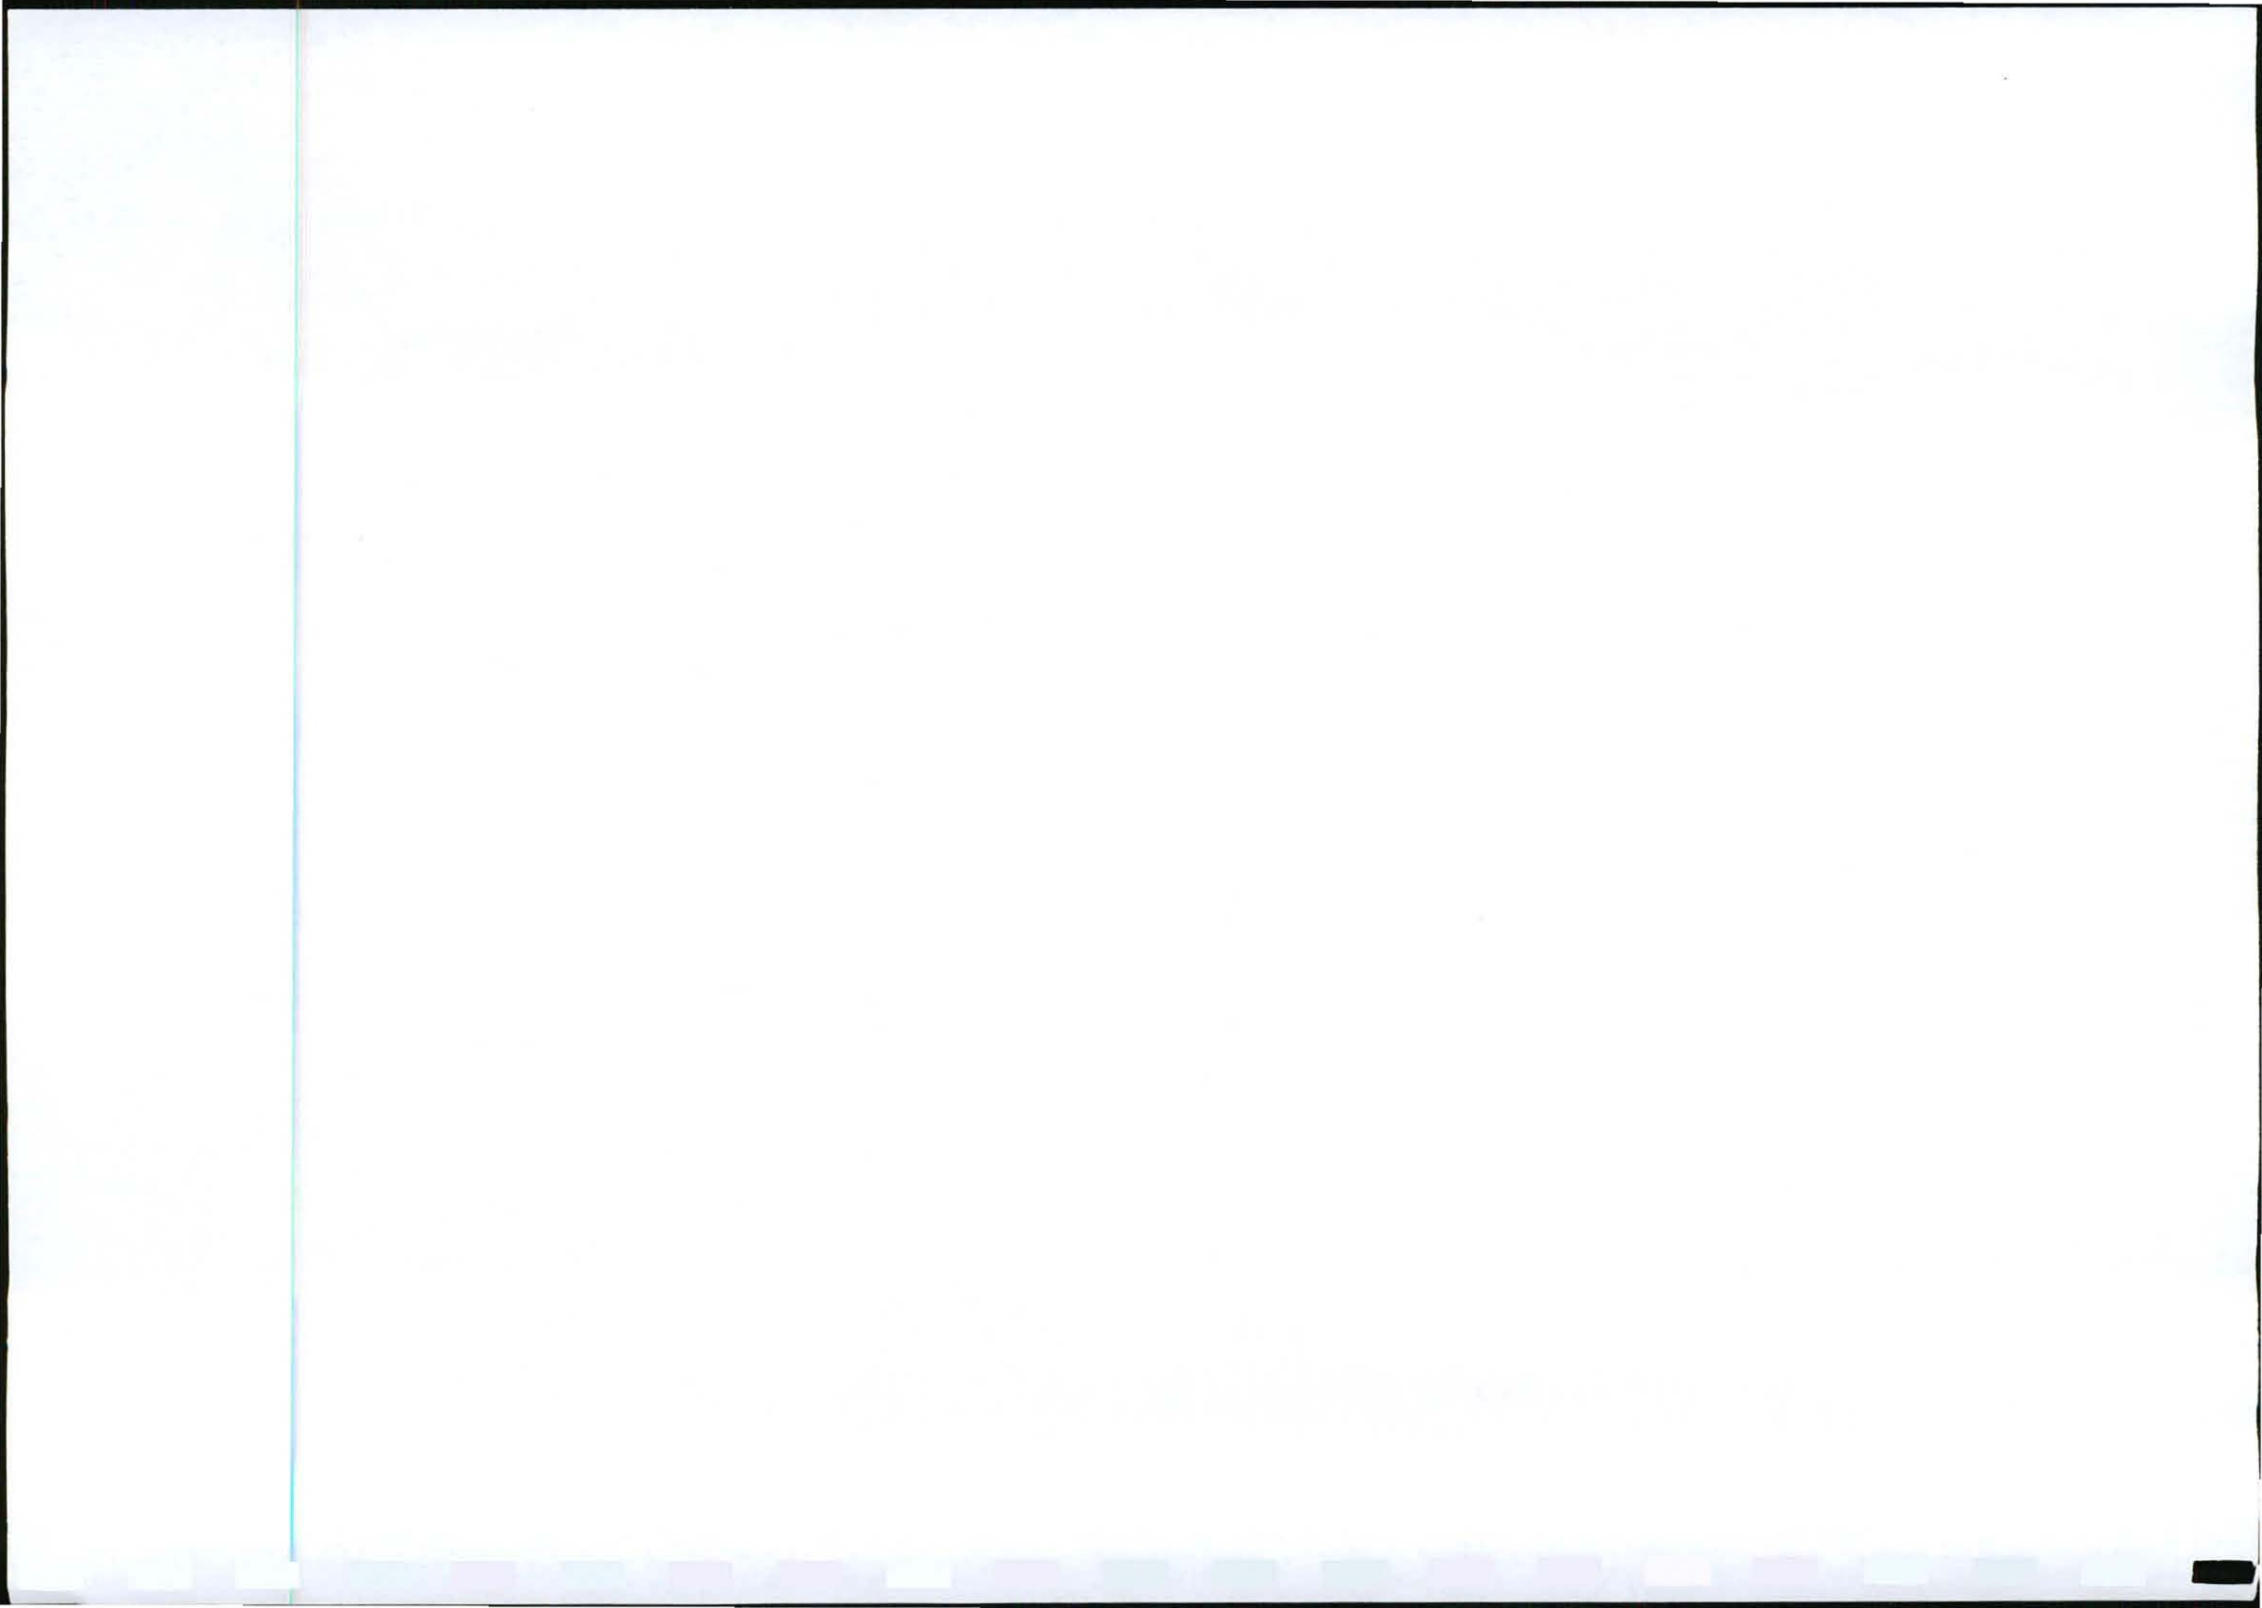


Name	Company/ Interest		Address		Telephone	Fax	
WH (Willie) Ernst	Hanover 181 KQ Porsie 3; Welgevonden 180 KQ Ptn 0		Posbus 286	VAALWATER	0530	014 755 4290	
TJ Bannink	Schuinskloof 175 KQ Porsie 1,2,3		Posbus 902	VAALWATER	0530	083 376 2558	
JH (Jan) Van Niekerk	Rietbokhoek 4 KR Res		Posbus 19	VAALWATER	0530	014 755 4134 linda.kunneke@gmail.com/ 014 755 4134	
Nico Breedt/ Stoffel de Beer	Rietbokhoek 4 KR Porsie 1	Rietbokhoek Trust	Posbus 1146	LEPHALALE	0555	082 388 1290	
JH (Jan) Vermeulen	Rietbokhoek 4 KR Porsie 2		Posbus 335	VAALWATER	0530	083 428 1652	
Chris Vermaak	Zeekoegat 5 KR Res	Porky's Ranch Cc	Posbus 39	VAALWATER	0530	014 755 4101/ 082 874 3119	014 755 4201
Bertus Swanevelder	Zeekoegat 5 KR Porsie 1	Bertus Swanevelder Trust	Posbus 68	VAALWATER	0530	082 550 1410	bertus.swanevelder@gmail.com/ 014 755 4119
EA (Bertus) Swanevelder	Steenbokfontein 9 KR Res & 4		Posbus 68	VAALWATER	0530	082 550 1410	bertus.swanevelder@gmail.com/ 014 755 4119
EA (Ras) Labuschagne	Dwarsfontein 51 KR Re		Posbus 356	VAALWATER	0530	014 755 4139/ 083 743 3224	eransa1@vodamail.co.za
Deon Buys, Manager	Vischgat 64 KR Ptn 0	Gems Hills Reserve Pty Ltd	PO Box 104	VAALWATER	0530	014 755 4121/ 082 576 1743	deomar@bosveld.co.za
Jan van Deventer (Anelia)	Brakfontein 16 KR Re & 1					014 755 4117/ 082 557 9224	janvandeventer@webmail.co.za
Stephan van Heerden	Welgevonden; Grootwater Ptn 176; Kafferfontein Ptn 6		Posbus 141	LEPHALALE	0555	082 921 4474	
Mev A Els			Posbus 330	VAALWATER	0530	014 755 3912	
Mnr L de Fouw			Posbus 428	VAALWATER	0530	014 755 3910	
Mr Victor Mongwe Ref nr: 12/1/9/E-W484	Head of the Dept: Env Impact Management	Dept of Economic Development, Environment & Tourism	Private BagX9484	POLOKWANE	0700	015 295 4013	015 295 4013/ mongwev@ledet.gov.za
Mr M Masemola	Dept of Agriculture, Forestry & Fisheries		PO Box 3620	POLOKWANE	0700	015 287 9947	015 297 7993/ mailetseM@nda.agric.za
Mr Thabo Morule	Eskom Enterprises Telecommunications					013 693 3535/ 082 928 1280	086 517 7888/ moruletr@eskom.co.za
Wilma Prinsloo	Streekbestuurder	Transvaal Landbou Unie - Noordelike streek	PO Box 11416	BENDORPARK	0713	015 297 3749	086 618 0781/ wilma@ntlu.co.za
Jacqui Burns	Agri Sekretaresse	Agri Limpopo				014 763 1888	014 763 6926/ agrilphalale@vodamail.co.za
Mnr Dicky Kotze	Goudfontein 171KQ Porsie 1,2	Darop Prop Cc				082 441 2102	marindak@nuwagon.co.za
Mr Gino Indveri	Roodekop 172 KQ					082 891 6108	imab@imab.co.za
Mr Nick Callichy	General Manager	Ka'Ingo Private Game Reserve	PO Box 580	VAALWATER	0530	014 754 8000	014 754 8006/ gm@kaingo.co.za

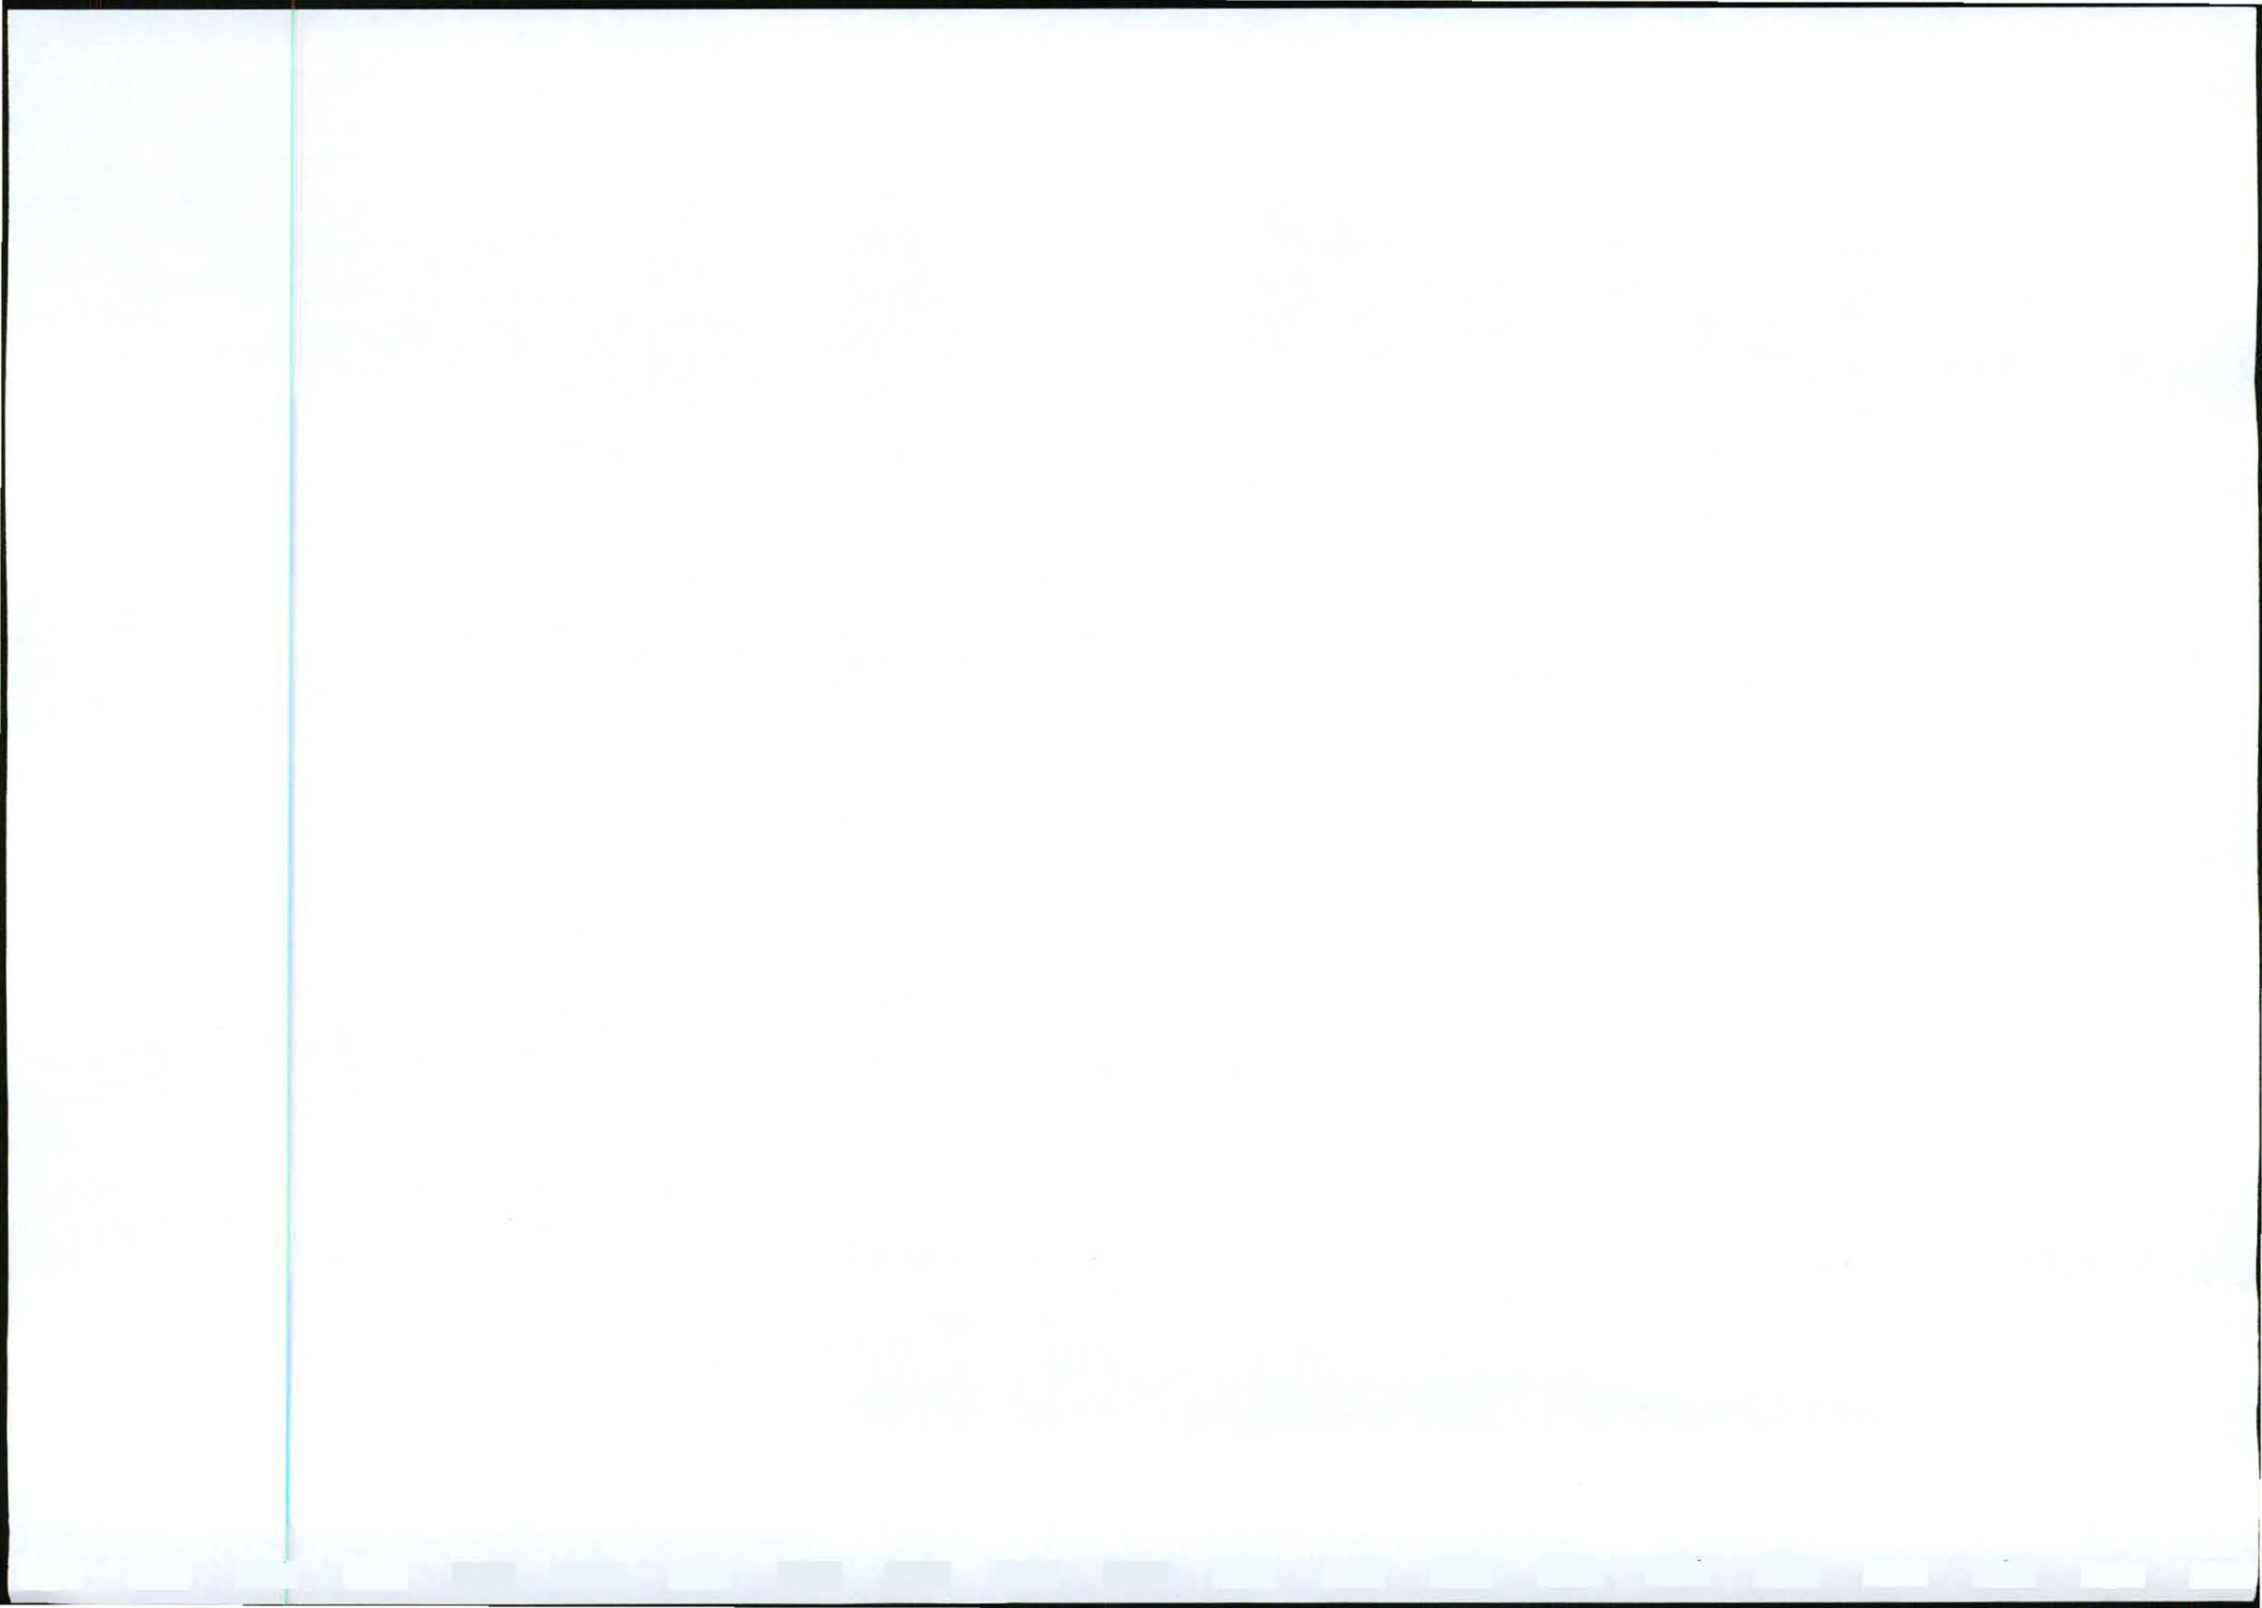


Name	Company/ Interest	Address	Telephone	Fax			
Mev PJ Breedt	Rietbokhoek 4 Porsie 1	Posbus 74245	LYNNWOOD RIF 0040	012 991 7308/ 082 490 2975	012 991 7308		
Kelly Abram	Programme Co-ordinator	Waterberg Biosphere Reserve		014 755 4002	014 755 4002/ info@waterbergbiosphere.org/ leopardcreekinfo@yahoo.com		
Mr Eben Badenhorst	Divisional Head: Municipal Health	Lephalale Local Municipality	Private Bag X136	LEPHALALE 0555	014 763 2193/4	014 763 5662	
Advokaat Pieter Oosthuizen	La Rive Hotel	Bergzig 196KQ Ptn 3			014 755 3892	oosthuizen.pieter@yahoo.com	
Diellie Schmutz	Hannover 181KQ				011 317 2909/ 083 411 7389	Diellie.Schmutz@softwareag.com	
Elana Greyling		Posbus 1058	Lephalale	0555	082 863 8696	bububush@lantic.net	
Daan Erasmus	Manamane 201KQ	Councillor ANC Lephalale Municipality			014 763 9582/ 082 561 6820	014 763 9415/ daan.erasmus@exxaro.com	
Chris Allanson	Hemanusdoorns 204KQ Ptns 4; 5		PO BOX 1052	Vaalwater	0530	073 792 5766	callanson@telkomsa.net
Marisa Bellini/ Jennifer Rupert	Hermanusdoorns Shareblock Ltd					marisa@mbellini.com/ jrupert@iafrica.com	
Willie Kriel	Hemanusdoorns Shareblock Ltd		PO Box 745	VAALWATER	0530	082 463 8642	williekriel@vodamail.co.za
AS du Plessis	Hemanusdoorns Shareblock Ltd	Bof Beleggings Edms Bpk				011 886 0368/ 082 459 3006	jabad@absamail.co.za
Renske Hofmeyr	Hermanusdoorns Shareblock Ltd		PO Box 56602	ARCADIA	0007		rhofmeyrt@telkomsa.net
Wynand Mulder	Hermanusdoorns Shareblock Ltd						no contact details
SJ Stols	Hermanusdoorns Shareblock Ltd						no contact details
Louisa Gericke		Hermanusdoorns Shareblock Ltd				082 9006 776	syd@icon.co.za
Stewart and Jennifer Stephen		Hemanusdoorns Shareblock Ltd				083 320 0251	printers@telkomsa.net
Mariette & Gabriel Stoltz		Hemanusdoorns Shareblock Ltd				082 322 6330/ 083 304 0167	gapes@absamail.co.za
PA Groenewald		Hermanusdoorns Shareblock Ltd					eaglegeneraldealer@lantic.net
KV Baloyi Ref 17.3.1./Bulge-Dorset	Directorate: Land Use and Soil Management	Dept of Agriculture, Forestry and Fisheries	PO Box 3620	POLOKWANE	0700	015 287 9945	015 297 7993
K Heiling	Malmaniesrivierdrift 199KQ	Malmanie Game Lodge	PO BOX 895	VAALWATER	0530	014 754 4499	014 754 4499
Wally Meadon	Grootwater 176KQ		PO Box 1058	VAALWATER	0530	083 509 1003	monicameadon@gmail.com
CL Pienaar	Christo Pienaar Trust	Kafferfontein 178KQ Ptn 1,2	PO Box 24738	Drie Riviere Oos	1941	083 442 2404	

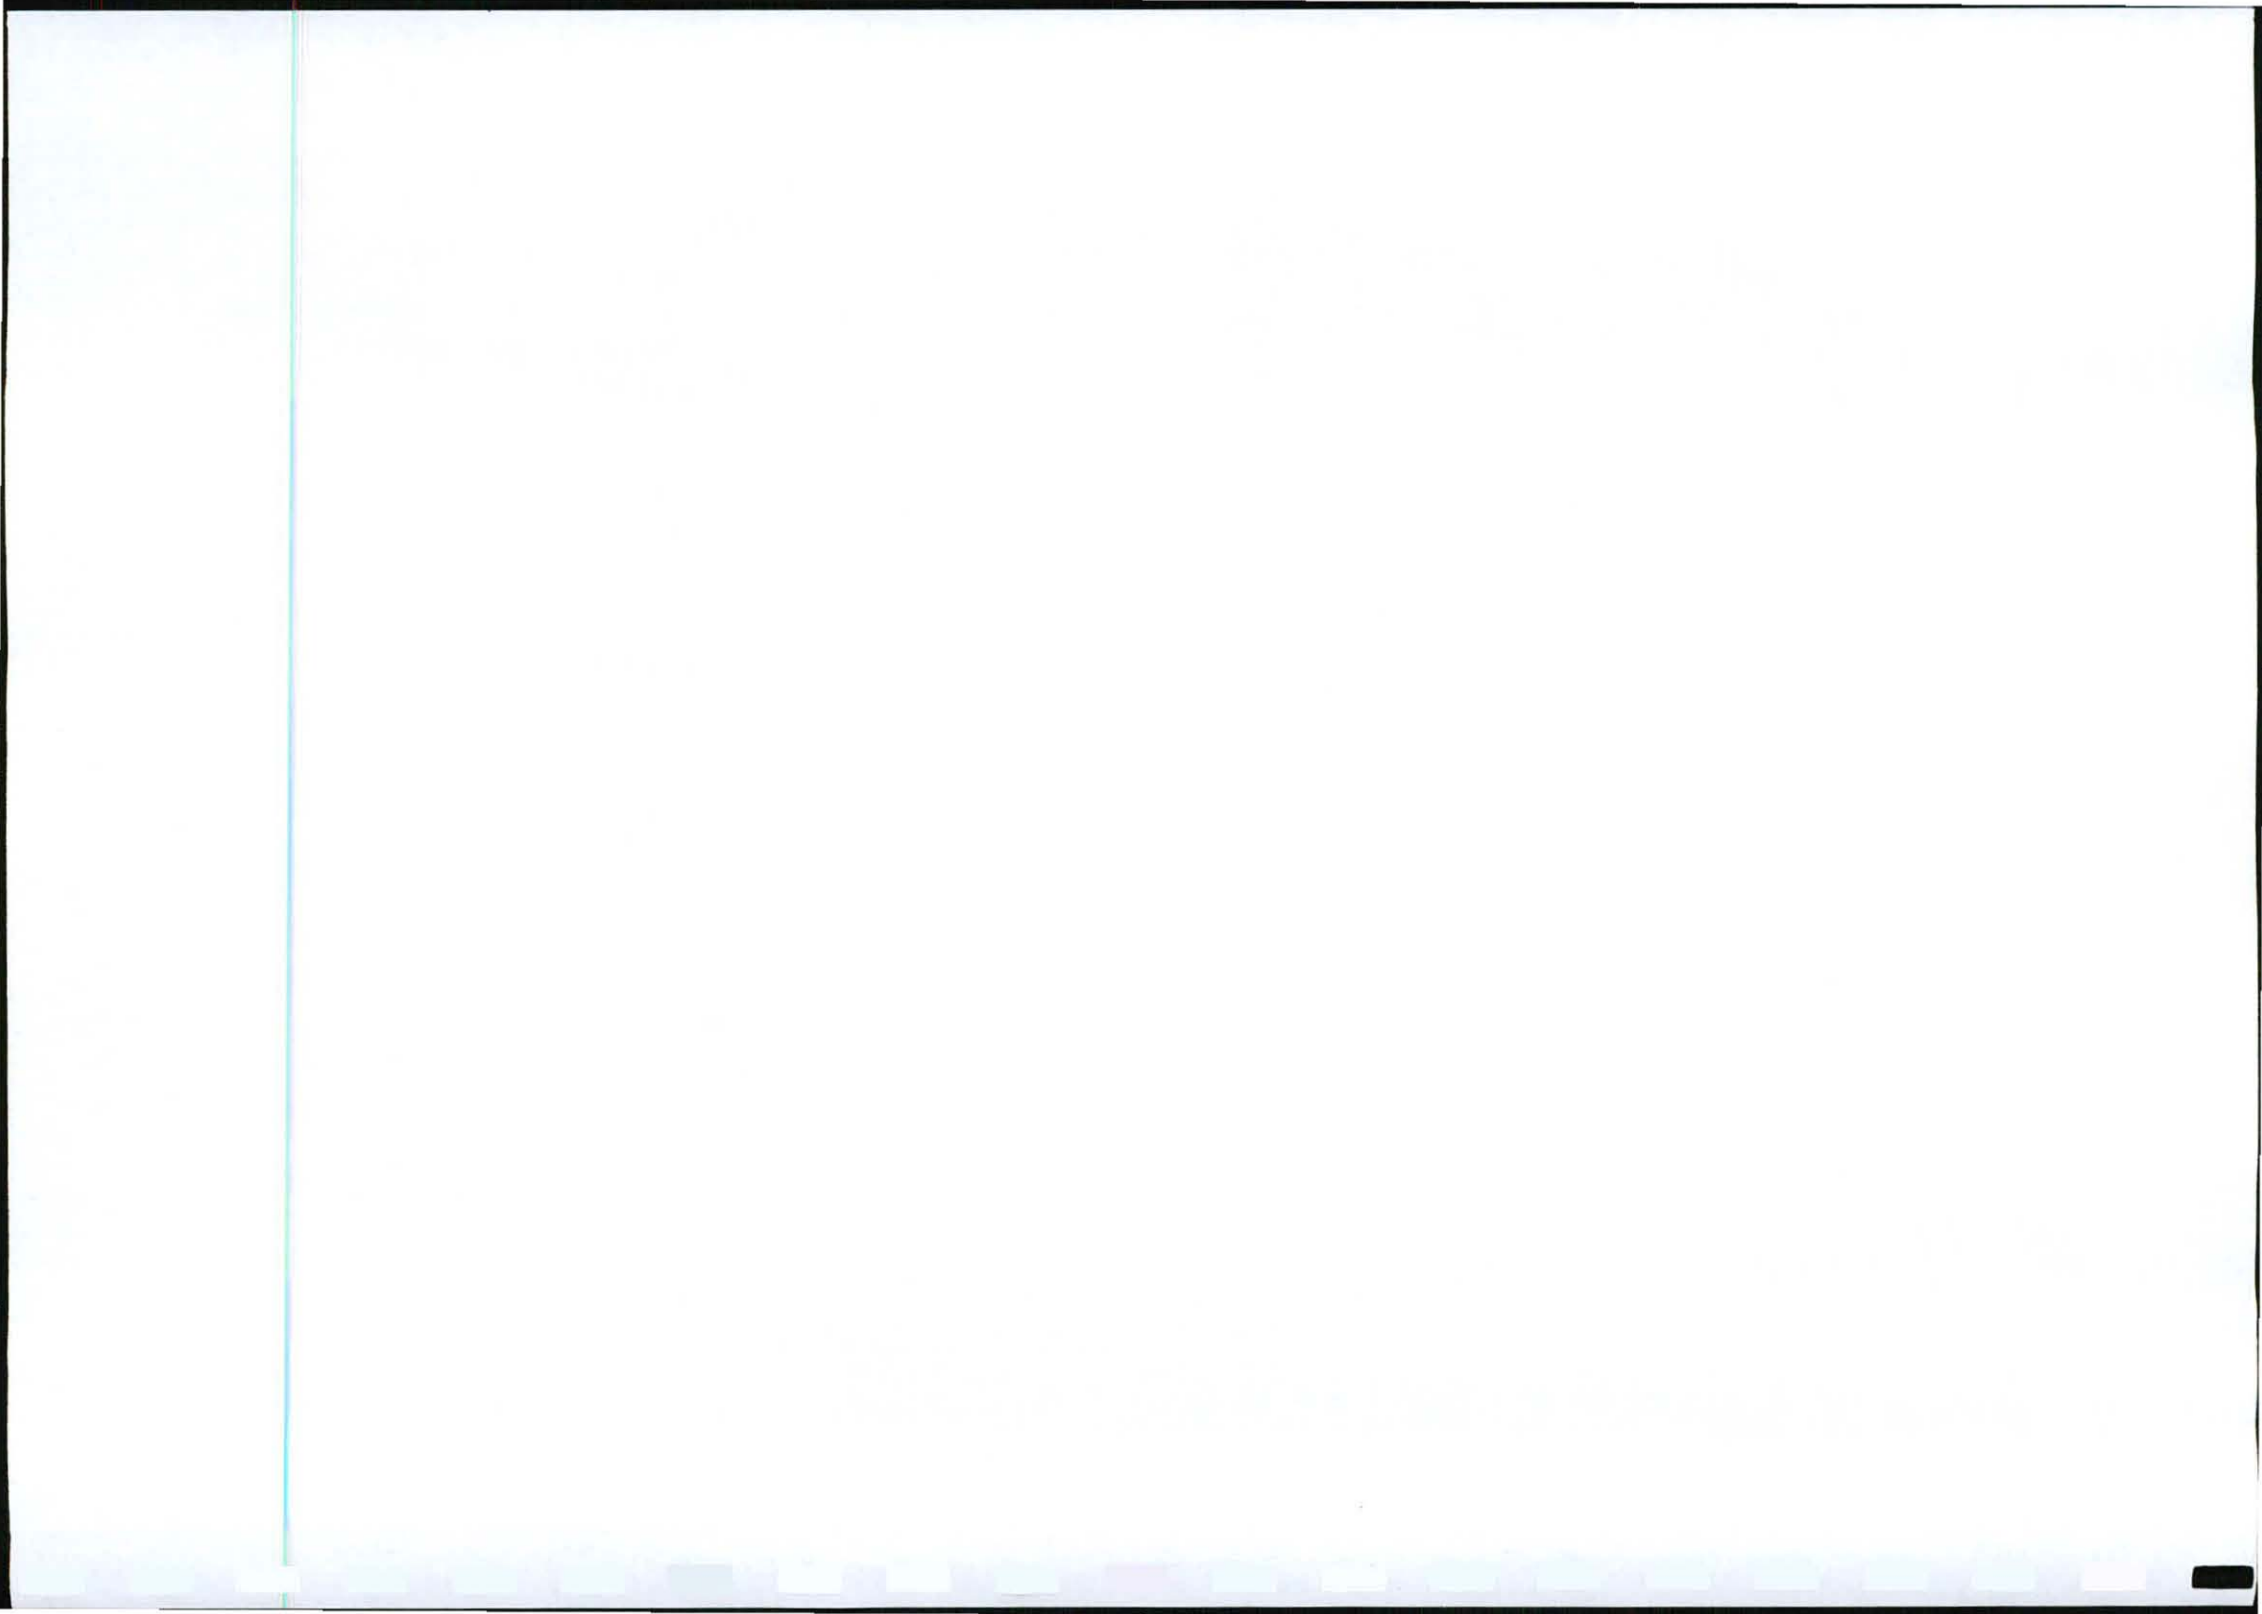

Name		Company/ Interest	Address			Telephone	Fax
JJ Nel	Grootwater 176KQ		PO Box 380	VAALWATER	0530	076 888 6355	
GJP Buys (Deon)	Visgat 64KR	Gem Hills Res Pty Ltd	PO Box 104	VAALWATER	0530	082 576 1743	014 755 4121/ deomar@bosveld.co.za

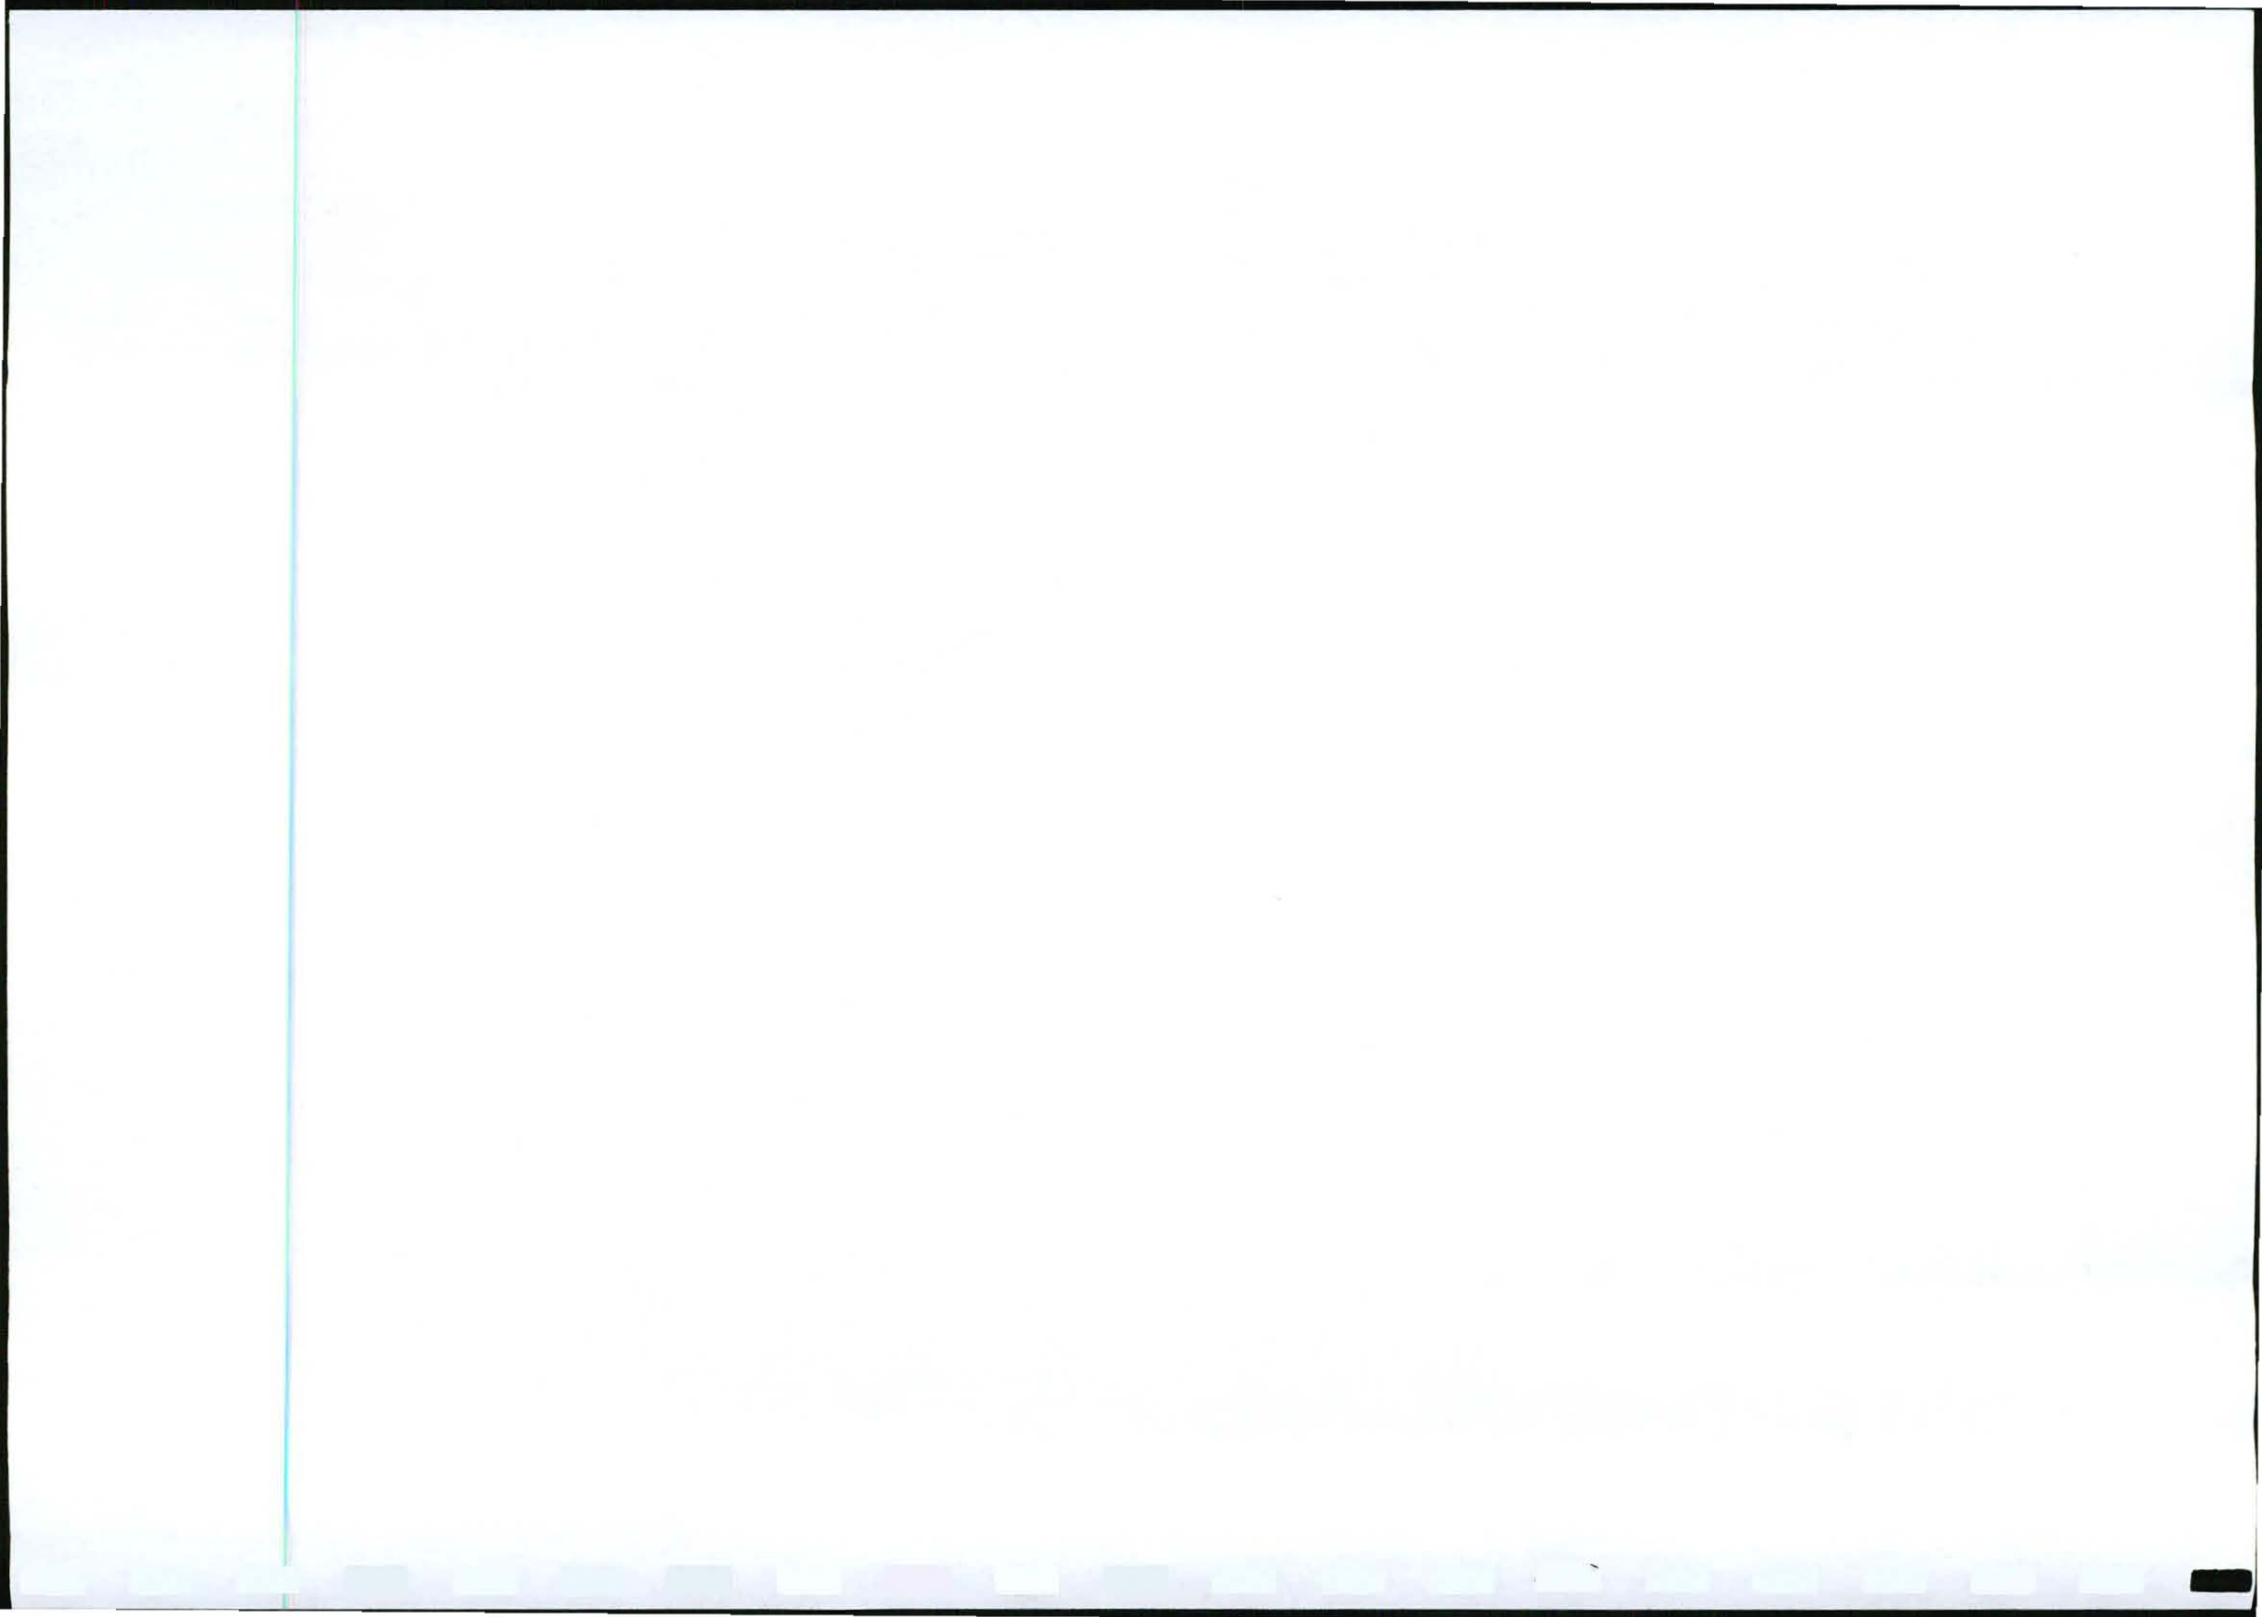


**Appendix E10: Public Participation Information
Register of Landowners on Route Alternative 4**

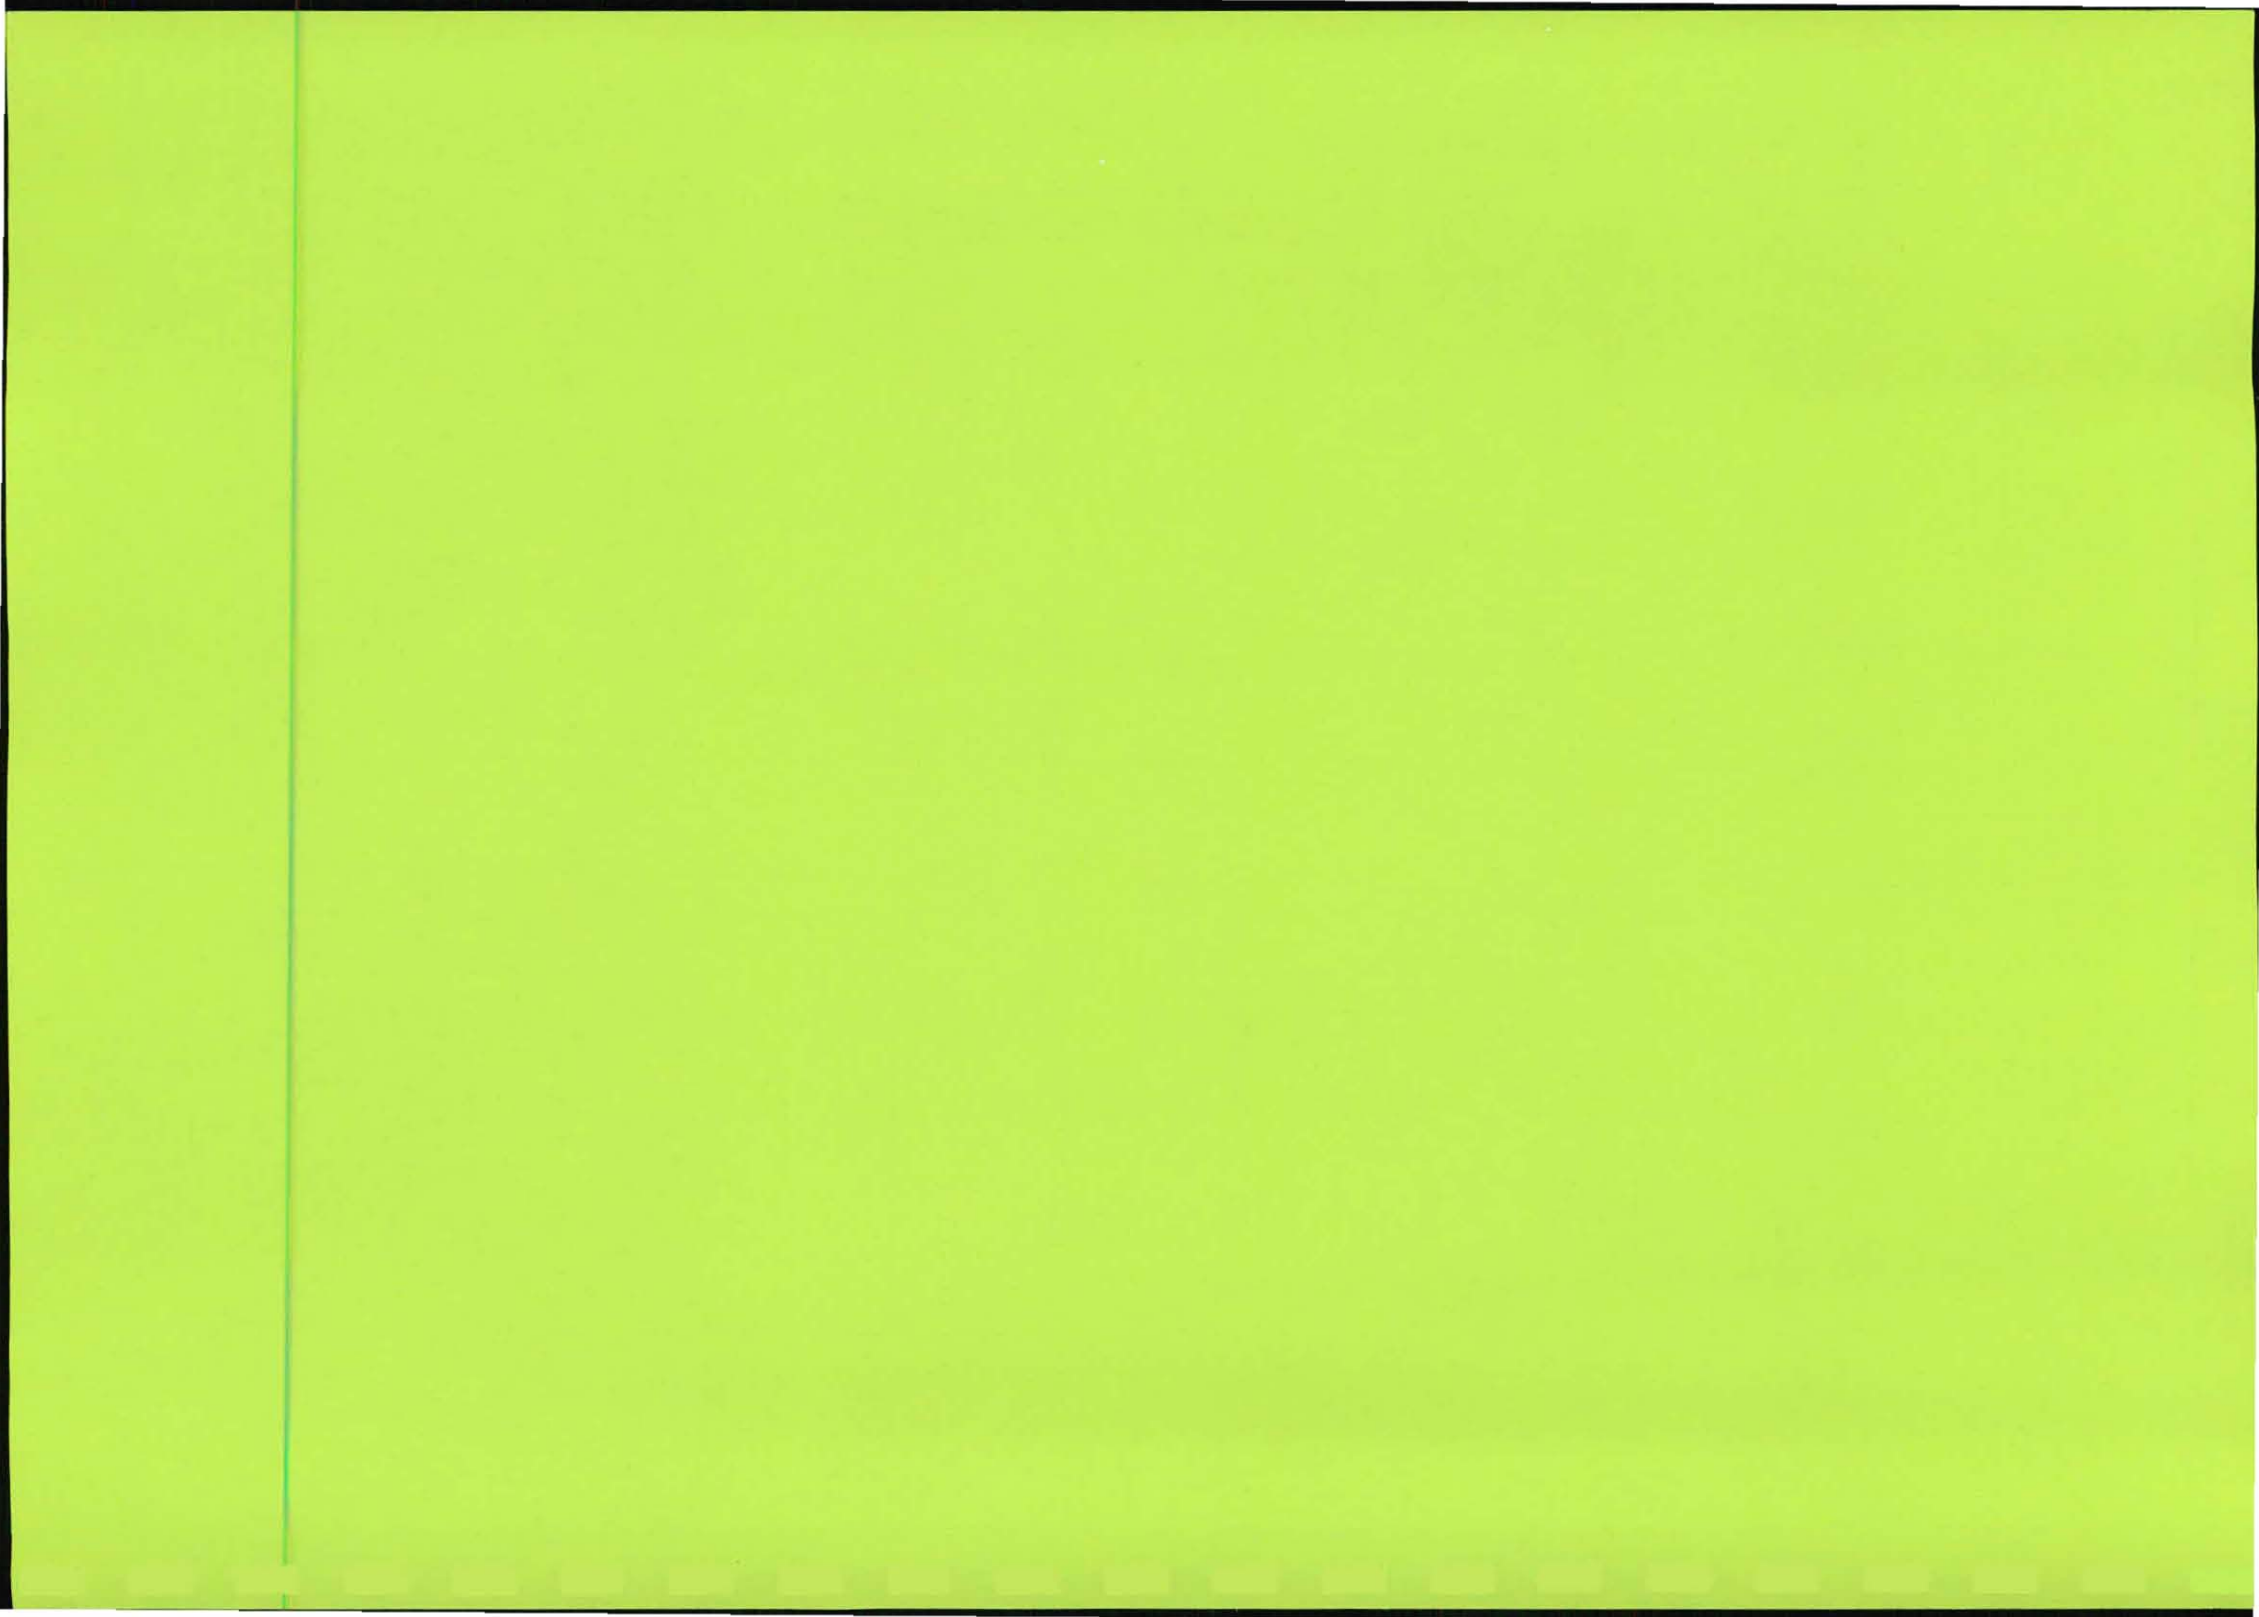


BULGE- DORSET 132kV line: Register of landowners on Route Alternative 4

Item No.	Property Description	Por	Owner	Contact Person	Tel nr	Address
1	Bulge Rivier 198 KQ	2	Breed Nicolaas Gerhardus Jacobus	Stoffel de Beer	082 736 8108 / 014 754 4469	Posbus 1146, Ellisras, 0555
2	Bulge Rivier 198 KQ	6	Mogol River Gamefarm Pty Ltd CCT	Heidi Behr	014-754 4479 /8	Posbus 3, Vaalwater 0530
3	Mokolo River Private Nature Reserve 660 KQ	0	Mogol River Gamefarm Pty Ltd CCT	Heidi Behr	014-754 4479 /8	Posbus 3, Vaalwater 0530
4	Hermanusdoorns 650 KQ	0	Hermanusdoorns Aandele Blok	John Hill		
5	Hermanusdoorns 204 KQ	5	Ama-Superco 9 CC	Chris Allanson	083 613 1983 / 073 792 5766	Bus 1052, Vaalwater, 0530 callanson@telkomsa.net
6	Welgevonden 186 KQ	0	Van der Merwe Stephanus Petrus	Faan v.d. Merwe	082 373 0447	Bus 389, Vaalwater, 0530 0726463220@vodamail.co.za
7	Welgevonden 186 KQ	1	Van der Merwe Stephanus Petrus	Faan v.d. Merwe	082 373 0447	Bus 389, Vaalwater, 0530 0726463220@vodamail.co.za
8	Groenfontein 207 KQ	5	Van der Merwe Stephanus Petrus	Faan v.d. Merwe	082 373 0447	Bus 389, Vaalwater, 0530 0726463220@vodamail.co.za
9	Keerom 208 KQ	0	Matswani Game Farm Pty Ltd	Michael Van Zyl	014-755 4942/3 / 082 322 3590	info@matswani.co.za
10	Hanover 181 KQ	0	Matswani Game Farm Pty Ltd	Michael Van Zyl	014-755 4942/3 / 082 322 3590	info@matswani.co.za
11	Hanover 181 KQ	3	Ernst Willem Hendrik	Willie Ernst	014-755 4290	Bus 286, Vaalwater, 0530
12	Welgevonden 180 KQ	0	Ernst Willem Hendrik	Willie Ernst	014-755 4290	Bus 286, Vaalwater, 0530
13	Goudfontein 171 KQ	1	Darop Prop CC	Kotze	082 441 2102	marindak@nuwagon.co.za
14	Goudfontein 171 KQ	2	Darop Prop CC	Kotze	082 441 2102	marindak@nuwagon.co.za

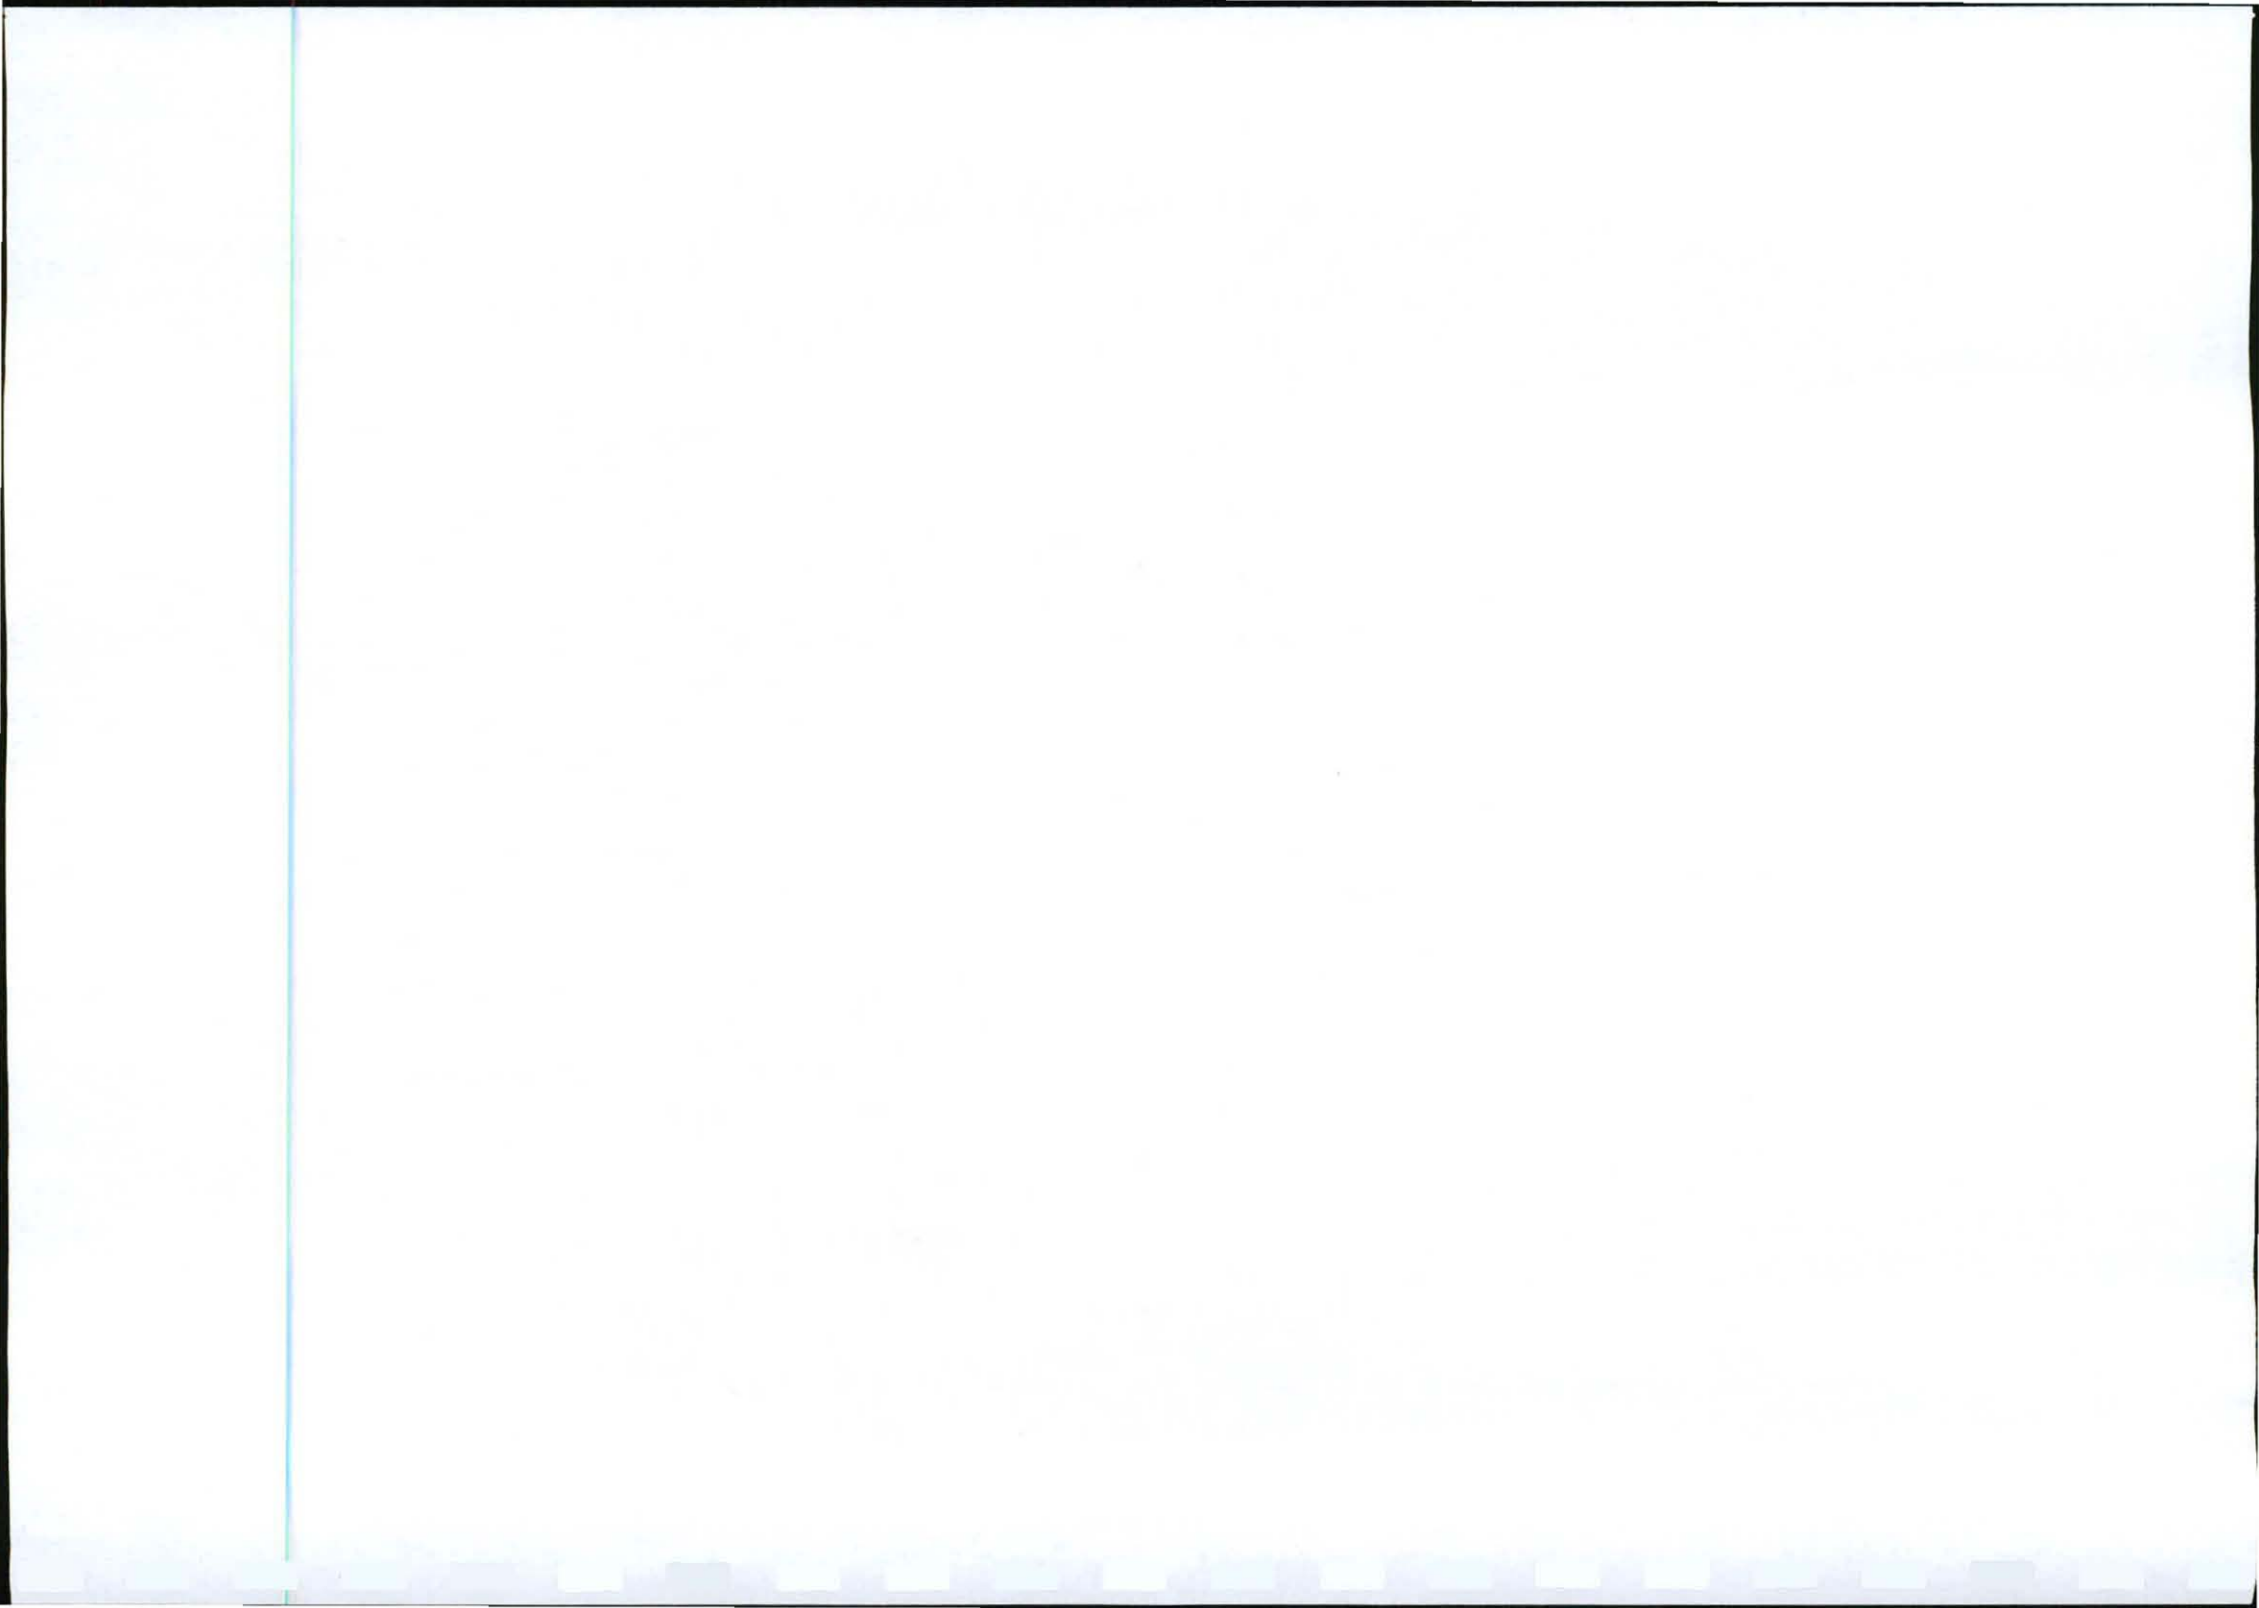

15	Goudfontein 171 KQ	0	Ama Amanzi Game Lodge (Pty) Ltd	Michiel van Baalen / Issabella van Baalen	Michiel 073 923 4989 Issabella 071 917 0170	info@ama-amanzi.com
16	Schuinskloof 175 KQ	1	Bannink Thomas Johannes	Willem/Thomas/Stam Bannink	Thomas 072 968 9401 Willem 083 376 2558	Bus 902, Vaalwater, 0530
17	Schuinskloof 175 KQ	2	Bannink Thomas Johannes	Willem/Thomas/Stam Bannink	Thomas 072 968 9401 Willem 083 376 2558	Bus 902, Vaalwater, 0530
18	Schuinskloof 175 KQ	3	Bannink Thomas Johannes	Willem/Thomas/Stam Bannink	Thomas 072 968 9401 Willem 083 376 2558	Bus 902, Vaalwater, 0530
19	Rietbokhoek 4 KR	1	Rietbokhoek Trust	Nico Breedt	082 388 1290	Bus 1146, Vaalwater, 0530
20	Rietbokhoek 4 KR	2	Vermeulen Jan Hendrik	Jan Vermeulen	083 428 1652	Bus 335, Vaalwater, 0530
21	Rietbokhoek 4 KR	Rem	Van Niekerk Jan Hendrik	Jan van Niekerk	014-755 4134	linda.kunneke@gmail.com
22	Zeekgat 5 KR	Rem	Porky's Ranch CC	Chris Vermaak	014-755 4101/ 082 874 3119	
23	Zeekgat 5 KR	1	Swanevelder Erasmus Albertus	Bertus Swanevelder	082 550 1410	bertus.swanevelder@gmail.com
24	Steenbokfontein 9 KR	Rem	Swanevelder Erasmus Albertus	Bertus Swanevelder	082 550 1410	bertus.swanevelder@gmail.com
25	Steenbokfontein 9 KR	4	Swanevelder Erasmus Albertus	Bertus Swanevelder	082 550 1410	bertus.swanevelder@gmail.com
26	Steenbokfontein 9 KR	3	Ruimte Vreug Boerdery CC	K.P. van der Walt	082 878 7158	karwalt@mtnloaded.co.za
27	Dwarsfontein 51 KR	Rem	Labuschagne Erasmus Albertus/Anna Sophia	Ras Labuschagne	014-755 4139 / 083 743 3224	eransa1@vodamail.com
28	Dwarsfontein 51 KR (To be consolidated to Jacobshoogte T149848/07)	0	Nyane Game Lodge	Stoffel Snyman	014 - 755 3982	Bus 968, Vaalwater, 0530 stoffel.susan@gmail.com
29	Brakfontein 16 KR	Rem	Van Deventer Anelia	Jan van Deventer	014-755 4117 / 082 557 9224	Bus 211, Vaalwater, 0530 janvandeventer@webmail.co.za

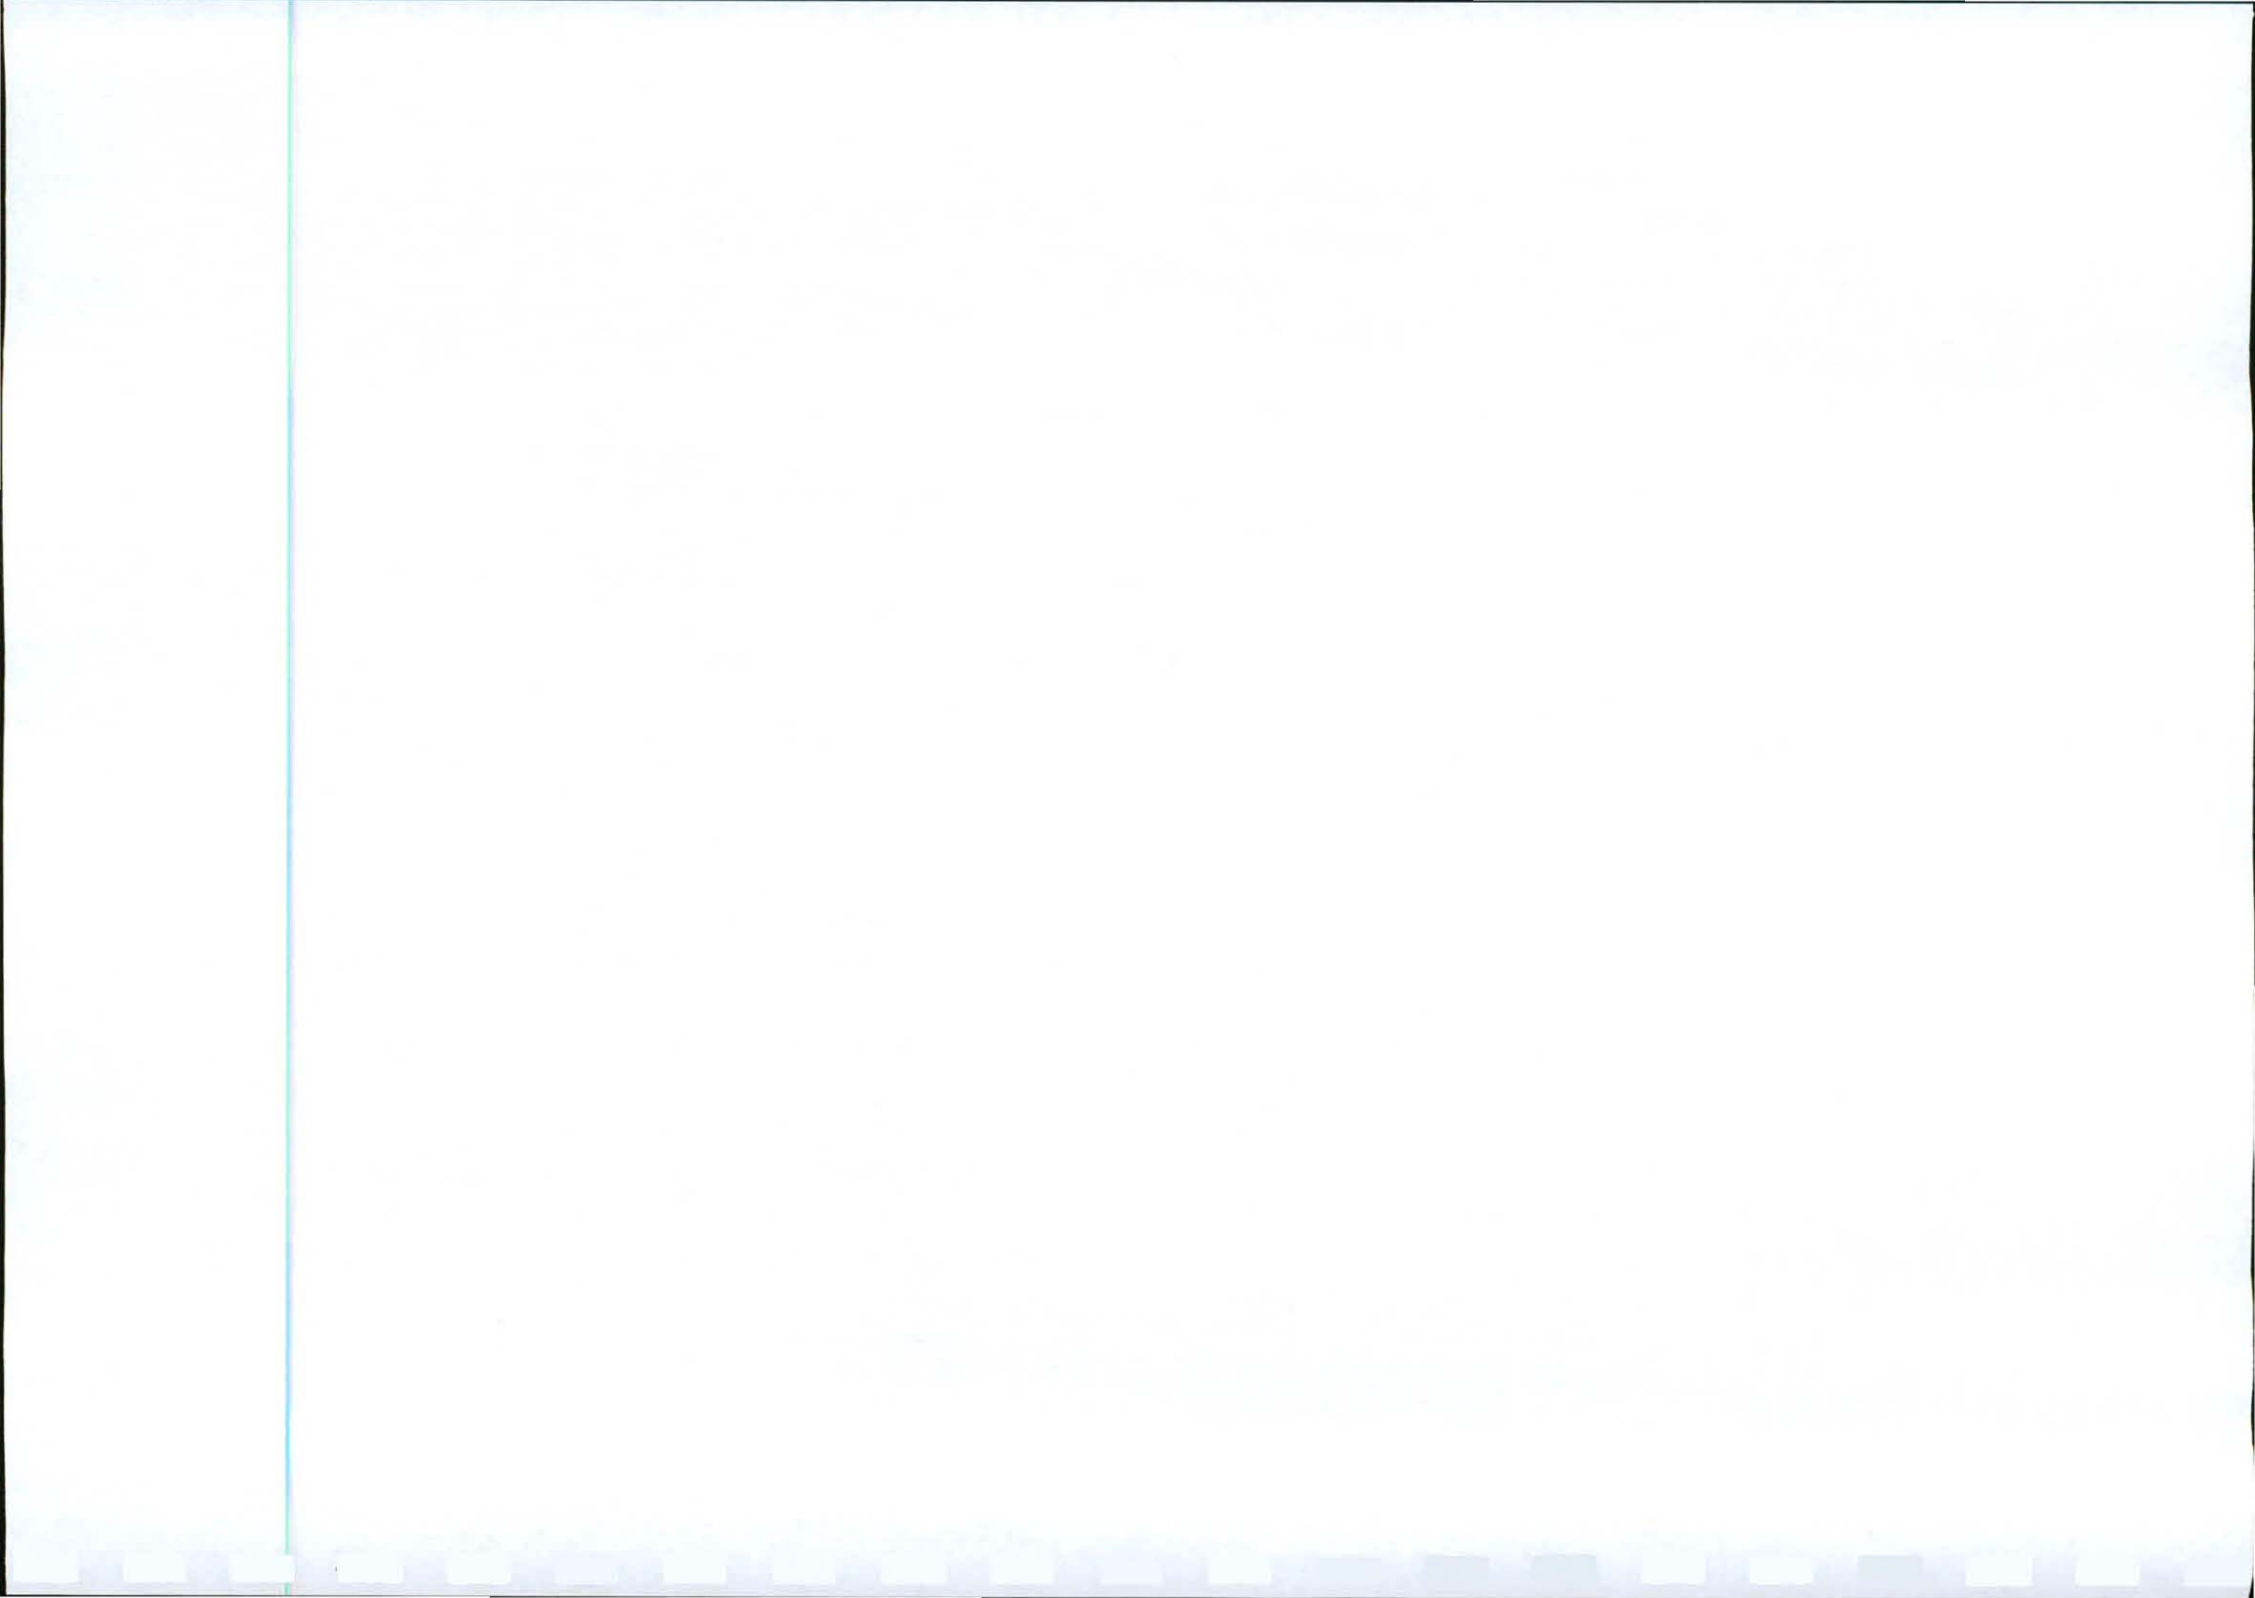

Appendix F: Other information
Environmental Management Programme



Eskom Bulge-Dorset 132kV line
 DEA Ref nr 12/12/20/2094
 NEAS Ref nr DEA/EIA/0000113/2011
Basic Assessment Report
Appendix F: Environmental Management Programme
Compiled May 2012

1. DETAILS OF THE PROPOSED ACTIVITIES

Eskom Distribution Northern Region (the Applicant) commissioned Texture Environmental Consultants (the Environmental Assessment Practitioner) to undertake an Environmental Impact Assessment for the proposed project.

The proposed project requires the construction of a ±65km 132kV line from the authorised Bulge Rivier substation to the new Dorset substation. Inclusive to this application is the construction of the following:

- Construct a 132kV line from the authorised Bulge Rivier substation to the new Dorset substation.
- Construct an access/ construction road for the new 132kV line.
- Obtain a servitude area of 31metres wide for the line.

This EIA application is part of a broader scope of works to improve the network performance. Currently the network is experiencing under voltages and is incapable of handling additional loads due to the contingency constraints of the network.

1.1 Locality and Regional Context

Eskom is planning the construction of a 132kV power line from the authorised Bulge River substation to the new Dorset substation. The study area for the power line servitude is situated in the Limpopo Province, close to the small towns of Vaalwater, Matlabas and Elmeston.

The **affected properties** for the **proposed Alternative 4** is on the farms Bulge Rivier 198 KQ portion 2, 6, Mokolo Rivier Private Nature Reserve 660 KQ portion 0, Hermanusdoorns 650 KQ portion 0, Hermanusdoorns 204 KQ portion 5, Welgevonden 186 KQ portion 0 en 1, Groenfontein 207 KQ portion 5, Keerom 208 KQ portion 0, Hanover 181 KQ portion 0, 3, Goudfontein 171 KQ portion 0, 1, 2, Welgevonden 180 KQ portion 0, Schuinskloof 175 KQ portion 1, 2, 3, Rietbokhoek 4 KR portion 1, 2, Rem, Zeekgat 5 KR portion 1, Rem, Steenbokfontein 9 KR portion Rem, 3, 4, Dwarsfontein 51 KR Rem, Dwarsfontein 51 KR (To be consolidated to Jacobshoogte T149848/07) portion 0, Brakfontein 16 KR portion Rem in the Lephallale Local Municipality in the Limpopo Province.


The study area is situated on the 1:50 000 topographical base maps 2327DC, 2327DD, 2427BA, 2328CC, 2428AA. (Refer to Appendices A1-A7 for copies of the Locality map and the route maps). The alternatives for the project are found at approximately:

Bulge rivier substation:

Longitude (Degrees Decimal Minutes)	Latitude (Degrees Decimal Minutes)
27° 40.237' E	24° 6.806' S

Proposed Alternative 4 Route (65.4km):


250m intervals	Longitude (Degrees Decimal Minutes)	Latitude (Degrees Decimal Minutes)
1	27° 40.326' E	24° 6.744' S
2	27° 40.472' E	24° 6.731' S
3	27° 40.619' E	24° 6.717' S
4	27° 40.766' E	24° 6.703' S
5	27° 40.913' E	24° 6.690' S
6	27° 41.060' E	24° 6.676' S

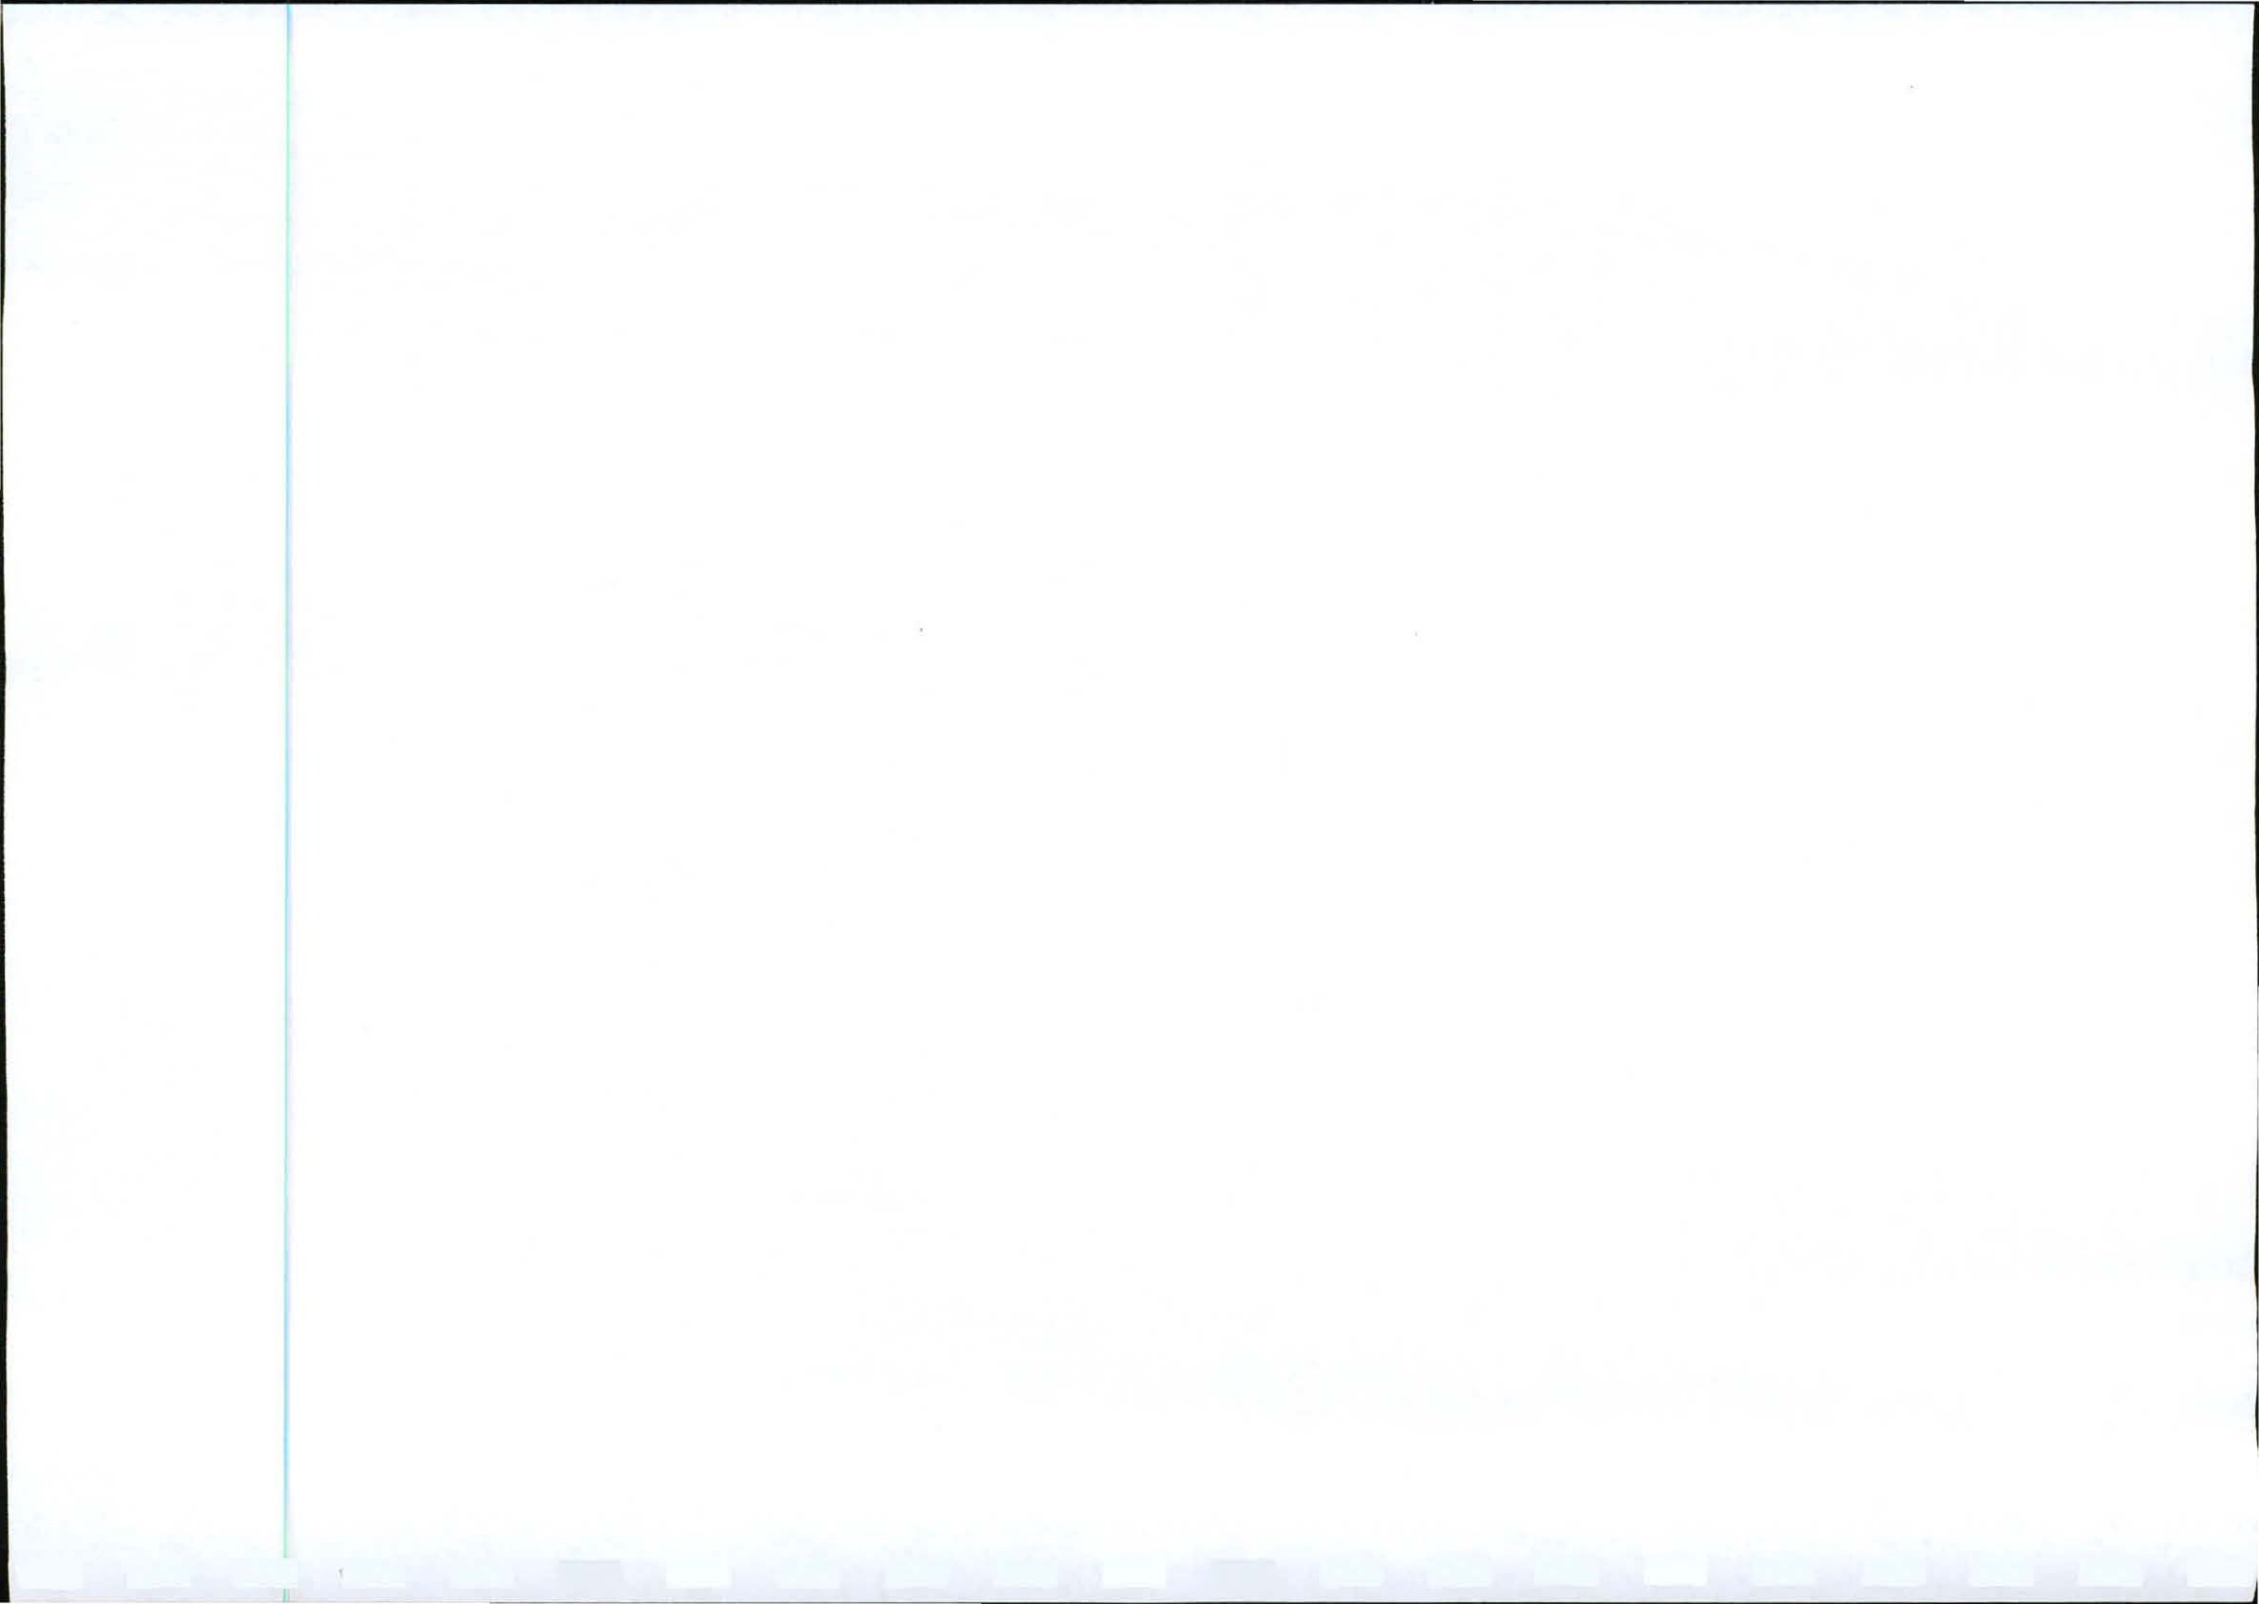


7	27° 41.206' E	24° 6.662' S
8	27° 41.353' E	24° 6.649' S
9	27° 41.500' E	24° 6.635' S
10	27° 41.646' E	24° 6.621' S
11	27° 41.793' E	24° 6.607' S
12	27° 41.899' E	24° 6.702' S
13	27° 42.004' E	24° 6.797' S
14	27° 41.986' E	24° 6.918' S
15	27° 41.937' E	24° 7.045' S
16	27° 41.888' E	24° 7.173' S
17	27° 41.838' E	24° 7.300' S
18	27° 41.977' E	24° 7.335' S
19	27° 42.120' E	24° 7.367' S
20	27° 42.263' E	24° 7.399' S
21	27° 42.407' E	24° 7.431' S
22	27° 42.550' E	24° 7.463' S
23	27° 42.614' E	24° 7.362' S
24	27° 42.718' E	24° 7.345' S
25	27° 42.857' E	24° 7.391' S
26	27° 42.919' E	24° 7.298' S
27	27° 42.961' E	24° 7.168' S
28	27° 43.003' E	24° 7.038' S
29	27° 43.070' E	24° 6.953' S
30	27° 43.209' E	24° 6.998' S
31	27° 43.348' E	24° 7.043' S
32	27° 43.487' E	24° 7.088' S
33	27° 43.626' E	24° 7.133' S
34	27° 43.765' E	24° 7.178' S
35	27° 43.904' E	24° 7.223' S
36	27° 44.044' E	24° 7.268' S
37	27° 44.183' E	24° 7.313' S
38	27° 44.322' E	24° 7.358' S
39	27° 44.461' E	24° 7.403' S
40	27° 44.600' E	24° 7.448' S
41	27° 44.739' E	24° 7.493' S
42	27° 44.879' E	24° 7.538' S
43	27° 45.018' E	24° 7.583' S
44	27° 45.157' E	24° 7.628' S
45	27° 45.296' E	24° 7.673' S
46	27° 45.435' E	24° 7.718' S
47	27° 45.468' E	24° 7.790' S
48	27° 45.375' E	24° 7.895' S
49	27° 45.281' E	24° 8.000' S
50	27° 45.188' E	24° 8.105' S
51	27° 45.094' E	24° 8.210' S
52	27° 45.001' E	24° 8.314' S
53	27° 45.009' E	24° 8.398' S
54	27° 45.144' E	24° 8.454' S
55	27° 45.278' E	24° 8.510' S
56	27° 45.412' E	24° 8.566' S
57	27° 45.546' E	24° 8.622' S
58	27° 45.681' E	24° 8.679' S
59	27° 45.815' E	24° 8.735' S
60	27° 45.949' E	24° 8.791' S
61	27° 46.083' E	24° 8.847' S
62	27° 46.217' E	24° 8.904' S
63	27° 46.355' E	24° 8.949' S
64	27° 46.461' E	24° 8.915' S
65	27° 46.514' E	24° 8.788' S
66	27° 46.567' E	24° 8.662' S
67	27° 46.620' E	24° 8.536' S
68	27° 46.673' E	24° 8.409' S
69	27° 46.747' E	24° 8.293' S
70	27° 46.829' E	24° 8.180' S




71	27° 46.911' E	24° 8.068' S
72	27° 46.993' E	24° 7.955' S
73	27° 47.075' E	24° 7.843' S
74	27° 47.157' E	24° 7.730' S
75	27° 47.230' E	24° 7.613' S
76	27° 47.269' E	24° 7.482' S
77	27° 47.303' E	24° 7.351' S
78	27° 47.345' E	24° 7.223' S
79	27° 47.452' E	24° 7.129' S
80	27° 47.558' E	24° 7.036' S
81	27° 47.664' E	24° 6.942' S
82	27° 47.771' E	24° 6.848' S
83	27° 47.910' E	24° 6.816' S
84	27° 48.057' E	24° 6.822' S
85	27° 48.204' E	24° 6.828' S
86	27° 48.352' E	24° 6.835' S
87	27° 48.499' E	24° 6.841' S
88	27° 48.646' E	24° 6.847' S
89	27° 48.794' E	24° 6.852' S
90	27° 48.937' E	24° 6.880' S
91	27° 49.067' E	24° 6.944' S
92	27° 49.196' E	24° 7.009' S
93	27° 49.325' E	24° 7.075' S
94	27° 49.455' E	24° 7.140' S
95	27° 49.584' E	24° 7.205' S
96	27° 49.716' E	24° 7.264' S
97	27° 49.851' E	24° 7.319' S
98	27° 49.986' E	24° 7.374' S
99	27° 50.121' E	24° 7.430' S
100	27° 50.251' E	24° 7.493' S
101	27° 50.377' E	24° 7.564' S
102	27° 50.515' E	24° 7.519' S
103	27° 50.654' E	24° 7.474' S
104	27° 50.794' E	24° 7.429' S
105	27° 50.932' E	24° 7.383' S
106	27° 51.026' E	24° 7.443' S
107	27° 51.093' E	24° 7.564' S
108	27° 51.160' E	24° 7.684' S
109	27° 51.241' E	24° 7.728' S
110	27° 51.346' E	24° 7.633' S
111	27° 51.451' E	24° 7.538' S
112	27° 51.556' E	24° 7.443' S
113	27° 51.660' E	24° 7.348' S
114	27° 51.765' E	24° 7.252' S
115	27° 51.870' E	24° 7.157' S
116	27° 51.975' E	24° 7.062' S
117	27° 52.080' E	24° 6.967' S
118	27° 52.185' E	24° 6.872' S
119	27° 52.290' E	24° 6.776' S
120	27° 52.404' E	24° 6.695' S
121	27° 52.542' E	24° 6.646' S
122	27° 52.680' E	24° 6.598' S
123	27° 52.818' E	24° 6.549' S
124	27° 52.955' E	24° 6.500' S
125	27° 53.093' E	24° 6.451' S
126	27° 53.230' E	24° 6.403' S
127	27° 53.368' E	24° 6.354' S
128	27° 53.506' E	24° 6.305' S
129	27° 53.643' E	24° 6.257' S
130	27° 53.781' E	24° 6.208' S
131	27° 53.919' E	24° 6.159' S
132	27° 54.056' E	24° 6.111' S
133	27° 54.194' E	24° 6.062' S
134	27° 54.332' E	24° 6.016' S

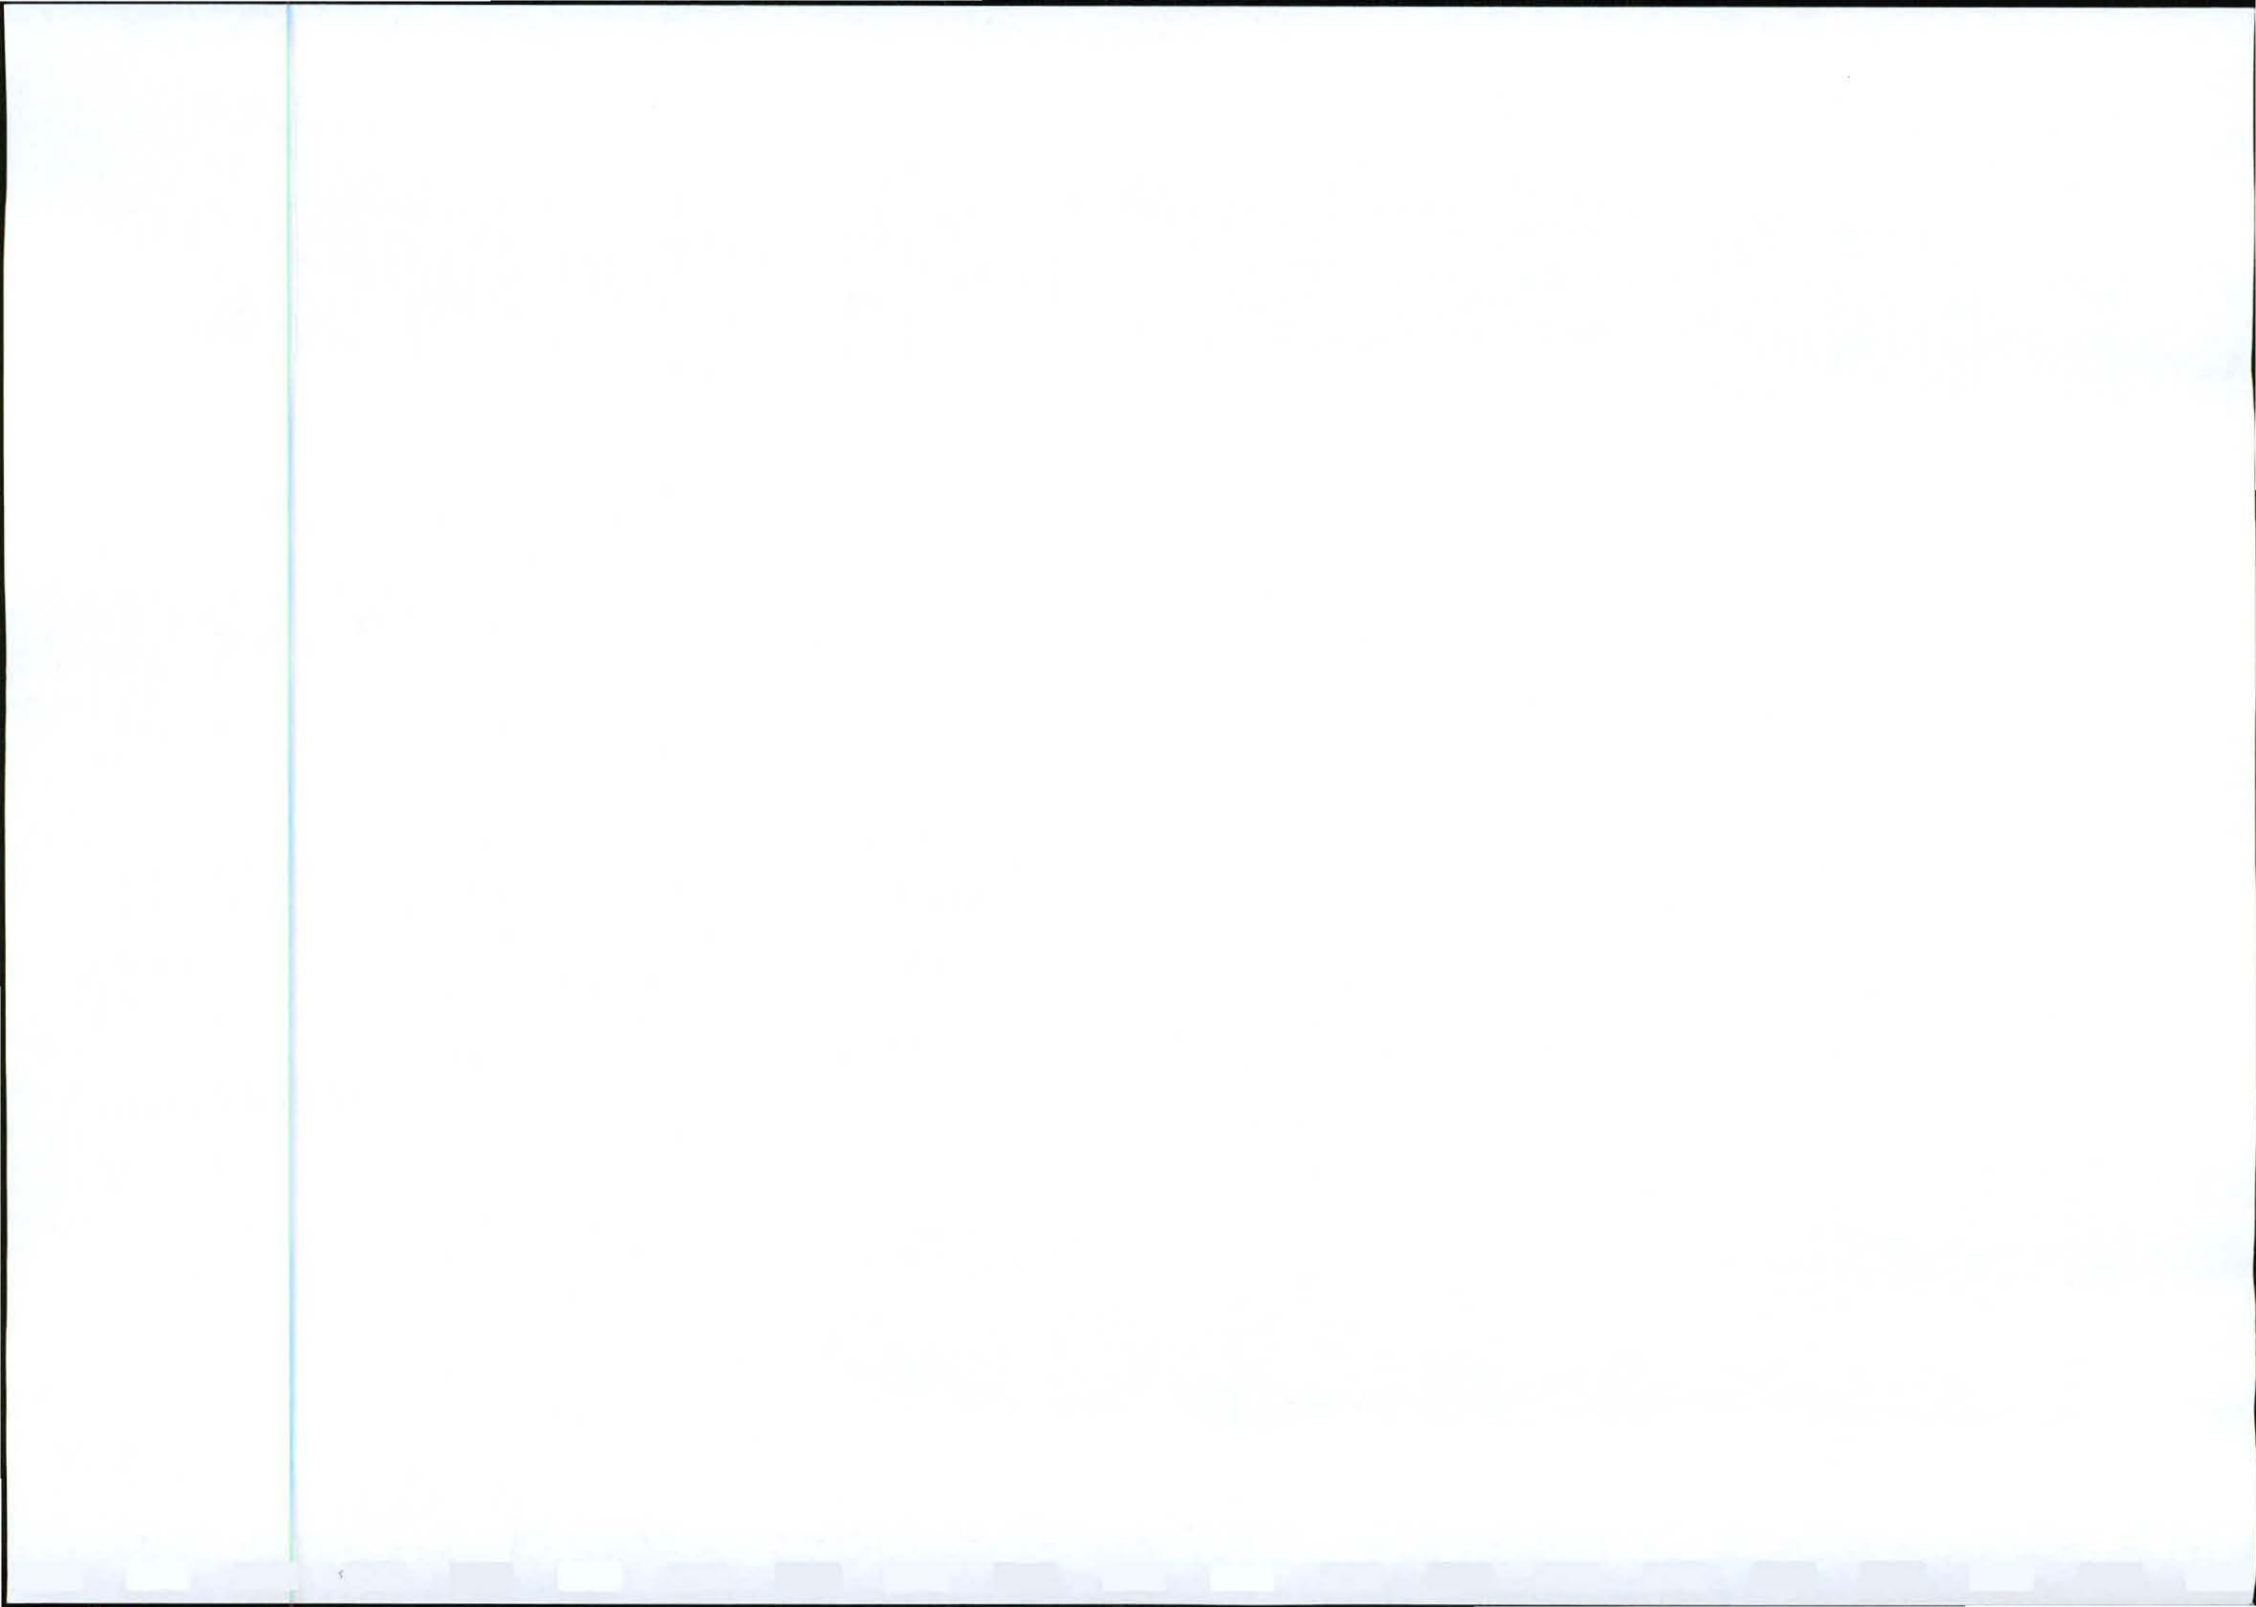

135	27° 54.474' E	24° 6.050' S
136	27° 54.617' E	24° 6.085' S
137	27° 54.760' E	24° 6.119' S
138	27° 54.903' E	24° 6.153' S
139	27° 55.045' E	24° 6.188' S
140	27° 55.188' E	24° 6.222' S
141	27° 55.331' E	24° 6.256' S
142	27° 55.445' E	24° 6.213' S
143	27° 55.535' E	24° 6.106' S
144	27° 55.626' E	24° 5.999' S
145	27° 55.717' E	24° 5.893' S
146	27° 55.837' E	24° 5.849' S
147	27° 55.929' E	24° 5.745' S
148	27° 56.018' E	24° 5.637' S
149	27° 56.107' E	24° 5.529' S
150	27° 56.196' E	24° 5.421' S
151	27° 56.285' E	24° 5.313' S
152	27° 56.374' E	24° 5.205' S
153	27° 56.463' E	24° 5.097' S
154	27° 56.552' E	24° 4.989' S
155	27° 56.641' E	24° 4.881' S
156	27° 56.730' E	24° 4.773' S
157	27° 56.795' E	24° 4.654' S
158	27° 56.837' E	24° 4.524' S
159	27° 56.878' E	24° 4.394' S
160	27° 56.920' E	24° 4.264' S
161	27° 56.961' E	24° 4.135' S
162	27° 57.003' E	24° 4.005' S
163	27° 57.044' E	24° 3.875' S
164	27° 57.086' E	24° 3.745' S
165	27° 57.128' E	24° 3.615' S
166	27° 57.169' E	24° 3.485' S
167	27° 57.211' E	24° 3.355' S
168	27° 57.252' E	24° 3.225' S
169	27° 57.294' E	24° 3.096' S
170	27° 57.441' E	24° 3.108' S
171	27° 57.588' E	24° 3.121' S
172	27° 57.735' E	24° 3.134' S
173	27° 57.881' E	24° 3.147' S
174	27° 58.028' E	24° 3.159' S
175	27° 58.175' E	24° 3.172' S
176	27° 58.322' E	24° 3.185' S
177	27° 58.468' E	24° 3.201' S
178	27° 58.610' E	24° 3.237' S
179	27° 58.753' E	24° 3.215' S
180	27° 58.861' E	24° 3.139' S
181	27° 58.933' E	24° 3.021' S
182	27° 59.006' E	24° 2.904' S
183	27° 59.079' E	24° 2.786' S
184	27° 59.152' E	24° 2.668' S
185	27° 59.266' E	24° 2.628' S
186	27° 59.413' E	24° 2.646' S
187	27° 59.559' E	24° 2.663' S
188	27° 59.705' E	24° 2.681' S
189	27° 59.851' E	24° 2.699' S
190	27° 59.996' E	24° 2.693' S
191	28° 0.139' E	24° 2.661' S
192	28° 0.282' E	24° 2.629' S
193	28° 0.426' E	24° 2.596' S
194	28° 0.569' E	24° 2.564' S
195	28° 0.712' E	24° 2.532' S
196	28° 0.855' E	24° 2.500' S
197	28° 0.999' E	24° 2.468' S
198	28° 1.142' E	24° 2.435' S

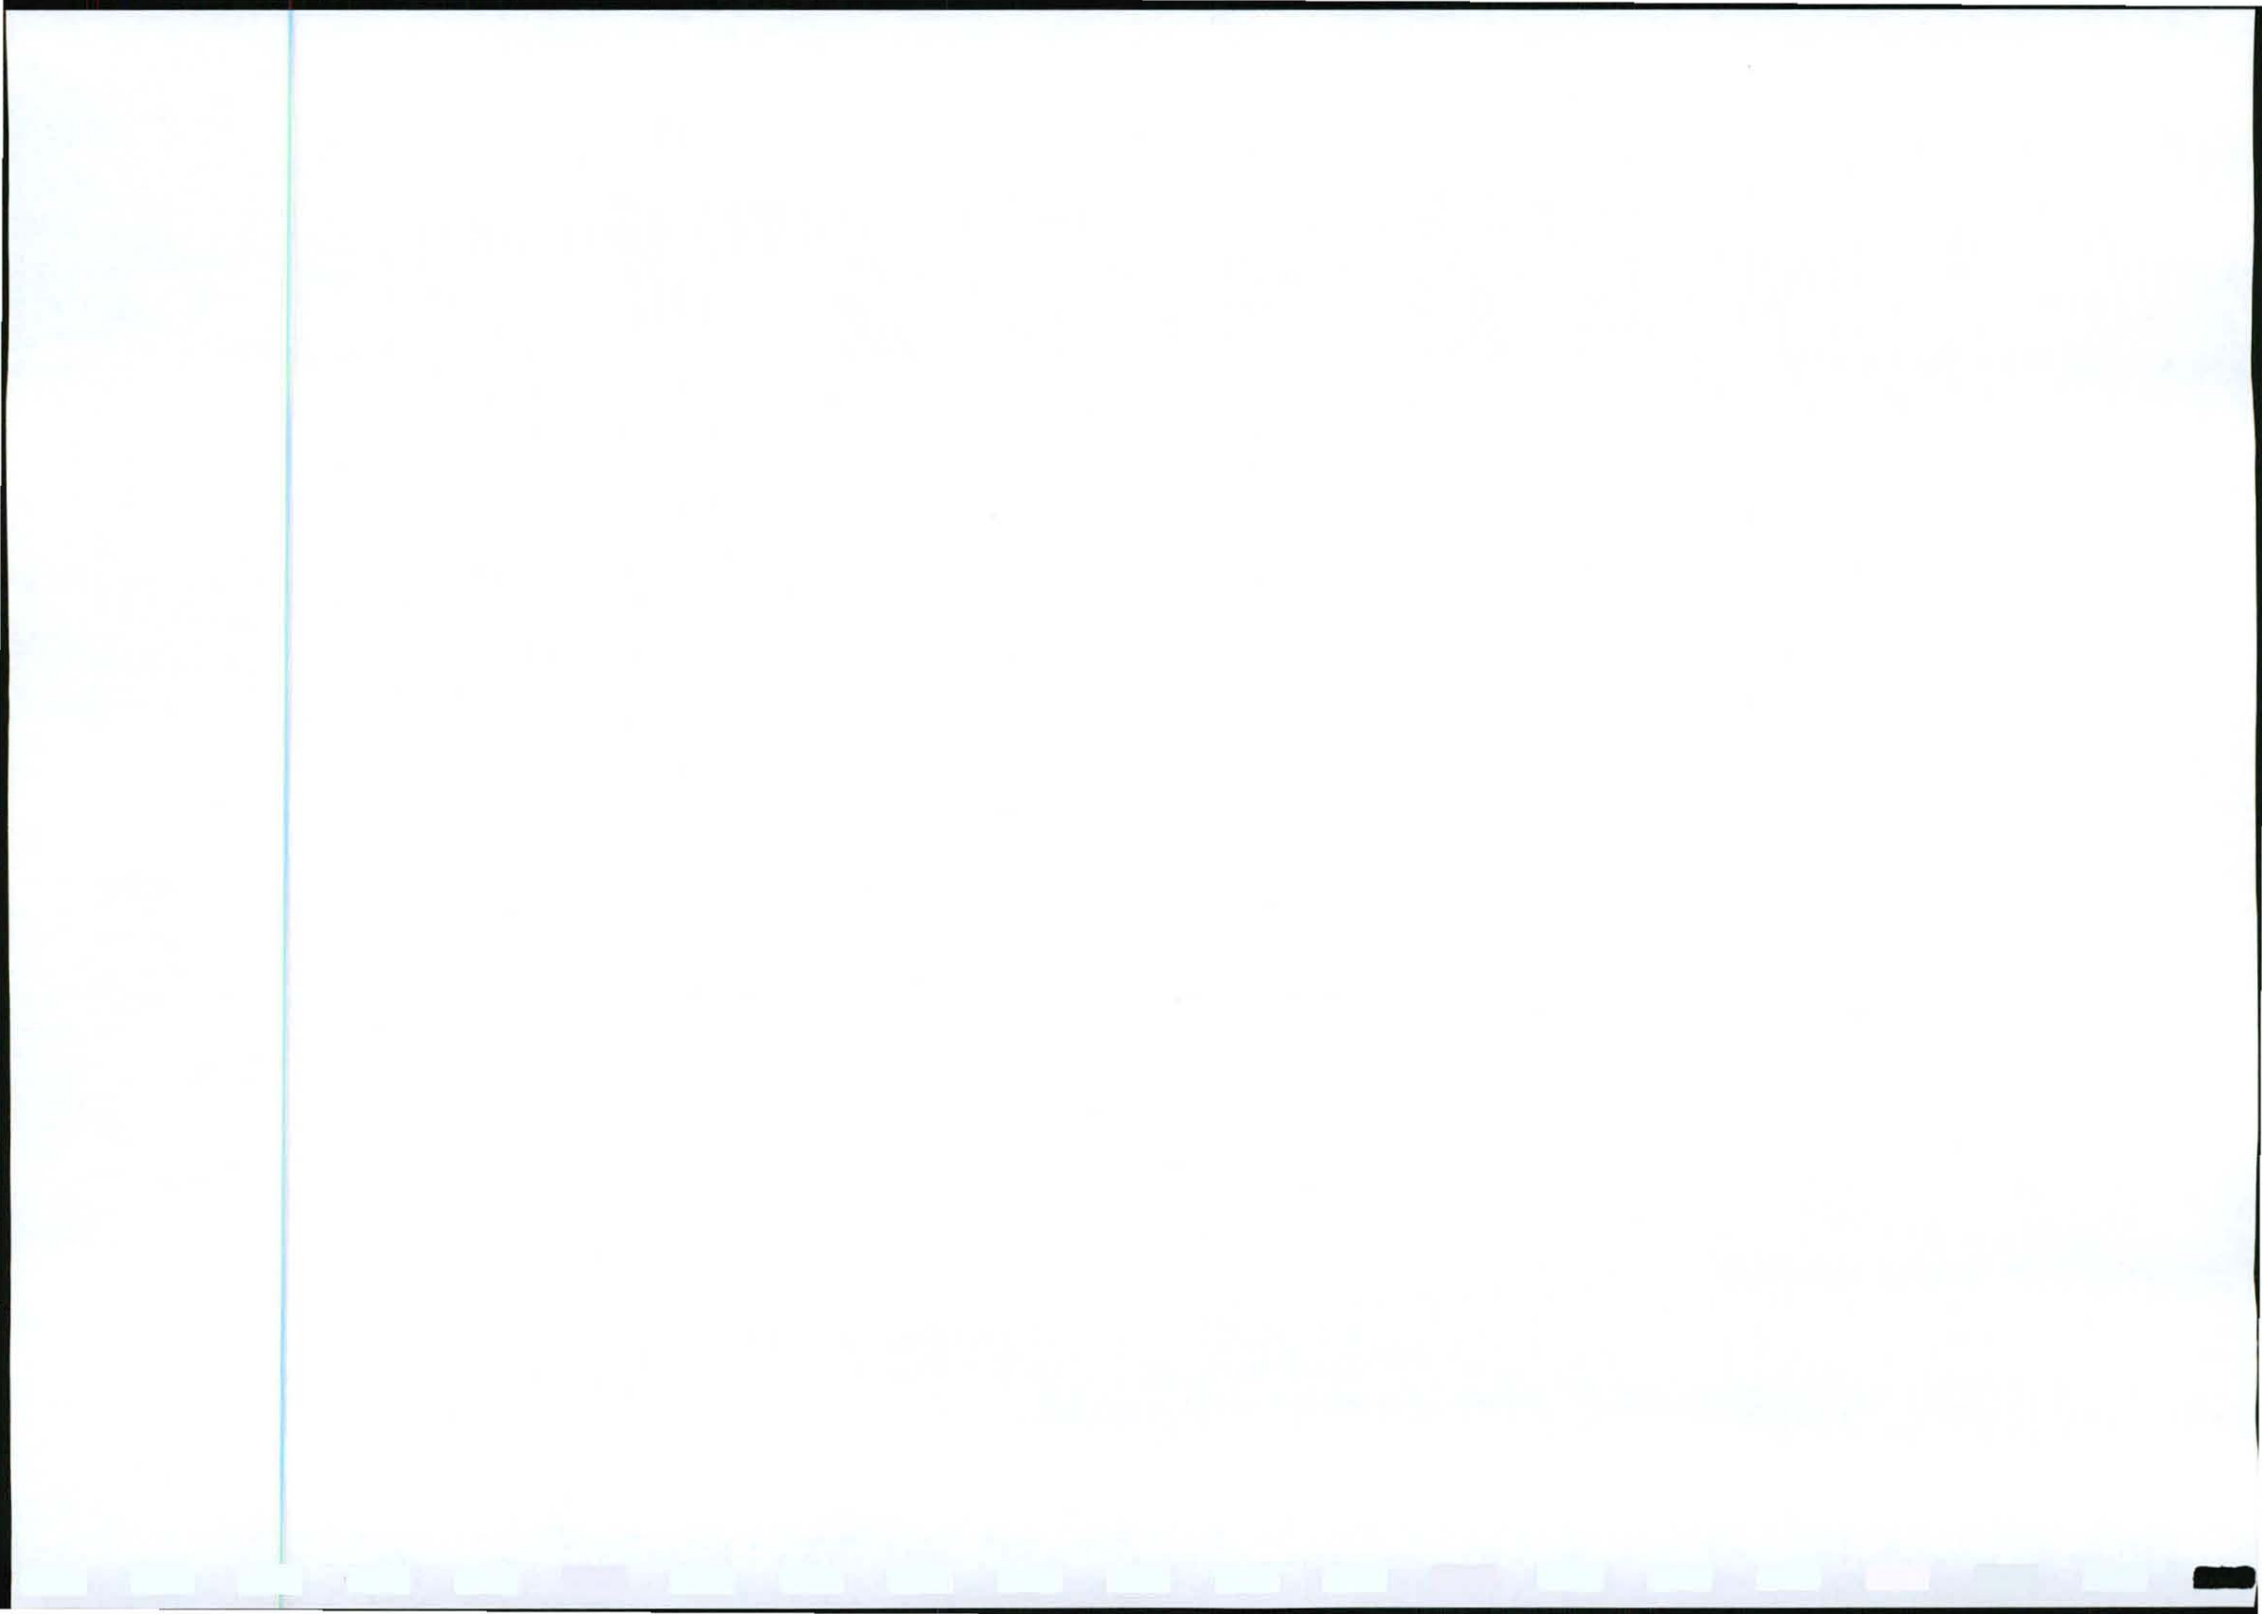

199	28° 1.285' E	24° 2.403' S
200	28° 1.428' E	24° 2.371' S
201	28° 1.572' E	24° 2.339' S
202	28° 1.715' E	24° 2.307' S
203	28° 1.858' E	24° 2.275' S
204	28° 2.001' E	24° 2.242' S
205	28° 2.144' E	24° 2.210' S
206	28° 2.288' E	24° 2.178' S
207	28° 2.431' E	24° 2.146' S
208	28° 2.574' E	24° 2.119' S
209	28° 2.716' E	24° 2.156' S
210	28° 2.857' E	24° 2.193' S
211	28° 2.999' E	24° 2.231' S
212	28° 3.141' E	24° 2.268' S
213	28° 3.282' E	24° 2.305' S
214	28° 3.424' E	24° 2.343' S
215	28° 3.566' E	24° 2.380' S
216	28° 3.702' E	24° 2.428' S
217	28° 3.819' E	24° 2.510' S
218	28° 3.937' E	24° 2.591' S
219	28° 4.054' E	24° 2.673' S
220	28° 4.172' E	24° 2.756' S
221	28° 4.289' E	24° 2.837' S
222	28° 4.403' E	24° 2.923' S
223	28° 4.507' E	24° 3.019' S
224	28° 4.611' E	24° 3.115' S
225	28° 4.717' E	24° 3.206' S
226	28° 4.864' E	24° 3.201' S
227	28° 5.012' E	24° 3.196' S
228	28° 5.159' E	24° 3.191' S
229	28° 5.306' E	24° 3.186' S
230	28° 5.451' E	24° 3.166' S
231	28° 5.593' E	24° 3.157' S
232	28° 5.736' E	24° 3.190' S
233	28° 5.872' E	24° 3.168' S
234	28° 6.011' E	24° 3.197' S
235	28° 6.152' E	24° 3.237' S
236	28° 6.285' E	24° 3.286' S
237	28° 6.372' E	24° 3.385' S
238	28° 6.509' E	24° 3.435' S
239	28° 6.632' E	24° 3.505' S
240	28° 6.734' E	24° 3.602' S
241	28° 6.837' E	24° 3.699' S
242	28° 6.939' E	24° 3.797' S
243	28° 7.066' E	24° 3.742' S
244	28° 7.195' E	24° 3.676' S
245	28° 7.324' E	24° 3.611' S
246	28° 7.452' E	24° 3.544' S
247	28° 7.581' E	24° 3.479' S
248	28° 7.710' E	24° 3.413' S
249	28° 7.839' E	24° 3.347' S
250	28° 7.970' E	24° 3.309' S
251	28° 8.110' E	24° 3.353' S
252	28° 8.249' E	24° 3.397' S
253	28° 8.389' E	24° 3.441' S
254	28° 8.528' E	24° 3.485' S
255	28° 8.668' E	24° 3.529' S
256	28° 8.808' E	24° 3.572' S
257	28° 8.947' E	24° 3.616' S
258	28° 9.087' E	24° 3.660' S
259	28° 9.230' E	24° 3.688' S
260	28° 9.376' E	24° 3.707' S
261	28° 9.522' E	24° 3.727' S

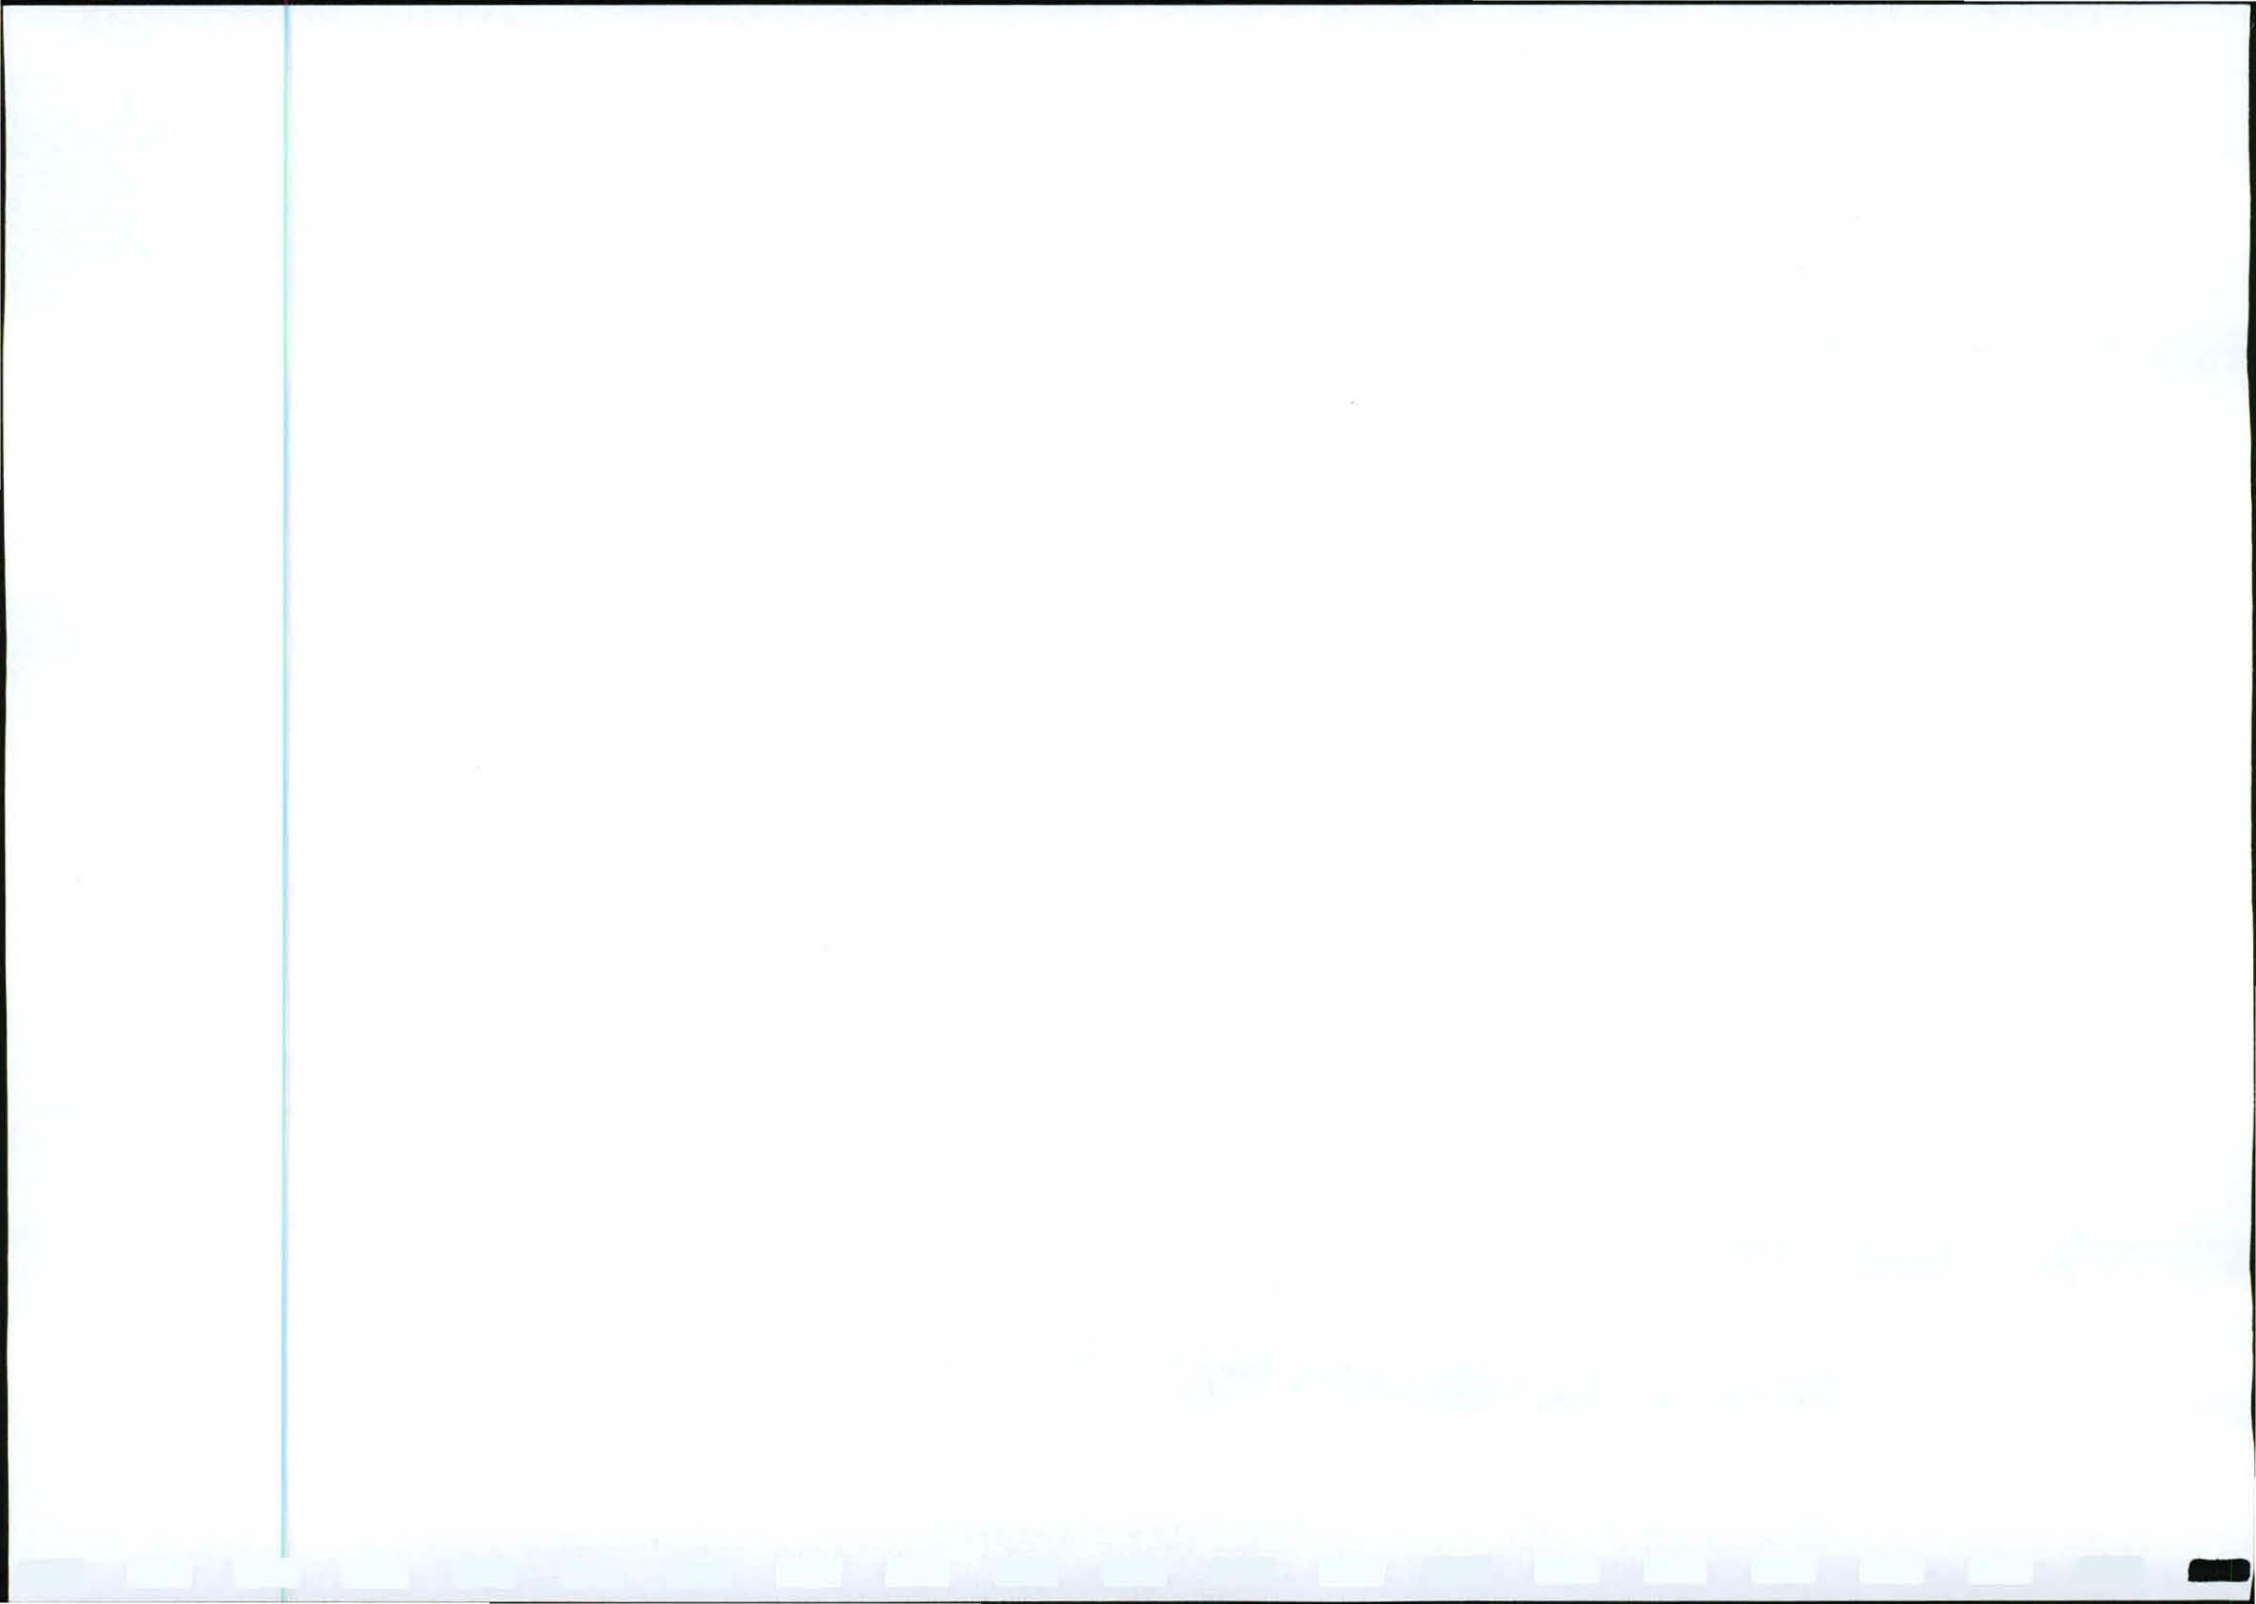

Dorset substation:

Longitude (Degrees Decimal Minutes)	Latitude (Degrees Decimal Minutes)
28° 9.633' E	24° 3.742' S

1.2 Legal Requirements

Application for authorisation, in terms of the National Environmental Management Act, 1998 (Act No. 107 of 1998), as amended and the Environmental Impact Assessment Regulations, 2010, is submitted to the National Department of Environmental Affairs (DEA). The Environmental Impact Assessment Regulations were published on 18 June 2010 in Government Notice No. R.543 and relevant to this project are the activities which are listed in Listing Notices 1 and 3 that require a Basic Assessment (BA) to be conducted.

Relevant to this project is the following listed activities:

Relevant notice:	Activity No	Description of each listed activity as per project description:
R 544 of 18 June 2010	10	The construction of facilities or infrastructure for the distribution of electricity outside urban areas with a capacity of 132kV.
GNR 546 of 18 June 2010	4	The construction of an access and construction road wider than 4 meters (ii) outside urban areas, in (gg) areas within 10 km from national parks or world heritage sites or 5 km from any other protected area identified in terms of NEMPAA or from the core areas of a biosphere reserve.
GNR 546 of 18 June 2010	14	The clearance of an area of 5 hectare or more of vegetation where 75% or more of the vegetative cover constitutes indigenous vegetation. (activity to be confirmed)

The applicant is Eskom Distribution Northern Region, Land Development with contact person Ms. Nkateko Msimango, Environmental Management in Polokwane.

2. OBJECTIVES OF THE EMPRr


The Environmental Management Programme has the following objectives:

- To state the standards and guidelines which Eskom will be required to adhere to in terms of environmental legislation;
- To set out the mitigation measures and environmental specifications which Eskom will be required to implement for the construction phase of the project in order to minimize the extent of environmental impacts, and where possible to improve the condition of the environment;
- To provide guidance regarding the method statements which Eskom will be required to compile and implement to achieve the environmental specification;
- To define corrective actions which Eskom must take in the event of non-compliance with the specifications of this EMPRr;
- To mitigate potential negative impact associated with the project and ensure optimising of positive impact;
- To prevent long-term or permanent environmental degradation;
- To ensure that the Applicant, construction workers and the operational and maintenance staff are well acquainted with their responsibilities in terms of the environment;
- To ensure that communication channels to report on environment related issues are in place.

3. DETAILS OF THE PERSON WHO PREPARED THE EMPRr

This Environmental Management Programme was prepared by Texture Environmental Consultants. Ria Pretorius is the principal member of Texture. Texture has significant experience and is well equipped and qualified to undertake Environmental Impact Assessments and inclusive thereof Environmental Management Programmes.

Texture has access to a variety of skills through association with specialists in their different fields of expertise. These specialist fields include the following: ecologists; archaeologists; architects & historical architects; agricultural specialists; geotechnical engineers; geohydrologists; civil and electrical engineers and social consultants as well as landscapers and contractors. Texture has a broad client base, developed over years of professional services supplied, from both private and government sectors. A company profile is available on request.

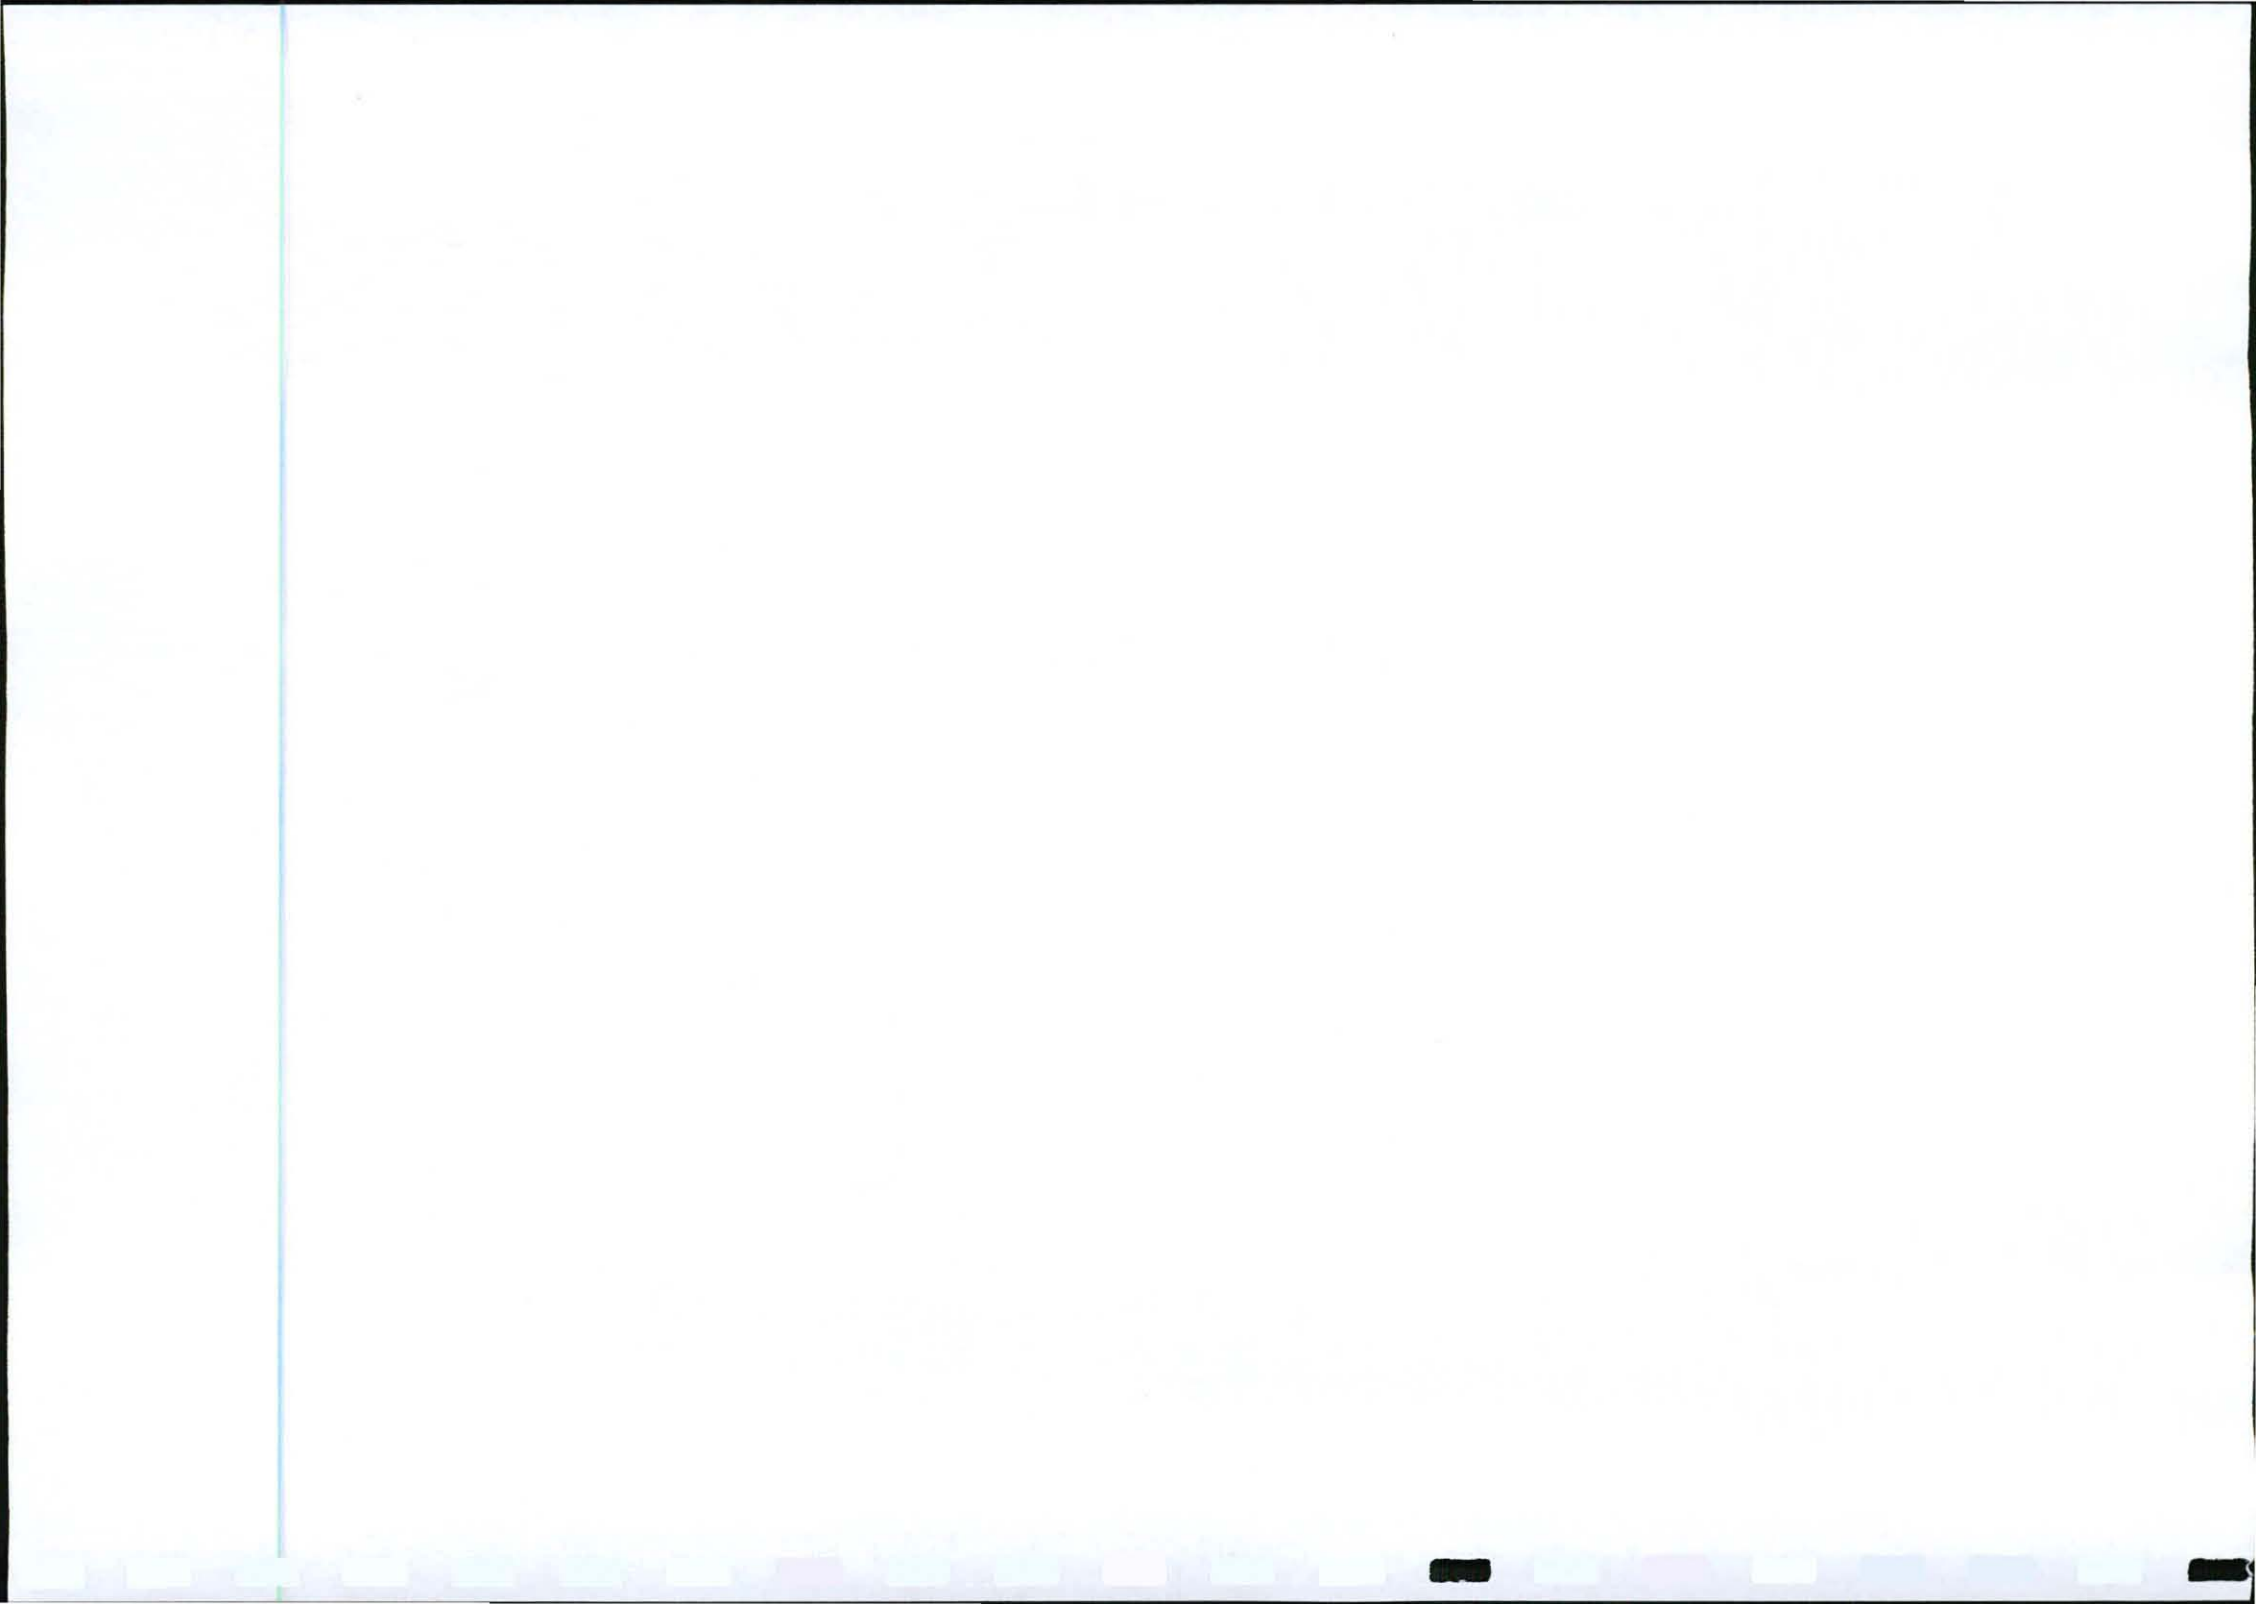

4. DETAILS OF PERSONS RESPONSIBLE FOR IMPLEMENTATION OF THE EMPr

The following undertaking must be filled out and signed by the applicant and forwarded to DEA prior to commencement of construction:

AGREEMENT & UNDERTAKING OF THE APPLICANT

I hereby confirm and state that I am aware of the contents of the Environmental Management Programme and the conditions of the Environmental Authorisation (EA) and shall comply with all legislation pertaining to the nature of the work to be done and all things accidental thereto.

Signed on behalf of _____

Date : _____

Place : _____

Signature : _____

Full Name : _____

Postal Address : _____

Physical Address : _____

Office Telephone Number : _____

AGREEMENT & UNDERTAKING OF THE ECO

The following details of the ECO must be filled out, signed and forwarded to DEA prior to construction:

Company Name : _____

Contact Person(s) : _____


Physical Address : _____

Street Address : _____

Office Telephone Number : _____

Cellular phone Number : _____

Fax Number : _____

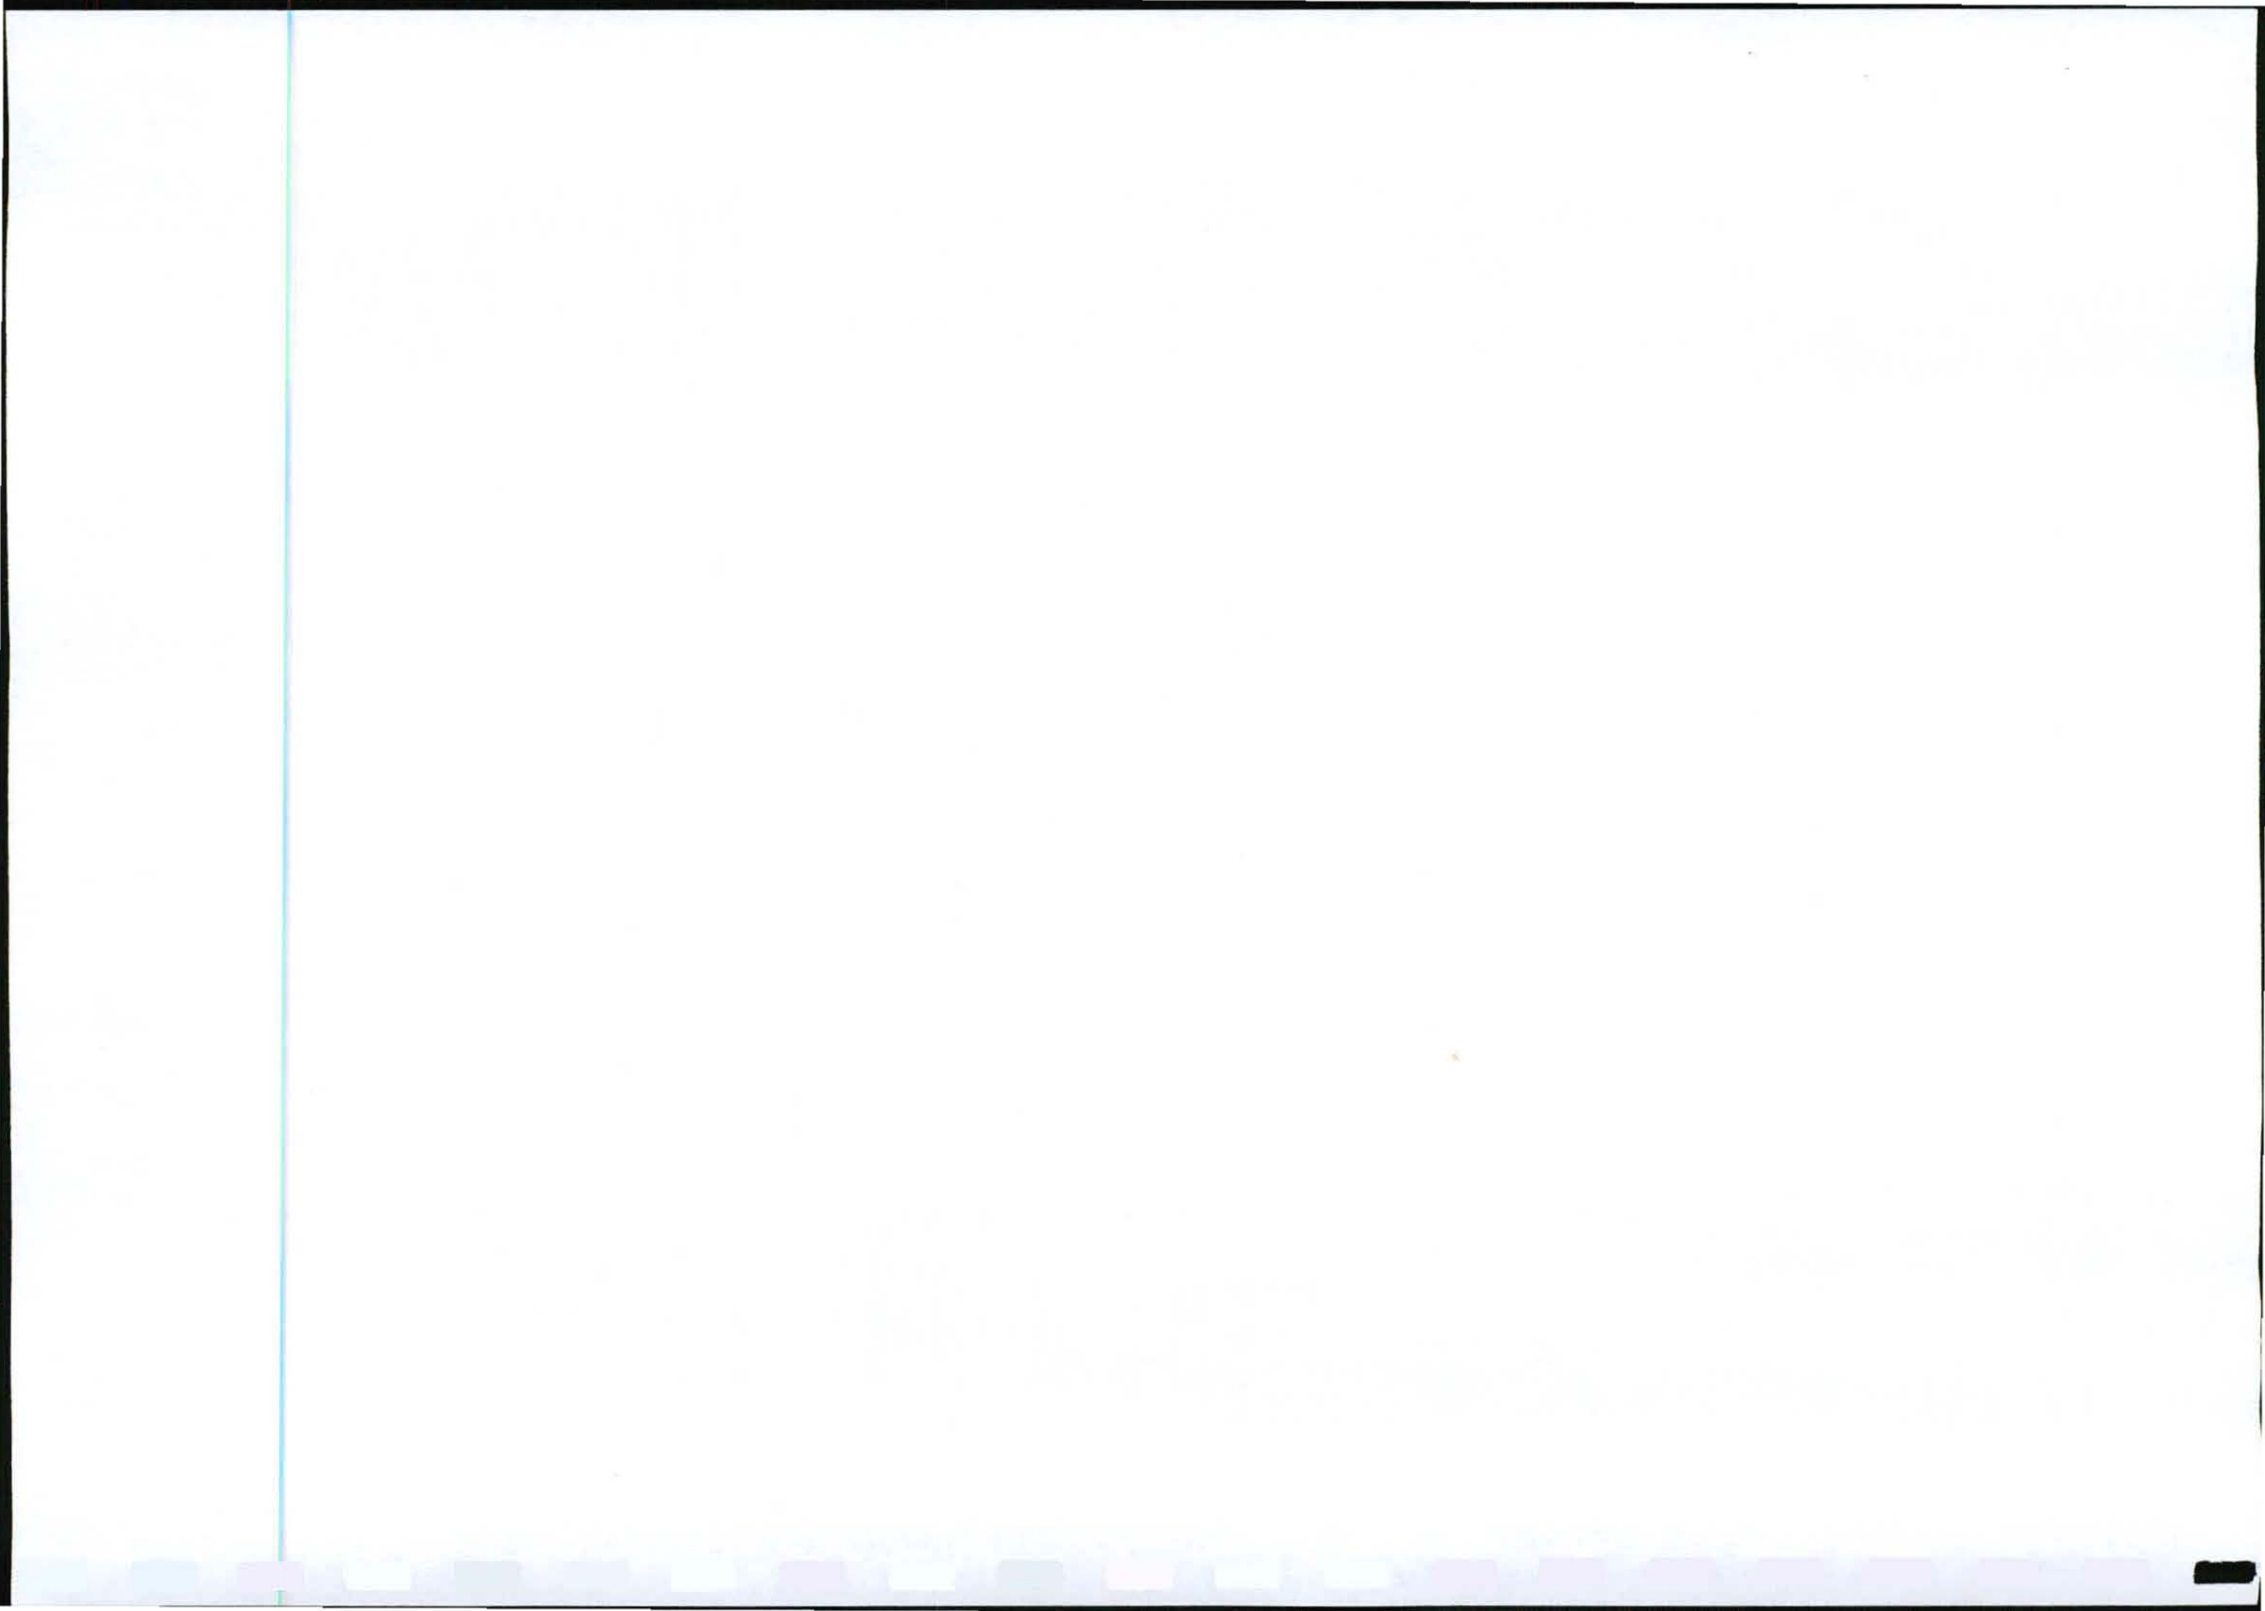

5. PROPOSED MECHANISM FOR COMPLIANCE

Key impacts generally associated with Eskom construction activities, as confirmed during the course of the Environmental Impact Assessment process are:

- Risk of erosion
- Impact on natural habitat
- Risk of surface and groundwater pollution
- Visual Impact
- Impact on safety and security
- Impact on agriculture
- Impact on birds
- Social impact
- Impact of influx of labourers to the area
- Impact of solid waste
- Impact on cultural heritage resources
- Introduction of alien vegetation

Specifications and conditions are hereby provided to limit and/or prevent impact on these components during all the phases of project development, namely

- Specifications applicable to all Phases of Project Development
- Design & Pre-construction Phase
- Construction Phase
- Post-construction & Operational Phase

6. SPECIFICATIONS APPLICABLE TO ALL PHASES OF PROJECT DEVELOPMENT

Roles and Responsibilities

Eskom

Eskom is the applicant for the project. Eskom will therefore, be the entity monitoring the implementation of the EMPRr. The Contractor who wins the tender for the construction, will, in terms of the tender documentation, be responsible to implement the proposed mitigation measures in this EMPRr on Eskom's behalf.


Eskom will:

- Be responsible for the overall implementation of the EMPRr in accordance with the requirements of the environmental authorization, issued by DEA.
- Ensure that all third parties who carry out all or part of Eskom's obligations under the Contract comply with the requirements of this EMPRr.

Environmental and Health Training and Awareness

Eskom will ensure that its employees are adequately trained with regard to the implementation of the EMPRr, as well as regarding environmental legal requirements and obligations. All employees should have an induction presentation on environmental awareness. Where possible the presentation will be conducted in the language of the employees. The environmental training should, as a minimum, include the following:

- The importance of conforming with all environmental policies, procedures, plans and systems;
- The significant environmental impacts, actual or potential, which could result from their work activities;
- The environmental benefits of improved personal performance;
- The roles and responsibilities in achieving conformance with the environmental policy and procedures, including emergency preparedness and response requirements;
- The potential consequences of departure from specified operating procedures;
- The mitigation measures to be implemented when carrying out their work activities;
- The importance of not littering;
- The need to use water sparingly;

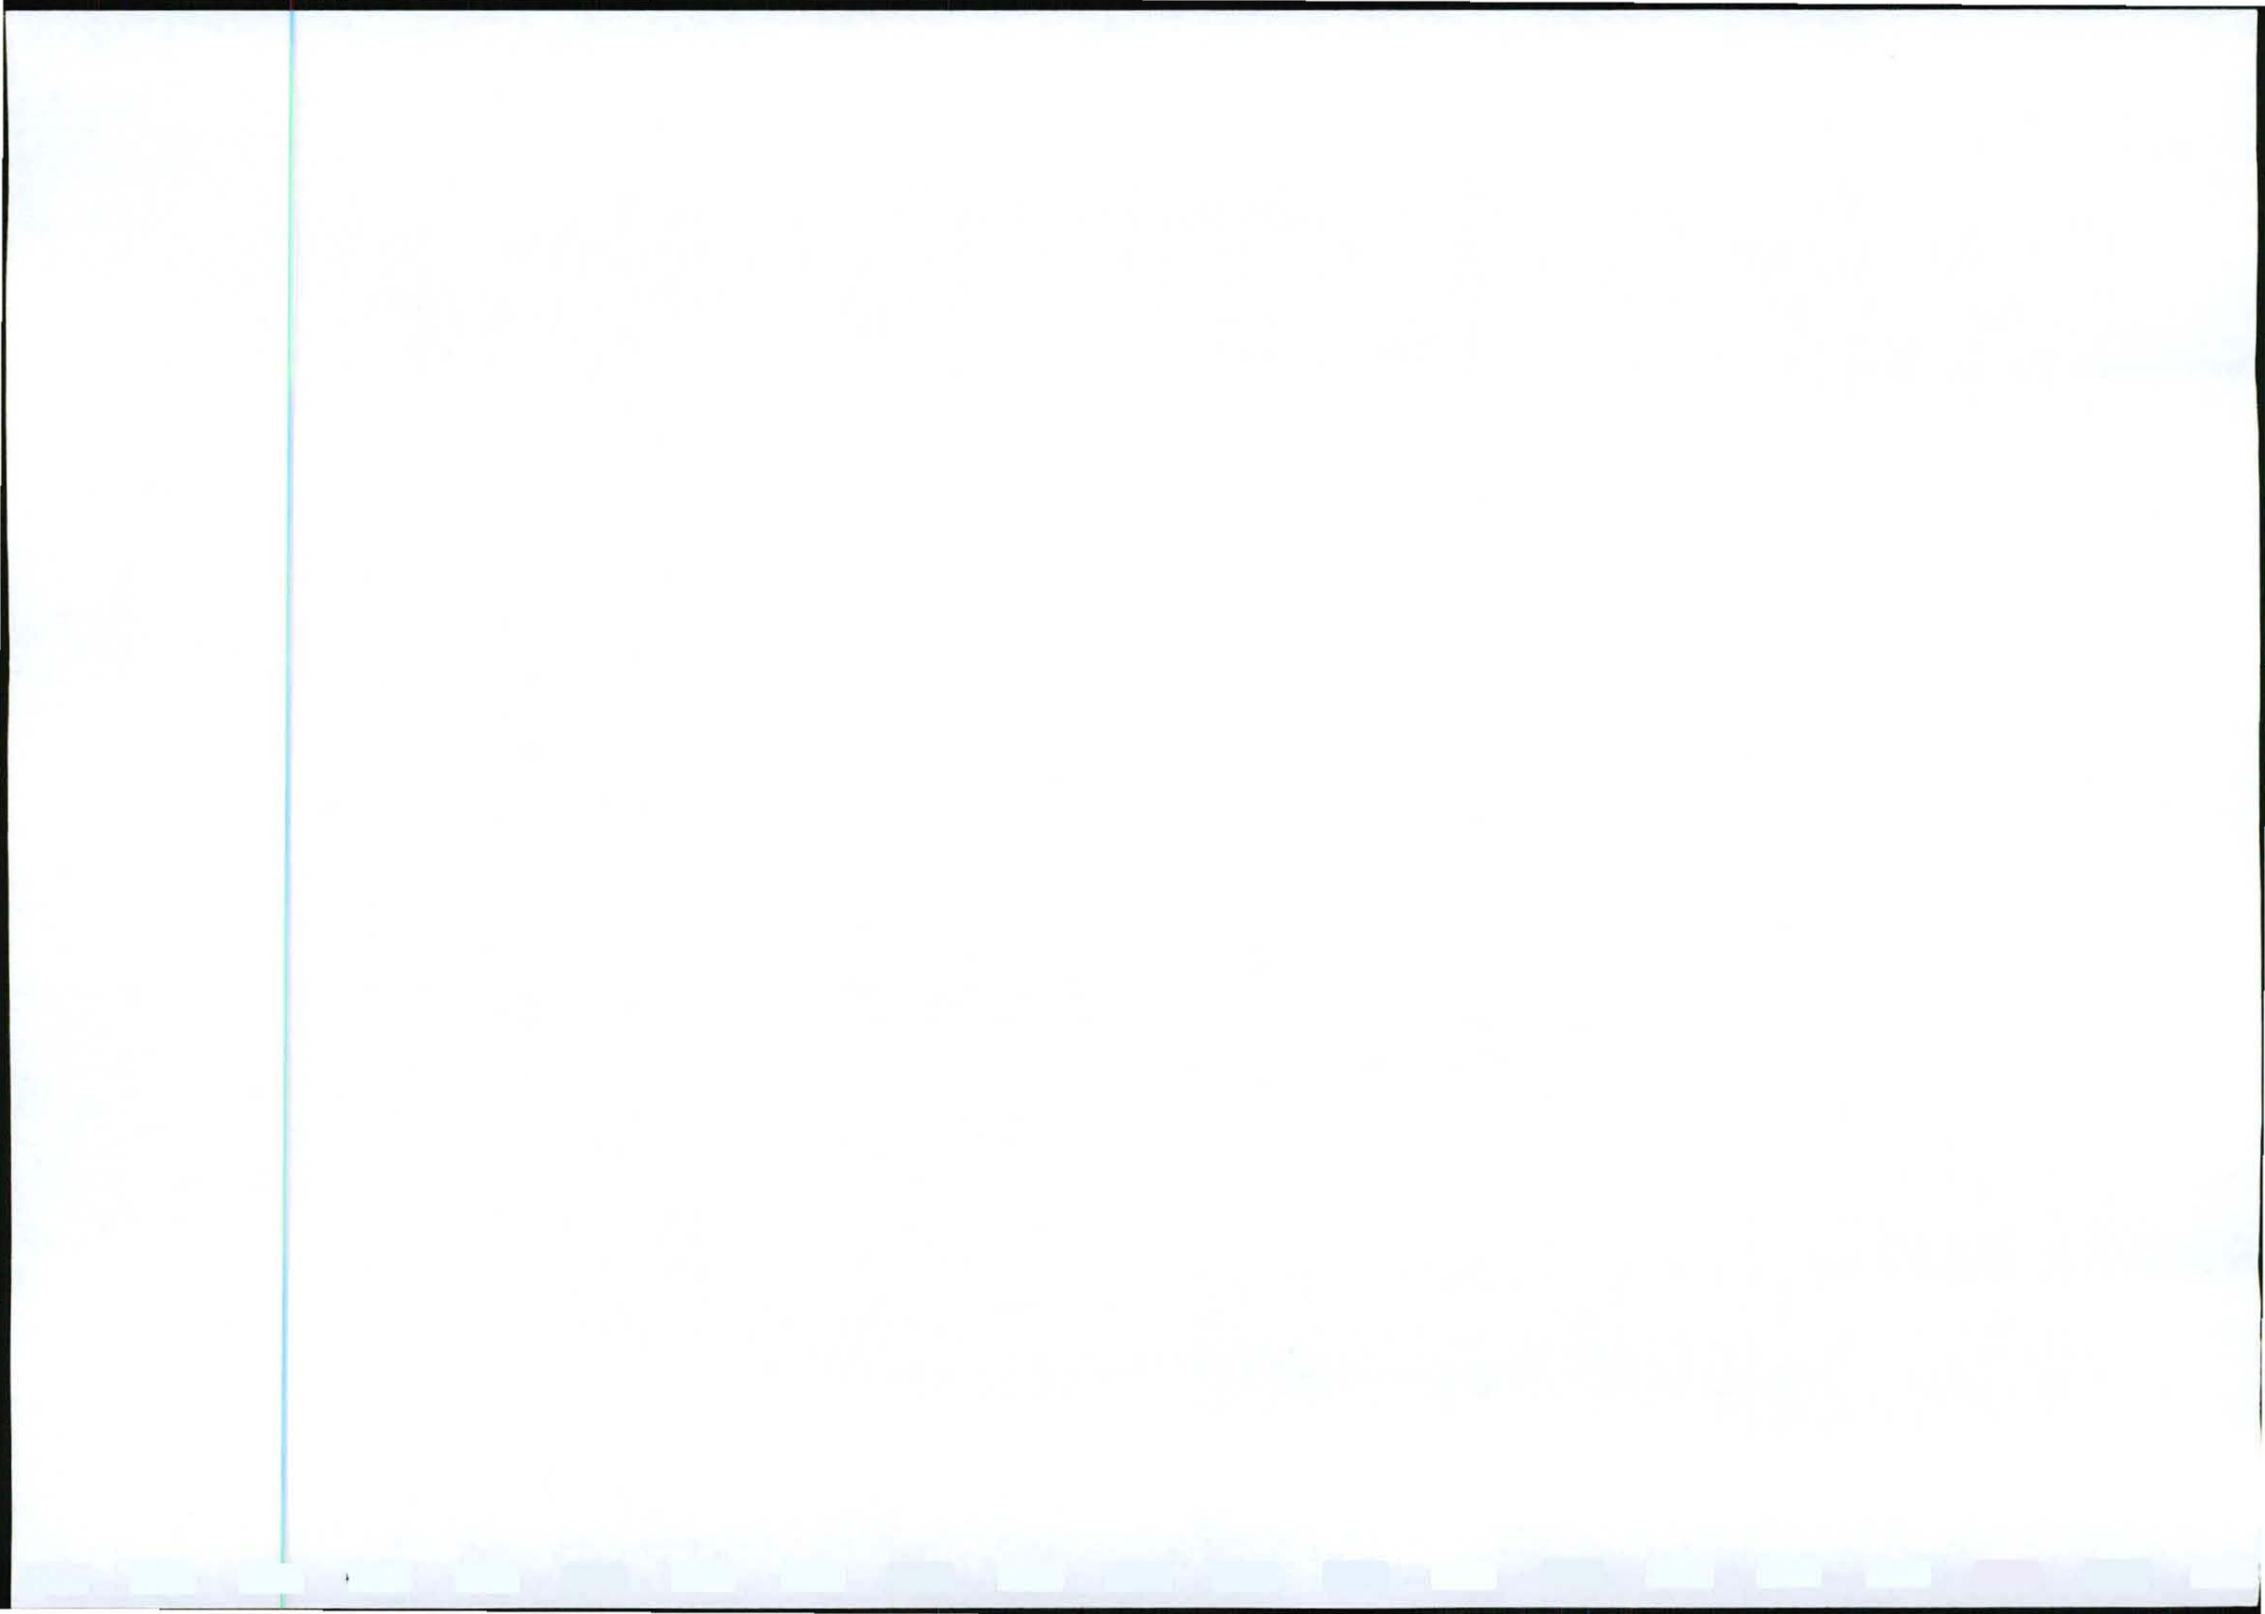

- Details of, and encouragement to, minimizing the production of waste and re-use, recover and recycle waste where possible;
- Details regarding archaeological and/or historical sites which may be unearthed during construction, and the procedures to be followed should these be encountered;
- The procedures which should be followed should a grave be encountered or unearthed during the construction phase;
- Details regarding flora and fauna of special concern, including protected/endangered plant and animal species, and the procedures to be followed should these be encountered during the construction phase.

Emergency Preparedness

Eskom's environmental emergency procedures ensure that there will be an appropriate response to unexpected or accidental actions or incidents that will cause environmental impacts, throughout the life cycle of the project. Such incidents may include, inter alia:


- Accidental discharges to water and land;
- Accidental exposure of employees to hazardous substances;
- Accidental veld fires;
- Accidental spillage of hazardous substances;
- Specific environmental and ecosystem effects from accidental releases or incidents.

The emergency preparedness plan

- Construction employees shall be adequately trained in terms of incidents and emergency situations.
- An emergency preparedness plan will include details of the organization (manpower) and responsibilities, accountability and liability of personnel.
- The emergency preparedness plan shall include a list of key personnel.
- Details of emergency services (e.g. the fire department, spill clean-up services, etc.) shall be listed.
- Internal and external communication plans, including prescribed reporting procedures shall be listed.
- Actions to be taken in the event of different types of emergencies shall be included.
- Information on hazardous materials, including the potential impact associated with each, and measure to be taken in the event of accidental release shall be listed.
- Training plans, testing exercises, and schedules for effectiveness shall be included.
- Eskom will comply with the emergency preparedness, and incident and accident-reporting requirements, as required by the Occupational Health and Safety Act, 1993 (Act No 85 of 1993), the National Environmental Management Act, 1998 (Act No 107 of 1998) as amended, the National Water Act, 1908 (Act No 36 of 1998) and the National Veld and Forest Fire Act, 1998 (Act No 101 of 1998) as amended, and/or any other relevant legislation.

Spillages

- Streams, rivers and dams will be protected from direct or indirect spillage of pollutants such as refuse, garbage, cement, concrete, sewage, chemicals, fuels, oils, aggregate, wash water, organic materials and bituminous products.
- In the event of a spillage during the construction phase, the responsibility for spill treatment will be with Eskom and Eskom will be liable to arrange for competent assistance to clear the affected area.
- Eskom will compile and maintain environmental emergency procedures, to ensure that there will be an appropriate rapid response to unexpected or accidental environmental related incidents throughout the life cycle of the project.
- The individual responsible for, or who discovers a hazardous waste spill must report the incident to the Engineer.
- The Engineer will assess the situation in consultation with the SECO and act as required in all cases, the immediate response will be to contain the spill. The exact treatment of pollutes soil/water will be determined by die Engineer in consultation with the SECO. Areas cleared of hazardous waste will be re-vegetated.
- Should water downstream of the spill be polluted, and fauna and flora show signs of deterioration or death, specialist hydrological or ecological advice must be sought for appropriate treatment and remedial procedures to be followed. The costs of containment and rehabilitation will be for Eskom's account, including the costs of specialist input.

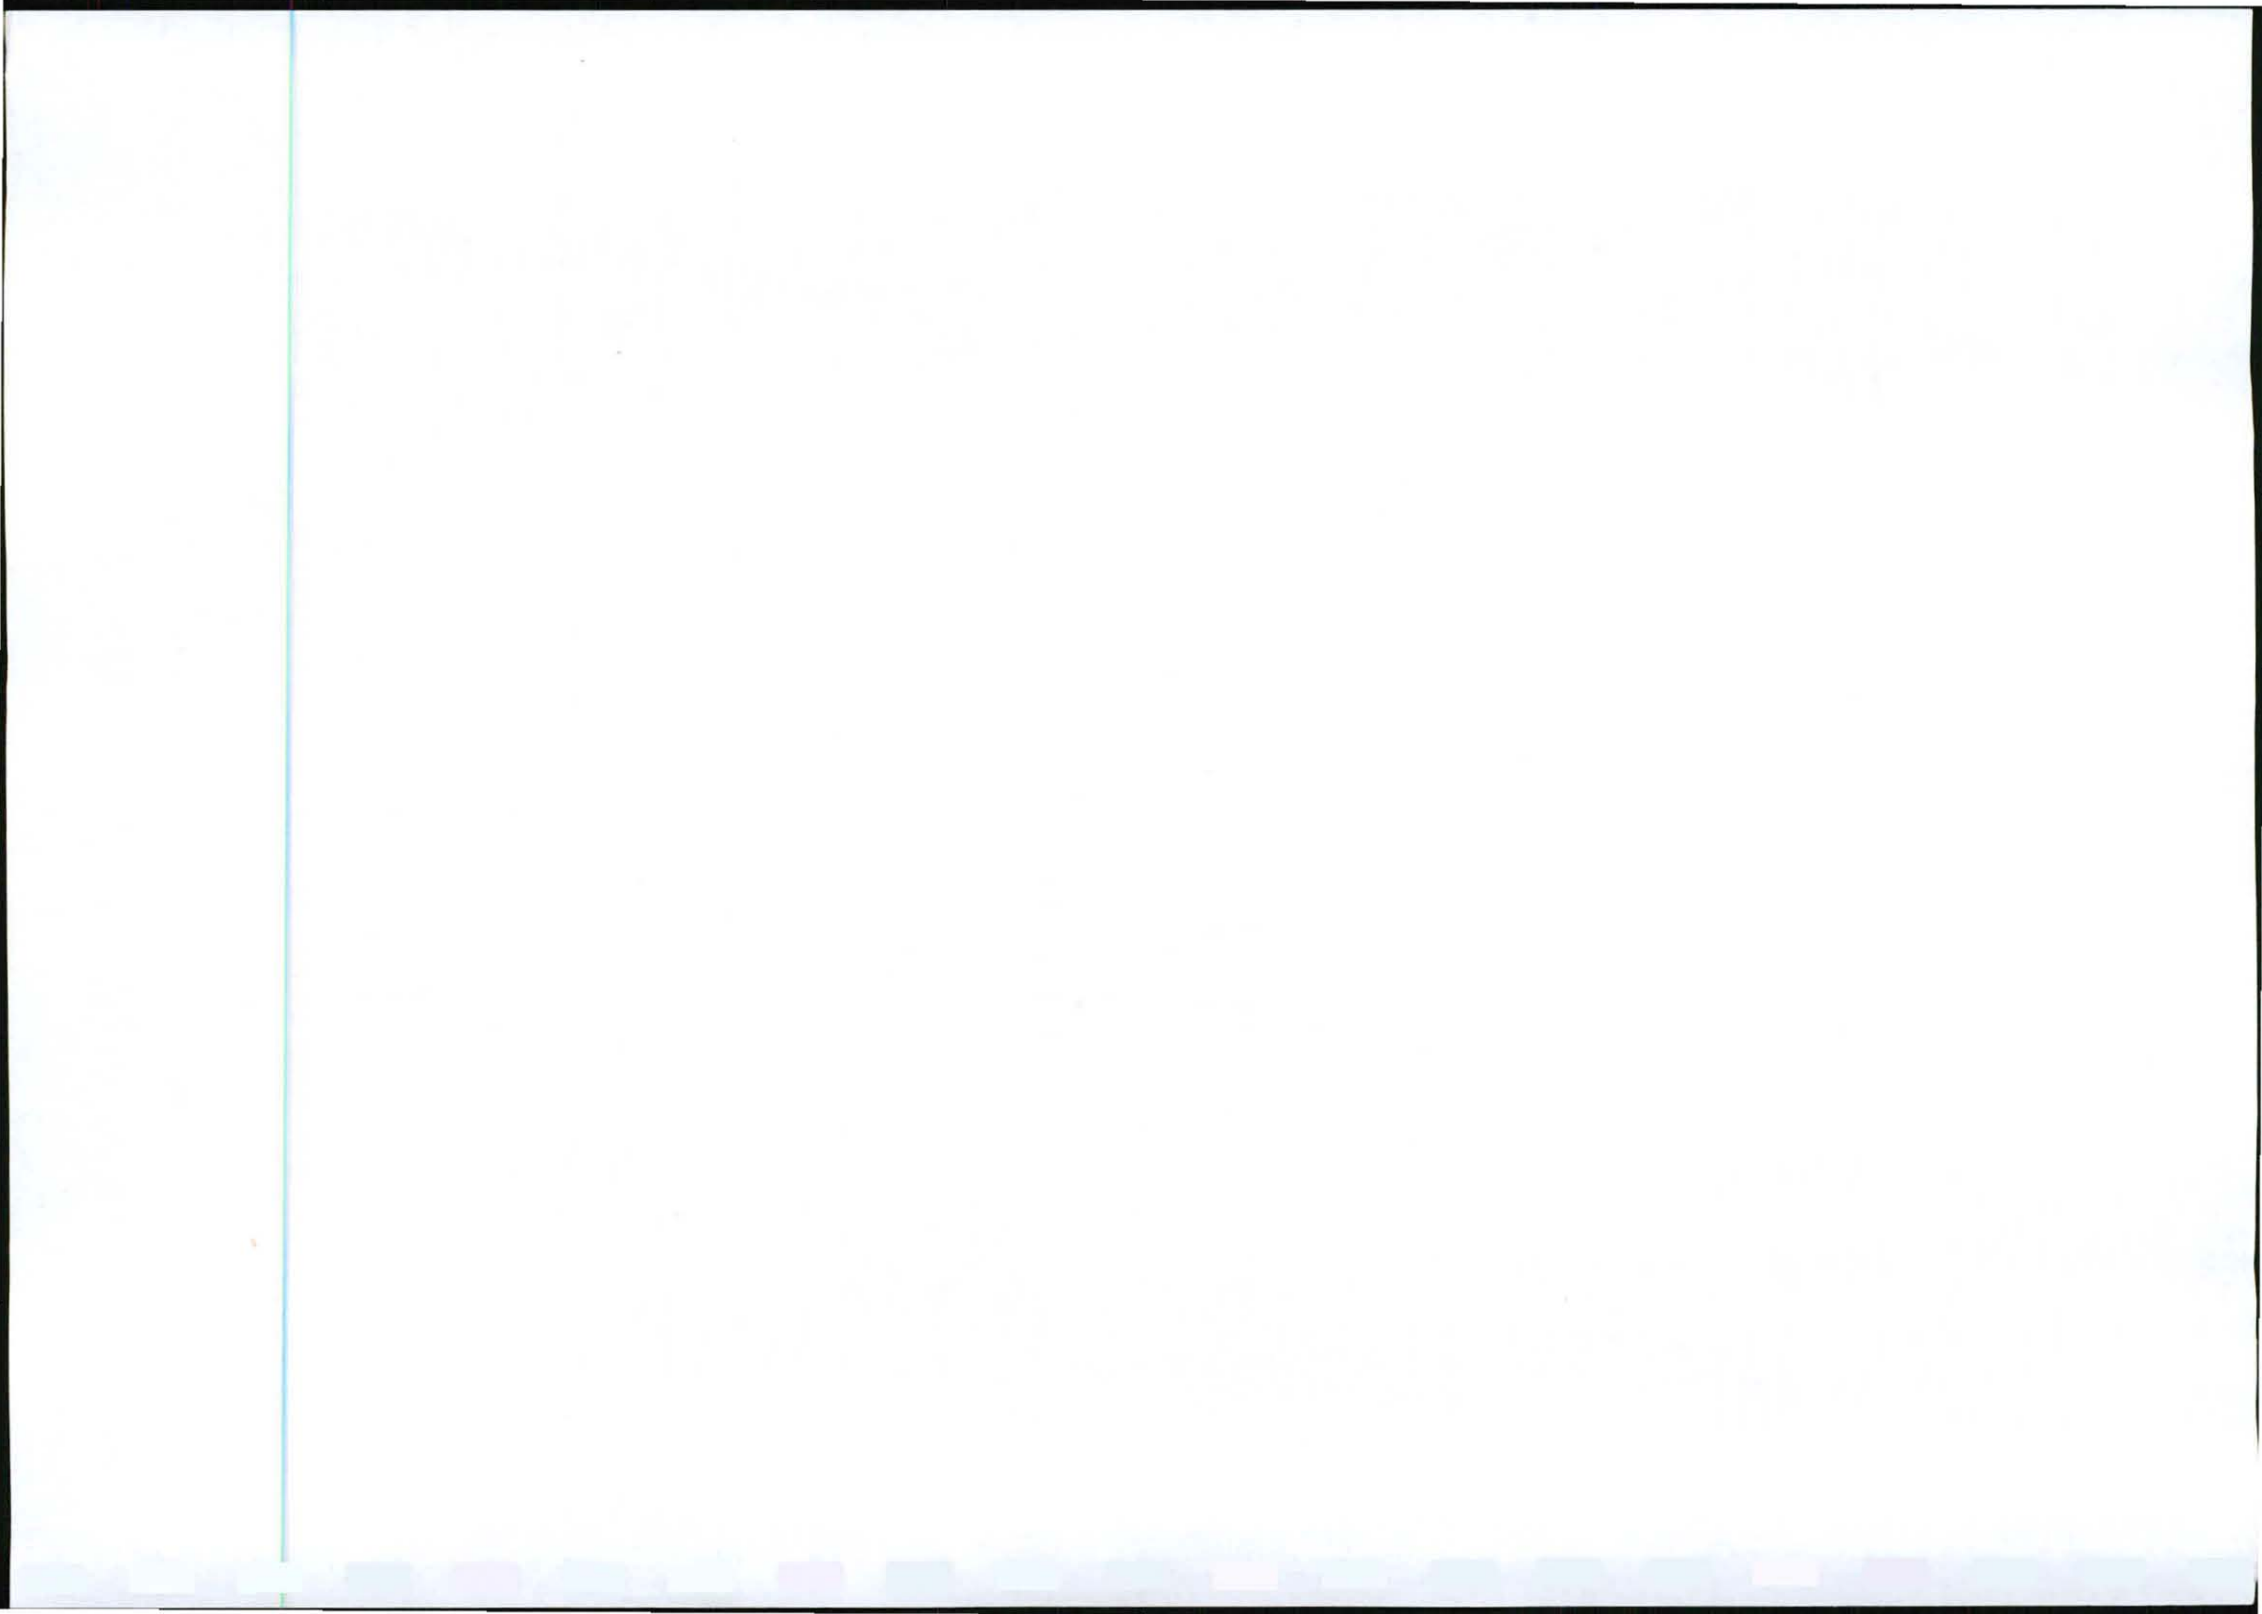

During an emergency situation, the following will apply

- No person shall be allowed to approach a spill unless he/she is equipped with the personal protective clothing.
- The risk involved shall be assessed before anyone approaches the scene of the incident with the emergency response plan.
- A written report shall be forwarded to the relevant environmental authority within 24 hours of the incident.
- Any known or discovered spillage of toxic substances into a stream or river should be followed by immediate monitoring of the receiving streams and rivers.

Fires

- The adjacent landowners will be informed and/or involved in case of any fire.
- It must be ensured that the basic fire fighting equipment is supplied to all living quarters, site offices, kitchen areas, workshop areas and stores.
- Welding gas cutting or cutting of metal will only be allowed inside the working/demarcated areas and with appropriate fire fighting equipment at hand.

Checking and Corrective Action

Non-compliance

Non-compliance with the specifications of the EMPRr constitutes a breach of Contract for which Eskom must be immediately notified accordingly. Eskom will be deemed not to have complied with the EMPRr if;

- There is evidence of contravention of the EMPRr specifications within the boundaries of the construction site, site extensions and access roads;
- There is contravention of the EMPRr specifications which relate to activities outside the boundaries of the construction sites;
- Environmental damage ensues due to negligence;
- Construction activities take place outside the defined boundaries of the site;
- Eskom fails to comply with corrective or other instruction.
- Non-compliance will be dealt with in terms of the contract documentations signed by the various parties.

Monitoring

Monitoring will be undertaken as and when required. Any incidents that might have a detrimental impact on the environment will be investigated and the environmental monitoring will be conducted. Complaints received will be checked through verifiable monitoring.

Inspections

Ongoing visual inspections will be conducted daily by the SECO. The SECO will spend time on site on the lookout for any unsafe acts and activities that transgress the requirements as specified in the EMPRr to define what action shall be taken to rectify the problem and prevent its reoccurrence.

Incident Reporting and Remedy

If a leakage or spillage of hazardous substances occurs as a result of activities of Eskom or other users, the local emergency services will be immediately notified of the incident. The following information must be provided:


- The location;
- The nature of the load;
- The status of the site of the accident itself (i.e., whether further leakage is still taking place, whether the vehicle or the load is on fire, etc.).

Written records of the corrective and remedial measures decided upon, and the progress achieved therewith over time, must be kept. Such progress reporting will be important for monitoring and auditing purposes. The written reports may be used for training purposes in an effort to prevent similar future occurrences.

Written instructions

Written reporting will be given following an audit. The written instructions will indicate the source or sources of the problems identified on site and propose solutions to those problems. The implementation to solutions will be assessed in a follow-up audit and further written instructions issued if required.

Maximum allowable response time: 4 working days.

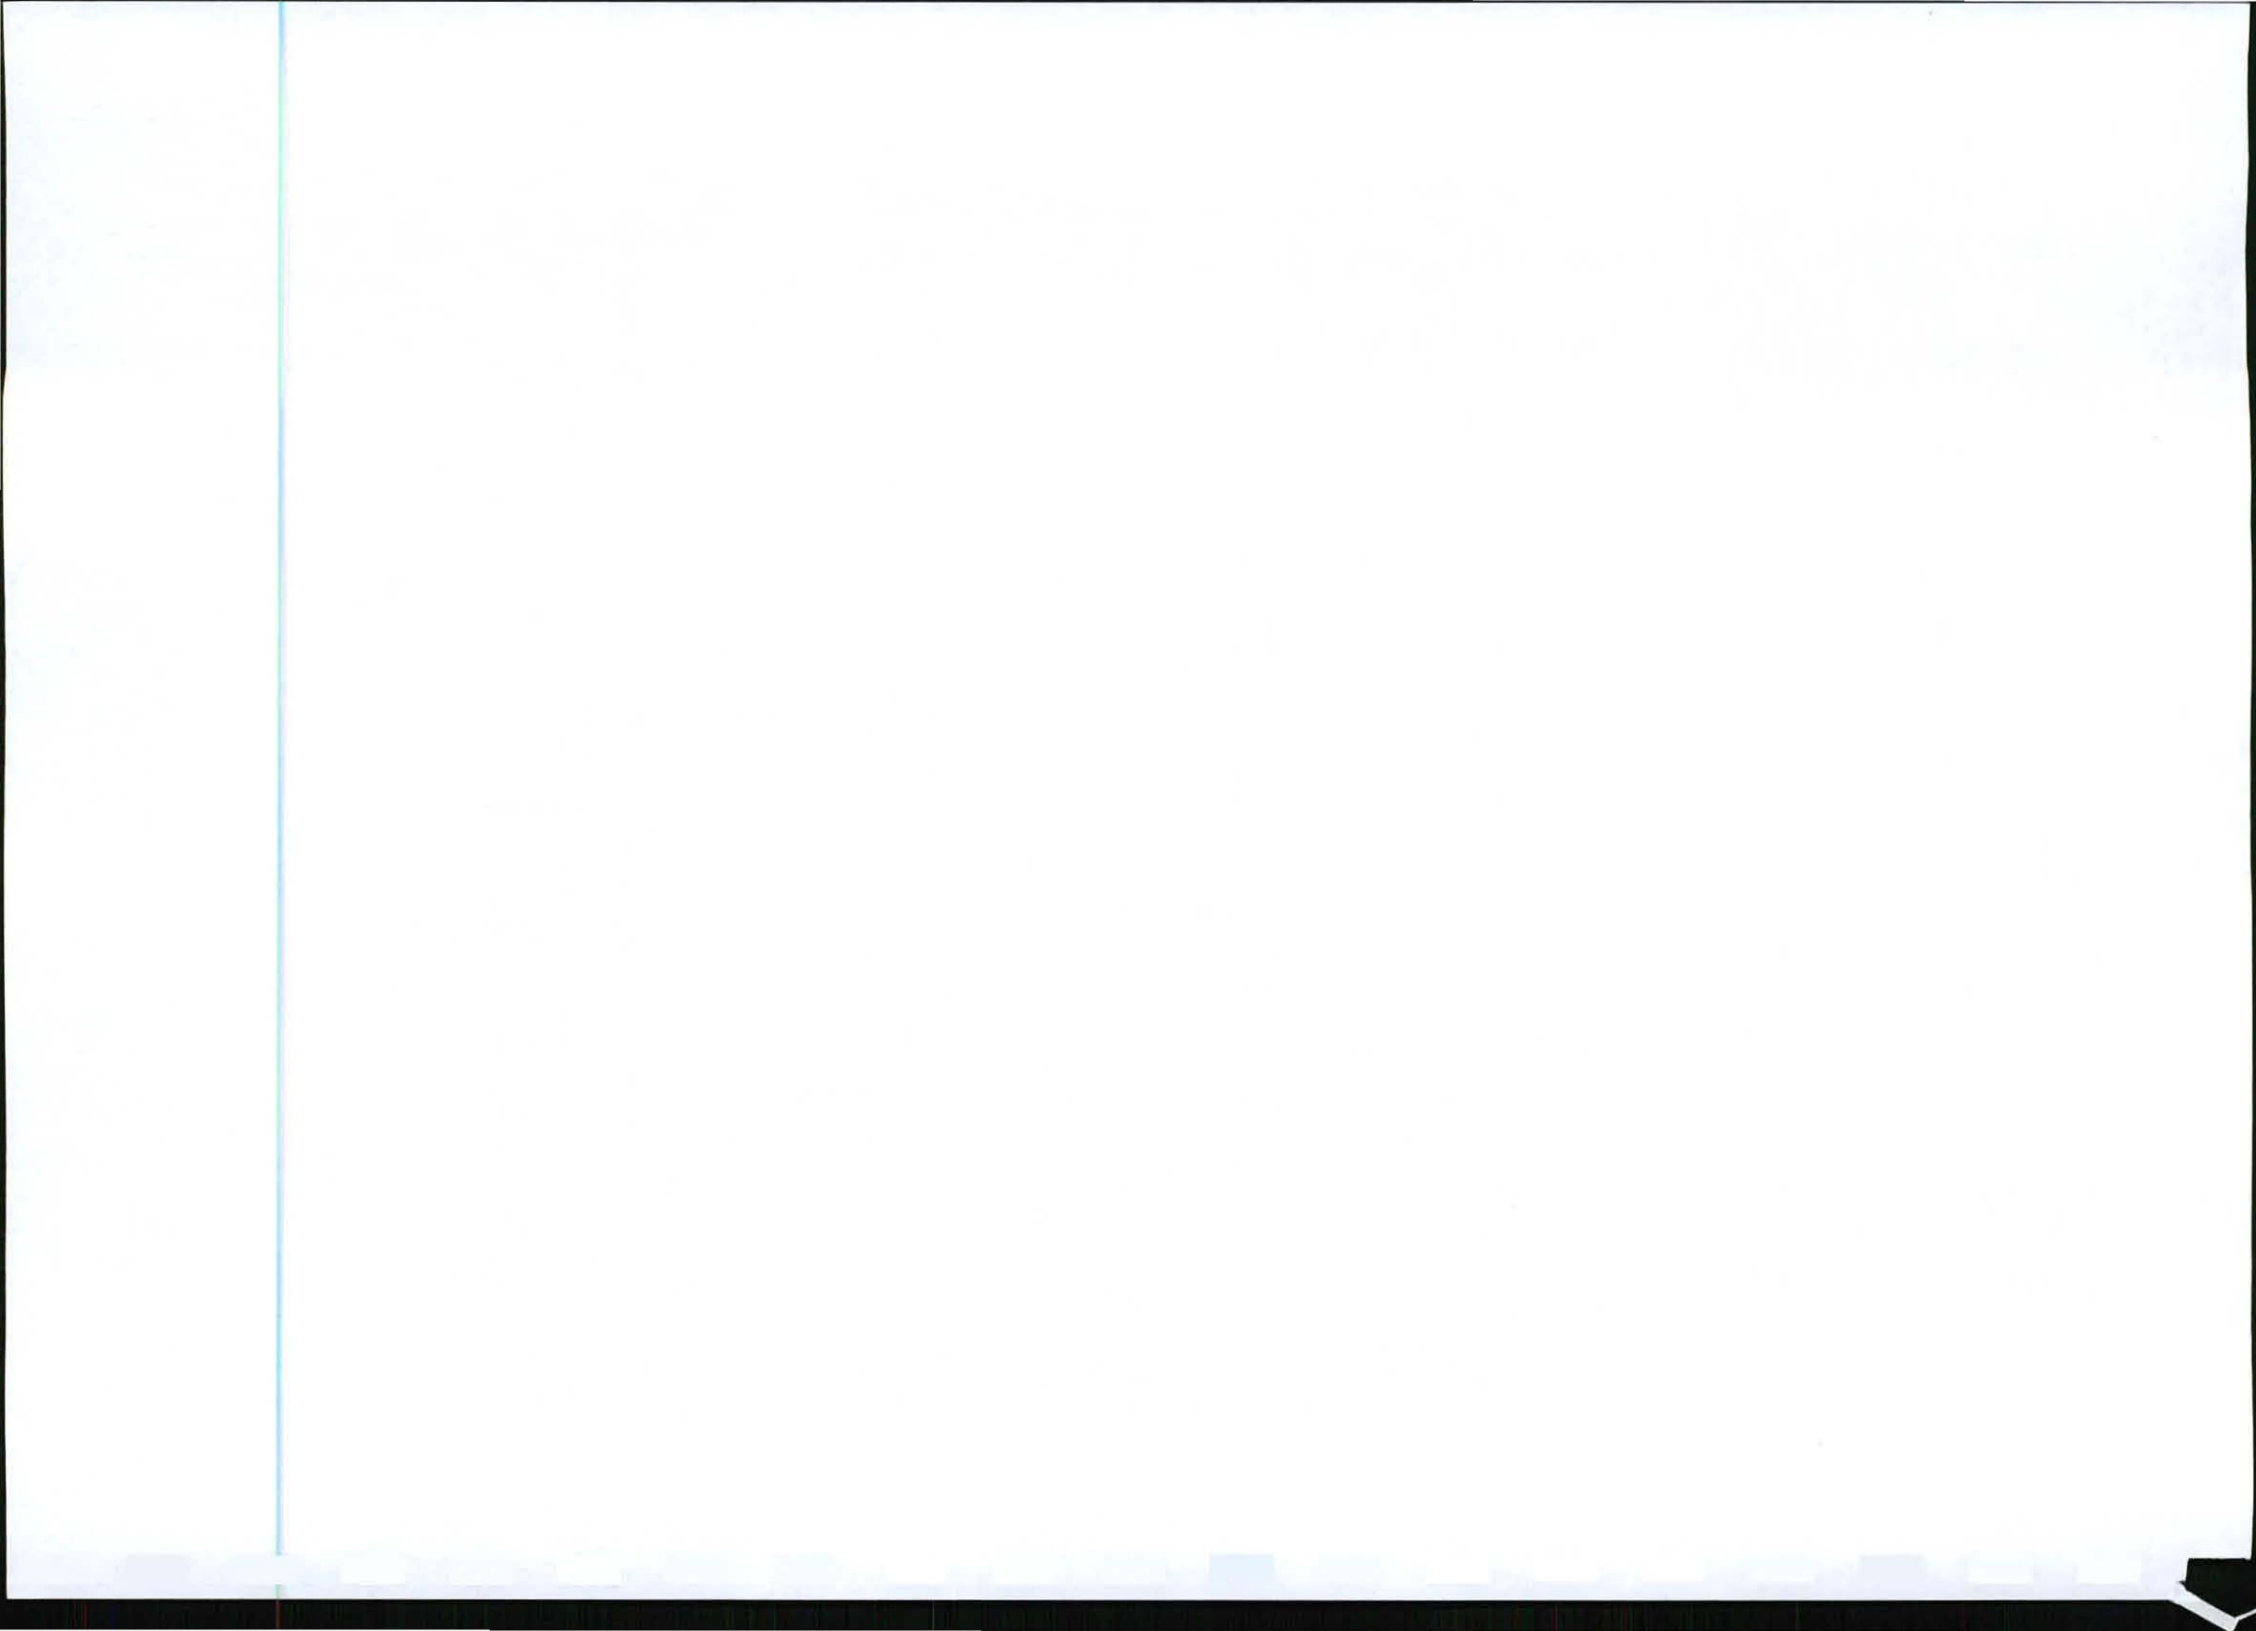

Liaison

Eskom will comply with the requirements for public consultation as required by the EIA Regulations 2010, promulgated in terms of the National Environmental Management Act, 1998 (Act No 107 of 1998).

Throughout the project, ongoing liaison will be maintained with authorities and communities alike to ensure that the following is effected;

- Timeous advanced warning of any project activities that may have some impact on the surrounding communities i.e. blasting.
- Ongoing feedback on the environmental performance of the project.
- A complaints register needs to be opened and maintained by the SECO. The register will contain the contact details of the complainant and information regarding the complaint itself, including the date of submission.

SITE ENVIRONMENTAL CONTROL OFFICER


Eskom will nominate a knowledgeable member of staff on site who will be responsible for the implementation of the Environmental Management Programme as well as the arrangement and maintenance of all traffic accommodation measures required for the duration of the contract. The SECO will oversee the construction phases of the project and will ensure that all environmental specifications and EMPRr requirements are met at all times. The SECO will report to the Engineer in an advising capacity.

The SECO will be responsible for monitoring, reviewing and verifying Eskom's compliance with the EMPRr. The SECO's duties in this regard will include, inter alia, the following:

- Ensuring that all the environmental authorizations and permits required in terms of the applicable legislation have been obtained prior to construction commencing;
- Monitoring and verifying that the EMPRr and environmental authorization are adhered to at all times and taking action if specifications are not followed;
- Monitoring and verifying that environmental impacts are kept to a minimum;
- Assisting Eskom in finding environmentally responsible solutions to problems;
- Keeping accurate and detailed records of all activities on site;
- Inspecting the site and surrounding areas on a regular basis with regard to compliance with the EMPRr and environmental authorization;
- Monitoring Eskom's undertaking to provide environmental awareness training for all new personnel on site.

ENVIRONMENTAL CONTROL OFFICER

- An Environmental Control Officer (ECO) must be appointed by Eskom prior to commencement of construction and DEA must be notified of such an appointment.
- The key responsibility of the ECO is to ensure that all the conditions stipulated in the Record of Decision/ Environmental Authorisation (EA) are being adhered to and should monitor project compliance with the conditions of the environmental authorisation, environmental legislation and the recommendations of the revised EMPRr.
- The ECO must liaise with the SECO and/or attend site meetings where applicable and where necessary inspect the construction site on a regular basis to ensure that the mitigation and rehabilitation measures are applied.
- The ECO might make reasonable amendments to the EMPRr in co-operation with the contractor and the SECO. Penalties for non-compliance must be enforced.
- The ECO will remain employed until all rehabilitation measures, as required for implementation due to construction damage, are completed and the site is handed over to Eskom by the contractor for the operation.
- Any conservation authority/institution as listed in the List of Interested and Affected Parties for the project should be allowed reasonable access to the construction site on request and arrangement with the ECO, the SECO and the Contractor.

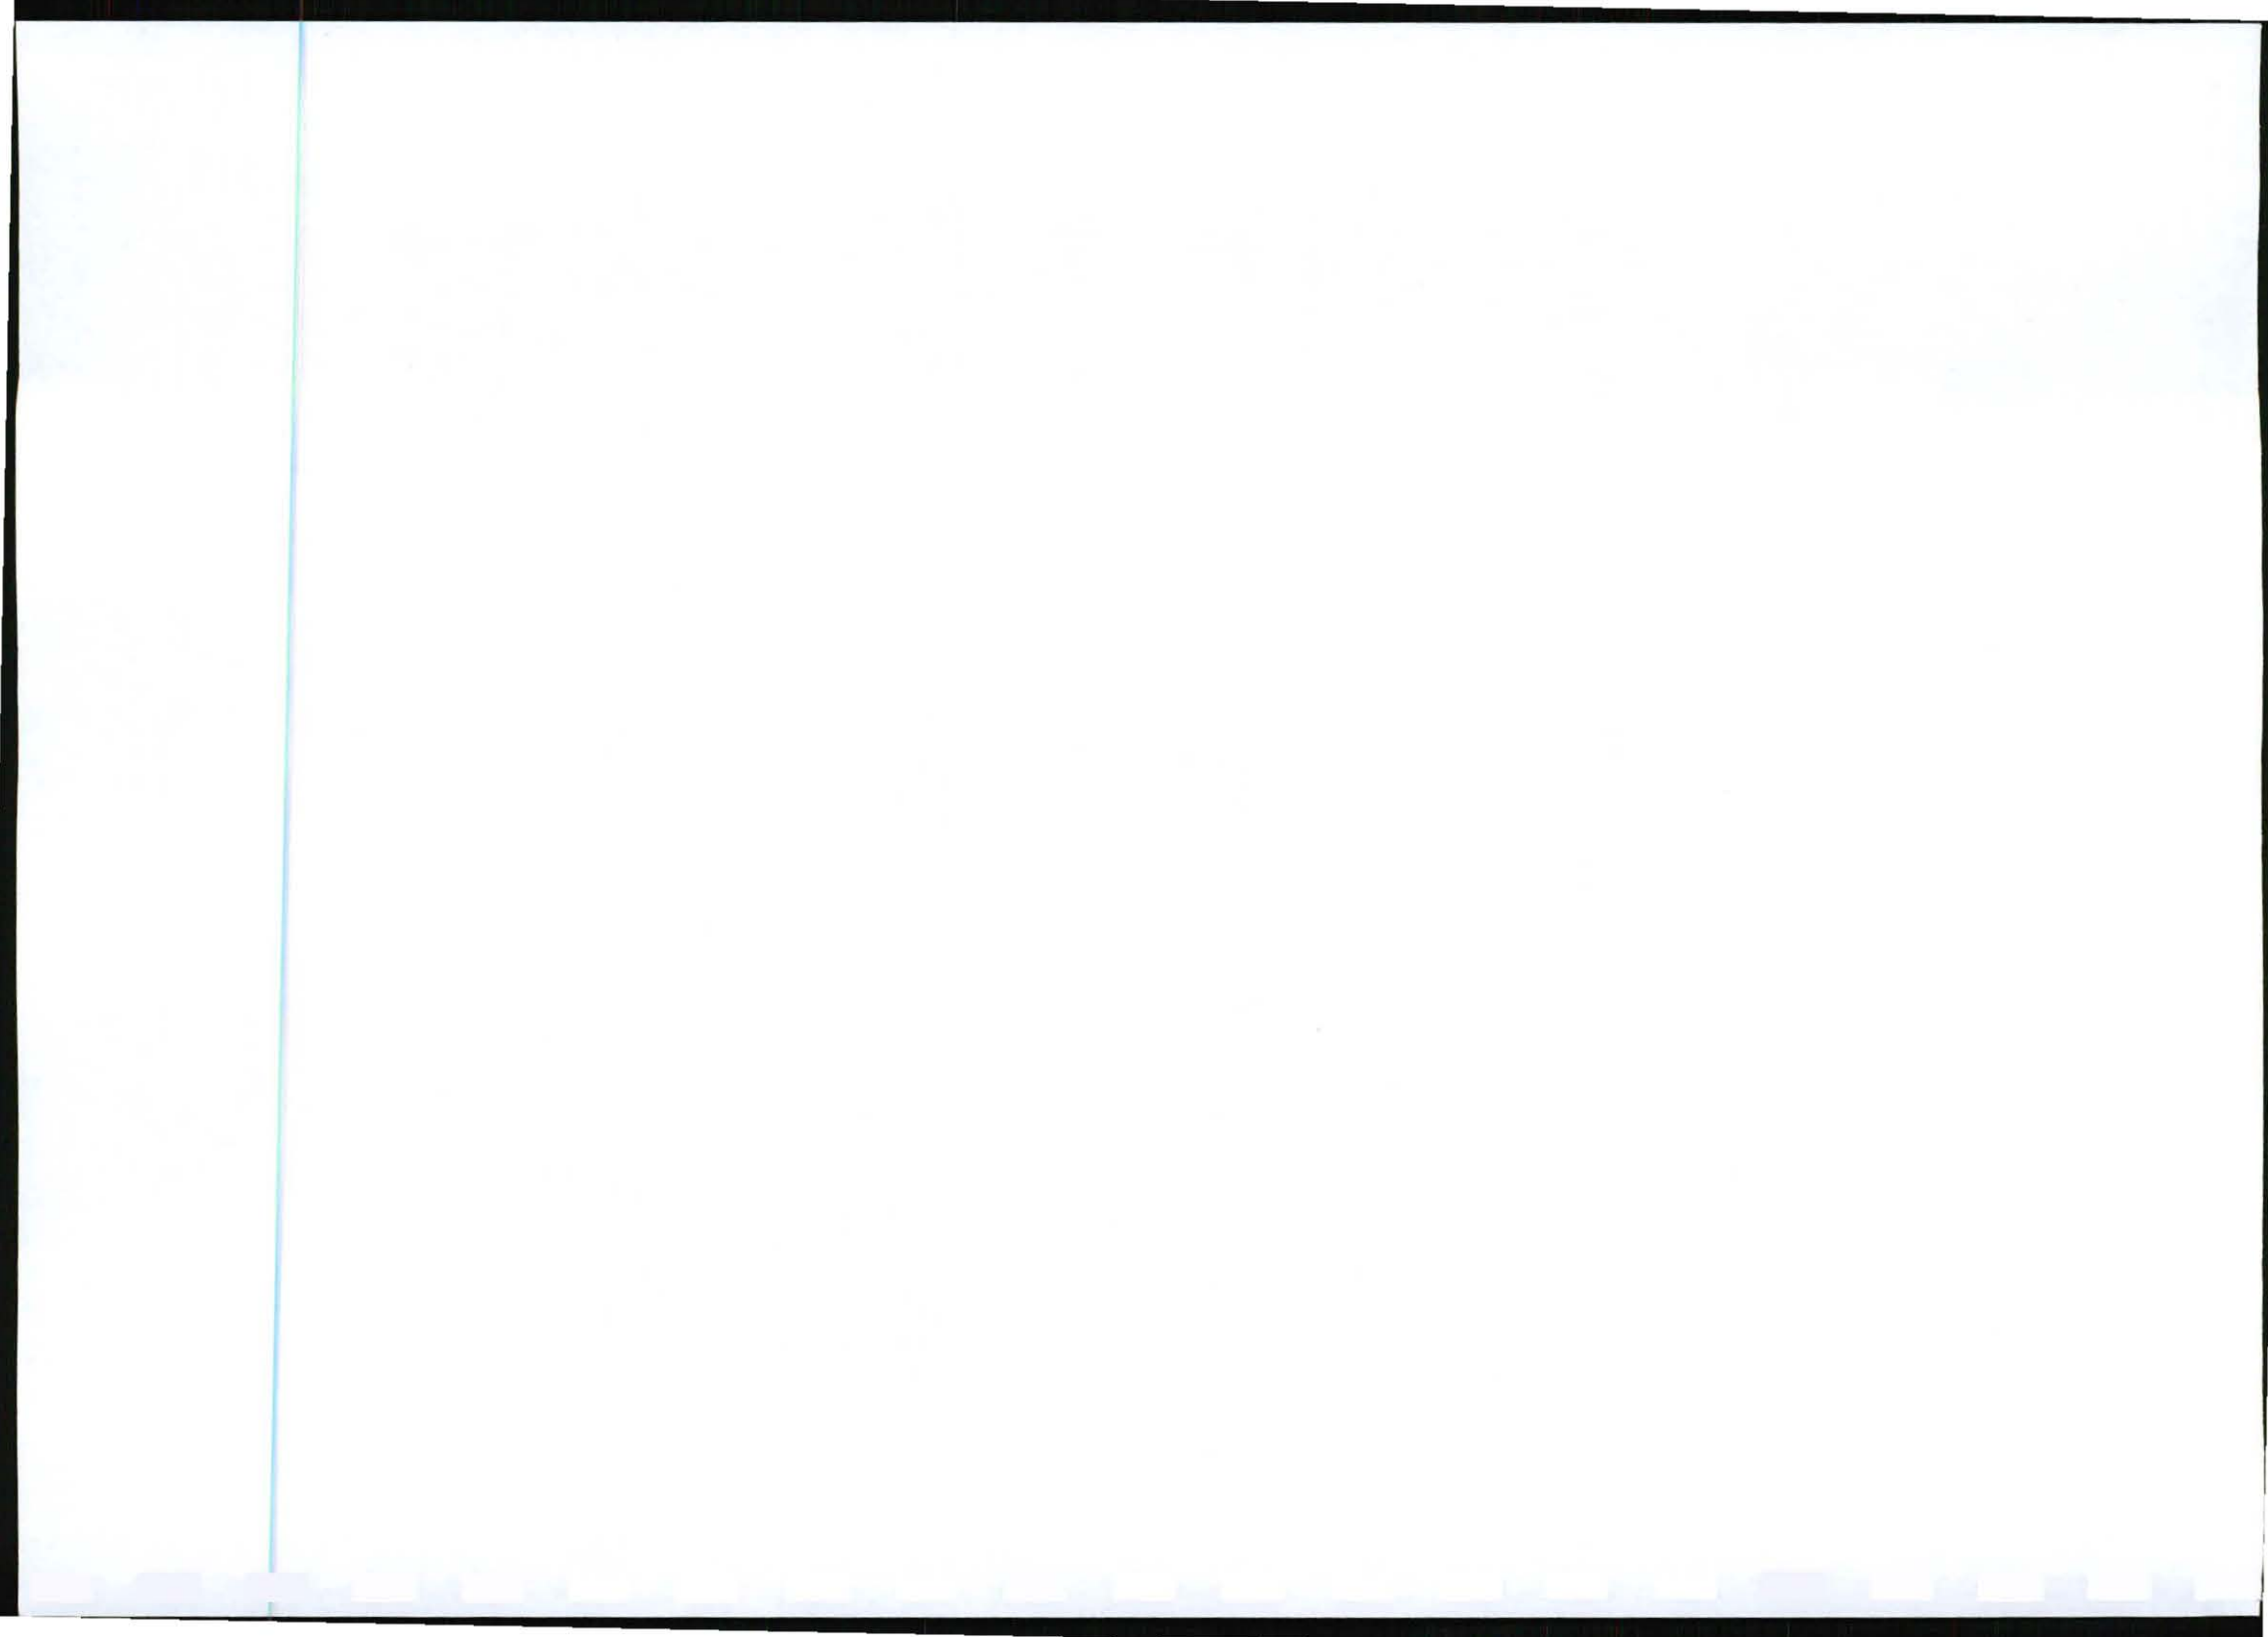

SITE SPECIFIC REQUIREMENTS

The following specific requirements as identified during the EIA process need to be taken due cognisance of and proposed mitigating measures should be implemented:

- Site-specific measures in terms of ecology as identified by the ecologist, Mr. Johannes Maree of Flori Horticultural Services (Tel 082 564 1211) must be included in the contract with the Contractor and implemented by the Contractor during the construction phase. These measures are included in this EMP of the BAR.
- Various species of indigenous trees and bush are protected by law in terms of the National Forests Act No 84 of 1998, which stipulates that it is necessary to obtain a permit from the relevant provincial office of the Department of Agriculture, Forestry and Fisheries in order to cut them.
- A small grove of Camel Thorns on both sides of the D1882 sand road in the vicinity of the Mokolo River should be viewed as a 'No-Go' zone. The route should be planned to avoid the groves. GPS coordinates taken from the road: S24°06.822'; E27°48.301'. Should there be impact on any of the camel thorns, then a permit is needed.
- In general only one application requesting one permit per power line corridor is necessary. All the protected trees, in this corridor, 2m and above, should be indicated on a map.
- The Mokolo River and Poer se Loop are seen as being sensitive. Pylons should not be placed closer than 30m from the edge of river banks or 10m from the edge of drainage lines.
- An ongoing management programme to mechanically control alien plant species that invade the disturbed soils around the newly erected pylons is recommended.
- The power line corridor should be inspected every year (before and after the summer rain season) for soil erosion and if found, to rehabilitate; to not use chemicals in the control of weeds; and to remove all left over construction materials, rubble etc. upon completion of the project.
- The rocky regions should be viewed as sensitive although not as "No-Go" zones. It is recommended to use wide spacing of pylons in the rocky areas to limit the physical footprint on the actual ground.
- Assessment of impacts on the various distinctive ecological units in the study area (before and after) mitigating and management measures were deemed to be as follows: Regional vegetation – medium (before), low (after); Rivers – medium, bordering on high (before), low (after); Rocky areas – medium, bordering on high (before), low (after). No rating matrix is given for the small area of camel thorns or the Mokolo River simply because there are no possible mitigating measures to reduce the negative impact and the area must be seen as a "No-Go" zone.
- **Alternative Route 4 is preferred and submitted as the final proposed route.**
- The site-specific requirements will be updated with reasonable requests for mitigation by the negotiator during meetings and discussion with individual landowners prior to commencement of construction activities.
- A detailed schedule of affected landowners is included in the Register of Landowners on the Route in Appendix E10 of the BA Report.
- The applicable Emergency telephone numbers should always be available on site. Eskom's Environmental Officer Advisor, Ms Nkateko Msimango of Environmental Management, Land Development, Eskom Distribution Northern Region is the relevant contact person (Tel: 015 299 0012/ Cell: 072 018 5167).
- A copy of this EMP must be submitted to relevant landowners should they request it. They can assist Eskom in assuring that the contractor adheres to rules as stipulated and that mitigation and rehabilitation measures are applied.
- The specific measures identified to mitigate the impact of the construction site and workers must be implemented.

The following requirements should be adhered to:


Department of Water Affairs

- It is suggested that the applicant will not need to obtain a water use license or register as a water user in terms of the General Authorisations.
- It should be noted, that if there are any activities which relates to section 21 (c) and (i) water uses of the National Water Act 1998 (Act No. 36 of 1998), the applicant will need to get authorisation from the Department of Water Affairs before such activities commences.

SANRAL and Provincial Department of Roads and Transport

The National Road P198/1 (R33); the Provincial Road P84/1 (R517); and District roads D1882; D1005; and D1162 are affected by the proposed servitudes, should any of the route alternatives be constructed.

In terms of the National Roads Act (Act No 54 of 1971), the requirements of standard conditions applicable to power lines parallel to or across national and provincial roads are as follows:

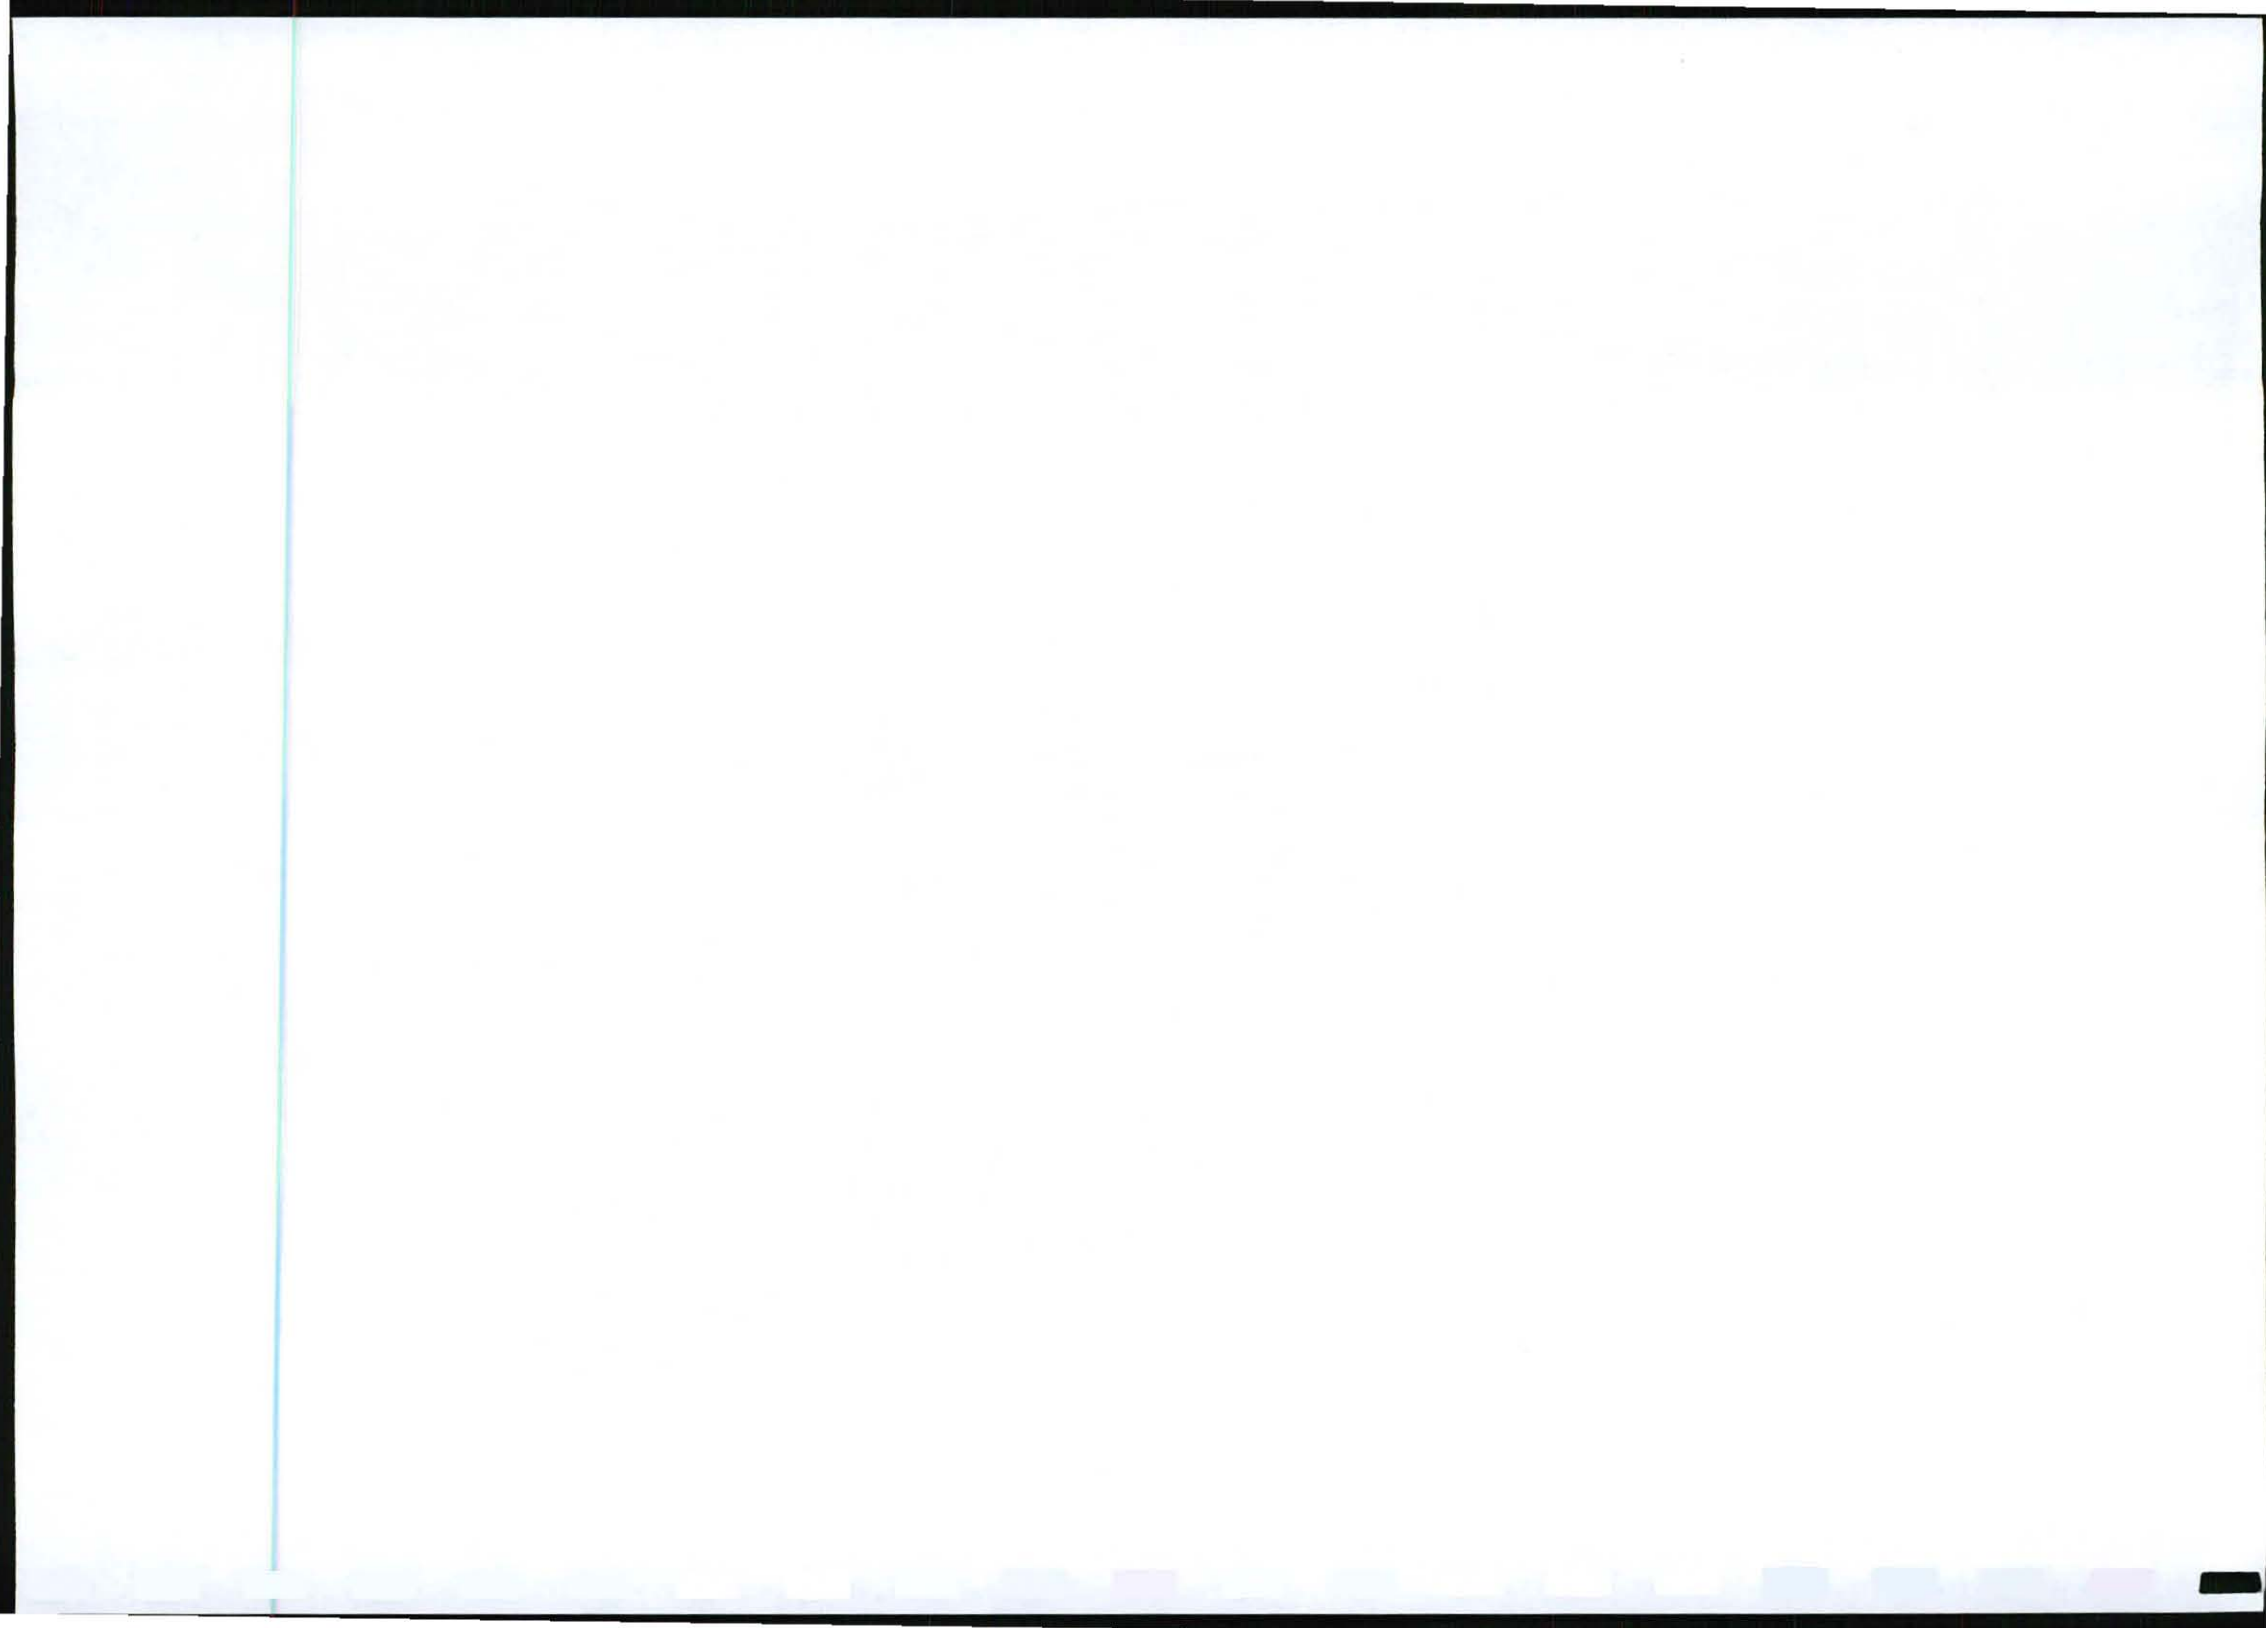

- Only under exceptional circumstances will crossings within 500m of an intersection be permitted.
- No infrastructure will be allowed within 60m from the edge of the road reserve or within a distance of ninety-five (95) metres from the centre line of a building restriction road.
- Vertical clearance as set out in the Occupational Health and Safety Act No. 85 of 1993 to be maintained.
- The proposed angle of crossing to be as close to 90 degrees as possible.
- When considering an infrastructure site, no direct access from a national road to be permitted.

In addition, the following *general requirements of the Provincial Department of Roads and Transport: Roads Management* could be expected:

- A wayleave will be granted in terms of the Advertising on Roads and Ribbon Development Act (Act 21 of 1940, as amended) and the Roads Ordinance (Ordinance 22 of 1957, as amended) and its Regulations and does not exempt Eskom from the provisions of any other law.
- The Wayleave Application should be supplied to the Dept, with appropriate plans before the commencement of construction.
- The general conditions for the overhead wayleave should be accepted by Eskom in writing as per written notification of the Dept.
- The overhead lines are not to be lower than 10m above the highest point of the road surface.
- At crossings no pylons, poles, anchors or parts thereof may be erected closer than 16 m from the road reserve. Where the routes of the lines are parallel to the road(s), it must not be closer than 15m outside the road reserve.
- Crossing services should be perpendicular to the affected road(s).

It is expected that Eskom Land and Rights will apply for exemption from some of the requirements above. The specific requirements from the Provincial Department of Roads and Transport: Roads Management should be obtained. At the time of submission of this report, comment has not been obtained from the Department.



DESIGN AND PRE-CONSTRUCTION PHASE

ENVIRONMENTAL SUPERVISION


- The SECO (contact person: Ms Nkateko Msimango of Environmental Management, Eskom Distribution Northern Region, Tel: 015 299 0012/ Cell: 072 018 5167) and ECO must inspect the construction site on a regular basis (during pre-construction, construction and post-construction periods) to confirm the current state of the site and to ensure that the mitigation and rehabilitation measures are applied as specified in the EMPRr. These officers might make reasonable amendments to the EMPRr in co-operation with the contractor.

DESIGN

- The engineering drawings must adhere to any site-specific mitigation measures supplied by the geotechnical engineer for the project in order to accommodate the geotechnical and earth-scientific constraints in terms of founding and construction methods, construction materials, excavation, etc.
- The final design of the powerlines must accommodate any requirements of the landowners as communicated during the Public Participation Process and confirmed in the option document signed by the applicable affected landowner.
- The final design of the power line must accommodate the requirements of the ecologist, Johannes Maree, Tel 082 5641211, of which the site-specific details are included in this EMPRr. The ecological assessments are included in Appendix D1 of the BA Report.

Regional vegetation

- Due to the long (almost 65km) distance covered by the powerline corridors between Bulge River Substation and Dorset Substation it may be necessary to set up temporary storage and accommodation facilities along the route. If so, areas of flat, open lands should be selected. This need to be old, previously cultivated lands that are open and not wooded. No area should be selected where it would be necessary to cut down any trees or clear any shrub land whatsoever. Any selected temporary site still needs to be within the 100m powerline corridor. All mitigating and management measures as laid out for temporarily facilities under "Bulge River Substation" need to be adhered to.
- No site within a rocky area or within 300m of a river or stream may be used for temporary accommodation or storage.
- Positioning of the foundation slabs for the pylons must be a minimum of 10m away from the edge of all drainage lines.
- No trees outside of the powerline corridor of 8m to be removed.
- Disturbed surface areas in the construction phase to be rehabilitated. No open trenches to be left. No mounds of soils created during construction to be left.
- The sandy nature of the soils in the area makes it susceptible to soil erosion by water once disturbed, especially in steeper areas. The ground around all foundation slabs for the pylons need to be inspected before and after the summer rainy season for erosion. Any erosion found needs to be fixed and preventative measures put in place to prevent a reoccurrence of the situation.
- An ongoing programme to be implemented to mechanically control alien plant species that invade the disturbed soils around the newly erected pylons. This should be done in such a way as to allow the natural grasses and pioneer plants to colonise the disturbed areas.
- Mechanical control of alien species to be implemented within two months of completion of construction of the powerline. Thereafter ever six months.
- Surface area under powerlines to be mowed and not ploughed.
- No chemical control (herbicides) to be used in the control of alien plants or indigenous plants, except on tree and bush stumps in 8m corridors directly under powerlines.
- Removal of all construction material and equipment after construction.
- Removal of all waste construction material to an approved waste disposal site.

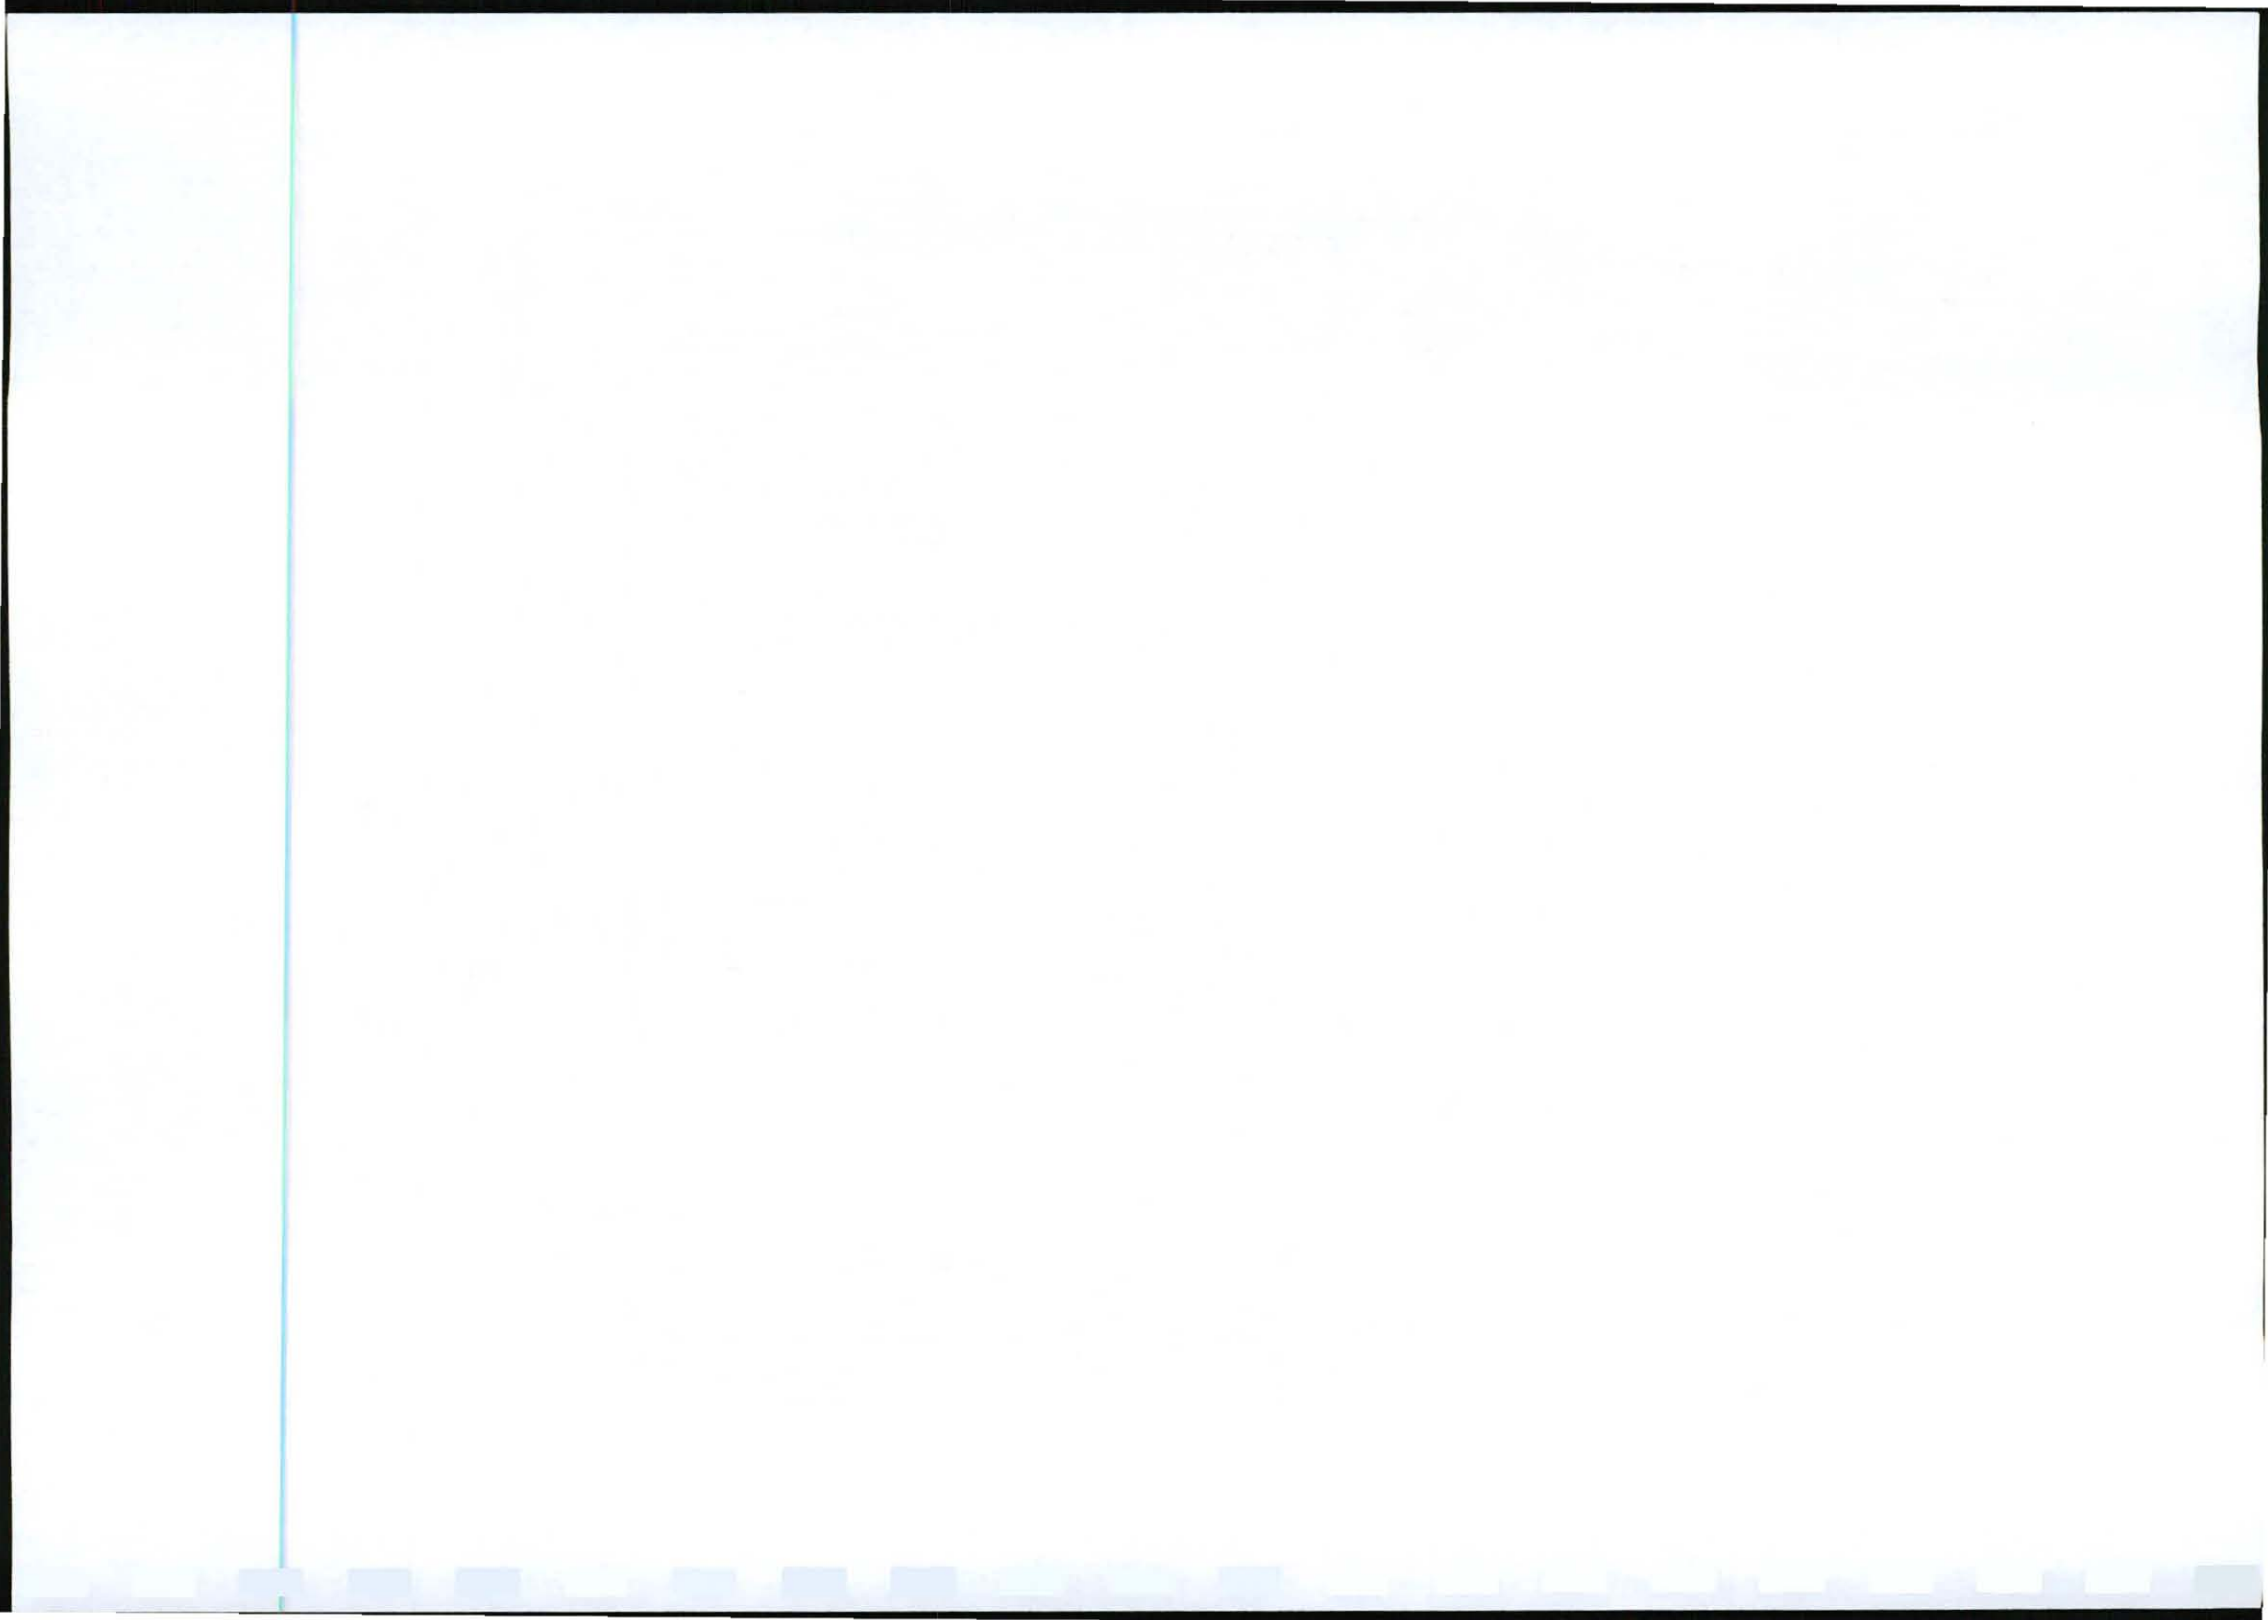


Rivers and seasonal streams

- Two major water courses (Mokolo River and Poer se Loop) along with a few seasonal streams and drainage lines cross the corridors for the powerlines. These need to be completely avoided and no pylons may be placed directly within any one of these water courses.
- No temporary or other construction facilities to be erected or stored within 200m of the banks of the Mokolo River or the Poer se Loop stream.
- Positioning of any pylons need to be a minimum of 30m from the edge of the river banks or outside of the 1 in 100 year floodline.
- Positioning of the foundation slabs for the pylons must be a minimum of 10m away from the edge of all drainage lines.
- Under no circumstances may a pylon be placed directly in the bed of a river or drainage line.
- No temporary ablution facilities to be placed within 200m of the banks of any of the rivers or seasonal streams.
- No temporary ablution facilities to be placed within 200m of any drainage line, even if they are dry.
- Only proper portable, chemical ablution facilities to be used and these to be positioned only within the 31m powerline servitudes.
- Portable ablution facilities only to be serviced by registered companies and on a regular basis. Under no circumstances may any effluent or sewage to be dumped in the open veld.
- Proper water facilities need to be installed and maintained for construction workers. No water from out of the rivers may be used for drinking, washing or cooking purposes.

Rocky areas

- A few rocky areas have been identified along the proposed servitude routes. These areas are considered moderately sensitive and should be approached with caution.
- The area is not seen as a "No-Go" area, but care should still be taken to avoid any unnecessary disturbance of veld or soil. Removal of trees, shrubs and other vegetation should be kept strictly to within the 8m corridor under the powerlines.
- Only a single, basic vehicle track to be constructed as an access road under pylons moving through the rocky area.
- Access roads need to be kept to an absolute minimum.
- No trees to be cut down or roads to be created to access the powerline corridor from the public road by vehicle. Or to create shortcuts into this region. Any vehicles needing to access the powerlines running through the rocky area will need to do so from out of the less sensitive plains along the corridor itself.
- No temporary storage facilities, toilets, dwellings, etc. of any kind to take place within this rocky area. Not even within the demarcated powerline corridor.
- The longest possible distance between pylons should be used in an effort to limit the footprint size on the rocky area.
- The powerline must run as straight as possible through and over rocky areas. This in an effort to limit sharp turns that literally create a larger physical footprint on the ground.
- Great care and thought must be taken into the actual positioning and construction of the foundation slabs. The soils are sandy and this area has the steepest gradient of the study site. There is therefore a real danger of soil erosion and resulting veld degradation in this area.
- The sandy nature of the soils in the area makes it susceptible to soil erosion by water once disturbed, especially in steeper areas. The ground around all foundation slabs for the pylons need to be inspected before and after the summer rainy season for erosion. Any erosion found needs to be fixed and preventative measures put in place to prevent a reoccurrence of the situation.
- Disturbance of the soils must be kept to an absolute minimum to limit the potential introduction of alien plants. This area is pristine with little to no alien infestation. Alien plants generally get a foothold in an area where the soils have been disturbed.
- Mechanical control of alien species must be implemented within two months of completion of construction of the powerline. Thereafter ever six months.
- No chemical control of alien plant species to be used.

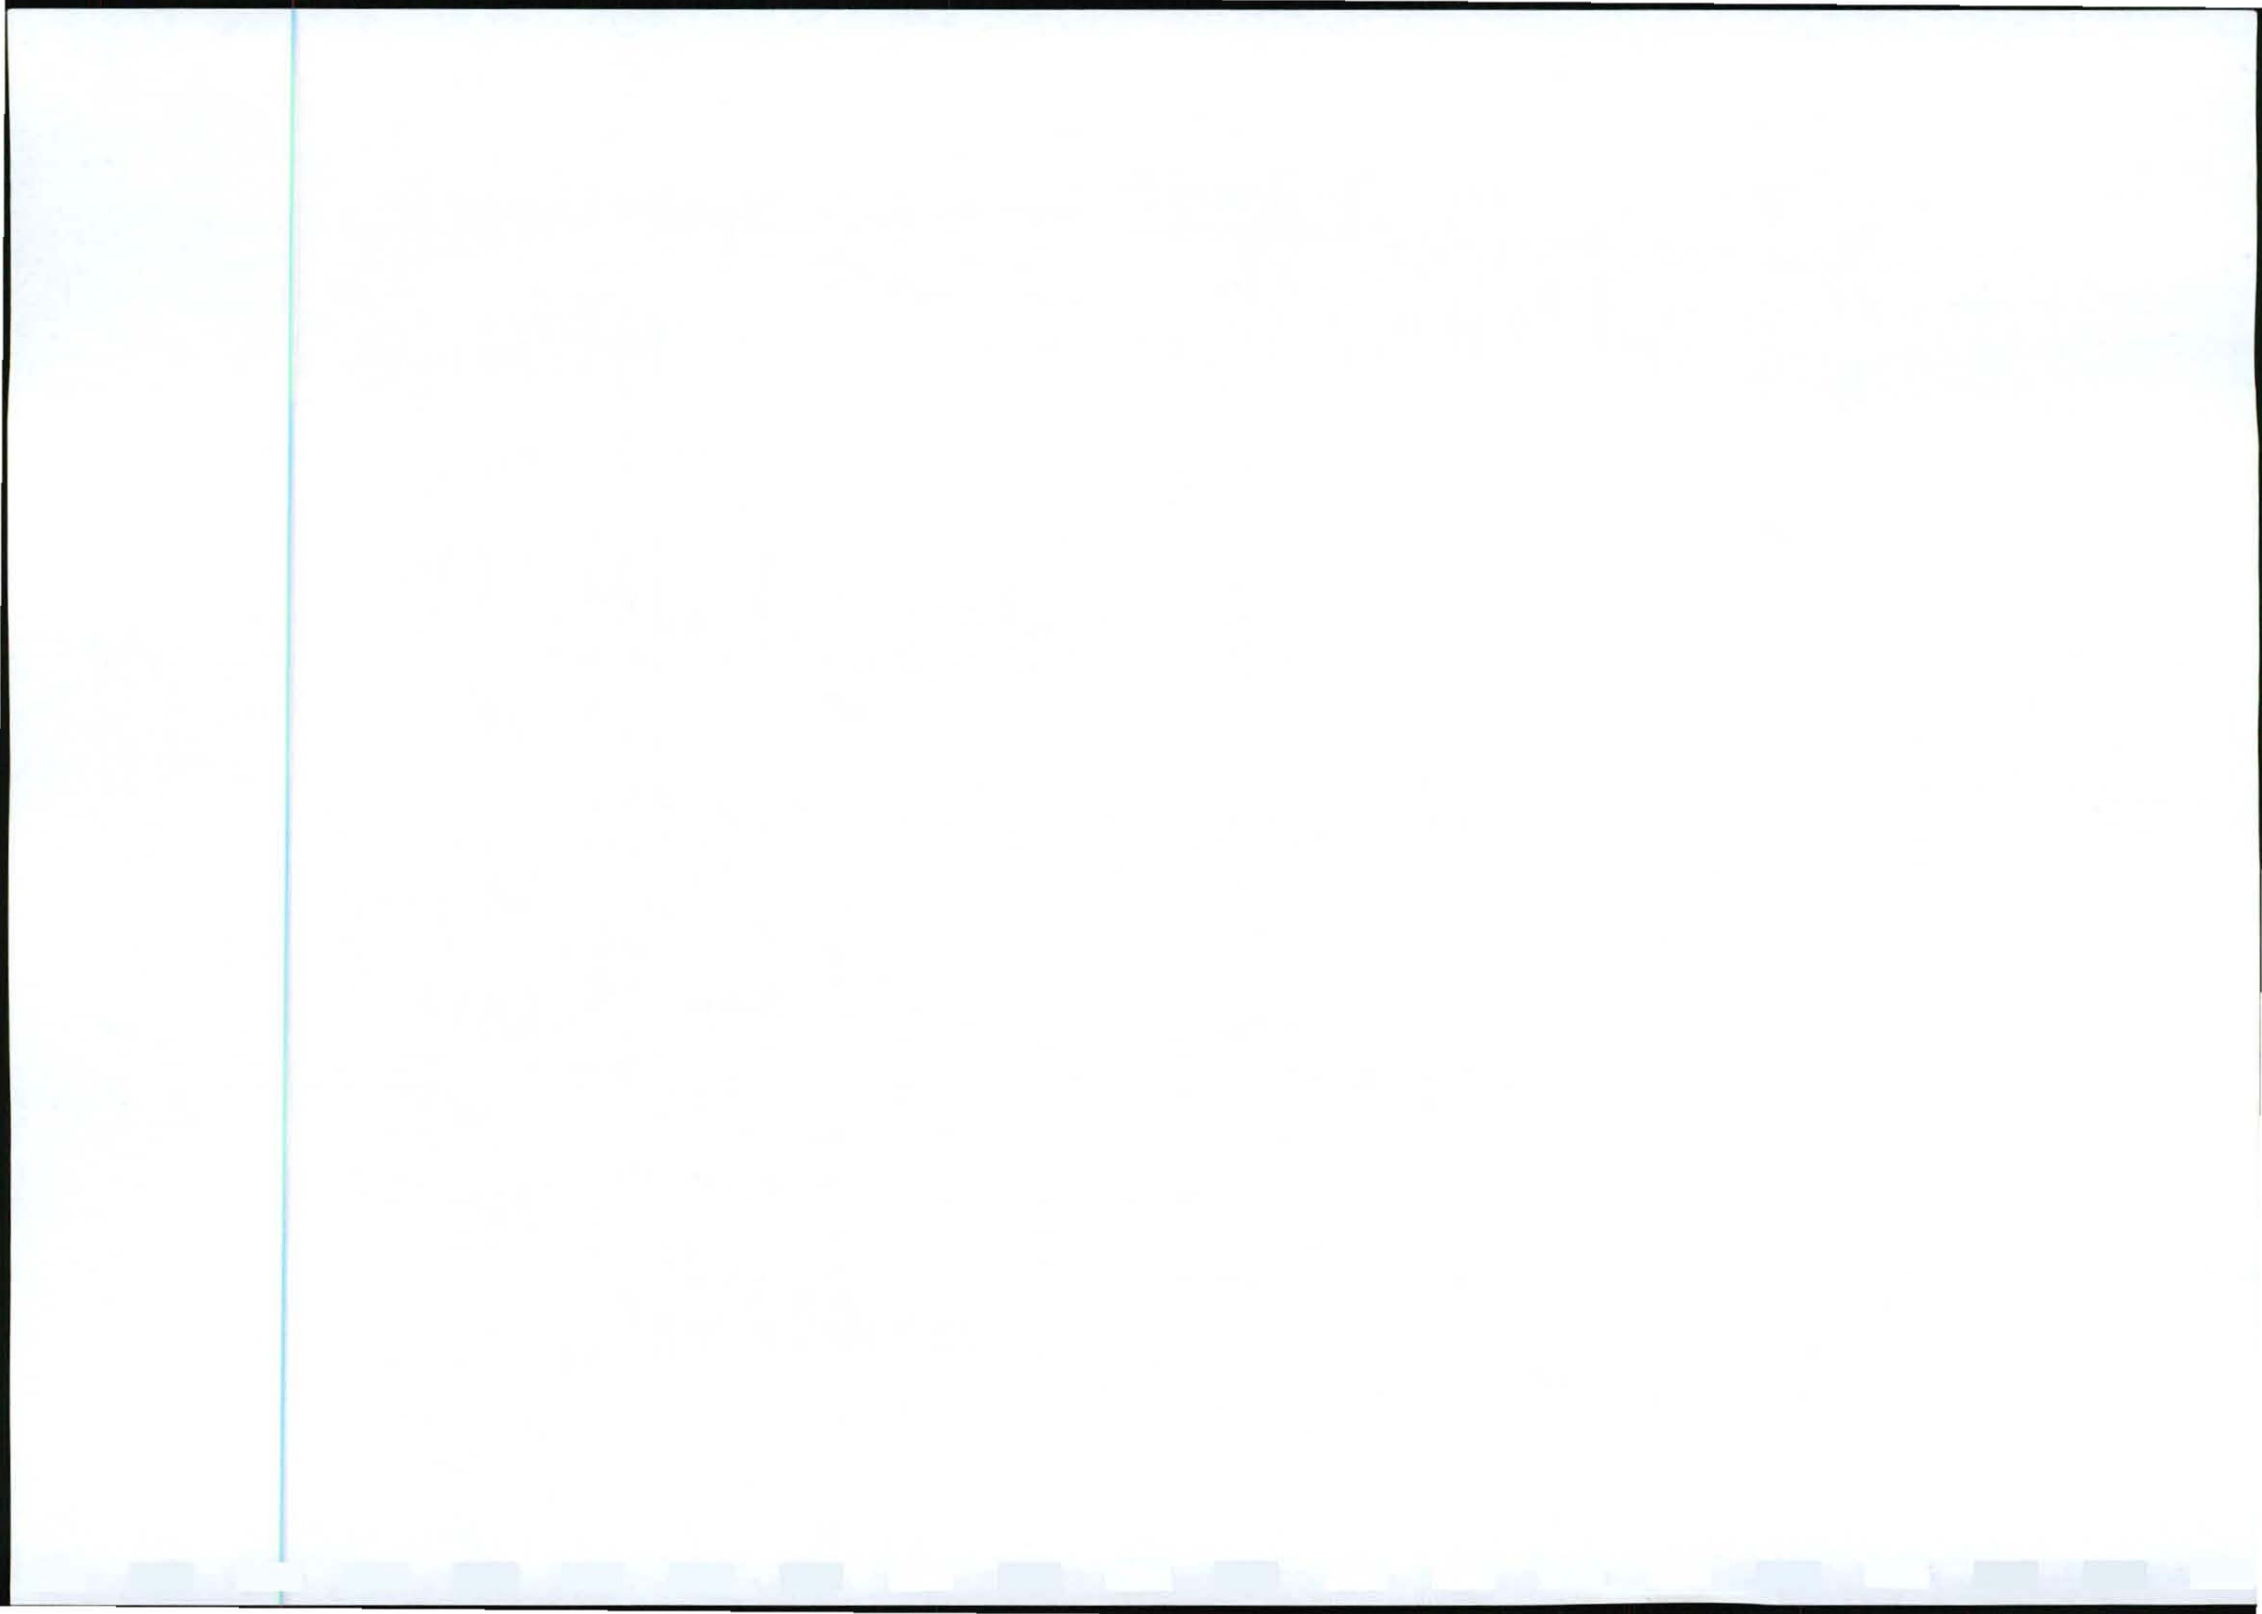

Camel thorns

- There are a few camel thorn (*Acacia erioloba*) trees growing just east of the Mokolo River on both sides of the sand road (D1882). Camel thorns are protected trees and this small grove should be viewed as a "No-Go" zone and totally avoided.

General

- The placement distance between pylons can be up to 330 meters. Therefore any sensitive areas, with proper planning, could be completely missed.
- It was concluded that, from a vegetation and fauna perspective, if duly mitigated and planned, the overall impact is seen to be minimal over the medium- to long-term.


COMPLIANCE WITH SPECIFICALLY IDENTIFIED LEGAL REQUIREMENTS

The National Water Act (Act No 36 of 1998)

- Of relevance is, that the four Alternative Routes traverse two major water courses (Mokolo River and Poer se Loop) along with a few seasonal streams and drainage lines. Whichever route is finally decided upon, river crossings will still be necessary and mitigation measures are recommended to prevent any impact on water courses:
- Hence, no construction of any sort should take place within any aquatic and riparian habitats encountered, as these habitats are viewed as sensitive.
- There will therefore be *no impact on any watercourse or waterflow with regards to impeding flow or altering flow, as discussed in Section 21 c & l, or any of the listed water uses of the Water Act and relevant General Authorisations.*
- It is suggested that the applicant is complying with all aspects of the Water Act and General Authorisations, including all of the above points mentioned and there would therefore be **no need to obtain a water use license or register as a water user in terms of the General Authorisations.**
- It should however be noted, that if there are any activities which relates to section 21 water uses of the National Water Act 1998 (Act No. 36 of 1998), the applicant will need to get authorisation from the Department before such activities commences.
- Locality maps that show where the development will affect the watercourse as well as a description of how it would be affected need to be submitted to the relevant office together with the license application to undertake such a development. The likely relevant activity is described in Section 21(i) as "Altering the bed, banks, course or characteristics of a watercourse". An additional activity that could be relevant and for which authorisation could also be required is Section 21(c) "Impeding or diverting the flow of water in a watercourse".
- Additional information with the latest requirements for water use applications are supplied on the Department's website, www.dwae.gov.za.

National Forests Act (Act 84 of 1998)

- Some species of indigenous trees are protected by law in terms of the National Forests Act (Act No. 84 of 1998) that may not be removed unless permission is granted by Department of Agriculture, Forestry and Fisheries (DAFF). Authorisations for cutting, trimming or removing of these protected trees must be obtained prior to commencement of construction in the relevant area. For protected trees on the National list, permits should be obtained from the relevant provincial office of the Department of Agriculture, Forestry and Fisheries (DAFF).
- Relevant to this project is that Red data species and protected species found in the area include Camel thorn (*Acacia erioloba*), Leadwood (*Combretum imberbe*) and Marula (*Sclerocarya birrea* subsp. *caffra*).
- A small grove of Camel Thorns on both sides of the D1882 sand road in the vicinity of the Mokolo River should be viewed as a "No-Go" zone. The route should be planned to avoid the groves. GPS coordinates taken from the road: S24°06.822'; E27°48.301'. Should there be impact on any of the camel thorns, then a permit is needed.
- In general only one application requesting one permit per power line corridor is necessary. All the protected trees, in this corridor, 2m and above, should be indicated on a map.
- Enquiries regarding such permit applications can be made to the following addresses:
Assistant Director
Izak van der Merwe
Tel: (012) 336 7731
Email: 1dq@dwaf.gov.za

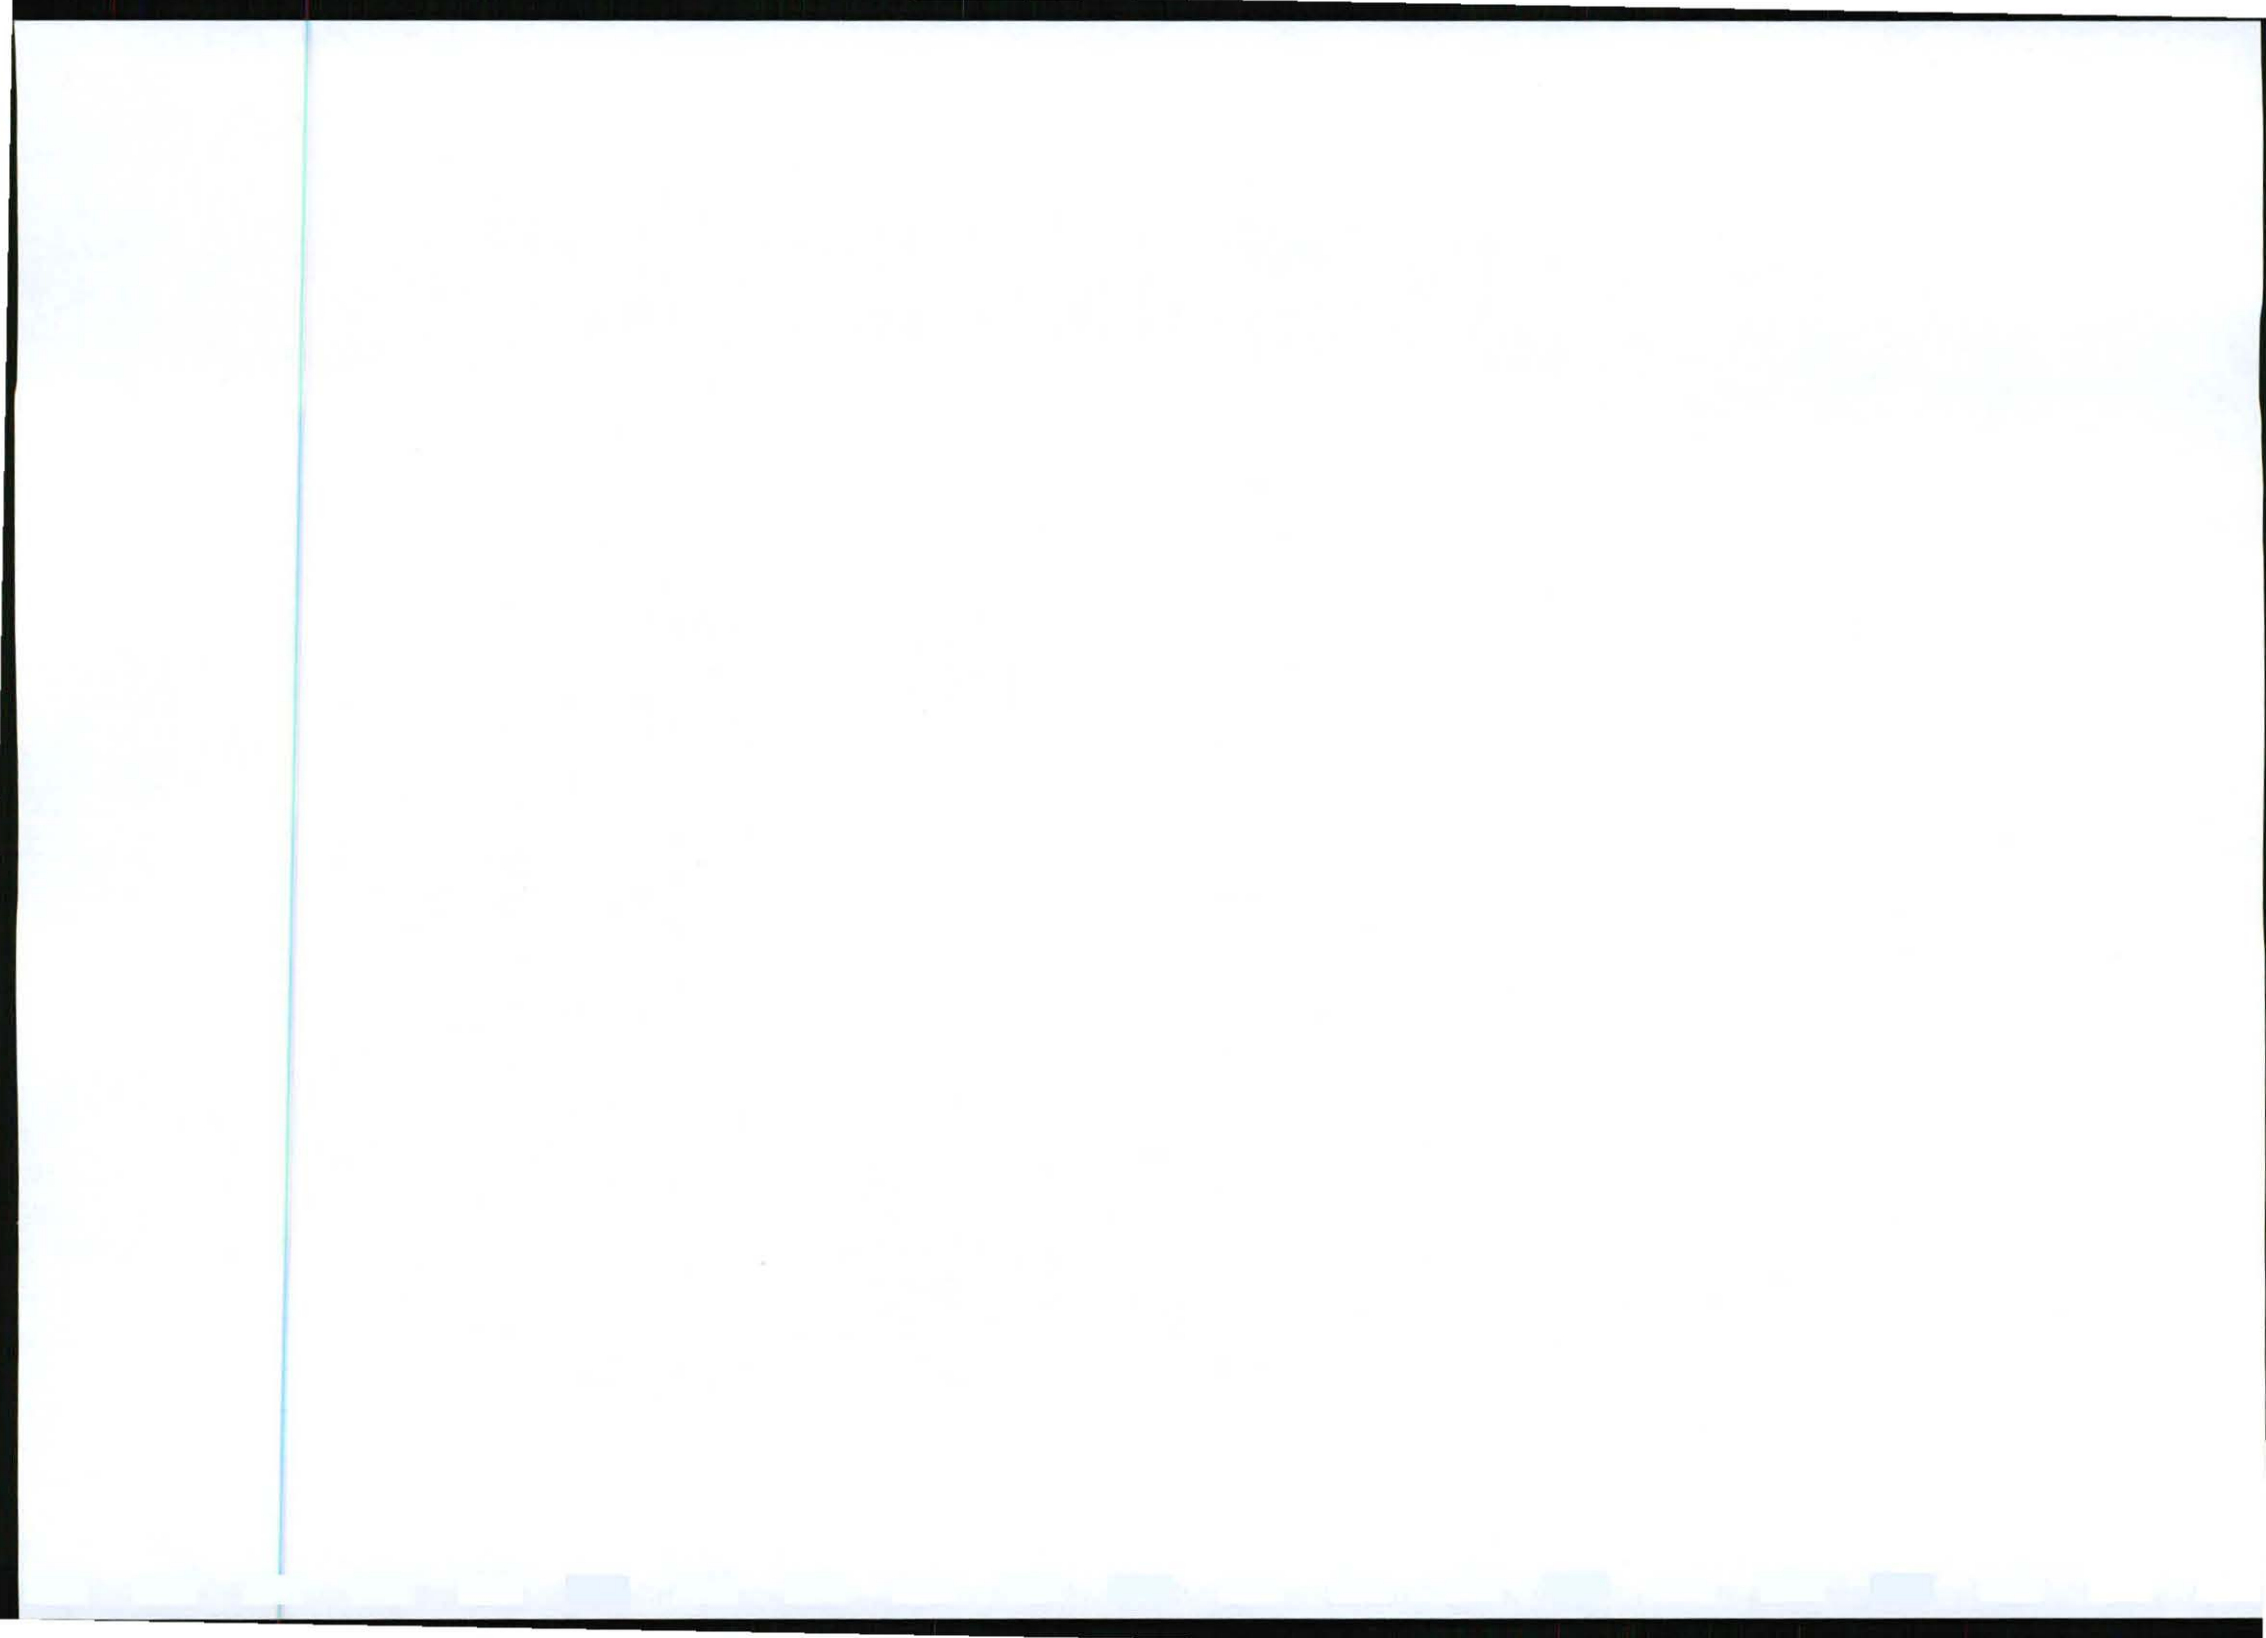

Or
Assistant Director: Forest Regulation
Ephraim Monyemoratho
Tel: (012) 336 7140
Email: 1ai@dwaf.gov.za

- Due cognisance must be taken of the latest forms and regulations currently available on the following website link : <http://www2.dwaf.gov.za/webapp/SustainableProtectedTrees.aspx>
 - Application for a license regarding Protected Trees
 - Protected Trees Species list, 2007
 - Criteria & Framework for application of Legislation on Protection of Indigenous Tree Species, 2000

The Limpopo Environmental Management Act (LEMA), 2003 (Act no 7 of 2003)

- The Limpopo Environmental Management Act (LEMA), 2003 (Act no 7 of 2003) took the place of the former Nature Conservation ordinances. The district offices of the Department of Economic Development, Environment & Tourism, Limpopo Province are designated to deal with compliance in terms of LEMA and the protected plants in terms thereof or applicable permits applications.
- For protected trees on the provincial list (specific to each province), permits should be obtained from the relevant provincial nature conservation departments. These departments and permit sections tend to fall under different governing bodies for the different provinces.

COMMUNITY ISSUES

- Eskom representatives must liaise personally with all directly affected landowners prior to any construction activities taking place. The objectives of this liaison will be the following:
 - To identify the most effective time schedule for construction activities to take place on the applicable properties;
 - To confirm site-specific requirements as identified during the EIA process;
 - To identify any additional site-specific issues with reasonable mitigation measures that had not been identified and documented during the Public Participation Procedures of the EIA process undertaken for the project.
 - To update the contact details of affected landowners in case that access to properties are required for both maintenance and emergency situations.
 - To confirm contact details of the Contractor and Eskom representatives to ensure effective communication during the construction and operational phases of the project.

(Find attached in Appendix E10 of the BAR a register of the affected landowners).


EDUCATIONAL PROGRAMMES

An environmental education programme should be followed to ensure that the construction workers are well aware of relevant issues such as


- The purpose of conservation of the natural environment;
- The restriction on cutting of firewood from the veld;
- Pollution control and waste management;
- Rules to curb social pathologies (prostitution, drunkenness, theft);
- HIV/Aids prevention.

CONSTRUCTION SITE

- Camp site, storage facilities and other necessary temporary structures to be erected within the immediate area demarcated for the Bulge River substation and the Dorset substation. With the possibility of another one (maximum two) temporary sites within the powerline corridors due to the distance between the substations.

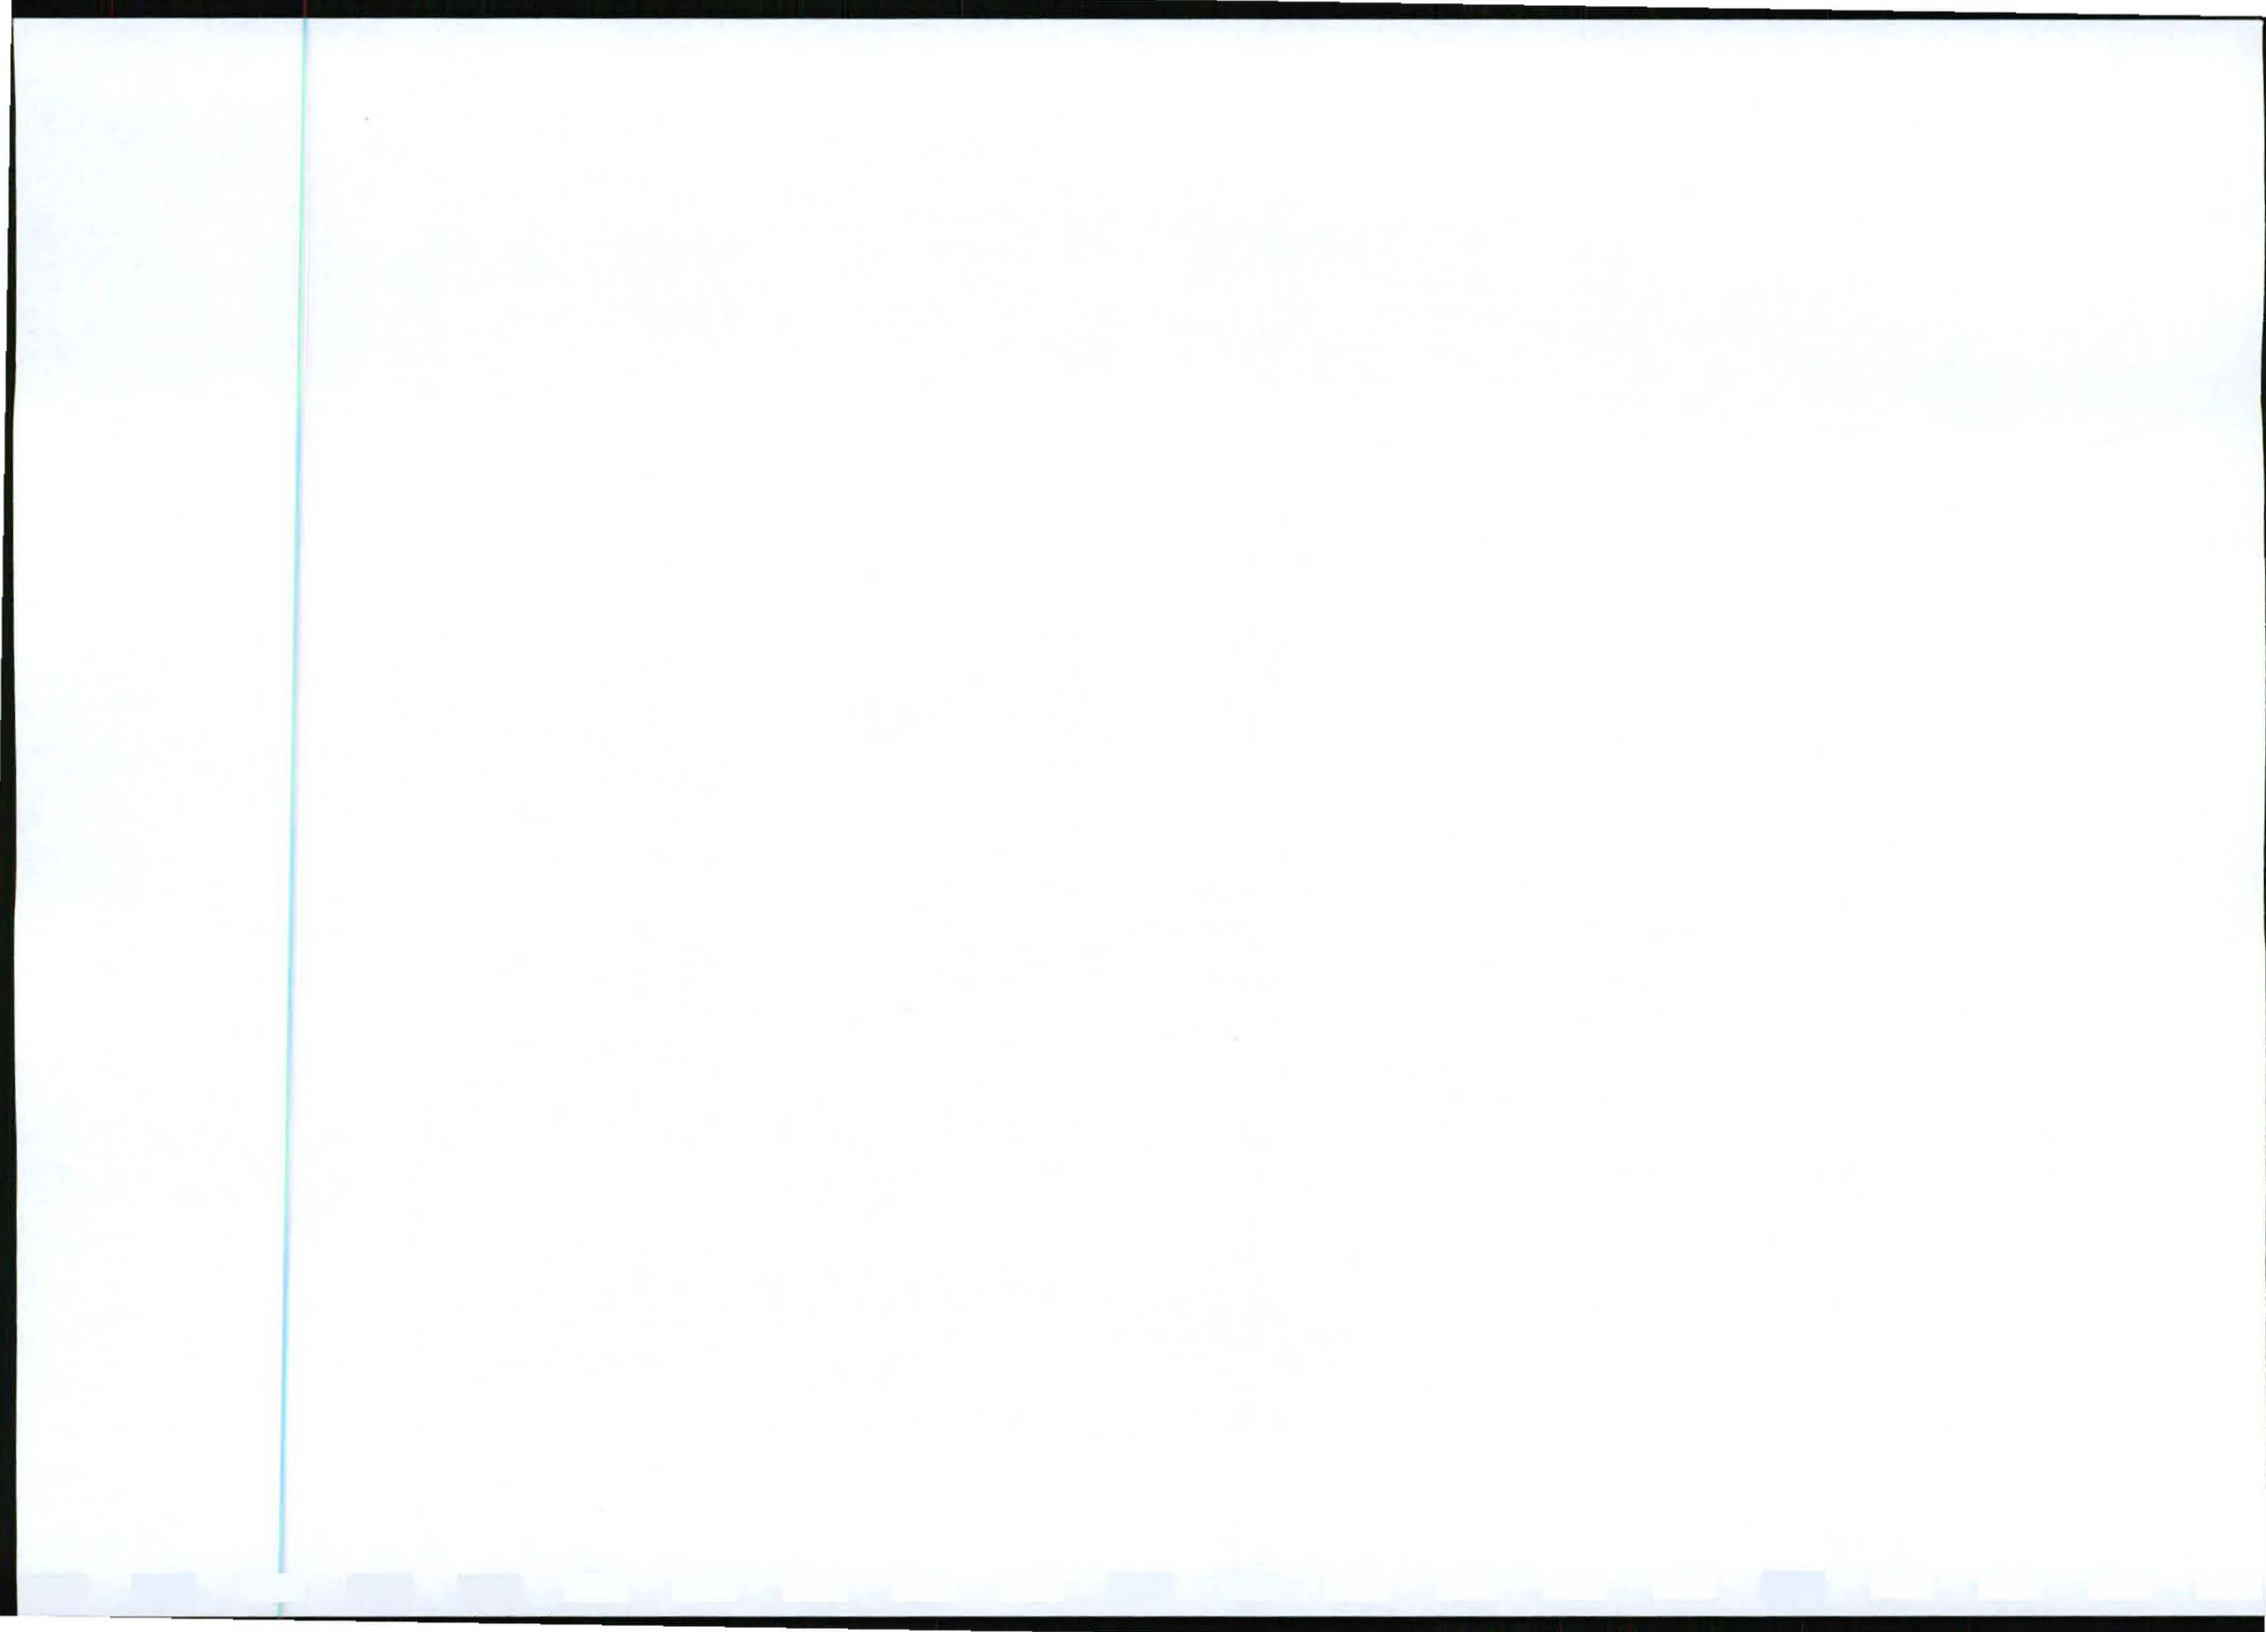

- No camp sites or other temporary structures to be erected outside the designated areas of the powerline corridors.
- The location of the construction sites must be negotiated with the relevant landowners and specifications of the landowners must be adhered to.
- Plan campsites an appropriate distance from any facility where it can cause a nuisance.
- Encourage the construction contractor to employ local people as far as is reasonably practical and encourage the contractor to transport them daily to and from site. This will reduce solid and liquid waste production and water demand at the site camps.
- Contractors should develop a comprehensive site camp management plan. This should apply even in the case of the limited accommodation camps discussed above.
- If at all viable, accommodation for the construction workers should be rented in the nearest town. Sewage disposal will therefore be through the Municipality's main sewer line. Should accommodation in a construction camp be unavoidable, then the measures as stipulated in the EMPr must be adhered to.
- The construction site office and storage areas for material and equipment must be fenced in to prevent impacts and human interference to spread further than the site.
- No material or machinery to be stored or placed in the open veld outside the designated area of the powerline corridors.
- All construction activities and movement of people and machinery to remain within the designated powerline corridor, as far as possible and within reason.
- Temporary access roads for vehicles carrying equipment, materials, etc. into the powerline corridors need to be kept to an absolute minimum. None of these access roads may cross through sensitive areas.
- Work corridor to be limited to 20 metres along the route of the servitudes.
- Mixing of cement, concrete, paints, solvents, sealants and adhesive must be done in specified areas on concrete aprons or on protected plastic linings to contain spillage or overflows onto soil to avoid contamination of underground water.
- Minimize on-site storage of petroleum products.
- Ensure proper maintenance procedures in place for vehicles and equipment.
- Servicing of vehicles to be in designated areas with appropriate spill management procedures in place.
- Ensure measures to contain spills readily available on site (spill kits).
- Proper and adequate containers (rubbish bins) to be placed in campsites for the temporary disposal of food waste and general litter generated by construction workers. These containers need to close securely to avoid items (eg. Paper and plastic) been blown into the veld, or been pushed over and rummaged through by wild animals such as monkeys.
- Proper waste management is essential and disposal at municipal waste disposal sites should be regular - at least twice a week.
- Any waste, that cannot be recycled, will be transported to an appropriate landfill site licensed in terms of section 20 (b) of the National Environment Management Waste Act, 2008 (Act No 59 of 2008). The disposal of any construction waste will be the responsibility of the developer and should be done at least twice a week. A letter of agreement between the developer and the Permit Holder of the waste disposal site shall be provided to the DWA.
- Dispose of liquid waste (grey water) with sewerage.
- Under no circumstances may any sewage, waste food or general litter be dumped in the veld.
- No water for drinking or cooking purposes should be used from out of streams, vleis or farm dams in the vicinity. It is important for relevant management or contractors to ensure that staff/workers are supplied regularly with adequate clean drinking and cooking water.
- The water used to supply the site with potable water is sourced/purchased from farmers in the area with pre-existing rights. The contractor should deliver the water to the site in the applicable water tankers. These requirements are included in the EMPr under the headings "*Construction site*" and "*Ground and Surface Water*".
- In all cases, abstraction of water for construction purposes will require a permit from the Department of Water Affairs unless pre-existing rights are purchased from farmers. For this project, water tanks will be used during construction.
- Sufficient ablution and proper cooking facilities must be provided at the site camp.
- Install appropriate facilities at the campsite. Preferably utilize municipal systems (conservancy tanks with periodic removal) or chemical toilets.
- In general, no ablution facilities should be located within 200m of the banks of any watercourse.

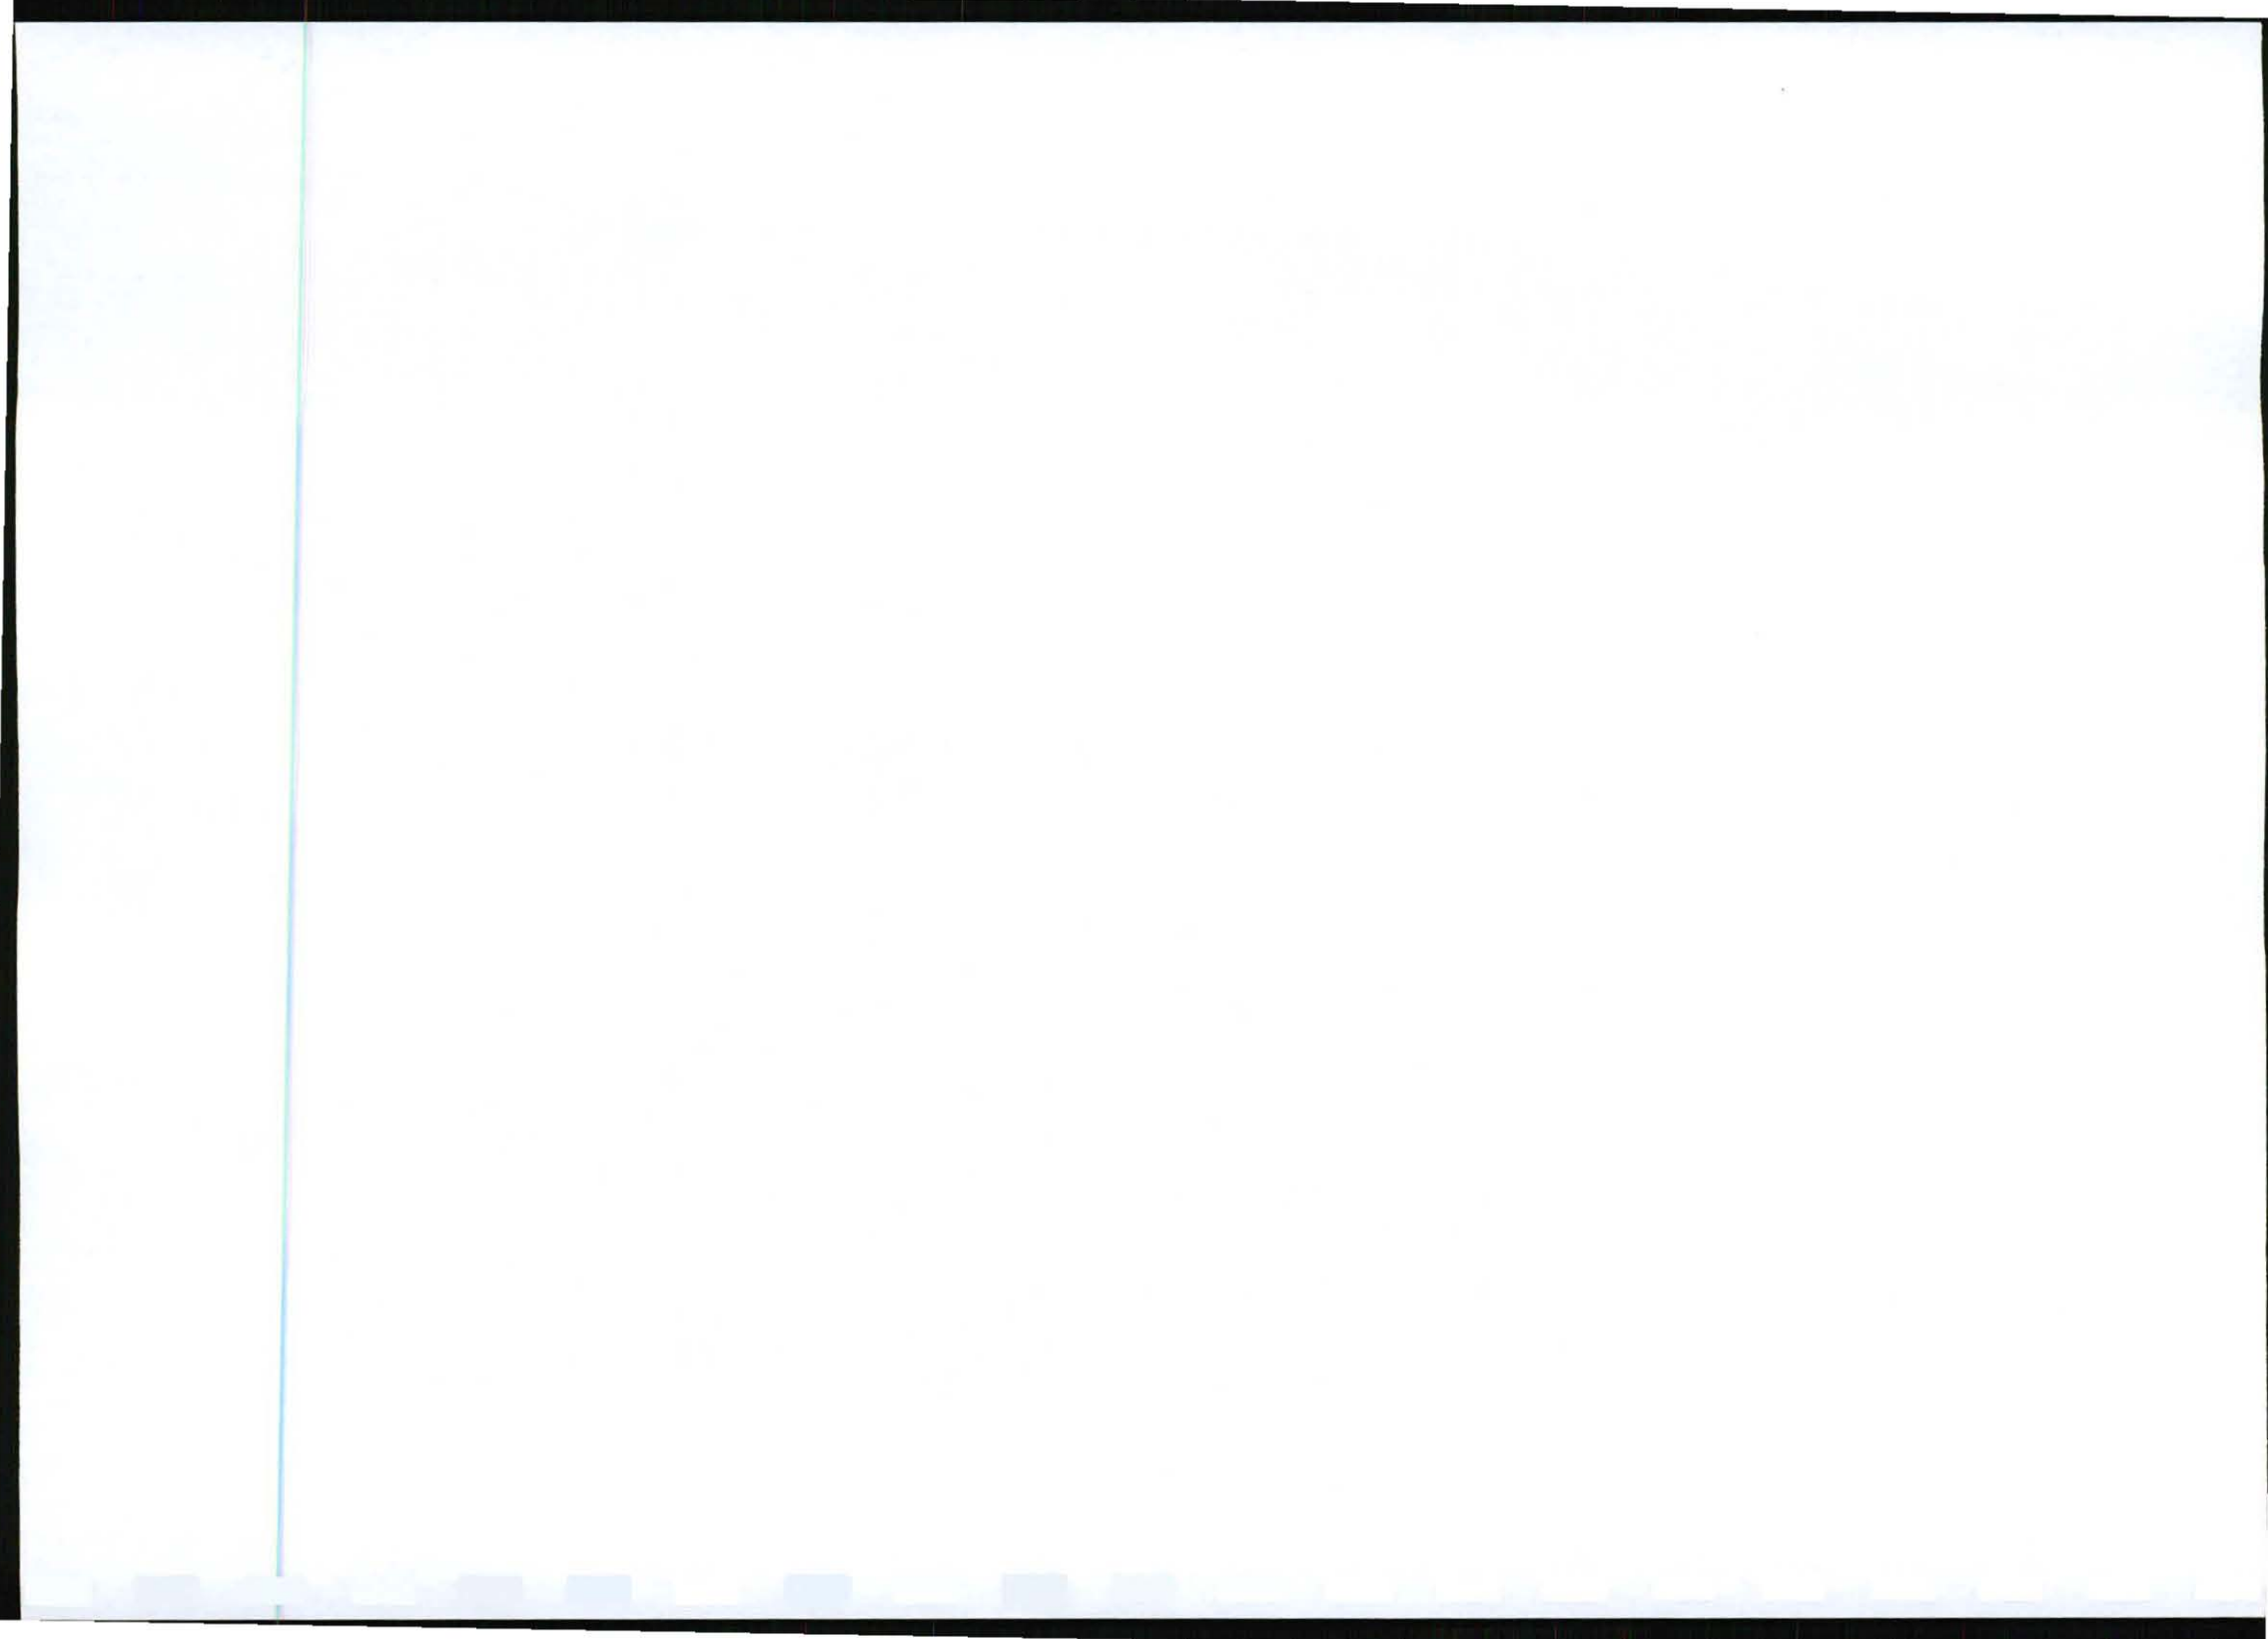

- The disposal of chemical toilets should be at a registered or licensed sewage disposal facility. Proof of agreement between the applicant and the sewage disposal facility for such disposal, confirming that there will be enough capacity to accommodate additional waste, should be submitted to the Department of Water Affairs.


FIRE MANAGEMENT PLAN

A fire management plan must be identified, implemented and maintained, commencing prior to construction and maintained throughout the operational phase. The following additional measures must be included :

- No open fires to be allowed outside of the Bulge River and Dorset substations sites.
- Collection of wood for fires and cooking from out of the surrounding veld is prohibited.
- In campsites in the substations a designated area for camp fires and cooking needs to be made. Should open fires be used then an area of at least 2m by 2m needs to be cleared of any flammable materials such as grass.
- No open fires to be allowed in the powerline corridors or adjacent areas. In such cases proper provision for portable gas stoves should be made. All relevant laws related to flammable substances to be strictly adhered to.
- No fires may be made for the burning of vegetation and waste.
- Fire fighting equipment must be readily available on site during all times.
- Branches and other debris resulting from pruning processes should not be left in areas where it will pose a risk to infrastructure.
- Fires shall not be made for the purpose of chasing or disturbing indigenous fauna.
- Fire Risk Management is dealt with under a procedure titled "Distribution Fire Risk Management", reference SCSASAAJ6. Grass fires are dealt with in this procedure stating that vegetation and equipment must be maintained. A specific procedure deals with fire risk management for substations where the chipped stone needs to be maintained to prevent vegetation growth.
- Eskom Distribution does not make use of the practice to burn fire breaks, rather, it relies on the maintenance of vegetation in accordance to its Vegetation Management Standard to reduce the risk of fires starting from Eskom infrastructure.
- Eskom Distribution Division does not remove the grass below power lines since this does not pose a safety risk and will create the potential for erosion, causing environmental degradation and hence legal liability.


APPOINTMENT OF CONTRACTORS

- Environmental clauses as referred to in this EMPRR, should be included in contract documents of all contractors.
- All identified site-specific measures in terms of community requirements, the ecology and bird impact for the specific property must be included in the contract with the Contractor and implemented by the Contractor during the construction phase.
- The appointment of contractors with proven track records of sound environmental performance should be given priority.
- The contractor must ensure that the majority of unskilled labour is obtained from the local residents in the macro area.
- The contractor must ensure that he is well aware of the implications of and must ensure compliance with the following legal requirements, guidelines and policies:
 - To identify the most effective time schedule for construction activities to take place on the applicable properties;
 - All relevant Eskom standards, specifications and procedures to manage the significant aspects with regards to oil management, bush clearing, entrance of private property, etc.
 - Requirements in terms of removing cutting and/or trimming of protected trees in terms of the National Forests Act (Act 84 of 1998).
 - All Sections and Regulations of the National Water Act, 1998 (Act 36 of 1998) must be complied with; specifically specifications as described in Section 19 on Pollution and Waste.
 - Environmental Best Practice Guidelines and Specifications, compiled by the Department of Water Affairs.
 - Legislation with regard to graves that is included in the National Heritage Resources Act (No 25 of 1999). It should be noted that the Act also distinguishes between various categories of graves and burial grounds. Other legislation with regard to graves includes those which apply when graves are exhumed and relocated,

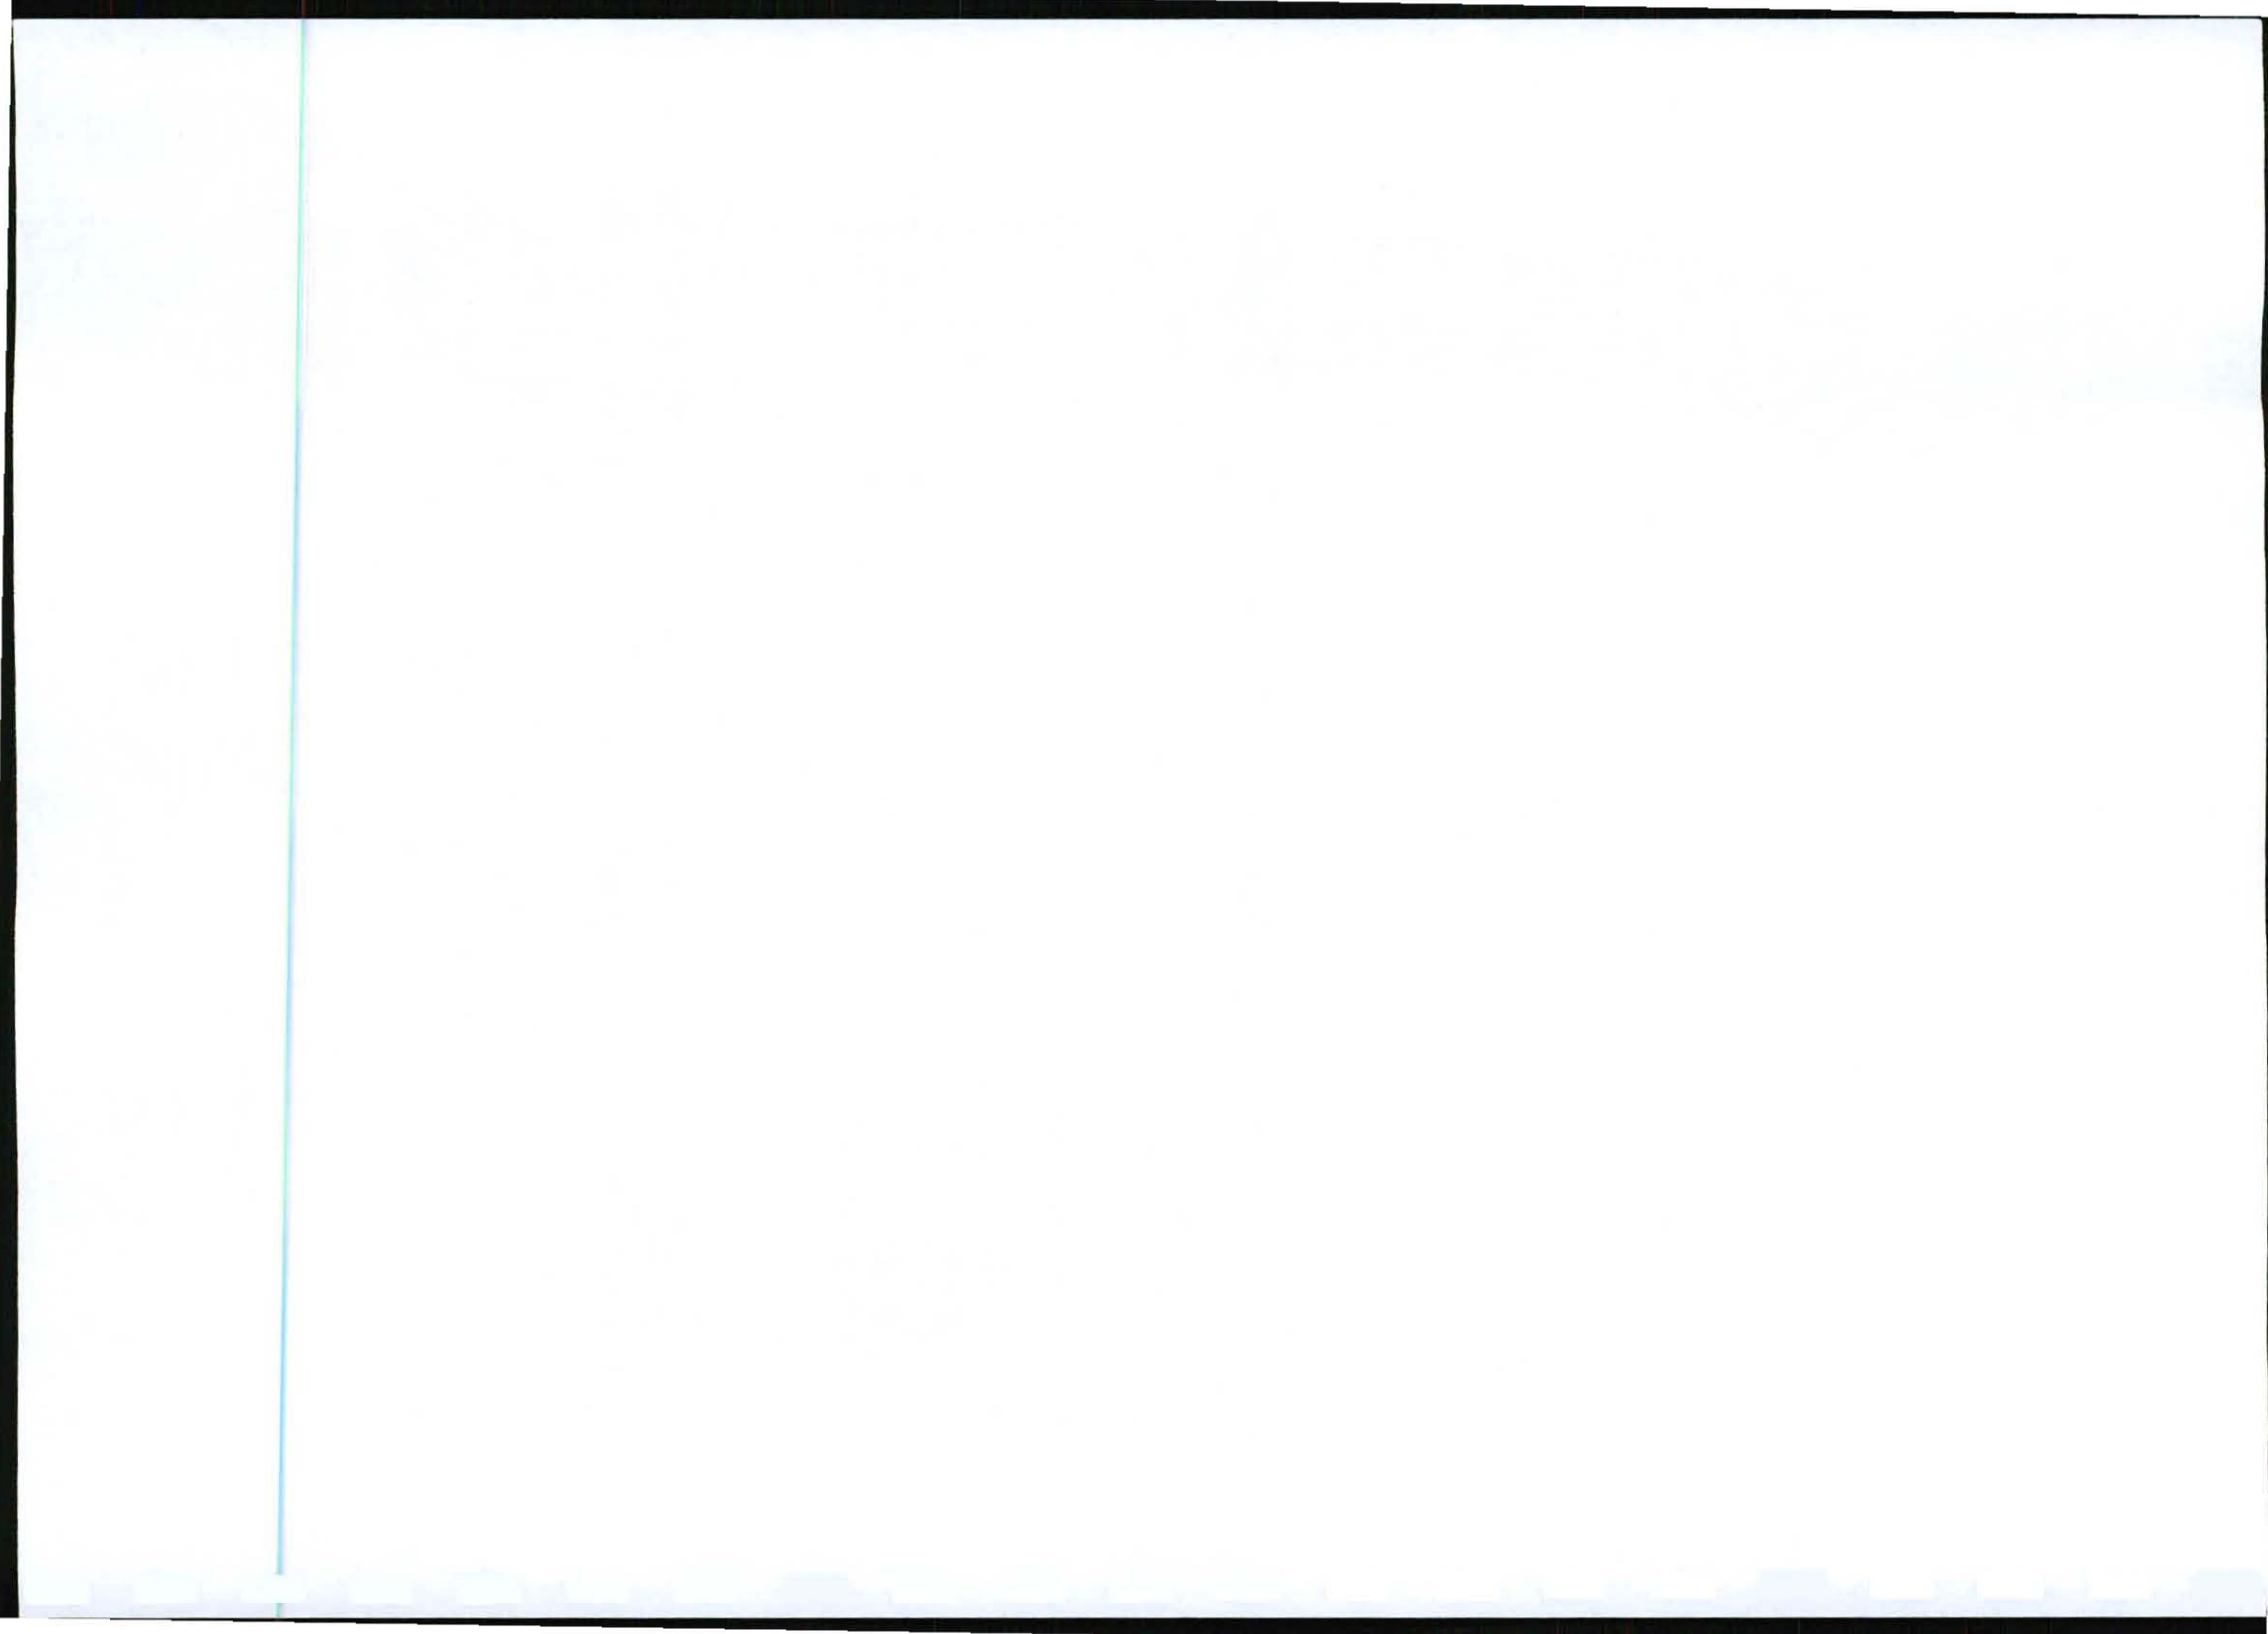

namely the Ordinance on Exhumations (No 12 of 1980) and the Human Tissues Act (No 65 of 1983 as amended).

- The contractor must be aware that all waste material generated during and after construction that cannot be recycled should be transported to the appropriate landfill site licensed in terms of section 20 (b) of the National Environment Management Waste Act, 2008 (Act No 59 of 2008). An agreement letter between the municipality and the contractor should be submitted to the regional office of the Department of Water Affairs regarding the disposal of such waste material. Proof to be kept on site.

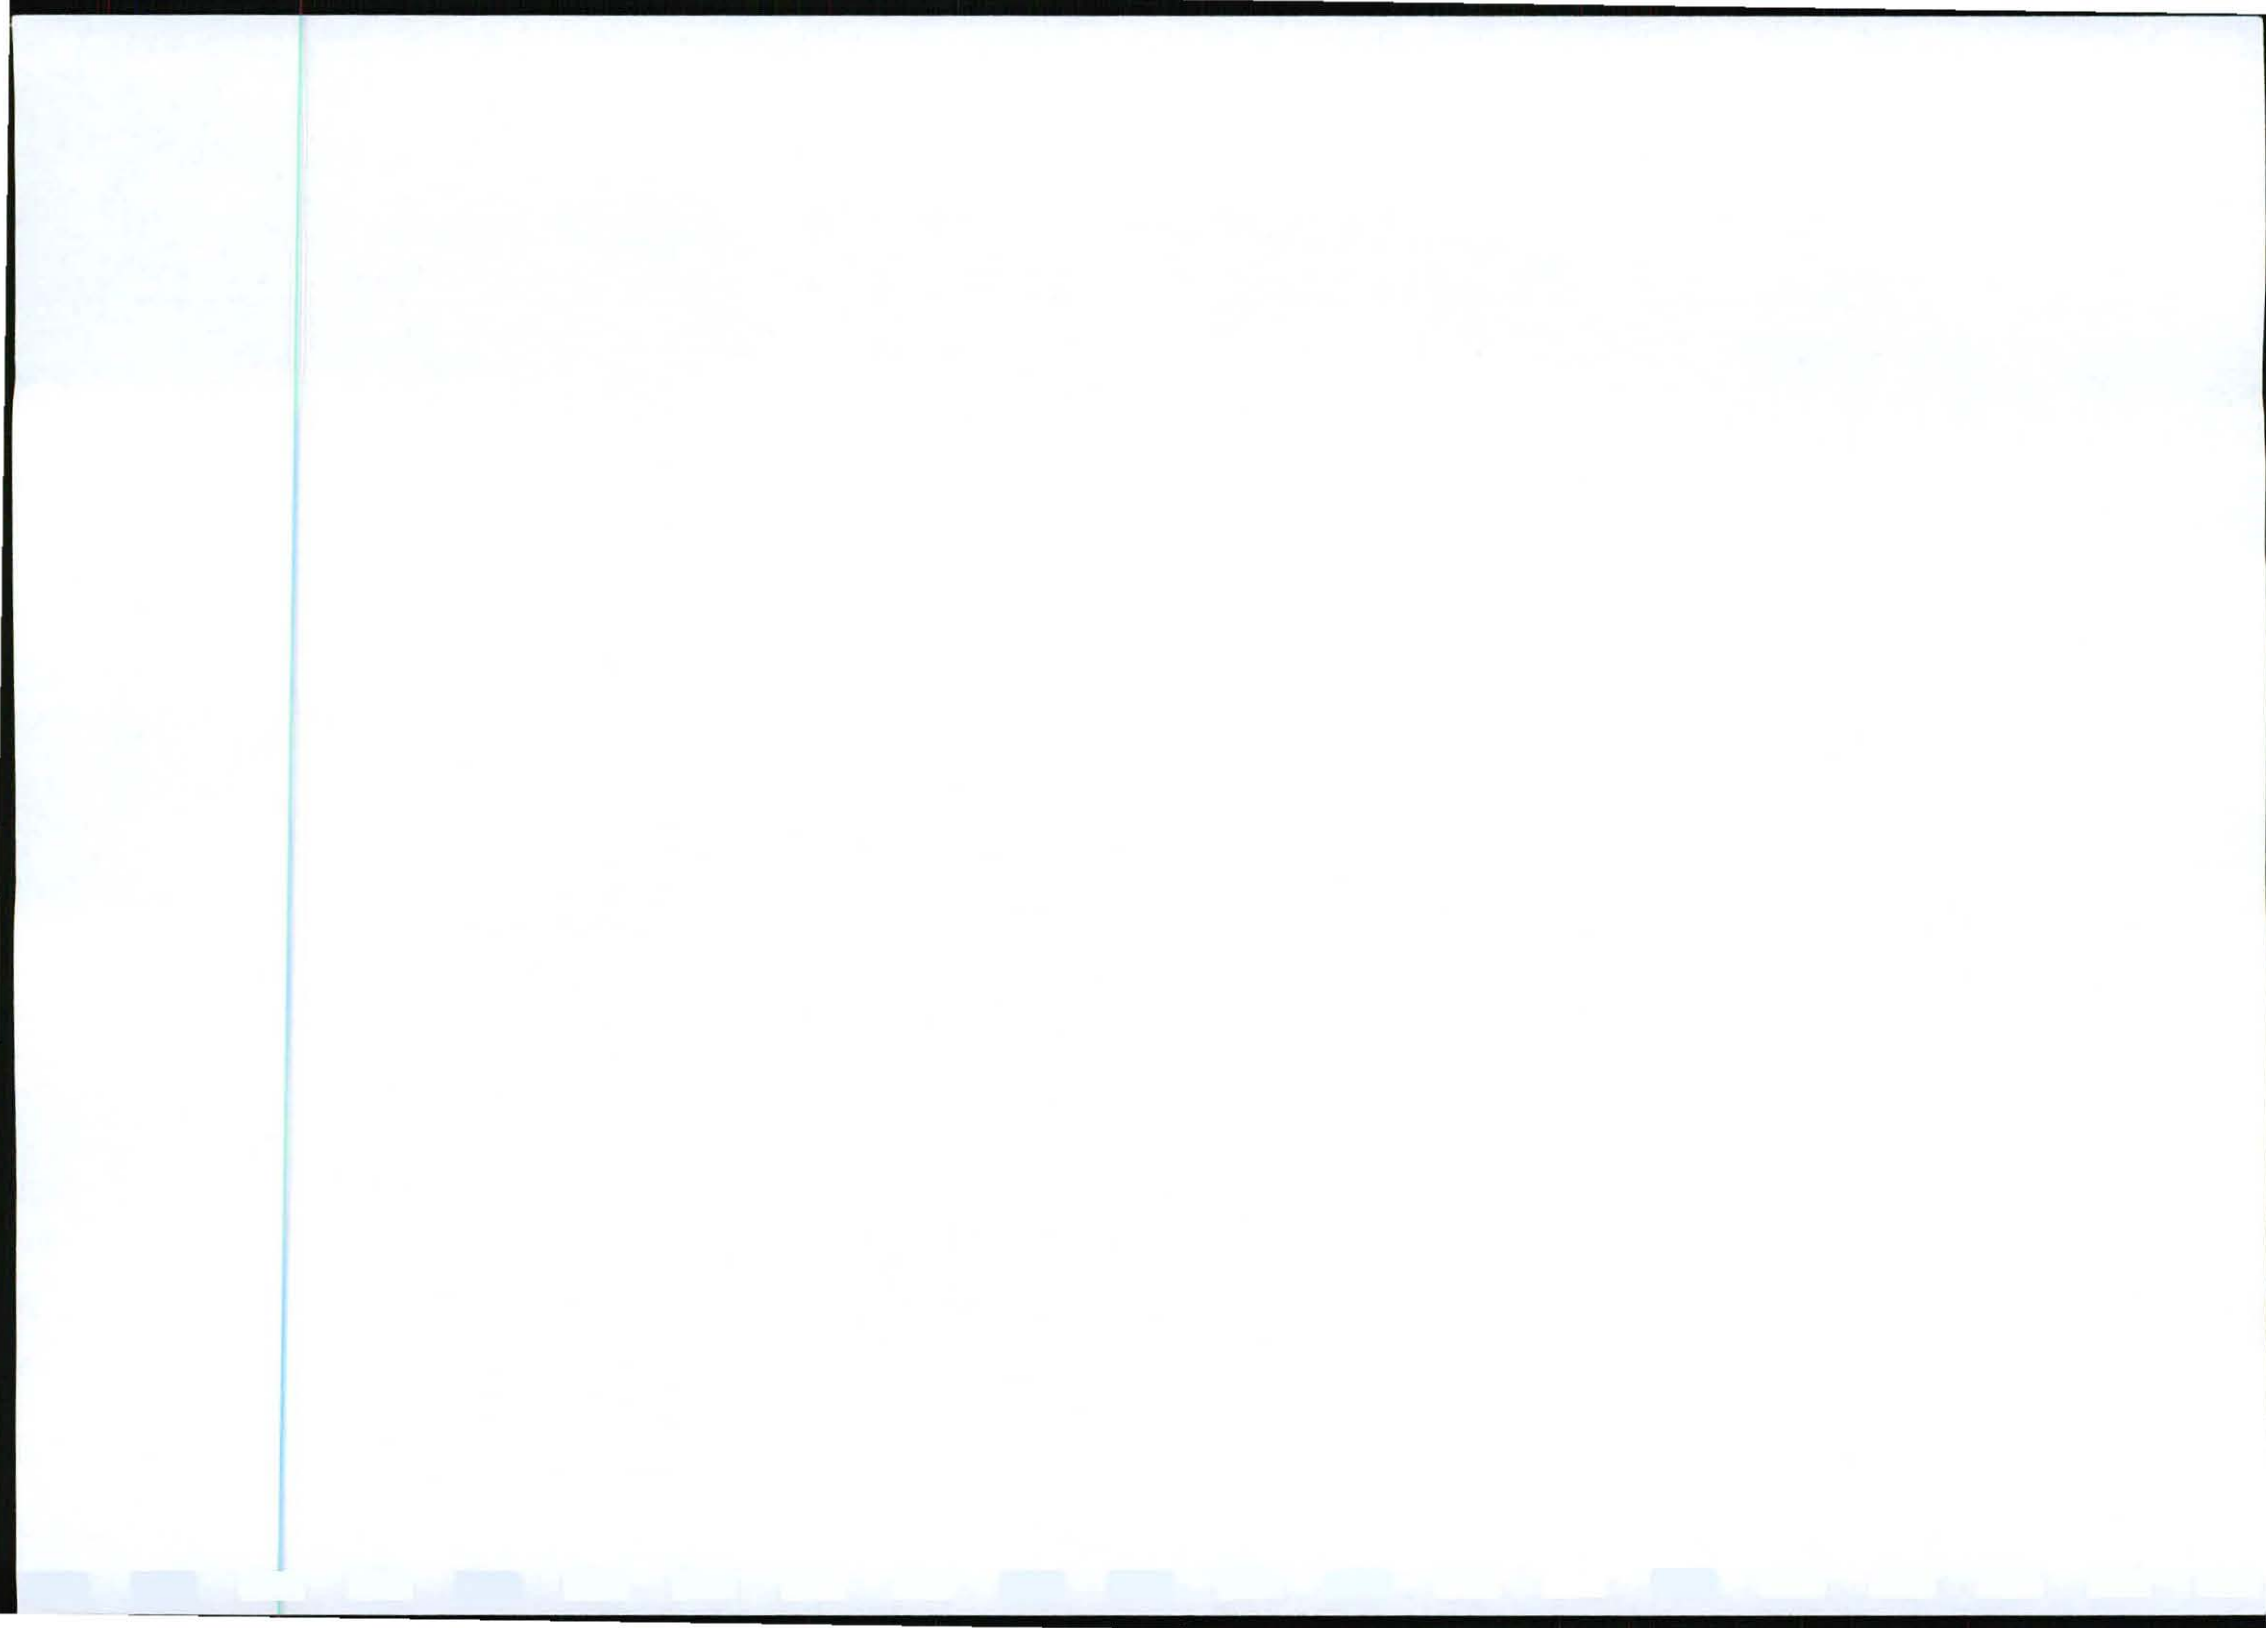

GROUND AND SURFACE WATER


- Site-specific mitigatory requirements as included in the table in the section "Specifications applicable to all Phases of Project Development" must be adhered to.
- No water for drinking or cooking purposes should be used from out of streams, vleis or farm dams in the vicinity. It is important for relevant management or contractors to ensure that staff/workers are supplied regularly with adequate clean drinking and cooking water.
- Water should be sourced/purchased from farmers in the area with existing water rights and delivered to the site in the applicable water tankers.
- In all cases, abstraction of water for construction purposes will require a permit from the Department of Water Affairs unless pre-existing rights are purchased from farmers.
- All storm water run-offs must be managed efficiently so as to avoid storm water damage and erosion to adjacent properties.
- During and after construction, storm water control measures should be implemented especially around stockpiled soil, excavated areas, trenches etc. to avoid the export of soil into the watercourse.
- Storm water should not be discharged into the working areas and it should be ensured that storm water leaving the footprint of the proposed development areas is not contaminated by any substance, whether that substance is solid, liquid, vapor or any combination thereof.
- Stockpiling of construction material and soils should be such that pollution of water resources is prevented and that the materials will be retained in a storm event.
- It is strongly recommended that no construction of any sort takes place within aquatic and riparian habitats encountered, as these habitats are viewed as sensitive.

Rivers, seasonal streams and drainage lines

- Of relevance is, that the Mokolo River and Poer se Loop along with a few seasonal streams and drainage lines cross the corridors for the powerlines. These need to be completely avoided and no pylons may be placed directly within any one of these water courses.
- No temporary or other construction facilities to be erected or stored within 200m of the banks of the Mokolo River or the Poer se Loop stream.
- Positioning of any pylons need to be a minimum of 30m from the edge of the river banks or outside of the 1 in 100 year floodline, whichever is furthest.
- Positioning of the foundation slabs for the pylons must be a minimum of 10m away from the edge of all drainage lines.
- Under no circumstances may a pylon be placed directly in the bed of a river or drainage line.
- No temporary ablution facilities to be placed within 200m of the banks of any of the rivers or seasonal streams.
- No temporary ablution facilities to be placed within 200m of any drainage line, even if they are dry.
- All stream crossings are considered as sensitive areas and no traffic are allowed through it (only at properly constructed bridges) during construction or maintenance of the power line.
- No fishing, capture of any water or land animals, or removal of water plants or other vegetation for food to be allowed.

Construction camp

- Camp site, storage facilities and other necessary temporary structures to be erected within the immediate area demarcated for the Bulge River substation and the Dorset substation. With the possibility of another one (maximum two) temporary sites within the powerline corridors due to the distance between the substations.
- Encourage the construction contractor to employ local people as far as is reasonably practical and encourage the contractor to transport them daily to and from site. This will reduce solid and liquid waste production and water demand at the site camps.
- According to the applicant and their contractors, accommodation for the construction workers is mostly rented in the nearest town. Sewage disposal will therefore be through the Municipality's main sewer line. Should accommodation in a construction camp be unavoidable, then the measures as stipulated in the EMP must be adhered to.

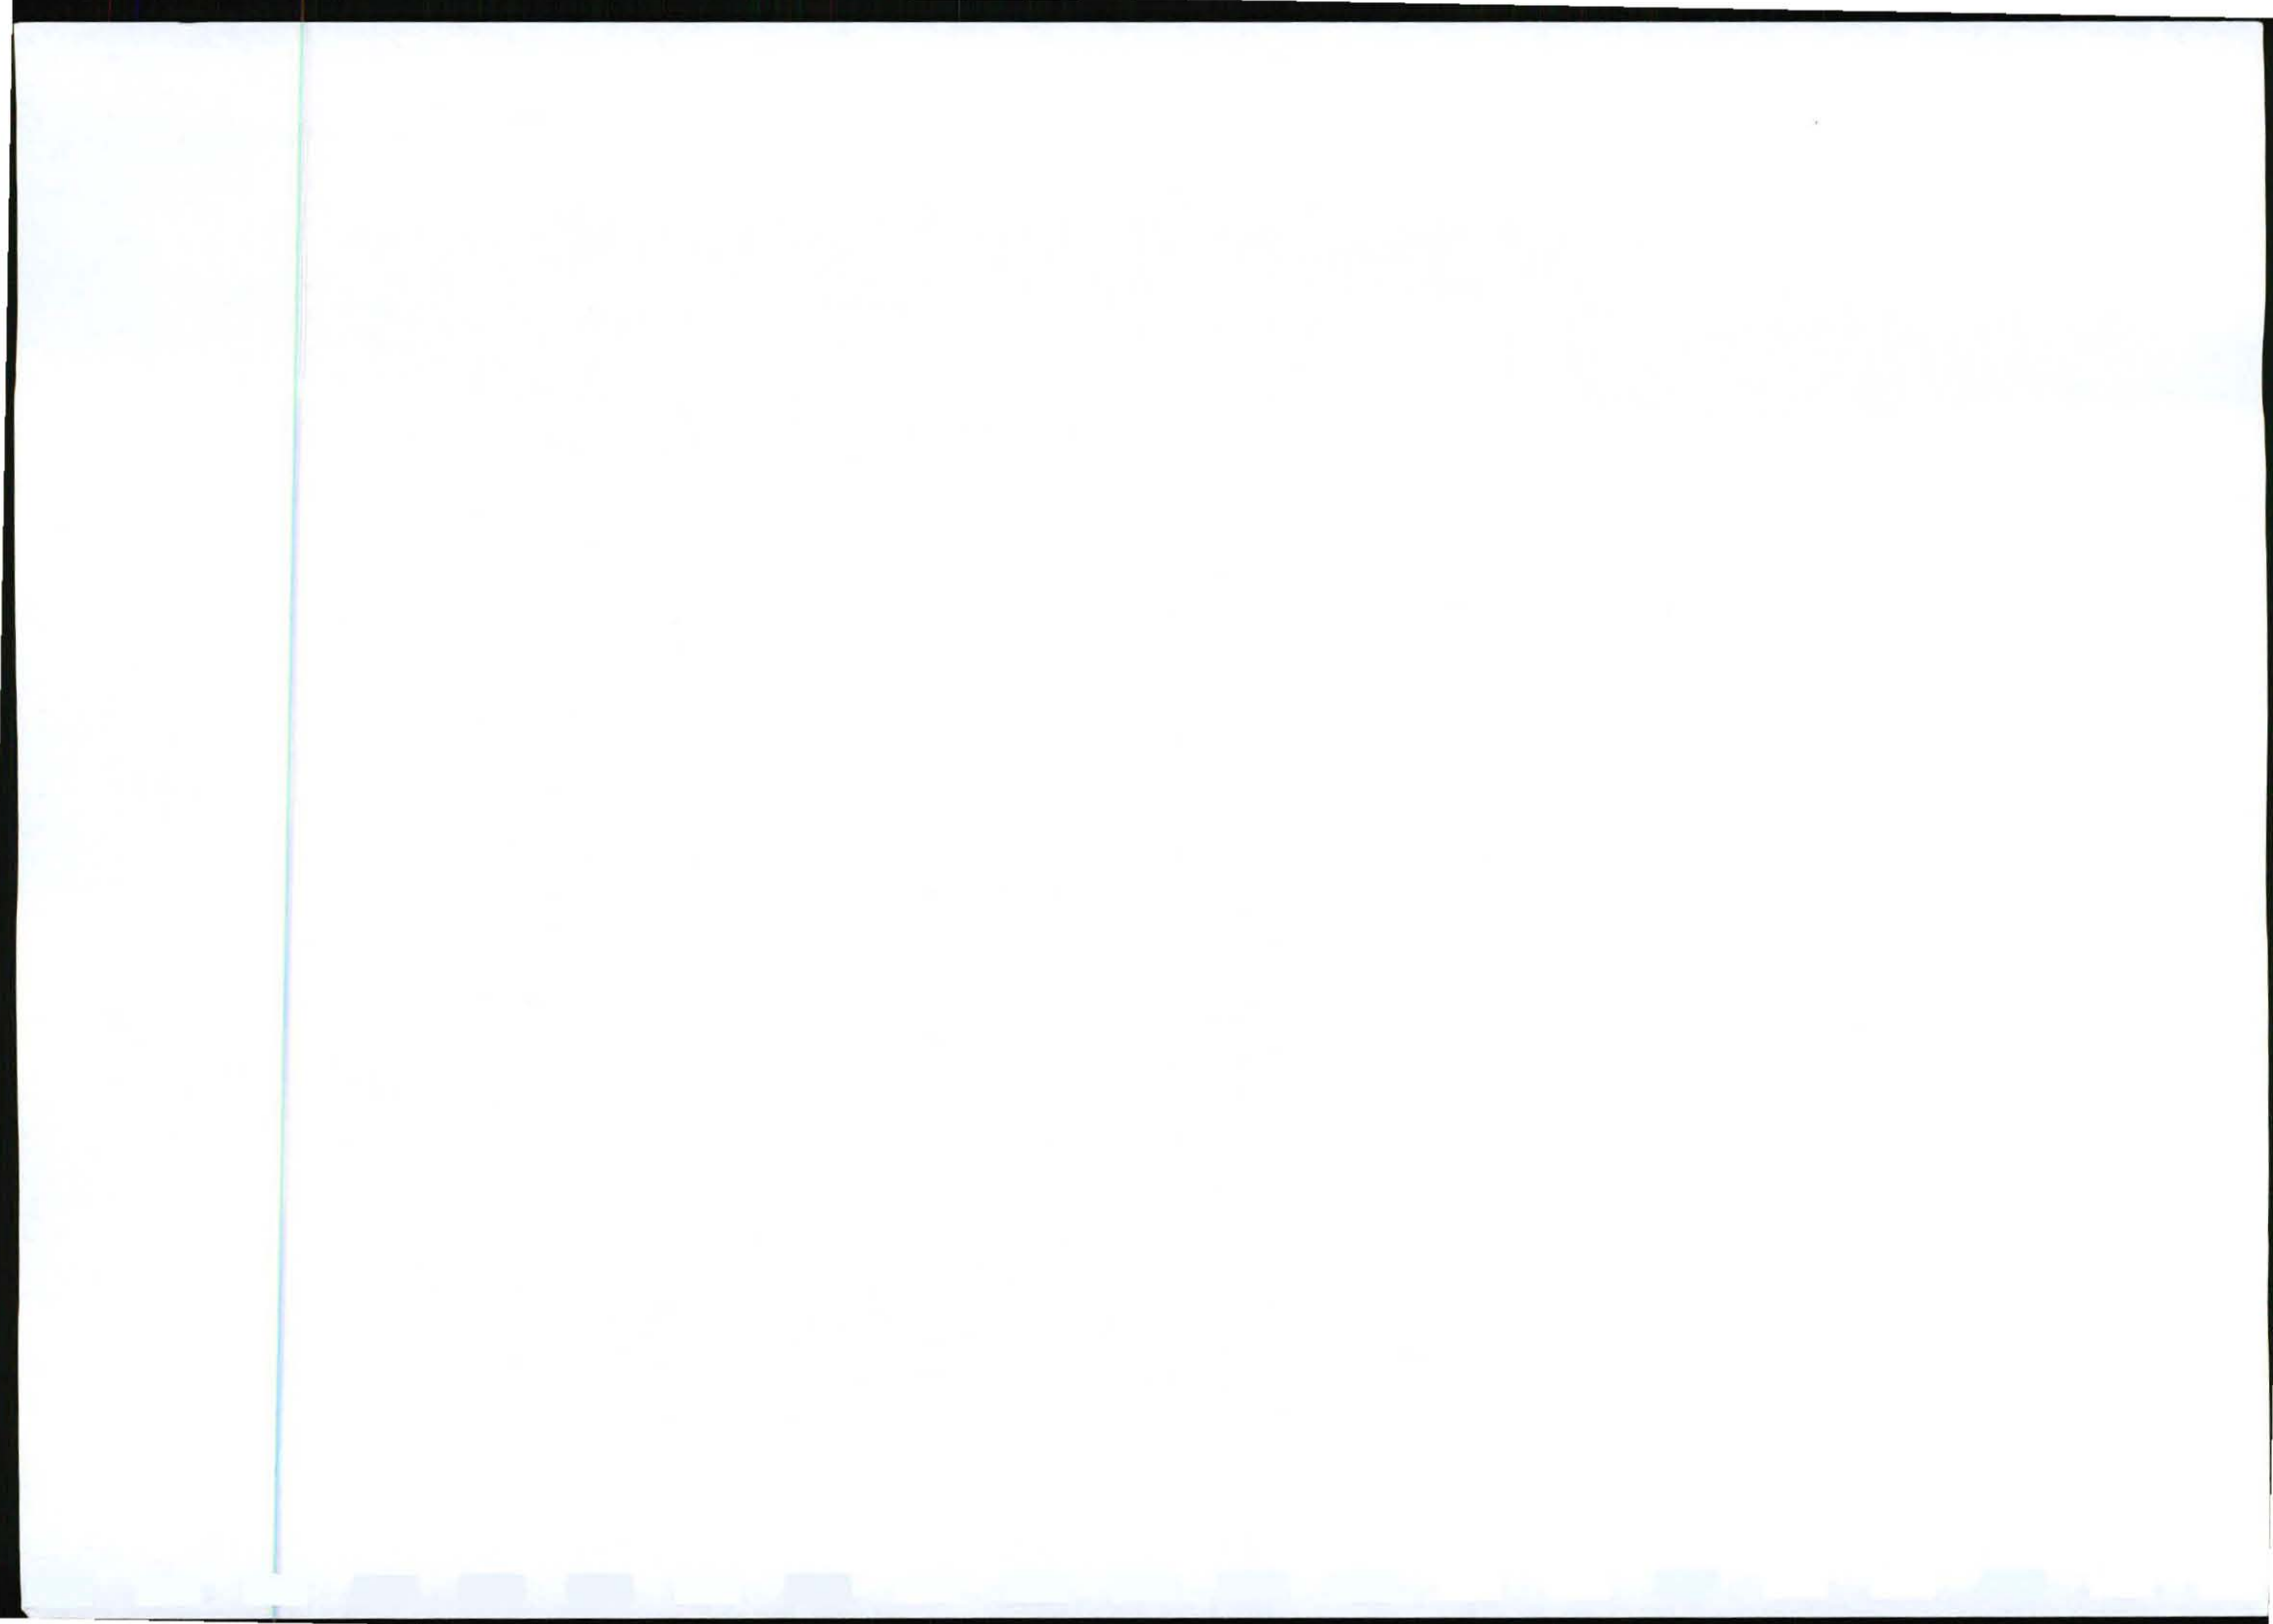

- Included as requirement in the EMPr under heading "*Waste Management*" is the following: The disposal of chemical toilets should be at a registered or licensed sewage disposal facility. Proof of agreement between the applicant and the sewage disposal facility for such disposal, confirming that there will be enough capacity to accommodate additional waste, should be submitted to the Department of Water Affairs.
- No water for drinking or cooking purposes should be used from out of streams, vleis or farm dams in the vicinity. It is important for relevant management or contractors to ensure that staff/workers are supplied regularly with adequate clean drinking and cooking water.
- The water used to supply the site with potable water is sourced/purchased from farmers in the area with pre-existing rights. The contractor should deliver the water to the site in the applicable water tankers. These requirements are included in the EMPr under the headings "*Construction site*" and "*Ground and Surface Water*".
- In all cases, abstraction of water for construction purposes will require a permit from the Department of Water Affairs unless pre-existing rights are purchased from farmers. For this project, water tanks will be used during construction.
- Mixing of cement, concrete, paints, solvents, sealants and adhesive must be done in specified areas on concrete aprons or on protected plastic linings to contain spillage or overflows onto soil to avoid contamination of underground water.
- No material or machinery to be stored or placed in the open veld outside the designated area of the powerline corridors.
- Proper and adequate containers (rubbish bins) to be placed in campsites for the temporary disposal of food waste and general litter generated by construction workers. These containers need to close securely to avoid items (eg. Paper and plastic) been blown into the veld, etc. Proper waste management is essential.

Diesel, hydraulic fluid and lubricants


- Minimize on-site storage of petroleum products. Relevant to this project, is that the relevant dangerous goods to be stored on site is diesel. The diesel tank can hold 2000 litres (2 cubic metres). Of relevance is: GNR 544 of 2010, activity nr 13 that states "...storages of dangerous goods with a capacity above 80 cubic metres....". The amount of diesel that will be stored on site is 2 cubic metres and is therefore a relatively small amount and well below the threshold of the listed activity of 80 cubic metres.
- Precautionary methods to be implemented for handling of oil and substances that could impact on the soils, ground- and surface water :
- No hazardous substances may be stored on site for a period exceeding 90 days. (Note that the Department of Water Affairs requires a permit for a waste disposal site in the event that longer storage periods apply).
- All hazardous substances at the site must be adequately stored and accurately identified, recorded and labeled. The storage of any hazardous substances must take place in a secured lock-up building or covered area.
- Build adequate structures (berms and containment structures) to contain any oil spills that might emanate from transformers.
- Bund storage tanks to 120% of capacity.
- Ensure proper maintenance procedures in place for vehicles and equipment.
- Servicing of vehicles to be in designated areas with appropriate spill management procedures in place.
- Ensure measures to contain spills readily available on site (spill kits).
- A container filled with sand to soak up any spillages, as well as an empty container into which the "contaminated" sand could be placed and stored for collection by the supplier of the chemicals or oils must be provided.
- If spills occur it should be reported to the SECO and/or ECO with immediate effect. It should be immediately cleaned up to the satisfaction of the Regional Representative of the Department of Water Affairs by removing the spillage together with the polluted soil and by disposing it at an authorized waste disposal site. The Department should be notified of such spills within 24 hours of the incident.

Site camp domestic waste (kitchens, showers)

- Deposit solid waste in containers and dispose of regularly- at least weekly. Any waste that cannot be recycled will be transported to the appropriate landfill site licensed in terms of section 20 (b) of the National Environment Management Waste Act, 2008 (Act No 59 of 2008). Proof to be kept by contractor.
- Under no circumstances may any waste food or general litter be dumped, or buried in the veld.
- Dispose of liquid waste (grey water) with sewerage.

Site camp sewage

- Minimize on-site accommodation.

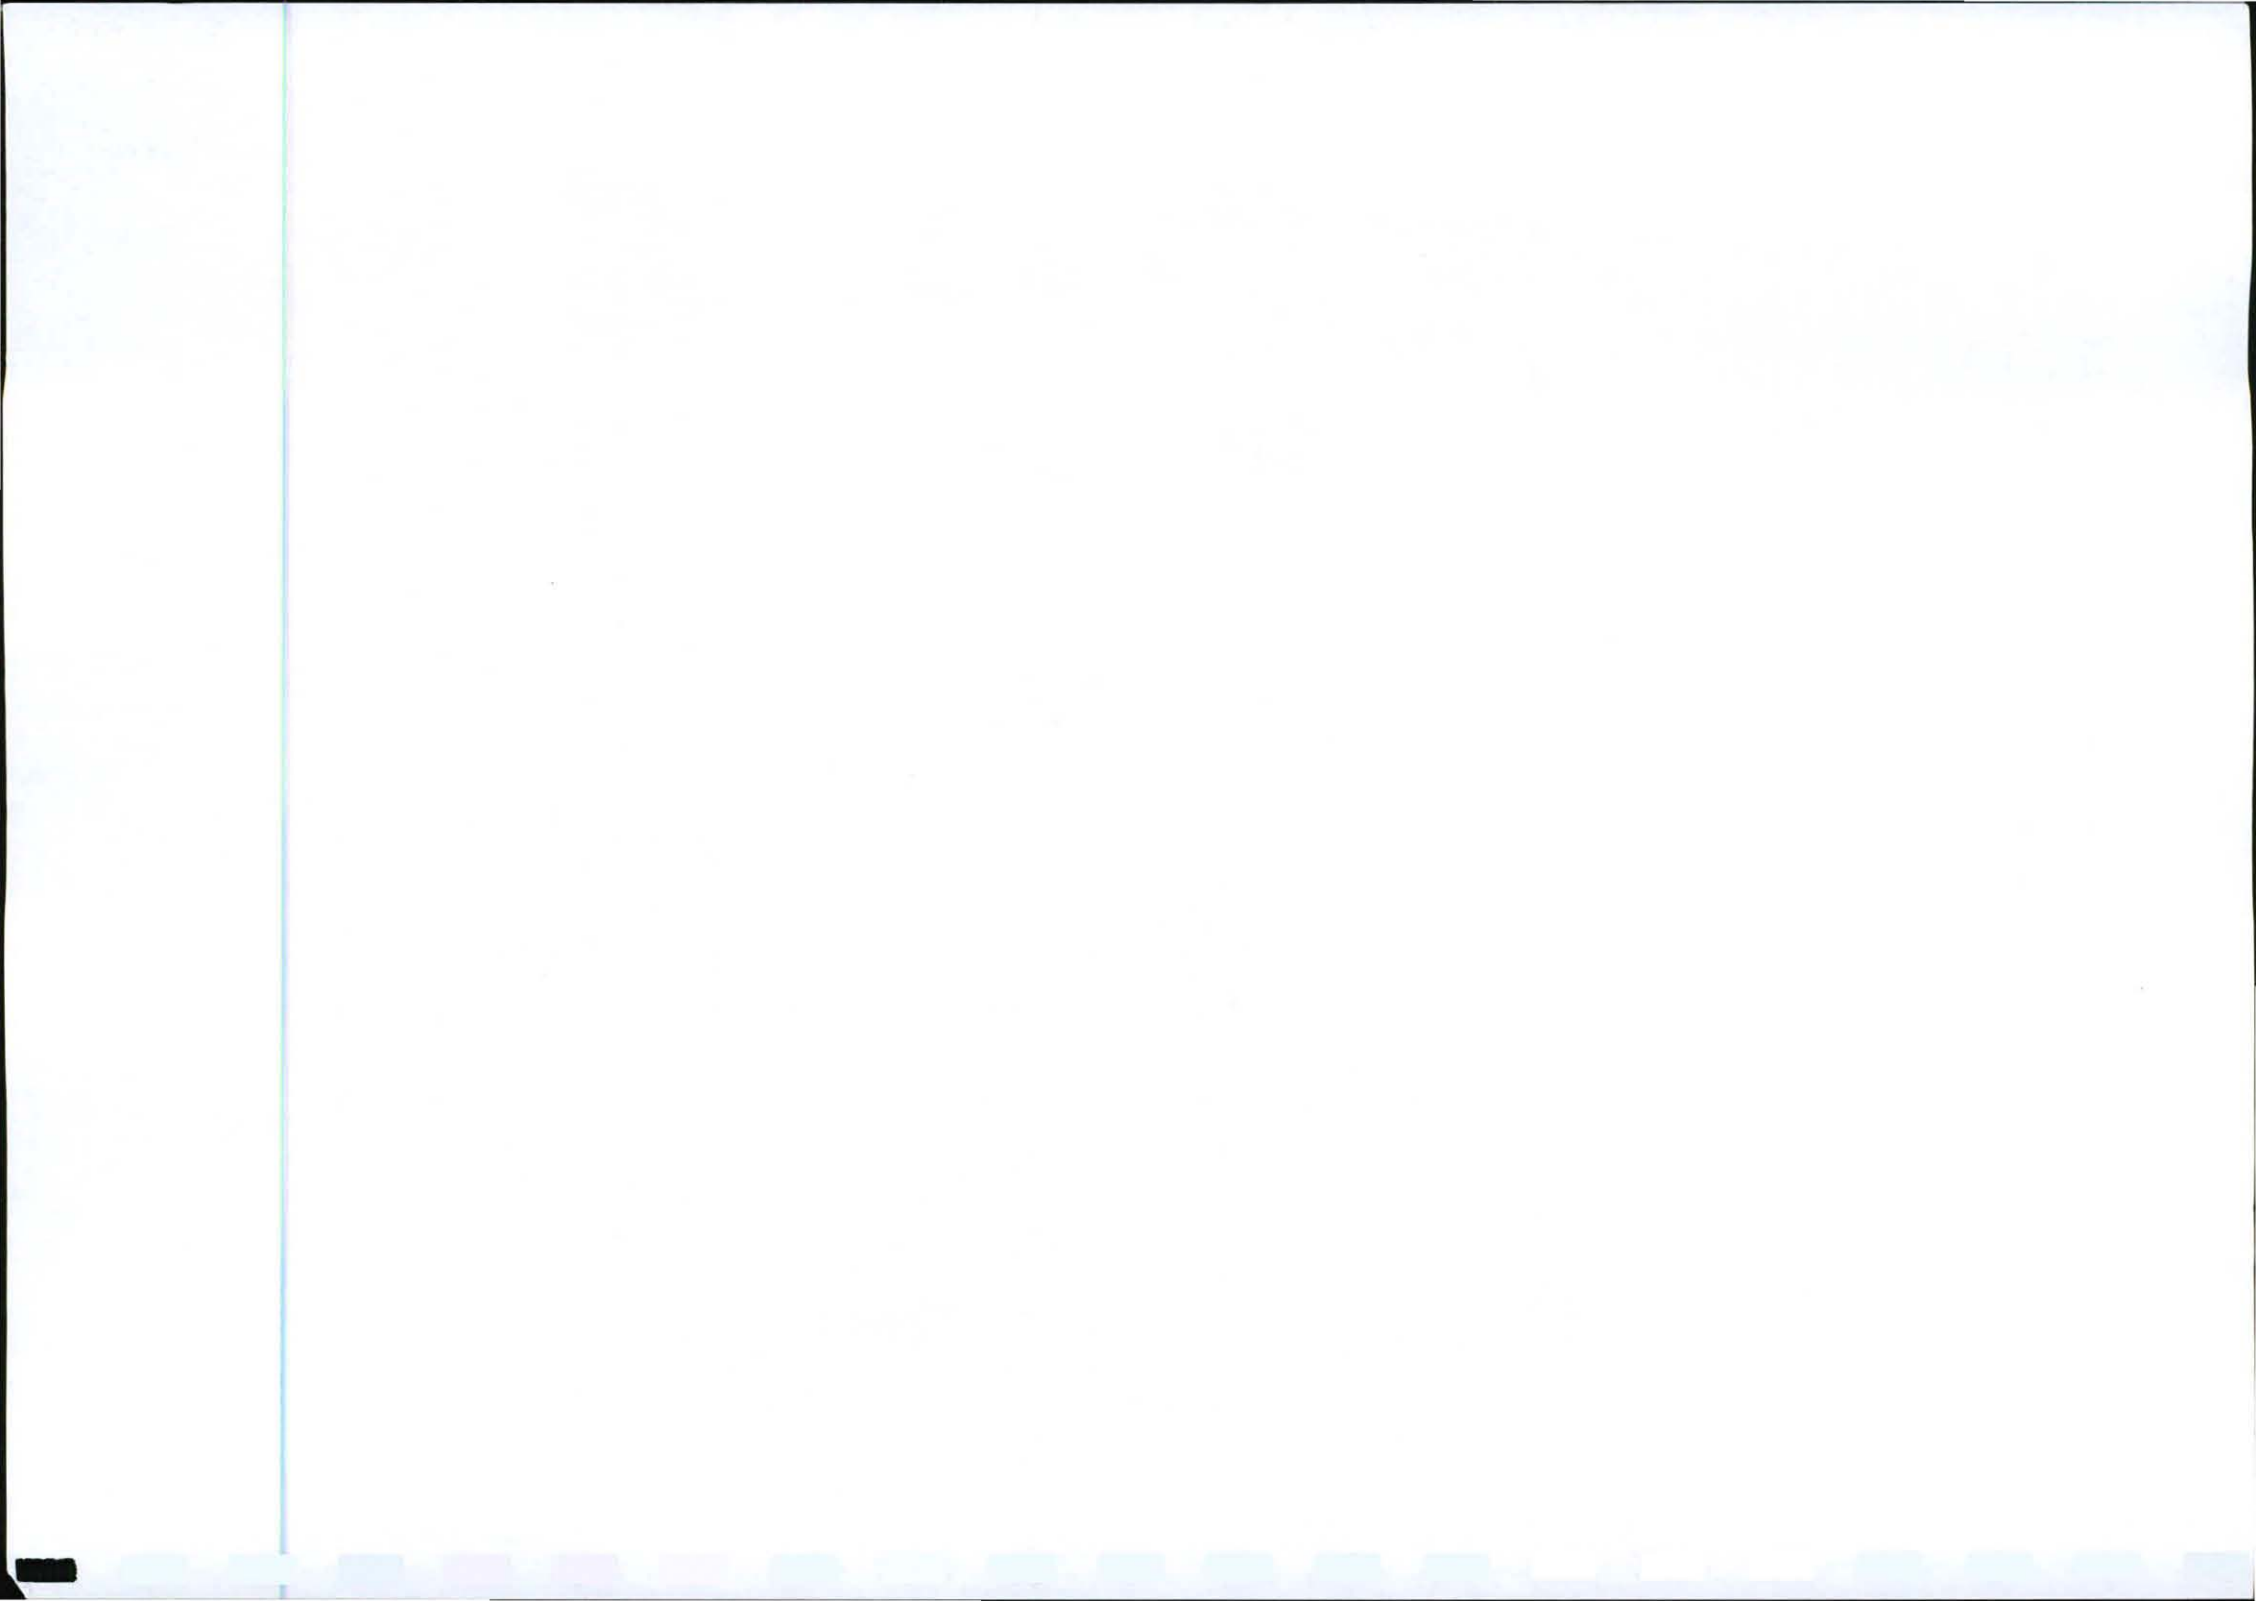


- Supply, maintain and enforce the use of mobile toilets at the work sites. Only proper portable, chemical ablution facilities to be used and these to be positioned only within the 31m powerline servitudes.
- No temporary ablution facilities to be placed within 200m of the banks of any of the rivers, streams or drainage lines (even those that are dry during the time of construction).
- Included as requirement in the EMPr under heading "*Waste Management*" is the following: The disposal of chemical toilets should be on a regular basis and at a registered or licensed sewage disposal facility. Proof of agreement between the applicant and the sewage disposal facility for such disposal, confirming that there will be enough capacity to accommodate additional waste, should be submitted to the Department of Water Affairs.
- Under no circumstances may any effluent or sewage to be dumped (or buried) in the open veld.

Site camp inert waste (waste concrete, reinforcing rods, waste bags, wire, timber etc)

- Ensure compliance with stringent clean up requirements on site. As a general requirement, disposal should be at least twice a week.
- The solid waste will be transported off site by the contractor and returned to Eskom Stores where the scrap will be handed over to buyers (scrap dealers). Mostly the waste is steel that is recycled and taken to the Eskom stores. Other waste is normally the used cement bags and this is disposed of in the construction hole for the pylon. The bags will be mixed into the cement and used to fill the excavated hole of the pylon. Any other waste that cannot be recycled (this is minimal) will be transported to an appropriate landfill site licensed in terms of section 20 (b) of the National Environment Management Waste Act, 2008 (Act No 59 of 2008). The disposal of any construction waste will be the responsibility of the developer and should be done at least twice a week. A letter of agreement between the developer and the Permit Holder of the waste disposal site shall be provided to the DWA.
- These measures are also included as requirements in the EMPr under the headings "*Appointment of Contractors*" and "*Waste Management*". Also refer to the other mitigation measures under the same headings.

WASTE MANAGEMENT

- Proper and adequate containers (rubbish bins) to be placed in campsites for the temporary disposal of food waste and general litter generated by construction workers. These containers need to close securely to avoid items (eg. Paper and plastic) been blown into the veld, etc. Disposal should be regularly- at least twice a week.
- The site camp inert waste shall be transported off site by the contractor and returned to Eskom Stores where the scrap will be handed over to buyers (scrap dealers).
- Any **other waste that cannot be recycled**, shall be transported to an appropriate landfill site licensed in terms of section 20 (b) of the National Environment Management Waste Act, 2008 (Act No 59 of 2008).
- The disposal of any construction waste will be the responsibility of the developer and should be done at least twice a week. A letter of agreement between the developer and the Permit Holder of the waste disposal site shall be provided to the DWA. Proof to be kept on site.
- Dispose of liquid waste (grey water) with sewerage.
- Chemical toilets should be provided for employees on site and their disposal should be at a registered or licensed sewage disposal facility. Proof of agreement between the applicant and the sewage disposal facility for such disposal, confirming that there will be enough capacity to accommodate additional waste, should be submitted to the Department of Water Affairs.
- Minimize on-site storage of petroleum products. Relevant to this project, is that the only relevant dangerous goods to be stored on site is diesel. The diesel tank can hold 2000 litres (2 cubic metres). Of relevance is: GNR 544, activity nr 13 that states "...storages of dangerous goods with a capacity above 80 cubic metres..." is a listed activity. The amount of diesel that will be stored on site is therefore relatively small and well below the threshold of the listed activity of above 80 cubic metres.
- *Precautionary measures* to be implemented for handling of oil and substances that could impact on the soils, ground- and surface water :
 - No hazardous substances may be stored on site for a period exceeding 90 days. (Note that the Department of Water Affairs requires a permit for a waste disposal site in the event that longer storage periods apply).
 - All hazardous substances, *if any*, at the site must be adequately stored and accurately identified, recorded and labeled. The storage of any hazardous substances must take place in a secured lock-up building or covered area. All these hazardous substances should be disposed of at a licensed Class H site.
 - Build adequate structures (berms and containment structures) to contain any oil spills which might emanate from transformers (relevant to this project is that no substation with its applicable transformers will be constructed).

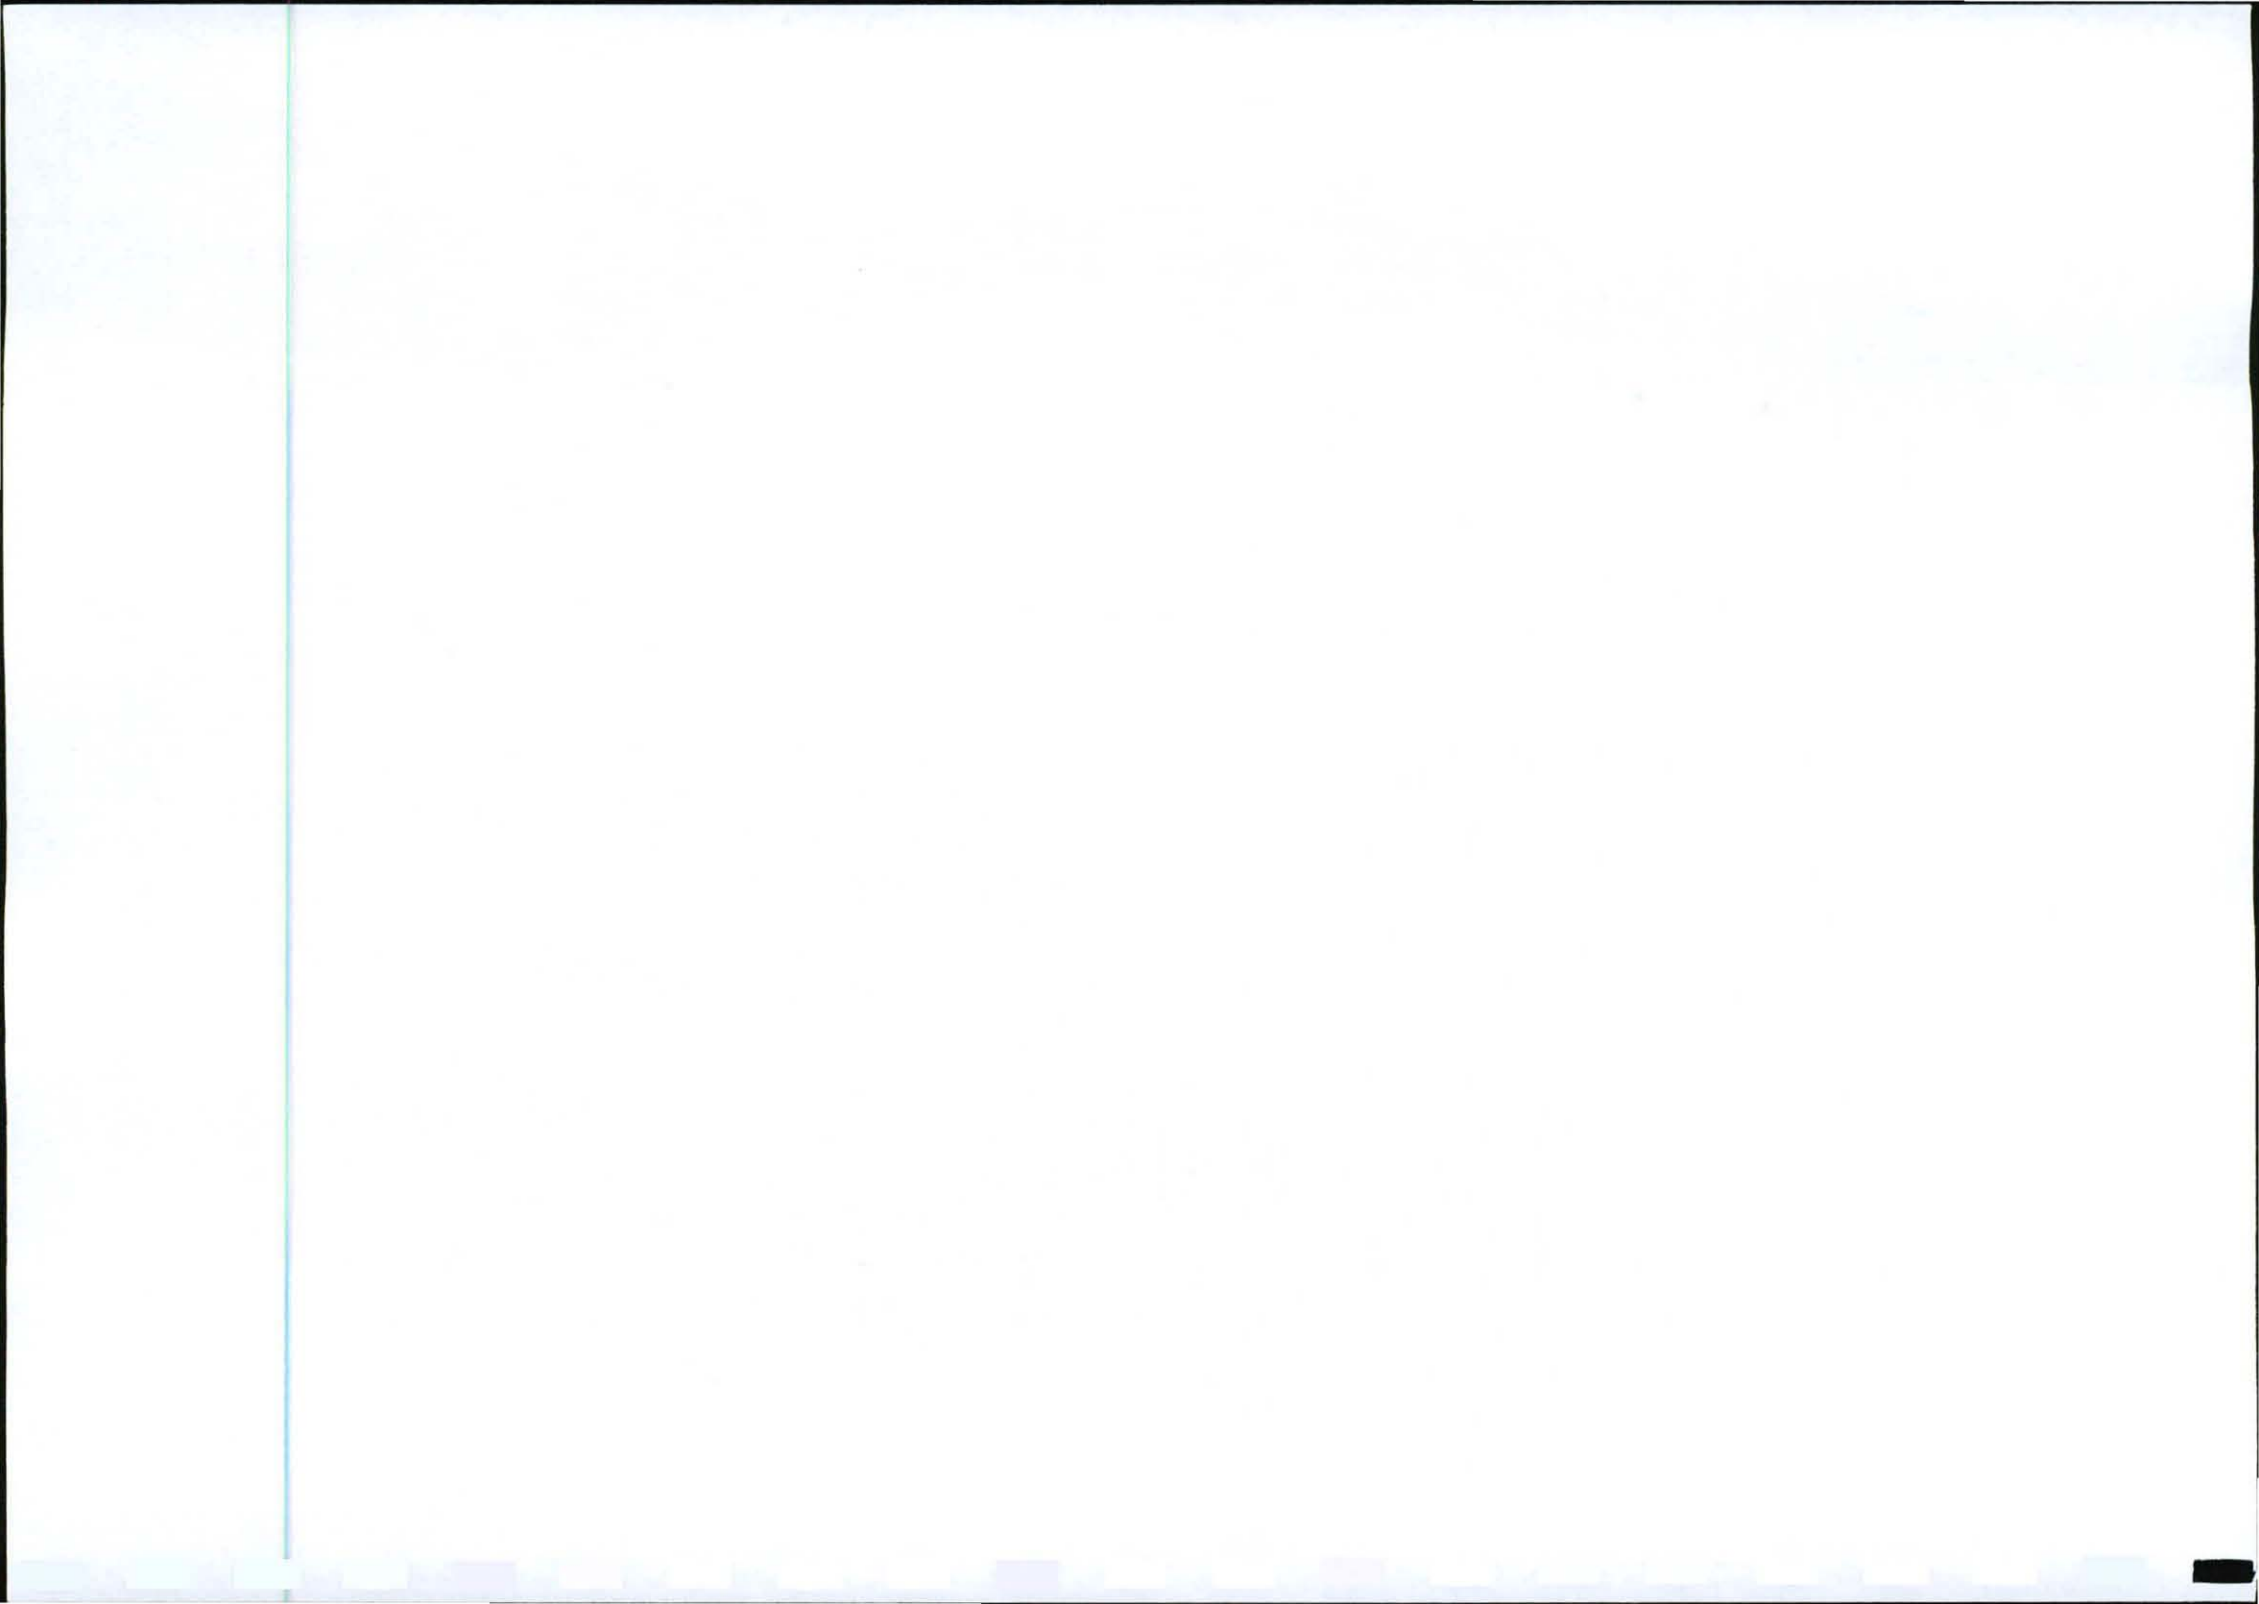

- Bund storage tanks to 120% of capacity.
- Ensure proper maintenance procedures in place for vehicles and equipment.
- Servicing of vehicles to be in designated areas with appropriate spill management procedures in place.
- Ensure measures to contain spills readily available on site (spill kits).
- A container filled with sand to soak up any spillages, as well as an empty container into which the "contaminated" sand could be placed and stored for collection by the supplier of the chemicals or oils must be provided.
- In case of a spill, any oil-contaminated waste (soil, cloths used to clean small spills etc) must be disposed of at a facility that is registered as a hazardous landfill.
- The Regional Representative of the Department of Water Affairs and Forestry (tel 012- 392 1411) should immediately be informed if pollution of any groundwater or soils occurs. They will give instruction on actions to be taken in this regard.


PREPARATION OF SERVITUDE / VEGETATION CLEARANCE

- Site-specific mitigation requirements as included in the section "Specifications applicable to all Phases of Project Development" must be adhered to.
- The procedures for vegetation clearance and maintenance within overhead power line servitudes and on Eskom owned land, updated September 2009 must be implemented.

The minimum standards are summarised as a guideline as follows:

Item	Standard	Follow up
Centre line of proposed powerline	Specification for width of vegetation clearance on new lines (above 33kV) shall be determined based on the EIA and EMP. New power line, 33kV and below, an 8 metre (or as determined per site) wide strip of identified vegetation along the centre line should be cleared. If Required, 5 meter wide strip to be cut close to the ground (50 mm) for access purposes.	Re-growth shall be cut within 50 mm of the ground and/or treated with herbicide as necessary.
Inaccessible valleys (trace line)	If no other alternative, clear a 1 metre strip for access by foot, only for the pulling of a pilot wire by hand, or make use of a helicopter, or other technique, to fly line across.	Vegetation not to be disturbed after initial clearing- vegetation to regrow.
Tower position and support/stay wire position	Clear all vegetation within proposed tower position and within a maximum (depending on the tower type and voltage) radius of 5 m around the position, including destumping /cutting stumps to ground level, treating with an herbicide and re-compaction of soil.	Re-growth to be cut at ground level and treated with herbicide as necessary.
Indigenous vegetation within servitude area (outside of the maximum 8 m strip)	Selective trimming or cutting down of those identified plants interfering or posing a threat to the integrity of the power line.	Selective trimming
Alien species (Declared Weeds ito CARA Reg 229) within servitude area (outside of the maximum 8 m strip)	Control programme to be implemented as per above procedure. Trimming need not be selective.	Cut and treat with appropriate herbicide.

- Indigenous vegetation that does not interfere with the safe operation of the power line should be left undisturbed. No indigenous trees or shrubs outside of the power line corridor of 8m to be removed, although due to the grassland vegetation of the study area very few occur except along the escarpment ridge.
- Where clearing for an access and maintenance road is essential, the maximum width to be cleared is 8m. Existing access roads should be used as far as possible.
- Clearing for pylon positions must be the minimum required for the specific tower, not more than a 5m radius around the structure position.
- Temporary access roads for vehicles carrying equipment, materials, etc. into the power line corridors need to be kept to an absolute minimum. None of these access roads may cross through sensitive areas.
- Ensure that no trees or existing grass strata outside of the servitude corridor be removed to lower any kinetic energy of potential run-off, that disturbed surface areas in the construction phase be restored and lastly that no open trenches or mounds of soils created during construction be left.

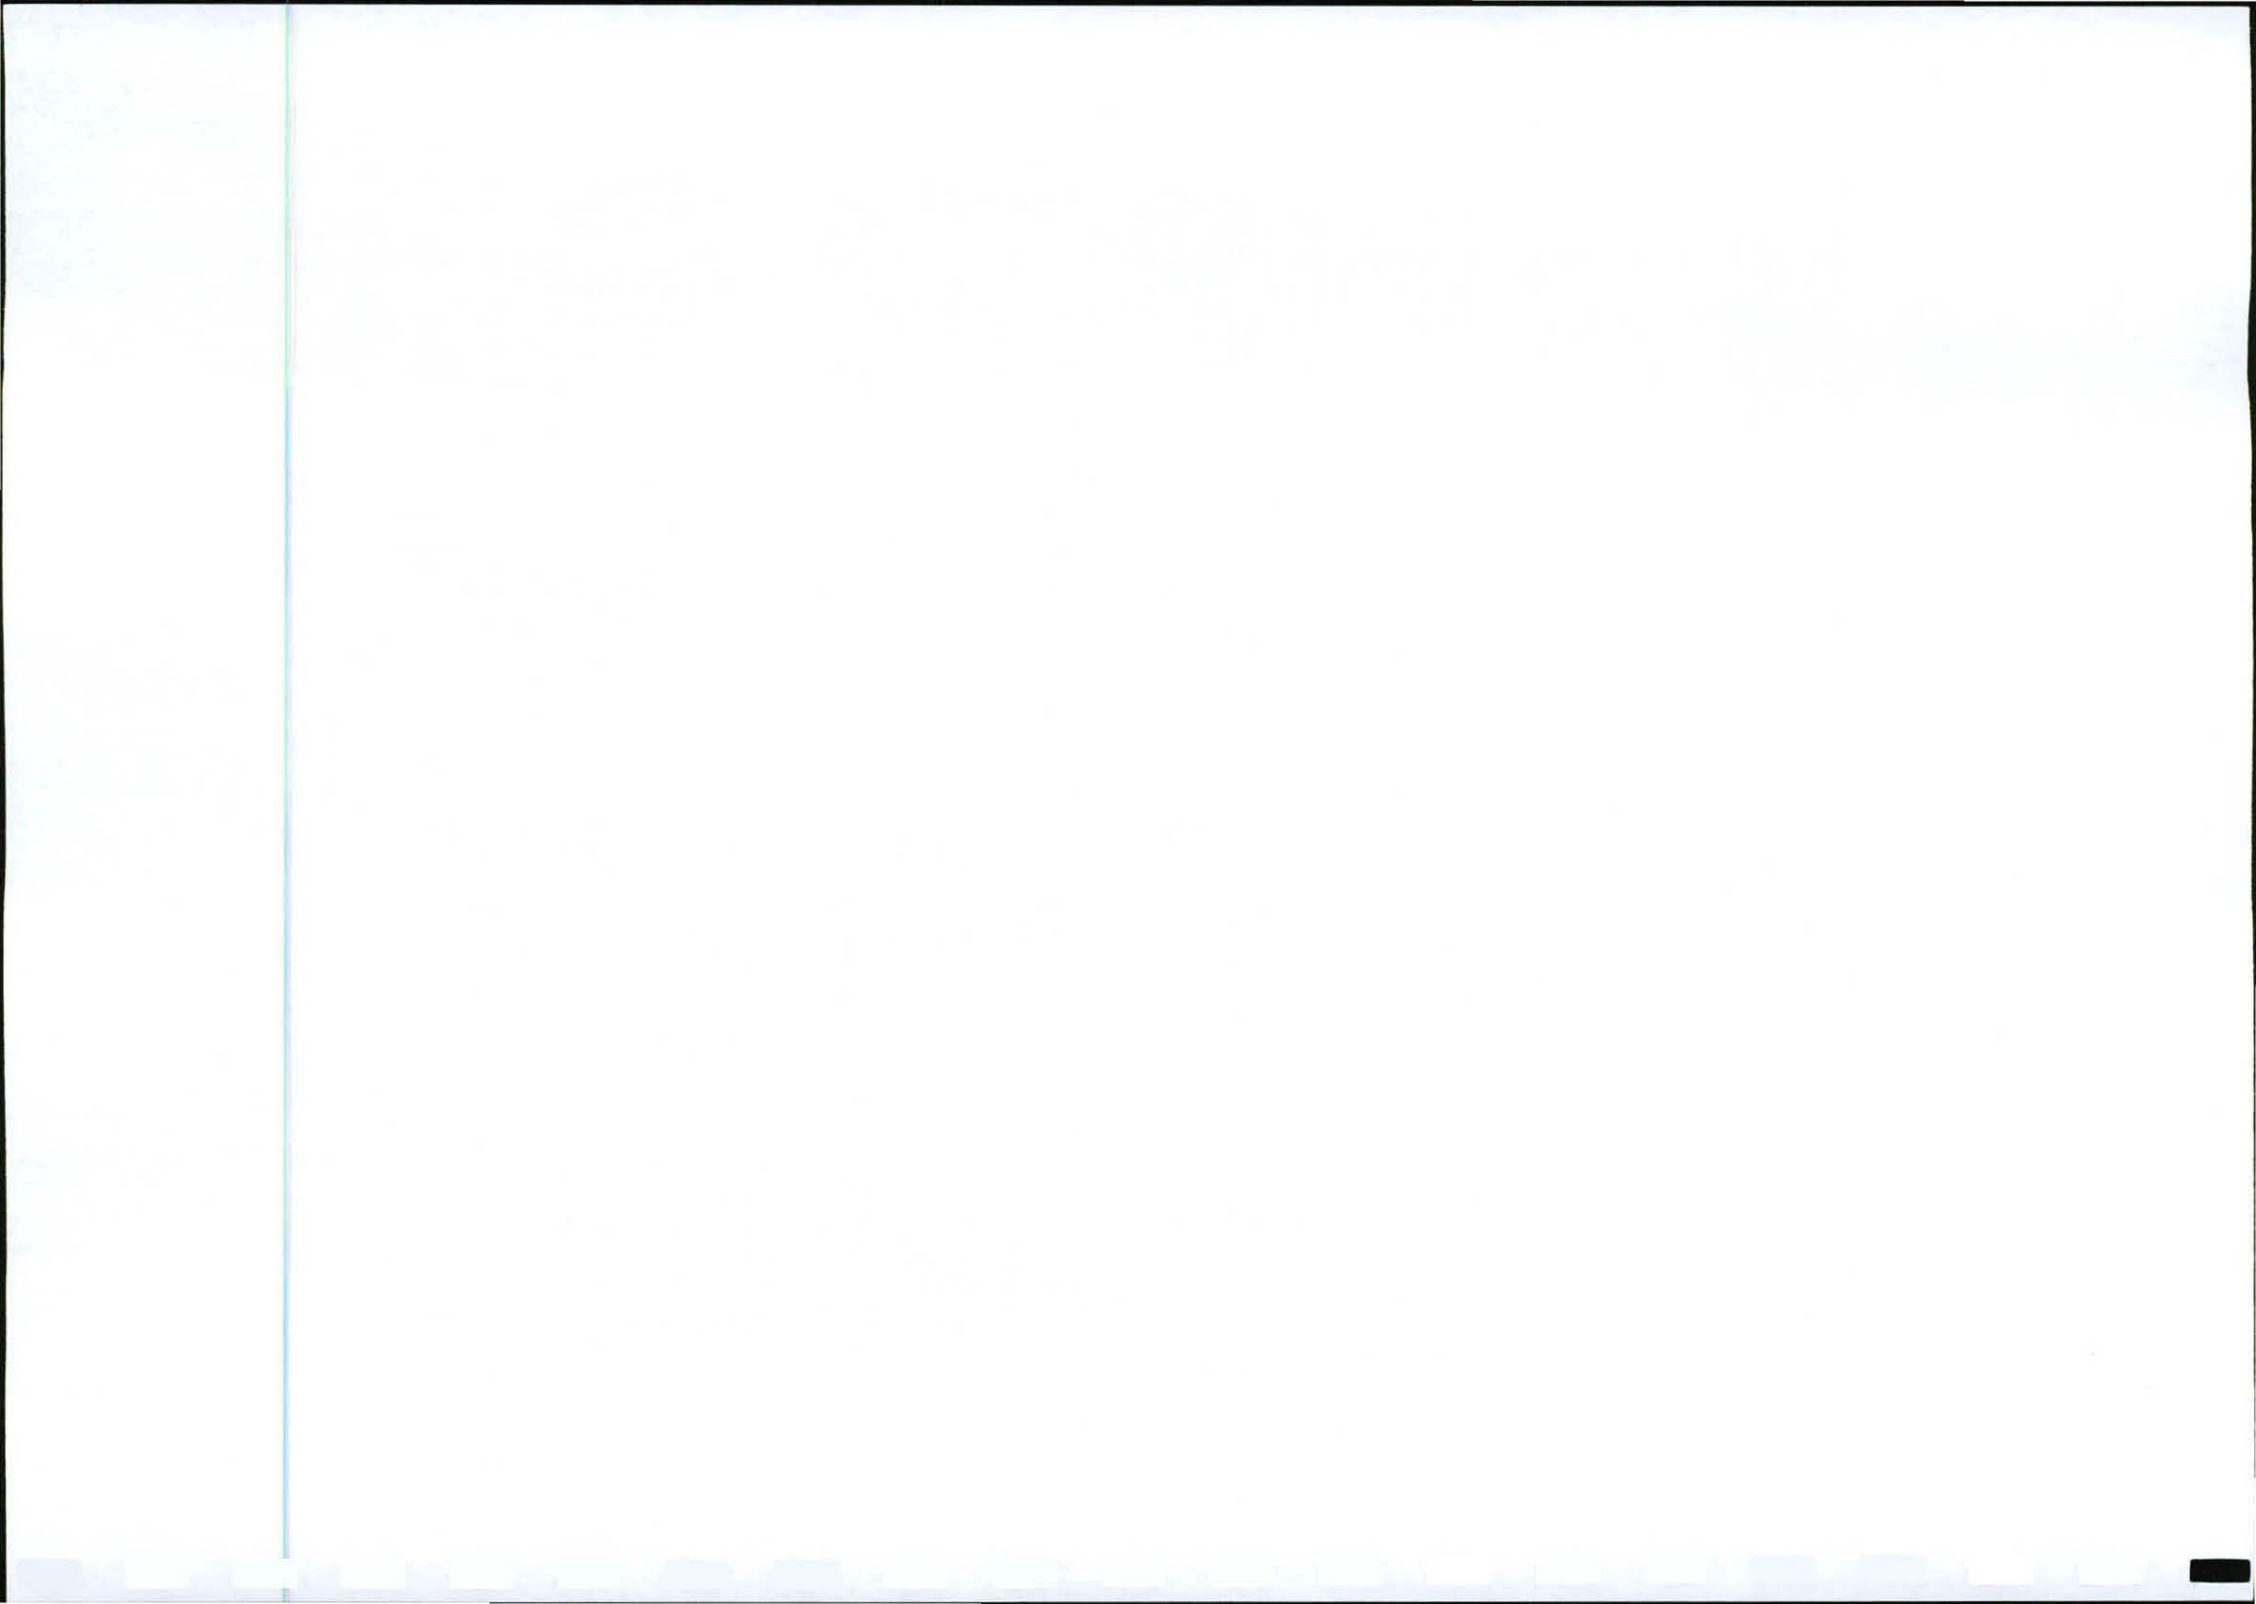


- A few rocky areas have been identified along the proposed servitude routes. These areas are considered moderately sensitive and should be approached with caution.
- The area is not seen as a "No-Go" area, but care should still be taken to avoid any unnecessary disturbance of veld or soil. Removal of trees, shrubs and other vegetation should be kept strictly to within the 8m corridor under the power lines.
- Only a single, basic vehicle track to be constructed as an access road under pylons moving through the rocky area.
- Access roads need to be kept to an absolute minimum.
- No trees to be cut down or roads to be created to access the power line corridor from the public road by vehicle. Or to create shortcuts into this region. Any vehicles needing to access the power lines running through the rocky area will need to do so from out of the less sensitive plains along the corridor itself.
- All exotic plants must be removed during construction and cleared areas must be rehabilitated. Areas where exotic plants are cleared should be rehabilitated and re-planted with approved indigenous species.
- Care must be taken to ensure alien vegetation is not spread as a result of vegetation management processes through the transport of seeds or other vegetative material from one site to another.

CONTROL OF ALIEN VEGETATION

- The manner in which the right of way was obtained/registered is an important factor in determining the legal requirements for erosion and weed control.
- The Conservation of Agricultural Resources Act (Act 43 of 1983) places a duty on the land user to control erosion and declared weeds and invader plants. Hence, the standard specifies weed control as a requirement for all power lines: The act defines land user as follows:
- 'land user' means the owner of land, and includes-
 - any person who has a personal or real right in respect of any land in his capacity as fiduciary, fideicommissary, servitude holder, possessor, lessee or occupier, irrespective of whether he resides thereon;
 - any person who has the right to cut trees or wood on land or to remove trees, wood or other organic material from land.
- A servitude is a real right which Eskom obtained in order to construct its infrastructure upon the affected property and it is registered in the Deeds Office against the title deed of the affected property. This places a duty on Eskom to control declared weeds and invader plants.
- Alien vegetation in servitudes shall be managed in terms of the Regulation GNR.1048 of 25 May 1984 (as amended) issued in terms of the Conservation of Agricultural Resources Act, Act 43 of 1983. In Terms of these regulations, Eskom shall "control" i.e. to combat category 1, 2 and 3 plants to the extent necessary to prevent or to contain the occurrence, establishment, growth, multiplication, propagation, regeneration and spreading such plants within servitude areas or land owned by Eskom.
- Mechanical control of alien plants around disturbed areas to be implemented within two months of completion of construction. Thereafter every six months. These areas will be predominantly around the erected pylons where the soils were originally disturbed during the construction phase. Mechanical control to be of such a nature as to allow local grasses and other pioneer plants to colonise the previously disturbed areas, thereby keeping out alien invasives.
- No chemical control (herbicides) of alien plants to be used. These chemicals will have a detrimental effect on the surrounding vegetation and habitats.
- Vegetation under pylons and next to pylons to be mowed and not ploughed. This in an effort to avoid disturbing the ground which leaves it open to colonisation by alien weeds.
- Disturbance of the soils must be kept to an absolute minimum to limit the potential introduction of alien plants. This area is pristine with little to no alien infestation. Alien plants generally get a foothold in an area where the soils have been disturbed.

PROTECTION OF FAUNA AND FLORA

- No animals or birds may be fed, disturbed, hunted or trapped as well as no plant material removed or stored if not part of identified vegetation clearance.

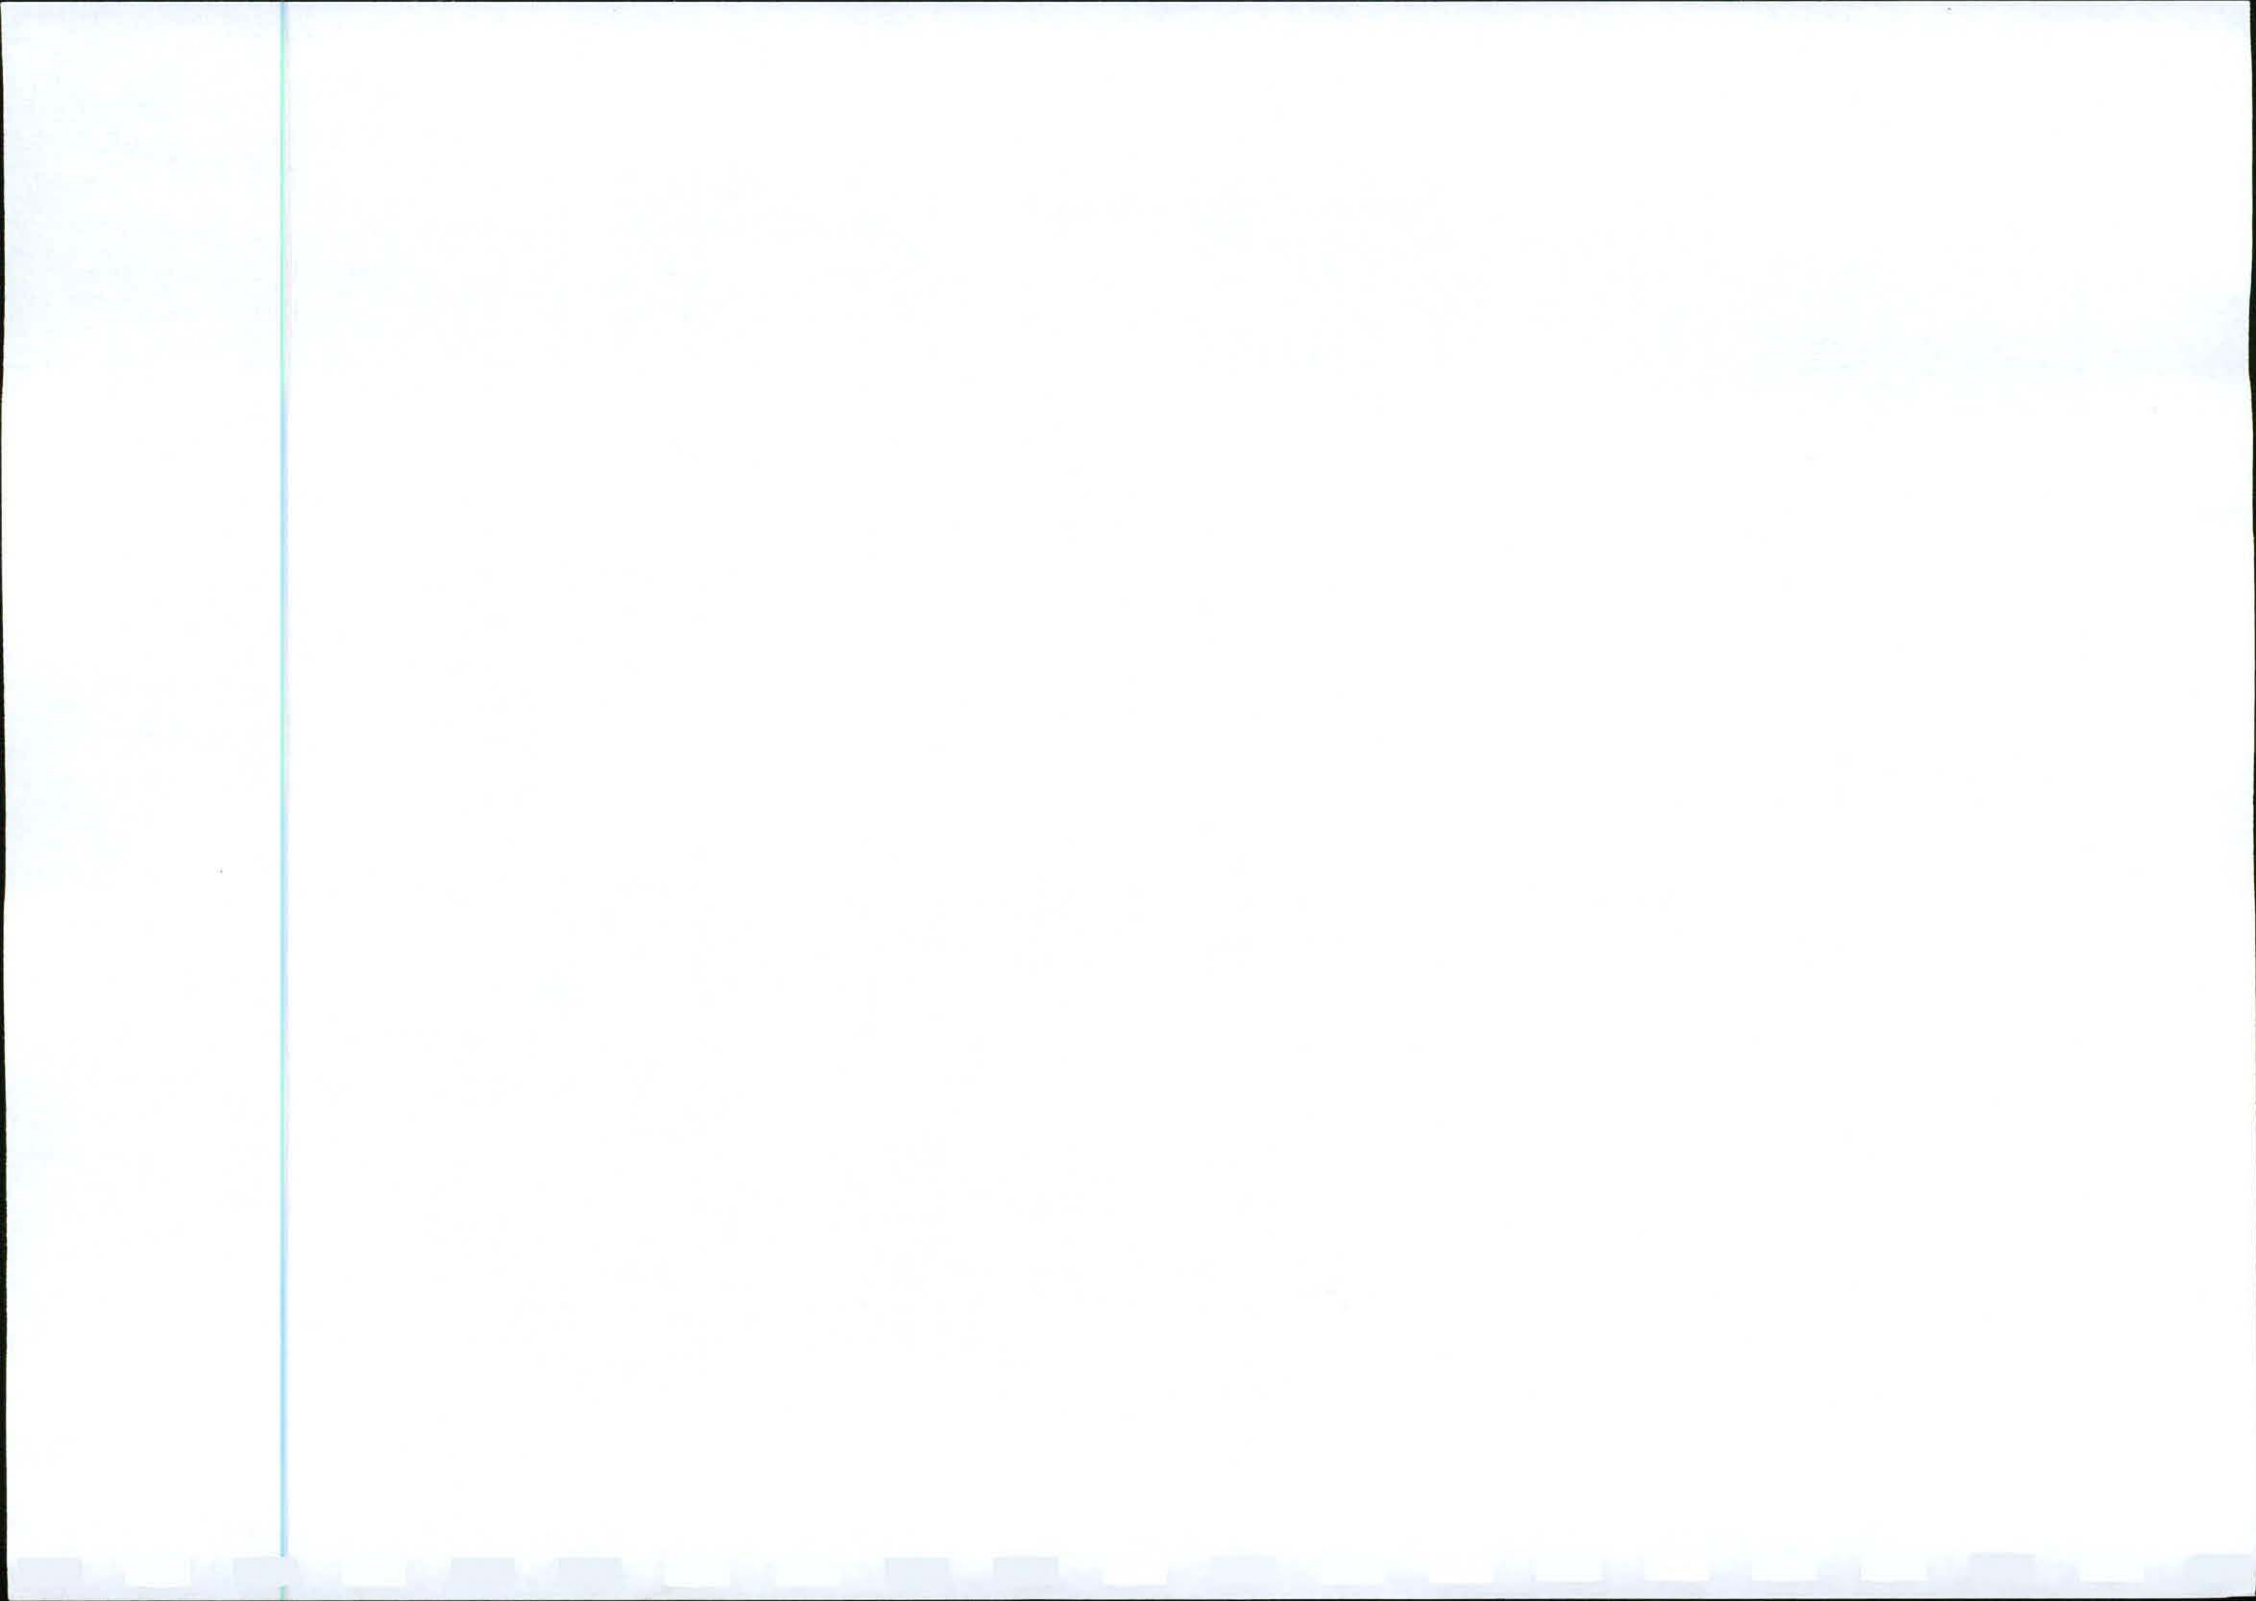


- Various species of indigenous trees and bush are protected by law in terms of the National Forests Act No 122 of 1984, which stipulates that it is necessary to obtain a permit from the relevant provincial office of the Department of Agriculture, Forestry and Fisheries in order to cut them.
- Protected or endangered plant species that will be affected by the physical footprint of the power lines will require the necessary permits to cut or remove them.
- The ecological survey **observed protected trees** during the site investigations, therefore **permits** for cutting or trimming are envisaged.
- A small grove of Camel Thorns on both sides of the D1882 sand road in the vicinity of the Mokolo River should be viewed as a 'No-Go' zone. The route should be planned to avoid the groves. GPS coordinates taken from the road: S24°06.822'; E27°48.301'. Should there be impact on any of the camel thorns, then a permit is needed.
- The rescue of protected and endangered plants that can be replanted should be coordinated by the ECO in consultation with the provincial environmental authorities, and the appropriate post-construction rehabilitation measures must be implemented.
- The harvesting of medicinal plants, which may occur on the site prior to site clearance, should be coordinated by the ECO.

BIRD IMPACT

- The proposed construction of the new power line should have a low habitat transformation impact from an avifaunal perspective, especially if alternative 2 is used. If alternative 1 is used, the impact would be medium-low, as it would involve more extensive clearing of undisturbed woodland. With alternative 3 and 4, the impact will be medium, as it would require more extensive clearing of woodland than the other.

SOIL EROSION

- Neither drainage nor erosion are seen to be significant threats as long as the proper mitigating measures are implemented. There were no signs of erosion along the investigated routes.
- Site-specific mitigation requirements as included in the table in the section "Specification applicable to all Phases of Project Development" must be adhered to.
- To cause the loss of soil by erosion is an offense under the Soil Conservation Act, Act No 76 of 1969.)
- Construction activities should be well managed to prevent erosion and the following is relevant:
- Two major water courses (Mokolo River and Poer se Loop) along with a few seasonal streams and drainage lines cross the corridors for the power lines. These need to be completely avoided and no pylons may be placed directly within any one of these water courses. Mitigation measures as previously indicated are relevant:
 - No temporary or other construction facilities to be erected or stored within 200m of the banks of the Mokolo River or the Poer se Loop stream.
 - Positioning of any pylons need to be a minimum of 30m from the edge of the river banks or outside of the 1 in 100 year floodline.
 - Positioning of the foundation slabs for the pylons must be a minimum of 10m away from the edge of all drainage lines.
 - Under no circumstances may a pylon be placed directly in the bed of a river or drainage line.
 - Construction must be limited to drier periods.
- Due to the physical nature of the power lines, their impact will be minimal over the medium to long term. Tree and shrub growth directly below the lines will be cleared and kept permanently so. Clearing of this 8m wide strip has a massive impact on the flora directly within this corridor. However, due to the good condition of the veld and the low negative impacts in the immediate vicinity, the impact on the larger scale is minimal with regards to species destruction.
- Unnecessary clearing of flora resulting in exposed soil prone to erosive conditions should be avoided.
- No trees or existing grass strata outside of the power line corridor should be removed to lower any kinetic energy of potential run-off.
- Indigenous vegetation, which does not interfere with the safe operation of the substation/ power line, should be left undisturbed.
- Only a few areas of rockiness have been identified along the proposed servitude routes. These areas are considered moderately sensitive and should be approached with caution.

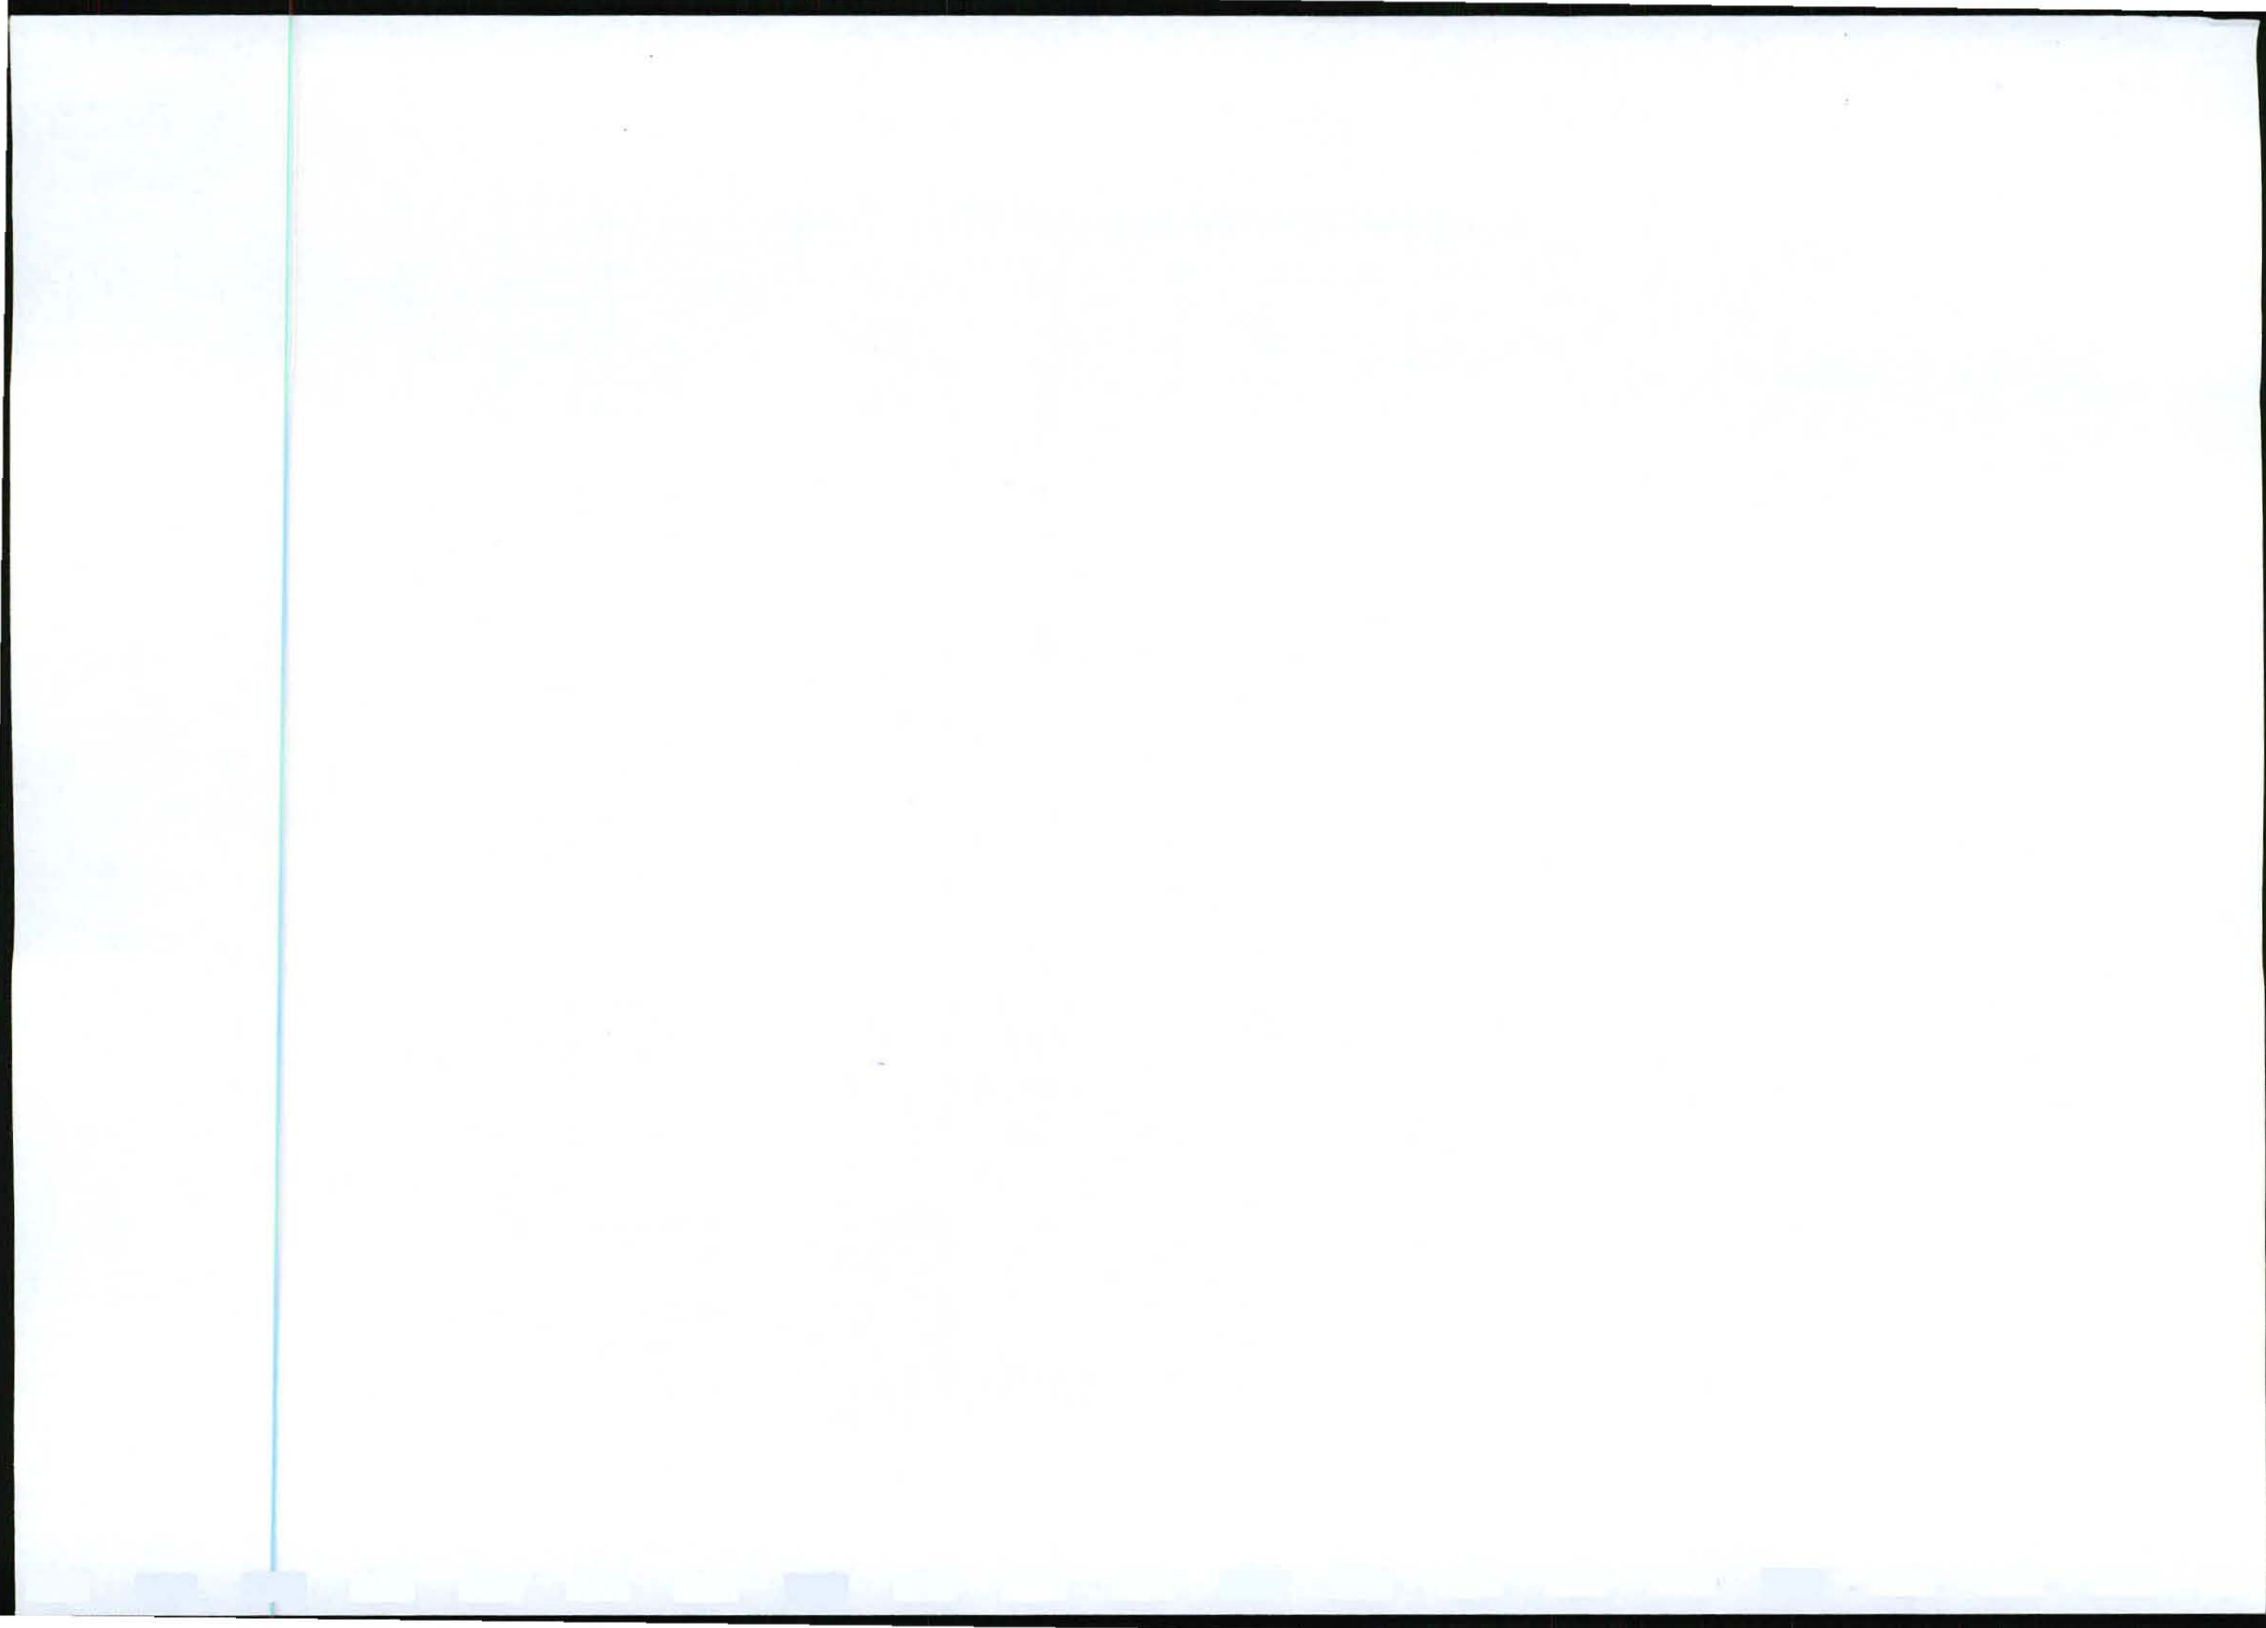

- These areas are not seen as "No-Go" areas, but care should still be taken to avoid any unnecessary disturbance of veld or soil. Removal of trees, shrubs and other vegetation should be kept strictly to within the 8m corridor under the power lines.
- Only a single, basic vehicle track to be constructed as an access road under pylons moving through the rocky area.
- Access roads need to be kept to an absolute minimum.
- No trees to be cut down or roads to be created to access the power line corridor from the public road by vehicle. Or to create shortcuts into this region. Any vehicles needing to access the power line running through the rocky area will need to do so from out of the less sensitive plains along the corridor itself.
- No temporary storage facilities, toilets, dwellings, etc. of any kind to take place within this rocky area. Not even within the demarcated power line corridor.
- The longest possible distance between pylons should be used in an effort to limit the footprint size on the rocky area.
- The power line must run as straight as possible through and over rocky areas. This in an effort to limit sharp turns that literally create a larger physical footprint on the ground.
- Great care and thought must be taken into the actual positioning and construction of the foundation slabs. The soils are sandy and this area has the steepest gradient of the study site. There is therefore a real danger of soil erosion and resulting veld degradation in this area.
- The ground around all foundation slabs for the pylons need to be inspected before and after the summer rainy season for erosion. Any erosion found needs to be fixed and preventative measures put in place to prevent a reoccurrence of the situation.
- Pro-active measures must be implemented to curb erosion and to rehabilitate eroded areas. All areas susceptible to erosion must be installed with temporary and permanent diversion channels and berms to prevent concentration of surface water and scouring of slopes and banks, thereby countering soil erosion.
- Specifications (as identified in the Environmental Management Programme) for topsoil storage and replacement, to ensure sufficient soil coverage as soon as possible after construction activities, must be implemented.
- All cleared areas must be ripped and rehabilitated after construction. The top 200mm layer of topsoil must be removed and stockpiled in heaps not higher than 2m and replaced on the construction areas once the activities have been completed. The affected areas should be replanted with a grass mixture indigenous to the area.
- Construction during the dry months/periods of the year should be considered in order to overcome the problems caused by excessive moisture.
- The eradication of any alien vegetation should be followed up as soon as possible by replacement with indigenous vegetation to ensure quick and sufficient coverage of exposed soil.
- Surface area under powerlines to be mowed and not ploughed.
- Disturbed surface areas in the construction phase to be restored. No open trenches to be left. No mounds of soils created during construction to be left.
- The final design of the power line must accommodate the requirements of the ecologist, Johannes Maree, Tel 082 5641211, of which the site-specific details are included in this EMPPr. These measures will limit the impact on erosion.

HERITAGE RESOURCES

The main findings of the Heritage Impact Assessment are summarised as follows:-

- The Phase I Heritage Impact Assessment for the Eskom Project revealed none of the types and ranges of heritage resources as outlined in Section 3 of the National Heritage Resources Act (No 25 of 1999) for the Eskom Project Area.
- Therefore, from a heritage point of view, both Alternatives 1,2,3 and 4 are suitable for the construction of the proposed project.

The following mitigation measures are proposed:

- If any heritage resources of significance are exposed during the Eskom Project the South African Heritage Resources Authority (SAHRA) should be notified immediately, all development activities must be stopped and an archaeologist accredited with the Association for Southern African Professional Archaeologist (ASAPA) should be notified in order to determine appropriate mitigation measures for the discovered finds. This may include obtaining the necessary authorisation (permits) from SAHRA to conduct the mitigation measures.



COMMUNITY ISSUES (SAFETY, SECURITY, NOISE, DUST, ETC.)

- Site-specific mitigatory requirements as included in the table in the section "Specification applicable to all Phases of Project Development" must be adhered to.
- Construction workers must be extremely careful not to damage any property. Should any damage occur it should be reported to the Environmental Officer and repaired to the written satisfaction of the landowner.
- Removal of agricultural products is prohibited.
- No firewood may be collected without the landowner's permission. All cut wood must be left on the property.
- No fires are to be made on private property.
- In order to prevent and/or minimize crime, it is required that all construction workers be supplied with controlled serviced accommodation or be supplied with transport to their homes.
- No wandering on adjacent properties is allowed, unless written consent has been obtained from the relevant landowners.
- All adjacent landowners have to be informed of the blasting programme (if applicable) prior to any blasting taking place. Contractors must liaise personally with adjacent landowners. All communication in this regard must be documented.
- Blasting may only be undertaken by specialists in the field and should be limited to small localized areas. All relevant legislation must be adhered to.
- All contractors and construction workers will be issued with temporary permits to enter the property.
- All construction workers will be allowed only for specified day light hours. Transport should be made available by the Contractor to remove labourers from the site after working hours.
- Secure accommodation facilities must be provided for guarding personnel.
- Supervision of labourers must at all times take place.
- Construction hours will be restricted to specific periods which exclude Sundays and public holidays.
- Sweeping of construction sites, clearing of building rubble and debris (storage areas, roads, etc.) must take place at least once a day.
- All excavated areas must be clearly marked and barrier tape must be placed around them to prevent humans and animals from falling into them.
- All gates into the properties of landowners should be kept closed at all times.
- No squatting to be allowed in the servitude area.


PROTOCOL FOR ACCESS TO FARMS

Eskom Holdings has a right to enter farms in order to maintain plant and obtain meter readings, therefore the manner of access to land, on which Eskom holds servitudes and electrical infrastructure, should be considered by Eskom as well as Landowners. Security on farms is important to Landowners who need to ensure that the safety of their family, staff and property is catered for. Coupled to this is the escalating crime rate on farms.

Approaches to facilitate access to farms for all Eskom staff and contractors (performing work on behalf of Eskom) is stipulated in the Access to Farms (Distribution, Transmission and Generation) Standard 32-1173 of which a copy can be obtained from the local organised agriculture structures.

Protocol measures are i.e. as follows:

- All Eskom staff will carry identity cards containing their photographs, indicating that they are Eskom employees. Landowners may verify presence of Eskom staff telephonically at the Contact Centre, at 08600 37566.
- Eskom contractors will carry identity cards displaying their photographs, indicating that they are contractors. Letters containing contract appointment as well as whom at Eskom to contact will be given to each Contractor. In the case of unplanned activities, the contractor must be in possession of a work order number.
- Eskom vehicles will be clearly marked on the door. Vehicles operating after dark will be fitted with amber rotating lights.
- Vehicles of Eskom contractors must have a magnetic strip on the side containing the words "Eskom contractor", as well as an amber rotating light.
- No person may climb or crawl over or through fences without the owners' permission. No person may damage or remove a fence without the owners' permission.
- Gates should be left in the state the landowner intended. In order to assist with any possible claims, any visitor will keep a log of each gate that is used stating:

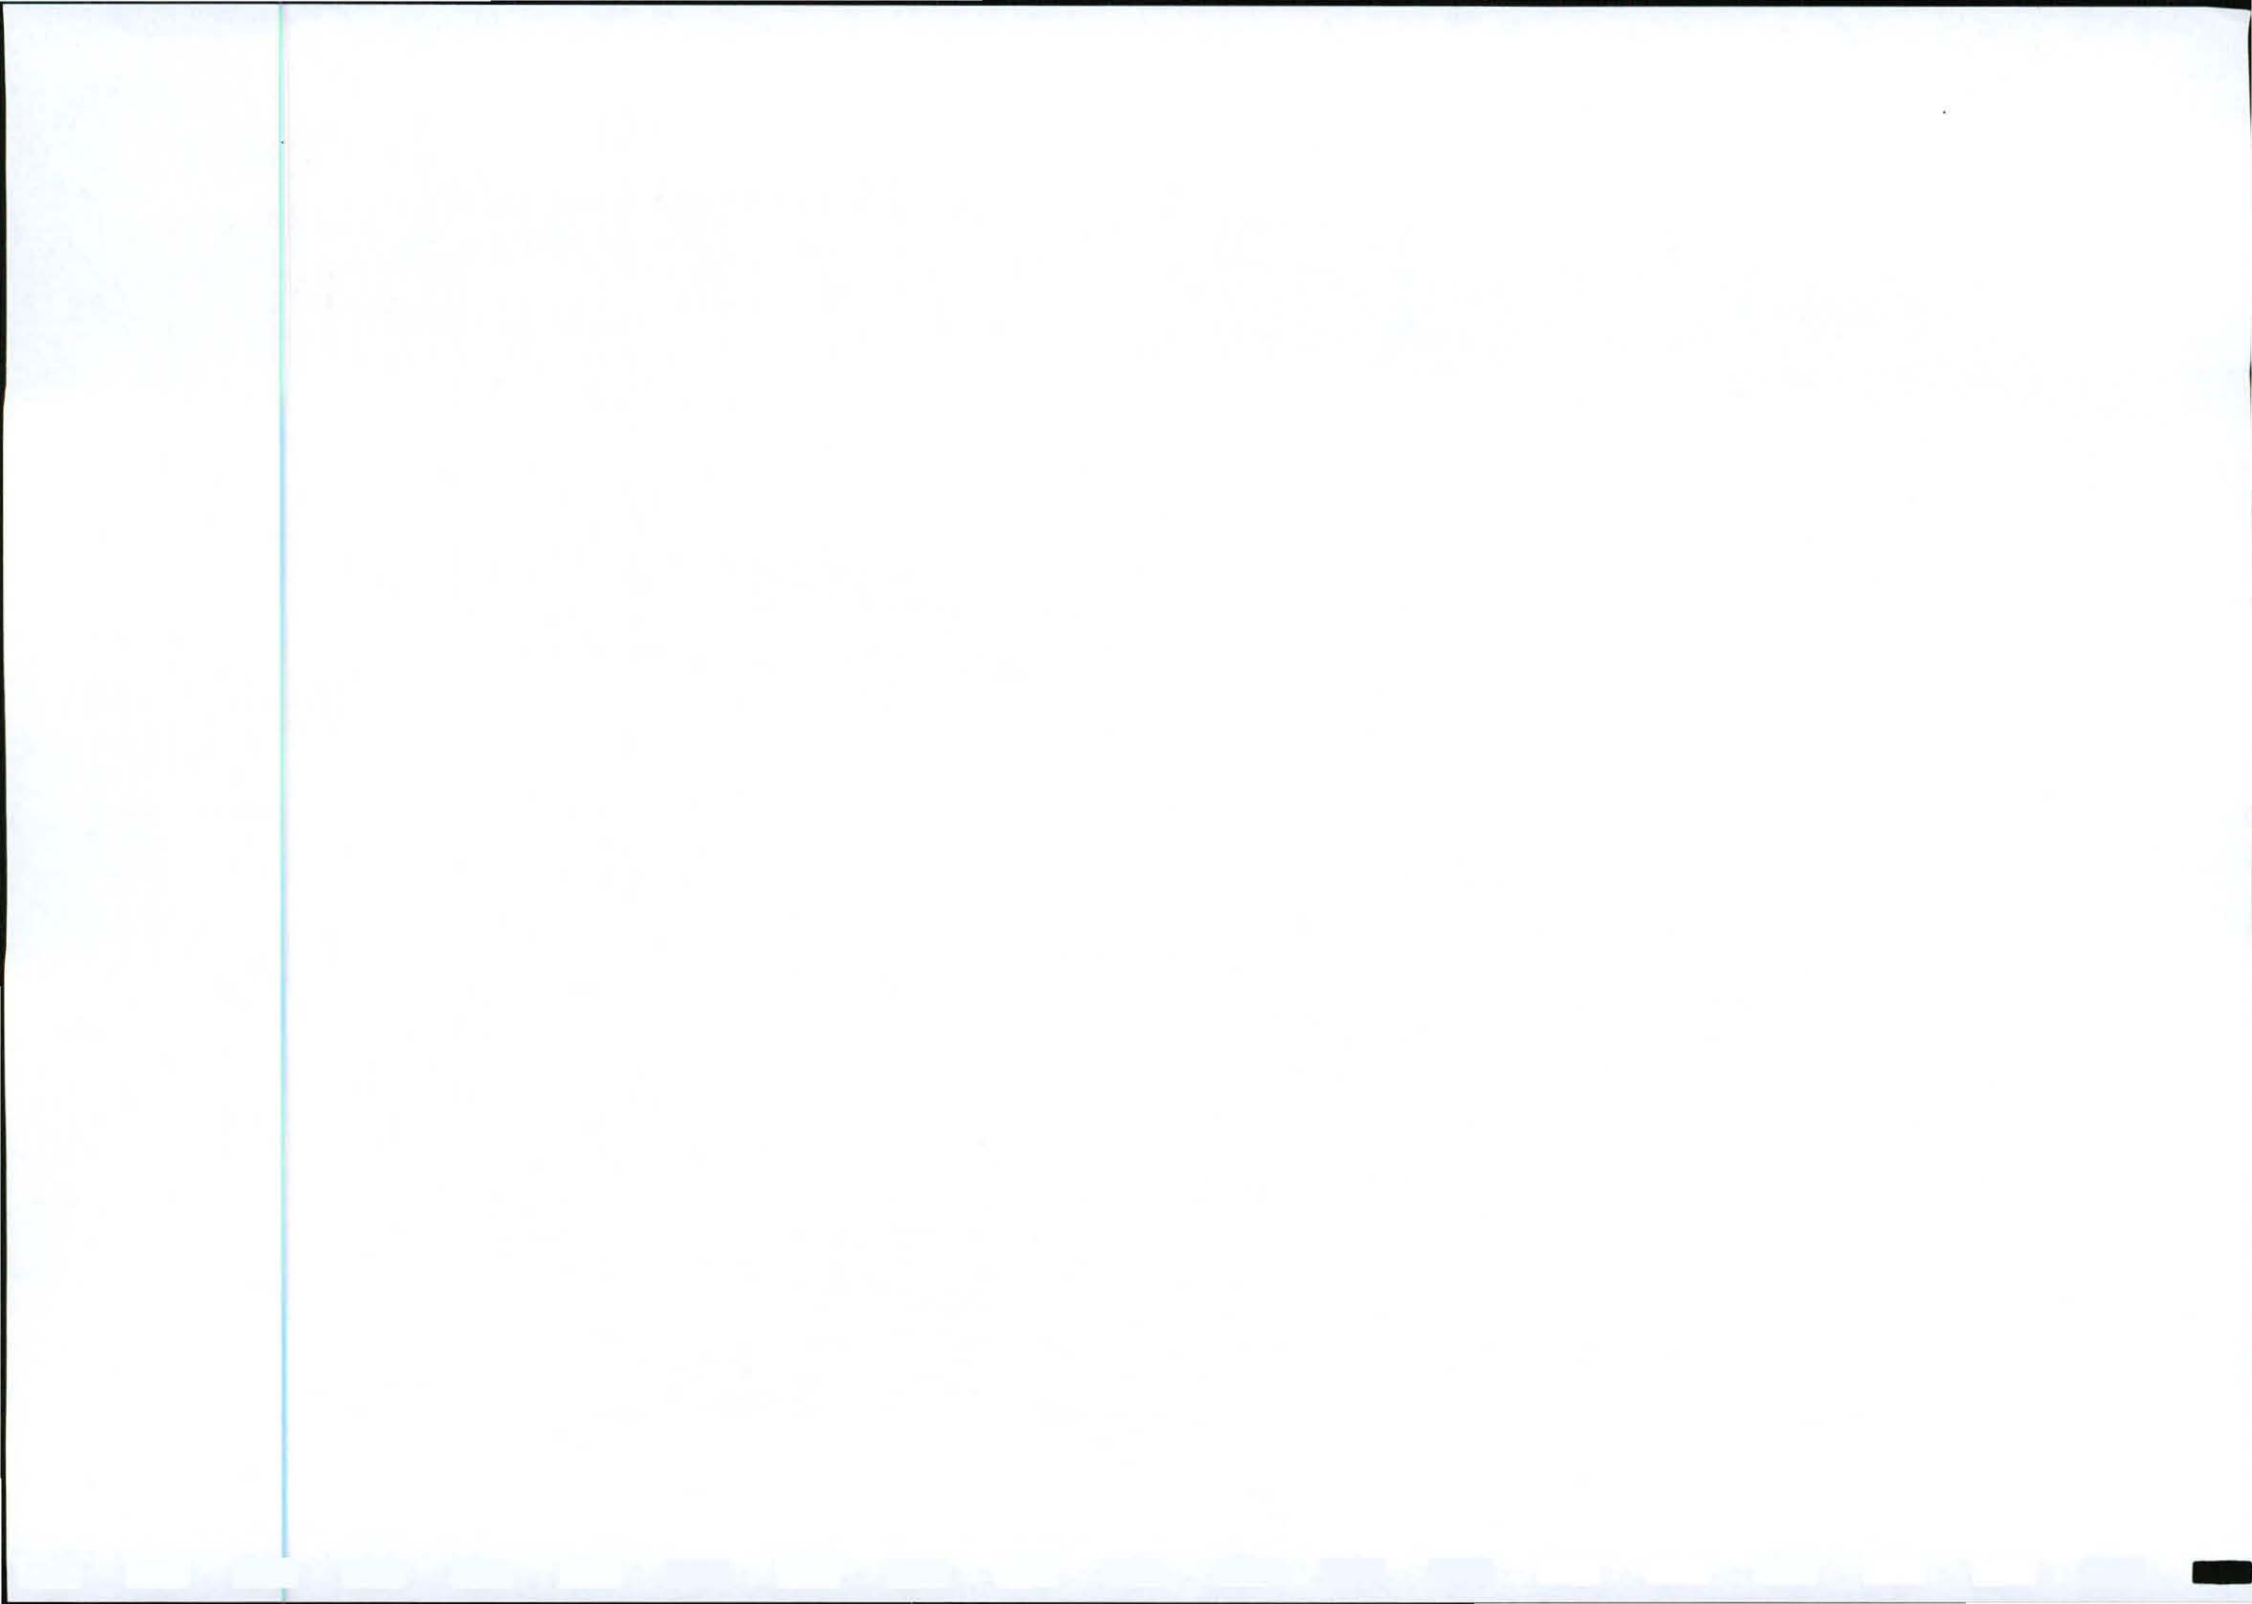

- the position of the gate with reference to towers
 - the state in which it was found (open or closed)
 - the time
 - any other appropriate information (locks, etc.)
- Standard Eskom locks shall be used in all cases and in such a manner that it securely locks the gate. Where dual-use is made of the gate by Eskom Holdings and the land owner, the Eskom lock shall be locked into the chain-link, separate from the farmer's lock as to permit both parties to gain access without inconveniencing either party. No interference with land owners' locks will be tolerated. The cutting of land owners' locks except in extreme emergency will result in disciplinary action.
 - Where helicopters are deployed, care should be taken in conjunction with the Line and Servitude Manager and the landowner not to cause any disturbance or harm to livestock such as ostriches or game. The use of helicopters on lines during line patrols does present it's challenges when all the property owners en route need to be informed before the inspection. Notice of such patrols should be communicated via District Agricultural offices a month before.
 - Any damage caused to any gate, fence, crop or grazing shall be reported to the Line and Servitude Manager or ECO who will then refer it to the appropriate Eskom Holdings Official for processing. Extreme care must be taken with fires and the use of fires will only be permitted with express approval of the landowner.
 - No fauna or flora will be collected or removed from any farm by any visitor without written permission of the Landowner, in which case cognizance will be taken of appropriate provincial legislation pertaining to fauna and flora. Under such cases Eskom Holdings ethical policies and guidelines will be strictly applied.
 - Any visitor will at all times refrain from littering and must remove any refuse when leaving.
 - Visitors shall as far as possible only use the servitude roads or the roads as determined by the environmental management plan and agreed to with the Land owner. Where this is not possible the landowner's permission shall be obtained for the use of any other roads. In all cases care shall be taken to not cause any damage in the process and driving through the veld must be avoided as far as possible.

Planned outages

- Eskom will notify customers at least 10 days in advance through the appropriate media – either in writing, electronically (SMS) or telephonically. The onus rests on the Customer to ensure that all their contact details are updated on the Eskom system. Should its best attempts to communicate fail, the work will proceed regardless.

Planned activities such as vegetation control, live-line work and line inspections.

- Eskom will notify customers at least 48 hours in advance through the appropriate media – either in writing, electronically or telephonically. Should its attempts to communicate fail, the work will proceed.


Unplanned/unscheduled visits

- Rapid power restoration without any delay is in the interest of both Eskom and the customer. This is dependent on free movement.
- All Eskom staff as well as representatives of Eskom contractors will carry identity cards containing their photographs to indicate whether they are Eskom employees or Eskom contractors. In addition, customers may request a work order number to be verified with the Contact Centre. Vehicles must be clearly marked.

ACCESS TO NATURE / GAME RESERVES

The mushrooming of game farms in all parts of the country brings about new challenges to Eskom Holdings such as restriction of access, safety of Eskom staff and the interaction of game and electrical infrastructure. The same applies to nature reserves and other reserves managed by the state where wild animals occur. Wild animals pose a safety risk to Eskom staff e.g. lions, tigers, leopards, elephants, rhinoceroses, buffaloes, etc and animals that are at risk of electrocution if introduced or kept in camps where unmitigated Eskom assets exists e.g. giraffes, elephants, rhinoceros.

- Access to any type of nature reserve requires specific permission, which should be arranged with the appropriate authority or landowners. Because these reserves have both dangerous as well as very expensive game, a designated guide should always accompany visitors. This will ensure the safety of the visitor as well as prevent any claims against Eskom Holdings in the case of death of expensive game.
- An effort should be made through the Regional task team to convince game farm owners and other influential stakeholders (Government & Game farming and Agricultural Union bodies) to buy into the following;
 - The numbering of gates.
 - The labelling of gates stating the following:

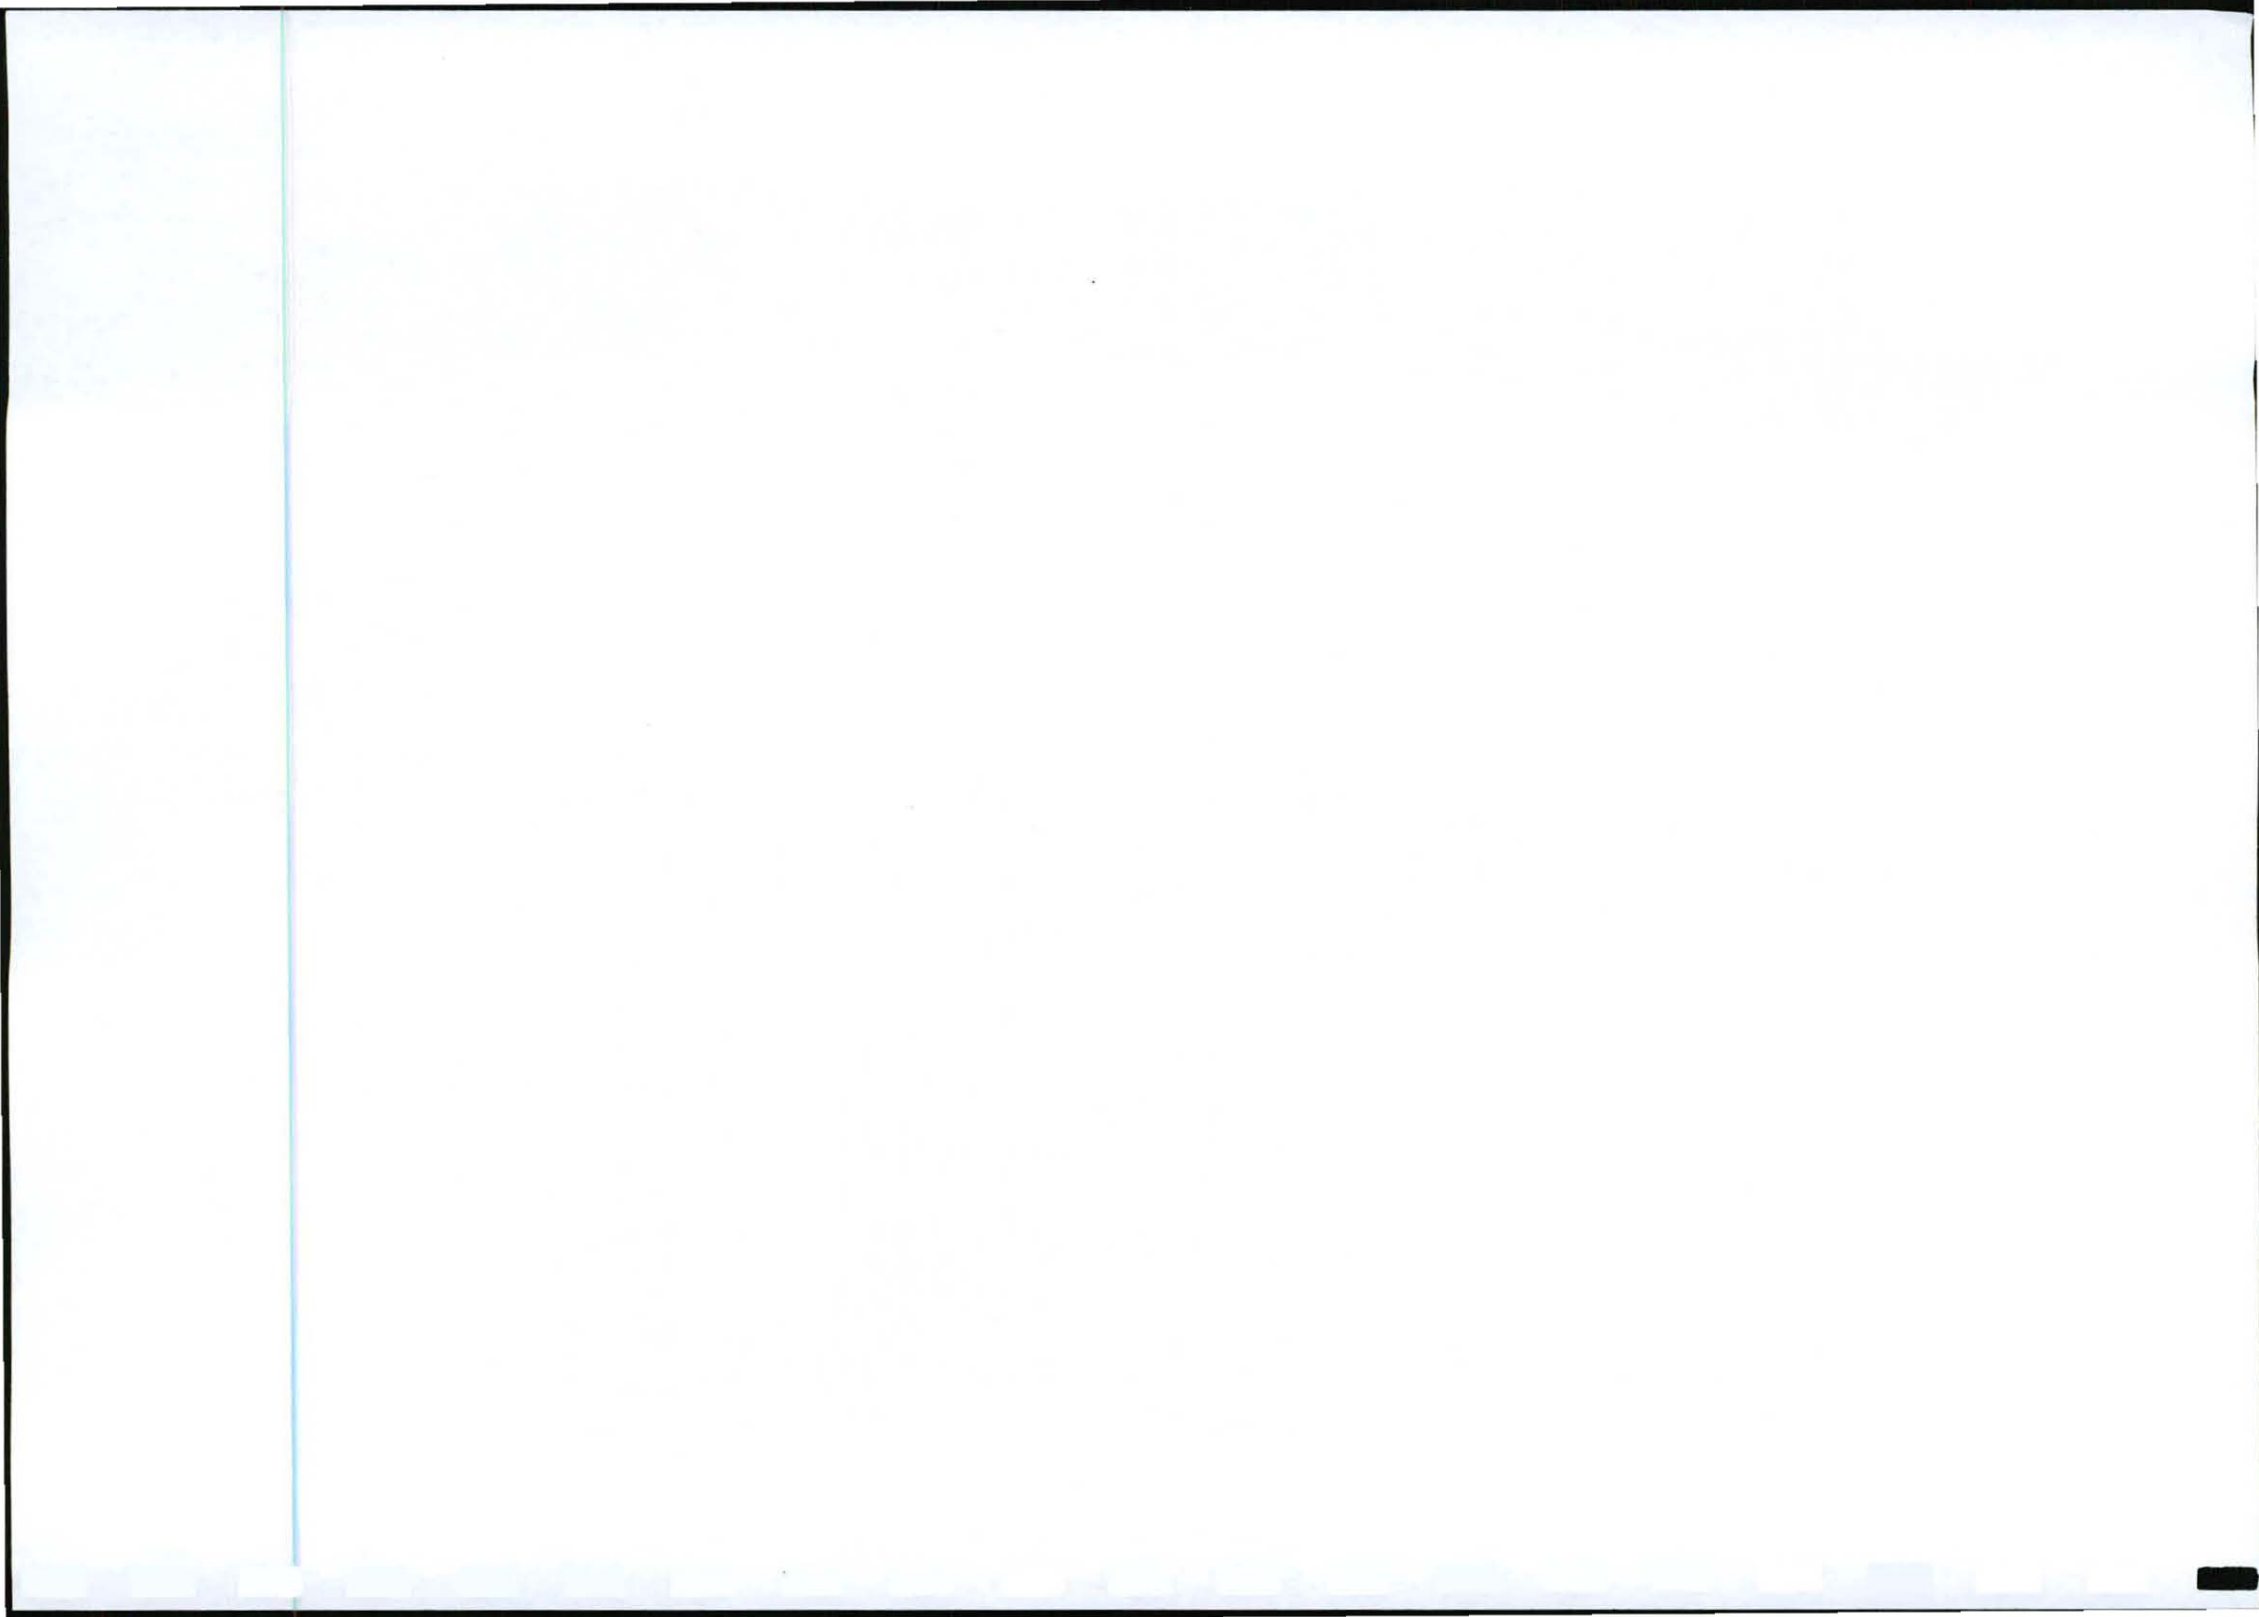

- That it is a game farm
- List of dangerous animals within enclosure
- Contact details
- That all entry and exit points comply with the Certificate of Adequate Enclosure Fencing Specifications.
- Entrance areas are to be cleared to improve visibility.

Routine Field trips by maintenance staff

- Field Services staff must report all new game fences or game farming activities encountered on routine line patrol or fault repair activities to the Land Development section for mapping and to Customer Services Area Managers to engage the landowner for corrective action if Eskom was not informed or did not agree to such a change. This is seen as an *ad hoc* way of obtaining information of newly created game farms from normal business activities.
- In particular, helicopter line patrols over game farming areas must be preceded by reasonable notifications to affected landowners as they are usually a disturbance to tourists and hunters visiting game farms. There is a great need to inform game farm owners timeously of planned maintenance activities. All notifications and arrangements regarding access should preferably be confirmed in writing as per section 2.6.
- Game farmers are also not in favour of motorised equipment e.g. chain saws due to noise pollution affecting hunting and game viewing activities. It is thus advisable that prior notification be issued and that their usage be restricted to what is absolutely necessary. As this is a sensitive environment, it is advised that bush clearing be done accordingly in terms of the *Standard for Bush Clearance and Maintenance within Overhead Power line Servitudes (ESKASABG3)*. These requirements are identified in the EMPr.

Safety of Eskom personnel


- No Eskom employee must endanger his/her life or the life of another staff member by entering a property where there is a reasonable suspicion that dangerous animals such as lions, tigers, leopards, rhinoceroses, buffaloes, etc., are present. Eskom staff should seek to enter such properties accompanied by security staff from the game farm. It is also advised that Eskom staff working in and around game farms be trained on how to identify dangerous animals and how to behave to ensure the safety of his/her life as well as that of another Eskom employee. Whenever any Eskom employee receives knowledge of the introduction of dangerous animals in an area where Eskom infrastructure exists, such knowledge shall be conveyed to Land Development for mapping, investigation and/or measuring and to the Customer Services Area Manager to engage the land- or game farm owner.

The identification of areas where game farms occur

- There are various ways to identify game farms or game farming activities e.g. through raising awareness, by engaging government and other game farming bodies, using the EIA process and maintenance activities. Geographical mapping of all information gained from the aforementioned methods will assist in identifying, understanding and comprehending the impact of game farms on the business.
- Communication campaigns: Each region is to engage in a communication campaign to create awareness of the challenges associated with game farms. The target audience is current and potential game farm owners, customers and landowners in general. The central message to this campaign is restriction of access, the safety risk to Eskom employees and the impact on biodiversity especially giraffes, elephants, rhinoceroses, etc. Property owners need to be made aware of Eskom requirements regarding service delivery and legal requirements. This message can be conveyed through customer news letters and media articles and reports which had reportedly been very successful in the Northern Region for communicating the challenges surrounding giraffes. A request can also be made to farmers and other landowners selling off their properties for game farming, to notify Eskom.
- Regions should set up task teams to drive this awareness campaign consisting but not necessary limited to the following sections/designations – Customer Service (Delivery Controller), Programme Management, Field Services (Technical Service Officer, Field Service Officer), Communication, Risk Management (Senior Environmental Advisor, Risk Management Co-ordinator), Land Development, Project Engineering). This task team is to identify key stakeholders to engage in this communication campaign

Training

- It is necessary that Eskom staff working in and around game farms be trained on how to identify dangerous animals and how to behave to ensure the safety of his/her life as well as that of another Eskom employee. It is important to note that whilst it might be perfectly fine to run when confronted by a rhinoceros, running when faced by a lion is the most inappropriate behaviour. The wrong behaviour could be fatal and hence identification and behavioural training is necessary.
- Training should include but not be limited to the following:

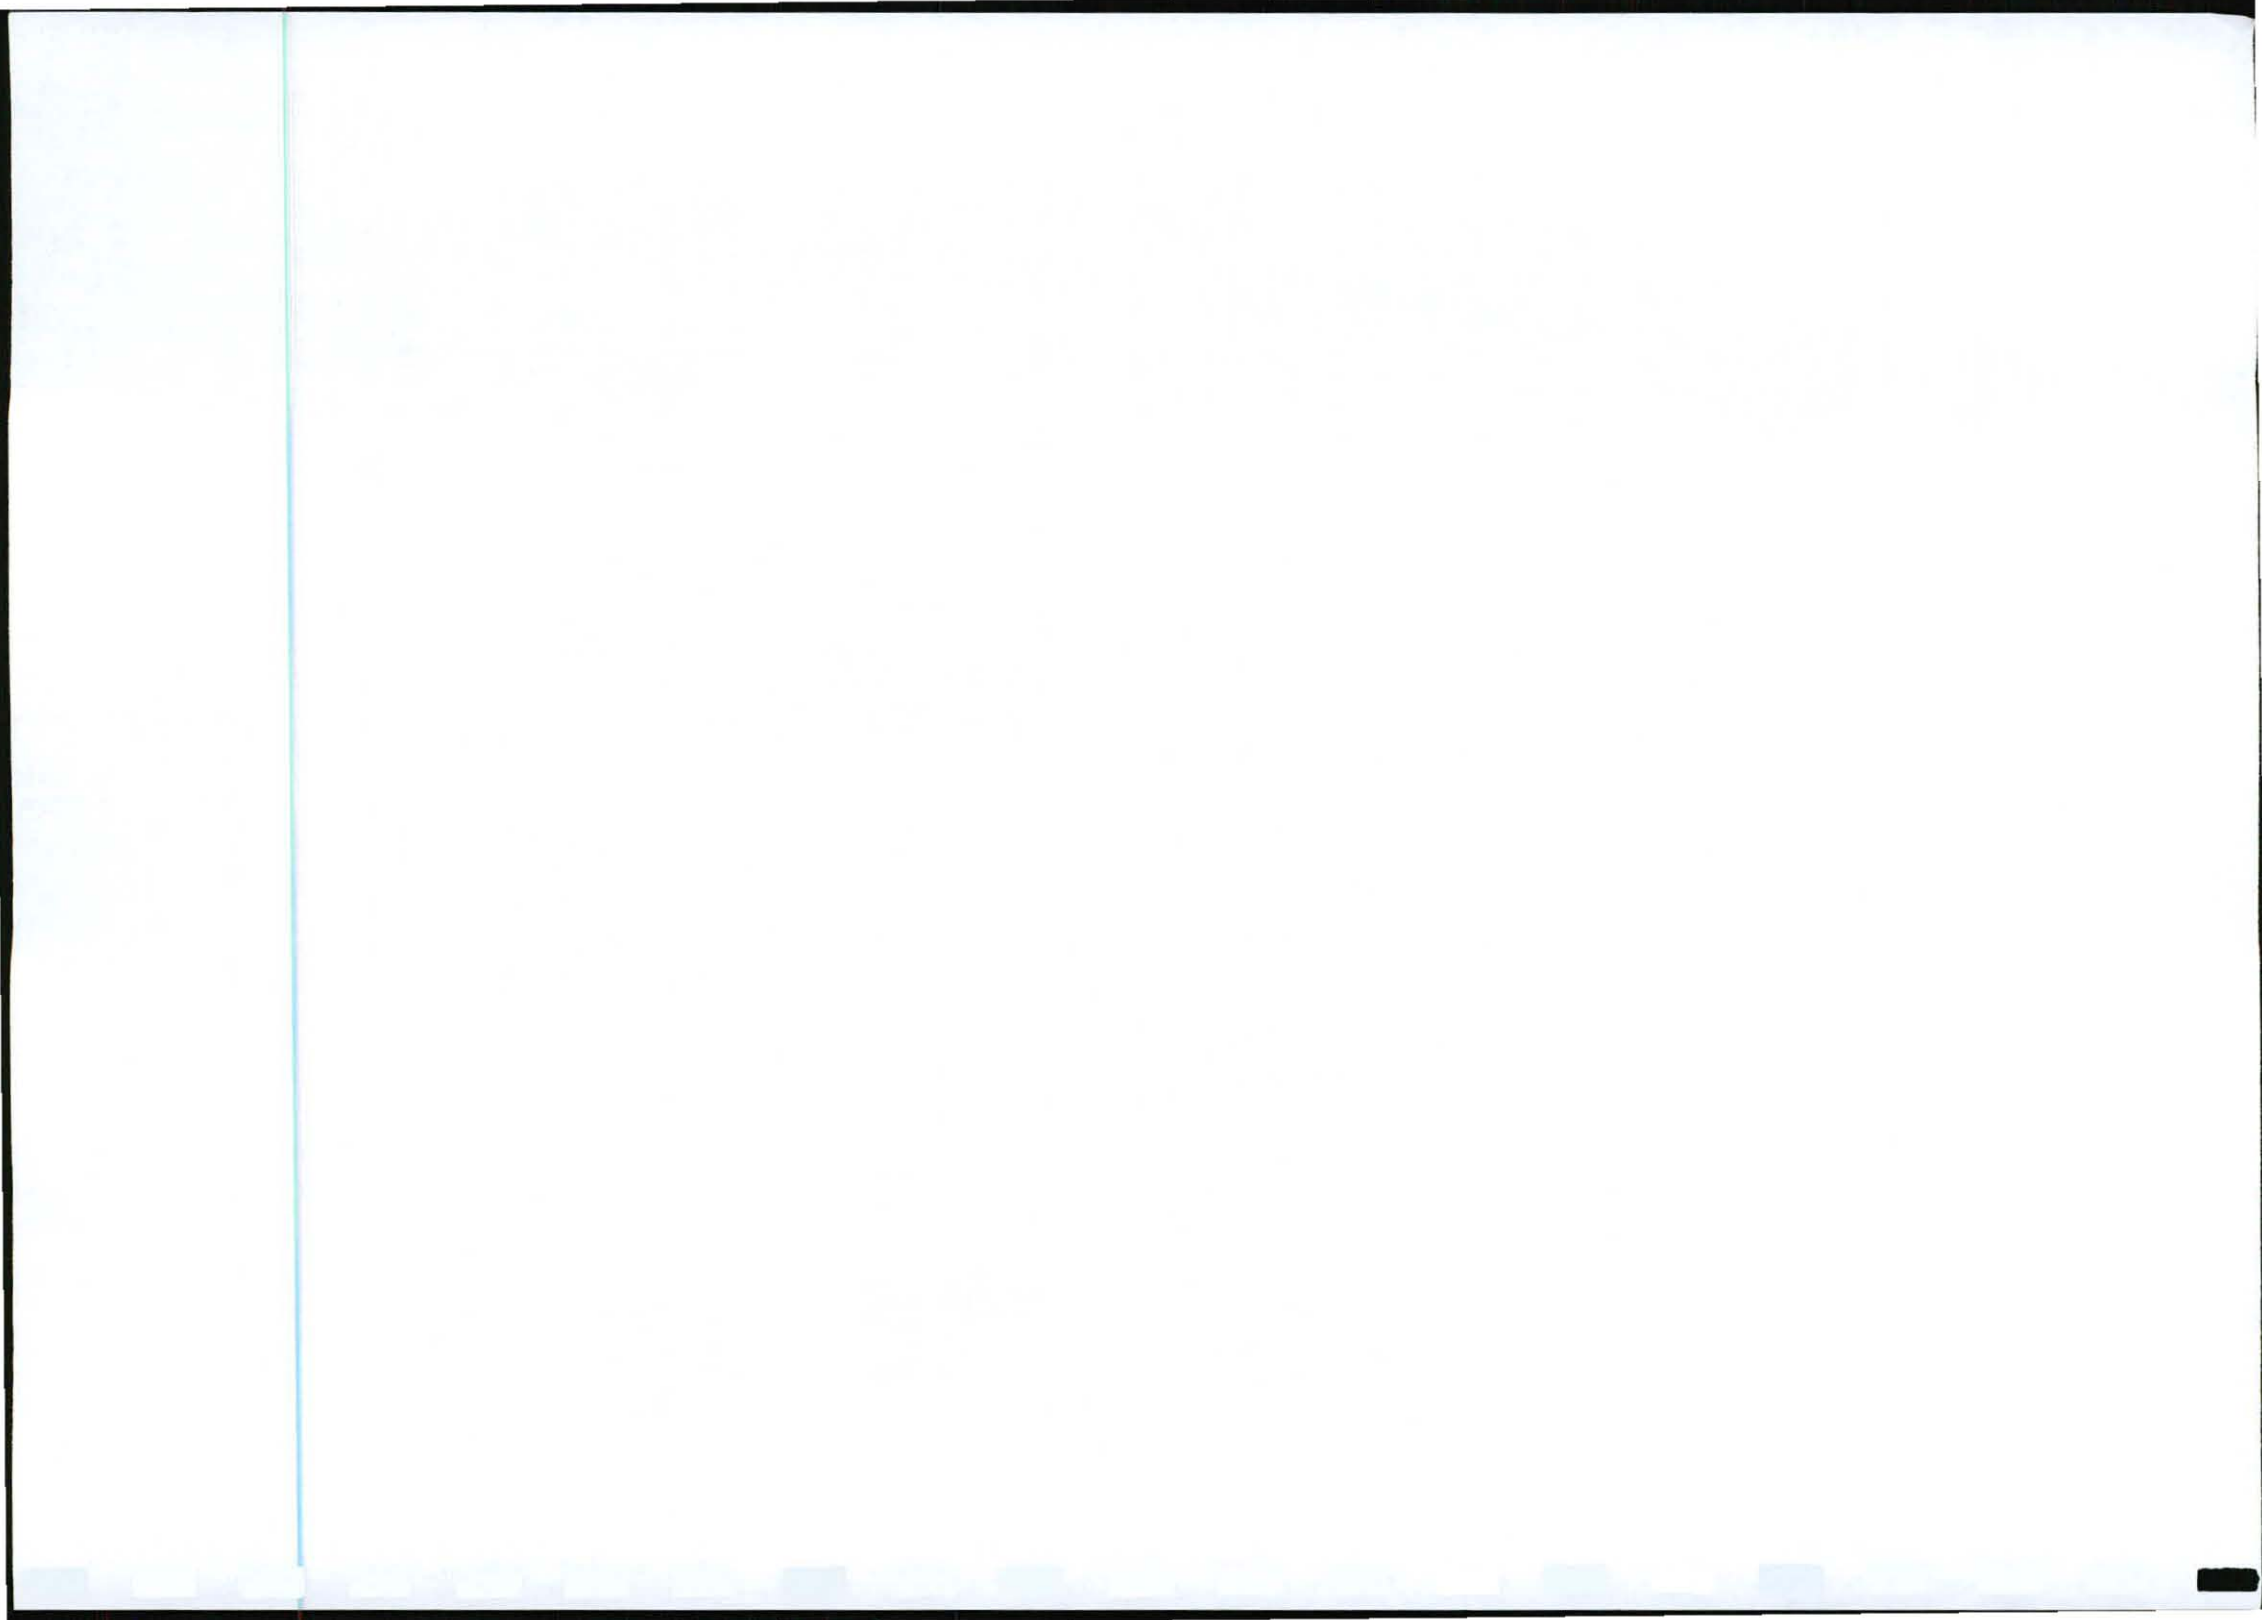


- Identification and training on the following dangerous animals; Bees, buffalo, cheetah, elephants, hippopotamus, hyena, leopard, lion, rhinoceros, scorpions, snakes, spider, tiger, wild dog, wildebeest.
- Behaviour when confronted by dangerous animals
- General behaviour in parks, game farms; etc.
- Training Eskom staff on this guide.
- Training manuals or other reference material to be developed as part of a training package.
- Training on Eskom rights.
- Training on the need of certain farms to spray Eskom vehicle tyres; etc for diseases upon entry into e.g. chicken farms.

FIRE BREAKS AND SERVITUDE MAINTENANCE

The servitude areas has to be maintained to ensure the safety of the Eskom hardware, but in particular the safety of the landowner and his property. Should the servitude not be maintained this can result in danger to the power line as well as damage to the property of the landowner.

- In the case of 33kV, 88kV and 132kV distribution power lines, Eskom obtains the rights to a servitude.
- A servitude is a real right which Eskom obtained in order to construct its infrastructure upon the affected property and it is registered in the Deeds Office against the title deed of the affected property. The effected owner normally gets compensated for this right according to market related values. The servitude stays effective even if a property is transferred to another owner.
- The National Veld and Forest Fire Act (Act 101 of 1998) places an obligation on the owner to ensure compliance and hence creation of fire-breaks amongst other. The Act defines owner as follows: "owner" has its common law meaning and includes— (a) a lessee or other person who controls the land in question in terms of a contract, testamentary document, law or order of a High Court;.
- The Eskom understanding is that Eskom needs to ensure compliance to the Act where it has purchased a property (hence being the owner) such as a substation. Eskom is not considered as the owner for rights obtained via a wayleave agreement or servitude. Hence, the requirements for creating firebreaks or joining Fire Protection Agencies are applicable as far as where Eskom has a substation and not for power lines. These opinions were reflected in the specifications – thus, the Vegetation Management Standard does not specify requirements for fire breaks.
- Fire Risk Management is dealt with under a procedure titled "Distribution Fire Risk Management", reference SCSASAAJ6. Grass fires are dealt with in this procedure stating that vegetation and equipment must be maintained. A specific procedure deals with fire risk management for substations where the chipped stone needs to be maintained to prevent vegetation growth.
- Eskom Distribution does not make use of the practice to burn fire breaks, since this is not a legal requirement. Rather, it relies on the maintenance of vegetation in accordance to its Vegetation Management Standard to reduce the risk of fires starting from Eskom infrastructure.
- Eskom Distribution Division does not remove the grass below power lines since this does not pose a safety risk and will create the potential for erosion, causing environmental degradation and hence legal liability. It will furthermore be an economically unsustainable exercise for Eskom given the amount of power lines throughout South Africa.
- The existing complaints structure must be revised by Eskom and be updated on a regular basis and communicated with all the affected landowners to ensure effective response and service supply.
- The contact details of all landowners affected as well as relevant Eskom staff must be listed and updated regularly and be communicated with all the stakeholders to ensure effective communication in the case of emergencies such as veldfires.
- Branches and other debris resulting from pruning processes should not be left below conductors or in areas where it will pose a risk to infrastructure.
- Debris shall not be burnt under any circumstances
- Fires shall not be made for the purpose of chasing or disturbing indigenous fauna.
- Eskom encourages affected landowners and maintenance staff to participate in the Fire Protection Agency.

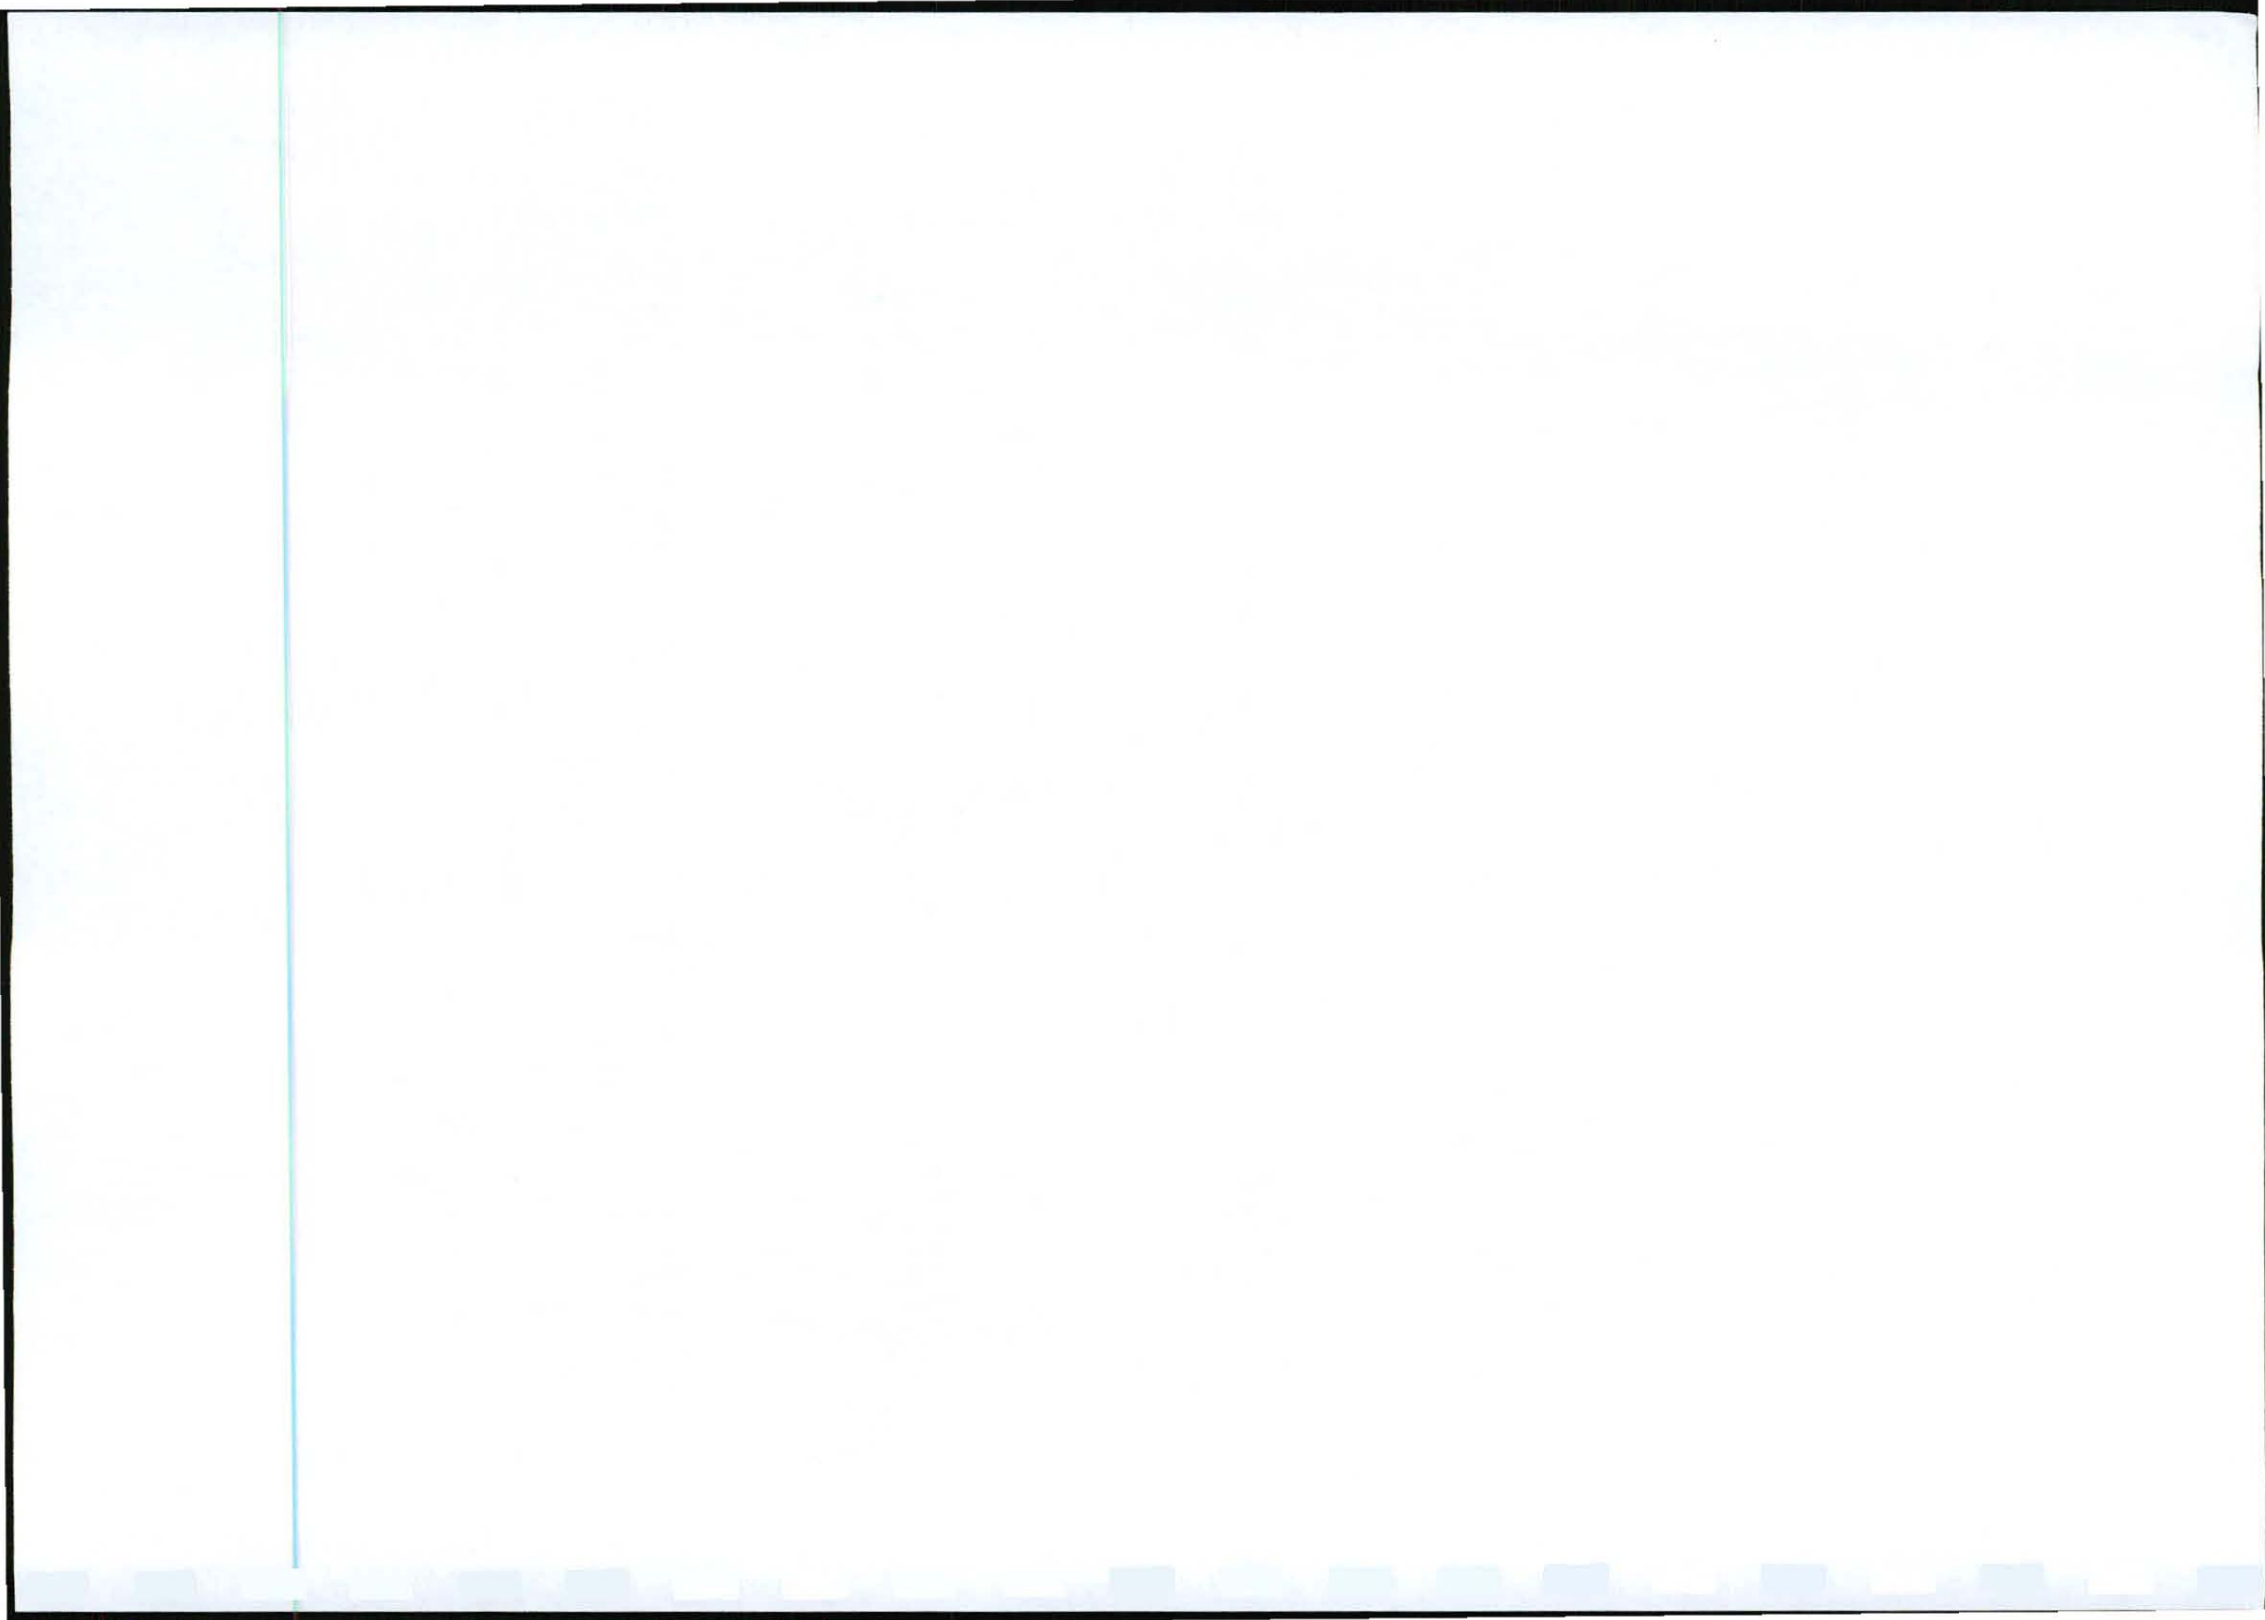

SOIL EROSION


- Specifications for topsoil storage and replacement to ensure sufficient soil coverage as soon as possible after construction activities as identified in the Environmental Management Programme must be implemented.
- All embankments (if any) must be adequately compacted and planted with grass to stop any excessive erosion and scouring of the landscape.
- After construction, all roads should be rehabilitated.
- The site must be rehabilitated and replanted with suitable, indigenous grass to prevent erosion.
- Vegetation within the powerline corridors to be mowed as a maintenance procedure and not ploughed. Ploughing disturbs the soils, increasing the possibility of soil erosion by water runoff.
- Areas around foundation slabs to be checked before and after the summer rainy season for signs of soil erosion due to stormwater run-off. Such sites need to be modified and rehabilitated to prevent ongoing erosion. These sites need to be monitored more closely than other sites which show no or minimal signs of erosion.

ALIEN VEGETATION

- Mechanical control of alien plants around disturbed areas to be implemented within two months of completion of construction. Thereafter every six months. These areas will be predominantly around the erected pylons where the soils were originally disturbed during the construction phase. Mechanical control to be of such a nature as to allow local grasses and other pioneer plants to colonise the previously disturbed areas, thereby keeping out alien invasives.
- No chemical control (herbicides) of alien plants to be used. These chemicals will have a detrimental effect on the surrounding vegetation and habitats.
- Vegetation under pylons and next to pylons to be mowed and not ploughed. This in an effort to avoid disturbing the ground which leaves it open to colonisation by alien weeds.
- Disturbance of the soils must be kept to an absolute minimum to limit the potential introduction of alien plants. This area is pristine with little to no alien infestation. Alien plants generally get a foothold in an area where the soils have been disturbed.

CONSTRUCTION SITE CLEARANCE

- After construction, any building material, signs of excess concrete, equipment, houses, ablution facilities, building rubble, refuse and litter needs to be removed and cleaned up from the construction site as well as from the store room by the contractor. This within 3 months of completion of the project
- Proper and complete take down and removal of all temporary accommodation sites, storage sites, etc. needs to take place within three months of completion of the project. This includes all litter.
- Items that can be used again should be recycled. Unusable waste steel and aluminum will be sold to scrap dealers for recycling at the Eskom stores.
- Any waste that cannot be recycled should be transported to the appropriate landfill site licensed in terms of section 20 (b) of the National Environment Management Waste Act, 2008 (Act No 59 of 2008).
- Once construction is completed, the contractor has to obtain written consent from the relevant landowner that the construction site, construction areas, access routes, etc. are sufficiently and adequately rehabilitated to the landowners' satisfaction.
- All disturbed sites and surfaces to be rehabilitated.
- No unused piles of sand, soil or construction materials of any kind whatsoever to be left in the powerline corridors, or at temporary construction or storage sites.

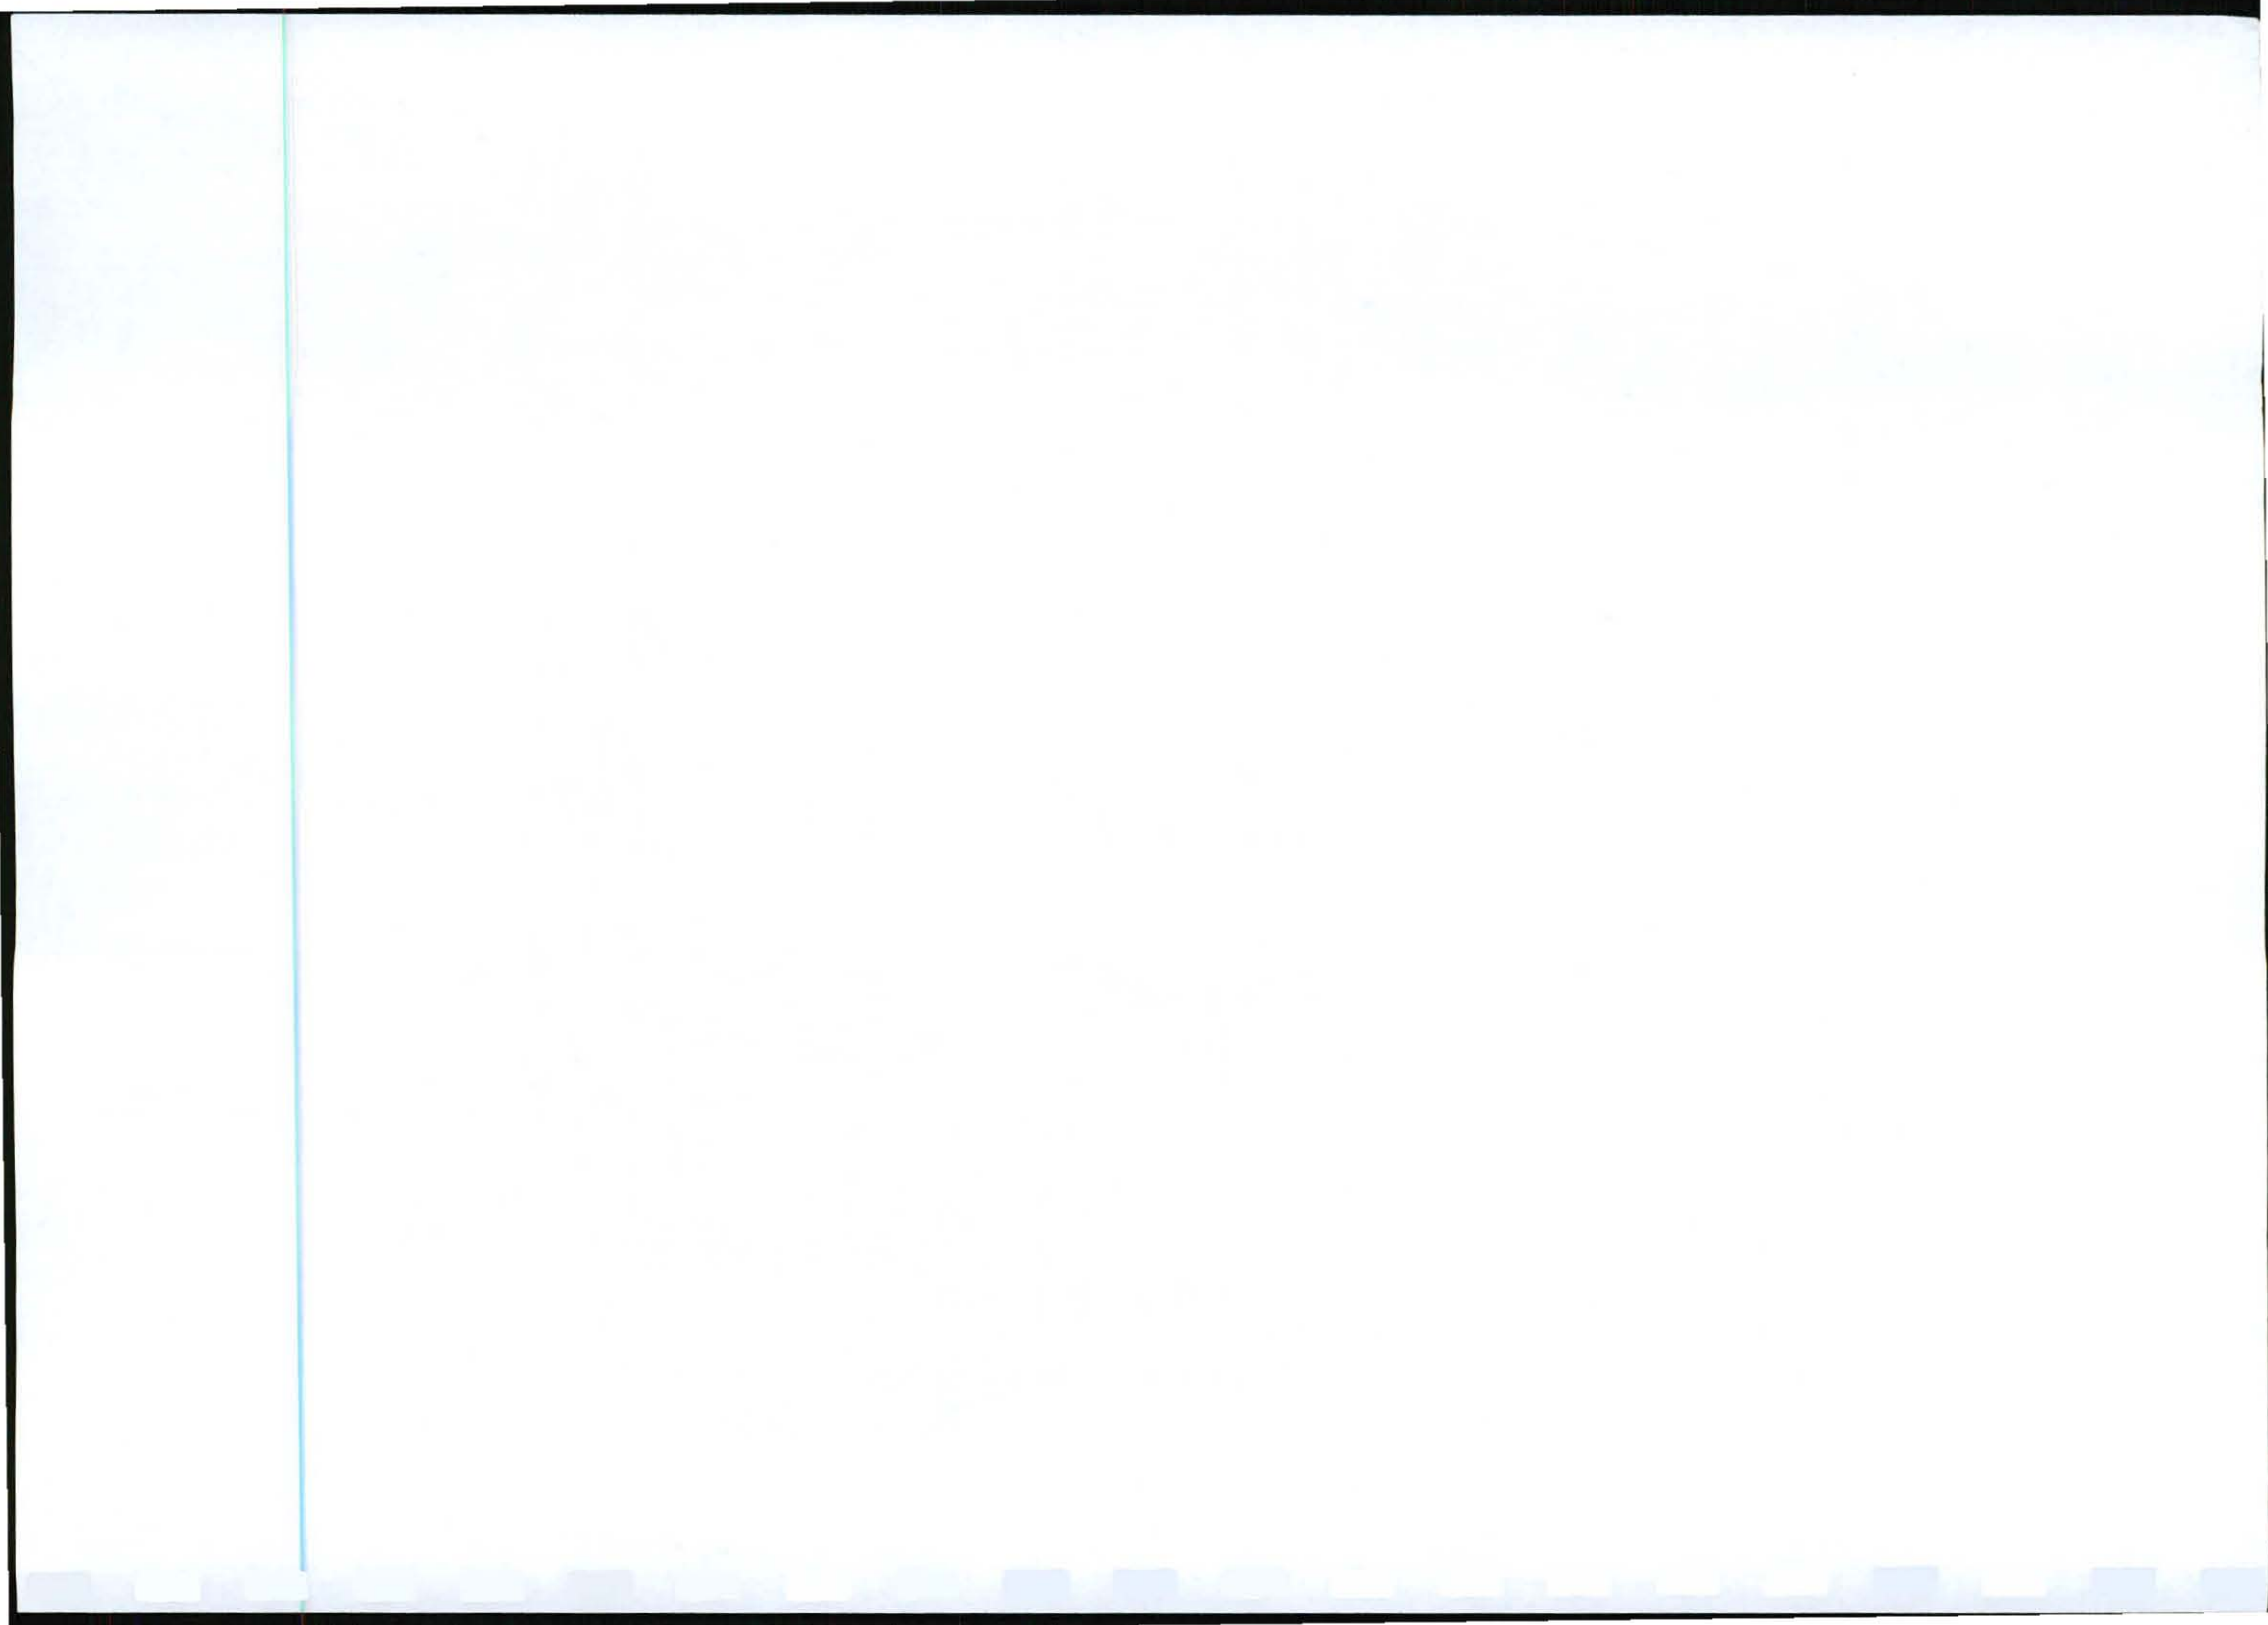

COMMUNITY ISSUES


- All complaints received with regards to poor conduct of Eskom personnel, malfunction of or damage to Eskom structures; bird killings as a result of electrocutions and/or collisions; etc. will be investigated by Eskom in co-operation with all the relevant stakeholders.
- The existing complaints structure must be revised by Eskom and be updated on a regular basis and communicated with all the affected landowners to ensure effective response and service supply.
- A list of all names, telephone numbers and addresses of the relevant Eskom employees, contractors and all affected landowners must be compiled and regularly updated and distributed to everyone to ensure sufficient communication channels in case of emergency and where access is required for maintenance and debushing purposes.
- Once construction is completed, the contractor has to obtain written consent from the relevant landowner that the construction site, construction areas, access routes, etc. are sufficiently and adequately rehabilitated to the landowner's satisfaction.
- No wandering on adjacent properties is allowed, unless written consent has been obtained from the relevant landowners.

VEGETATION MAINTENANCE OF THE SERVITUDE

- The document "Eskom Environmental Procedure: Procedure for Vegetation Clearing and Maintenance within Overhead Powerline Servitudes and on Eskom owned land", updated September 2007, must be implemented.
- Selective bush clearing must take place. Indigenous vegetation which would not interfere with the safe operation of the new Substation and the power line should be left undisturbed.
- A minimum rolling three year vegetation management programme should be promoted. This will allow effective identification, management and follow up of problematic vegetation.
- Surface area under powerlines to be mowed and not ploughed.
- Alien vegetation in servitudes shall be managed in terms of Regulation GNR.1048 of 25 May 1984 (as amended) issued in terms of the Conservation of Agricultural Resources Act, Act 43 of 1983. In terms of these regulations, Eskom shall "control" i.e. combat category 1, 2 and 3 plants to the extent necessary to prevent or to contain the occurrence, establishment, growth, multiplication, propagation, regeneration and spreading such plants within servitude areas or land owned by Eskom. Due to the nature of alien vegetation, a control programme for alien vegetation control must be implemented.
- Mechanical control of alien plants around disturbed areas to be implemented within two months of completion of construction. Thereafter every six months. These areas will be predominantly around the erected pylons where the soils were originally disturbed during the construction phase. Mechanical control to be of such a nature as to allow local grasses and other pioneer plants to colonise the previously disturbed areas, thereby keeping out alien invasives.
- No chemical control (herbicides) of alien plants to be used. These chemicals will have a detrimental effect on the surrounding vegetation and habitats.
- Vegetation under pylons and next to pylons to be mowed and not ploughed. This in an effort to avoid disturbing the ground which leaves it open to colonisation by alien weeds.
- Disturbance of the soils must be kept to an absolute minimum to limit the potential introduction of alien plants. This area is pristine with little to no alien infestation. Alien plants generally get a foothold in an area where the soils have been disturbed.

BIRD IMPACT

- The power line poses a medium-high collision risk, mostly to water associated species, and those species attracted to open habitats, particularly old lands.
- The span that crosses drainage lines and old lands should be marked with Bird Flight Diverters on the earth wire of the line, five metres apart, alternating black and white (see Appendix B Sensitivity map in the Bird impact assessment that is included in Appendix D3 of the BAR, for the area to be marked with Bird Flight Diverters). Appendix C indicates the preferred Bird Flight Diverters to be used.

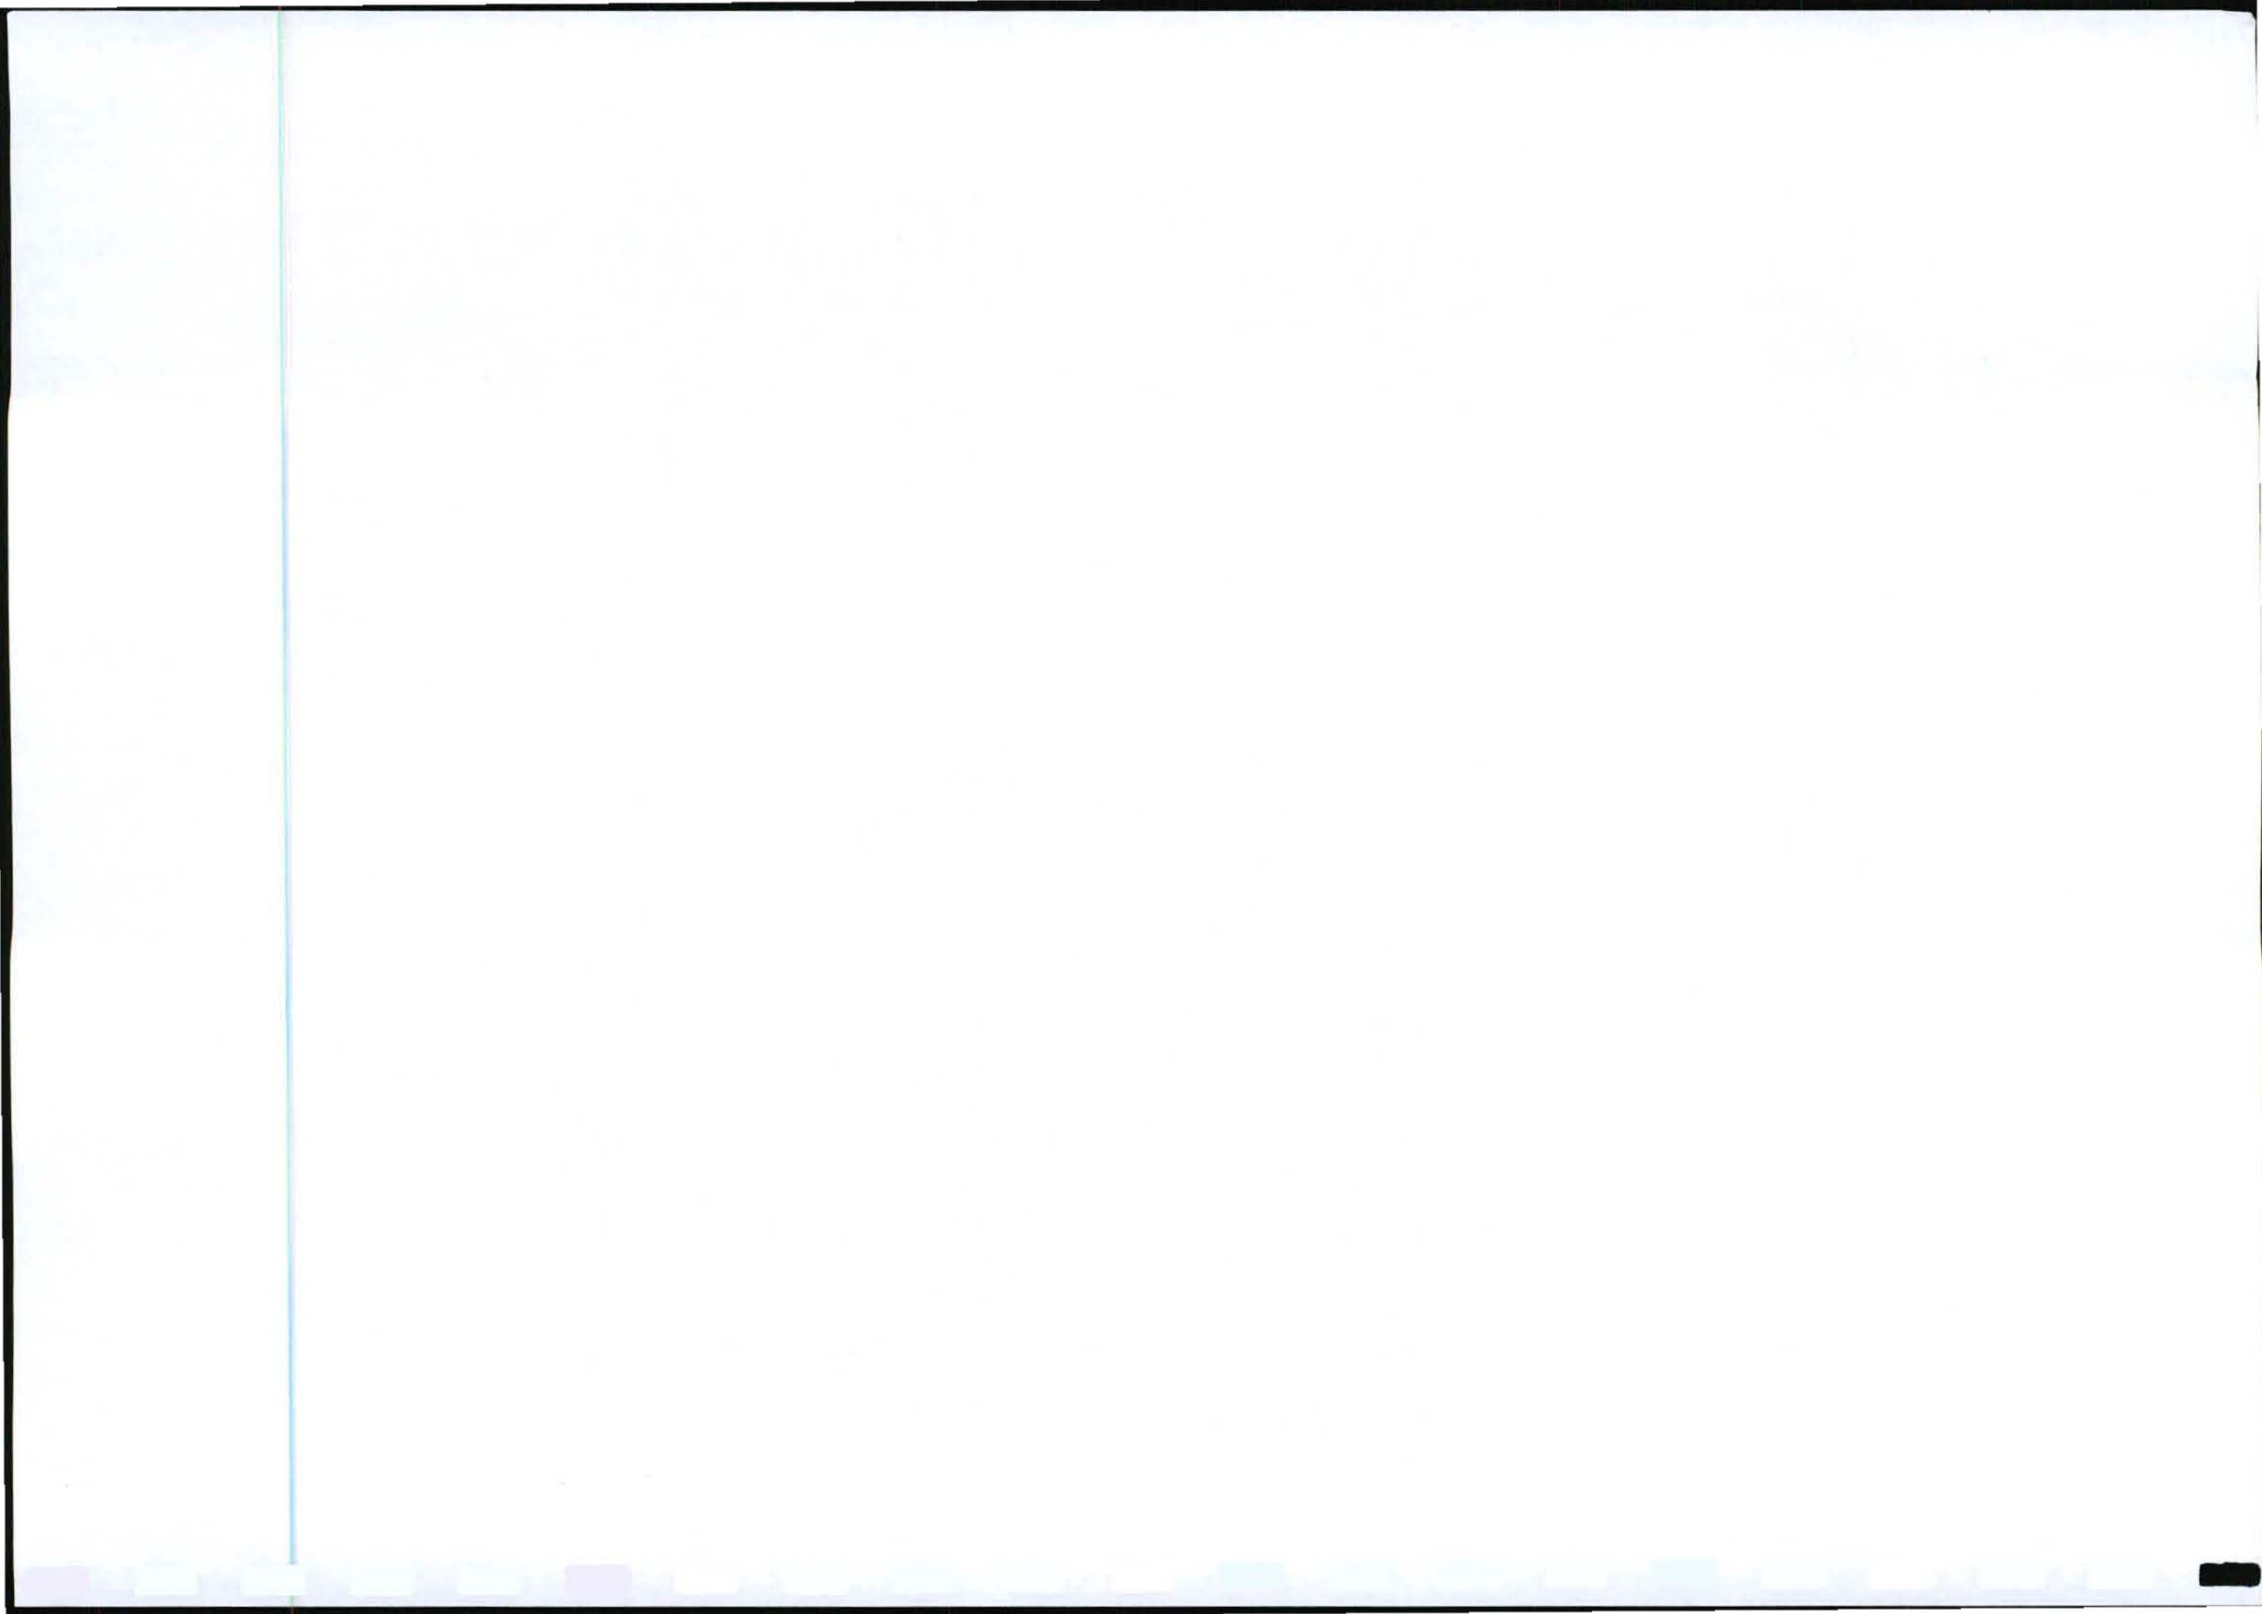

- Although not recorded in large numbers, it is likely that White-backed and Cape Vultures forage in the area. Vultures are able to touch both the conductor and the earthed pole simultaneously potentially resulting in a phase – earth electrocution. This is particularly likely when more than one bird sits on the same pole.
- The risk of phase-earth electrocution is therefore evaluated to be medium. It should be mentioned that the pole design holds no inherent electrocution risk for other large non-gregarious species such as eagles, as they almost never perch together in large numbers next to each other.
- In summary, the line will pose a medium electrocution risk, in particular to vultures.
- The poles should be fitted with bird perches on top of the poles to draw birds, particularly vultures, away from the potentially risky insulators.

MONITORING PROGRAMMES

- The Environmental officer should inspect the construction site on a regular basis to ensure that the mitigation and rehabilitation measures are applied as specified in the Environmental Management Plan.
- Inspection of the servitude should include monitoring of the servitude during the Post-Construction & Operational Phase to detect any potential erosion problems timely. Mitigation measures should immediately be identified and implemented by Eskom in cooperation with the landowner.
- Any incidents resulting from Eskom structures and operation that might have a detrimental impact on the environment will be investigated and measures, if applicable, will be identified in close cooperation with the affected parties and/or stakeholders and be implemented and monitored accordingly.
- Eskom must at all times follow acceptable maintenance and operational practices to ensure consistent, effective and safe performance of the infrastructure.

DECOMMISSIONING

Should the powerlines have to be decommissioned in the future (it is not envisaged), the structures will generally have to be physically removed. This will entail the reversal of the construction process with potential significant environmental impact if not undertaken in a sensitive manner. It is therefore recommended that Eskom compile an Environmental Management Programme (EMPr) specifically for the decommissioning process at that stage to restrict and prevent potential negative impact on the environment.

It is proposed that this EMPr for Decommissioning includes the following mitigating measures:

- The construction teams will ensure that all waste is removed from the site and that all items are recycled as far as possible at the Eskom stores. Excess waste steel and aluminum can also be sold to scrap dealers for recycling.
- Any waste that cannot be recycled will be transported to the appropriate landfill site licensed in terms of section 20 (b) of the National Environment Management Waste Act, 2008 (Act No 59 of 2008).
- The natural habitat within the servitudes will as far as reasonable be rehabilitated to its original state.
- Once construction is completed, the contractor has to obtain written consent from the relevant landowner that the construction site, construction areas, access routes, etc. are sufficiently and adequately rehabilitated to the landowner's satisfaction.

