

Agricultural Potential Assessment for the Great Karoo Renewable Energy Project – Moriri Solar Photovoltaic Energy Facility

Ubuntu Local Municipality, Northern Cape

December 2021

Client



Prepared by:

The Biodiversity Company

Cell: +27 81 319 1225
Fax: +27 86 527 1965
info@thebiodiversitycompany.com
www.thebiodiversitycompany.com



Report Name		at Karoo Renewable Energy Project – Moriri Solar Energy Facility
Submitted to	Savannah E	Environmental
	Andrew Husted	HAX
Report Reviewer	with a MSc in Zoology. He, is Pr Sci Nat registered (Science, Environmental Science and Aquatic Science Specialist with 12 years' experience in the environmental	ng in freshwater systems and wetlands, who graduated 400213/11) in the following fields of practice: Ecological ce. Mr Husted is an Aquatic, Wetland and Biodiversity ntal consulting field. In addition to his ecological working I soil assessments, this includes the consideration of land
Report Writer	Ivan Baker	J.
	wetland and ecosystem service specialist, a hydrope specialist studies ranging from basic assessments to following FC standards. Ivan completed training in	environmental science and geological science. Ivan is a edologist and pedologist that has completed numerous EIAs. Ivan has carried out various international studies Tools for Wetland Assessments with a certificate of science and hydropedology at the North-West University
Declaration	South African Council for Natural Scientific Profession financial interests in the proponent, other than for work Regulations, 2017. We have no conflicting interests in secondary developments resulting from the authorise	e as independent consultants under the auspice of the ns. We declare that we have no affiliation with or vested a performed under the Environmental Impact Assessment in the undertaking of this activity and have no interests in ation of this project. We have no vested interest in the within the constraints of the project (timing, time and



Table of Contents

1	Intr	oduction	1
	1.1	Project Description	1
2	Sco	pe of Work	2
3	Lim	itations	2
4	Exp	ertise of the Specialists	3
	4.1	Andrew Husted	3
	4.2	Ivan Baker	3
5	Lite	rature Review	3
	5.1	Land Capability	3
6	Met	hodology	4
	6.1	Desktop Assessment	4
	6.2	Agricultural Potential Assessment	4
	6.3	Climate Capability	6
	6.4	Current Land Use	7
7	Des	sktop Findings	7
	7.1	Climate	7
	7.2	Soils and Geology	8
	7.3	Terrain	10
8	Res	sults and Discussion	13
	8.1	Baseline Findings	13
	8.2	Sensitivity Verification	15
9	Imp	act Statement	16
	9.1	Construction Phase	16
	9.2	Operational Phase	16
	9.3	Cumulative Impacts	17
	9.4	Cumulative ImpactsError! Bookmark not define	∍d.
	9.5	Specialist Opinion	17
1() Red	commendations and Mitigation	18
	10.1	General Mitigation	18
	10.2	Restoration of Vegetation Cover	18
	10.2	2.1 Ripping Compacted Areas	18
	10.3	Specialist Recommendation	18
1	1 Cor	nclusion	18
12	2 Ref	erences	20



Figures

Figure 7-1	Climate for the region	8
Figure 7-2	Land Types present within the project area	9
Figure 7-3	Illustration of land type Da 147 terrain unit (Land Type Survey Staff, 1972 - 2006)	9
Figure 7-4	Illustration of land type Fb 488 terrain unit (Land Type Survey Staff, 1972 - 2006)	9
Figure 7-5	The slope percentage calculated for the project area	11
Figure 7-6	The DEM generated for the project area	12
Figure 8-1	Examples of horizons associated with the Tubatse and Bethesda soil forms. Neocutanic horizon. B) Transition between neocutanic and lithic horizon	
Figure 8-2	Land Capability Sensitivity (DAFF, 2017)	15
	Tables	
Table 5-1	Land Capability (DAFF, 2017)	3
Table 6-1	Land capability class and intensity of use (Smith, 2006)	4
Table 6-2	The combination table for land potential classification	5
Table 6-3	The Land Potential Classes.	5
Table 6-4	Climatic capability (step 1) (Scotney et al., 1987)	6
Table 7-1	Soils expected at the respective terrain units within the Da 147 land type (Land Ty Survey Staff, 1972 - 2006)	•
Table 7-2	Soils expected at the respective terrain units within the Fb 488 land type (Land Ty Survey Staff, 1972 - 2006)	•
Table 9-1	Impact assessment related to the loss of land capability during the construction phate of the proposed PV area	
Table 9-2	Impact assessment related to the loss of land capability during the operational phase the proposed PV area	
Table 9-3	Impact assessment related cumulative impacts	17





Declaration

I, Ivan Baker declare that:

- I act as the independent specialist in this application;
- I will perform the work relating to the application in an objective manner, even if this results in views and findings that are not favourable to the applicant;
- I declare that there are no circumstances that may compromise my objectivity in performing such work;
- I have expertise in conducting the specialist report relevant to this application, including knowledge of the Act, regulations and any guidelines that have relevance to the proposed activity;
- I will comply with the Act, regulations and all other applicable legislation;
- I have no, and will not engage in, conflicting interests in the undertaking of the activity;
- I undertake to disclose to the applicant and the competent authority all material information in
 my possession that reasonably has or may have the potential of influencing any decision to be
 taken with respect to the application by the competent authority; and the objectivity of any
 report, plan or document to be prepared by myself for submission to the competent authority;
- all the particulars furnished by me in this form are true and correct; and
- I realise that a false declaration is an offence in terms of Regulation 71 and is punishable in terms of Section 24F of the Act.

Ivan Baker

Soil Specialist

The Biodiversity Company

December 2021



1 Introduction

The Biodiversity Company was appointed to conduct a pedology (agricultural potential, land capability and land use) baseline and impact assessment for the Great Karoo Renewable Energy project. A site assessment was conducted during November 2021.

Great Karoo Renewable Energy (Pty) Ltd is proposing the construction and operation of a photovoltaic (PV) solar energy facility and associated infrastructure on Portion 1 of Farm Rondavel 85, located approximately 35km south-west of Richmond and 80km south-east of Victoria West, within the Ubuntu Local Municipality and the Pixley Ka Seme District Municipality in the Northern Cape Province.

The approach adopted for the assessment has taken cognisance of the recently published Government Notice 320 in terms of NEMA dated 20 March 2020: "Procedures for the Assessment and Minimum Criteria for Reporting on Identified Environmental Themes in terms of Sections 24(5)(a) and (h) and 44 of the National Environmental Management Act, 1998, when applying for Environmental Authorisation".

This report aims to present and discuss the findings from the soil resources identified on-site, the agricultural and land potential of these resources, the land uses within the project area as well as the risks associated with the proposed PV facility.

1.1 Project Description

A preferred project site with an extent of ~29 909 ha and a development area of ~577 ha within the project site has been identified by Great Karoo Renewable Energy (Pty) Ltd as a technically suitable area for the development of the Moriri Solar PV Facility with a contracted capacity of up to 100MW.

The Moriri Solar PV Facility project site is proposed to accommodate the following infrastructure, which will enable the facility to supply a contracted capacity of up to 100MW:

- Solar PV array comprising PV modules and mounting structures;
- Inverters and transformers;
- Cabling between the panels;
- 33/132kV onsite facility substation;
- Cabling from the onsite substation to the collector substation (either underground or overhead);
- Electrical and auxiliary equipment required at the collector substation that serves that solar energy facility, including switchyard/bay, control building, fences, etc;
- Battery Energy Storage System (BESS);
- Site offices and maintenance buildings, including workshop areas for maintenance and storage;
- Laydown areas; and
- Access roads and internal distribution roads.

The solar PV facility is proposed in response to the identified objectives of the national and provincial government and local and district municipalities to develop renewable energy facilities for power generation purposes. It is the developer's intention to bid the Moriri Solar PV Facility under the Department of Mineral Resources and Energy's (DMRE's) Renewable Energy Independent Power Producer Procurement (REIPPP) Programme, with the aim of evacuating the generated power into the national grid. This will aid in the diversification and stabilisation of the country's electricity supply, in line with the objectives of the Integrated Resource Plan (IRP) with the Moriri Solar PV Facility set to inject up to 100MW into the national grid.



2 Scope of Work

The following tasks were completed in fulfilment of the terms of reference for this assessment:

- To conduct a soil assessment which includes a description of the physical properties which
 characterise the soil within the proposed area of development of the relevant portions of the
 affected properties;
- Using the findings from the soil assessment to determine the existing land capability/potential and current land use of the entire surface area of the relevant portions of the project area;
- To determine the sensitivity of the baseline findings;
- The soil classification was done according to the Taxonomic Soil Classification System for South Africa, 1991. The following attributes must be included at each observation:
 - Soil form and family (Taxonomic Soil Classification System for South Africa, 1991);
 - Soil depth;
 - Estimated soil texture;
 - Soil structure, coarse fragments, calcareousness;
 - Buffer capacities;
 - Underlying material;
 - Current land use; and
 - o Land capability.
- To complete an impact statement;
- Discussing the feasibility of the proposed activities;
- Confirmation that no agricultural segregation will take place and that all options have been considered to avoid segregation; and
- Recommend relevant mitigation measures to limit all associated impacts.

3 Limitations

The following limitations are relevant to this agricultural compliance statement;

- It has been assumed that the extent of the properties to be assessed together with the locations of the proposed components are correct and final;
- The assessment area was based on the area provided by the client and any alterations to the route and/or missing GIS information pertaining to the assessment area would have affected the area surveyed; and
- The handheld GPS used potentially could have inaccuracies up to 5 m. Any and all delineations therefore could be inaccurate within 5 m.



4 Expertise of the Specialists

4.1 Andrew Husted

Mr. Andrew Husted is an aquatic ecologist, specializing in freshwater systems and wetlands, who graduated with a MSc in Zoology. He, is Pr Sci Nat registered (400213/11) in the following fields of practice: Ecological Science, Environmental Science and Aquatic Science. Mr Husted is an Aquatic, Wetland and Biodiversity Specialist with 12 years' experience in the environmental consulting field. In addition to his ecological working experience, Andrew has experience in agricultural and soil assessments, this includes the consideration of land uses and land cover.

4.2 Ivan Baker

Ivan Baker is Cand. Sci Nat registered (119315) in environmental science and geological science. Ivan is a wetland and ecosystem service specialist, a hydropedologist and pedologist that has completed numerous specialist studies ranging from basic assessments to EIAs. Ivan has carried out various international studies following FC standards. Ivan completed training in Tools for Wetland Assessments with a certificate of competence and completed his MSc in environmental science and hydropedology at the North-West University of Potchefstroom.

5 Literature Review

5.1 Land Capability

According to Smith (2006), the capability of land concerns the wise use of land to ensure economical production on a sustained basis, under specific uses and treatments. The object of land classification is the grouping of different land capabilities, to indicate the safest option for use, to indicate permanent hazards and management requirements. These land capability classes decrease in capability from I to VIII and increase in risk from I to VIII. DAFF (2017) further defines land capability as "the most intensive long-term use of land for purposes of rainfed farming, determined by the interaction of climate, soil and terrain.

DAFF (2017) has further modelled the land capability on a rough scale for the entire of South Africa and has divided these results into 15 classes (see Table 5-1). Terrain, climate and soil capability was used as the building blocks for this exercise to ensure a national land capability data set.

Table 5-1 Land Capability (DAFF, 2017)

Land Capability Class (DAFF, 2017)	Description of Capability
1	Marria
2	Very Low
3	
4	Very Low to Low
5	Low
6	
7	Low to Moderate
8	Moderate
9	Moderate to High





10	
11	High
12	High to Van High
13	High to Very High
14	Vandlink
15	Very High

It is worth noting that this nation-wide data set has some constraints of its own. According to DAFF (2017), inaccuracies and the level of detail of these datasets are of concern. Additionally, the scale used to model these datasets are large (1:50 000 to 1:100 000) and is not suitable for farm level planning. Furthermore, it is mentioned by DAFF (2017) that these datasets should not replace any site-based assessments given the accuracies perceived.

6 Methodology

The pedology assessment was conducted using the Provincial and National Departments of Agriculture recommendations. The assessment was broken into two phases. Phase 1 was a desktop assessment to determine the following:

- Historic climatic conditions;
- The base soils information from the land type database (Land Type Survey Staff, 1972 2006); and
- The geology for the proposed project site.

Phase 2 of the assessment was to conduct a soil survey to determine the actual agricultural potential. During this phase the current land use was also surveyed.

6.1 Desktop Assessment

As part of the desktop assessment, baseline soil information was obtained using published South African Land Type Data. Land type data for the site was obtained from the Institute for Soil Climate and Water (ISCW) of the Agricultural Research Council (ARC) (Land Type Survey Staff, 1972 - 2006). The land type data is presented at a scale of 1:250 000 and comprises of the division of land into land types.

6.2 Agricultural Potential Assessment

Land capability and agricultural potential will be determined by a combination of soil, terrain and climate features. Land capability is defined by the most intensive long-term sustainable use of land under rain-fed conditions. At the same time an indication is given about the permanent limitations associated with the different land use classes.

Land capability is divided into eight classes and these may be divided into three capability groups. Table 6-1 shows how the land classes and groups are arranged in order of decreasing capability and ranges of use. The risk of use and sensitivity increases from class I to class VIII (Smith, 2006).

Table 6-1 Land capability class and intensity of use (Smith, 2006)

Land		Land
Capability	Increased Intensity of Use	Capability
Class		Groups





1	W	F	LG	MG	IG	LC	MC	IC	VIC	
II	W	F	LG	MG	IG	LC	MC	IC		Aughla Laud
III	W	F	LG	MG	IG	LC	MC			Arable Land
IV	W	F	LG	MG	IG	LC				
V	W	F	LG	MG						
VI	W	F	LG	MG						Grazing Land
VII	W	F	LG							
VIII	W									Wildlife
W - Wildlife		MG - M	oderate Gra	zing	MC - Mode	erate Cultiv	ation			
F- Forestry IG - Intensive Grazing		IC - Intensive Cultivation								
LG - Light Gra	zing	LC - Lig	ght Cultivati	on	VIC - Very	Intensive C	Cultivation			

Land capability has been classified into 15 different categories by DAFF (2017) which indicates the national land capability category and associated sensitivity related to soil resources. Given the fact that ground truthing and DSM exercises have indicated anomalies in the form of high sensitivity soil resources (which was not indicated by the DAFF (2017) raster file), the ground-truthed baseline delineations and sensitivities were used for this assessment rather than that of DAFF (2017).

The land potential classes are determined by combining the land capability results and the climate capability of a region as shown in Table 6-2. The final land potential results are then described in Table 6-3. These land potential classes are regarded as the final delineations subject to sensitivity, given the comprehensive addition of climatic conditions as those relevant to the DAFF (2017) land capabilities. The main contributors to the climatic conditions as per Smith (2006) is that of Mean Annual Precipitation (MAP), Mean Annual Potential Evaporation (MAPE), mean September temperatures, mean June temperatures and mean annual temperatures. These parameters will be derived from Mucina and Rutherford (2006) for each vegetation type located within the relevant project area. This will give the specialist the opportunity to consider microclimate, aspect, topography etc.

Table 6-2 The combination table for land potential classification

I and conclidity along		Climate capability class						
Land capability class	C1	C2	C 3	C4	C5	C6	C 7	C8
1	L1	L1	L2	L2	L3	L3	L4	L4
II	L1	L2	L2	L3	L3	L4	L4	L5
III	L2	L2	L3	L3	L4	L4	L5	L6
IV	L2	L3	L3	L4	L4	L5	L5	L6
V	Vlei	Vlei	Vlei	Vlei	Vlei	Vlei	Vlei	Vlei
VI	L4	L4	L5	L5	L5	L6	L6	L7
VII	L5	L5	L6	L6	L7	L7	L7	L8
VIII	L6	L6	L7	L7	L8	L8	L8	L8

Table 6-3

The Land Potential Classes.





Land potential	Description of land potential class
L1	Very high potential: No limitations. Appropriate contour protection must be implemented and inspected.
L2	High potential: Very infrequent and/or minor limitations due to soil, slope, temperatures or rainfall. Appropriate contour protection must be implemented and inspected.
L3	Good potential: Infrequent and/or moderate limitations due to soil, slope, temperatures or rainfall. Appropriate contour protection must be implemented and inspected.
L4	Moderate potential: Moderately regular and/or severe to moderate limitations due to soil, slope, temperatures or rainfall. Appropriate permission is required before ploughing virgin land.
L5	Restricted potential: Regular and/or severe to moderate limitations due to soil, slope, temperatures or rainfall.
L6	Very restricted potential: Regular and/or severe limitations due to soil, slope, temperatures or rainfall. Non-arable
L7	Low potential: Severe limitations due to soil, slope, temperatures or rainfall. Non-arable
L8	Very low potential: Very severe limitations due to soil, slope, temperatures or rainfall. Non-arable

6.3 Climate Capability

According to Smith (2006), climatic capability is determined by taking into consideration various steps pertaining to the temperature, rainfall and Class A-pan of a region. The first step in this methodology is to determine the Mean Annual Precipitation (MAP) to Class A-pan ratio.

Table 6-4 Climatic capability (step 1) (Scotney et al., 1987)

Climatic Capability Class	Limitation Rating	Description	MAP: Class A- pan Class
C1	None to Slight	Local climate is favourable for good yields for a wide range of adapted crops throughout the year.	0.75-1.00
C2	Slight	Local climate is favourable for a wide range of adapted crops and a year-round growing season. Moisture stress and lower temperature increase risk and decrease yields relative to C1.	0.50-0.75
C3	Slight to Moderate	Slightly restricted growing season due to the occurrence of low temperatures and frost. Good yield potential for a moderate range of adapted crops.	0.47-0.50
C4	Moderate	Moderately restricted growing season due to the occurrence of low temperatures and severe frost. Good yield potential for a moderate range of adapted crops but planting date options more limited than C3.	0.44-0.47
C 5	Moderate to Severe	Moderately restricted growing season due to low temperatures, frost and/or moisture stress. Suitable crops at risk of some yield loss.	0.41-0.44
C6	Severe	Moderately restricted growing season due to low temperatures, frost and/or moisture stress. Limited suitable crops that frequently experience yield loss.	0.38-0.41
C 7	Severe to Very Severe	Severely restricted choice of crops due to heat and moisture stress.	0.34-0.38
C8	Very Severe	Very severely restricted choice of crops due to heat and moisture stress. Suitable crops at high risk of yield loss.	0.30-0.34

In the event that the MAP: Class A-pan ratio is calculated to fall within the C7 or C8 class, no further steps are required, and the climatic capability can therefore be determined to be C7 or C8. In cases where the above-mentioned ratio falls within C1-C6, steps 2 to 3 will be required to further refine the climatic capability.

Step 2

Mean September temperatures;





- <10 °C = C6;
- 10 11 °C = C5;
- 11 12 °C = C4;
- $12 13^{\circ}C = C3$; and
- >13 °C = C1.

Step 3

Mean June temperatures;

- <9 °C = C5;
- 9 10 °C = C4;
- $10 11 ^{\circ} C = C3$; and
- $11 12 \degree C = C2$.

6.4 Current Land Use

A generalised land-use will be derived for the larger project area considering agricultural productivity.

- Mining;
- · Bare areas;
- Agriculture crops;
- Natural veld;
- Grazing lands;
- Forest;

- Plantation;
- Urban;
- Built-up;
- Waterbodies; and
- · Wetlands.

7 Desktop Findings

7.1 Climate

This region's climate is characterised by rainfall during autumn and summer months which peaks at a Mean Annual Precipitation (MAP) ranging from 180 to 430 mm (from west to east respectively). This area is characterised by a high frost occurrence rate ranging from just below 30 to 80 days per year (Mucina and Rutherford, 2006). The mean minimum and maximum temperatures in Middelburg area -7.2 °C and 36.1 °C for July and January respectively (also see Figure 7-1 for more information).



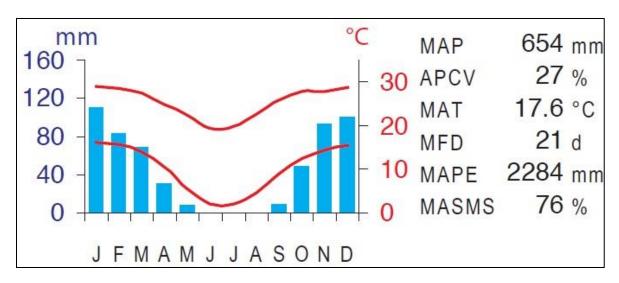


Figure 7-1 Climate for the region

7.2 Soils and Geology

The geology of this area is characterised by sandstones and mudstones from the Beaufort Group (including the Tarkastad and Adelaide Subgroups) which supports pedocutanic and prismacutanic diagnostic horizons. Dominant land types include Fb and Fc land types (Mucina and Rutherford, 2006).

According to the land type database (Land Type Survey Staff, 1972 - 2006), the project area is characterised by the Da 76, Da 147, Fc 131, Fb 488, lb 125, Fb 126 and Fb 397 land types (see Figure 7-2). The Da land type is characterised by prismacutanic and/or pedocutanic horizons with the possibility of red apedal B-horizons occurring (see Figure 7-2). The Fb land type consists of Glenrosa and/or Mispah soil forms with the possibility of other soils occurring throughout. Lime is generally present within the entire landscape.



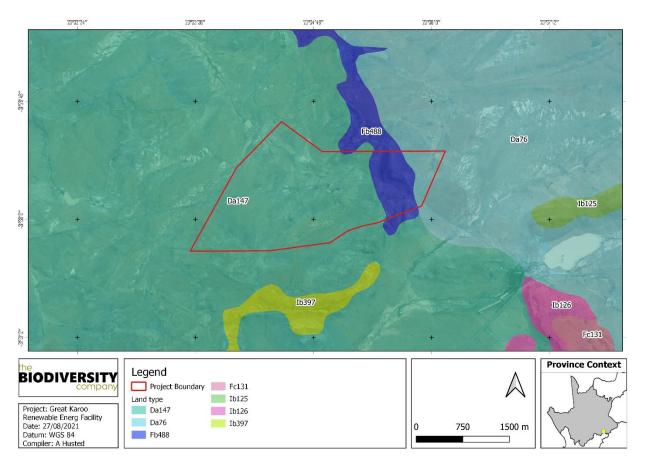


Figure 7-2 Land Types present within the project area

The land terrain units for the featured land types are illustrated from Figure 7-3 and Figure 7-4 to with the expected soils listed in Table 7-1 to Table 7-2.




Figure 7-3 Illustration of land type Da 147 terrain unit (Land Type Survey Staff, 1972 - 2006)




Figure 7-4 Illustration of land type Fb 488 terrain unit (Land Type Survey Staff, 1972 - 2006)

Table 7-1 Soils expected at the respective terrain units within the Da 147 land type (Land Type Survey Staff, 1972 - 2006)





			Terrain Units				
1 (5%)	3 (15%)		4 (60%)		4 (20%)	
Mispah	50%	Mispah	25%	Swartland	30%	Valsrivier	30%
Bare Rock	30%	Swartland	25%	Oakleaf	20%	Oakleaf	25%
Swartland	10%	Bare Rock	20%	Valsrivier	20%	Streambeds	20%
Glenrosa	10%	Glenrosa	20%	Hutton	15%	Mispah	15%
		Hutton	10%	Mispah	10%	Hutton	10%
				Glenrosa	5%		

Table 7-2 Soils expected at the respective terrain units within the Fb 488 land type (Land Type Survey Staff, 1972 - 2006)

Terrain Units										
1 (18%)		2 (2%)		3 (6	3 (60%)		4 (10%)		5 (10%)	
Bare Rock	40%	Bare Rock	100%	Mispah	35%	Mispah	30%	Oakleaf	60%	
Mispah	40%			Swartland	20%	Swartland	20%	Bare Rock	15%	
Hutton	10%			Hutton	20%	Oakleaf	20%	Mispah	15%	
Glenrosa	10%			Bare Rock	15%	Glenrosa	10%	Swartland	10%	
				Glenrosa	10%	Hutton	10%			
						Bare Rock	10%			

7.3 Terrain

The slope percentage of the project area has been calculated and is illustrated in Figure 7-5. Most of the project area is characterised by a slope percentage between 0 and 20%, with some smaller patches within the project area characterised by a slope percentage in excess of 60%. This illustration indicates a non-uniform topography with alternating hills and steep cliffs surrounding flatter areas at high elevation. The DEM of the project area (Figure 7-6) indicates an elevation of 1 356 to 1 450 Metres Above Sea Level (MASL).



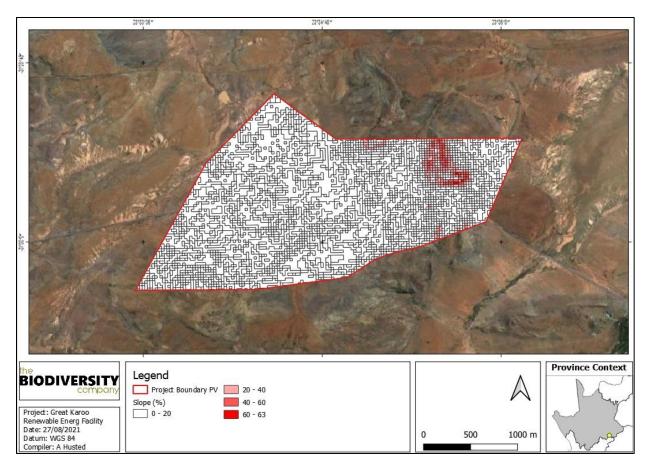


Figure 7-5 The slope percentage calculated for the project area



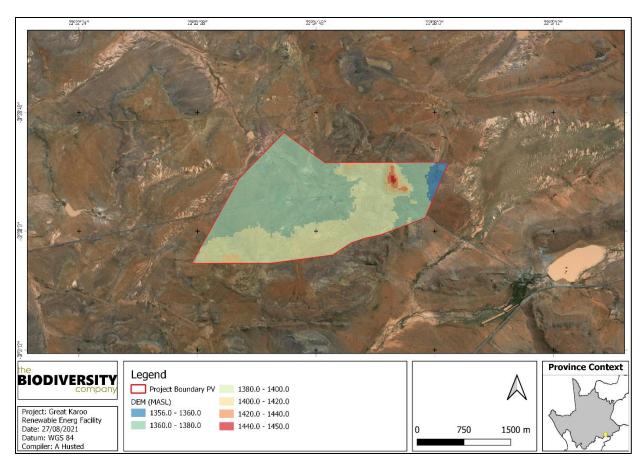


Figure 7-6 The DEM generated for the project area



8 Results and Discussion

8.1 Baseline Findings

Various soil forms were identified throughout the project area, on which only the most sensitive soil forms will be focussed on, namely the Tubatse and Bethesda soil forms (see Figure 8-1). Both these soil forms are characterised by an orthic topsoil on top of a neocutanic horizon. The Tubatse and Bethesda soil forms are characterised by a lithic and hard rock horizon underneath the neocutanic horizons respectively.

Orthic topsoils are mineral horizons that have been exposed to biological activities and varying intensities of mineral weathering. The climatic conditions and parent material ensure a wide range of properties differing from one orthic topsoil to another (i.e. colouration, structure etc) (Soil Classification Working Group, 2018).

The neocutanic horizon is associated with recent depositions and unconsolidated soils. Any soil form can develop out of a neocutanic horizon, depending on the climatic and topographical conditions). Some properties pertaining to other diagnostic soil horizons will be present within a Neocutanic horizon but will lack main properties necessary to classify the relevant soil type (Soil Classification Working Group, 2018).

For the Lithocutanic horizon, *in situ* weathering of rock underneath a topsoil results in a well-mixed soil-rock layer. The colour, structure and consistency of this material must be directly related to the parent material of the weathered rock. The Lithocutanic horizon is usually followed by a massive rock layer at shallow depths. Hard rock, permeable rock and horizontally layered shale usually is not associated with the weathering processes involved with the formation of this diagnostic horizon. The hard rock layer disallows infiltration of water or root systems and occur in shallow profiles. Horizontally layered, hard sediments without evidence of vertical seems fall under this category.

The land capability of the above-mentioned soil has been determined to have a land capability class of "III" and a climate capability level 8 given the low Mean Annual Precipitation (MAP) and the high Mean Annual Potential Evapotranspiration (MAPE) rates. The combination between the determined land capabilities and climate capabilities results in a land potential "L6". The "L6" land potential level is characterised by very restricted potential. Regular and/or severe limitations are expected due to soil, slope, temperatures or rainfall. This land potential is regarded as non-arable.







Figure 8-1 Examples of horizons associated with the Tubatse and Bethesda soil forms. A)
Neocutanic horizon. B) Transition between neocutanic and lithic horizon





8.2 Sensitivity Verification

The following land potential level has been determined;

 Land potential level 6 (this land potential level is characterised by very restricted potential. Regular and/or severe limitations are expected due to soil, slope, temperatures or rainfall. This land potential is regarded as non-arable.

Fifteen land capabilities have been digitised by (DAFF, 2017) across South Africa, of which eight potential land capability classes are located within the proposed footprint area's assessment corridor, including;

- Land Capability 1 to 5 (Very Low to Low); and
- Land Capability 6 to 8 (Low/Moderate to Moderate Sensitivity.

The baseline findings and the sensitivities as per the Department of Agriculture, Forestry and Fisheries (DAFF, 2017) national raster file concur with one another. It therefore is the specialist's opinion that the land capability and land potential of the resources in the regulated area is characterised by a maximum of "Moderate" sensitivities (see Figure 8-2), which conforms to the requirements of an agricultural compliance statement only.

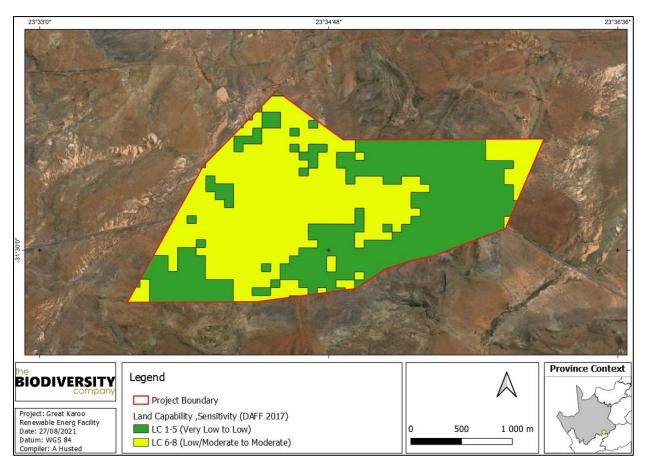


Figure 8-2 Land Capability Sensitivity (DAFF, 2017)





9 Impact Statement

The impact assessment will consider the calculated sensitivities associated with the soil resources expected to be impacted upon by the relevant components. This impact assessment will purely focus on the impacts expected towards natural resources (in specific, the soil and associated land capability).

9.1 Construction Phase

During the construction phase heavy vehicles (trucks) will be used to transport the PV infrastructure throughout the footprint area (assuming that only proposed access roads will be used). The solar panel bases will typically be installed into the soil surface with vegetation expected to be kept intact yet maintained.

It is evident from the impact calculations in Table 9-1 that "Low" pre- and post-mitigation significance ratings are expected. The main mitigation objective would be to limit the area to be impacted upon by means of not using concrete pylons but rather installing pylons directly into the soil surface. In the event that this recommendation be adhered to, lower impacts are foreseen which ultimately results in a post-mitigation significance rating of "Low".

Table 9-1 Impact assessment related to the loss of land capability during the construction phase of the proposed PV area

Nature: Loss of land capability				
	Without mitigation	With mitigation		
Extent	Low (2)	Low (2)		
Duration	Short Term (2)	Short Term (2)		
Magnitude	Low (4)	Minor (2)		
Probability	Improbable (3)	Improbable (2)		
Significance	Low	Low		
Status (positive or negative)	Negative	Negative		
Status (positive or negative) Reversibility	Negative High	Negative High		
	•	•		
Reversibility	High	High		
Reversibility Irreplaceable loss of resources?	High No	High		

9.2 Operational Phase

adhered to.

During the operational phase, very little impacts are foreseen. Maintenance of vegetation as well as the occasional maintenance of PV structures will have to be carried out throughout the life of the project. It is expected that these maintenance practices can be undertaken by means of manual labour while using existing roads. Overland flow dynamics are expected to be affected.

Limited residual impacts will be associated with these activities, assuming that all prescribed mitigation measures be strictly

Considering the low magnitude of impacts as well as the low sensitivity of soil resources in the area, very few impacts are expected. Therefore, regardless of the duration of this phase, only "Low" significance ratings are expected.

Table 9-2 Impact assessment related to the loss of land capability during the operational phase of the proposed PV area





Nature: Loss of land capability				
	Without mitigation	With mitigation		
Extent	Low (2)	Low (2)		
Duration	Long Term (4)	Long Term (4)		
Magnitude	Low (4)	Minor (2)		
Probability	Improbable (3)	Improbable (2)		
Significance	Medium	Low		
Status (positive or negative)	Negative	Negative		
Reversibility	High	High		
Irreplaceable loss of resources?	No	No		
Can impacts be mitigated?	Yes			
Mitigation: See Section 10				
Residual Impacts:				
Limited residual impacts will be asso	ciated with these activities, assumin	g that all prescribed mitigation measures be strictly		

9.3 Cumulative Impacts

adhered to.

Cumulative impacts within the proposed PV area and its surroundings have been determined to be low. Soil resources in the area have been affected to some degree by means of erosion, although to a lesser degree. Furthermore no agricultural segregation has taken place in recent history by means of any development.

Table 9-3 Impact assessment related cumulative impacts

Nature: Loss of land capability		
	Without mitigation	With mitigation
Extent	Low (2)	Low (2)
Duration	Permanent (5)	Permanent (5)
Magnitude	Minor (2)	Minor (2)
Probability	Improbable (2)	Improbable (2)
Significance	Low	Low
Status (positive or negative)	Negative	Negative
Reversibility	High	High
Irreplaceable loss of resources?	No	No
Can impacts be mitigated?	Yes	
Mitigation: See Section 10		
Residual Impacts:		

9.4 Specialist Opinion

It is the specialist's opinion that the baseline findings concur with the land capabilities identified by means of the DAFF (2017) desktop findings in regard to land capability sensitivities. No "High" land capability sensitivities were identified within proximity to any of the proposed activities. Considering the

Limited residual impacts will be associated with these activities, assuming that all prescribed mitigation measures be strictly



adhered to.



lack of sensitivity and the measures expected to be set in place in regard to stormwater management and erosion control, it is the specialist's opinion that all activities will have an acceptable impact on agricultural productivity. Furthermore, no measures in regard to moving components in their microsetting were required to avoid or minimise fragmentation and disturbances of agricultural activities.

10 Recommendations and Mitigation

10.1 General Mitigation

General mitigations will ensure the conservation of all soil resources, regardless of the sensitivity of resources and the intensity of impacts.

- Prevent any spills from occurring. Machines must be parked within hard park areas and must be checked daily for fluid leaks;
- Proper invasive plant control must be undertaken quarterly; and
- All excess soil (soil that are stripped and stockpiled to make way for foundations) must be stored, continuously rehabilitated to be used for rehabilitation of eroded areas.

10.2 Restoration of Vegetation Cover

Restoring vegetation cover is the first step to successful rehabilitation. Vegetation cover decreases flow velocities and minimises erosion.

10.2.1 Ripping Compacted Areas

All areas outside of the footprint areas that will be degraded (by means of vehicles, laydown yards etc.) must be ripped where compaction has taken place. According to the Department of Primary Industries and Regional Development (Agriculture and Food) (2017), ripping tines must penetrate to just below the compacted horizons (approximately 300 – 400 mm) with soil moisture being imminent to the success of ripping. Ripping must take place within 1-3 days after seeding, and also following a rain event to ensure a higher moisture content.

To summarise;

- Rip all compacted areas outside of the developed areas that have been compacted;
- This must be done by means of a commercial ripper that has at least two rows of tines; and
- Ripping must take place between 1 and 3 days after seeding and following a rainfall event (seeding must therefore be carried out directly after a rainfall event).

10.3 Specialist Recommendation

The proposed activities may proceed as have been planned without the concern of loss of high sensitivity land capabilities or agricultural productivity.

11 Conclusion

Various soil forms were identified within the project area with the most sensitive soils being classified as the Tubatse and Bethesda soil forms. These soil forms have been determined to be associated with one land capability, namely LCIII. This land capability class was then further refined to a land potential level 6 by comparing land capability of climatic capabilities of the project area.

This land potential level was used to determine the sensitivities of soil resources. Only "Low" sensitivities were determined throughout the project area by means of baseline findings. Considering







the low sensitivities associated with land potential resources, it is the specialist's opinion that the proposed activities will have an acceptable impact on soil resources and that the proposed activities should proceed as have been planned.





12 References

Department of Primary Industries and Regional Development. 2017. Deep ripping for soil compaction. https://www.agric.wa.gov.au/soil-compaction/deep-ripping-soil-compaction.

Land Type Survey Staff. 1972 - 2006. Land Types of South Africa: Digital Map (1:250 000 Scale) and Soil Inventory Databases. Pretoria: ARC-Institute for Soil, Climate, and Water.

Mucina, L., & Rutherford, M. C. 2006. The Vegetation of South Africa, Lesotho, and Swaziland. Strelitzia 19. Pretoria: National Biodiversity Institute.

Russell, W. 2009. WET-RehabMethods. National guidelines and methods for wetland rehabilitation.

Smith, B. 2006. The Farming Handbook. Netherlands & South Africa: University of KwaZulu-Natal Press & CTA.

Soil Classification Working Group. 1991. Soil Classification A Taxonomic system for South Africa. Pretoria: The Department of Agricultural Development.

Soil Classification Working Group. 2018. Soil Classification A Taxonomic system for South Africa. Pretoria: The Department of Agricultural Development.