



SIVEST SA (PTY) LTD

PROPOSED CONSTRUCTION OF THE KRAALTJIES WIND ENERGY FACILITY AND ASSOCIATED INFRASTRUCTURE, NEAR BEAUFORT WEST, WESTERN CAPE PROVINCE, SOUTH AFRICA

Aquatic Biodiversity Assessment

DEFF Reference: TBA

Report Prepared by: EnviroSci (Pty) Ltd 20 November 2022

Version No.:

SIVEST SA (PTY) LTD

PROPOSED CONSTRUCTION OF THE KRAALTJIES WIND ENERGY FACILITY AND ASSOCIATED INFRASTRUCTURE, NEAR BEAUFORT

WEST, WESTERN CAPE PROVINCE, SOUTH AFRICA

AQUATIC BIODIVERSITY ASSESSMENT

EXECUTIVE SUMMARY

South Africa Mainstream Renewable Power Developments (Pty) Ltd (hereafter referred to as "Mainstream"), has appointed SiVEST SA (Pty) Ltd (hereafter referred to as "SiVEST") to undertake the

required respective EIA process for the proposed construction of the 240MW Kraaltjies Wind Energy Facility (WEF), Battery Energy Storage System (BESS), 11-33kv portion / yard of the shared 11-

33kv/132kv onsite substation and associated infrastructure near Beaufort West in the Western Cape

Province.

The overall objective of the development is to generate electricity by means of renewable energy

technology capturing wind energy to feed into the National Grid.

It is anticipated that the proposed Kraaltjies WEF will comprise up to sixty (60) wind turbines with a

maximum total energy generation capacity of up to approximately 240MW. The electricity generated by

the proposed WEF development will be fed into the national grid via a 132kV overhead power line,

which forms part of a separate assessment.

In terms of the Environmental Impact Assessment (EIA) Regulations, which were published on 04

December 2014 [GNR 982, 983, 984 and 985) and amended on 07 April 2017 [promulgated in

Government Gazette 40772 and Government Notice (GN) R326, R327, R325 and R324 on 7 April

2017], various aspects of the proposed development are considered listed activities under GNR 327

and GNR 324 which may have an impact on the environment and therefore require authorisation from

the National Competent Authority (CA), namely the Department of Environment, Forestry and Fisheries

(DFFE), prior to the commencement of such activities. Specialist studies have been commissioned to

assess and verify the project under the new Gazetted specialist protocols.

The regulatory requirements are also discussed with regard the NEMA and the National Water Act in

Section 4 of this report. The PROTOCOL FOR SPECIALIST ASSESSMENT AND MINIMUM REPORT

CONTENT REQUIREMENTS FOR THE ENVIRONMENTAL IMPACTS ON BIODIVERSITY and in

particular Aquatic Biodiversity related to Government Gazette 43110, 20 March 2020 and Appendix 6

of the NEMA EIA Regulations, have been adhered to.

This report fulfils the Aquatic Biodiversity Specialist Assessment Report criteria for assessment listed

under the various Theme Sensitivity Protocols, where the following sensitivity ratings were contained in

Prepared by: EnviroSci (Pty) Ltd

Date: 20 November 2022

Page i

the Screening Tool Report Aquatic Biodiversity – Very High sensitivity related to presence of the mains

stem rivers and NFEPAs.

The verification of any of the Very High Sensitivity rated habitats / species localities is thus critical as

the proposed development should then avoid these areas. During the scoping assessment, a four-day

site visit of the area was conducted in November 2021 and again in February 2022 (after significant

rainfall occurrences), in which the riverine habitats were considered, together with a description of the

general environment and species assemblages were expected to be found present. This spatial data

is then be supplied to the Applicant to develop the layout outside of these areas (inclusive of suitable

buffers) as a mechanism of impact avoidance using fine scale mapping data.

The study area had received some much-needed rainfall, which aided in critically assessing the

ecological character of the site, with particular reference to any linkages between the aquatic and

terrestrial environment as indicated in the Screening Tool Results (CBA & ESA). The information

collected, was also compared to previous assessments within the region by members of EnviroSci,

used in the assessment of the wind farms that have been completed.

The study area contained three key aquatic habitats were observed and mapped and then rated based

on their sensitivity to the proposed development. These habitats included:

• Non perennial rivers, alluvial dominated channels with or without riparian vegetation. These ranged

from narrow channels within small canyons with steep cliffs to broad flood plain areas in the lower valleys. Many these systems with and without riparian vegetation are connect via the main stem

river systems listed below, thus with direct linkages. Only some of the bare alluvial systems in the

southern portion of the site lack any direct connectivity.

Minor drainage lines, with no obligate aquatic vegetation and were mostly 2 – 8m in width.

Dams or weirs with no wetland or aquatic features, although not many of these were located within

the study area.

The features listed above, drain the study area in a north easterly direction, forming part of the following

Quaternary Catchments:

• L32A Amos / Swartbakens rivers (WEF & Substation)

The sensitivity assessment mentioned considered the habitats observed and these were categorized

or rated based on the presence/absence of the following:

Unique or sensitive habitats

Presence of important or listed taxa (faunal & floral)

• Presence of any main stem rivers or wetlands (e.g. Depressions)

Intact and functional habitat associated with sensitive areas indicated in the DFFE Screening

Prepared by: EnviroSci (Pty) Ltd

Tool results

Date: 20 November 2022

Page ii

Several High Sensitivity Habitats were observed and mapped, and these were then considered No-Go for any new infrastructure, while Moderate and Low sensitivity areas could be considered for development. The only exception being road crossings and transmission lines which would be considered acceptable within No-Go areas, if these areas are spanned and/ or located within existing disturbance footprints (e.g. roads within existing farm tracks) and/or suitably mitigated after and inspection is conducted by the specialist once the localities have been finalized).

The following direct impacts were identified, which are aligned with those contained in the Aquatic Biodiversity Assessment Protocol and will be assessed in greater detail in the EIA phase of the assessment:

Construction and to a degree the Operational and Decommissioning Phases where relevant

Construction & Decommissioning Phases

- Impact 1: Loss of aquatic species of special concern
- Impact 2: Damage or loss of riparian and alluvial systems in the construction phase
- Impact 3: Potential impact on localised surface water quality

Operational phase

• Impact 4: Impact on aquatic systems through the possible increase in surface water runoff on form and function - Increase in sedimentation and erosion

The project overall has a small footprint spread out over a large area, allowing for retention of much of the natural environment so that the systems should remain largely unaffected. Therefore, the wind farm is such that it carries a low intensity impact on aquatic resources, but requiring the clearing of areas with terrestrial vegetation, especially when considering the associated roads, cables and other infrastructure.

A variety of environmental features were observed within the study area, and these were mapped and buffered as necessary for their protection. The current layout has, to a large degree, avoided these sensitive features and buffer areas, greatly reducing the potential overall impact and environmental risk. The overall and cumulative impacts, as assessed, are linked to instances where complete avoidance was not possible, or the nature of the activities involve a potential risk to aquatic resources even at great distance.

Overall, it is expected that the impact on the environment would be Low (-). Noteworthy areas, that should be avoided, include the High Sensitivity areas as shown in this report. Existing crossings may be used and/or upgraded that intersect these systems however, but for these crossings, a detailed monitoring plan must be developed in the pre-construction phase.

Based on the findings of this study, the specialist finds no reason to withhold to an authorisation for any of the proposed activities, assuming that key mitigations measures are implemented.

Due consideration must be given to all the substations (Option 1 and 2) due to being located within High Sensitivity watercourses in particular option 1. However, this must all still be assessed once the roads layout has been provided, coupled to a micrositing walkdown once all information is available

Version No. 1

Date: 20 November 2022 Page iii

NATIONAL ENVIRONMENTAL MANAGEMENT ACT, 1998 (ACT NO. 107 OF 1998) AND ENVIRONMENTAL IMPACT REGULATIONS, 2014 (AS AMENDED) - REQUIREMENTS FOR SPECIALIST REPORTS (APPENDIX 6)

Regula Appen	ntion GNR 326 of 4 December 2014, as amended 7 April 2017, dix 6	Section of Report
1. (1) A a)	specialist report prepared in terms of these Regulations must containdetails of- i. the specialist who prepared the report; and ii. the expertise of that specialist to compile a specialist report including a curriculum vitae;	Appendix 1 CV
b)	a declaration that the specialist is independent in a form as may be specified by the competent authority;	Attached to Report
c)	an indication of the scope of, and the purpose for which, the report was prepared;	Section 1.1 and 1.3 of this report
	(cA) an indication of the quality and age of base data used for the specialist report;	Section 1.3
	(cB) a description of existing impacts on the site, cumulative impacts of the proposed development and levels of acceptable change;	Section 5
d)	the date and season of the site investigation and the relevance of the season to the outcome of the assessment;	Section 1.3 and 5
e)	a description of the methodology adopted in preparing the report or carrying out the specialised process inclusive of equipment and modelling used;	Appendix 3
f)	details of an assessment of the specific identified sensitivity of the site related to the proposed activity or activities and its associated structures and infrastructure, inclusive of a site plan identifying site alternatives;	Section 5.1
g)	an identification of any areas to be avoided, including buffers;	Section 5 & 6
h)	a map superimposing the activity including the associated structures and infrastructure on the environmental sensitivities of the site including areas to be avoided, including buffers;	Section 5
i)	a description of any assumptions made and any uncertainties or gaps in knowledge;	Section 2
j)	a description of the findings and potential implications of such findings on the impact of the proposed activity, (including identified alternatives on the environment) or activities;	Section 6 & 8

k)	any mitigation measures for inclusion in the EMPr;	Section 6
l)	any conditions for inclusion in the environmental authorisation;	Section 5. 6 and 8
m)	any monitoring requirements for inclusion in the EMPr or environmental authorisation;	Section 6
n)	a reasoned opinion- i. (as to) whether the proposed activity, activities or portions thereof should be authorised;	Section 8
	(iA) regarding the acceptability of the proposed activity or activities; and	
	ii. if the opinion is that the proposed activity, activities or portions thereof should be authorised, any avoidance, management and mitigation measures that should be included in the EMPr, and where applicable, the closure plan;	
0)	a description of any consultation process that was undertaken during the course of preparing the specialist report;	N/A
p)	a summary and copies of any comments received during any consultation process and where applicable all responses thereto; and	N/A
q)	any other information requested by the competent authority.	N/A
protoco	ere a government notice <i>gazetted</i> by the Minister provides for any or minimum information requirement to be applied to a specialist the requirements as indicated in such notice will apply.	Yes - Appendix 2

Date: 20 November 2022 Page 5

SIVEST SA (PTY) LTD

PROPOSED CONSTRUCTION OF THE KRAALTJIES WIND ENERGY FACILITY AND ASSOCIATED INFRASTRUCTURE, NEAR BEAUFORT WEST, WESTERN CAPE PROVINCE, SOUTH AFRICA

AQUATIC BIODIVERSITY ASSESSMENT

Contents

1.	INTRODUCTION	10
1.1	Terms of Reference	10
1.2	Specialist Credentials	10
1.3	Assessment Methodology	11
2.	ASSUMPTIONS AND LIMITATIONS	12
TECH	NICAL DESCRIPTION	13
3.	LEGAL REQUIREMENT AND GUIDELINES	14
4.	DESCRIPTION OF THE RECEIVING ENVIRONMENT	15
4.1	Present Ecological State and conservation importance	20
5.	SPECIALIST FINDINGS / IDENTIFICATION AND ASSESSMEN	
5.1	Construction & Decommissioning Phase	27
5.2	Operation	31
5.3	No go Impact	32
5.4	Cumulative Impacts	34
5.5	Overall Impact Rating	1
6.	COMPARATIVE ASSESSMENT OF ALTERNATIVES	1
6.1	Wind Energy Facility	1
6.2	Grid components Error! Bookmark not de	fined
6.3	No-Go Alternative	1
7.	CONCLUSION AND SUMMARY	2
7.1	Summary of Findings	2

SiVEST Environmental Aquatic Biodiversity Assessment Version No. 1

Date: 20 November 2022

7.2	Conclusion and Impact Statement	2
8.	REFERENCES	3
8.1	Waterbody classification systems	10
8.2	Wetland definition	11
8.3	National Wetland Classification System metho	od 12
8.4	Waterbody condition	1
8.5	Aquatic ecosystem importance and function	1
Table 2: Table 3: Table 4: Table 5: Table 6:	List of Tables Results of the sensitivity rating / constraints assessment Rating of impacts for the construction and decommission Rating of impacts for the operational phase	oning phase
Figure 2 Figure 3 Figure 4	Regional Context Map Kraaltjies WEF Site Locality Proposed 132kV Power Line Route Alignment Preliminary Turbine layout and development area Proposed Substation and Power line options	Error! Bookmark not defined. Error! Bookmark not defined. Error! Bookmark not defined.

List of Appendices

Appendix 1 Specialist CV

Appendix 2 DFFE Site verification statement

Appendix 3 Detailed study methodology

Date: 20 November 2022

Page 7

Glossary of Terms

- **Drainage line**: A drainage line is a lower category or order of watercourse that does not have a clearly defined bed or bank. It carries water only during or immediately after periods of heavy rainfall i.e. non-perennial, and riparian vegetation may not be present.
- **Perennial and non-perennial:** Perennial systems contain flow or standing water for all or a large proportion of any given year, while non-perennial systems are episodic or ephemeral and thus contains flows for short periods, such as a few hours or days in the case of drainage lines.
- Riparian: the area of land adjacent to a stream or river that is influenced by stream-induced or related processes. Riparian areas which are saturated or flooded for prolonged periods would be considered wetlands and could be described as riparian wetlands. However, some riparian areas are not wetlands (e.g. an area where alluvium is periodically deposited by a stream during floods but which is well drained).
- **Wetland**: land which is transitional between terrestrial and aquatic systems where the water table is usually at or near the surface, or the land is periodically covered with shallow water, and which under normal circumstances supports or would support vegetation typically adapted to life in saturated soil (Water Act 36 of 1998); land where an excess of water is the dominant factor determining the nature of the soil development and the types of plants and animals living at the soil surface (Cowardin *et al.*, 1979).
- Water course: as per the National Water Act means -
 - (a) a river or spring;
 - (b) a natural channel in which water flows regularly or intermittently;
 - (c) a wetland, lake or dam into which, or from which, water flows; and
 - (d) any collection of water which the Minister may, by notice in the Gazette, declare to be a watercourse, and a reference to a watercourse includes, where relevant, its bed and banks

SiVEST Environmental Prepared by: EnviroSci (Pty) Ltd
Aquatic Biodiversity Assessment

Version No. 1

Date: 20 November 2022

List of Abbreviations

AER Along Existing Roads – cables that are included in existing road servitudes

CARA Conservation of Agricultural Resources Act

CBA Critical Biodiversity Area

CSIR Council for Scientific and Industrial Research

DD Data Deficient

DWS Department of Water and Sanitation formerly the Department of Water Affairs

ECO Environmental Control Officer
EIA Environmental Impact Assessment
EIS Ecological Importance and Sensitivity

EMPr Environmental Management Programme Report

EN Endangered

EO Environmental Officer ESA Ecological Support Area

GA General Authorisation (WUA type)
GBIF Global Biodiversity Information Facility
GIS Geographic Information System

LC Least Concern

NFEPA National Freshwater Ecosystem Priority Atlas (Nel, et al. 2011).

NT Near Threatened

OHL Overhead Line – transmission line cable that is not buried

ORC Off road cable – underground or overhead transmission cable not within a road reserve

PES Present Ecological State

SANBI South African National Biodiversity Institute

SQ Subquaternary catchment = Quaternary catchment

VU Vulnerable

WEF Wind Energy Facility
WUA Water Use Authorisation
WUL Water Use License

WULA Water Use License Application

SiVEST Environmental Prepared by: EnviroSci (Pty) Ltd

SIVEST SA (PTY) LTD

PROPOSED CONSTRUCTION OF THE KRAALTJIES WIND ENERGY FACILITY AND ASSOCIATED INFRASTRUCTURE, NEAR BEAUFORT

WEST, WESTERN CAPE PROVINCE, SOUTH AFRICA

AQUATIC BIODIVERSITY ASSESSMENT

1. INTRODUCTION

South Africa Mainstream Renewable Power Developments (Pty) Ltd (hereafter referred to as "Mainstream"),

has appointed SiVEST SA (Pty) Ltd (hereafter referred to as "SiVEST") to undertake the required respective EIA processes for the proposed construction of the 240MW Kraaltjies Wind Energy Facility (WEF) Battery

Energy Storage System (BESS), 11-33kv portion / yard of the shared 11-33kv/132kv onsite substation and

associated infrastructure near Beaufort West in the Western Cape Province.

The overall objective of the development is to generate electricity by means of renewable energy technology

capturing wind energy to feed into the National Grid.

It is anticipated that the proposed Kraaltjies WEF will comprise up to sixty (60) wind turbines with a maximum

total energy generation capacity of up to approximately 240MW. The electricity generated by the proposed

WEF development will be fed into the national grid via a 132kV overhead power line and will form part of a

separate assessment and environmental approval submission.

In terms of the Environmental Impact Assessment (EIA) Regulations, which were published on 04 December

2014 [GNR 982, 983, 984 and 985) and amended on 07 April 2017 [promulgated in Government Gazette

40772 and Government Notice (GN) R326, R327, R325 and R324 on 7 April 2017], various aspects of the

proposed development are considered listed activities under GNR 327 and GNR 324 which may have an

impact on the environment and therefore require authorisation from the National Competent Authority (CA),

namely the Department of Environment, Forestry and Fisheries (DFFE), prior to the commencement of such

activities. Specialist studies have been commissioned to assess and verify the project under the new Gazetted

specialist protocols.

1.1 **Terms of Reference**

Please refer to Specialist ToR provided in the EIA

1.2 **Specialist Credentials**

Please see Appendix 1 - Specialist CVs

1.3 **Assessment Methodology**

During the screening assessment, a four-day site visit of the area was conducted in November 2021 and again in February 2022 (after significant rainfall occurrences), therefore many of the plants were showing improved growth and most had or were flowering after a prolonged period of drought in the region:

Methodology summary

- Initiated the assessment with a review of the available information for the region and the proposed project, this will also include review of the proposed project in relation to any conservation plans or assessments known for the area, e.g. Critical Biodiversity Area maps, National Waterbody Inventory and high-level groundwater availability maps etc.
- Conducted a site visit (November 2021 & February 2022) to inspect the surrounding waterbodies / features, to developed maps.
- Prepared a map demarcating the respective watercourses or wetland/s, i.e. the waterbody, its respective catchment and other areas within a 500m radius of the study area. This demonstrated, from a holistic point of view the connectivity between the site and the surrounding regions, i.e. the hydrological zone of influence while classifying the hydrogeomorphic type of the respective water courses / wetlands in relation to present land-use and their current state. The maps depicting demarcated waterbodies were delineated to a scale of 1:10 000, following the methodology described by the DWS, together with an estimation of their functionality, Habitat Integrity (IHI), Wet-Ecoservices (Wet-Health) and Socio-Cultural Importance of the delineated systems, whichever is relevant to the systems.
- Recommended buffer zones using the Macfarlane & Bredin (2017) approach to indicate any No-go / Sensitive areas around any delineated aquatic zones supported by any relevant legislation, e.g. any bioregional plans, conservation guidelines or best practice.
- Determined the Present Ecological State (PES) of any waterbodies including wetlands, estimating their biodiversity, conservation importance with regard ecosystem services during the site visit using recognised PES / EIS assessment methods to determine the state, importance and sensitivity of the respective wetland / watercourse systems.
- Identified and assessed the potential impacts of the proposed project using the revised project layout and description, based on a supplied impact assessment methodology (provided by Aurecon), including cumulative impacts and for construction, operations and decommissioning phases. Also assess the potential impact of the "no go" alternative.
- Provided recommendations and mitigations regarding project related impacts for inclusion into the Environmental Management Program (EMPr).
- Supplied the client with geo-referenced GIS shape files of the wetland / riverine areas and associated buffers to be used in the finalisation of the project layout and management of the project going forward.
- Provided a separate Risk Assessment Matrix as per the DWS 2016 requirements to determine the Water Use License Application Requirements, i.e. indication of future permitting requirements.

2. ASSUMPTIONS AND LIMITATIONS

To obtain a comprehensive understanding of the dynamics of both the flora and fauna of communities within a study site, as well as the status of endemic, rare or threatened species in any area, assessments should always consider investigations at different time scales (across seasons/years) and through replication. However, due to time constraints these long-term studies are not feasible and are thus mostly based on instantaneous sampling. This limitation is common to many impact assessment type studies, but the findings are deemed adequate for the purposes of decision-making support regarding project acceptability, unless otherwise stated.

Therefore, due to the scope of the work presented in this report, a long-term investigation of the proposed site was not possible and as such not perceived as part of the Terms of Reference. However, a concerted effort was made to sample and assess as much of the potential site, as well as make use of any supporting literature, species distribution data and aerial photography.

It should be emphasised that information, as presented in this document, only has reference to the study area as indicated on the accompanying maps. Therefore, this information cannot be applied to any other area without detailed investigation.

SiVEST Environmental Prepared by: EnviroSci (Pty) Ltd

Aquatic Biodiversity Assessment Version No. 1

TECHNICAL DESCRIPTION

At this stage it is anticipated that the proposed Kraaltjies WEF will comprise of a maximum of sixty (60) wind turbines with a maximum total energy generation capacity of up to 240MW. The electricity generated by the proposed WEF development will be fed into the national grid via a 132kV overhead power line. The 132kV overhead power line will however require a separate EA and is subject to a BA process, which is currently being undertaken in parallel to this EIA process but as a separate process and is not assessed herein.

- Up to sixty (60) wind turbines, each between, with a maximum export capacity of approximately 240MW. This will be subject to allowable limits in terms of the Renewable Energy Independent Power Producer Procurement Programme (REIPPPP). The final number of turbines and layout of the WEF will, however, be dependent on the outcome of the Specialist Studies conducted during the EIA process.
- Each wind turbine will have a hub height of between 120m and 200m and rotor diameter of up to approximately 200m.
- Permanent compacted hardstand areas / platforms (also known as crane pads) of approximately 90m x
 50m (total footprint of approx. 4 500m2) per turbine during construction and for on-going maintenance purposes for the lifetime of the proposed development.
- Each wind turbine will consist of a foundation of up to approximately 15m x 15m in diameter. In addition, the foundations will be up to approximately 3m in depth.
- Electrical transformers (690V/33kV) adjacent to each wind turbine (typical footprint of up to approximately 2m x 2m) to step up the voltage to 11-33kV.
- Associated infrastructure of approximately 25ha which includes:
 - One (1) new 11-33kV/132kV IPP on-site substation including associated equipment and infrastructure the proposed substation will be a step-up substation and will include an Eskom portion and an IPP portion, hence the substation has been included in the WEF EIA and in the grid infrastructure (substation and 132kV overhead power line) BA to allow for handover to Eskom. Following construction, the substation will be owned and managed by Eskom.
 - A Battery Energy Storage System (BESS) will be located next to the onsite 11-33kV/132kV substation. The storage capacity and type of technology would be determined at a later stage during the development phase, but most likely comprise an array of containers, outdoor cabinets and/or storage tanks.
 - One (1) construction laydown / staging area. It should be noted that no construction camps will be required in order to house workers overnight as all workers will be accommodated in the nearby town.
 - Operation and Maintenance (O&M) buildings, including offices, a guard house, operational control centre, O&M area / warehouse / workshop and ablution facilities to be located on the site identified for the substation.
- The wind turbines will be connected to the proposed substation via medium voltage (11-33kV) underground cabling and overhead power lines.
- Internal roads with a servitude up to approximately 8m wide will provide access to each wind turbine. Existing site roads will be used wherever possible, although new site roads will be constructed where necessary. Turns will have a radius of up to 50m for abnormal loads (especially turbine blades) to access the various wind turbine positions. It should be noted that the proposed application site will be accessed via the N12 National Route.
- A wind measuring lattice (approximately 140m in height) mast has already been strategically placed within the wind farm application site in order to collect data on wind conditions.

- No new fencing is envisaged at this stage. Current fencing is standard farm fence approximately 1-1.5m in height. Fencing might be upgraded (if required) to be up to approximately 2m in height; and
- Water will either be sourced from existing boreholes located within the application site or will be trucked in, should the boreholes located within the application site be limited.

3. LEGAL REQUIREMENT AND GUIDELINES

The following is pertinent to this study:

- Section 24 of The Constitution of the Republic of South Africa;
- Agenda 21 Action plan for sustainable development of the Department of Environmental Affairs and Tourism (DEAT) 1998;
- National Environmental Management Act (NEMA), 1998 (Act No. 107 of 1998) inclusive of all amendments, as well as the NEM: Biodiversity Act;
- National Water Act, 1998 (Act No. 36 of 1998);
- Conservation of Agricultural Resources Act, 1983 (Act No. 43 of 1983);
- Minerals and Petroleum Resources Development Act, 2002 (Act No. 28 of 2002);
- Nature and Environmental Conservation Ordinance (No. 19 of 1974);
- National Forest Act (No. 84 of 1998); and
- National Heritage Resources Act (No. 25 of 1999) could apply if cultural use or heritage is linked to any natural resources

Based on an assessment of the proposed activities and past engagement with DWS, the following Water Use Authorisations may be required based on thresholds as listed in the following Government Notices. However, ultimately the Department of Water and Sanitation (DWS) must determine if a General Authorisation (GA) or full WULA will be required during the pre-application process as it relates to the following:

- DWS Notice 538 of 2016, 2 September in GG 40243— Section 21 a & b water uses relating to the Abstraction and Storage of water.
- Government Notice 509 in GG 40229 of 26 August 2016 Section 21 c & i water uses relating to the Impeding or diverting the flow of water in a watercourse and or altering the bed, banks, course or characteristics of a watercourse.
- Government Notice 665, 6 September 2013 in GG 36820 Section 21g relating to disposing of waste in a
 manner that may detrimentally impact on a water source which includes temporary storage of domestic
 wastewater i.e. conservancy tanks under Section 37 of the notice.

SiVEST Environmental Prepared by: EnviroSci (Pty) Ltd

4. DESCRIPTION OF THE RECEIVING ENVIRONMENT

The study area contained three key aquatic habitats were observed and mapped and then rated based on their sensitivity to the proposed development. These habitats included:

- Non perennial rivers, alluvial dominated channels with or without riparian vegetation (Plate 1 & 2). These ranged from narrow channels within small canyons with steep cliffs to broad flood plain areas in the lower valleys. Many these systems with and without riparian vegetation are connect via the mainstem river systems listed below, thus with direct linkages. Only some of the bare alluvial systems in the southern portion of the site lack any direct connectivity.
- Minor drainage lines (Plate 3), with no obligate aquatic vegetation and were mostly 2 8m in width.
- Dams or weirs with no wetland or aquatic features, although not many of these were located within the study area.

The features listed above, drain the study area in a north easterly direction, forming part of the following Quinary Catchments (Figure 6):

L32A Amos / Swartbakens rivers (WEF & Substation)

The Amos and Swarbakens rivers, form part of the Groot River catchment, which then eventuates in the Gamtoos Estuary many kilometres downstream.

Furthermore, the study area is located within the Great Karoo Ecoregion of the Tsitsikamma-Mzimvubu Water Management Area.

No wetlands were found within the proposed development areas, only riverine features such as alluvial floodplains and riparian thickets dominated by *Vachellia karroo*, *Searsia lancea*, *Euclea undulata*, *Gymonsporia buxifolia Ficinia nodusa*, *Carex spp*, *Centella asiatica*, *Erianthus capensis*, *Sporobolus fimbriatus*, *Cynodon incompletes*, *Prosopis spp* (*Exotic*,) *Eragrostis curvula*, *Erharta calcyni*, *a Merxmuellera disticha*, and *Cynodon dactylon*.

SiVEST Environmental Prepared by: EnviroSci (Pty) Ltd

Date: 20 November 2022

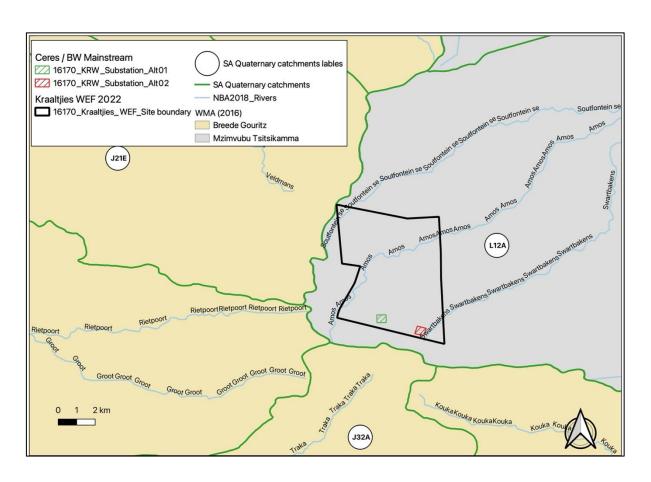


Figure 6: Project locality map indicating the various quinary catchments and mainstem rivers (Source DWS and NGI) within the project boundary



Plate 1: A watercourse with defined riparian zone associated with a Swartbakens River near the N12

Date: 20 November 2022

Prepared by: EnviroSci (Pty) Ltd

Page **16**



Plate 2: Sandy alluvial channel associated with the upper reaches of the Amos River that will be traversed by internal access roads



Plate 3: A view of a minor drainage with no obligate aquatic vegetation or habitats

Figure 7 indicates the available spatial data with regard potential wetlands and or riverine systems within the study area (van Deventer *et al.*, 2020). During the field work, the site was then groundtruthed as well as compared to 1: 50 000 topocadastral surveys mapping data and that which was observed on site. A baseline map was then refined using the November 2021/ February 2022 survey data (Figure 8).

As indicated previously, three natural aquatic systems were observed within the study area, namely the broader non-perennial rivers (with & without riparian vegetation) and the minor drainage lines. The fine scale

Prepared by: EnviroSci (Pty) Ltd

delineation of the broader systems was focused on for the proposed wind farm infrastructure, to ensure that

turbines, buildings and any new internal access roads (as far as possible) avoided these areas. Due to the

nature of the landscape, the small drainage lines are unavoidable, but these have also been avoided by the

buildable area. This also includes the previously indicated 20m buffer, used in defining the buildable areas

shown later in this report (Sensitivity Assessment).

The presence of broader Alluvial wash floodplains. These, (although carrying water during high rainfall

periods) are largely colonised by terrestrial species, and also form important potential Riverine Rabbit habitat

when accompanied by riverine thicket dominated channels. These systems, which are considered part of the

aquatic environment, exhibit little in terms of any functional obligate aquatic habitats and only have water

during very high rainfall periods. These systems, although different from the Riverine riparian channels are

thus broadly associated with these systems. Both are dominated by sandy silts, but the Riverine riparian

areas are dominated by taller stands of Vachellia karroo trees, supported by an understorey dominated by

Searsia lancea, Euclea undulata, Gymonsporia buxifolia Ficinia nodusa, Carex spp, Centella asiatica,

Erianthus capensis. The Alluvial Wash Floodplains are mostly barren sandy area, dominated by low growing

shrubs such as, as well as Pteronia pallens and Eriocephalus ericoides species.

Although this habitat type could be rehabilitated easily, the conservation importance based on habitat function

resulted in this unit being rated as Very High Sensitivity, represented in its status as an ESA (See Figure 10

later). For this reason, no towers are to be placed in any of these areas. Additionally, any internal roads

should avoid these areas as far as possible and make use of existing tracks or disturbed areas.

The substation options do however intersect with one of the alluvial systems and for this reason should be

relocated and / or avoided in the alternative selection process (Figure 8).

SiVEST Environmental Aquatic Biodiversity Assessment

Version No. 1

Date: 20 November 2022 Page 18

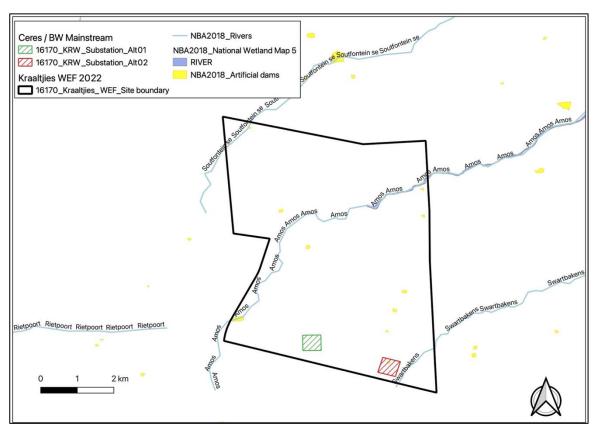


Figure 7: National Wetland Inventory wetlands and waterbodies (van Deventer et al., 2020)

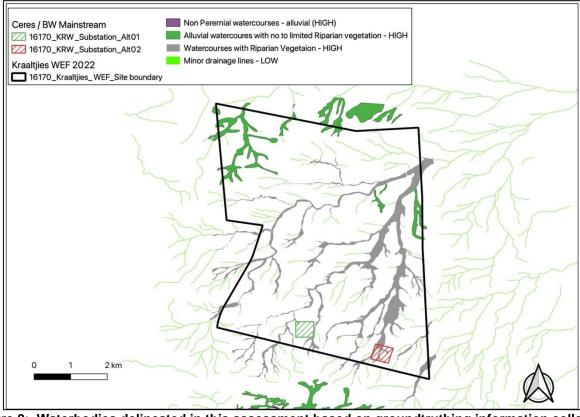


Figure 8: Waterbodies delineated in this assessment based on groundtruthing information collected

Date: 20 November 2022

4.1 Present Ecological State and conservation importance

The Present Ecological State (PES) of a river, watercourse or wetland represents the extent to which it has

changed from the reference or near pristine condition (Category A) towards a highly impacted system where

there has been an extensive loss of natural habit and biota, as well as ecosystem functioning (Category E).

The PES scores have been revised for the country and are based on the new models, aspects of functional

importance as well as direct and indirect impacts which have been included (DWS, 2014). The new PES

system incorporates Ecological Importance (EI) and Ecological Sensitivity (ES) separately as opposed to

Ecological Importance and Sensitivity (EIS) in the old model, although the new model is still heavily centred

on rating rivers using broad fish, invertebrate, riparian vegetation, and water quality indicators. The Recommended Ecological Category (REC) is still contained within the new models, with the default REC

being B, when little or no information is available to assess the system or when only one of the above-

being b, when little of no information is available to assess the system of when only one of the ar

mentioned parameters are assessed or the overall PES is rated between a C or D.

All the systems assessed by DWS (2014) on a Sub-quaternary level within the study area were rated as PES

= B or Largely Natural within the greater study area (wind farm boundaries). While these were also rated as

High in terms of Ecological Sensitivity and High in terms of Ecological Importance respectively. Based on the

information collected during the field investigations, these ratings are verified and upheld for the riverine

systems. The High Ecological Sensitivity rating for the natural water sources, is further substantiated by the

fact that the affected catchments are included in both the National Freshwater Priority Atlas (Important Upstream Areas) and the provincial Biodiversity Spatial Plan Critical Biodiversity Area (CBA) spatial layers

(Figure 9 and 10). Noting that the aquatic systems associated with the study area have been rated as and

Ecological Support Areas, due to the importance of the Trakas River system and its tributaries.

Overall, these catchment areas and subsequent rivers / watercourses are largely in a natural state with

localised impacts in some areas, which include the following:

Erosion and sedimentation associated with existing road crossings; and

Impeded water flow due to several in channel farm dams or weirs.

The DFFE screening tool indicated that several Very High aquatic sensitivity features were located within the

study area. The DFFE ratings were based on the presence of Rivers and NFEPAs. The presence of these

Very High Sensitivity features was confirmed during this assessment (See Appendix 2 for Verification

Statement), but also extended to include additional areas as delineated in Figure 11.

The study area is also not located within an Important Bird Area (IBA) or a Strategic Water Resource Area

and did not contain any wetland clusters or listed Threatened Ecosystems.

SiVEST Environmental Prepared by: EnviroSci (Pty) Ltd

However, except for several new watercourse crossings, within or near existing roads/tracks, the overall layout (buildable area) could avoid the High sensitivity areas shown in Figures 11, with the activities thus located within the Low sensitivity areas according to the DFFE Screening Tool, once the suggested road and building placement has taken place.

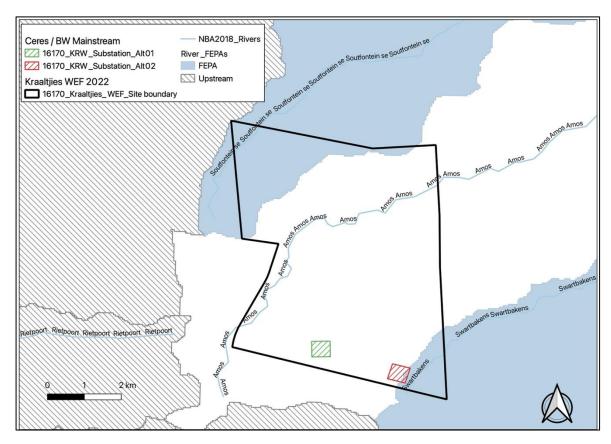


Figure 9: The Freshwater Ecosystem Priority Areas for the study site (Nel et al, 2011)

Date: 20 November 2022 Page 21

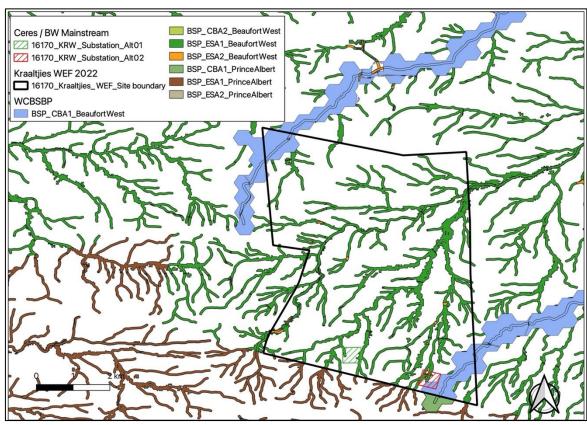


Figure 10: The Critical Biodiversity Areas as per the Western Cape Biodiversity Spatial Plan (2017)

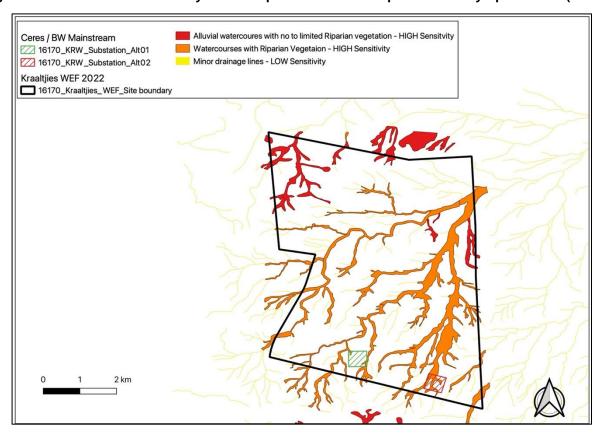


Figure 11: Delineated aquatic zones and respective sensitivities

Date: 20 November 2022

5. SPECIALIST FINDINGS / IDENTIFICATION AND ASSESSMENT OF IMPACTS

Using the baseline description and field data while considering the current disturbances and site characteristics, the following features were identified, then categorized into one of a number pre-determined sensitivity categories to provide, protect and/or guide the layout planning and design processes. Sensitivity areas (with their buffers) were categorized as follows:

Very High = No Go	Legislated "no go" areas or setbacks and areas or features that are considered of such significance that impacting them may be regarded as fatal flaw or strongly influence the project impact significance profile
High	Areas or features that are considered to have a high sensitivity or where project infrastructure would be highly constrained and should be avoided as far as possible. Infrastructure located in these areas are likely to drive up impact significance ratings and mitigations
Medium	Buffer areas and or areas that are deemed to be of medium sensitivity
Low	Areas of low sensitivity or constraints
Neutral	Unconstrained areas (left blank in mapping)

With regard the aquatic environment, there are no formalised riverine or wetland buffer distances provided by the provincial authorities and as such the buffer model as described Macfarlane & Bredin (2017) for wetlands, rivers and estuaries was used. These buffer models are based on the condition of the waterbody, the state of the remainder of the site, coupled to the type of development, as wells as the proposed alteration of hydrological flows. Based then on the information known for the site the buffer model provided the following:

- Construction period = 10m
- Operation period = 8m
- Final = 10m

Artificial dams were not buffered.

Table 1 below provides an overview of the sensitivity of various features (with buffers distances where relevant) as it relates to the main project component types for the project. The features are shown spatially in Figures 12. The sensitivity ratings of Very High (No-go), High, Medium and Low were determined through an assessment of the habitat sensitivity and related constraints. However, these No-Go areas relate in general terms to the project and there are areas where encroachment on these areas would occur (i.e., existing road crossings within High sensitivity areas) but this is only considered acceptable if these areas have already been impacted.

Date: 20 November 2022 Page 23

Table 1: Results of the sensitivity rating / constraints assessment

Development Component	Waterbody type	Sensitivity rating of the respective waterbody type against the development type and the required buffer	Sensitivity rating override if an impact such as a road already occurs within the proposed footprint					
	Alluvial watercourses with limited riparian vegetation	No-Go with 10m buffer	N/a					
	Watercourses with / riparian vegetation	No-go with 10m buffer	N/a					
WTG areas	Minor drainage lines	LOW with 10m buffer but should be avoided	N/a					
wid areas	Artificial dams	Not Applicable = If these systems have no biological value, structures could be placed within the dams, or dams could be demolished if required	N/a					
	Alluvial watercourses with limited riparian vegetation	No-Go with 10m buffer	N/a					
	Watercourses with / riparian vegetation	No-go with 10m buffer	N/a					
Hardstands, Buildings /	Minor drainage lines	LOW with 10m buffer but should be avoided	N/a					
Substations & BESS	Artificial dams	Not Applicable = If these systems have no biological value, structures could be placed within the dams, or dams could be demolished if required	N/a					
	Alluvial watercourses with limited riparian vegetation	No-Go with 10m buffer	LOW if an existing crossing / road or impact is already					
	Watercourses with / riparian vegetation	No-Go with 10m buffer	present, that must then be included in the potential road					
Roads	Minor drainage lines	LOW with 10m buffer	network inclusive of any upgrades					
Rodus	Artificial dams	Not Applicable = If these systems have no biological value, structures could be placed within the dams, or dams could be demolished if required	N/a					
	Alluvial watercourses with limited riparian vegetation	Assumption is that the overhead	lines could span these areas					
Overhead	Watercourses with / riparian	but the towers/pylons should adh	dhere to the buffer distances as					
Lines	vegetation Minor drainage lines Artificial dams	indicated as far as practically pos system are very broad	ssidie as some of the alluvial					

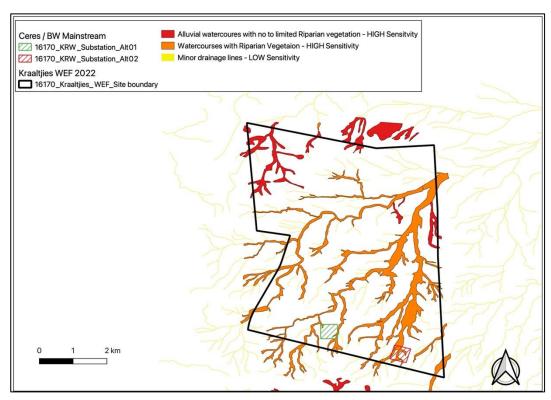


Figure 12: Habitat sensitivity map inclusive of aquatic habitats assessed

Date: 20 November 2022

The following impacts were then assessed, which are aligned with those contained in the Biodiversity Assessment Protocols and included in the table below, and assessed against the proposed activities:

Biodiversity Assessment Protocol Impacts found applicable to this project	Impacts assessed in this report below
Faunal and vegetation communities inhabiting the site	Impact 1, 2, 3 and 4
Fragmentation (physical loss of ecological connectivity and or CBA corridors)	Impact 2 and 4
Changes in numbers and density of species	Impact 2, 3, and 4
Water quality changes (increase in sediment, organic loads, chemicals or eutrophication	Impact 3
Hydrological regime or Hydroperiod changes (Quantity changes such as abstraction or diversion)	Impact 4
Streamflow regulation	Impact 4
Erosion control	Impact 4
No-Go Impact	Impact 5
Cumulative Impacts	Impact 6

As highlighted above, the following impacts on the environment have been identified and will be assessed in greater detail as follows, as well as separately the No-Go and Cumulative impacts:

Construction & Decommissioning Phases

- Impact 1: Loss of species of special concern
- Impact 2: Damage or loss of riparian and alluvial systems in the construction phase
- Impact 3: Potential impact on localised surface water quality

Operational phase

 Impact 4: Impact on aquatic systems through the possible increase in surface water runoff on form and function - Increase in sedimentation and erosion

Date: 20 November 2022 Page 26

5.1 Construction & Decommissioning Phase

Table 2: Rating of impacts for the construction and decommissioning phase

	ISSUE/IMPACT/		Εl					. SIGI		ANCE	RECOMMENDED		EN	IVIR				SIGN	IIFICA ION	NCE
ENVIRONMENTAL PARAMETER ENVIRONMENTAL EFFECT/ NATURE Construction/ Decommissioning Phase		E	Р	R	L	D	 / M	TOTAL	STATU	S	MITIGATION MEASURES	E	Р	R	L	D	 / M	TOTAL	STATU	S
	The construction activities will result in the disturbance of aquatic habitats that may contain										Develop and implemention of a Rehabilitation and Monitoring plan post Environmental Authorisation. This must be developed following the finalisation of the turbine / road layout and a walk down has been completed. This plan should include relocation of suitable plant species, but more important protect any topsoil stores and									
Impact 1: Loss of aquatic species of special concern	listed and or protected plant or animal species. However, none of these were observed during this assessment within the buildable area proposed	1	1	1	1	1	1	5	-	LOW (- ve)	promote the collection of vegetative material and propagules / seed to assist with the revegetation of the site, if and where possible. Where possible, temporary construction lay-down or assembly areas should be sited on transformed areas; and Rapid regeneration of plant cover must be encouraged by setting aside topsoil during earthmoving and replacing onto areas where the re-	1	1	1	1	1	1	5	-	LOW (- ve)

Aquatic Biodiversity Assessment Version No. 1

Date: 20 November 2022

ENVIRONMENTAL	ISSUE / IMPACT /		Εl					TIGA		ANCE	RECOMMENDED	ENVIRONMENTAL SIGNIFICANO AFTER MITIGATION									
PARAMETER	ENVIRONMENTAL EFFECT/ NATURE	E	Р	R	L	D	 	TOTAL	STATU	S	MITIGATION MEASURES	Е	Р	R	L	D	 	TOTAL	STATU	s	
								•			establishment of plant cover is desirable to prevent erosion.										
Impact 2: Damage or loss of riparian and alluvial systems in the construction phase	Construction could result in the loss of drainage systems that are fully functional and provide ecosystem services within the site especially where new access roads are required or road upgrades will widen any current bridges or drifts. Loss can also include a functional loss, through change in vegetation type via alien encroachment for example.	2	3	2	2	3	2	24	-	MEDIUM (-ve)	A pre-construction walkthrough with an aquatic specialist is recommended and they can assist with the development of the stormwater management plan and Aquatic Rehabilitation and Monitoring plan, coupled to micro-siting of the final layout post authorisation. All alien plant re-growth, which is currently low within the greater region must be monitored and should it occur, these plants must be eradicated within the project footprints and especially in areas near the proposed crossings. Where roads and crossings are upgraded, the following applies: Existing pipe culverts must be removed and replaced with suitable sized box culverts, especially where road levels are raised to accommodate any large vehicles. River levels, regardless of the current state of the river / water course, must be reinstated thus	1	3	2	1	2	2	18		LOW (- ve)	

Date: 20 November 2022

Aquatic Biodiversity Assessment Version No. 1

ENIVIDONIMENTAL	ISSUE / IMPACT /		EN					SIGN		ANCE	RECOMMENDED		NCE							
ENVIRONMENTAL PARAMETER	ENVIRONMENTAL EFFECT/ NATURE	E	Р	R	L	D	 / M	TOTAL	STATU	S	MITIGATION MEASURES	E	Р	R	L	D	 	тотаг	STATU s.	s
Impact 2: Potential	During construction										preventing any impoundments from being formed. The related designs must be assessed by an aquatic specialist during a pre-construction walkdown. Where large cut and fill areas are required these must be stabilised and rehabilitated during the construction process, to minimise erosion and sedimentation. Suitable stormwater management systems must be installed along roads and other areas and monitored during the first few months of use during the construction phase. Any erosion / sedimentation must be resolved through whatever additional interventions maybe necessary (i.e., extension, energy dissipaters, spreaders, etc). A detailed monitoring plan must be developed in the pre-construction phase by an aquatic specialist, where any delineated system occurs within 50 m of existing crossings.									
Impact 3: Potential impact on localised surface water quality	During construction earthworks will expose and mobilise earth	1	3	2	2	3	3	33	-	MEDIUM (-ve)	All liquid chemicals including fuels and oil, including the BESS must be stored in with	1	3	2	1	2	2	18	-	LOW (- ve)

Aquatic Biodiversity Assessment Version No. 1

	ISSUE / IMPACT /		Εl		_			SIGI	_	ANCE	RECOMMENDED		EN	IVIR	_			SIGN	IIFICA ON	NCE
ENVIRONMENTAL PARAMETER	ENVIRONMENTAL EFFECT/ NATURE	Е	Р	R	L	D		TOTAL	STATU	s	MITIGATION MEASURES	Е	Р	R	L	D	 / M	TOTAL	STATU s./.	s
(construction materials and fuel storage facilities) during the construction and decommissioning phases	materials, and a number of materials as well as chemicals will be imported and used on site and may end up in the surface water, including soaps, oils, grease and fuels, human wastes, cementitious wastes, paints and solvents, etc. Any spills during transport or while works are conducted in proximity to a watercourse has the potential to affect the surrounding biota. Leaks or spills from storage facilities also pose a risk and due consideration to the safe design and management of the 30 000l fuel storage facility must be given. Although unlikely, consideration must also be provided for the proposed Battery Energy Storage System										secondary containment (bunds or containers or berms) that can contain a leak or spill. Such facilities must be inspected routinely and must have the suitable PPE and spill kits needed to contain likely worst-case scenario leak or spill in that facility, safely. • Washing and cleaning of equipment must be done in designated wash bays, where rinse water is contained in evaporation/sedimentation ponds (to capture oils, grease cement and sediment). • Mechanical plant and bowsers must not be refuelled or serviced within 100m of a river channel. • All construction camps, lay down areas, wash bays, batching plants or areas and any stores should be more than 50 m from any demarcated water courses. • Littering and contamination associated with construction activity must be avoided through effective construction camp management; • No stockpiling should take place within or near a water course									

ENVIRONMENTAL	ISSUE / IMPACT /	ENVIRONMENTAL SIGNIFICANCE BEFORE MITIGATION										RECOMMENDED	ENVIRONMENTAL SIGNIFICANCE AFTER MITIGATION											
PARAMETER	ENVIRONMENTAL EFFECT/ NATURE		Р	R	L	D		TOTAL	STATU	,,,	s	MITIGATION MEASURES	Е	Р	R	L	D	 / M	TOTAL	STATU s.	s			
	(BESS), with regard safe handling during the construction phase. This to avoid any spills or leaks from this system.											All stockpiles must be protected and located in flat areas where run-off will be minimised and sediment is recoverable.												

5.2 Operation

Table 3: Rating of impacts for the operational phase

ENVIRONMENTAL	ISSUE / IMPACT / ENVIRONMENTAL EFFECT/ NATURE		Εl		_			SIGN	_	ANCE	RECOMMENDED	ENVIRONMENTAL SIGNIFICANCE AFTER MITIGATION									
PARAMETER		E	Р	R	L	D	 	TOTAL	STATU	s	MITIGATION MEASURES		Р	R	L	D	 / M	TOTAL	STATU	s	
Operation Phase																					
Impact 4 Impact on aquatic systems through the possible increase in surface water runoff on form and function during the operational phase	Increase in hard surface areas, and roads that require stormwater management will increase through the concentration of surface water flows that could result in localised changes to flows (volume) that would result in form and function changes within aquatic systems, which are currently ephemeral. This then increases the rate of erosion and	2	3	2	2	3	3	36	-	MEDIUM (-ve)	A stormwater management plan must be developed in the preconstruction phase, detailing the stormwater structures and management interventions that must be installed to manage the increase of surface water flows directly into any natural systems. The stormwater control systems must be inspected on an annual basis to ensure these are functional. Effective stormwater management must	1	1	1	1	1	1	5	,	LOW (- ve)	

ENVIRONMENTAL PARAMETER	ISSUE / IMPACT / ENVIRONMENTAL EFFECT/ NATURE		EN		_				NIFIC.	ANCE	RECOMMENDED	ENVIRONMENTAL SIGNIFICANCE AFTER MITIGATION									
		E	Р	R	L	D		TOTAL	STATU	s	MITIGATION MEASURES	E	Р	R	L	D	- \	TOTAL	STATU	s	
	sedimentation of downstream areas.										include effective stabilisation (gabions and Reno mattresses) of exposed soil and the re-vegetation of any disturbed riverbanks, as and where necessary.										

5.3 No go Impact

Table 4: Rating of impacts (No-go)

ENVIRONMENTAL	ISSUE / IMPACT / ENVIRONMENTAL EFFECT/ NATURE		Εl		_				NIFIC.	ANCE	RECOMMENDED	ENVIRONMENTAL SIGNIFICANCE AFTER MITIGATION									
PARAMETER		E	Р	R	L	D	 	TOTAL	STATU	S	MITIGATION MEASURES		Р	R	L	D	 / M	TOTAL	STATU	s	
No-Go																					
impact on aquatic resources should the project not go ahead (i.e. the No Go Alternative)	Should the project not proceed, then the current status quo with regards to the environment would remain unchanged. Overall, the area is largely in a natural state. But present day impacts do occur in localised areas and include the following: Increase in unpalatable species due to past grazing activities	1	3	2	1	2	2	18	-	LOW (- ve)	Improve current grazing management, although this is occurring within the surrounding conservation areas and / or areas that are used for any hunting / game farming. Improve the current stormwater and energy dissipation features not currently found along the tracks and roads within the region.	1	3	2	1	2	2	18	-	LOW (- ve)	

SiVEST Environmental

Aquatic Biodiversity Assessment Version No. 1

ENVIRONMENTAL PARAMETER	ISSUE / IMPACT / ENVIRONMENTAL EFFECT/ NATURE		ΕN		_			SIGN TIGA	_	ANCE	RECOMMENDED	ENVIRONMENTAL SIGNIFICANCE AFTER MITIGATION									
		Е	Р	R	L	D	 / M	TOTAL	STATU	s	MITIGATION MEASURES	E	Р	R	L	D	 	TOTAL	STATU s.	s	
	Erosion as a result of road crossings; Several farm dams; and Undersized culverts within existing road crossings.										Install properly sized culverts with erosion protection measures at the present road / track crossings.										

Date: 20 November 2022

Page **33**

5.4 Cumulative Impacts

A cumulative impact assessment was conducted by assessing this project in relation to any other proposed projects within a 35km radius, as shown in Figure 13.

The report author has been involved in the assessment of all the listed projects within the exception of the Kwagga & Jessa projects. However, all of the reports were review and these are based on the premise that all layouts were developed with impact avoidance in mind, with particular reference to the avoidance of Very High & High Sensitivity areas.

Consequently, all the impacts that remain could be mitigated mostly through revegetation and / or proper stormwater management. Thus, all the impacts would be Medium to Low depending on the scale of the sites, but found acceptable.

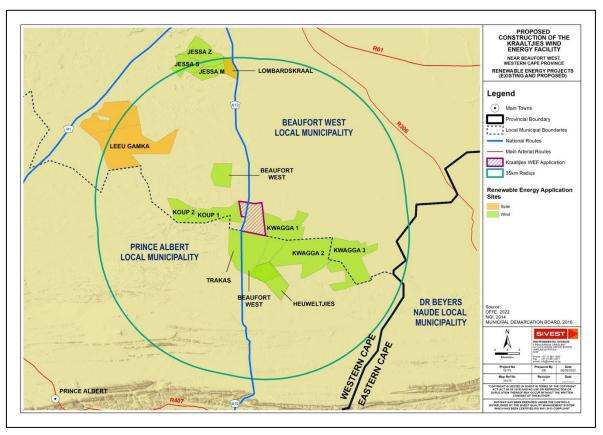


Figure 13: Renewable energy projects within a 35km radius

Table 5: Rating of cumulative impacts

ENVIRONMENTAL	ISSUE / IMPACT / ENVIRONMENTAL		E	NVI	_			SIGNI TIGATI	ON		RECOMMENDED MITIGATION	ENVIRONMENTAL SIGNIFICANCE AFTER MITIGATION									
PARAMETER	EFFECT/ NATURE	Е	Р	P R L		D	TOT AT STA		STA	s	MEASURES	E	P	R	L	D	I/ M	TOT	STA	s	
Cumulative Phase)																				
Cumulative	The cumulative	1	1	1	1	1	1	5	-	LOW (-	The premise of all	1	3	2	1	2	2	18	-	LOW (-	
Impact of various	assessment									ve)	the reviewed or									ve)	
proposed wind	considers the										assessed projects										
farms and	various proposed										has been the										
associated grid	renewable										avoidance of										
lines on the	projects that										impacts on the Very										
natural	occur within a										High Sensitivity										
environment	35km radius of										environments,										
	this site, where										which have been										
	the author has										achieved by the										
	either been										various proposed										
	involved in the										layouts. The only										
	assessment of										remaining impacts										
	these projects										will be the crossing										
	and / or review of										of internal roads										
	the past										over minor										
	assessments as										watercourse /										
	part of any										drainage lines or										
	required Water										areas rated as LOW										
	Use Licenses.										sensitivity.										

Date: 20 November 2022

5.5 Overall Impact Rating

Table 6: Overall Impact Significance for the WEF (Pre- and Post-Mitigation)

Nature of impact and Phase	Overall Impact Significance (Pre - Mitigation)	Proposed mitigation	Overall Impact Significance (Post - Mitigation)		
Construction Phase					
Impact 1: Loss of aquatic species of special concern	Low	Develop and implement a Rehabilitation and Monitoring plan post Environmental Authorisation. This must be developed following the finalisation of the turbine / road layout and a walk down has been completed post authorisation. This plan should include relocation of suitable plant species, but more importantly, protect any topsoil stores and promote the collection of vegetative material and propagules / seed to assist with the revegetation of the site where possible. Where possible, temporary construction lay-down or assembly areas should be sited on transformed areas; and Rapid regeneration of plant cover must be encouraged by setting aside topsoil during earthmoving and replacing onto areas where	Low		
		the re-establishment of plant cover is desirable to prevent erosion.			
Impact 2: Damage or loss of riparian and alluvial systems in the construction phase		A pre-construction walkthrough by an aquatic specialists is recommended and they can assist with the development of the stormwater management plan and Aquatic Rehabilitation and Monitoring plan, coupled to micro-siting of the final layout post authorisation. All alien plant re-growth, which is currently low within the greater region must be monitored and should it occur, these plants must be eradicated within the project footprints. Where roads and crossings are upgraded, the following applies: Existing pipe culverts must be removed and replaced with suitable sized box culverts where appropriate, especially where	Low		

SiVEST Environmental Aquatic Biodiversity Assessment Version No. 1

Date: 20 November 2022 Page 1

		road lavela are rejood to	
		road levels are raised to	
		accommodate any large vehicles.	
		River levels, regardless of the	
		current state of the river / water	
		course, must be reinstated thus	
		preventing any impoundments	
		from being formed. The related	
		designs must be assessed by an	
		aquatic specialist during a pre-	
		construction walkdown post authorisation.	
		Where large cut and fill areas are	
		required these must be stabilised	
		and rehabilitated during the	
		construction process, to minimise	
		erosion and sedimentation.	
		Suitable stormwater management	
		systems must be installed along	
		roads and other areas, and	
		monitored during the first few	
		months of use. Any erosion /	
		sedimentation must be resolved	
		through whatever additional	
		interventions may be necessary	
		(i.e., extension, energy	
		dissipaters, spreaders, etc).	
		A detailed monitoring plan must	
		be developed in the pre-	
		construction phase by an aquatic	
		specialist, where any delineated	
		system occurs within 50 m of	
		existing crossings.	
	Medium	All liquid chemicals including	Low
		fuels and oil, including the BESS	
		must be stored in secondary	
		containment (bunds or containers	
		or berms) that can contain a leak	
		or spill. Such facilities must be	
		inspected routinely and must	
		have the suitable PPE and spill	
		kits needed to contain likely	
Impact 3: Potential impact on		worst-case scenario leak or spill	
localised surface water quality		in that facility, safely.	
(construction materials and fuel		Washing and cleaning of	
storage facilities) during the		equipment must be done in	
construction and		designated wash bays, where	
decommissioning phases		rinse water is contained in	
9		evaporation/sedimentation ponds	
		(to capture oils, grease, cement	
		and sediment).	
		Mechanical plant and bowsers must not be refuelled or serviced	
		within 100m of a river channel.	
		All construction camps, lay	
		down areas, wash bays, batching	
		plants or areas, and any stores	
		should be more than 50 m from	
		any demarcated water courses.	

Date: 20 November 2022

Operation Phase		Littering and contamination associated with construction activity must be avoided through effective construction camp management. No stockpiling should take place within or near a water course All stockpiles must be protected and located in flat areas where run-off will be minimised and sediment is recoverable.	
Impact 4 Impact on aquatic systems through the possible increase in surface water runoff on form and function during the operational phase	Medium	A stormwater management plan must be developed in the preconstruction phase, detailing the stormwater structures and management interventions that must be installed to manage the increase of surface water flows directly into any natural systems. The stormwater control systems must be inspected on an annual basis to ensure these are functional. Effective stormwater management must include effective stabilisation (gabions and Reno mattresses) of exposed soil and the revegetation of any disturbed riverbanks	Low
No-Go	Low	Improve current grazing management, although this is occurring within the surrounding conservation areas and or areas that are used for any hunting / game farming. Improve the current stormwater and energy dissipation features not currently found along the tracks and roads within the region. Install properly sized culverts with erosion protection measures at the present road / track crossings.	Low
Cumulative Impacts	Low	The premise of all the reviewed or assessed projects has been the avoidance of impacts on the Very High Sensitivity environments, which have been achieved by the various proposed layouts. The only remaining impacts will be the crossing of internal roads over minor watercourse / drainage lines or areas rated as LOW sensitivity.	Low

Date: 20 November 2022 Page 3

6. COMPARATIVE ASSESSMENT OF ALTERNATIVES

Key

PREFERRED	The alternative will result in a low impact / reduce the impact / result in a positive impact
FAVOURABLE The impact will be relatively insignificant	
LEAST PREFERRED The alternative will result in a high impact / increase the impact	
NO PREFERENCE	The alternative will result in equal impacts

6.1 Wind Energy Facility

Table 7: Comparative assessment of WEF components

Alternative	Preference	Reasons (incl. potential issues)		
SUBSTATION SITE ALTERNATIVES				
Substation Option 1	· ·	With minor layout adjustment, the water course can be avoided.		
Substation Option 2	Impacts on High sensitivity aquatic system	With a major layout adjustment, the water course can be avoided.		

6.2 No-Go Alternative

Should the project not proceed, then the current status quo with regard the aquatic environment would remain unchanged. Overall, these catchment and subsequent rivers / watercourses are largely in a natural state. Present day impacts do occur in localised areas and include the following:

- · Erosion as a result of road crossings;
- · Several farm dams; and
- Undersized culverts within existing road crossings, although very few occur on site.

Date: 20 November 2022 Page 1

Prepared by: EnviroSci (Pty) Ltd

Land owners should undertake the following:

• Improve grazing management practices

• Improve the current stormwater and energy dissipation features not currently found along some of

the tracks and roads within the region

Install properly sized culverts or drifts with erosion protection measures at the existing road / track

crossings

7. CONCLUSION AND SUMMARY

7.1 Summary of Findings

The project overall has a small footprint spread out over a large area, allowing for retention of much of the natural environment so that the systems should remain largely unaffected. Therefore, the wind farm is such

that it carries a low intensity impact on aquatic resources, but requiring the clearing of areas with terrestrial

vegetation, especially when considering the associated roads, cables and other infrastructure.

A variety of environmental features were observed within the study area and these were mapped and buffered

as necessary for their protection. The current layout has, to a large degree, avoided these sensitive features and buffer areas, greatly reducing the potential overall impact and environmental risk. The overall and

cumulative impacts, as assessed, are linked to instances where complete avoidance was not possible, or the

nature of the activities involve a potential risk to aquatic resources even at great distance.

Overall, it is expected that the impact on the environment would be Low (-). Noteworthy areas, that should

be avoided, include the High Sensitivity areas as shown in this report. Existing crossings may be used and/or upgraded that intersect these systems however, but for these crossings, a detailed monitoring plan must be

developed in the pre-construction phase.

7.2 Conclusion and Impact Statement

Based on the findings of this study, the specialist finds no reason to withhold to an environmental authorisation

for any of the proposed activities, assuming that key mitigations measures are implemented. Based on the characteristics of the site, that all the aquatic systems could be spanned, while making use of existing tracks,

however technical considerations both Substation Options must be adjusted to avoid the High Sensitivity

areas shown in this assessment..

In summary the proposed buildable area has avoided all of the observed aquatic habitat, however, this must

all still be assessed in detail once the roads layout, hard stand and other temporary works areas have been

provided, coupled to a micrositing walkdown once all information is available post authorization before the EMPr and Final Layout are approved.

SiVEST Environmental Prepared by: EnviroSci (Pty) Ltd

8. REFERENCES

GBIF.org (07 December 2021) GBIF Occurrence Download https://doi.org/10.15468/dl.hgt8qf Agenda 21 – Action plan for sustainable development of the Department of Environmental Affairs and Tourism (DEAT) 1998.

Agricultural Resources Act, 1983 (Act No. 43 of 1983).

Davies, B. and Day J., (1998). Vanishing Waters. University of Cape Town Press.

Department of Water Affairs and Forestry - DWAF (2005). A practical field procedure for identification and delineation of wetland and riparian areas Edition 1. Department of Water Affairs and Forestry, Pretoria.

Department of Water Affairs and Forestry - DWAF (2008). Manual for the assessment of a Wetland Index of Habitat Integrity for South African floodplain and channelled valley bottom wetland types by M. Rountree (ed); C.P. Todd, C. J. Kleynhans, A. L. Batchelor, M. D. Louw, D. Kotze, D. Walters, S. Schroeder, P. Illgner, M. Uys. and G.C. Marneweck. Report no. N/0000/00/WEI/0407. Resource Quality Services, Department of Water Affairs and Forestry, Pretoria, South Africa.

Driver A., Sink, K.J., Nel, J.N., Holness, S., Van Niekerk, L., Daniels, F., Jonas, Z., Majiedt, P.A., Harris, L. & Maze, K. 2012. National Biodiversity Assessment 2011: An assessment of South Africa's biodiversity and ecosystems. Synthesis Report. South African National Biodiversity Institute and Department of Environmental Affairs, Pretoria.

Du Preez, L. And Carruthers, V. 2009. A Complete Guide To Frogs Of Southern Africa. Struik Nature, Cape Town

Ewart-Smith J.L., Ollis D.J., Day J.A. and Malan H.L. (2006). National Wetland Inventory: Development of a Wetland Classification System for South Africa. WRC Report No. KV 174/06. Water Research Commission, Pretoria.

IUCN (2019). Red List of Threatened Species. IUCN Species Survival Commission, Cambridge Available: http://www.iucnredlist.org/

Kleynhans C.J., Thirion C. and Moolman J. (2005). A Level 1 Ecoregion Classification System for South Africa, Lesotho and Swaziland. Report No. N/0000/00/REQ0104. Resource Quality Services, Department of Water Affairs and Forestry, Pretoria.

Kotze D.C., Marneweck G.C., Batchelor A.L., Lindley D.S. and Collins N. (2008). WET-EcoServices A technique for rapidly assessing ecosystem services supplied by wetlands. WRC Report No: TT 339/08.

Macfarlane, D.M. & Bredin, I.P. 2017. Buffer Zone Guidelines for Rivers, Wetlands and Estuaries Buffer Zone Guidelines for Rivers, Wetlands and Estuaries. WRC Report No TT 715/1/17 Water Research Commission, Pretoria.

Minerals and Petroleum Resources Development Act, 2002 (Act No. 28 of 2002), as amended.

Mitsch, J.G. and Gosselink, G. (2000). Wetlands 3rd End, Wiley, NewYork, 2000, 920 pg.

Mucina, L., & Rutherford, M.C., 2006. The Vegetation of South Africa, Lesotho and Swaziland, Strelitzia 19, South Africa.

National Environmental Management Act, 1998 (Act No. 107 of 1998), as amended.

National Water Act, 1998 (Act No. 36 of 1998), as amended

Date: 20 August 2022 Page **3**

Prepared by: EnviroSci (Pty) Ltd

Nel, J., Maree, G., Roux, D., Moolman, J., Kleynhans, N., Silberbauer, M. and Driver, A. 2004. South African National Spatial Biodiversity Assessment 2004: Technical Report. Volume 2: River Component. CSIR Report Number ENV-S-I-2004-063. Council for Scientific and Industrial Research, Stellenbosch.

Nel, J.L., Murray, K.M., Maherry, A.M., Petersen, C.P., Roux, D.J., Driver, A., Hill, L., Van Deventer, H., Funke, N., Swartz, E.R., Smith-Adao, L.B., Mbona, N., Downsborough, L. and Nienaber, S. (2011). Technical Report for the National Freshwater Ecosystem Priority Areas project. WRC Report No. K5/1801.

Nel, J., Colvin, C., Le Maitre, D., Smith, J. & Haines, I. (2013). South Africa's Strategic Water Source Areas. CSIR Report No: CSIR/NRE/ECOS/ER/2013/0031/A. Report for WWF South Africa

Ollis, D.J., Snaddon, C.D., Job, N.M. & Mbona, N. 2013. Classification System for Wetlands and other Aquatic Ecosystems in South Africa. User Manual: Inland Systems. SANBI Biodiversity Series 22. South African National Biodiversity Institute, Pretoria.

Parsons R. (2004). Surface Water – Groundwater Interaction in a Southern African Context. WRC Report TT 218/03, Pretoria.

Ramsar Convention, (1971) including the Wetland Conservation Programme (DEAT) and the National Wetland Rehabilitation Initiative (DEAT, 2000).

Rowntree, K., Wadesone, R. and O'Keeffe, J. 2000. The development of a geomorphological classification system for the longitudinal zonation of South African rivers. South African Geographical Journal 82(3): 163-172.

South African Bird Atlasing Project 2 (SABAP2). 2017. Animal Demographic Unit. Available online: http://sabap2.adu.org.za/

Stuart, C and Stuart, T. 2007. A field guide to the mammals of Southern Africa. Struik Nature, Cape Town.

van Deventer H., Smith-Adao, L. Petersen C., Mbona N., Skowno A., Nel, J.L. (2020) Review of available data for a South African Inventory of Inland Aquatic Ecosystems (SAIIAE). Water SA 44 (2) 184-199

SiVEST Environmental Prepared by: EnviroSci (Pty) Ltd Aquatic Impact Assessment

Date: 20 August 2022

Version No.

Appendix 1 Specialist CV

CURRICULUM VITAE Dr Brian Michael Colloty 7212215031083

1 Rossini Rd Pari Park Gqeberha, 6070 083 498 3299

Profession: Ecologist & Environemental Assessment Practitioner (Pr. Sci. Nat. 400268/07)

Member of the South African Wetland Society

Specialisation: Ecology and conservation importance rating of inland habitats, wetlands, rivers & estuaries

Years experience: 25 years

SKILLS BASE AND CORE COMPETENCIES

- 25 years experience in environmental sensitivity and conservation assessment of aquatic and terrestrial systems inclusive of Index of Habitat Integrity (IHI), WET Tools, Riparian Vegetation Response Assessment Index (VEGRAI) for Reserve Determinations, estuarine and wetland delineation throughout Africa. Experience also includes biodiversity and ecological assessments with regard sensitive fauna and flora, within the marine, coastal and inland environments. Countries include Mozambique, Kenya, Namibia, Central African Republic, Zambia, Eritrea, Mauritius, Madagascar, Angola, Ghana, Guinea-Bissau and Sierra Leone. Current projects also span all nine provinces in South Africa.
- 15 years experience in the coordination and management of multi-disciplinary teams, such as specialist teams for small to large scale EIAs and environmental monitoring programmes, throughout Africa and inclusive of marine, coastal and inland systems. This includes project and budget management, specialist team management, client and stakeholder engagement and project reporting.
- GIS mapping and sensitivity analysis

TERTIARY EDUCATION

1994: B Sc Degree (Botany & Zoology) - NMU

1995: B Sc Hon (Zoology) - NMU
 1996: M Sc (Botany - Rivers) - NMU

2000: Ph D (Botany – Estuaries & Mangroves) – NMU

EMPLOYMENT HISTORY

- 1996 2000 Researcher at Nelson Mandela University SAB institute for Coastal Research & Management. Funded by the WRC to develop estuarine importance rating methods for South African Estuaries
- 2001 January 2003 Training development officer AVK SA (reason for leaving sought work back in the environmental field rather than engineering sector)
- February 2003- June 2005 Project manager & Ecologist for Strategic Environmental Focus (Pretoria) (reason for leaving sought work related more to experience in the coastal environment)
- July 2005 June 2009 Principal Environmental Consultant Coastal & Environmental Services (reason for leaving company restructuring)
- June 2009 August 2018 Owner / Ecologist of Scherman Colloty & Associates cc
- August 2018 Owner / Ecologist EnviroSci (Pty) Ltd

SELECTED RELEVANT PROJECT EXPERIENCE

World Bank IFC Standards

- Botswana South Africa 400kv transmission line (400km) biodiversity assessment on behalf of Aurecon current
- Farim phosphate mine and port development, Guinea Bissau biodiversity and estuarine assessment on behalf of Knight Piesold Canada 2016.
- Tema LNG offshore pipeline EIA marine and estuarine assessment for Quantum Power (2015).
- Colluli Potash South Boulder, Eritrea, SEIA marine baseline and hydrodynamic surveys co-ordinator and coastal vegetation specialist (coastal lagoon and marine) (on-going).
- Wetland, estuarine and riverine assessment for Addax Biofeuls Sierra Leone, Makeni for Coastal & Environmental Services: 2009
- ESHIA Project manager and long-term marine monitoring phase coordinator with regards the dredge works required in Luanda bay, Angola. Monitoring included water quality and biological changes in the bay and at the offshore disposal outfall site, 2005-2011

Prepared by: EnviroSci (Pty) Ltd

South African

Aquatic Impact Assessment
Version No. 1

SiVEST Environmental

- Plant and animal search and rescue for the Karusa and Soetwater Wind Farms on behalf of Enel Green Power, Current
- Plant and animal search and rescue for the Nxuba, Oyster Bay and Garob Wind Farms on behalf of Enel Green Power, 2018 - 2019
- Plant and Animal Search and Rescue for the Port of Ngqura, Transnet Landside infrastructure Project, with development and management of on site nursery, Current
- Plant and Animal Search and Rescue for the Port of Ngqura, OTGC Tank Farm Project (2019)
- Plant search and rescue, for NMBM (Driftsands sewer, Glen Hurd Drive), Department of Social Development (Military veterans housing, Despatch) and Nxuba Wind Farm, - current
- Wetland specialist appointed to update the Eastern Cape Biodiversity Conservation Plan, for the Province on behalf of EOH CES appointment by SANBI – current. This includes updating the National Wetland Inventory for the province, submitting the new data to CSIR/SANBI.
- CDC IDZ Alien eradication plans for three renewable projects Coega Wind Farm, Sonop Wind Farm and Coega PV, on behalf of JG Afrika (2016 2017).
- Nelson Mandela Bay Municipality Baakens River Integrated Wetland Assessment (Inclusive of Rehabilitation and Monitoring Plans) for CEN IEM Unit - Current
- Rangers Biomass Gasification Project (Uitenhage), biodiversity and wetland assessment and wetland rehabilitation / monitoring plans for CEM IEM Unit – 2017
- Gibson Bay Wind Farm implementation of the wetland management plan during the construction and operation of the wind farm (includes surface / groundwater as well wetland rehabilitation & monitoring plan) on behalf of Enel Green Power - 2018
- Gibson Bay Wind Farm 133kV Transmission Line wetland management plan during the construction of the transmission line (includes wetland rehabilitation & monitoring plan) on behalf of Eskom 2016.
- Tsitsikamma Community Wind Farm implementation of the wetland management plan during the construction of the wind farm (includes surface / biomonitoring, as well wetland rehabilitation & monitoring plan) on behalf of Cennergi – completed May 2016.
- · Alicedale bulk sewer pipeline for Cacadu District, wetland and water quality assessment, 2016
- Mogalakwena 33ky transmission line in the Limpopo Province, on behlaf of Aurecon, 2016
- Cape St Francis WWTW expansion wetland and passive treatment system for the Kouga Municipality, 2015
- Macindane bulk water and sewer pipelines wetland and wetland rehabilitation plan 2015
- Eskom Prieska to Copperton 132kV transmission line aquatic assessment, Northern Cape on behalf of Savannah Environmental 2015.
- Joe Slovo sewer pipeline upgrade wetland assessment for Nelson Mandela Bay Municipality 2014
- Cape Recife Waste Water Treatment Works expansion and pipeline aquatic assessment for Nelson Mandela Bay Municipality 2013
- Pola park bulk sewer line upgrade aquatic assessment for Nelson Mandela Bay Municipality 2013
- Transnet Freight Rail Swazi Rail Link (Current) wetland and ecological assessment on behalf of Aurecon for the proposed rail upgrade from Ermelo to Richards Bay
- Eskom Transmission wetland and ecological assessment for the proposed transmission line between Pietermaritzburg and Richards Bay on behalf of Aurecon (2012).
- Port Durnford Exarro Sands biodiversity assessment for the proposed mineral sands mine on behalf of Exxaro (2009)
- Fairbreeze Mine Exxaro (Mtunzini) wetland assessment on behalf of Strategic Environmental Services (2007).
- Wetland assessment for Richards Bay Minerals (2013) Zulti North haul road on behalf of RBM.
- Biodiversity and aquatic assessments for 118 renewable projects in the past 9 years in the Western, Eastern, Northern Cape, KwaZulu-Natal and Free State provinces. Clients included RES-SA, Red Cap, ACED Renewables, Mainstream Renewable, GDF Suez, Globeleq, ENEL, Abengoa amongst others. Particular aquatic sensitivity assessment and Water Use License Applications on behalf of Mainstream Renewable Energy (8 wind farms and 3 PV facilities.), Cennergi / Exxaro (2 Wind farms), WKN Wind current (2 wind farms & 2 PV facilities), ACED (6 wind farms) and Windlab (3 Wind farms) were also conducted. Several of these projects also required the assessment of the proposed transmission lines and switching stations, which were conducted on behalf of Eskom.
- Vegetation assessments on the Great Brak rivers for Department of Water and Sanitation, 2006 and the Gouritz Water Management Area (2014)
- Proposed FibreCo fibre optic cable vegetation assessment along the PE to George, George to Graaf Reinet, PE to Colesburg, and East London to Bloemfontein on behalf of SRK (2013-2015).

SiVEST Environmental Prepared by: EnviroSci (Pty) Ltd

Appendix 2 – Site Verification Report

SITE SENSITIVITY VERIFICATION (IN TERMS OF PART A OF THE ASSESSMENT PROTOCOLS PUBLISHED IN GN 320 ON 20 MARCH 2020

INTRODUCTION

In accordance with Appendix 6 of the National Environmental Management Act (Act 107 of 1998, as amended) (NEMA) Environmental Impact Assessment (EIA) Regulations of 2014, a site sensitivity verification has been undertaken in order to confirm the current land use and environmental sensitivity of the proposed project area as identified by the National Web-Based Environmental Screening Tool (Screening Tool).

SITE SENSITIVITY VERIFICATION

Using the result of the specialist ecological impact assessment, that made use of past and current spatial databases, aerial images and field work conducted within and adjacent to the site over a number of years / seasons, various habitats were delineated and the rated in terms of their sensitivity.

OUTCOME OF SITE SENSITIVITY VERIFICATION

Similar to the results of the Screening Tool, the study area contained three types of sensitivity, namely Very High Medium and Low (Figure 1-4). However, the extent of the Very High Sensitivity areas was found be greater in extent as shown in Figure 5.

NATIONAL ENVIRONMENTAL SCREENING TOOL

Based on the DFFE Screening Tool, the site contains areas of very high sensitivity due to the presence of rivers and NFEPAs. The remaining area within the development footprint is deemed to be of Low sensitivity (Figure 1).

SiVEST Environmental Prepared by: EnviroSci (Pty) Ltd

Aquatic Impact Assessment Version No. 1

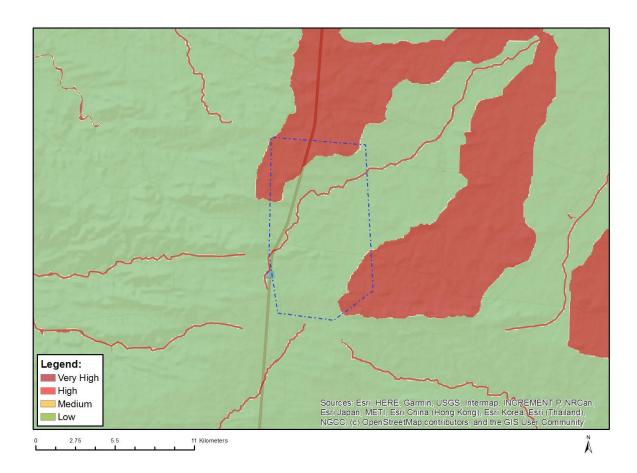


Figure 1. DFFE Screening Tool outcome for the aquatic biodiversity theme with the greater study area (WEF & Grid)

Figure 2 below shows the sensitivity map produced following the ecological assessment as well as a ground-truthing exercises, with mapping of the observed features at a finer scale.

Date: 20 August 2022 Page 8

Prepared by: EnviroSci (Pty) Ltd

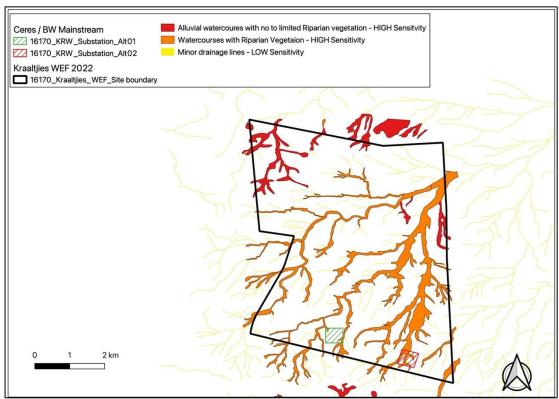


Figure 2. Environmental sensitivity map produced by the aquatic specialist

CONCLUSION

In conclusion, the DFFE Screening Tool identified two sensitivity ratings within the development study area, very high, and low. Although there is some overlap with the findings on site and the Screening Tool's outcome, the extent of the High = No-Go sensitivity areas was found to be greater than the extent in the Screening Tool.

However and appropriate layout can be developed to minimise the impact on these areas, but must be verified once the final layout inclusive of roads has been developed.

Appendix 3: Detailed aquatic assessment methodology

This study followed the approaches of several national guidelines with regards to wetland assessment. These have been modified by the author, to provide a relevant mechanism of assessing the present state of the study area aquatic systems, applicable to the specific environment and, in a clear and objective manner, identify and assess the potential impacts associated with the proposed development site based on information collected within the relevant farm portions.

Current water resource classification systems make use of the Hydrogeomorphic (HGM) approach, and for this reason, the National Wetland Classification System (NWCS) approach will be used in this study. It is also important to understand the legal definition of a wetland, the means of assessing wetland conservation and importance and the relevant legislation aimed at protecting wetlands. These aspects will be discussed in greater depth in this section of the report, as they form the basis of the study approach to assessing wetland impacts.

For reference the following definitions are as follows:

- **Drainage line**: A drainage line is a lower category or order of watercourse that does not have a clearly defined bed or bank. It carries water only during or immediately after periods of heavy rainfall i.e. non-perennial, and riparian vegetation may not be present.
- **Perennial and non-perennial:** Perennial systems contain flow or standing water for all or a large proportion of any given year, while non-perennial systems are episodic or ephemeral and thus contains flows for short periods, such as a few hours or days in the case of drainage lines.
- **Riparian**: The area of land adjacent to a stream or river that is influenced by stream-induced or related processes. Riparian areas which are saturated or flooded for prolonged periods would be considered wetlands and could be described as riparian wetlands. However, some riparian areas are not wetlands (e.g. an area where alluvium is periodically deposited by a stream during floods but which is well drained).
- Wetland: Land which is transitional between terrestrial and aquatic systems where the water table is usually at or near the surface, or the land is periodically covered with shallow water, and which under normal circumstances supports or would support vegetation typically adapted to life in saturated soil (Water Act 36 of 1998); land where an excess of water is the dominant factor determining the nature of the soil development and the types of plants and animals living at the soil surface (Cowardin et al., 1979).
- Water course: As per the National Water Act means -
- (a) a river or spring;
- (b) a natural channel in which water flows regularly or intermittently;
- (c) a wetland, lake or dam into which, or from which, water flows; and
- (d) any collection of water which the Minister may, by notice in the Gazette, declare to be a watercourse, and a reference to a watercourse includes, where relevant, its bed and banks

8.1 Waterbody classification systems

Since the late 1960's, wetland classification systems have undergone a series of international and national revisions. These revisions allowed for the inclusion of additional wetland types, ecological and conservation rating metrics, together with a need for a system that would allude to the functional requirements of any given wetland (Ewart-Smith *et al.*, 2006). Wetland function is a consequence of biotic and abiotic factors, and wetland classification should strive to capture these aspects. Coupled to this was the inclusion of other criteria within the classification systems to differentiate between river, riparian and wetland systems, as well as natural versus artificial waterbodies.

The South African National Biodiversity Institute (SANBI) in collaboration with several specialists and stakeholders developed the newly revised and now accepted National Wetland Classification Systems (NWCS) (Ollis *et al.*, 2013). This system comprises a hierarchical classification process of defining a wetland based on the principles of the hydrogeomorphic (HGM) approach at higher levels, with including structural features at the finer or lower levels of classification (Ollis *et al.*, 2013).

Wetlands develop in a response to elevated water tables, linked either to rivers, groundwater flows or seepage from aquifers (Parsons, 2004). These water levels or flows then interact with localised geology and soil forms, which then determines the form and function of the respective wetlands. Water is thus the common driving force, in the formation of wetlands (DWAF, 2005). It is significant that the HGM approach has now been included in the wetland classifications as the HGM approach has been adopted throughout the water resources management realm with regards to the determination of the Present Ecological State (PES) and Ecological Importance and Sensitivity (EIS) and WET-Health assessments for aquatic environments. All these systems are then easily integrated using the HGM approach in line with the Eco-classification process of river and wetland reserve determinations used by the Department of Water and Sanitation (DWS). The Ecological Reserve of a wetland or river is used by DWS to assess the water resource allocations when assessing WULAs

The NWCS process is provided in more detail in the methods section of the report, but some of the terms and definitions used in this document are present below:

Definition Box

Present Ecological State is a term for the current ecological condition of the resource. This is assessed relative to the deviation from the Reference State. Reference State/Condition is the natural or pre-impacted condition of the system. The reference state is not a static condition, but refers to the natural dynamics (range and rates of change or flux) prior

SiVEST Environmental
Aquatic Impact Assessment
Version No. 1

to development. The PES is determined per component - for rivers and wetlands this would be for the drivers: flow, water quality and geomorphology; and the biotic response indicators: fish, macroinvertebrates, riparian vegetation and diatoms. PES categories for every component would be integrated into an overall PES for the river reach or wetland being investigated. This integrated PES is called the EcoStatus of the reach or wetland.

EcoStatus is the overall PES or current state of the resource. It represents the totality of the features and characteristics of a river and its riparian areas or wetland that bear upon its ability to support an appropriate natural flora and fauna and its capacity to provide a variety of goods and services. The EcoStatus value is an integrated ecological state made up of a combination of various PES findings from component EcoStatus assessments (such as for invertebrates, fish, riparian vegetation, geomorphology, hydrology, and water quality).

Reserve: The quantity and quality of water needed to sustain basic *human needs* and *ecosystems* (e.g. estuaries, rivers, lakes, groundwater and wetlands) to ensure ecologically sustainable development and utilisation of a water resource. The *Ecological Reserve* pertains specifically to aquatic ecosystems.

Reserve requirements: The quality, quantity and reliability of water needed to satisfy the requirements of basic human needs and the Ecological Reserve (inclusive of instream requirements).

Ecological Reserve determination study: The study undertaken to determine Ecological Reserve requirements.

Licensing applications: Water users are required (by legislation) to apply for licenses prior to extracting water resources from a water catchment or any other activity that qualifies as a water use.

Ecological Water Requirements: This is the quality and quantity of water flowing through a natural stream course that is needed to sustain instream functions and ecosystem integrity at an acceptable level as determined during an EWR study. These then form part of the conditions for managing achievable water quantity and quality conditions as stipulated in the **Reserve Template**

Water allocation process (compulsory licensing): This is a process where all existing and new water users are requested to reapply for their licenses, particularly in stressed catchments where there is an over-allocation of water or an inequitable distribution of entitlements.

Ecoregions are geographic regions that have been delineated in a top-down manner on the basis of physical/abiotic factors. • NOTE: For purposes of the classification system, the 'Level I Ecoregions' for South Africa, Lesotho and Swaziland (Kleynhans *et al.* 2005), which have been specifically developed by the Department of Water Affairs & Forestry (DWAF) for rivers but are used for the management of inland aquatic ecosystems more generally, are applied at Level 2A of the classification system. These Ecoregions are based on physiography, climate, geology, soils and potential natural vegetation.

8.2 Wetland definition

Although the National Wetland Classification System (NWCS) (Ollis *et al.*, 2013) is used to classify wetland types it is still necessary to understand the definition of a wetland. Terminology currently strives to characterise a wetland not only on its structure (visible form), but also to relate this to the function and value of any given wetland.

The Ramsar Convention definition of a wetland is widely accepted as "areas of marsh, fen, peatland or water, whether natural or artificial, permanent or temporary, with water that is static or flowing, fresh, brackish or salt, including areas of marine water the depth of which at low tide does not exceed six metres" (Davis 1994). South Africa is a signatory to the Ramsar Convention and therefore its extremely broad definition of wetlands has been adopted for the proposed NWCS, with a few modifications.

Whereas the Ramsar Convention included marine water to a depth of six metres, the definition used for the NWCS extends to a depth of ten metres at low tide, as this is recognised as the seaward boundary of the shallow photic zone (Lombard et al., 2005). An additional minor adaptation of the definition is the removal of the term 'fen' as fens are considered a type of peatland. The adapted definition for the NWCS is, therefore, as follows (Ollis *et al.*, 2013):

WETLAND: an area of marsh, peatland or water, whether natural or artificial, permanent or temporary, with water that is static or flowing, fresh, brackish or salt, including areas of marine water the depth of which at low tide does not exceed ten metres.

This definition encompasses all ecosystems characterised by the permanent or periodic presence of water other than marine waters deeper than ten metres. The only legislated definition of wetlands in South Africa, however, is contained within the National Water Act (Act No. 36 of 1998) (NWA), where wetlands are defined as "land which is transitional between terrestrial and aquatic systems, where the water table is usually at, or near the surface, or the land is periodically covered with shallow water and which land in normal circumstances supports, or would support, vegetation adapted to life in saturated soil." This definition is consistent with more precise working definitions of wetlands and therefore includes only a subset of ecosystems encapsulated in the Ramsar definition. It should be noted that the NWA definition is not concerned with marine systems and clearly distinguishes wetlands from estuaries, classifying the latter as a watercourse (Ollis *et al.*, 2013). Table 1 below provides a comparison of the various wetlands included within the main sources of wetland definitions used in South Africa. Although a subset of Ramsar-defined wetlands was used as a starting point for the compilation of the first version of the National Wetland Inventory (i.e. "wetlands", as defined by the NWA, together with open waterbodies), it is understood that subsequent versions of the Inventory include the full suite of Ramsar-defined wetlands in order to ensure that South Africa meets its wetland inventory obligations as a signatory to the Convention (Ollis *et al.*, 2013).

Wetlands must therefore have one or more of the following attributes to meet the above definition (DWAF, 2005):

- A high-water table that results in the saturation at or near the surface, leading to anaerobic conditions developing in the top 50 cm of the soil.
- Wetland or hydromorphic soils that display characteristics resulting from prolonged saturation, i.e. mottling or grey soils

SiVEST Environmental Aquatic Impact Assessment Version No. 1

Date: 20 August 2022

• The presence of, at least occasionally, hydrophilic plants, i.e. hydrophytes (water loving plants).

It should be noted that riparian systems that are not permanently or periodically inundated are not considered true wetlands, i.e. those associated with the drainage lines and rivers.

Table 2: Comparison of ecosystems considered to be 'wetlands' as defined by the proposed NWCS, the NWA and ecosystems included in DWAF's (2005) delineation manual.

Ecosystem	NWCS "wetland"	National Water Act wetland	DWAF (2005) delineation manual
Marine	YES	NO	NO
Estuarine	YES	NO	NO
Waterbodies deeper than 2 m (i.e. limnetic habitats often described as lakes or dams)	YES	NO	NO
Rivers, channels and canals	YES	NO ¹	NO
Inland aquatic ecosystems that are not river channels and are less than 2 m deep	YES	YES	YES
Riparian ² areas that are permanently / periodically inundated or saturated with water within 50 cm of the surface	YES	YES	YES ³
Riparian ³ areas that are not permanently / periodically inundated or saturated with water within 50 cm of the surface	NO	NO	YES ³

¹ Although river channels and canals would generally not be regarded as wetlands in terms of the National Water Act, they are included as a 'watercourse' in terms of the Act

8.3 National Wetland Classification System method

Due to the nature of the wetlands and watercourses observed, it was determined that the newly accepted NWCS should be adopted. This classification approach has integrated aspects of the HGM approach used in the WET-Health system as well as the widely accepted eco-classification approach used for rivers.

The NWCS (Ollis *et al.*, 2013) as stated previously, uses hydrological and geomorphological traits to distinguish the primary wetland units, i.e. direct factors that influence wetland function. Other wetland assessment techniques, such as the DWAF (2005) delineation method, only infer wetland function based on abiotic and biotic descriptors (size, soils & vegetation) stemming from the Cowardin approach (Ollis *et al.*, 2013).

SiVEST Environmental Prepared by: EnviroSci (Pty) Ltd Aquatic Impact Assessment

Version No.

² According to the National Water Act and Ramsar, riparian areas are those areas that are saturated or flooded for prolonged periods and would be considered riparian wetlands, as opposed to non –wetland riparian areas that are only periodically inundated and the riparian vegetation persists due to having deep root systems drawing on water many meters below the surface.

³ The delineation of 'riparian areas' (including both wetland and non-wetland components) is treated separately to the delineation of wetlands in DWAF's (2005) delineation manual.

The classification system used in this study is thus based on Ollis et al. (2013) and is summarised below:

The NWCS has a six-tiered hierarchical structure, with four spatially nested primary levels of classification (Figure 2). The hierarchical system firstly distinguishes between Marine, Estuarine and Inland ecosystems (**Level 1**), based on the degree of connectivity the particular system has with the open ocean (greater than 10 m in depth). Level 2 then categorises the regional wetland setting using a combination of biophysical attributes at the landscape level, which operate at a broad bioregional scale.

This is opposed to specific attributes such as soils and vegetation. Level 2 has adopted the following systems:

- Inshore bioregions (marine)
- Biogeographic zones (estuaries)
- Ecoregions (Inland)

Level 3 of the NWCS assess the topographical position of inland wetlands as this factor broadly defines certain hydrological characteristics of the inland systems. Four landscape units based on topographical position are used in distinguishing between Inland systems at this level. No subsystems are recognised for Marine systems, but estuaries are grouped according to their periodicity of connection with the marine environment, as this would affect the biotic characteristics of the estuary.

Level 4 classifies the hydrogeomorphic (HGM) units discussed earlier. The HGM units are defined as follows:

- Landform shape and localised setting of wetland
- Hydrological characteristics nature of water movement into, through and out of the wetland
- Hydrodynamics the direction and strength of flow through the wetland

These factors characterise the geomorphological processes within the wetland, such as erosion and deposition, as well as the biogeochemical processes.

Level 5 of the assessment pertains to the classification of the tidal regime within the marine and estuarine environments, while the hydrological and inundation depth classes are determined for inland wetlands. Classes are based on frequency and depth of inundation, which are used to determine the functional unit of the wetlands and are considered secondary discriminators within the NWCS.

Level 6 uses six descriptors to characterise the wetland types based on biophysical features. As with Level 5, these are non-hierarchal in relation to each other and are applied in any order, dependent on the availability of information. The descriptors include:

- Geology;
- Natural vs. Artificial;
- Vegetation cover type;
- Substratum;
- Salinity; and
- · Acidity or Alkalinity

It should be noted that where sub-categories exist within the above descriptors, hierarchical systems are employed, and these are thus nested in relation to each other.

The HGM unit (Level 4) is the focal point of the NWCS, with the upper levels (Figure 3 Figure – Inland systems only) providing means to classify the broad bio-geographical context for grouping functional wetland units at the HGM level, while the lower levels provide more descriptive detail on the particular wetland type characteristics of a particular HGM unit. Therefore Level 1 – 5 deals with functional aspects, while Level 6 classifies wetlands on structural aspects.

SiVEST Environmental Prepared by: EnviroSci (Pty) Ltd

Page 13

Aquatic Impact Assessment Version No. 1

Date: 20 August 2022

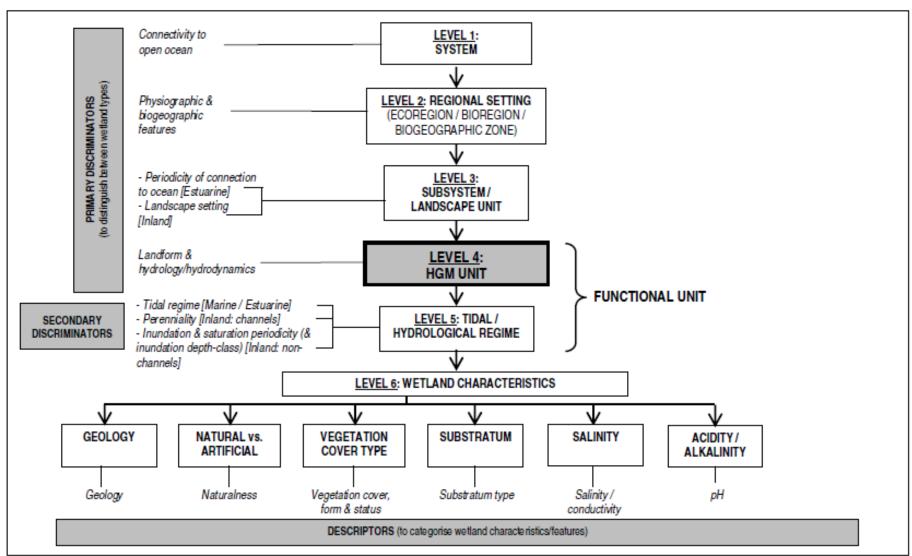


Figure 2: Basic structure of the NWCS, showing how 'primary discriminators' are applied up to Level 4 to classify Hydrogeomorphic (HGM) Units, with 'secondary discriminators' applied at Level 5 to classify the tidal/hydrological regime, and 'descriptors' applied

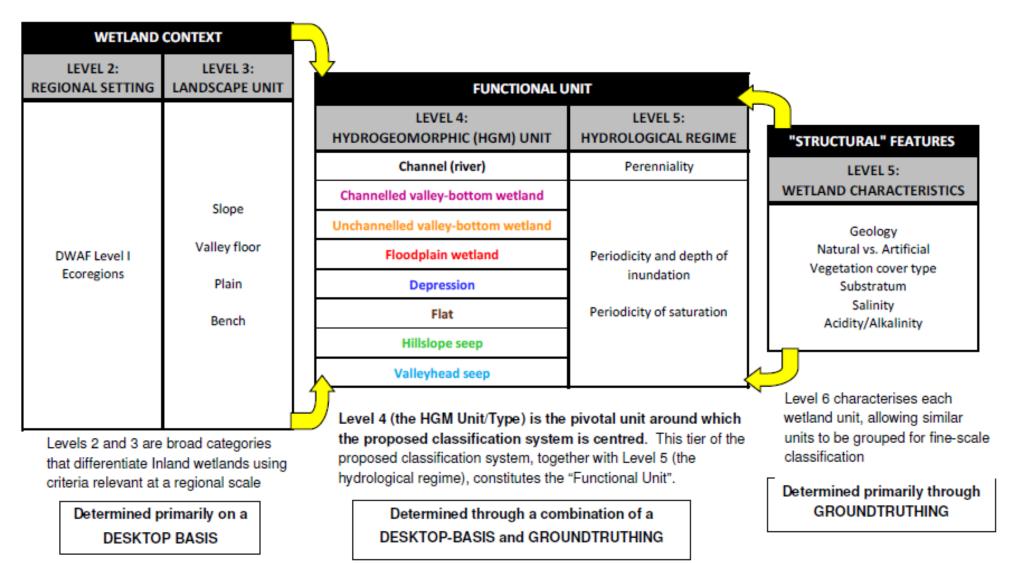


Figure 3: Illustration of the conceptual relationship of HGM Units (at Level 4) with higher and lower levels (relative sizes of the boxes show the increasing spatial resolution and level of detail from the higher to the lower levels) for Inland Systems (from Ollis et al., 2013)

Prepared by: EnviroSci (Pty) Ltd

8.4 Waterbody condition

To assess the PES or condition of the observed wetlands, a modified Wetland Index of Habitat Integrity (DWAF, 2007) was used. The Wetland Index of Habitat Integrity (WETLAND-IHI) is a tool developed for use in the National Aquatic Ecosystem Health Monitoring Programme (NAEHMP), formerly known as the River Health Programme (RHP). The output scores from the WETLAND-IHI model are presented in the standard DWAF A-F ecological categories (Table) and provide a score of the PES of the habitat integrity of the wetland system being examined. The author has included additional criteria into the model-based system to include additional wetland types. This system is preferred when compared to systems such as WET-Health – wetland management series (WRC 2009), as WET-Health (Level 1) was developed with wetland rehabilitation in mind and is not always suitable for impact assessments. This coupled with the degraded state of the wetlands in the study area, indicated that a complex study approach was not warranted, i.e. conduct a Wet-Health Level 2 and WET-Ecosystems Services study required for an impact assessment.

Table 3: Description of A - F ecological categories based on Kleynhans et al., (2005)

ECOLOGICAL CATEGORY	ECOLOGICAL DESCRIPTION	MANAGEMENT PERSPECTIVE	
A	Unmodified, natural.	Protected systems; relatively untouched by human hands; no discharges or impoundments allowed	
В	Largely natural with few modifications. A small change in natural habitats and biota may have taken place but the ecosystem functions are essentially unchanged.	Some human-related disturbance, but mostly of low impact potential	
С	Moderately modified. Loss and change of natural habitat and biota have occurred, but the basic ecosystem functions are still predominantly unchanged.	Multiple disturbances associated with need for socio-economic development, e.g. impoundment, habitat modification and water quality degradation	
D	Largely modified. A large loss of natural habitat, biota and basic ecosystem functions has occurred.		
Е	Seriously modified. The loss of natural habitat, biota and basic ecosystem functions is extensive.	Often characterized by high human densities or extensive resource exploitation. Management intervention is needed to improve health, e.g. to restore flow patterns, river habitats or water quality	
F	Critically / Extremely modified. Modifications have reached a critical level and the system has been modified completely with an almost complete loss of natural habitat and biota. In the worst instances the basic ecosystem functions have been destroyed and the changes are irreversible.		

The WETLAND-IHI model is composed of four modules. The "Hydrology", "Geomorphology" and "Water Quality" modules all assess the contemporary driving processes behind wetland formation and maintenance. The last module, "Vegetation Alteration", provides an indication of the intensity of human land use activities on the wetland surface itself and how these may have modified the condition of the wetland. The integration of the scores from these 4 modules provides an overall PES score for the wetland system being examined. The WETLAND-IHI model is an MS Excel-based model, and the data required for the assessment are generated during a site visit.

Additional data may be obtained from remotely sensed imagery (aerial photos; maps and/or satellite imagery) to assist with the assessment. The interface of the WETLAND-IHI has been developed in a format which is similar to DWA's River EcoStatus models which are currently used for the assessment of PES in riverine environments.

8.5 Aquatic ecosystem importance and function

South Africa is a Contracting Party to the Ramsar Convention on Wetlands, signed in Ramsar, Iran, in 1971, and has thus committed itself to this intergovernmental treaty, which provides the framework for the national protection of wetlands and the resources they could provide. Wetland conservation is now driven by the South African National Biodiversity Institute, a requirement under the National Environmental Management: Biodiversity Act (No 10 of 2004).

Wetlands are among the most valuable and productive ecosystems on earth, providing important opportunities for sustainable development (Davies and Day, 1998). However, wetlands in South Africa are still rapidly being lost or degraded through direct human induced pressures (Nel et al., 2004).

Prepared by: EnviroSci (Pty) Ltd

SiVEST Environmental Aquatic Impact Assessment Version No. 1

The most common attributes or goods and services provided by wetlands include:

- Improve water quality;
- Impede flow and reduce the occurrence of floods;
- Reeds and sedges used in construction and traditional crafts;
- Bulbs and tubers, a source of food and natural medicine;
- Store water and maintain base flow of rivers;
- Trap sediments; and
- Reduce the number of water-borne diseases.

In terms of this study, the wetlands provide ecological (environmental) value to the area acting as refugia for various wetland associated plants, butterflies and birds.

In the past wetland conservation has focused on biodiversity as a means of substantiating the protection of wetland habitat. However not all wetlands provide such motivation for their protection, thus wetland managers and conservationists began assessing the importance of wetland function within an ecosystem.

Table below summarises the importance of wetland function when related to ecosystem services or ecoservices (Kotze *et al.*, 2008). One such example is emergent reed bed wetlands that function as transformers converting inorganic nutrients into organic compounds (Mitsch and Gosselink, 2000).

Table 4: Summary of direct and indirect ecoservices provided by wetlands from Kotze et al., 2008

		Indirect benefits Hydro-geochemical benefits https://doi.org/10.2006	Flood attenuation		
			Stream flow regulation		
			Water quality enhancement benefits	Sediment trapping	
				Phosphate assimilation	
supplied by wetlands				Nitrate assimilation	
	lits			Toxicant assimilation	
Wef	ene			Erosion control	
d by	ect b		Carbon storage		
plie	Biodiversity	maintenance			
dns		Provision of water for human use			
ces		Provision of harvestable resources ²			
Ecosystem services	হ	Provision of cultivated foods			
	Cultural sign Tourism and Education a	Cultural sign	Cultural significance		
		Tourism and	urism and recreation		
		and research			

Conservation importance of the individual wetlands was based on the following criteria:

Habitat uniqueness;

Version No.

- Species of conservation concern;
- Habitat fragmentation or rather, continuity or intactness with regards to ecological corridors; and
- Ecosystem service (social and ecological).

The presence of any or a combination of the above criteria would result in a HIGH conservation rating if the wetland was found in a near natural state (high PES). Should any of the habitats be found modified the conservation importance would rate as MEDIUM, unless a Species of Conservation Concern (SCC) was observed, in which case it would receive a HIGH rating. Any system that was highly modified (low PES) or had none of the above criteria, received a LOW conservation importance rating. Wetlands with HIGH and MEDIUM ratings should thus be excluded from development with incorporation into a suitable open space system, with the maximum possible buffer being applied. Natural wetlands or Wetlands that resemble some form of the past landscape but receive a LOW conservation importance rating could be included into stormwater management features and should not be developed to retain the function of any ecological corridors.

SiVEST Environmental Prepared by: EnviroSci (Pty) Ltd
Aquatic Impact Assessment

Date: 20 August 2022