

# Stormwater, Wastewater and Erosion Management Plan for Doornhoek 2

Doornhoek 2 - SWMP, Klerksdorp, South Africa  
Doornhoek 2



SRK Consulting (South Africa) (Pty) Ltd.

■ 585738

■ April

2022

# Stormwater, Wastewater and Erosion Management Plan for Doornhoek 2

Doornhoek 2 - SWMP, Klerksdorp, South Africa

## Prepared for:

Doornhoek PV (Pty) Ltd  
101, 1st Floor, West Quay Building  
Cape Town, Western Province, 8000  
South Africa

## Prepared by:

183 Main Road, Administrative Building, Albion  
Springs  
Rondebosch  
Cape Town, WC, South Africa, 7700

PostNet Suite 206, Private Bag X18  
Rondebosch  
Cape Town, WC, South Africa, 7701

+27 21 659 3060  
www.srk.com

Reg. No. 1995.012890.07



**Lead Author:** D.Barends/X.Adams **Mnemonic:** INBAR/ADAX

**Reviewer:** B.Engelsman **Mnemonic:** ENGE

## File Name:

585738\_Doornhoek 2 (Pty) Ltd - SWMP\_Report(Final)\_Rev1\_25\_04\_2022

## Suggested Citation:

SRK Consulting (South Africa) (Pty) Ltd. 2022. Stormwater, Wastewater and Erosion Management Plan for Doornhoek 2. Prepared for Doornhoek 2: Cape Town, Western Province. Project number: 585738. Issued April 2022.

## Cover Image(s):

Picture of the Doornhoek 2 site taken by T.Netshitangani during site visit.

## Copyright © 2022

SRK Consulting (South Africa) (Pty) Ltd. ■ 585738 ■ April 2022



## Acknowledgments

Contributor: X.Adams, *Pr. Eng*

Contributor D.Barends *BSc Eng*

Contributor: T.Netshitangani *Pr.Sci.Nat*

## Disclaimer

SRK Consulting (South Africa) (Pty) Ltd has prepared this document for Doornhoek PV (Pty) Ltd, our client. Any use or decisions by which a third party makes of this document are the responsibility of such third parties. In no circumstance does SRK accept any consequential liability arising from commercial decisions or actions resulting from the use of this report by a third party.

The opinions expressed in this document have been based on the information available to SRK at the time of preparation. SRK has exercised all due care in reviewing information supplied by others for use on this project. While SRK has compared key supplied data with expected values, the accuracy of the results and conclusions from the review are entirely reliant on the accuracy and completeness of the supplied data. SRK does not accept responsibility for any errors or omissions in the supplied information, except to the extent that SRK was hired to verify the data.

# Contents

Executive Summary .....	iv
1 Introduction.....	1
1.1 Objectives and Scope of Report .....	1
1.1.1 Objectives .....	1
1.1.2 Scope.....	1
2 Supporting Information.....	3
2.1 Site and Project Information.....	3
2.1.1 Project Information.....	3
2.1.2 Site Visit.....	3
2.2 Legislation and guidelines.....	5
2.3 Natural conditions .....	5
2.3.1 Climate.....	5
2.3.2 Design Rainfall.....	5
2.4 Potential Stormwater, Wastewater and Erosion Impacts.....	6
3 Project Specific Objectives.....	7
4 Hydrology Study .....	8
4.1 Delineation of clean and dirty areas.....	8
4.2 Identification of road crossings.....	8
4.3 Delineation of catchments.....	8
4.4 Catchment Parameters .....	8
4.5 Storm Peaks.....	9
5 Conceptual Design Review .....	11
5.1 Waste and wastewater management.....	11
5.2 Channels, diversions and dissipaters .....	11
5.3 Road crossings .....	11
5.4 Erosion and sediment transport .....	12
5.5 Bunding .....	12
5.6 Monitoring and management .....	12
6 Stormwater, Wastewater and Erosion Management Plan .....	13
7 Conclusion and Recommendations .....	17
Signatures .....	18
References .....	19

## Tables

Table 1: Design Rainfall (mm) Data Interpolated for the site centroid.....	5
Table 2: Conceptual Catchment Characteristics .....	9
Table 3: Peak Flows for Conceptual Catchments in cubic metres per second .....	9
Table 4: Construction and Operations / Maintenance SWMP .....	13

## Figures

Figure 1: Doornhoek 2 Conceptual Site Layout .....	2
Figure 2: Photographs of the proposed Doornhoek 2.....	4

Figure 3: Conceptual Stormwater Catchments for the Proposed Development.....	10
Figure 4: Typical Conceptual Designs of Stormwater Infrastructure .....	16

## Executive Summary

Doornhoek PV (Pty) Ltd (The Client) propose developing a commercial solar Photo-Voltaic (PV) facility and associated infrastructure (known as the Doornhoek 2 PV Facility) on a site located approximately 11 km North of Klerksdorp in the North-West Province of South Africa.

This report documents the Stormwater, Wastewater and Erosion Management Plan (referred to as the SWMP) required for the proposed development. The SWMP aims to facilitate the protection of surface water resources and covers the total proposed project development area.

The proposed facility has no identifiable surface water resources. All the stormwater impacts that exist can be managed in a practical and cost-effective manner. The moderate to low rainfall and low gradients of the area suggest that the detailed design should not vary significantly from the management concepts presented in the report.

The SWMP was created considering the analysis findings as presented in this report, but should be developed further for detailed design by conducting a detailed topographic survey and developing the stormwater layout on the information available and infrastructure layout. The conceptual designs should be developed to detailed design, and the final plans should incorporate any environmental specifications during construction and operation of the facility.

SRK has exercised all due care in reviewing the supplied information. Whilst SRK has compared key supplied data with expected values, the accuracy of the results and conclusions from the review are entirely reliant on the accuracy and completeness of the supplied data. SRK does not accept responsibility for any errors or omissions in the supplied information and does not accept any consequential liability arising from commercial decisions or actions resulting from them.

Opinions presented in this report apply to the site conditions and features as they existed at the time of SRK's investigations, and those reasonably foreseeable. These opinions do not necessarily apply to conditions and features that may arise after the date of this Report, about which SRK had no prior knowledge nor had the opportunity to evaluate.

# 1 Introduction

SRK Consulting (South Africa) (Pty) Ltd was approached by Doornhoek PV (Pty) Ltd (the Client) to develop a Stormwater, Wastewater and Erosion Management Plan (referred to as the SWMP) for the proposed new development of a commercial solar Photo-Voltaic (PV) facility, known as the Doornhoek 2 PV facility. The proposed site is located approximately 11 km north of Klerksdorp in the North-West Province of South Africa.

## 1.1 Objectives and Scope of Report

### 1.1.1 Objectives

The objective of this report is to prepare a SWMP that strives to protect surface water resources, manages erosion risks and to comply with the relevant regulations and guidelines (listed in Section 2.2) for the construction and operation phases of the Doornhoek 2 facility.

### 1.1.2 Scope

This report covers the following scope:

- Delineation of the catchments draining through the development area;
- Determination of the type of catchment (clean or dirty area);
- Calculations of peak stormwater discharges from each catchment; and
- Recommendations for stormwater management and erosion protection during the design, construction and operation phases of the proposed project.

The SWMP is a conceptual study at this stage, and a detailed survey and SWMP study will need to be undertaken during the design of the required infrastructure.

The layout of the development area is shown in Figure 1.

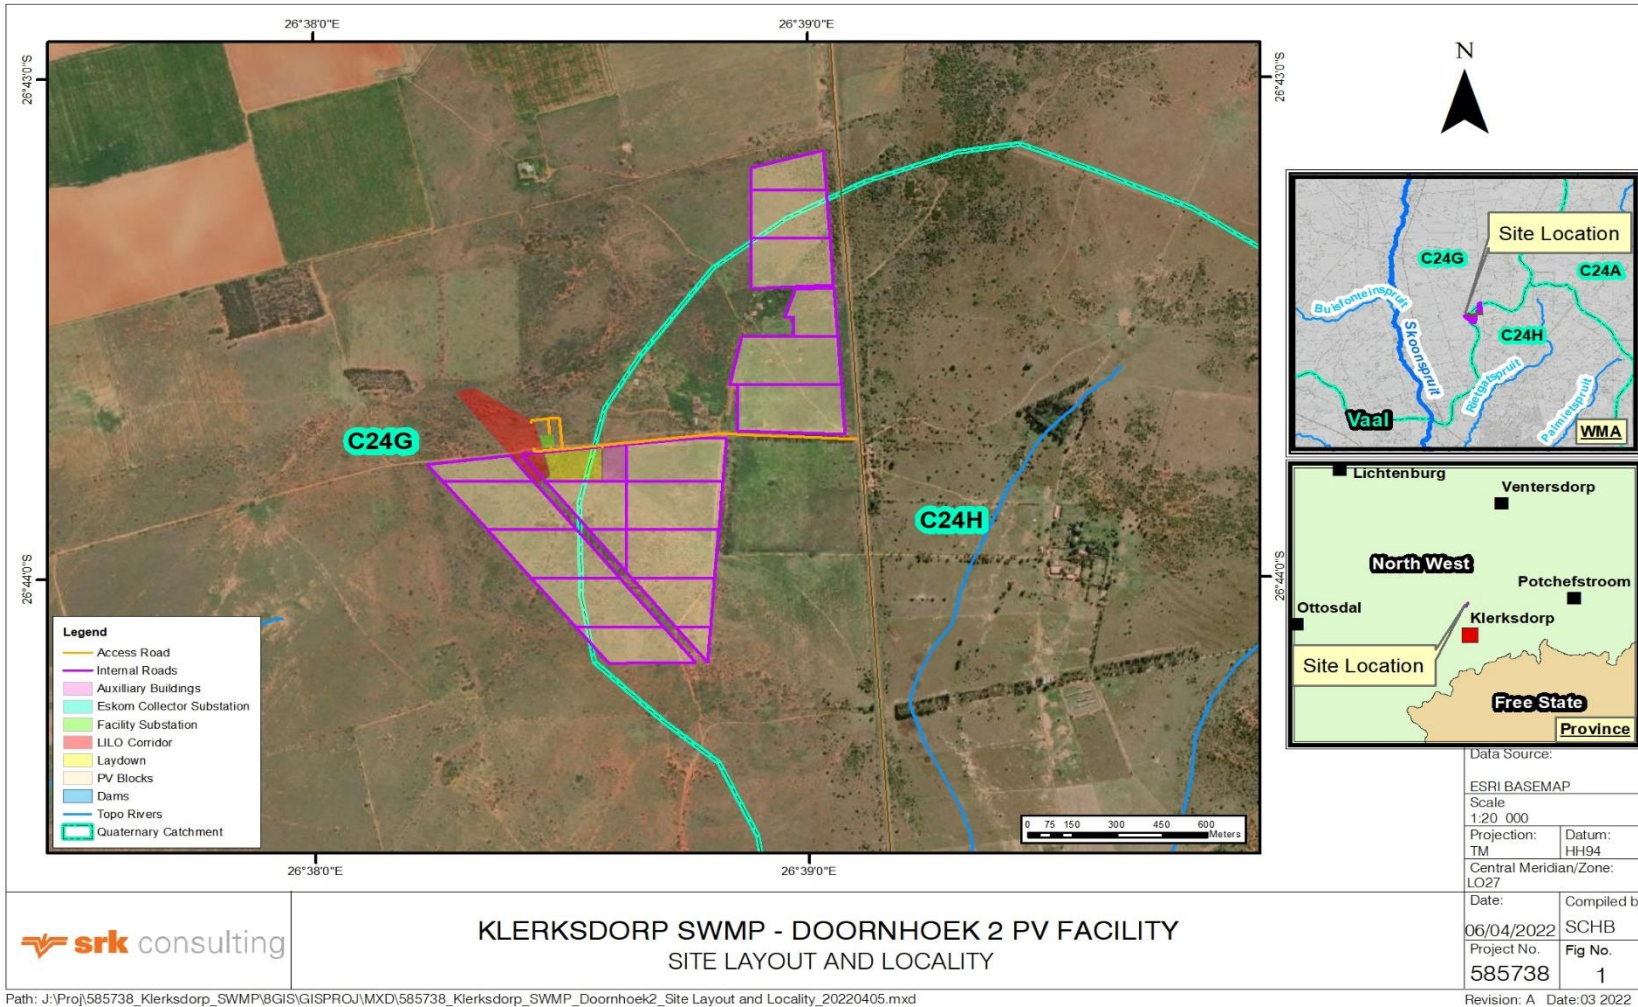


Figure 1: Doornhoek 2 Conceptual Site Layout



## 2 Supporting Information

This section summarises all of the available information and assumptions upon which the derivation of the SWMP is based. This is done to highlight how the plan was developed: by matching regulations and guidelines to the specific needs of the project in the local natural conditions on site. The available information is therefore key to understanding the SWMP.

### 2.1 Site and Project Information

The project description was provided by the client and the site information has been informed by a site visit undertaken on 4 April 2022.

#### 2.1.1 Project Information

The following information provided is relevant to stormwater management:

- Fixed-tilt or tracking solar PV panels;
- Operation and Maintenance (O&M) buildings, inclusive of permanent laydown area, toilet facilities connected to a conservancy tank for wastewater collection, workshop, warehouses and a chemical storage area;
- An electrical substation including transformers containing oil;
- On-site inverters and inverter transformers (containing oil) located between the panels to step up the power;
- Cabling between the project's components, to be laid underground where practical;
- Fencing around the development area;
- A Battery Energy Storage System (BESS). The BESS will be solid state and is therefore a non-liquid/solid-state battery technologies (e.g. Lithium ion)
- Access roads (up to 8m wide):
  - Existing roads will be used as access roads where possible; and
  - Existing roads will be extended to create access to the Doornhoek 2 facility where necessary.
- During construction, a temporary laydown area will be used;
- Small quantities of fuel and other motor oils will be stored on site and transferred into vehicles. These will be banded.
- General waste will only be stored temporarily and taken off site regularly for disposal to landfill.

#### 2.1.2 Site Visit

The site was visited by T.Netshitangani from SRK Consulting on 4 April 2022. The site terrain is gradual (very “flat” land with low angle slopes in colloquial terms). No erosion was observed in either vegetated areas, cleared areas or near roads.

The soils on the site were assessed visually and judged to have moderate permeability for the purposes of a stormwater management plan. The soils were not lab tested and the judgement erred on the conservative side so that no drains would be undersized. No natural or artificial drainage channels were observed on the site or noted on any maps. The vegetation is composed mainly of medium grass cover with light bush and farmlands on the site. A photograph from the site is shown in Figure 2.



**Figure 2: Photographs of the proposed Doornhoek 2**

## 2.2 Legislation and guidelines

SWMPs are generally required to support the Environmental Management Programme (EMPr) and Water Use License Applications. The following was taken into account in compiling the SWMP:

- Best Practice Guideline for Stormwater Management (Department Water Affairs and Forestry, 2006);
- Regulation 704 of the National Water Act (Department of Water Affairs and Forestry, 4 June 1999).

Municipal regulations/bylaws, which may introduce specific standards for each municipality, but still adhere to the overall principles of the regulations and guidelines above, should be considered during detailed design (if relevant).

## 2.3 Natural conditions

### 2.3.1 Climate

The development lies in an arid to semi-arid climatic region with a mean annual precipitation of 600 mm per year.

### 2.3.2 Design Rainfall

The rainfall analysis was based on the “Design Rainfall Estimation in South Africa” (DRE) program developed by JC Smithers and RE Schulze (Smithers & Schulze, 2002). The program implements procedures from the Water Research Commission (WRC) project entitled “Rainfall Statistics for Design Flood Estimation in South Africa” (WRC Project K5/1060).

The rainfall data is interpolated for a point within the site from nearby rainfall stations (Smithers and Schulze - Design Rainfall in South Africa). The rainfall station closest to the development area is Doornfontein (0436248\_W), which is approximately 12.7 km from the site. Table 1 indicates the relevant design rainfall for the site.

Table 1: Design Rainfall (mm) Data Interpolated for the site centroid.

Design Rainfall Data (mm) interpolated from the six closest stations							
Mean annual rainfall	592	mm	Latitude	26	degrees	44	minutes
Altitude	1395	mamsl	Longitude	26	degrees	38	minutes
<b>Storm duration</b>	<b>Return Period (Years)</b>						
	<b>2</b>	<b>5</b>	<b>10</b>	<b>20</b>	<b>50</b>	<b>100</b>	<b>200</b>
5 minutes	9.2	12.5	14.8	17.1	20.1	22.4	24.8
15 minutes	17.3	23.5	27.8	32	37.6	41.9	46.4
1 hour	27.7	37.7	44.5	51.3	60.3	67.2	74.3
1.5 hour	31.8	43.2	51.1	58.9	69.2	77.2	85.3
2 hours	35	47.7	56.3	64.9	76.3	85.1	94.1
8 hours	47.6	64.8	76.6	88.3	103.8	115.8	128
24 hours	60.8	82.8	97.8	112.7	132.4	147.7	163.3
5 day	80.9	110.1	130.1	150	176.2	196.6	217.4

## 2.4 Potential Stormwater, Wastewater and Erosion Impacts

An overall analysis of the available data and the development plans reveals the following related to potential impacts:

- The facility presents a very low risk to adversely impacting surface water resources because:
  - Apart from minor bush clearing and trampling, and limited vegetation clearance and topsoil scraping to construct the Doornhoek 2 and associated infrastructure, the development will leave the natural vegetation, soil conditions and topography largely undisturbed;
  - The roads have been well placed, as they lie completely outside of the natural water flowpaths;
  - No natural or artificial drainage channels were observed on the site or noted on any of the maps;
  - Sewage and landfill waste will be disposed of off site;
  - Rainfall in the area is moderate to low, and no steep slopes exist to generate high flow velocities.
- Some potential impacts do exist, including:
  - Possible contamination of stormwater by:
    - Sediment that is collected in runoff due to the ground disturbance;
    - Oil leaks from the transformers;
    - Oil and lubricants in wash down water from the workshop; and
    - Overflow of wastewater from the conservancy tanks.
  - Potential erosion: Where any stormwater drain concentrated discharges onto the natural land surface; and
  - Potential usually exists in such developments to impede and disrupt flow and to cause damage to infrastructure and exacerbate erosion if infrastructure is placed within areas that are inundated in floods. However, this site has no water courses within its boundaries and there is no anticipation of infrastructure being inundated by floods.

### 3 Project Specific Objectives

The project specific objectives were developed based on the site specific characteristics, regulations and guidelines mentioned in Section 2.2, and are as follows:

- Dirty water should not spill into clean water systems more than once in a 50-year return period;
- Collect and treat any dirty water before discharge;
- Do not impede surface or subsurface water flows unless unavoidable;
- Minimize the potential for erosion in large storm events >1:50-year flood events;
- Include a monitoring and inspection system for spills, leaks and erosion and commit to remediating where needed;
- Review and improve the SWMP regularly;
- Do not build infrastructure, in particular infrastructure containing potential pollutants, within 300 m of natural drainage lines.

## 4 Hydrology Study

The first step in the SWMP development is an analysis of the development area and the proposed facility. The analysis found that the proposed facility is likely to have an intrinsically low impact on the surface water resources (see Section 2.4).

### 4.1 Delineation of clean and dirty areas

The development area is divided into clean and dirty areas as follows:

- Dirty areas:
  - The workshop where oils and lubricants may be stored and used
  - A chemical storage area will be constructed for the operational phase of the project, which will include proper containment and bunding for all chemicals stored on site;
  - The medium-voltage transformers (at the inverter stations) placed around the development area, as these will contain oil;
  - Transformers at the substation, as these will contain oil;
  - The conservancy tanks, as this will contain sewage; and,
  - Vehicle wash bay that has a hardstanding surface on which vehicles are washed, generating dirty water which drains to a sump.
- Clean areas are deemed to be all areas on the site outside of those stated above as dirty areas.

### 4.2 Identification of road crossings

No potential roads crossing watercourses were identified for all the roads that will be upgraded or built as part of the project. However, if changes are made to the road layout at the detailed design stage, potential road crossings will have to be re-assessed.

### 4.3 Delineation of catchments

In order to delineate the catchments, a Digital Terrain Model (DTM) was created in order to use GIS techniques to determine these delineations and characterisation of the various catchments. No detailed survey information was available at the time of the study, so 20 metre and 5 metre contours (where available) were sourced from [ngi.gov.za](http://ngi.gov.za) and compared to elevation data on Google Earth.

The catchments draining from the site were delineated. The outlet of the catchment was taken as the closest likely discharge point or closest mapped water course.

The catchments are as shown in Figure 3 below. Catchment A, will drain in a southerly direction while Catchments B,C and D will drain in a westerly direction from the site towards tributaries of Hartsrivier. Consequently, the stormwater from the site could drain south-westerly towards the Hartsrivier.

### 4.4 Catchment Parameters

The slope of a catchment is a very important characteristic in the determination of flood peaks. Steep slopes cause faster runoff shorten the critical duration of flood inducing storms, thus leading to higher rainfall intensities in the runoff formulae. On steep slopes, the vegetation is generally less dense, soil layers are shallower, and there are fewer depressions, all of which cause water to run off more rapidly. The result is that infiltration is reduced, and flood peaks are consequently elevated. For flat catchments such as those encountered on this site, the opposite holds true.

Land use is another critical characteristic as it alters the vegetation present and the degree of soil compaction. Compacted soil is less permeable, and vegetation can slow down stormflows over the land surface. Lastly, the soil type can also be important with some soils allowing quicker infiltration of water. These contribute to the estimation of volume of water stored, infiltrated and ultimately resulting in runoff for each catchment.

The development area is characterised by flat slopes and moderately permeable soils/rock. The average slope and other critical parameters for the catchments under consideration are presented in Table 2.

**Table 2: Conceptual Catchment Characteristics**

Catchment	Catchment Slope (%)	Catchment Area (km <sup>2</sup> )	Permeability (Visual assessment, not lab tested)	Flow type	Vegetation
Catchment A	1.9	10.5	Permeable to Semi-Permeable	Channel Flow	Grasslands, Light Bush and farmlands
Catchment B	1.1	33.1	Permeable to Semi-Permeable	Channel Flow	Grasslands, Light Bush and farmlands
Catchment C	1.7	4.9	Permeable to Semi-Permeable	Channel Flow	Grasslands, Light Bush and farmlands
Catchment D	2.3	5.9	Permeable to Semi-Permeable	Channel Flow	Grasslands, Light Bush and farmlands

## 4.5 Storm Peaks

The hydrological and hydraulic parameters of all the catchments contributing towards the study area were calculated and the overland peak flow rates were determined in the study area. The Rational Method model was used to estimate peak flow rates based on the catchment parameters and rainfall intensity.


Storm peaks were calculated for the catchments shown in Figure 3, and peak flows generated within each sub-catchment are considered conceptual due to lack of detailed contour data (topographical survey data).

The peaks are relevant to both pre-development and post-development scenarios, because the vegetation, topography and soil conditions will largely remain the same, except where the main buildings (O&M building, stores, etc.) are placed, and this accounts for a negligible proportion of the development area from a surface area viewpoint.

Note that wash water was not considered in the storm peaks, because solar panel washing is unlikely to be done in the rainy season, and volumes will be negligible in comparison to storm volumes. The implications of the storm peaks calculated, and their impact on the SWMP, are discussed in Section 5.

**Table 3: Peak Flows for Conceptual Catchments in cubic metres per second**

Catchment	2 Year	5 Year	10 Year	20 Year	50 Year	100 Year
Catchment A	14.1	20.4	25.6	31.2	38.8	45.5
Catchment B	30.0	43.7	54.8	66.9	83.0	97.4
Catchment C	7.4	10.7	13.4	16.4	20.3	23.9
Catchment D	8.4	12.2	15.4	18.7	23.3	27.3

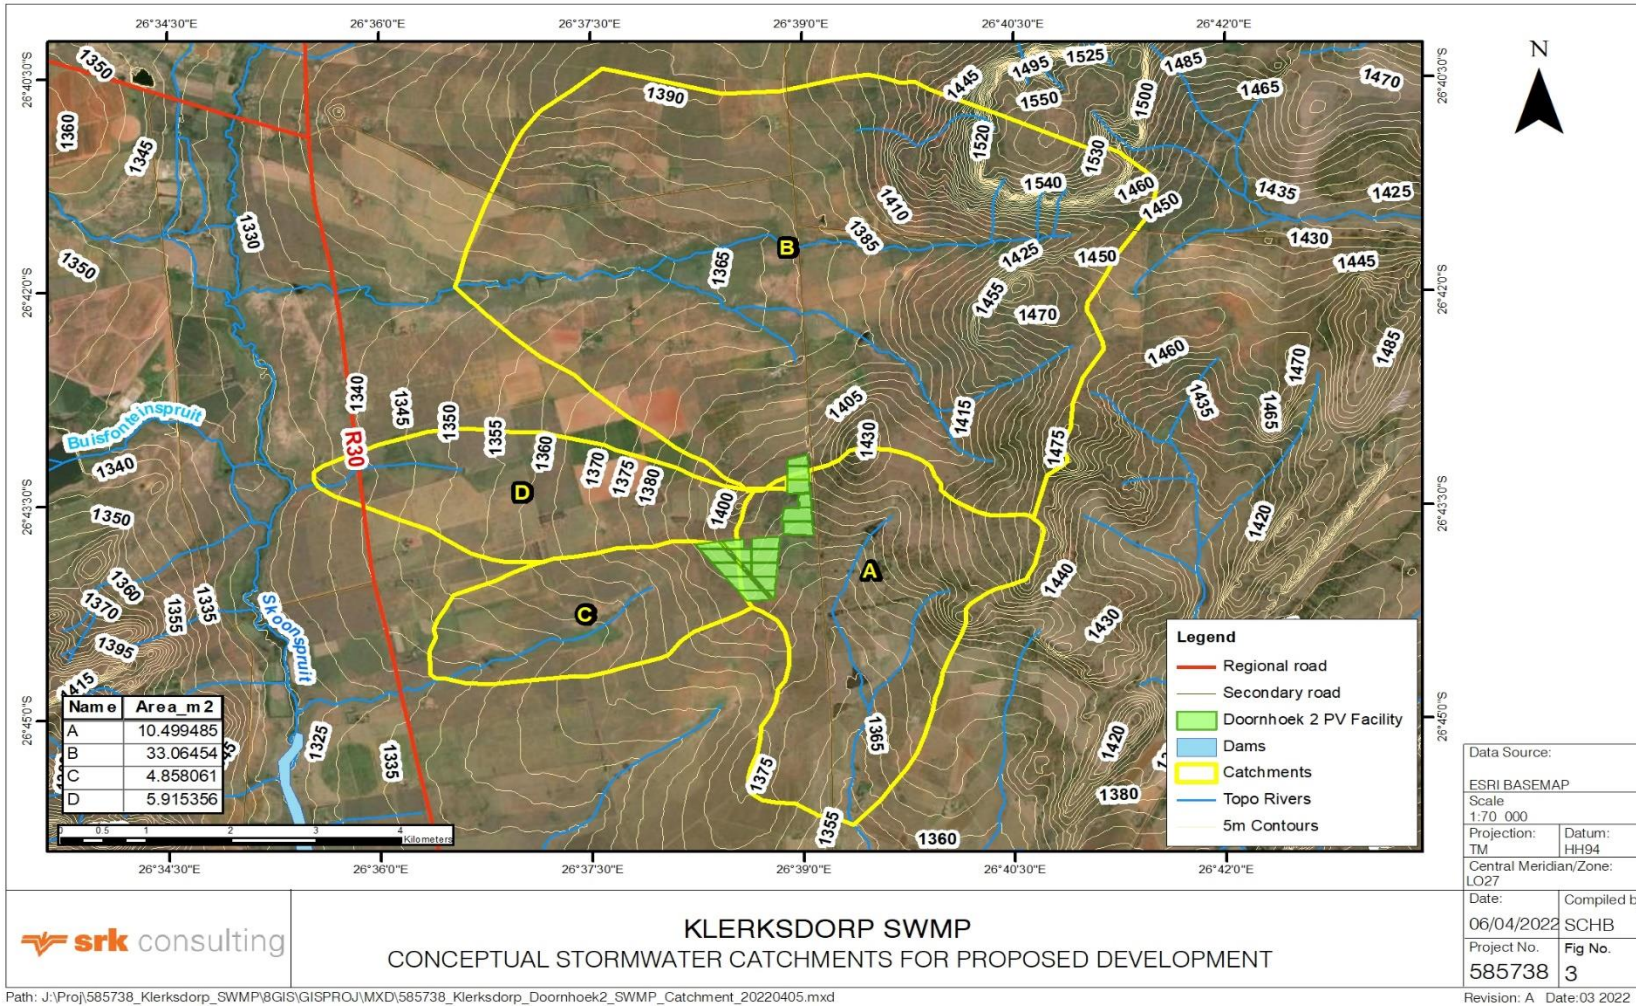

**Figure 3: Conceptual Stormwater Catchments for the Proposed Development**



## 5 Conceptual Design Review

This section provides detail on why management approaches were selected, any alternatives that should be considered, and further steps required to confirm or improve the conceptual plan.

### 5.1 Waste and wastewater management

Waste will be disposed of at a registered landfill site and domestic wastewater at a licensed wastewater treatment plant (i.e. waste will be treated off site), hence, the SWMP only focuses on temporary storage on site.

Domestic waste should be stored out of the rain and wind, collected (and disposed of) regularly as is currently proposed for the development.

The conceptual design of the wastewater (sewage) conservancy tank was not within the scope of this report, however, the current conceptual plan was evaluated in terms of the risks that this may pose to surface water. Poor management of the tank is the main risk, because the system could fail if the tank is not emptied regularly resulting in overflows. Consequently, a float switch controlled alert system is recommended.

Oil and lubricants in the workshop, and oil from the transformers must be banded (See Section 5.5 for banding requirements) as per legal requirements and hence, this was recommended without any alternatives.

### 5.2 Channels, diversions and dissipaters

It is standard practice to place channels on the upgradient side of roads to control erosion. However, in this case, channels are not recommended as the terrain is extremely flat and channels will only lead to an unnecessary concentration of flow. This is further supported by the fact that no erosion was noted on or near the existing roads and none of these roads included channels adjacent to them.

Channels should be included to divert clean water around any dirty areas unless these are already banded.

Solar panel areas are not considered dirty, and it is not recommended that runoff from upstream catchments be diverted around these solar panel areas.

For the few places where diversions are recommended (non-banded dirty areas), high-level conceptual designs were developed (i.e. typical drain and dissipater types). These were based on the following preliminary conclusions:

- Peak flows for the stormwater catchments are low;
- The area is under 2.3% grade, and it is possible to design earth or gravel drains rather than concrete drains, because low erosion potential exists at these low flow gradients; and
- Even though low velocity flows will be a feature in the drains, dissipaters are recommended at any outlets to control the transition of water from concentrated channel flow to overland dispersed flow or in-river flow – in addition, it is possible that outlets (e.g. adjacent to road/river crossings) could be locally steep.

Typical generic conceptual designs, based on the above discussions, were compiled as shown in Figure 4.

### 5.3 Road crossings

No potential road crossings were identified however, if changes are made to the road layout at the detailed design stage and road crossings are required, the typical conceptual design in Figure 4 is recommended.

## 5.4 Erosion and sediment transport

In general, the main erosion risks on a solar facility are channel outlets (Section 5.1), roads, road crossings (Section 5.3) and stockpiles. However, based on the site visit, erosion on roads is excluded as a risk as this is unlikely as long as the roads have no significant camber.

No road crossings exist and thus no opportunities for erosion and sediment transport currently exist.

In the case of stockpiles, temporary stockpiles should have diversion berms or silt fences. One permanent stockpile is planned for the topsoil that is to be used in decommissioning of the facility. This stockpile will be placed within the perimeter fence of the facility. The stockpile, if possible, should have gentle slopes of 1 in 5 or less to encourage revegetation and limit erosion. The stockpile should be bunded until it revegetates. The gentler slopes will necessitate a stockpile with a larger surface area. This is considered the lower impact option as it limits erosion even though it disturbs more surface area.

Material excavated during construction of the panel foundations may be significant (cumulative volume). If that is the case, the material should be removed from site responsibly (e.g. use as cover material on a landfill site).

## 5.5 Bunding

Requirements for bunding of areas housing potential contaminants are specified in detail in the National Norms and Standards for the Storage of Waste (Notice 926 of 29 November 2013, Department of Environmental Affairs, National Environmental Management: Waste Act 2008, Act No.29 of 2008). The specification, which will apply to the development area, reads as follows: “*bunds having a capacity which can contain at least 110% of the maximum contents of the waste storage facility. Where more than one container or tank is stored, the bund must be capable of storing at least 110% of the largest tank or 25% of the total storage capacity, whichever is greater (in the case of drums the tray or bund size must be at least 25% of total storage capacity).*”

Bunded areas should be sized and sealed to ensure spilled contaminants cannot leak out of the bunded areas.

## 5.6 Monitoring and management

Monitoring and management are key to the success of a SWMP. The following are therefore included as a key aspect of SWMP:

- Frequent inspections until the success of the design and any unexpected problems are resolved / confirmed and maintenance frequency is determined;
- Review of the plan after a few years to improve, where possible, its practicality, cost-effectiveness or efficacy;
- Alerts that do not rely on a full-time environmental manager on site (which may not be feasible) including:
  - Automatic alert systems for the wastewater conservancy tank (e.g. a float driven switch alert system);
  - Brief, annual refresher training on stormwater protection that should not take more than fifteen minutes for each staff member; and
  - Well placed signs that remind staff members of reporting of incident / issues, as soon as possible and reduce the likelihood that forgetfulness or confusion will prevent reporting.

## 6 Stormwater, Wastewater and Erosion Management Plan


The SWMP, including wastewater management, is summarised in Table 4 and Figure 4.

**Table 4: Construction and Operations / Maintenance SWMP**

General principle	Specific outcomes	When	Ref No.	Focus area	Action	Responsible party
Separate clean - and dirty water to ensure clean water remains uncontaminated	Temporary containments and diversion (designed for a 1 in 5-year event)	During contractors site establishment	1	<ul style="list-style-type: none"> <li>Stockpiles;</li> <li>Laydown areas;</li> <li>Workshops; and</li> <li>Any other area likely to generate sediment during a storm event or contain contaminants that can be disbursed.</li> </ul>	Clean water diversions or bunds: Construct stormwater drains or bunds to divert clean runoff around dirty areas. The diversion should be sized for 1 in 5-year event. Typical design will be an excavated earth channel or berms. For the permanent topsoil stockpile, berms and channels to remain in place until stockpile revegetates.	Construction contractor's onsite environmental officer/representative
	Permanent containments and diversions (designed for a 1 in 50-year event)	Constructed prior to operation	2	<ul style="list-style-type: none"> <li>The workshop and chemical stores;</li> <li>Transformers, inverters and substations (if not bunded); and</li> <li>Wastewater conservancy tank.</li> </ul>	Clean water diversions or bunds: Construct stormwater drains or bunds to divert clean runoff around the workshop, chemical stores, transformers, inverters, substations and wastewater conservancy tank. The diversion should be designed for a 1 in 50-year event.	Included in detailed designs of design engineer and carried out by contractor appointed for construction
Collect and, where required, treat dirty water or runoff from any dirty areas.	Dirty water should not have the potential to spill into clean water systems more than once every fifty years (where influenced by stormwater)	Before stockpiles are deposited	3	Stockpiles	Construct silt fences or berms: to prevent the sediment transport into rivers. All stockpiles to be removed after construction phase ends except permanent topsoil stockpile for decommissioning. Berms to remain around topsoil stockpile until it revegetates.	Included in detailed designs of design engineer and carried out by contractor appointed for construction
		Throughout construction	4	Waste	Dispose of landfill, oils and other contaminants offsite	
		During site establishment	5	Sewage	Supply chemical toilets	
		Constructed prior to operation	6	Workshop	Workshop collection drain with oil and grease trap: Construct a small concrete drain collecting all water, potentially containing oils and lubricants, from workshop floor and directing it through an oil and grease trap before discharge (or removing to offsite facility). Floor to be sloped such that all water will collect in drains.	
		Inspect every 3 months for first 2 years and then revise	7	Workshop	The oil and grease traps are to be inspected and, when necessary, cleaned and waste taken to a registered offsite facility	Workshop manager and assurance by environmental manager
		As required when the tank is full	8	Transformers	Dispose of any spent oil, removed from transformers during maintenance, to a registered offsite facility	
		As required when the tank is full	9	The sewage conservancy tank	Regularly collect sewage in the conservancy tank and disposed of at a licensed municipal sewage treatment plant.	
Bund any hazardous substance or pollutant storage areas (including any oils), as per regulations	Throughout construction	10	General	Construct temporary bunds for any chemicals such as oils or fuel stored on sited during construction. Bunds must contain at least 100% of the volume of the container. If all containers are stored together the bund must store at least 110% of the largest container or 25% of the total storage capacity, whichever is greater. Suitability of the material of bund must be investigated whenever a new substance is added to the bund	Included in detailed designs of design engineer and carried out by contractor appointed for construction	
	Constructed prior to operation	11	Transformers	All transformers will be bunded with bund capacity of at least 110% of the maximum volume of oil in the transformer. Transformers and bund will be protected from rainfall by small covers or roof or housed in containers, as applicable.		
		12	The sewage conservancy tank	The sewage conservancy tank will be a closed tank with an automatic alert system.		
	During operation: as and when containers are purchased	13	Workshop	Small trays for workshop chemicals: Bund any containers with oils and lubricants by placing them in plastic trays that is at least 100% of the volume of the container. If all containers are stored together the bund needs to store at least 110% of the largest container or 25% of the total storage capacity, whichever is greater. Suitability of the bund must be investigated whenever a new substance is added to the bund.	Workshop manager and assurance by environmental manager	
Do not impede surface and	Minimise dirty areas such that surface and subsurface	Constructed prior to operation	14	The workshop, transformers, wastewater conservancy tank	Place diversion channels directly upstream of dirty areas such that dirty area catchments are minimised in footprint	Included in detailed designs of design engineer and carried out by

General principle	Specific outcomes	When	Ref No.	Focus area	Action	Responsible party
subsurface flow along drainage lines	movement of water along the drainage lines is not impeded	Throughout construction	15	<ul style="list-style-type: none"> <li>Laydown areas; and</li> <li>Stockpiles</li> </ul>	Minimise laydown areas and stockpiles. The permanent topsoil stockpile is excluded from this as it will be the natural topsoil from the area and gentler slopes are recommended which will necessitate a larger area.	contractor appointed for construction
	Ensure any engineered clean stormwater drainage directs water to the closest naturally receiving drainage line		16	All drains	Ensure that any temporary stormwater drains or diversion berms direct water towards the drainage line to which it would naturally flow	
		Constructed prior to operation	17	The workshop, transformers, wastewater conservancy tank	Drains to follow natural topography, Ensure outlets drain towards the natural drainage line that would originally have received flow from that area	
Control, monitor and manage erosion	Prevent erosion in general	Constructed prior to operation	18	All areas	Only remove vegetation where required for the installation of solar panels as to not disturb the natural topography	Included in detailed designs of design engineer and carried out by contractor appointed for construction
		During operation	19		No stockpiles if possible except for the permanent topsoil stockpile.	Environmental manager
	Minimize erosion in large storm event of 1 in 50- years or greater	Constructed prior to operation	20	All drains	Drains sloped and sized such that velocities do no exceed 1 m/s	Included in detailed designs of design engineer and carried out by contractor appointed for construction
			21	Road crossings	Line all major drifts on road crossings with material sufficient to prevent erosion during high flow (e.g. gravel or concrete). If concrete is used, place a section of riprap (larger rocks) underlain by gravel and with gravel on either side to facilitate a smooth flow transition. Detailed modelling and design of road crossings such that erosion is controlled to be a feature of the detailed design.	
			22	All drains	Dissipaters: At drain outlets widen the channel and use riprap (can be sourced from spoil during construction) or reno mattresses to dissipate stormwater flows	
	Dissipate stormwater at all drainage outlets to velocities unlikely to cause erosion in natural soils for a 1 in 50-year storm event		23	Road crossings	Dissipation at road crossings: Detailed modelling and design of road crossings including riprap (can potentially be sourced from spoil during construction) or reno-mattresses.	
	Prevent erosion in general		Throughout construction	24	All	
	Minimize erosion in large storm event of 1 in 5-years or greater		25	All drains	Engineer low velocity temporary drains: Drains sloped and sized such that velocities do no exceed 1 m/s in a 1 in 5-year event	
		Early in construction	26	Road crossings	Engineered temporary drifts: Build roads and road crossings before other infrastructure.	
	Ensure that any chronic erosion is detected and rehabilitated within 6 months	Every 3 months for the first 2 years and annually thereafter	27	<ul style="list-style-type: none"> <li>PV cell blocks;</li> <li>Drains;</li> <li>Outlet of all Drains; and</li> <li>All-natural drainage lines that cross the access road.</li> </ul>	Inspect all focus areas for erosion. If erosion is found, remediate and redesign the drainage in the area. If erosion is found in a natural drainage line, conduct an assessment and determine the cause. Develop a plan to prevent future erosion.	Environmental manager or hydrologist/engineer/environmental scientist appointed by the environmental manager
	Ensure that any acute erosion due to large storm events is detected within 2 weeks.	Install prior to operation	28	Main office	Install a rain gauge that can measure greater than 150 mm.	Included in detailed designs of design engineer and carried out by contractor appointed for construction
		After a rain event of greater than 150 mm in one day (a 10 year - 24-hour rain event) or when staff notice flood damage.	29	All-natural drainage lines that run through the site	Inspect and remediate acute erosion: Inspect all focus areas for erosion. If erosion is found remediate and redesign the drainage in the area. If erosion is found in a natural drainage line conduct and assessment and determine the cause and develop a plan to prevent future erosion.	Environmental manager or hydrologist/engineer/environmental scientist appointed by the environmental manager
		Design and development prior to operation	30	All	Set up rain data system: Build or buy a basic rain program, preferably electronic, that allows site staff to enter rain data from the rain gauge. Ideally the system should let the environmental manager and site manager when a rainfall event in excess of 150 mm.	
		Daily	31	Main office	Record rain data: Read and record rain gauge daily;	Onsite staff member tasked by the Environmental manager

General principle	Specific outcomes	When	Ref No.	Focus area	Action	Responsible party	
		Update annually in case of staff change	32		Signs at main office to aid problem reporting: Ensure that a sign providing the following is posed in the reception area, the control room, on each transformer and in the workshop: The name, telephone number and email address of the environmental manager. The sign should state: "If you notice any leaks or spills or erosion anywhere on the property please contact the Environmental Manager by one of these methods..."	Environmental manager	
	Training	Annually	33	All	Training: Provide a short briefing to all construction staff on the dynamics of erosion and leaks that covers at least: <ul style="list-style-type: none"> <li>How to identify erosion;</li> <li>How to identify a leak, including car leaks;</li> <li>Where to find contact details of the environmental officer/representative in case of leaks or erosion.</li> </ul>	Environmental manager or hydrologist/engineer/environmental scientist appointed by the environmental manager	
	Ensure that any erosion is detected and rehabilitated	After rain events	34		Inspect the site for erosion after rain events. If erosion is found, remediate and redesign the drainage in the area. If erosion is found in a natural drainage line, conduct an assessment to determine the cause and develop a plan to prevent future erosion.	Contractors environmental officer/representative	
		During site establishment	35	Install a rain gauge that can measure greater than 150 mm. This rain gauge will also be used during operation.			
Monitor and manage stormwater system	Include a monitoring system for spills and leaks such that they are detected as soon as possible.	Once every 2 weeks during Construction	36	All	Leak inspection: regularly check for leaks and for any breaches or evidence of spills or any other problems not in adherence to this SWMP. All cars should also be checked for oil leaks and any leaks found should be stopped immediately, the cause of the leak identified, the problem remediated such that no further leaks occur, and any contaminated soil or water assessed and remediated.	Contractors environmental officer/representative	
	Include a monitoring system for spills and leaks such that they are detected as soon as possible.	Every 3 months for the first 2 years and annually thereafter (Operation)	37		Leak inspection: regularly check for leaks and for any breaches or evidence of spills or any other problems that would indicate that it is not in adherence to this plan. All cars should also be checked for oil leaks during the inspection. Any leaks found should be stopped immediately, the cause of the leak sought, the problem remediated such that no further leaks occur, and any contaminated soil or water assessed and remediated.	Environmental manager or hydrologist/engineer/environmental scientist appointed by the environmental manager	
		Continuous	38		Data capture, training and signs: see 32, 33, 34, 35, 36, & 37	Environmental manager and staff in general	
		Construct prior to operation		39	The sewage conservancy tank	Sewage conservancy tank alert system: Install a float switch-controlled alarm that will alert the control room when the conservancy tank has less than 2 weeks of capacity remaining.	Included in detailed designs of design engineer and carried out by contractor appointed for construction
				40	Transformers	Signs at transformers: Post a sign on transformers stating "If you notice any leaks or spills or erosion anywhere on the property please contact reception via one of the following methods .....and report it"	
General	Do not build infrastructure within near to watercourses	Detailed design	41	All	Ensure no infrastructure except roads, solar panels and solar panel supports are built within 300 m of a water course. In particular, ensure no dirty areas, that may contain pollutants, are within 300 m of the water course	Design engineer or engineer appointed by the design engineer	
	Do not build infrastructure containing potential pollutants in any of the natural drainage lines.		42		Ensure that final infrastructure plans do not propose any potentially polluting infrastructure, such as transformers, workshops or conservancy tanks in the natural drainage lines (currently none are proposed)		
	Review and improve stormwater management plan regularly.	Once every 5 years	43		Review and improve the stormwater plan	Environmental manager or engineer appointed by the environmental manager	
	Review and inspect	Once every 2 months during construction depending schedule	44		Inspect the site to ensure adherence to the stormwater management plan	Clients' environmental representative or engineer	
	Do not place stockpiles or other potentially polluting construction items within 300 m of the watercourse	Detailed design and throughout construction	45		Do not place laydown areas, stockpiles within 300 m of the watercourse	Design engineer or engineer appointed by the design engineer	
	General	Detailed design	46		Develop a specific environmental specification for any construction including, but not limited to, the actions in this stormwater management plan and its principles	Clients' environmental representative or specialist	
	Prepare for spills	Construction and Operation	47		Procure spill kits and place in areas where fuel or oils are transferred (e.g. workshops)	Environmental manager	

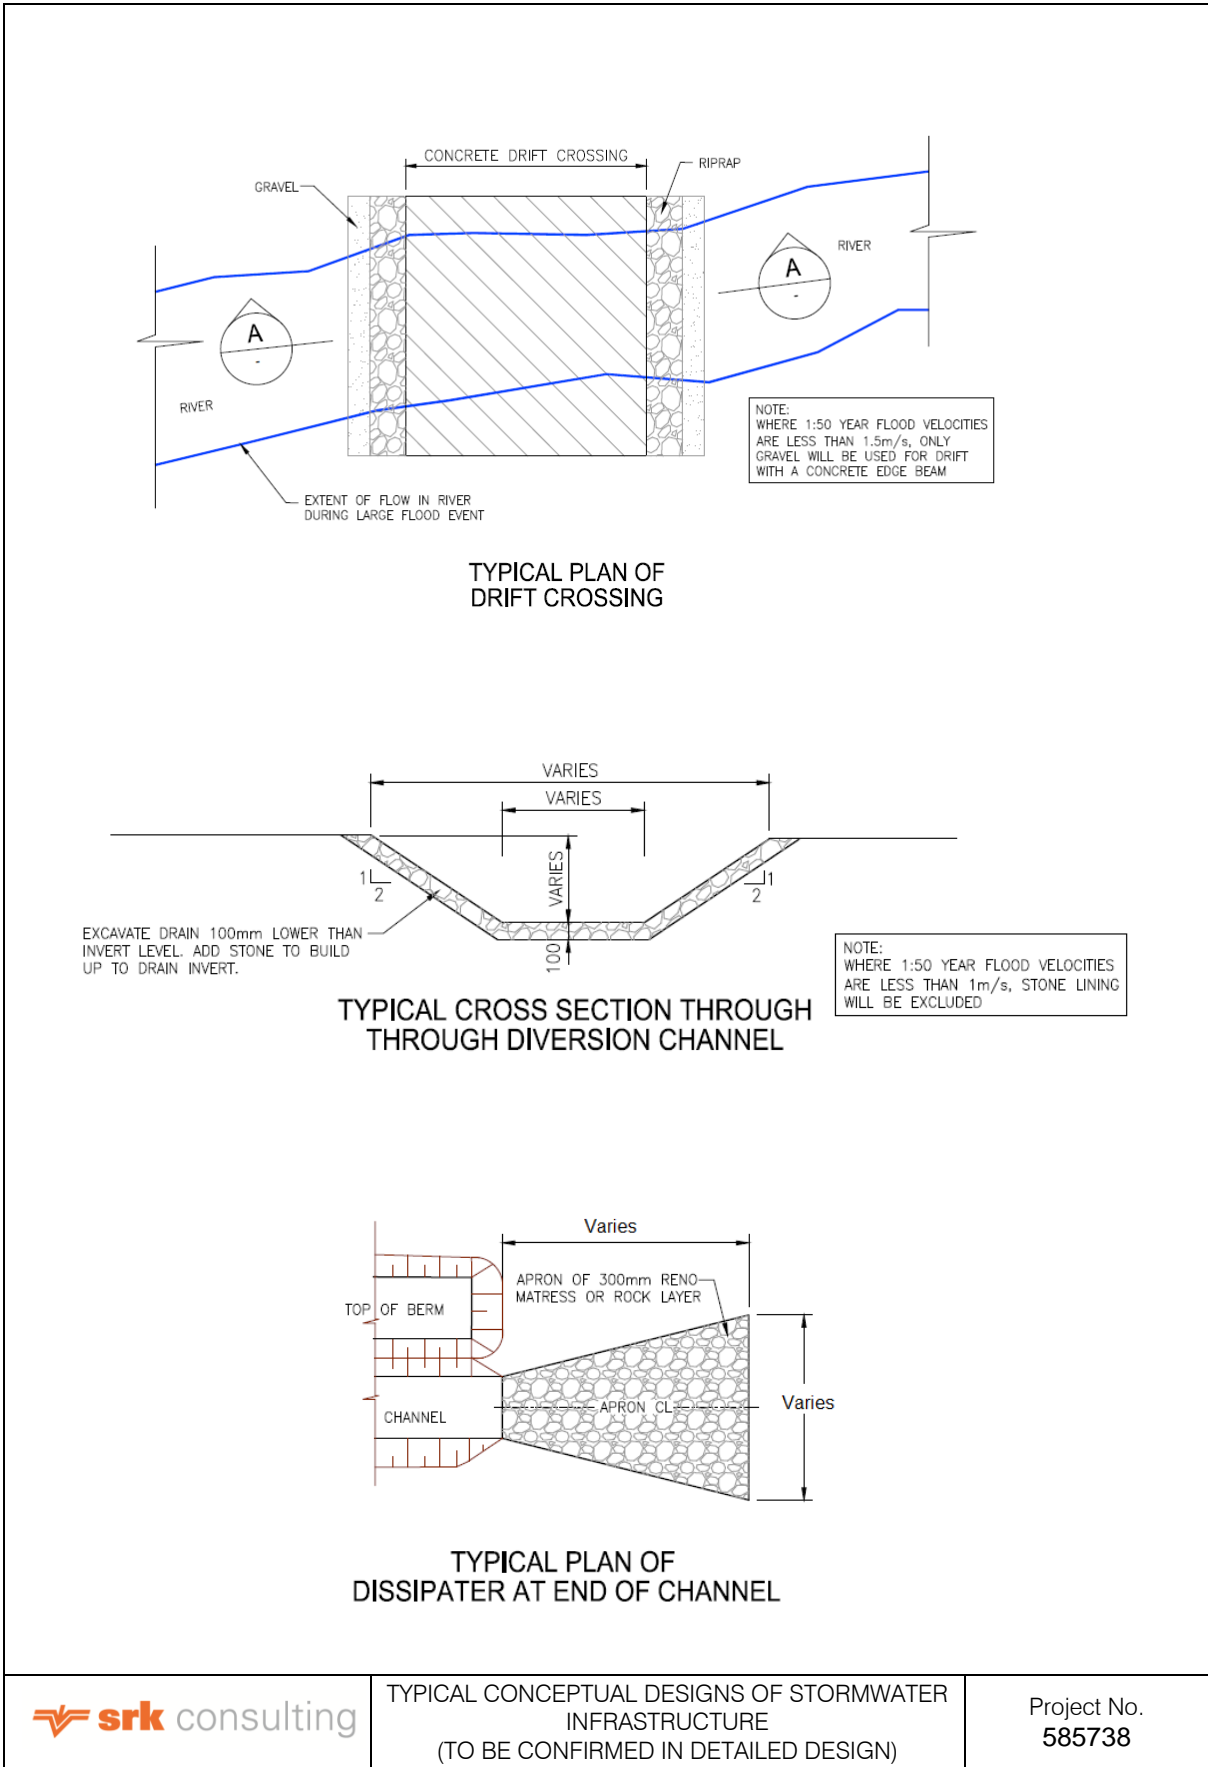

**Figure 4: Typical Conceptual Designs of Stormwater Infrastructure**

## 7 Conclusion and Recommendations

In conclusion:

- The proposed facility will have an intrinsically low impact on surface water resources;
- The potential stormwater impacts that do exist can be managed in a practical and cost-effective way; and
- The plan is conceptual, because no detailed contour data is available and only conceptual infrastructure layouts were made available at the time of the study – that said, moderate to low rainfall and low flow gradients characteristic of the area suggest that detailed design should not vary considerably from the concepts presented in this report

It is recommended that the SWMP be developed further during the detailed design by:

- Conducting a detailed topographic survey;
- Developing a stormwater layout and designs based on the above information and infrastructure layout plan;
- Developing conceptual designs into detailed designs; and
- The plan should be incorporated into an environmental specification for use during construction and incorporated into the operational environmental management of the site

## Signatures

All data used as source material plus the text, tables, figures, and attachments of this document have been reviewed and prepared in accordance with generally accepted professional engineering and environmental practices.

This report, Stormwater, Wastewater and Erosion Management Plan for Doornhoek 2, was prepared and reviewed by the SRK personnel presented below.

### Prepared by

SRK Consulting - Certified Electronic Signature  
 *Barends*  
585738/44675/Report  
2397-7292-1210-INBAR-26/04/2022  
This signature has been printed digitally. The Author has given permission for its use for this document. The details are stored in the SRK Signature Database

---

D.Barends & X.Adams, *Pr.Eng*

Civil Engineer & Principal Engineer

### Project Partner

SRK Consulting - Certified Electronic Signature  
 *Engel*  
585738/44674/Report  
6063-2765-1597-ENGE-25/04/2022  
This signature has been printed digitally. The Author has given permission for its use for this document. The details are stored in the SRK Signature Database

---

B.Engelsman, *Pr.Eng, Pr. CPM*

Principal Engineer, Partner



## References

- Department of Water Affairs and Forestry. (4 June 1999). *GN R 704 Regulations in terms of section 26 of the National Water Act on the Use of Water for Mining and Related Activities aimed at the Protection of Water Resources*. Pretoria: Government Gazette .
- Department Water Affairs and Forestry. (2006). *G1 Best Practice Guideline for Storm Water Management, Best Practice Guidelines for Water Resource Protection in the South African Mining Industry*. . Pretoria: Department of Water Affairs and Forestry (Now DWS).
- Smithers, J. C., & Schulze, R. W. (2002). *Design rainfall and flood estimation in South Africa*. Pietermaritzburg: University of Natal.