
PROPOSED SENEKAL 2 SOLAR ENERGY FACILITY NEAR MKUZE, KWAZULU-NATAL

DRAFT ENVIRONMENTAL MANAGEMENT PROGRAMME

Submitted as part of the Final Basic Assessment Report

September 2014

Prepared for:

Building Energy SpA

72 Waterkant Street

Cape Town

8001

South Africa



Prepared by

Savannah Environmental Pty Ltd

FIRST FLOOR UNIT, BLOCK 2
5 WOODLANDS DRIVE OFFICE PARK,
CORNER WOODLANDS DRIVE & WESTERN
SERVICE ROAD, WOODMEAD, GAUTENG
PO BOX 148, SUNNINGHILL, 2157
TEL: +27 (0)11656 3237
FAX: +27 (0)86 684 0547
E-MAIL: INFO@SAVANNAHSA.COM
WWW.SAVANNAHSA.COM



PROJECT DETAILS

DEA Reference No. : 14/12/16/3/3/2/1227

Title : Basic Assessment Process
Proposed Senekal 2 Solar Energy Facility Near
Mkuze, KwaZulu-Natal

Authors : Savannah Environmental
Sheila Muniongo
Karen Jodas

Sub-consultants : Scherman Colloty & Associates (Ecologist)
Heritage Contracts and Archaeological Consulting
(Heritage)
Johann Lanz Soil Scientist (Soil)
Barry Millsteed (Palaeontologist)

Client : Building Energy SpA

When used as a reference this report should be cited as: Savannah Environmental (2014)
Basic Assessment Process - Draft Environmental Management Programme: Proposed Senekal 2
Solar Energy Facility, Near Mkuze, KwaZulu-Natal

COPYRIGHT RESERVED

This technical report has been produced for Building Energy SpA. The intellectual property contained in this report remains vested in Savannah Environmental and Building Energy SpA. No part of the report may be reproduced in any manner without written permission from Building Energy SpA or Savannah Environmental (Pty) Ltd.

DEFINITIONS AND TERMINOLOGY

Alternatives: Alternatives are different means of meeting the general purpose and need of a proposed activity. Alternatives may include location or site alternatives, activity alternatives, process or technology alternatives, temporal alternatives or the 'do nothing' alternative.

Archaeological material: Remains resulting from human activities which are in a state of disuse and are in or on land and which are older than 60 years, including artefacts, human and hominid remains and artificial features and structures.

Cumulative impacts: The impact of an activity that in itself may not be significant, but may become significant when added to the existing and potential impacts eventuating from similar or diverse activities or undertakings in the area.

Direct impacts: Impacts that are caused directly by the activity and generally occur at the same time and at the place of the activity (e.g. noise generated by blasting operations on the site of the activity). These impacts are usually associated with the construction, operation or maintenance of an activity and are generally obvious and quantifiable

'Do nothing' alternative: The 'do nothing' alternative is the option of not undertaking the proposed activity or any of its alternatives. The 'do nothing' alternative also provides the baseline against which the impacts of other alternatives should be compared.

Endangered species: Taxa in danger of extinction and whose survival is unlikely if the causal factors continue operating. Included here are taxa whose numbers of individuals have been reduced to a critical level or whose habitats have been so drastically reduced that they are deemed to be in immediate danger of extinction.

Endemic: An "endemic" is a species that grows in a particular area (is endemic to that region) and has a restricted distribution. It is only found in a particular place. Whether something is endemic or not depends on the geographical boundaries of the area in question and the area can be defined at different scales.

Environment: the surroundings within which humans exist and that are made up of:

- i. The land, water and atmosphere of the earth;
- ii. Micro-organisms, plant and animal life;
- iii. Any part or combination of (i) and (ii) and the interrelationships among and between them; and

- iv. The physical, chemical, aesthetic and cultural properties and conditions of the foregoing that influence human health and well-being.

Environmental impact: An action or series of actions that have an effect on the environment.

Environmental impact assessment: Environmental Impact Assessment (EIA), as defined in the NEMA Basic Assessment Regulations and in relation to an application to which scoping must be applied, means the process of collecting, organising, analysing, interpreting and communicating information that is relevant to the consideration of that application.

Environmental management: Ensuring that environmental concerns are included in all stages of development, so that development is sustainable and does not exceed the carrying capacity of the environment.

Environmental management programme: An operational plan that organises and co-ordinates mitigation, rehabilitation and monitoring measures in order to guide the implementation of a proposal and its ongoing maintenance after implementation.

Fossil: Mineralised bones of animals, shellfish, plants and marine animals. A trace fossil is the track or footprint of a fossil animal that is preserved in stone or consolidated sediment.

Heritage: That which is inherited and forms part of the National Estate (Historical places, objects, fossils as defined by the National Heritage Resources Act of 2000).

Indigenous: All biological organisms that occurred naturally within the study area prior to 1800

Indirect impacts: Indirect or induced changes that may occur as a result of the activity (e.g. the reduction of water in a stream that supply water to a reservoir that supply water to the activity). These types of impacts include all the potential impacts that do not manifest immediately when the activity is undertaken or which occur at a different place as a result of the activity.

Interested and affected party: Individuals or groups concerned with or affected by an activity and its consequences. These include the authorities, local communities, investors, work force, consumers, environmental interest groups and the general public.

Photovoltaic effect: Electricity can be generated using photovoltaic panels (semiconductors) which are comprised of individual photovoltaic cells that absorb solar energy to produce electricity. The absorbed solar radiation excites the electrons inside the cells and produces what is referred to as the Photovoltaic Effect.

Rare species: Taxa with small world populations that are not at present Endangered or Vulnerable, but are at risk as some unexpected threat could easily cause a critical decline. These taxa are usually localised within restricted geographical areas or habitats or are thinly scattered over a more extensive range. This category was termed Critically Rare by Hall and Veldhuis (1985) to distinguish it from the more generally used word "rare".

Red data species: Species listed in terms of the International Union for Conservation of Nature and Natural Resources (IUCN) Red List of Threatened Species, and/or in terms of the South African Red Data list. In terms of the South African Red Data list, species are classified as being extinct, endangered, vulnerable, rare, indeterminate, insufficiently known or not threatened (see other definitions within this glossary).

Significant impact: An impact that by its magnitude, duration, intensity, or probability of occurrence may have a notable effect on one or more aspects of the environment.

TABLE OF CONTENTS

	<i>Page</i>
PROJECT DETAILS	<i>i</i>
DEFINITIONS AND TERMINOLOGY	<i>ii</i>
TABLE OF CONTENTS	<i>vi</i>
CHAPTER 1 PROJECT DETAILS	<i>1</i>
1.1. Activities and Components associated with the Construction Operation and Decommissioning Solar Energy Facility.....	4
1.3. Benefits of the Proposed Project	8
CHAPTER 2 PURPOSE AND OBJECTIVES OF THE EMPr.....	<i>10</i>
CHAPTER 3 STRUCTURE OF THIS EMPr	<i>12</i>
3.1. Project Team	13
CHAPTER 4 KEY LEGISLATION APPLICABLE TO THE DEVELOPMENT	<i>14</i>
CHAPTER 5 MANAGEMENT PROGRAMME: PLANNING AND DESIGN	<i>24</i>
5.1 Objectives	24
OBJECTIVE PD1: Ensure the facility design responds to identified environmental constraints and opportunities	24
OBJECTIVE PD2: Ensure the selection of the best environmental option for the alignment of the power line and access roads	27
OBJECTIVE PD3: Minimise storm water runoff (guideline for storm water management plan)	28
CHAPTER 6 MANAGEMENT PROGRAMME: CONSTRUCTION	<i>31</i>
6.1 Institutional Arrangements: Roles and Responsibilities for the Construction Phase	31
OBJECTIVE C1: Establish clear reporting, communication, and responsibilities in relation to overall implementation of the EMPr	31
6.2 Objectives	36
OBJECTIVE C2: Minimise impacts related to inappropriate site establishment	36
OBJECTIVE C3: Appropriate management of the construction site and construction workers.....	38
OBJECTIVE C4: Maximise local employment and business opportunities associated with the construction phase.....	40
OBJECTIVE C5: Minimise impacts related to traffic management and transportation of equipment and materials to site (Traffic Management and Transportation Plan)	41
OBJECTIVE C6: To avoid and or minimise the potential impacts of safety, noise and dust and damage to roads caused by construction vehicles during the construction phase	44
OBJECTIVE C7: Minimise the impacts on and loss of indigenous vegetation and faunal habitat	45
OBJECTIVE C8: Minimise the establishment and spread of alien invasive plants (Invasive Plant Management Plan) and manage indigenous invasive plants	47

OBJECTIVE C9: Limit direct faunal impacts	48
OBJECTIVE C10: Minimise soil degradation and erosion (Erosion management Plan)	50
OBJECTIVE C11: Minimising the impact on heritage sites	52
OBJECTIVE C12: Minimisation of visual impacts associated with the construction of the solar energy facility.	53
OBJECTIVE C13: Appropriate handling and management of waste.....	54
OBJECTIVE C14: Appropriate handling and storage of chemicals, hazardous substances	57
OBJECTIVE C15: To avoid and or minimise the potential risk of increased veld fires during the construction phase	59
6.3 Detailing Method Statements	60
OBJECTIVE C16: Ensure all construction activities are undertaken with the appropriate level of environmental awareness to minimise environmental risk.....	60
6.4 Awareness and Competence: Construction Phase of the Solar Energy Facility	62
OBJECTIVE C17: To ensure all construction personnel have the appropriate level of environmental awareness and competence to ensure continued environmental due diligence and on-going minimisation of environmental harm	62
6.4.1 <i>Environmental Awareness Training</i>	64
6.4.2 <i>Induction Training</i>	64
6.4.3 <i>Toolbox Talks</i>	64
6.5 Monitoring Programme: Construction Phase.....	64
OBJECTIVE C18: To monitor the performance of the control strategies employed against environmental objectives and standards	64
6.5.1 <i>Non-Conformance Reports</i>	65
6.5.2 <i>Monitoring Reports</i>	66
6.5.3 <i>Final Audit Report</i>	66
CHAPTER 7 MANAGEMENT PROGRAMME: REHABILITATION	67
7.1. Objectives	67
OBJECTIVE R1: Ensure appropriate rehabilitation of disturbed areas such that residual environmental impacts are remediated or curtailed67	
CHAPTER 8 MANAGEMENT PROGRAMME: OPERATION	70
8.1. Objectives	70
OBJECTIVE O1: Limit the ecological footprint of the facility.....	70
OBJECTIVE O2: Minimise dust and air emissions	71
OBJECTIVE O3: Ensure the implementation of an appropriate fire management plan during the operation phase.....	73
OBJECTIVE O4: Maximise local employment and business opportunities associated with the operational phase	74
OBJECTIVE O5: Appropriate handling and management of waste including handling hazardous/dangerous substances	75

OBJECTIVE O6: Mitigate the possible visual impact associated with the operational phase. 77

CHAPTER 9 MANAGEMENT PROGRAMME: DECOMMISSIONING 78

9.1. Site Preparation 78

9.2 Disassemble and Remove Infrastructure..... 78

OBJECTIVE D1: To avoid and or minimise the potential impacts associated with the decommissioning phase 78

9.3 Rehabilitation..... 79

CHAPTER 10 FINALISATION OF THE EMPr..... 80

Appendices:

Appendix A: Grievance Mechanism for Public Complaints and Issues

Appendix B: Department of Water Affairs: Working for Water Programme
Principles for Invasive Plant Species

Appendix C: Erosion and Storm water Management Plan

Appendix D: Guidelines for Integrated Management of Construction Waste

Appendix E: Plant Rescue and Re-Vegetation Management Plan

PROJECT DETAILS

CHAPTER 1

Building Energy SpA, an Independent Power Producer (IPP), is proposing the establishment of a small-scale commercial solar energy facility (using photovoltaic technology) of approximately 5MW in capacity. The site is located approximately 2km west of Mkuze on the Remainder of the Farm Harlingen 13433, in KwaZulu-Natal (refer to Figure 1.1). . The proposed project will be referred to as the **Senekal 2 Solar Energy Facility**.

The purpose of the project is to generate electricity which will be fed-into the national electricity grid. The project will participate in the Department of Energy's Small Projects Renewable Energy Independent Power Producer Procurement Programme (REIPPP). The REIPPP Programme has been designed to contribute towards the South African government's renewable energy target of 17GW by 2030, and to stimulate the renewable industry in South Africa.

The facility development footprint will be less than 10ha in extent within which the following infrastructure will be established:

- » Arrays of photovoltaic (PV) panels with a capacity of up to 5MW.
- » Mounting structures to support the PV panels.
- » Cabling between the project components, to be lain underground.
- » Inverters/transformer enclosures.
- » An on-site switching station.
- » An overhead power line of approximately 500m in length to connect to the existing Mkuze Substation
- » Internal access roads.
- » Fencing and workshop area for maintenance and storage, and an on-site office.

Through the environmental assessment of impacts associated with the Senekal 2 Solar Energy Facility, both potentially positive and negative impacts were identified. All impacts were assessed to be of medium-low significance.

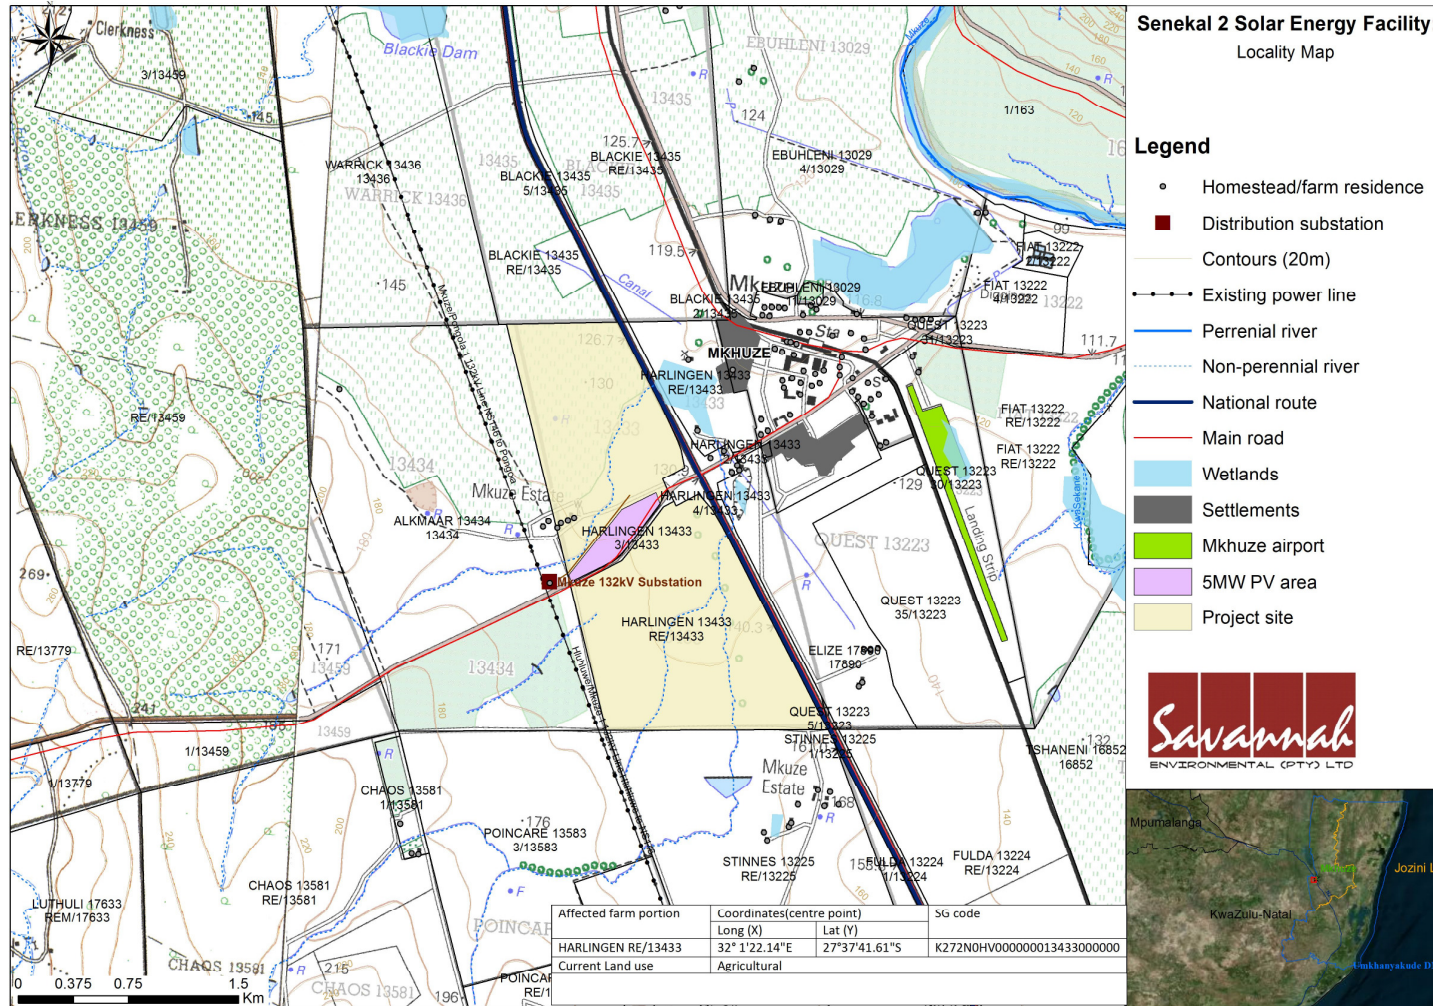


Figure 1.1: Locality map showing the development area for the proposed Senekal 2 Solar Energy Facility on the Remainder of the Farm Harlingen 13433.

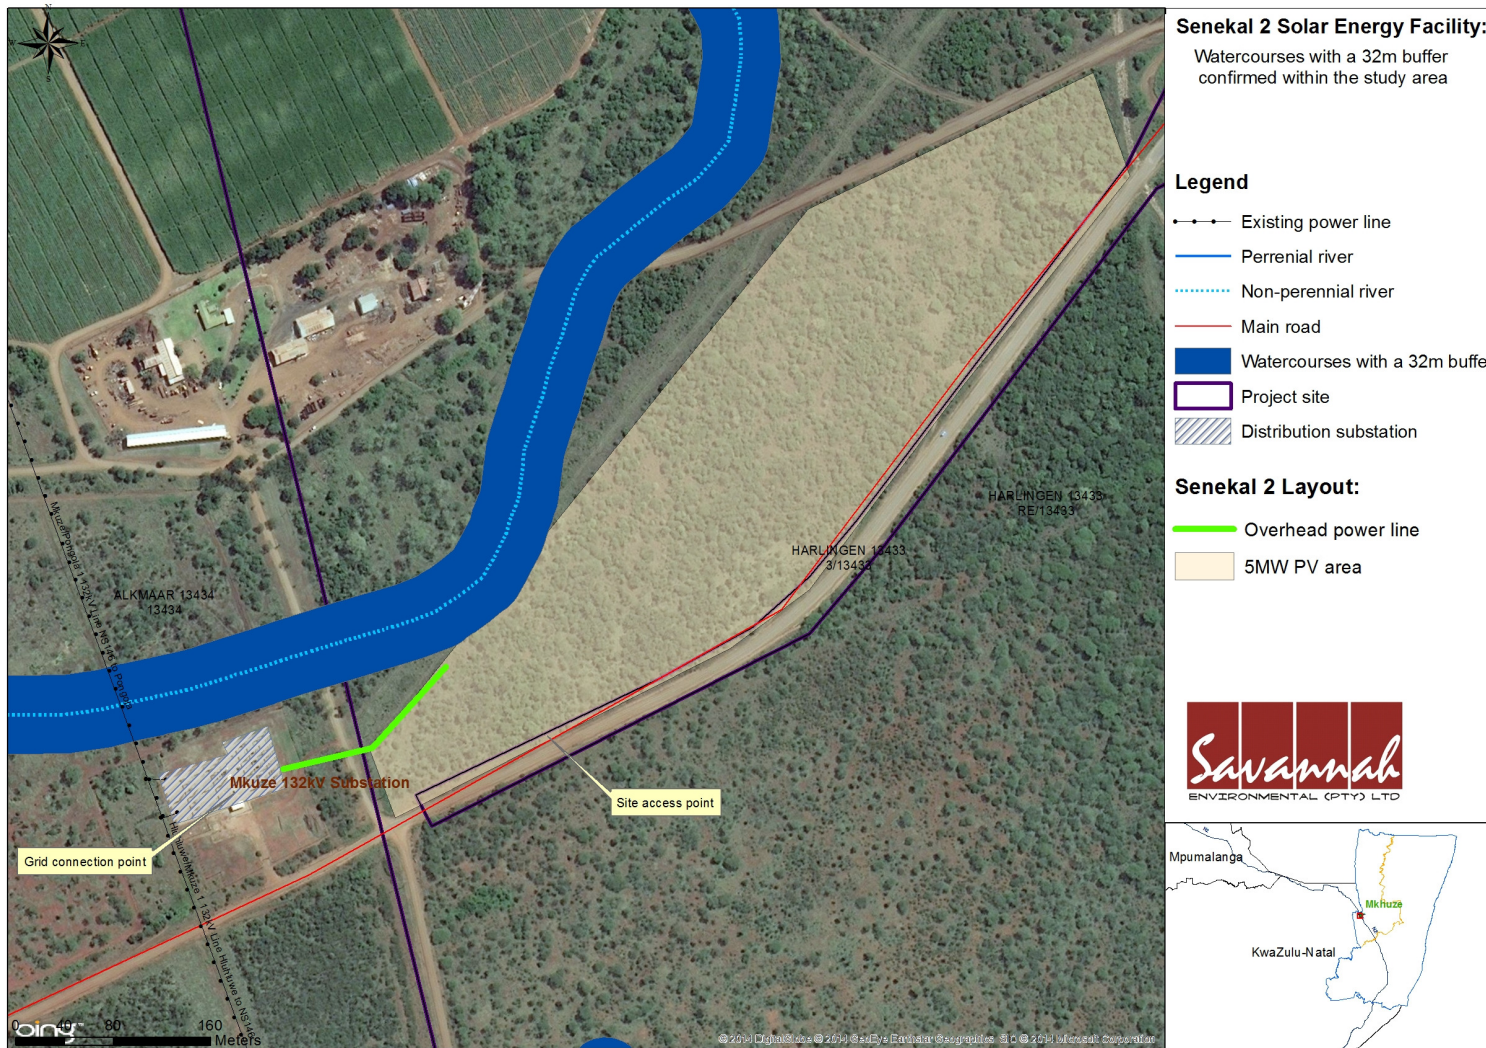


Figure 1.2: Layout map showing the location of PV facility relative to the atercourses with a 32m buffer confirmed within the study area

1.1. Activities and Components associated with the Construction Operation and Decommissioning Solar Energy Facility

Table 1.1: Activities associated with the construction of a PV facility

Main Activity/Project Component	Components of Activity	Details
Planning		
Conduct technical surveys	<ul style="list-style-type: none"> » Geotechnical survey by geotechnical engineer. » Site survey and confirmation of the infrastructure micro-siting footprint. 	<ul style="list-style-type: none"> » All surveys are to be undertaken prior to initiating construction.
Construction		
Undertake site preparation	<ul style="list-style-type: none"> » Clearance of vegetation at the infrastructure footprints. » Where required, some levelling of the land may occur. » Excavation of trenches for underground cables. 	<ul style="list-style-type: none"> » These activities will require the stripping of topsoil, which will need to be appropriately stockpiled for use in rehabilitation.
Construction of internal access roads	<ul style="list-style-type: none"> » Construct a 7 m wide gravel roads around the site. 	<ul style="list-style-type: none"> » The proposed internal access roads will be comprised of gravel tracks or compacted rock-fill.
Construct infrastructure foundations	<ul style="list-style-type: none"> » Mounting structures will either be pile driven, screwed or pre-cast concrete footings 	<ul style="list-style-type: none"> » Mounting structures will not involve the utilization of concrete, but would involve be pile driven, screwed
Transport of components and equipment to site	<ul style="list-style-type: none"> » Trucks will be used to transport all components to site: * The normal civil engineering construction equipment for the civil works (e.g. trucks, graders, compaction equipment, cement mixers, etc.). 	<ul style="list-style-type: none"> » The equipment will be transported to the site using appropriate National and Provincial routes, and the dedicated access/haul road to the site itself.
Establishment of PV panels	<ul style="list-style-type: none"> » PV panels are transported in containers. » The steel structures will be assembled on site. 	<ul style="list-style-type: none"> » The steel mounting structures, manufactured in South Africa, are custom made for the site. They are assembled on site.

Main Activity/Project Component	Components of Activity	Details
Connection of PV panels to the substation	» The PV panels will be connected to the on-site substation via underground cabling (where practical).	» The installation of these underground cables will require the excavation of trenches of approximately 400 mm – 1000 mm deep within which they can then be laid.
Connect substation to the grid	» The PV facility could possibly connect into the existing Mkuze Substation located adjacent to the project site	» The electricity generated at the site connect to the grid via an overhead power line of approximately 500m
Undertake site rehabilitation	» Remove all construction equipment from the site. » Rehabilitation of temporarily disturbed areas where practical and reasonable.	» On full commissioning of the facility, any access points to the site which are not required during the operation phase will be closed and rehabilitated.
Operation		
Operation	» PV panels. » Associated infrastructure.	» The operational phase is proposed to run for a period of approximately 20 years. » During this time, full time security, maintenance, supervision, and monitoring teams will be required on site. » The PV facility will be operational during daylight hours only but not under circumstances of mechanical breakdown, or maintenance activities. » No energy storage mechanisms (i.e. batteries) which would allow for continued generation at night or on cloudy days are proposed. » An estimated 500 m ³ litres of water per annum would be required for cleaning of the panels and for offices and workshops and an estimated 1 300 m ³ litres of water would be required for the construction of the plant.
Maintenance & Security	» Maintenance during the life cycle of the facility	» The panels will be cleaned with water. It is

Main Activity/Project Component	Components of Activity	Details
	would include emergency repairs, routine panel maintenance, routine maintenance of medium voltage equipment and maintenance of the site.	estimated that this would be required twice annually. » 24 hour on-site security
<i>Decommissioning</i>		
Site preparation	» Preparation of the site. » Mobilisation of decommissioning equipment.	» Depending on the economics of the development following the operational period, the plant will either be decommissioned or the operational phase will be extended. If it is deemed financially viable to continue, existing components may be disassembled and replaced with newer technology or infrastructure available at that time. However, if the decision is made to decommission the facility the components of the facility will be disassembled and removed from the site.
Disassemble panels	» The panels will be disassembled and removed.	» The components of the plant will be disassembled and removed. Thereafter they will be reused and recycled (where possible) or disposed of in accordance with regulatory requirements. components of the facility will be disassembled and removed from the site
Site rehabilitation	» Rehabilitation of the site	» The site will be rehabilitated and can be returned to the current or other beneficial land-use.

1.2 Findings of the Environmental Impact Assessment

From the assessment of potential impacts undertaken within this EIA, it is concluded that there are no environmental fatal flaws associated with the site proposed for Senekal 2 Solar Energy Facility. Potential environmental impacts and some areas of sensitivity were however identified to be located outside near the project site (Figure 1.2). In summary, the most significant environmental impacts associated with Senekal 2 Solar Energy Facility, as identified through the BA include:

- » Impacts on ecology
 - » Impacts heritage and Paleontological Resources
 - » Impacts on the local soils, land capability and agricultural potential of the site.
 - » Visual impacts
 - » Social and economic impacts.
-
- » In terms of the **ecology**, based on the available information and the site investigations, it shows that the proposed project would have **low impact** on any sensitive and / or important terrestrial. This is based on the assumption that no species of special concern are found on site, and would need to be confirmed during the growing season. With regard the **aquatic environment**, no such systems were observed within the site itself habitats. The most sensitive habitats would be the surrounding water courses and although **not directly on site** these should be avoided with regard new impacts (i.e. road crossings) that could directly surface flows off the site.
-
- » The significance of **agricultural impacts** is influenced by the fact that the site is land capability class III and the soils are suitable for cultivation. However the impracticality of utilising it as part of the irrigation land on the farm reduces the significance of the impact associated with the proposed project. The extent of the development is also small, so a minimal amount of land is impacted. The site is currently not used for agriculture. The development of the solar energy facility will have **low to medium** negative impacts on agricultural resources and productivity.
-
- » No **heritage** sites were recorded in the study area and due to the lack of shelters, knapping material or features in the landscape, like pans or rocky outcrops, no Stone Age Sites occur. It is concluded that the impacts of the proposed development on heritage resources such as archaeological sites, built structures over 60 years old, sites of cultural significance associated with burial grounds and graves, graves of victims of conflict, and significant cultural landscapes or viewsapes are considered to be **low**.
-
- » The project area is completely underlain by rocks of the Jurassic Letaba Formation. The extrusive, magmatic origins of the rocks that comprise the

Letaba Formation preclude the possibility of any fossil materials being present within the unit. Thus, the **paleontological potential** of the Letaba Formation is assessed as being **nil**.

- » The area has a natural and agricultural character; however the area is proposed adjacent to the Mkuze Substation, there are power lines, the N2 national road traversing the areas which are infrastructural elements that have an impact on the **visual resources** in the area. The potential impact of the proposed Senekal 2 Solar Energy Facility on the areas sense of place is likely to be **low to medium**.
- » The overall **social and socio-economic impact** in terms of positive and negative impacts is likely to be of a **medium to low significance** during both the construction and operational phases with the implementation of enhancement/mitigation measures. The proposed Senekal 2 Solar Energy Facility is unlikely to result in permanent damaging social impacts. From a social perspective it is concluded that the project could be developed subject to the implementation of the recommended mitigation measures and management actions contained in the.

1.3. Benefits of the Proposed Project

Internationally there is increasing pressure on countries to increase their share of renewable energy generation due to concerns such as climate change and exploitation of resources. The South African Government has set a target for renewable energy of 17 GW all new installed generating capacity (new build) being derived from renewable energy forms, to be produced mainly from biomass, wind, solar and small-scale hydro.

Through pre-feasibility assessments and research, the viability of establishing a 5MW Solar energy facility on a site near Mkuze in the KwaZulu-Natal Province has been established by **Building Energy SpA**. The positive implications of establishing a solar energy facility on the demarcated site within the KwaZulu-Natal include:

- » The project would assist the South African government in reaching their set targets for renewable energy.
- » The potential to harness and utilise good solar energy resources would be realised.
- » The National electricity grid in the KwaZulu-Natal would benefit from the additional generated power.
- » Promotion of clean, renewable energy in South Africa.
- » Creation of local employment and business opportunities for the area.

The proposed development represents an investment in clean, renewable energy infrastructure, which, given the challenges created by climate change, represents a positive social benefit for society as a whole. The proposed project will not consume energy, but will instead provide a new source of clean, renewable electricity to the South African power grid. This generation of renewable power will aid in reducing the dependency on other power generation fuels and enhancing the reliability of the regional energy supply.

PURPOSE AND OBJECTIVES OF THE EMPr

CHAPTER 2

An Environmental Management Programme (EMPr) is defined as “an environmental management tool used to ensure that undue or reasonably avoidable adverse impacts associated with the planning, construction, operation and decommissioning of a project are avoided or mitigated, and that the positive benefits of the projects are enhanced.”¹ The objective of this EMPr is to provide consistent information and guidance for implementing the management and monitoring measures established in the permitting process and help achieve environmental policy goals. The purpose of an EMPr is to ensure continuous improvement of environmental performance, reducing negative impacts and enhancing positive effects during the construction and operation of the facility. An effective EMPr is concerned with both the immediate outcome as well as the long-term impacts of the project.

The EMPr provides specific environmental guidance for the construction and operation phases of a project, and is intended to manage and mitigate construction and operation activities so that unnecessary or preventable environmental impacts do not result. These impacts range from those incurred during start up (i.e. site clearing and site establishment), during the construction activities themselves (i.e. erosion, noise, dust, and visual impacts), during site rehabilitation (i.e. soil stabilisation, re-vegetation), during operation and during decommissioning (i.e. similar to construction phase activities).

This Construction and Operational Environmental Management Plan (CEMP and OEMP) has been compiled for the proposed Senekal 2 Solar Energy Facility. This EMPr is applicable to all employees and contractors working on the pre-construction, construction, and operation and maintenance phases of the project. The document will be adhered to, updated as relevant throughout the project life cycle.

This EMPr has been compiled in accordance with Section 33 of EIA Regulations and will be further developed in terms of specific requirements listed in any authorisations issued for the proposed project. The EMPr has been developed as a set of environmental specifications (i.e. principles of environmental management), which are appropriately contextualised to provide clear guidance in terms of the on-site implementation of these specifications (i.e. on-site contextualisation is provided through the inclusion of various monitoring and implementation tools).

¹ Provincial Government Northern Cape, Department of Environmental Affairs and Development Planning: *Guideline for Environmental Management Plans*. 2005

This EMPr has the following objectives:

- » Outline mitigation measures and environmental specifications which are required to be implemented for the planning, construction and rehabilitation, operation, and decommissioning phases of the project in order to manage and minimise the extent of potential environmental impacts associated with the facility.
- » Ensure that all the phases of the project do not result in undue or reasonably avoidable adverse environmental impacts, and ensure that any potential environmental benefits are enhanced.
- » Identify entities responsible for the implementation of the measures and outline functions and responsibilities.
- » Propose mechanisms and frequency for monitoring compliance, and preventing long-term or permanent environmental degradation.
- » Facilitate appropriate and proactive responses to unforeseen events or changes in project implementation that was not considered in the Basic Assessment process.

The management and mitigation measures identified within the Environmental Basic Assessment (BA) process are systematically addressed in this EMPr, and ensure the minimisation of adverse environmental impacts to an acceptable level.

Building Energy SpA must ensure that the implementation of the project complies with the requirements of all environmental authorisations, permits, and obligations emanating from relevant environmental legislation. This obligation is partly met through the development and the implementation of this EMPr and through its integration into the contract documentation. Since this EMPr is part of the Basic Assessment process for the proposed Senekal 2 Solar Energy Facility, it is important that this document be read in conjunction with the final Basic Assessment Report compiled for this project. This will contextualise the EMPr and enable a thorough understanding of its role and purpose in the integrated environmental management process. Should there be a conflict of interpretation between this EMPr and the environmental authorisation, the stipulations in the environmental authorisation shall prevail over that of the EMPr, unless otherwise agreed by the authorities in writing. Similarly, any provisions in legislation overrule any provisions or interpretations within this EMPr.

This EMPr shall be binding on all the parties involved in the construction and operational phases of the project, and shall be enforceable at all levels of contract and operational management within the project. The document must be adhered to, updated as relevant throughout the project life cycle.

STRUCTURE OF THIS EMPr

CHAPTER 3

The first two chapters provide background to the EMPr and the proposed project, while the chapters which follow consider the following:

- » Key legislation applicable to the development;
- » Planning and design activities;
- » Construction activities;
- » Rehabilitation activities;
- » Operation activities; and
- » Decommissioning activities.

These chapters set out the procedures necessary for Senekal 2 Solar Energy Facility, as the project developer, to minimise environmental impacts and achieve environmental compliance. For each of the phases of implementation, an overarching environmental **goal** is stated. In order to meet this goal, a number of **objectives** are listed. The EMPr has been structured in table format in order to show the links between the goals for each phase and their associated objectives, activities/risk sources, mitigation actions, monitoring requirements and performance indicators. A specific EMPr table has been established for each environmental objective. The information provided within the EMPr table for each objective is illustrated below:

OBJECTIVE: Description of the objective, which is necessary to meet the overall goals; which take into account the findings of the Basic Assessment specialist studies

Project Component/s	» List of project components affecting the objective.
Potential Impact	» Description of potential environmental impact if objective is not met.
Activity/Risk Source	» Description of activities which could affect achieving objective.
Mitigation: Target/Objective	» Description of the target and/or desired outcomes of mitigation.

Mitigation: Action/Control	Responsibility	Timeframe
List specific action(s) required to meet the mitigation target/objective described above.	Who is responsible for the measures?	Periods for implementation.

Performance Indicator	Description of key indicator(s) that track progress/indicate the effectiveness of the EMPr.
Monitoring	Mechanisms for monitoring compliance; the key monitoring actions required to check whether the objectives are being achieved, taking into consideration responsibility, frequency, methods, and reporting.

The objectives and EMPr tables are required to be reviewed and possibly modified whenever changes, such as the following, occur:

- » Planned activities change (i.e. in terms of the components and/or layout of the facility);
- » Modification to or addition to environmental objectives and targets;
- » Relevant legal or other requirements are changed or introduced; and
- » Significant progress has been made on achieving an objective or target such that it should be re-examined to determine if it is still relevant, should be modified, etc.

3.1. Project Team

This draft EMPr was compiled by:

	Name	Company
EMPr Compilers:	Sheila Muniongo Karen Jodas	Savannah Environmental Savannah Environmental
Specialists:	Brian Colloty	Scherman Colloty & Associates
	Johann Lanz	Johann Lanz Soil Scientist
	Jaco van der Walt	Heritage Contracts and Archaeological Consulting
	Barry Millstead	BM Geological Services
	Candice Hunter	Savannah Environmental

The Savannah Environmental team have extensive knowledge and experience in EIAs and environmental management, having been involved in Basic Assessment processes & EIAs over the past fifteen years. The team have managed and drafted EMPrs for other power generation projects throughout South Africa, including numerous wind and solar energy facilities.

KEY LEGISLATION APPLICABLE TO THE DEVELOPMENT CHAPTER 4

The following legislation and guidelines have informed the scope and content of this EMPr Report:

- » National Environmental Management Act (Act No 107 of 1998).
- » EIA Regulations, published under Chapter 5 of the NEMA (GNR R545, GNR 546 in Government Gazette 33306 of 18 June 2010).
- » Guidelines published in terms of the NEMA Basic Assessment Regulations, in particular:
 - * Companion to the National Environmental Management Act (NEMA) Environmental Impact Assessment (EIA) Regulations of 2010 (Draft Guideline; DEA, 2010).
 - * Public Participation in the Basic Assessment Process (DEA, 2010).
 - * Integrated Environmental Management Information Series (published by DEA).
- » International guidelines, including the Equator Principles.

Several other Acts, standards, or guidelines have also informed the project process and the scope of issues addressed and assessed in the Basic Assessment Report. A review of legislative requirements applicable to the proposed project is provided in Table 4.1.

Table 4.1: Relevant legislative and permitting requirements applicable to the establishment of the proposed Senekal 2 Solar Energy Facility

Legislation	Applicable Requirements	Relevant Authority	Compliance Requirements
National Legislation			
National Environmental Management Act (Act No 107 of 1998)	<p>The Environmental Assessment Regulations have been promulgated in terms of Chapter 5 of the Act. Listed activities which may not commence without an environmental authorisation are identified within these Regulations.</p> <p>In terms of S24(1) of NEMA, the potential impact on the environment associated with these listed activities must be assessed and reported on to the competent authority charged by NEMA with granting of the relevant environmental authorisation.</p> <p>In terms of GN R543, R544, R545 and R546 of 18 June 2010, a Basic Assessment Process is required to be undertaken for the proposed project.</p>	Department of Environmental Affairs – competent authority KwaZulu-Natal Department of Agriculture, Environmental Affairs and Rural Development (DAEA)	The listed activities triggered by the proposed solar energy facility have been identified and assessed in the Basic Assessment Process being undertaken. This Basic Assessment Report will be submitted to the competent and commenting authority in support of the application for authorisation.
National Environmental Management Act (Act No 107 of 1998)	<p>In terms of the Duty of Care Provision in S28(1) the project proponent must ensure that reasonable measures are taken throughout the life cycle of this project to ensure that any pollution or degradation of the environment associated with this project is avoided, stopped or minimised.</p> <p>In terms of NEMA, it has become the legal duty of a project proponent to consider a project holistically, and to consider the cumulative effect of a variety of impacts.</p>	Department of Environmental Affairs KwaZulu-Natal Department of Agriculture, Environmental Affairs and Rural Development (DAEA)	While no permitting or licensing requirements arise directly by virtue of the proposed project, this section has found application during the Basic Assessment Process through the consideration of potential impacts (cumulative, direct, and indirect). It will continue to apply throughout the life cycle of the project.
Environment Conservation Act (Act No 73 of 1989)	National Noise Control Regulations (GN R154 dated 10 January 1992)	Department of Environmental Affairs	Noise impacts are expected to be associated with the

Legislation	Applicable Requirements	Relevant Authority	Compliance Requirements
		KwaZulu-Natal DAEA Jozini Local Municipality	construction phase of the project and are not likely to present a significant intrusion to the local community. On-site activities should be limited to 6:00am - 6:00pm, Monday - Friday (excluding public holidays) and 6:00 am to 1:00pm on Saturdays. Should activities need to be undertaken outside of these times, the surrounding communities will need to be notified.
National Water Act (Act No 36 of 1998)	Water uses under S21 of the Act must be licensed, unless such water use falls into one of the categories listed in S22 of the Act or falls under the general authorisation (and then registration of the water use is required). Consumptive water uses may include the taking of water from a water resource - Sections 21a and b. Non-consumptive water uses may include impeding or diverting of flow in a water course - Section 21c; and altering of bed, banks or characteristics of a watercourse - Section 21i.	Department of Water and Sanitation Provincial Department of Water and Sanitation	The water required for this project will be sourced from Jozini Local Municipality. No License would be required from DWA for the taking of water. Should any water resources be impacted through construction, the relevant license would be required to be applied for.

Legislation	Applicable Requirements	Relevant Authority	Compliance Requirements
Minerals and Petroleum Resources Development Act (Act No 28 of 2002)	<p>A mining permit or mining right may be required where a mineral in question is to be mined (e.g. materials from a borrow pit) in accordance with the provisions of the Act.</p> <p>Requirements for Environmental Management Programmes and Environmental Management Plans are set out in S39 of the Act.</p> <p>S53 Department of Mineral Resources: Approval from the Department of Mineral Resources (DMR) may be required to use land surface contrary to the objects of the Act in terms of section 53 of the Mineral and Petroleum Resources Development Act, (Act No 28 of 2002): In terms of the Act approval from the Minister of Mineral Resources is required to ensure that proposed activities do not sterilise a mineral resources that might occur on site.</p>	Department of Mineral Resources	As no borrow pits are expected to be required for the construction of the facility, no mining permit or right is required to be obtained. A Section 53 application to be submitted the DMR Regional office.
Minerals and Petroleum Resources Development Act (Act No 28 of 2002)	<p>A reconnaissance permission, prospecting right, mining right, mining permit, retention permit, technical corporation permit, reconnaissance permit, exploration right and production right work programme; mining work programme, environmental management programme, and environmental management plan may not be amended or varied (including by extension of the area covered by it or by the addition of minerals or a share or shares or seams, mineralised bodies, or strata, which are not at the time the subject thereof) without the written consent of the Minister.</p>	Department of Mineral Resources	DMR were consulted with regard to the proposed facility and due process is underway to obtain permission
National Environmental Management: Air Quality Act (Act No 39 of 2004)	<ul style="list-style-type: none"> » S18, S19 and S20 of the Act allow certain areas to be declared and managed as "priority areas" » Declaration of controlled emitters (Part 3 of Act) and controlled fuels (Part 4 of Act) with relevant emission standards » The Act provides that an air quality officer may require any person to submit an atmospheric impact report if there is reasonable suspicion that the person has failed to comply with the Act. 	Department of Environmental Affairs	<p>No permitting or licensing requirements arise for this facility from this legislation.</p> <p>While no permitting or licensing requirements arise from this legislation, this Act will find application</p>

Legislation	Applicable Requirements	Relevant Authority	Compliance Requirements
	Dust control regulations promulgated in November 2013 may require the implementation of a dust management plan.		during the construction phase of the project. The Air Emissions Authority (AEL) may require the compilation of a dust management plan.
National Heritage Resources Act (Act No 25 of 1999)	<ul style="list-style-type: none"> » Stipulates assessment criteria and categories of heritage resources according to their significance (S7). » Provides for the protection of all archaeological and paleontological sites, and meteorites (S35). » Provides for the conservation and care of cemeteries and graves by SAHRA where this is not the responsibility of any other authority (S36). » Lists activities which require developers any person who intends to undertake to notify the responsible heritage resources authority and furnish it with details regarding the location, nature, and extent of the proposed development (S38). » Requires the compilation of a Conservation Management Plan as well as a permit from SAHRA for the presentation of archaeological sites as part of tourism attraction (S44). 	<ul style="list-style-type: none"> » South African Heritage Resources Agency » Amafa Heritage KZN 	<p>A notification letter was submitted to SARHA informing them about the project and request for comments. This Basic Assessment Report together with the heritage study undertaken will also be submitted to SAHRA for review.</p> <p>A permit may be required should any heritage sites be impacted on by the proposed development.</p>
National Environmental Management: Biodiversity Act (Act No 10 of 2004)	<ul style="list-style-type: none"> » Provides for the MEC/Minister to identify any process or activity in such a listed ecosystem as a threatening process (S53) » A list of threatened and protected species has been published in terms of S 56(1) - Government Gazette 29657. » Three government notices have been published, i.e. GN R 150 (Commencement of Threatened and Protected Species Regulations, 2007), GN R 151 (Lists of critically endangered, vulnerable and protected species) and GN R 152 (Threatened or Protected Species Regulations). 	Department of Environmental Affairs	Not likely to be required for those areas which have been transformed. A permit will be applied for should there be an impact on any species which are protected or endangered. In addition, a weed control and management plan

Legislation	Applicable Requirements	Relevant Authority	Compliance Requirements
	<ul style="list-style-type: none"> » Provides for listing threatened or protected ecosystems, in one of four categories: critically endangered (CR), endangered (EN), and vulnerable (VU) or protected. The first national list of threatened terrestrial ecosystems has been gazetted, together with supporting information on the listing process including the purpose and rationale for listing ecosystems, the criteria used to identify listed ecosystems, the implications of listing ecosystems, and summary statistics and national maps of listed ecosystems (National Environmental Management: Biodiversity Act: National list of ecosystems that are threatened and in need of protection, (G 34809, GN 1002), 9 December 2011). » This Act also regulates alien and invader species. » Under this Act, a permit would be required for any activity which is of a nature that may negatively impact on the survival of a listed protected species. 		<p>must be implemented.</p>
<p>Conservation of Agricultural Resources Act (Act No 43 of 1983)</p>	<ul style="list-style-type: none"> » Prohibition of the spreading of weeds (S5) » Classification of categories of weeds & invader plants (Regulation 15 of GN R1048) & restrictions in terms of where these species may occur. » Requirement & methods to implement control measures for alien and invasive plant species (Regulation 15E of GN R1048). 	<p>Department of Agriculture, Forestry and Fisheries (DAFF)</p>	<p>This Act will find application throughout the life cycle of the project. In this regard, soil erosion prevention and soil conservation strategies must be developed and implemented. In addition, a weed control and management plan must be implemented.</p>
<p>National Forests Act (Act No. 84 of 1998)</p>	<p>According to this Act, the Minister has declared a tree, group of trees, woodland or a species of trees as protected. The prohibitions provide that 'no person may cut, damage, disturb, destroy or remove any protected tree, or collect, remove, transport, export,</p>	<p>Department of Agriculture, Forestry and Fisheries (DAFF)</p>	<p>There are no protected trees on the site.</p>

Legislation	Applicable Requirements	Relevant Authority	Compliance Requirements
	purchase, sell, donate or in any other manner acquire or dispose of any protected tree, except under a licence granted by the Minister’.		
National Veld and Forest Fire Act (Act 101 of 1998)	<p>In terms of S21 the applicant must ensure that the firebreak is wide and long enough to have a reasonable chance of preventing the fire from spreading, not causing erosion, and is reasonably free of inflammable material.</p> <p>In terms of S17, the applicant must have such equipment, protective clothing, and trained personnel for extinguishing fires.</p>	Department of Agriculture, Forestry and Fisheries (DAFF)	While no permitting or licensing requirements arise from this legislation, this act will find application during the construction and operational phase of the project.
Hazardous Substances Act (Act No 15 of 1973)	<p>This Act regulates the control of substances that may cause injury, or ill health, or death due to their toxic, corrosive, irritant, strongly sensitising or inflammable nature or the generation of pressure thereby in certain instances and for the control of certain electronic products. To provide for the rating of such substances or products in relation to the degree of danger; to provide for the prohibition and control of the importation, manufacture, sale, use, operation, modification, disposal or dumping of such substances and products.</p> <p>Group I and II: Any substance or mixture of a substance that might by reason of its toxic, corrosive etc., nature or because it generates pressure through decomposition, heat or other means, cause extreme risk of injury etc., can be declared as Group I or Group II substance</p> <p>Group IV: any electronic product; and</p> <p>Group V: any radioactive material.</p> <p>The use, conveyance, or storage of any hazardous substance (such as distillate fuel) is prohibited without an appropriate license being in force.</p>	Department of Health	It is necessary to identify and list all the Group I, II, III, and IV hazardous substances that may be on the site and in what operational context they are used, stored or handled. If applicable, a license is required to be obtained from the Department of Health.
National Environmental Management: Waste Act,	The Minister may by notice in the Gazette publish a list of waste management activities that have, or are likely to have, a detrimental	National Department of Water and	As no waste disposal site is to be associated with the

Legislation	Applicable Requirements	Relevant Authority	Compliance Requirements
2008 (Act No. 59 of 2008)	<p>effect on the environment.</p> <p>The Minister may amend the list by –</p> <ul style="list-style-type: none"> » Adding other waste management activities to the list. » Removing waste management activities from the list. » Making other changes to the particulars on the list. <p>In terms of the Regulations published in terms of this Act (GN 921), A Basic Assessment or Environmental Impact Assessment is required to be undertaken for identified listed activities.</p> <p>Any person who stores waste must at least take steps, unless otherwise provided by this Act, to ensure that:</p> <ul style="list-style-type: none"> » The containers in which any waste is stored, are intact and not corroded or in » any other way rendered unfit for the safe storage of waste; » Adequate measures are taken to prevent accidental spillage or leaking; » The waste cannot be blown away; » Nuisances such as odour, visual impacts and breeding of vectors do not arise; and » Pollution of the environment and harm to health are prevented. 	<p>Environmental Affairs</p> <p>Provincial Department of Environmental Affairs (general waste)</p>	<p>proposed project, no permit is required in this regard.</p> <p>Waste handling, storage and disposal during construction and operation is required to be undertaken in accordance with the requirements of the Act.</p> <p>The volumes of waste to be generated and stored on the site during construction and operation of the facility will not require a waste license (provided these remain below the prescribed thresholds).</p>
National Road Traffic Act (Act No 93 of 1996)	<ul style="list-style-type: none"> » The technical recommendations for highways (TRH 11): “Draft Guidelines for Granting of Exemption Permits for the Conveyance of Abnormal Loads and for other Events on Public Roads” outline the rules and conditions which apply to the transport of abnormal loads and vehicles on public roads and the detailed procedures to be followed in applying for exemption permits are 	<p>South African National Roads Agency Limited (national roads)</p> <p>Provincial Department of Transport</p>	<p>An abnormal load/vehicle permit may be required to transport the various components to site for construction. These include route clearances</p>

Legislation	Applicable Requirements	Relevant Authority	Compliance Requirements
	<p>described and discussed.</p> <ul style="list-style-type: none"> » Legal axle load limits and the restrictions imposed on abnormally heavy loads are discussed in relation to the damaging effect on road pavements, bridges, and culverts. » The general conditions, limitations, and escort requirements for abnormally dimensioned loads and vehicles are also discussed and reference is made to speed restrictions, power/mass ratio, mass distribution, and general operating conditions for abnormal loads and vehicles. Provision is also made for the granting of permits for all other exemptions from the requirements of the National Road Traffic Act and the relevant Regulations. 		and permits will be required for vehicles carrying abnormally heavy or abnormally dimensioned loads.
Provincial Legislation & Plans			
KwaZulu-Natal Nature Conservation Management Amendment Act, No. 5 of 1999:	This Act provides the institutional structure for nature conservation in Kwazulu-Natal; to establish control and monitoring body and mechanics, and to provide for matters incidental thereto.	KwaZulu-Natal Department Agriculture, Environmental Affairs and Rural Development (DAEA)	Refer to the Ecology Report - Appendix D1 for a list of species found in the study, although none of these species could be confirmed during the site visit as a result of the site conditions during the survey A permit will be applied for should there be any impact in the species which are in terms of this Act
KwaZulu-Natal Provincial Spatial Development Framework (Draft 2) (2011)	Provides a spatial interpretation of the Provincial Growth and Development Strategy to guide future land use and development	KwaZulu-Natal Department Agriculture, Environmental Affairs and Rural	No permitting or licensing requirements.

Legislation	Applicable Requirements	Relevant Authority	Compliance Requirements
		Development (DAEA)	
KwaZulu-Natal Provincial Growth and Development Strategy 2012-2030 (2012)	Provides a framework for integrated and sustainable growth and economic development for the Province and its people over the next ten years. It addresses the formulation of a common vision, goals and objectives of what should be achieved and how the provincial government and its social partners should achieve its objectives	KwaZulu-Natal Provincial Planning Commission	No permitting or licensing requirements.
KwaZulu-Natal Biodiversity Conservation Assessment Plan (2010)	<ul style="list-style-type: none"> » inform the development of the Provincial Biodiversity Sector plans, bioregional plans, and also be used to inform Spatial Development Frameworks (SDFs), Environmental Management Frameworks (EMFs), Strategic Environmental Assessments (SEAs) and in the Environmental Impact Assessment (EIA) process in the province. 	Ezemvelo KZN Wildlife	No permitting or licensing requirements.
Local Government			
Jozini Local Municipality IDP (2013-2014)	<ul style="list-style-type: none"> » Ensure the provision of services to communities in a sustainable manner » Promote safe and healthy environment 	Local Authorities	No permitting or licensing requirements.

MANAGEMENT PROGRAMME: PLANNING AND DESIGN CHAPTER 5

Overall Goal: undertake the planning and design phase in a way that:

- » Ensures that the design of the facility responds to the identified environmental constraints and opportunities.
- » Ensures that adequate regard has been taken of any landowner and community concerns and that these are appropriately addressed through design and planning (where appropriate).
- » Ensures that the best environmental options are selected for the linear components, including the access roads and power line alignments.
- » Enables the solar energy facility construction activities to be undertaken without significant disruption to other land uses and activities in the area.

In order to meet this goal, the following objectives have been identified, together with necessary actions and monitoring requirements.

5.1 Objectives

OBJECTIVE PD1: Ensure the facility design responds to identified environmental constraints and opportunities

In order to minimise impacts associated with the construction and operation of the facility, the following is required to be undertaken during the final design phase:

- » Geotechnical survey – this will investigate flood potential, foundation conditions, potential for excavations, and the availability of natural construction materials. This study will serve to inform the type of foundations required to be constructed (i.e. for the substation), and the extent of earthworks and compaction required in the establishment of the internal access roads.
- » A storm-water management plan – this will detail how storm-water runoff (i.e. over engineered hard surfaces) can be managed to reduce velocities and volumes of water that could lead to erosion and potential sedimentation of drainage systems.
- » Prior to any earthworks (including road construction) within areas of natural vegetation, a plant Search and Rescue program should be developed and implemented. The section below provides a guideline for the Search & Rescue

Plan on site and will need to be supplemented with the relevant methodology depending on the final placement of infrastructure.

The implementation of the EMPr will minimise and/or mitigate impacts on the environment, specifically on the sensitive drainage features located near to the project area (refer to Figure 1.2).

Project Component/s	<ul style="list-style-type: none"> » PV panels. » Substation. » Access roads. » Power line.
Potential Impact	» Impact on natural vegetation and the drainage line close to the project site(refer to Figure 1.2)
Activities/Risk Sources	» Positioning of all the facility components.
Mitigation: Target/Objective	<ul style="list-style-type: none"> » The design of the facility responds to the identified environmental constraints and opportunities. » Site sensitivities are taken into consideration and avoided as far as possible, thereby mitigating potential impacts.

Mitigation: Action/Control	Responsibility	Timeframe
Undertake a detailed geotechnical and ecological survey prior to the commencement of construction.	Geotechnical /ecologist specialist	Design
Avoid identified sensitive areas adjacent to the site within the final design of the facility (refer to Figure 1.2)	Engineering design consultant and Building Energy SpA and EPC	Design review
Consider and incorporate design level mitigation measures recommended by the specialists as detailed within the Basic Assessment Report and relevant appendices.	Engineering design consultant, solar component supplier, and Building Energy SpA and EPC	Design review
External access point and internal access road to be carefully planned to maximise road user safety.	Building Energy SpA Design engineer/ EPC Contractor and EPC	Design
Compile a comprehensive erosion and storm water management plan for hard surfaces as part of the final design of the project (refer to Appendix C for principles to be considered). This must include appropriate means for the handling of storm water within the site, e.g. separate clean and dirty water	Building Energy SpA design engineer and contractor and EPC	Design

Mitigation: Action/Control	Responsibility	Timeframe
streams around the plant, install stilling basins to capture large volumes of run-off, trapping sediments, and reduce flow velocities (i.e. water used when washing the panels).		
Use bird-friendly power line towers and conductor designs.	Building Energy SpA and EPC	Design
In designing the facility, use should be made of existing road infrastructure as far as possible. Where no road infrastructure exists, new roads should be placed within existing disturbed areas or management measures must be implemented to ensure minimum damage is caused to natural habitats.	Building Energy SpA/ Design engineer and EPC	Design phase
Roads must be designed so that changes to surface water runoff are avoided or minimised and erosion is not initiated.	Building Energy SpA/ Design engineer and EPC	Design phase
The facility should be designed in such a manner to allow surface and subsurface movement of water along drainage lines so as not to impede natural surface and subsurface flows. Drainage measures must promote the dissipation of storm water.	Building Energy SpA/ Design engineer and EPC	Design phase
Submit a final layout to the DEA prior to the commencement of construction	Building Energy SpA and EPC	Pre-construction
A traffic management plan must be prepared for site access roads to ensure no hazards result from increased traffic and that traffic flow is not adversely affected.	Building Energy SpA and EPC	Pre-Construction
Search and Rescue (S&R) of certain translocatable, selected plant species occurring in long term & permanent, hard surface development footprints (i.e. all buildings, new roads and tracks, laydown areas, and panel positions) should take place. All such development footprints must be surveyed and pegged out as soon as possible, and then a local horticulturist with Search and Rescue experience should be appointed to undertake the S&R. All rescued species should be bagged (and cuttings taken where appropriate) and kept in the horticulturist's or a designated on-site nursery, and should be returned to site once all construction is completed and rehabilitation of disturbed areas is required. Replanting should only occur in spring or early summer (i.e. November), once the first rains have fallen, in order to facilitate establishment.	Contractor and EPC	Prior to construction

Performance Indicator	» The design meets the objectives and does not degrade the environment.
------------------------------	---

	» Design and layouts respond to the mitigation measures and recommendations in the Basic Assessment Report.
Monitoring	» Review of the final layout by the Project Manager and the Environmental Control Officer (ECO) prior to the commencement of construction.

OBJECTIVE PD2: Ensure the selection of the best environmental option for the alignment of the power line and access roads

- » **Access Road** – The site is located west of both the town of Mkuze and the National Route 2 (N2). Access to the site is off the rural Provincial Main Road 234 (P234), this road is aligned in an east-west direction, crossing the N2, with Bangonomo to the east and Mkuze to the west. Where needed, existing roads will be upgraded.
- » **Power line** – overhead power line of approx. 500m to connect Mkuze Substation

Project Component/s	» Power line. » Access roads.
Potential Impact	» Route that degrades the environment unnecessarily, particularly with respect to visual aesthetics, loss of indigenous flora, and erosion.
Activities/Risk Sources	» Alignment of power line within corridor. » Alignment of access roads.
Mitigation: Target/Objective	» To ensure selection of best environmental option for alignment of linear infrastructure. » Environmental sensitivities are taken into consideration and avoided as far as possible, thereby mitigating potential impacts.

Mitigation: Action/Control	Responsibility	Timeframe
Ensure bird-friendly tower designs are implemented to minimise the risk of electrocutions.	Building Energy SpA and EPC	Design and Construction
Locate power line and access roads within disturbed corridors, as far as possible.	Building Energy SpA and EPC	Prior to submission of the final construction layout plan
Consider design level mitigation measures recommended by the specialists as detailed within the Basic Assessment report and relevant appendices.	Building Energy SpA and EPC	Design

Mitigation: Action/Control	Responsibility	Timeframe
Plan any new access roads according to contour lines to minimise cutting and filling operations.	Building Energy SpA and EPC	Design
Minimise the footprint of the PV facility and the associated infrastructure as far as possible.	Contractor and Building Energy SpA and EPC	Pre-construction

Performance Indicator	<ul style="list-style-type: none"> » Power line and road alignments meet environmental objectives. » Selected linear alignments that minimise any negative environmental impacts and maximise any benefits.
Monitoring	<ul style="list-style-type: none"> » Ensure that the design implemented meets the objectives and mitigation measures in the Basic Assessment Report through review of the design by the Project Manager, and the ECO prior to the commencement of construction.

OBJECTIVE PD3: Minimise storm water runoff (guideline for storm water management plan)

Management of storm water will be required during the construction phase of the facility. A detailed storm water management plan is required to be compiled as part of the final design to ensure compliance with applicable regulations and to prevent off-site migration of contaminated storm water or increased soil erosion. The section below provides a guideline for the management of storm water on site and will need to be supplemented with the relevant method statements during the construction phase of the facility.

Project Component/s	<ul style="list-style-type: none"> » Storm water management components. » Any hard engineered surfaces (i.e. access roads).
Potential Impact	<ul style="list-style-type: none"> » Poor storm water management and alteration of the hydrological regime (i.e. drainage lines located very close to the project area but outside the footprint).
Activities/Risk Sources	<ul style="list-style-type: none"> » Construction of the facility (i.e. placement of hard engineered surfaces).
Mitigation: Target/Objective	<ul style="list-style-type: none"> » Appropriate management of storm water to minimise impacts on the environment.

Mitigation: Action/Control	Responsibility	Timeframe
A Method Statement for the management of storm water which also considers the recommendations below is to be submitted to the ECO for review prior to commencement of construction activities.	Building Energy SpA and EPC	Pre-construction

Mitigation: Action/Control	Responsibility	Timeframe
Reduce the potential increase in surface flow velocities and the resultant impact on the localised drainage system as a result of increased sedimentation through the implementation of appropriate erosion management measures.	Building Energy SpA and EPC	Planning and design
Appropriately plan hard-engineered bank erosion protection structures.	Building Energy SpA and EPC	Planning and design
Ensure suitable handling of storm water within the site (i.e. separate clean and dirty water streams around the plant and install stilling basins to capture large volumes of run-off, trapping sediments and reduce flow velocities) through appropriate design of the facility.	Building Energy SpA and EPC	Construction and operation
Design measures for storm water management need to allow for surface and subsurface movement of water along drainage lines so as not to impede natural surface and subsurface flows.	Building Energy SpA and EPC	Planning and design

Performance Indicator	<ul style="list-style-type: none"> » Appropriate storm water management measures included within the facility design. » Sound water quality and quantity management during construction and operation.
Monitoring	<ul style="list-style-type: none"> » Devise a suitable surface water quality monitoring plan for implementation during construction and operation.

OBJECTIVE PD4: To ensure effective communication mechanisms

On-going communication with affected and surrounding landowners is important to maintain during the construction and operational phases of the solar energy facility. Any issues and concerns raised should be addressed as far as possible in as short a timeframe as possible.

Project component/s	<ul style="list-style-type: none"> » Solar energy facility and associated infrastructure
Potential Impact	<ul style="list-style-type: none"> » Impacts on affected and surrounding landowners and land uses
Activity/risk source	<ul style="list-style-type: none"> » Activities associated with solar energy facility construction » Activities associated with solar energy facility operation
Mitigation: Target/Objective	<ul style="list-style-type: none"> » Effective communication with affected and surrounding landowners » Addressing of any issues and concerns raised as far as possible in as short a timeframe as possible

Mitigation: Action/control	Responsibility	Timeframe
Compile and implement a grievance mechanism procedure for the public (as outlined in Appendix A) to be implemented during both the construction and operational phases of the facility. This procedure should include details of the contact person who will be receiving issues raised by interested and affected parties, and the process that will be followed to address issues.	Building Energy SpA and EPC	Pre-construction (construction procedure) Pre-operation (operation procedure)
Develop and implement a grievance mechanism for the construction, operational and closure phases of the project for all employees, contractors, subcontractors and site personnel. This procedure should be in line with the South African Labour Law.	Building Energy SpA/ Contractor and EPC	Pre-construction (construction procedure) Pre-operation (operation procedure)
Liaison with landowners is to be undertaken prior to the commencement of construction in order to provide sufficient time for them to plan agricultural activities.	Building Energy SpA/ Contractor and EPC	Pre-construction
The terms of this EMPr and the Environmental Authorisation (once issued) must be included in all tender documentation and Contractors contracts	Building Energy SpA and EPC	Tender process

Performance Indicator	» Effective communication procedures in place.
Monitoring	» An incident reporting system should be used to record non-conformances to the EMPr.

MANAGEMENT PROGRAMME: CONSTRUCTION

CHAPTER 6

Overall Goal: Undertake the construction phase in a way that:

- » Ensures that construction activities are appropriately managed in respect of environmental aspects and impacts.
- » Enables construction activities to be undertaken without significant disruption to other land uses and activities in the area, in particular concerning noise impacts, farming practices, traffic and road use, and effects on local residents.
- » Minimises the impact on indigenous natural vegetation
- » Minimises impacts on fauna using the site.
- » Minimises the impact on heritage sites.

6.1 Institutional Arrangements: Roles and Responsibilities for the Construction Phase

As the proponent, Building Energy SpA must ensure that the implementation of the facility complies with the requirements of all environmental authorisations and permits, and obligations emanating from other relevant environmental legislation. This obligation is partly met through the development of the EMPr, and the implementation of the EMPr through its integration into the contract documentation. Building Energy SpA will retain various key roles and responsibilities during the construction of the facility.

OBJECTIVE C1: Establish clear reporting, communication, and responsibilities in relation to overall implementation of the EMPr

Formal responsibilities are necessary to ensure that key procedures are executed. Specific responsibilities of the Project Manager; Site Manager; Safety, Health and Environment Representative; Environmental Control Officer (ECO) and Contractor for the construction phase of this project are as detailed below.

6.1.1 Roles and Responsibilities for the Construction Phase of the Solar Energy Facility

As the Proponent, Building Energy must ensure that the implementation of the solar energy facility complies with the requirements of any and all environmental authorisations and permits, and obligations emanating from other relevant environmental legislation. This obligation is partly met through the development of the EMPr, and the implementation of the EMPr through its integration into the

contract documentation. Building Energy will retain various key roles and responsibilities during the construction of the solar energy facility. These are outlined below.

Specific responsibilities of the Owner's Representatives; Environmental Control Officer and EPC Contractor for the construction phase of this project are as detailed below.

The **Owner's Representative (i.e. General Manager and/or Site Manager)** will:

- » Ensure all specifications and legal constraints specifically with regards to the environment are highlighted to the Contractor(s) so that they are aware of these.
- » Ensure that Building Energy and its Contractor(s) are made aware of all stipulations within the EMPr.
- » Ensure that the EMPr is correctly implemented throughout the project cycle by means of site inspections and meetings. This will be documented as part of the site meeting minutes.
- » Be fully knowledgeable with the EIA for the project, the EMPr, the conditions of the facility Environmental Authorisation, and all relevant environmental legislation.

The **Owner's Engineer (i.e. Project Manager and/or Site manager)** will:

- » Be fully knowledgeable with the contents and conditions of the facility Environmental Authorisation.
- » Be fully knowledgeable with the contents of the EMPr.
- » Have overall responsibility for the implementation of the EMPr .
- » Ensure there is communication with the Project Manager, the ECO, and relevant discipline engineers on matters concerning the environment.
- » Ensure that no actions are taken which will harm or may indirectly cause harm to the environment, and take steps to prevent pollution on the site.
- » Confine activities to the demarcated construction site.

An independent² **Environmental Control Officer (ECO)** must be appointed by the project proponent prior to the commencement of any authorised activities and will be responsible for monitoring, reviewing and verifying compliance by the Contractor with the environmental specifications of the EMPr and the conditions of the Environmental Authorisation. Accordingly, the ECO will:

- » Be fully knowledgeable with the contents with the EIA.
- » Be fully knowledgeable with the contents with the conditions of the facility Environmental Authorisation.

²A person who is not from any of the parties involved in the design or construction of the Solar Energy Facility

- » Be fully knowledgeable with the contents with the EMPr.
- » Be fully knowledgeable with the contents with all relevant environmental legislation, and ensure compliance with them.
- » Ensure that the contents of this document are communicated to the Contractor site staff and that the Site Manager and Contractor are constantly made aware of the contents through discussion.
- » Ensure that the compliance of the EMPr is monitored through regular and comprehensive inspection of the site and surrounding areas.
- » Ensure that if the EMPr conditions or specifications are not followed then appropriate measures are undertaken to address this.
- » Monitoring and verification must be implemented to ensure that environmental impacts are kept to a minimum, as far as possible.
- » Ensure that the Site Manager has input into the review and acceptance of construction methods and method statements.
- » Ensure that activities on site comply with all relevant environmental legislation.
- » Ensure that appropriate measures are undertaken to address any non-compliances recorded.
- » Ensure that a removal is ordered of any person(s) and/or equipment responsible for any contravention of the specifications of the EMPr.
- » Ensure that the compilation of progress reports for submission to the Project Manager, with input from the Site Manager, takes place on a regular basis, including a final post-construction audit.
- » Ensure that there is communication with the Site Manager regarding the monitoring of the site.
- » Ensure that any non-compliance or remedial measures that need to be applied are reported.
- » Independently report to DEA in terms of compliance with the specifications of the EMPr and conditions of the facility Environmental Authorisation .
- » Keep record of all activities on site, problems identified, transgressions noted and a task schedule of tasks undertaken by the ECO.

Contractors and Service Providers: It is important that contractors are aware of the responsibilities in terms of the relevant environmental legislation and the contents of this EMP. The contractor is responsible for informing employees and sub-contractors of their environmental obligations in terms of the environmental specifications, and for ensuring that employees are adequately experienced and properly trained in order to execute the works in a manner that will minimise environmental impacts. The contractor's obligations in this regard include the following:

- » Employees must have a basic understanding of the key environmental features of the construction site and the surrounding environment.
- » A copy of the EMPr must be easily accessible to all on-site staff members.

- » Employees must be familiar with the requirements of this EMPr and the environmental specifications as they apply to the construction of the proposed facility.
- » Prior to commencing any site works, all employees and sub-contractors must have attended an environmental awareness training course which must provide staff with an appreciation of the project's environmental requirements, and how they are to be implemented.
- » Staff will be informed of environmental issues as deemed necessary by the ECO.

All contractors (including sub-contractors and staff) and service providers are ultimately responsible for:

- » Ensuring adherence to the environmental management specifications.
- » Ensuring that appropriate Method Statements are drafted submitted to the Site Manager (and ECO) for approval before any work is undertaken.
- » Ensuring that any instructions issued by the Site Manager on the advice of the ECO are adhered to.
- » Ensuring that a report is tabled at each site meeting, which will document all incidents that have occurred during the period before the site meeting.
- » Ensuring that a register is kept in the site office, which lists all transgressions issued by the ECO.
- » Ensuring that a register of all public complaints is maintained.
- » Ensuring that all employees, including those of sub-contractors receive training before the commencement of construction in order that they can constructively contribute towards the successful implementation of the EMP (i.e. ensure their staff are appropriately trained as to the environmental obligations).

Environmental officer:

- » Ensure that environmental issues receive adequate attention in the site induction training
- » prepare and conduct awareness training (e.g. posters, tool box talks, signage)
- » conduct monthly observation and inspection and audit of all work places
- » monitor Contractor's compliance with EA, EMP, and any permits and licenses on site
- » conduct daily observations and monthly environmental audits of all Contractor's and work areas
- » ensure that all environmental monitoring programmes are carried out according to protocols and schedules
- » monitoring of completed work (e.g. areas top-soiled, re-vegetated, stabilised etc.)

- » maintain site documentation related to environmental management (permits, CEMP, method statements, EA, reports, audits, monitoring results, receipts for waste removal etc.)
- » Inspect and report on environmental incidents and check corrective action
- » keep a regular photographic record of all environmental incidents
- » management of complaints register
- » review and of method statements prepared by contractors
- » audit site performance against environmental method statements

6.1.2. Roles and Responsibilities for the Operation Phase of the Solar Energy Facility

Formal responsibilities are necessary to ensure that key procedures are executed. Specific responsibilities of Solar Energy Facility Operations Manager, and Environmental Manager for the operation phase of this project are detailed below.

The **Facility Manager** will:

- » Ensure that adequate resources (human, financial, technology) are made available and appropriately managed for the successful implementation of the operational EMPr.
- » Conduct annual basis reviews of the EMPr to evaluate its effectiveness.
- » Take appropriate action as a result of findings and recommendations in management reviews and audits.
- » Provide forums to communicate matters regarding environmental management.

The **Environmental Manager** will:

- » Develop and Implement an Environmental Management System (EMS) for the solar energy facility and associated infrastructure.
- » Manage and report on the facility's environmental performance.
- » Maintain a register of all known environmental impacts and manage the monitoring thereof.
- » Conduct internal environmental audits and co-ordinate external environmental audits.
- » Liaise with statutory bodies such as the National and Provincial Department of Environmental Affairs (DEA) on environmental performance and other issues.
- » Conduct environmental training and awareness for the employees who operate and maintain the solar energy facility.
- » Compile environmental policies and procedures.
- » Liaise with interested and affected parties on environmental issues of common concern.
- » Track and control the lodging of any complaints regarding environmental matters.

6.2 Objectives

In order to meet the overall goal for construction, the following objectives, actions, and monitoring requirements have been identified.

OBJECTIVE C2: Minimise impacts related to inappropriate site establishment

The movement of workers on site and layout of the construction camp needs to be well management in order to reduce the potential for environmental impacts.

Project Component/s	<ul style="list-style-type: none"> » Area infrastructure (i.e. PV panels, and substation). » Linear infrastructure (i.e. power line, and access roads).
Potential Impact	<ul style="list-style-type: none"> » Hazards to landowners and public. » Damage to indigenous natural vegetation. » Loss of threatened plant species
Activities/Risk Sources	<ul style="list-style-type: none"> » Open excavations (foundations and cable trenches). » Movement of construction vehicles in the area and on-site.
Mitigation: Target/Objective	<ul style="list-style-type: none"> » To secure the site against unauthorised entry. » To protect members of the public/landowners/residents. » No loss of or damage to sensitive vegetation in areas outside the immediate development footprint.

Mitigation: Action/Control	Responsibility	Timeframe
Secure site, working areas and excavations in an appropriate manner, as agreed with the ECO.	Contractor and EPC	Site establishment, and duration of construction
Where necessary to control access, fence, and secure area (especially relevant to no-go areas).	Contractor and EPC	Site establishment, and duration of construction
Contractors and construction workers must be adequately informed of any the drainage line located outside the project site within the surrounding areas.	Contractor and EPC	Construction
Adequate measures must be implemented to prevent unauthorised access to the working area and the internal access/haul routes.	Contractor and EPC	Site establishment, and duration of construction
Fence and secure contractor's equipment camp.	Contractor and EPC	Site establishment
The siting of the construction equipment camp/s must take cognisance of any sensitive areas identified by	Contractor and EPC	Pre-construction

Mitigation: Action/Control	Responsibility	Timeframe
the Basic Assessment studies (as reflected in Figure 1.2).		
Establish and maintain appropriately bunded areas for storage of hazardous materials (i.e. fuel to be required during construction).	Contractor and EPC	Site establishment
All unattended open excavations shall be adequately demarcated and/or fenced.	Contractor and EPC	Site establishment, and duration of construction
Establish and maintain the necessary ablution facilities with chemical toilets and provide adequate sanitation facilities and ablutions for construction workers (1 toilet per every 15 workers) at appropriate locations on site.	Contractor and EPC	Site establishment, and duration of construction
Ablution or sanitation facilities should not be located within 100 m from a watercourse (if any) including drainage lines.	Contractor and EPC	Site establishment, and duration of construction
Supply adequate waste collection bins at site where construction is being undertaken. Separate bins should be provided for general and hazardous waste. As far as possible, provision should be made for separation of waste for recycling.	Contractor and EPC	Site establishment, and duration of construction
The Contractor must take all reasonable measures to ensure the safety of the public in the surrounding area. Where the public could be exposed to danger by any of the works or site activities, the contractor must, as appropriate, provide suitable flagmen, barriers and/or warning signs in English, Afrikaans and any other relevant local languages, all to the approval of the Site Manager.	Contractor and EPC	Site establishment, and duration of construction

Performance Indicator	<ul style="list-style-type: none"> » Site is secure and there is no unauthorised entry. » No members of the public/ landowners injured as a result of construction activities » Appropriate and adequate waste management and sanitation facilities provided at construction site.
Monitoring	<ul style="list-style-type: none"> » An incident reporting system should be used to record non-conformances to the EMPr. » ECO to monitor all construction areas on a continuous basis until all construction is completed. Non-conformances will be immediately reported to the site manager.

OBJECTIVE C3: Appropriate management of the construction site and construction workers

The construction phase of the PV facility is expected to extend over a period of 8-12 months and create approximately 80 employment opportunities. Ideally low skilled and semi-skilled positions will be filled by locals living in and around the study area (from towns such as Mkuze). This will however be dependent on the skills availability in the area.

Project Component/s	» Area and linear infrastructure.
Potential Impact	<ul style="list-style-type: none"> » Damage to indigenous natural vegetation and sensitive areas. » Damage to and/or loss of topsoil (i.e. pollution, compaction etc.). » Impacts on the surrounding environment due to inadequate sanitation and waste removal facilities. » Pollution/contamination of the environment.
Activities/Risk Sources	<ul style="list-style-type: none"> » Vegetation clearing and levelling of equipment storage area/s. » Access to and from the equipment storage area/s. » Ablution facilities. » Contractors not aware of the requirements of the EMP, leading to unnecessary impacts on the surrounding environment.
Mitigation: Target/Objective	<ul style="list-style-type: none"> » Limit equipment storage within demarcated designated areas. » Ensure adequate sanitation facilities and waste management practices. » Ensure appropriate management of actions by on-site personnel in order to minimise impacts to the surrounding environment.

Mitigation: Action/Control	Responsibility	Timeframe
As far as possible, minimise vegetation clearing and levelling for equipment storage areas.	Contractor and EPC	Site establishment, and during construction
Rehabilitate all disturbed areas at the construction equipment camp to pre-construction conditions as soon as construction is complete within an area.	Contractor and EPC	Duration of Contract
Ensure waste removal facilities are maintained and emptied on a regular basis.	Contractor and EPC	Site establishment, and duration of construction
Ensure that all personnel have the appropriate level of environmental awareness and competence to ensure continued environmental due diligence and on-going minimisation of environmental harm. This can be	Contractor and EPC	Duration of construction

Mitigation: Action/Control	Responsibility	Timeframe
achieved through the provision of appropriate environmental awareness training to all personnel. Records of all training undertaken must be kept.		
Contractors must use chemical toilets/ablution facilities situated at designated areas of the site; no ablution activities will be permitted outside the designated areas. These facilities must be regularly serviced by appropriate contractors. A minimum of one toilet shall be provided per 15 persons at each working area such as the Contractor's camp.	Contractor and sub-contractor/s and EPC	Duration of contract
Cooking and eating of meals must take place in a designated area. No fires must be allowed on site. No firewood or kindling may be gathered from the site or surrounds.	Contractor and sub-contractor/s and EPC	Duration of contract
All litter must be deposited in a clearly marked, closed, weather and animal-proof disposal bin in the construction area. Particular attention needs to be paid to food waste.	Contractor and sub-contractor/s and EPC	Duration of contract
No one other than the ECO or personnel authorised by the ECO may disturb flora or fauna outside of the demarcated construction area/s.	Contractor and sub-contractor/s and EPC	Duration of contract
Fire fighting equipment and training must be provided before the construction phase commences.	Contractor and sub-contractor/s and EPC	Duration of contract
Draft and implement a Code of conduct for construction workers.	Contractor and sub-contractor/s and EPC	Pre-construction
Contractors must ensure that all workers are informed at the outset of the construction phase of the conditions contained in the Code of Conduct.	Contractor and sub-contractor/s and EPC	Construction
On completion of the construction phase, all construction workers must leave the site within one week of their contract ending.	Contractor and sub-contractor/s and EPC	Construction
Develop and implement a grievance mechanism for the construction, operational and closure phases of the project for all employees, contractors, subcontractors and site personnel. This procedure should be in line with the South African Labour Law.	Building Energy SpA/ Contractor and EPC	Pre-construction

Performance Indicator	» Ablution and waste removal facilities are in a good working order and do not pollute the environment due to
------------------------------	---

	<p>mismanagement.</p> <ul style="list-style-type: none"> » All areas are rehabilitated promptly after construction in an area is complete. » Excess vegetation clearing and levelling is not undertaken. » No complaints regarding contractor behaviour or habits. » Appropriate training of all staff is undertaken prior to them commencing work on the construction site. » Code of Conduct drafted before commencement of construction phase.
Monitoring	<ul style="list-style-type: none"> » Regular audits of the construction camps and areas of construction on site by the ECO. » Proof of disposal of sewage at an appropriate wastewater treatment works. » An incident reporting system should be used to record non-conformances to the EMPr. » Observation and supervision of Contractor practices throughout construction phase by the ECO. » Complaints will be investigated and, if appropriate, acted upon. » An incident reporting system will be used to record non-conformances to the EMPr.

OBJECTIVE C4: Maximise local employment and business opportunities associated with the construction phase

Although limited, employment opportunities could be created during the construction phase (i.e. approximately 80), specifically for semi-skilled and unskilled workers.

Project Component/s	<ul style="list-style-type: none"> » Construction and establishment activities associated with the establishment of the PV facility, including infrastructure etc.
Potential Impact	<ul style="list-style-type: none"> » The opportunities and benefits associated with the creation of local employment and business should be maximised.
Activities/Risk Sources	<ul style="list-style-type: none"> » The employment of outside contractors to undertake the work and who make use of their own labour will reduce the employment and business opportunities for locals. Employment of local labour will maximise local employment opportunities.
Mitigation: Target/Objective	<ul style="list-style-type: none"> » Aim to employ the majority of the low-skilled workers from the local area.

Mitigation: Action/Control	Responsibility	Timeframe
Attempt to employ a majority of the low-skilled workers from the local area.	Contractors and EPC	Duration of construction
Where required, implement appropriate	Building Energy	Programmes to be

Mitigation: Action/Control	Responsibility	Timeframe
training and skills development programmes prior to the initiation of the construction phase to ensure that local employment target is met.	SpA and EPC	initiated prior to the initiation of the construction phase
Skills audit to be undertaken to determine training and skills development requirements.	Building Energy SpA and EPC	Pre-construction
Develop a database of local BEE service providers and ensure that they are informed of tenders and job opportunities.	Building Energy SpA and EPC	Pre-construction
Identify potential opportunities for local businesses.	Building Energy SpA and EPC	

Performance Indicator	<ul style="list-style-type: none"> » Employment and business policy document that sets out local employment and targets completed before construction phase commences; » Majority of low skilled labour locally sourced. » Database of potential local BEE services providers in place before construction phase commences. » Skills audit to determine need for training and skills development programme undertaken prior to commencement of construction phase.
Monitoring	<ul style="list-style-type: none"> » Building Energy SpA and or appointed ECO must monitor indicators listed above to ensure that they have been met for the construction phase.

OBJECTIVE C5: Minimise impacts related to traffic management and transportation of equipment and materials to site (Traffic Management and Transportation Plan)

The construction phase of the project will be the most significant in terms of generating traffic impacts; resulting from the transport of equipment and materials and construction crews to the site and the return of the vehicles after delivery of materials. Potential impacts associated with transportation and access relate to works within the site boundary and external works outside the site boundary.

The site is located west of both the town of Mkuze and the National Route 2 (N2). Access to the site is off the rural Provincial Main Road P234. This road is aligned in an east-west direction, crossing the N2, with Bhanganomo to the west and Mkuze to the east.

The section below provides a guideline for the Traffic Management and Transportation Plan on site and will need to be supplemented with the relevant final transport plan devised by the EPC partner during the final design phase of the facility.

Project Component/s	» Delivery of any component required within the construction phase.
Potential Impact	<ul style="list-style-type: none"> » Impact of heavy construction vehicles on road surfaces, and possible increased risk in accidents involving people and animals. » Traffic congestion, particularly on narrow roads or on road passes where overtaking is not permitted. » Deterioration of road pavement conditions (both surfaced and gravel road) due to high traffic volumes and abnormal loads.
Activities/Risk Sources	<ul style="list-style-type: none"> » Construction vehicle movement. » Speeding on local roads. » Degradation of local road conditions. » Site preparation and earthworks. » Foundations or plant equipment installation. » Transportation of ready-mix concrete from off-site batching plant to the site. » Mobile construction equipment movement on-site. » Power line and substation construction activities.
Mitigation: Target/Objective	<ul style="list-style-type: none"> » Minimise impact of traffic associated with the construction of the facility on local traffic volume, existing infrastructure, property owners, animals, and road users. » To minimise potential for negative interaction between pedestrians or other road and traffic associated with the facility construction » To ensure all vehicles are roadworthy and all materials/equipment are transported appropriately and within any imposed permit/licence conditions

Mitigation: Action/Control	Responsibility	Timeframe
The contractor's plans, procedures and schedules regarding the construction activities should be communicated with affected parties prior to the commencement of construction activities on site.	Contractor and EPC	Pre-construction
Source general construction material and goods locally where available to limit transportation over long distances.	Contractor and EPC	Pre-construction and construction
Appropriate dust suppression techniques must be implemented to minimise dust from gravel roads.	Contractor and EPC	Construction
Construction vehicles and those transporting materials and goods should be inspected by the contractor or a sub-contractor to ensure that these are in good	Contractor and EPC	Construction

Mitigation: Action/Control	Responsibility	Timeframe
working order and not overloaded.		
Strict vehicle safety standards should be implemented and monitored.	Contractor and EPC	Construction
All relevant permits for abnormal loads must be applied for from the relevant authority.	Contractor (or appointed transportation contractor) and EPC	Pre-construction
A designated access to the proposed site must be created to ensure safe entry and exit.	Contractor and EPC	Pre-construction
No deviation from approved transportation routes must be allowed, unless roads are closed for whatever reason outside the control of the contractor.	Contractor and EPC	Duration of contract
Appropriate road management strategies must be implemented on external and internal roads with all employees and contractors required to abide by standard road and safety procedures.	Contractor (or appointed transportation contractor) and EPC	Pre-construction
Any traffic delays because of construction traffic must be co-ordinated with the appropriate authorities.	Contractor and EPC	Duration of contract
The movement of all vehicles within the site must be on designated roadways.	Contractor and EPC	Duration of contract
Signage must be established and maintained at appropriate points warning of turning traffic and the construction site (all signage to be in accordance with prescribed standards).	Contractor and EPC	Duration of contract
Appropriate maintenance of all vehicles of the contractor must be ensured.	Contractor and EPC	Duration of contract
All vehicles of the contractor travelling on public roads must adhere to the specified speed limits and all drivers must be in possession of an appropriate valid driver's license.	Contractor and EPC	Duration of contract
Keep new hard road surfaces as narrow as possible.	Contractor and EPC	Duration of contract
Signs must be placed along construction roads within the site to identify speed limits, travel restrictions and other standard traffic control information.	Contractor and EPC	Duration of contract

Performance Indicator	<ul style="list-style-type: none"> » Vehicles keeping to the speed limits. » Vehicles are in good working order and safety standards are implemented. » Local residents and road users are aware of vehicle movements and schedules. » No construction traffic related accidents are experienced. » Local road conditions and road surfaces are up to standard.
------------------------------	--

	» Complaints of residents are not received (e.g. concerning the speeding of heavy vehicles).
Monitoring	» Developer and or appointed ECO must monitor indicators listed above to ensure that they have been implemented.

OBJECTIVE C6: To avoid and or minimise the potential impacts of safety, noise and dust and damage to roads caused by construction vehicles during the construction phase

During the construction phase, limited gaseous or particulate emissions are anticipated from exhaust emissions from construction vehicles and equipment on-site, as well as vehicle entrained dust from the movement of vehicles on the main and internal access roads.

Project Component/s	» Construction and establishment activities associated with the establishment of the PV facility, including infrastructure etc.
Potential Impact	» Heavy vehicles can generate noise and dust impacts. Movement of heavy vehicles can also damage roads.
Activities/Risk Sources	» The movement of heavy vehicles and their activities on the site can result in noise and dust impacts and damage roads.
Mitigation: Target/Objective	» To avoid and or minimise the potential noise and dust impacts associated with heavy vehicles, and minimise damage to roads.

Mitigation: Action/Control	Responsibility	Timeframe
Implement appropriate dust suppression measures for gravel roads and ensure that vehicles used to transport building materials are fitted with tarpaulins or covers.	Contractors and EPC	Duration of Construction
Ensure that all vehicles are road-worthy; drivers are qualified and are made aware of the potential noise, dust and safety issues.	Contractors and EPC	Duration of Construction
Ensure that drivers adhere to speed limits. Vehicles should be fitted with recorders to record when vehicles exceed the speed limit.	Contractors and EPC	Duration of Construction
Ensure that damage to roads attributable to the construction activities is repaired before completion of construction phase.	Contractors and EPC	Duration of Construction

Performance Indicator	<p>» Dust suppression measures implemented for all areas that require such measures during the construction phase Drivers made aware of the potential safety issues and enforcement of strict speed limits when they are employed.</p> <p>» Road worthy certificates in place for all construction vehicles at</p>
------------------------------	--

	outset of construction phase and up-dated on a monthly basis.
Monitoring	» Building Energy SpA and/or appointed ECO must monitor indicators listed above to ensure that they have been met for the construction phase.

OBJECTIVE C7: Minimise the impacts on and loss of indigenous vegetation and faunal habitat

Terrestrial habitats: The study area is characterised by woody grasslands which, according to Mucina and Rutherford (2006), are located within the Zululand Lowveld vegetation type and are listed as Vulnerable. The Biodiversity Act (No 10 of 2004) (Amendment December 2011), lists 225 threatened ecosystems based on vegetation type (Vegmap). This vegetation type, part of the Savanna Biome is listed by this Act as Vulnerable. This according to the SANBI data, is due to the fact this vegetation type is favoured by Black Rhino (KZN 41) habitat within the region. Several of the listed mammal species are found in the Zululand Rhino Reserve (Rhino, Leopard, Lion and Cheetah) south of the site. This reserve is found within the same vegetation type as the study area.

Aquatic environment: A number of watercourses and drainage lines occur adjacent to the site, mostly associated with the Pongola River (W44E quaternary catchment) and Mkuze River catchments (W31H quaternary catchment). However the site contained no waterbodies or watercourses and thus has no connection with any aquatic environments, the closest being a small drainage line 200m to the south east.

Biodiversity conservation plans: The study area was characterised as Irreplaceable, which is largely due to the habitat being preferred by Black Rhino. Several other plants, mammals and insects are also with Conservation Concern also utilising this habitat, which has increased the value of the region. The Maputaland-Pondoland-Albany Hotspot (MPAH) spans parts of South Africa, Swaziland and Mozambique. In southern Africa, it is second to the Cape Floristic Region in floristic diversity. A systematic conservation plan was implemented for the Maputaland-Pondoland-Albany Hotspot in order to identify priority areas for conservation. The biodiversity map delineates 72 key biodiversity areas (KBA) and 12 conservation corridors. Of the 72 key biodiversity areas, the study area is located in the Zululand KBA

Species of Conservation Concern (Threatened and / or Protected): A list of potential Species of Conservation Concern was derived from the various databases (SANBI, 2010), which incorporate Threatened species and species listed under the National Biodiversity Act for KZN. A number of trees, protected under the National Forest Act, and only some of the species protected via the provincial legislation, are contained in the listing.

None of these species could be confirmed during the site visit as a result of the site conditions during the survey.

Project Component/s	» All activities which require or result in the clearing of or impact to vegetation – such as site clearing, operation of heavy machinery, road construction etc
Potential Impact	» Loss of intact vegetation » Loss of individuals of listed plant species » Erosion » Alien plant invasion
Activity/Risk Source	» Construction activities, especially for roads, PV arrays, substations and other hard infrastructure. .
Mitigation: Target/Objective	» Minimum disturbance footprint at site » No loss of individuals of protected plant species » No alien plant invasion » Minimal soil erosion » Rehabilitation of disturbed areas

Mitigation: Action/Control	Responsibility	Timeframe
Demarcate important or sensitive areas as no-go areas.	Contractor	Construction
Ensure that rehabilitation plan is followed so that bare areas are not exposed for prolonged periods with likely erosion impacts	Contractor	Construction
Monitor the site for erosion problems and identify areas where additional intervention such as additional revegetation or erosion control such as silt traps may be necessary	Contractor	Construction
If an activity will mechanically disturb below surface in any way, then the upper 10-30 cm of topsoil (depending on the specific topsoil depth at the site of disturbance) should first be stripped from the entire disturbed surface and stockpiled separately for re-use during rehabilitation.	Construction managers /	Duration of the construction phase
Topsoil stockpiles must be conserved against losses through erosion by establishing vegetation cover on them.	Construction managers / Environmental manager	Duration of the construction phase
Dispose of all subsurface spoils from excavations where they will not impact on agricultural land (for example on road surfaces or within a waste disposal facility) or where they can be effectively covered with topsoil and rehabilitated	Construction managers / Environmental manager	Duration of the construction phase
The stockpiled topsoil must be evenly spread over the entire disturbed surface following the completion	Construction managers /	During rehabilitation

Mitigation: Action/Control	Responsibility	Timeframe
of construction in an area	Environmental manager	after construction / operation.

Performance Indicator	<ul style="list-style-type: none"> » No damage and siltation of local drainage systems » An acceptable cover of perennial grass has been established across the majority of cleared and disturbed areas following rehabilitation after completion of the construction period
Monitoring	<p>The ECO must:</p> <ul style="list-style-type: none"> » Monitor for erosion problems on a monthly basis during construction » Monitor for alien species presence at least once every 6 months during construction » Evaluate and record progress of rehabilitation and the establishment of an effective perennial plant cover within disturbed parts of the site » Keep a log of all incidents where the demarcated construction areas were breached and the remedial actions taken to rectify any damage done.

OBJECTIVE C8: Minimise the establishment and spread of alien invasive plants (Invasive Plant Management Plan) and manage indigenous invasive plants

On-going alien and invasive plant monitoring and removal should be undertaken on all areas of natural vegetation within the project lease area on an annual basis. The section below provides a guideline for the Invasive Plant Management Plan and should be implemented together with consideration of the principles contained in the Department of Water Affairs: Working for Water Programme (refer to **Appendix B**).

Project Component/s	» Any infrastructure or activity that will result in disturbance
Potential Impact	» Invasion of natural vegetation surrounding the site by declared weeds or invasive alien species.
Activities/Risk Sources	» Construction,
Mitigation: Target/Objective	» There is a target of no alien plants within the project control area during the construction and operation phases, and no additional thickening of indigenous invasive shrubs.

Mitigation: Action/Control	Responsibility	Timeframe
Avoid creating conditions in which alien plants may	Contractor and	Construction

Mitigation: Action/Control	Responsibility	Timeframe
become established: » Keep disturbance of indigenous vegetation to a minimum. » Rehabilitate disturbed areas as quickly as possible. » Do not import soil from areas with alien plants. » Remove all alien plants from areas adjacent to or on frequently traversed access routes to prevent dispersal of regenerative material onto site	EPC	and operation
Establish an on-going monitoring programme to detect and quantify any alien species that may become established and identify the problem species (as per Conservation of Agricultural Resources Act and Biodiversity Act).	Contractor and EPC	Construction and operation
Immediately control any alien plants that become established using registered control methods.	Contractor and EPC	Construction
DWA approved methodology should be employed for all invasive clearing operations	Contractor and EPC	Construction

Performance Indicator	» For each invasive or alien species: number of plants and aerial cover of plants within project area and immediate surroundings is significantly reduced and alien species are absent from site.
Monitoring	» On-going monitoring of area by ECO during construction. » Bi-annual audit of project area and immediate surroundings by qualified botanist.

OBJECTIVE C9: Limit direct faunal impacts

Increased levels of noise, pollution, disturbance and human presence will be detrimental to fauna. Sensitive and shy fauna would move away from the area during the construction phase as a result of the noise and human activities present, while some slow-moving species would not be able to avoid the construction activities and might be killed. Some mammals or reptiles would be vulnerable to illegal collection or poaching during the construction phase as a result of the large number of construction personnel that are likely to be present.

Mucina and Rutherford (2006) listed this vegetation type as Vulnerable. This according to the SANBI data is due to the fact this vegetation type is favoured by *Diceros bicornis* or Black Rhino (KZN 41) as habitat within the region. Several of the listed mammal species are found in the Zululand Rhino Reserve (Rhino, Leopard, Lion and Cheetah) south of the site. While the Somkhanda Game Reserve directly adjacent to the site contains leopard, rhino, and buffalo and giraffe. Both these reserves are found within the same vegetation type as the

study area. No sensitive species, habitats or community types were observed directly within the proposed site, or road and power line alignments.

Project Component/s	» Operation of heavy machinery on site, construction activities and human presence
Potential Impact	» Loss of individuals of affected species due to operation of construction machinery as well as poaching and hunting risk from personnel.
Activity/Risk Source	» Habitat transformation & earth-moving during construction; presence of construction and operation personnel.
Mitigation: Target/Objective	» Low faunal impact, during construction and operation

Mitigation: Action/Control	Responsibility	Timeframe
Environmental induction for all staff » All staff at the site should undergo regular environmental induction training	Contractor/ECO	Construction & Operation
ECO to monitor and ban on hunting, collecting etc of all plants and animals or their products. » Site access should be controlled	Contractor	Construction
Speed limits to apply to all construction vehicles to reduce likelihood of collisions with fauna. » 20-30km/h is the recommended maximum for all vehicles at the site	Contractor	Construction
Dust suppression during construction.	Contractor	Construction

Performance Indicator	<ul style="list-style-type: none"> » Low mortality of fauna due to construction machinery and activities » No poaching etc of fauna by construction personnel during construction » Removal to safety of fauna encountered during construction
Monitoring	» Monitoring for compliance during the construction phase

OBJECTIVE C10: Minimise soil degradation and erosion (Erosion management Plan)

The land type of the site and surrounding area is Ea54. The soils of this land type are predominantly shallow to moderately deep, high clay content soils on underlying rock. The field investigation showed that the soils of the site are high clay content, moderately deep melanic soils predominantly of the Bonheim soil form, on underlying rock. These soils fall into the Melanic soil group according to the classification of Fey (2010). The land has a low water erosion hazard (class 1) and the lowest of all the wind erosion susceptibility classes.

The soil on site may be impacted in terms of:

- » Soil degradation including erosion (by wind and water) and subsequent deposition elsewhere is of a concern in areas that are underlain by fine grained soil which can be mobilised when disturbed, even on relatively low slope gradients (accelerated erosion).
- » Degradation of the natural soil profile due to excavation, removal of topsoil, stockpiling, wetting, compaction, pollution and other construction activities may affect soil forming processes and associated agricultural potential.

Management of erosion will be required during the construction phase of the facility. An erosion management plan is required to ensure compliance with applicable regulations and to prevent increased soil erosion and sedimentation of the downstream environment. The section below provides a guideline for the management of erosion on site and will need to be supplemented with the principles for erosion management contained in the Erosion Management plan included in **Appendix C**.

Project Component/s	<ul style="list-style-type: none"> » PV arrays and foundations to support them. » Substation. » Access roads. » Underground cabling. » Storage and maintenance facilities and foundations to support them. » Overhead power line and substation linking the facility to the electricity grid.
Potential Impact	<ul style="list-style-type: none"> » Soil degradation including erosion, dust and siltation. » Reduction in agricultural potential.
Activities/Risk Sources	<ul style="list-style-type: none"> » Earthworks & activity on site. » Rainfall and concentrated discharge causing water erosion of disturbed areas. » Wind - erosion of disturbed areas.
Mitigation: Target/Objective	<ul style="list-style-type: none"> » Minimise soil degradation (removal, excavation, mixing, wetting, compaction, pollution, etc.).

- » Minimise erosion.
- » Minimise sediment transport downstream (siltation).
- » Minimise dust pollution.

Mitigation: Action/Control	Responsibility	Timeframe
Identify construction areas for general construction work and restrict construction activity to these areas.	Contractor and EPC	At design stage and during construction
Prevent unnecessary destructive activity within construction areas (prevent over-excavations and double handling)	Contractor and EPC	During construction
Access roads to be carefully planned and constructed to minimise the impacted area and prevent unnecessary degradation of soil.	Contractor and EPC	At design stage and during construction
Dust control on site through implementation of appropriate measures (e.g. wetting or covering of cleared areas).	Contractor and EPC	Daily during construction
Minimise removal of vegetation which aids soil stability.	Contractor and EPC	Continuously during construction
Rehabilitate disturbance areas as soon as construction in an area is completed and the area is vacated.	Contractor and EPC	Continuously during and after construction
Soil conservation - stockpile topsoil for re-use in rehabilitation phase. Protect stockpile from erosion. Topsoil should be stockpiled below 2 m height and for as short a period as possible to ensure survival of the soil seed bank and other soil-borne organisms.	Contractor and EPC	Continuously during construction
Erosion control measures- run-off control and attenuation on slopes	Contractor and EPC	Erection: Before construction Maintenance: Duration of contract
Control depth of excavations and stability of cut faces/sidewalls.	Contractor and EPC	Before construction and maintenance over duration of contract
Reduce the potential increase in surface flow velocities and the resultant impact on the localised drainage system as a result of increased sedimentation through the implementation of appropriate erosion management	Contractor and EPC	Duration of contract

Mitigation: Action/Control	Responsibility	Timeframe
measures.		
Appropriately plan hard-engineered bank erosion protection structures.	Contractor and EPC	Before construction

Performance Indicator	<ul style="list-style-type: none"> » Only authorised activity outside construction areas. » No activity in no-go areas. » Acceptable level of soil erosion around site, as determined by ECO. » Acceptable level of sedimentation along drainage lines, as determined by ECO. » Acceptable state of excavations, as determined by ECO.
Monitoring	<ul style="list-style-type: none"> » Continuous inspections of the site by the ECO. » Monthly inspections of sediment control devices by the ECO. » Monthly inspections of surroundings, including drainage lines by the ECO. » Immediate reporting of ineffective sediment control systems by the ECO. » An incident reporting system will record non-conformances.

OBJECTIVE C11: Minimising the impact on heritage sites

The main cause of impacts to archaeological sites is physical disturbance of the material itself and its context. The heritage and scientific potential of an archaeological site is highly dependent on its geological and spatial context. This means that even though, for example a deep excavation may expose archaeological artefacts, the artefacts are relatively meaningless once removed from the area in which they were found. Large-scale excavations for foundations will damage archaeological sites, as will road construction activities.

No sites were recorded in the study area and due to the lack of shelters, knapping material or features in the landscape, like pans or rocky outcrops, no Stone Age Sites occur.

Large portions of the broader study area of the study area are underlain by Permian basinal mudrocks of the Tierberg Formation (Ecca Group) and Late Caenozoic calcretes and pan sediments. However, the proposed solar facility development site is underlain by Early Jurassic intrusive igneous rocks of the Karoo Dolerite Suite that are entirely unfossiliferous.

Project Component/s	<ul style="list-style-type: none"> » Solar Array » Roads » Power lines
----------------------------	---

	<ul style="list-style-type: none"> » substation » Construction equipment camps
Potential Impact	<ul style="list-style-type: none"> » Destruction of archaeological sites » Impacts on palaeontology
Activity/Risk Source	<ul style="list-style-type: none"> » Solar array foundations, power lines and roads
Mitigation: Target/Objective	<ul style="list-style-type: none"> » Minimise impacts on archaeological sites and paleontological sites

Mitigation: Action/control	Responsibility	Timeframe
Should archaeological sites or graves and paleo sites finds are made during construction work, work in the area must be stopped and the find must immediately be reported to a suitably qualified heritage practitioner such that an investigation and evaluation of the finds can be made.	Contractor, ECO and EPC	Duration of construction

Performance Indicator	<ul style="list-style-type: none"> » No destruction of archaeological or paleontological sites » No impacts on graves
Monitoring	<ul style="list-style-type: none"> » Monitoring during construction to ensure no sites are unearthed and impacted on

OBJECTIVE C12: Minimisation of visual impacts associated with the construction of the solar energy facility.

The area has a natural and agricultural character; there is a substation adjacent to the site, power lines and the N2 national road close to the areas which are infrastructural elements that have an impact on the visual resources in the area. The alteration of the sense of place in view of the local residents will start during the construction phase; visual impacts will remain during the entire operation period. This means that although the effect on the sense of place could be relatively small considering the population to be affected, the duration of the impact increases its significance.

Project Component/s	<ul style="list-style-type: none"> » Construction site, various buildings, a generator, a substation, a power line, a fence and internal access roads.
Potential Impact	<ul style="list-style-type: none"> » Visual impact of general construction activities, and the potential scarring of the landscape due to vegetation clearing and resulting erosion.
Activity/Risk Source	<ul style="list-style-type: none"> » Location of the installation

Mitigation: Target/Objective	» Minimal visual intrusion by construction activities and intact vegetation cover outside of immediate works areas.
---	---

Mitigation: Action/Control	Responsibility	Timeframe
Establish screening structures to shield construction works from sensitive receptors travelling on the main road adjacent to the site.	Contractors and EPC	Construction
Adopt responsible construction practices aimed at containing the construction activities to specifically demarcated areas thereby limiting the removal of natural vegetation to the minimum.	Contractors and EPC	Construction
Limit access to the construction site to existing access roads.	Contractors and EPC	Construction / operation
Rehabilitate all disturbed areas to acceptable visual standards as soon as possible after construction is complete in an area.	Contractors and EPC	Construction / operation
Maintain the general appearance of the facility in an aesthetically pleasing way.	Operator and EPC	Operation

Performance Indicator	Vegetation cover on and in the vicinity of the site is intact (i.e. full cover as per natural vegetation within the environment) with no evidence of degradation or erosion.
Monitoring	Monitoring of vegetation clearing during construction (by contractor as part of construction contract).

OBJECTIVE C13: Appropriate handling and management of waste

The main wastes expected to be generated by the construction of the solar energy facility will include general construction waste, hazardous waste (i.e. fuel), and liquid waste (including grey water and sewage). The volumes of waste expected to be generated will not trigger the requirement for a waste management license. Wastes must however be managed effectively in order to ensure minimal impacts on the environment.

In order to manage the wastes effectively, guidelines for the assessment, classification, and management of wastes, along with industry principles for minimising construction wastes must be implemented. A guideline for integrated management of construction waste is included as Appendix D of this EMPr.

Project Component/s	<ul style="list-style-type: none"> » PV panels. » Power line. » Ancillary buildings. » Access roads.
----------------------------	--

Potential Impact	<ul style="list-style-type: none"> » Inefficient use of resources resulting in excessive waste generation. » Litter or contamination of the site or water through poor waste management practices.
Activity/Risk Source	<ul style="list-style-type: none"> » Packaging. » Other construction wastes. » Hydrocarbon use and storage. » Spoil material from excavation, earthworks, and site preparation.
Mitigation: Target/Objective	<ul style="list-style-type: none"> » To comply with waste management legislation. » To minimise production of waste. » To ensure appropriate waste storage and disposal. » To avoid environmental harm from waste disposal. » A waste manifests should be developed for the ablutions showing proof of disposal of sewage at appropriate water treatment works.

Mitigation: Action/Control	Responsibility	Timeframe
Construction method and materials should be carefully considered in view of waste reduction, re-use, and recycling opportunities.	Contractor	Duration of contract
Construction contractors must provide specific detailed waste management plans to deal with all waste streams.	Contractor	Duration of contract
Specific areas must be designated on-site for the temporary management of various waste streams, i.e. general refuse, construction waste (wood and metal scrap), and contaminated waste as required. Location of such areas must seek to minimise the potential for impact on the surrounding environment, including prevention of contaminated runoff, seepage, and vermin control.	Contractor	Duration of contract
Where practically possible, construction and general wastes on-site must be reused or recycled. Bins and skips must be available on-site for collection, separation, and storage of waste streams (such as wood, metals, general refuse etc.).	Contractor	Duration of contract
Disposal of waste must be in accordance with relevant legislative requirements, including the use of licensed contractors.	Contractor	Duration of contract
Uncontaminated waste must be removed at least weekly for disposal; other wastes will be removed for recycling/ disposal at an appropriate frequency.	Contractor	Duration of contract
Disposal of waste must be in accordance with relevant legislative requirements, including the use of licensed contractors.	Contractor	Duration of contract
Hydrocarbon waste must be contained and stored in	Contractor	Duration of

Mitigation: Action/Control	Responsibility	Timeframe
sealed containers within an appropriately bunded area.		contract
Waste must be kept to a minimum and must be transported by approved waste transporters to sites designated for their disposal.	Contractor	Duration of contract
Documentation (waste manifest) must be maintained detailing the quantity, nature, and fate of any regulated waste. Waste disposal records must be available for review at any time.	Contractor	Duration of contract
Regularly serviced chemical toilets facilities must be used to ensure appropriate control of sewage.	Contractor	Duration of contract
Upon the completion of construction, the area must be cleared of potentially polluting materials.	Contractor	Completion of construction
Dispose of all solid waste collected at an appropriately registered waste disposal site. Waste disposal shall be in accordance with all relevant legislation and under no circumstances may waste be burnt on site.	Contractor	Duration of construction
Where a registered waste site is not available close to the construction site, provide a method statement with regard to waste management.	Contractor	Duration of construction

Performance Indicator	<ul style="list-style-type: none"> » No complaints received regarding waste on site or indiscriminate dumping. » Internal site audits ensuring that waste segregation, recycling and reuse is occurring appropriately. » Provision of all appropriate waste manifests for all waste streams.
Monitoring	<ul style="list-style-type: none"> » Observation and supervision of waste management practices throughout construction phase. » Waste collection will be monitored on a regular basis. » Waste documentation completed. » A complaints register will be maintained, in which any complaints from the community will be logged. Complaints will be investigated and, if appropriate, acted upon. » An incident reporting system will be used to record non-conformances to the EMPr.

OBJECTIVE C14: Appropriate handling and storage of chemicals, hazardous substances

The construction phase will involve the storage and handling of a variety of chemicals including adhesives, abrasives, oils and lubricants, paints and solvents.

Project Component/s	» Storage and handling of chemicals, hazardous substances.
Potential Impact	» Release of contaminated water from contact with spilled chemicals. » Generation of contaminated wastes from used chemical containers.
Activity/Risk Source	» Vehicles associated with site preparation and earthworks. » Construction activities of area and linear infrastructure. » Hydrocarbon use and storage.
Mitigation: Target/Objective	» To ensure that the storage and handling of chemicals and hydrocarbons on-site does not cause pollution to the environment or harm to persons. » To ensure that the storage and maintenance of machinery on-site does not cause pollution of the environment or harm to persons. »

Mitigation: Action/Control	Responsibility	Timeframe
Develop and implement an emergency preparedness plan during the construction phase.	Contractor	Pre-construction and implement for duration of Contract
Spill kits must be made available on-site for the clean-up of spills and leaks of contaminants.	Contractor	Duration of contract
Corrective action must be undertaken immediately if a complaint is made, or potential/actual leak or spill of polluting substance identified. This includes stopping the contaminant from further escaping, cleaning up the affected environment as much as practically possible and implementing preventive measures.	Contractor	Duration of contract
In the event of a major spill or leak of contaminants, the relevant administering authority must be immediately notified as per the notification of emergencies/incidents.	Contractor	Duration of contract
Spilled cement must be cleaned up as soon as possible and disposed of at a suitably licensed waste disposal	Contractor	Duration of contract

Mitigation: Action/Control	Responsibility	Timeframe
site.		
Any contaminated/polluted soil removed from the site must be disposed of at a licensed hazardous waste disposal facility.	Contractor	Duration of contract
Routine servicing and maintenance of vehicles must not to take place on-site (except for emergencies). If repairs of vehicles must take place, an appropriate drip tray must be used to contain any fuel or oils.	Contractor	Duration of contract
All stored fuels to be maintained within a bund and on a sealed surface. The bunded area must be provided with a tap-off system through which spillages and leakages that might occur will be removed without any spillage outside the bunded area.	Contractor	Duration of contract
Fuel storage areas must be inspected regularly to ensure bund stability, integrity, and function.	Contractor	Duration of contract
Construction machinery must be stored in an appropriately sealed area.	Contractor	Duration of contract
Oily water from bunds at the substations must be removed from site by licensed contractors.	Contractor	Duration of contract
The storage of flammable and combustible liquids such as oils will be in designated areas which are appropriately bunded, and stored in compliance with Material Safety Data Sheets (MSDS) files.	Contractor	Duration of contract
Any storage and disposal permits/approvals which may be required must be obtained, and the conditions attached to such permits and approvals will be compiled with.	Contractor	Duration of contract
Transport of all hazardous substances must be in accordance with the relevant legislation and regulations	Contractor	Duration of contract
The sediment control and water quality structures used on-site must be monitored and maintained in an operational state at all times.	Contractor	Duration of contract
Upon the completion of construction, the area must be cleared of potentially polluting materials.	Contractor	Completion of construction

Performance Indicator	<ul style="list-style-type: none"> » No chemical spills outside of designated storage areas. » No unattended water or soil contamination by spills. » No complaints received regarding waste on site or indiscriminate dumping.
Monitoring	<ul style="list-style-type: none"> » Implement an effective monitoring system to detect any leakage or spillage of all hazardous substances. » Observation and supervision of chemical storage and handling practices and vehicle maintenance throughout construction phase.

- » A complaints register must be maintained, in which any complaints from the community will be logged.
- » An incident reporting system will be used to record non-conformances to the EMPr.

OBJECTIVE C15: To avoid and or minimise the potential risk of increased veld fires during the construction phase

The increased presence of people on the site could increase the risk of veld fires, particularly in the dry season.

Project Component/s	» Construction and establishment activities associated with the establishment of PV facility, including infrastructure etc.
Potential Impact	» Veld fires can pose a personal safety risk to local farmers and communities, and their homes, crops, livestock and farm infrastructure, such as gates and fences.
Activities/Risk Sources	» The presence of construction workers and their activities on the site can increase the risk of veld fires.
Mitigation: Target/Objective	» To avoid and or minimise the potential risk of veld fires on local communities and their livelihoods.

Mitigation: Action/Control	Responsibility	Timeframe
Ensure that open fires on the site for cooking or heating are not allowed	Contractors	Duration of construction
Provide adequate fire fighting equipment onsite.	Contractors	Duration of construction
Provide fire-fighting training to selected construction staff.	Contractors	Duration of construction
Compensate farmers / community members at full market related replacement cost for any losses, such as livestock, damage to infrastructure etc. attributable to the construction activities.	Contractors	Duration of construction
Join local Fire Protection Agency (if established).	Building Energy SpA	Pre-construction

Performance Indicator	» Fire fighting equipment and training provided at outset of the construction phase commences. » Proven compensation claims settled within 1 month of claim
Monitoring	» Building Energy SpA and or appointed ECO must monitor indicators listed above to ensure that they have been met for the construction phase.

6.3 Detailing Method Statements

OBJECTIVE C16: Ensure all construction activities are undertaken with the appropriate level of environmental awareness to minimise environmental risk

The environmental specifications are required to be underpinned by a series of Method Statements, within which the Contractors and Service Providers are required to outline how any identified environmental risks will practically be mitigated and managed for the duration of the contract, and how specifications within this EMPr will be met. That is, the Contractor will be required to describe how specified requirements will be achieved through the submission of written Method Statements to the Site Manager and ECO.

A Method Statement is defined as “a written submission by the Contractor in response to the environmental specification or a request by the Site Manager, setting out the plant, materials, labour and method the Contractor proposes using to conduct an activity, in such detail that the Site Manager is able to assess whether the Contractor's proposal is in accordance with the Specifications and/or will produce results in accordance with the Specifications”. The Method Statement must cover applicable details with regard to:

- » Responsible person/s
- » Construction procedures;
- » Materials and equipment to be used;
- » Getting the equipment to and from site;
- » How the equipment/material will be moved while on-site;
- » How and where material will be stored;
- » The containment (or action to be taken if containment is not possible) of leaks or spills of any liquid or material that may occur;
- » Timing and location of activities;
- » Compliance/non-compliance with the Specifications; and
- » Any other information deemed necessary by the Site Manager.

Very specific areas to be addressed in method statements before, during and post construction include:

- » Site Establishment plan (which explains all activities from induction training to offloading, construction sequence for site establishment and the different amenities and to be established etc. Including a site camp plan indicating all of these).

- » Preparation of the site (i.e. clearing vegetation, compacting soils and removing existing infrastructure and waste).
- » Soil management/stockpiling and erosion control.
- » Excavations and backfilling procedure and processes.
- » Stipulate norms and standards for water supply and usage (i.e.: comply strictly to licence and legislation requirements and restrictions as applicable).
- » Stipulate the storm water management procedures recommended in the storm water management plan.
- » Ablution facilities (placement, maintenance, management and servicing).
- » Solid Waste Management:
 - * Description of the waste storage facilities (on site and accumulative).
 - * Placement of waste stored (on site and accumulative).
 - * Management and collection of waste process.
 - * Recycle, re-use and removal process and procedure.
- » Liquid waste management:
 - * The design, establish, maintain and operate suitable procedures for pollution control facilities necessary to prevent discharge of water containing polluting matter or visible suspended materials into rivers, streams or existing drainage systems.
 - * Stipulate grey water (i.e. water from basins, showers, baths, kitchen sinks etc.) that needs to be disposed of, link into an existing facilities where possible. Where no facilities are available, grey water runoff must be controlled to ensure there is no seepage into wetlands or natural watercourses.
- » Dust and noise pollution:
 - * Describe necessary measures to ensure that noise from construction activities is maintained within lawfully acceptable levels (construction activities generating output levels of 85 dB(A) near human settlement, are to be confined to working hours (06h00 - 18h00) Mondays to Fridays).
 - * Procedure to control dust at all times on the site, access roads, borrow pits and spoil sites (dust control shall be sufficient so as not to have significant impacts in terms of the biophysical and social environments). These impacts include visual pollution, decreased safety due to reduced visibility, negative effects on human health and the ecology due to dust particle accumulation.
- » Hazardous substance storage (ensure compliance with all national, regional and local legislation with regard to the storage of oils, fuels, lubricants, solvents, wood treatments, bitumen, cement, pesticides and any other harmful and hazardous substances and materials. South African National Standards apply).
 - * List of all potentially hazardous substances to be used.
 - * Appropriate handling, storage and disposal procedures.

- * Prevention plan of accidental contamination of soil at storage and handling areas.
- * All storage areas, (i.e.: for harmful substances appropriately banded with a suitable collection point for accidental spills must be implemented and drip trays underneath dispensing mechanisms including leaking engines/machinery).
- » Fire prevention and management measures on site.
- » Fauna and flora protection process on and off site (i.e.: removal to reintroduction or replanting, if necessary).
- » Rehabilitation and re-vegetation process.
- » Traffic management.
- » Incident and accident reporting protocol.
- » General administration (and stipulating that all documentation and licences must be on site at all times).
- » Designate access road and the protocol on while roads are in use.
- » Requirements of gate control protocols.

Where relevant, these Method Statements must be prepared and submitted to Building Energy SpA Construction Manager /Project Manager and the ECO. The Contractor may not commence the activity covered by the Method Statement until it has been approved by the Building Energy SpA Construction Manager or Project Manager, except in the case of emergency activities and then only with the consent of the Site Manager. Approval of the Method Statement will not absolve the Contractor from their obligations or responsibilities in terms of their contract. Failure to submit a method statement may result in suspension of the activity concerned until such time as a method statement has been submitted and approved.

The ECO should monitor the construction activities to ensure that these are undertaken in accordance with the approved Method Statement.

6.4 Awareness and Competence: Construction Phase of the Solar Energy Facility

OBJECTIVE C17: To ensure all construction personnel have the appropriate level of environmental awareness and competence to ensure continued environmental due diligence and on-going minimisation of environmental harm

To achieve effective environmental management, it is important that Contractors are aware of the responsibilities in terms of the relevant environmental legislation and the contents of this EMP. The Contractor is responsible for informing employees and sub-contractors of their environmental obligations in terms of the

environmental specifications, and for ensuring that employees are adequately experienced and properly trained in order to execute the works in a manner that will minimise environmental impacts.

The Contractors obligations in this regard include the following:

- » Employees must have a basic understanding of the key environmental features of the construction site and the surrounding environment.
- » Ensuring that a copy of the EMPr is readily available on-site, and that all site staff are aware of the location and have access to the document.
- » Employees will be familiar with the requirements of the EMPr and the environmental specifications as they apply to the construction of the facility.
- » Employees must undergo training for the operation and maintenance activities associated with a PV plant and have a basic knowledge of the potential environmental impacts that could occur and how they can be minimised and mitigated.
- » Ensuring that, prior to commencing any site works, all employees and sub-contractors have attended an Environmental Awareness Training course.
- » The course should be sufficient to provide the site staff with an appreciation of the project's environmental requirements, and how they are to be implemented.
- » Awareness of any other environmental matters, which are deemed necessary by the ECO.
- » Ensuring that employee information posters, outlining the environmental "do's" and "don'ts" (as per the environmental awareness training course) are erected at prominent locations throughout the site.
- » Ensure that construction workers have received basic training in environmental management, including the storage and handling of hazardous substances, minimisation of disturbance to sensitive areas, management of waste, and prevention of water pollution.
- » Records must be kept of those that have completed the relevant training.
- » Training should be done either in a written or verbal format but must be appropriate for the receiving audience.
- » Refresher sessions must be held to ensure the contractor staff are aware of their environmental obligations as practically possible.

Therefore, prior to the commencement of construction activities on site and before any person commences with work on site thereafter, adequate environmental awareness and responsibility are to be appropriately presented to all staff present onsite, clearly describing their obligations towards environmental controls and methodologies in terms of this EMPr. This training and awareness will be achieved in the following ways:

6.4.1 Environmental Awareness Training

Environmental Awareness Training must take the form of an on-site talk and demonstration by the ECO before the commencement of site establishment and construction on site. The education/awareness programme should be aimed at all levels of management and construction workers within the contractor team. A record of attendance of this training must be maintained by the ECO on site.

6.4.2 Induction Training

Environmental induction training must be presented to all persons who are to work on the site – be it for short or long durations; Contractor's or Engineer's staff; administrative or site staff; sub-contractors or visitors to site.

This induction training should include discussing the developer's environmental policy and values, the function of the EMPr and Contract Specifications and the importance and reasons for compliance to these. The induction training must highlight overall do's and don'ts on site and clarify the repercussions of not complying with these. The non-conformance reporting system must be explained during the induction as well. Opportunity for questions and clarifications must form part of this training. A record of attendance of this training must be maintained by the SHE Officer on site.

6.4.3 Toolbox Talks

Toolbox talks should be held on a scheduled and regular basis (at least twice a month) where foremen, environmental and safety representatives of different components of the Works and sub-consultants hold talks relating to environmental practices and safety awareness on site. These talks should also include discussions on possible common incidents occurring on site and the prevention of reoccurrence thereof. Records of attendance and the awareness talk subject must be kept on file.

6.5 Monitoring Programme: Construction Phase

OBJECTIVE C18: To monitor the performance of the control strategies employed against environmental objectives and standards

A monitoring programme must be in place not only to ensure conformance with the EMPr, but also to monitor any environmental issues and impacts which have not been accounted for in the EMPr that are, or could result in significant

environmental impacts for which corrective action is required. The period and frequency of monitoring will be stipulated by the Environmental Authorisation (once issued). Where this is not clearly dictated, Building Energy SpA will determine and stipulate the period and frequency of monitoring required in consultation with relevant stakeholders and authorities. The Project Manager will ensure that the monitoring is conducted and reported.

The aim of the monitoring and auditing process would be to routinely monitor the implementation of the specified environmental specifications, in order to:

- » Monitor and audit compliance with the prescriptive and procedural terms of the environmental specifications.
- » Ensure adequate and appropriate interventions to address non-compliance.
- » Ensure adequate and appropriate interventions to address environmental degradation.
- » Provide a mechanism for the lodging and resolution of public complaints.
- » Ensure appropriate and adequate record keeping related to environmental compliance.
- » Determine the effectiveness of the environmental specifications and recommend the requisite changes and updates based on audit outcomes, in order to enhance the efficacy of environmental management on site.
- » Aid communication and feedback to authorities and stakeholders.

The ECO must monitor compliance with the EMP, will conduct monitoring activities, and will report any non-compliance or where corrective action is necessary to the Site Manager. The ECO must have the appropriate experience and qualifications to undertake the necessary tasks. The following reports will be applicable:

6.5.1 Non-Conformance Reports

All supervisory staff including Foremen, Resident Engineers, and the ECO must be provided the means to be able to submit non-conformance reports to the Site Manager. Non-conformance reports will describe, in detail, the cause, nature and effects of any environmental non-conformance by the Contractor. Records of penalties imposed may be required by the relevant authority.

The non-conformance report will be updated on completion of the corrective measures indicated on the finding sheet. The report must indicate that the remediation measures have been implemented timeously and that the non-conformance can be closed-out to the satisfaction of the Site Manager and ECO.

6.5.2 Monitoring Reports

A monitoring report will be compiled by the ECO on a monthly basis and must be submitted to DEA for their records. This report should include details of the activities undertaken in the reporting period, any non-conformances or incidents recorded, corrective action required, and details of those non-conformances or incidents which have been closed out.

6.5.3 Final Audit Report

A final environmental audit report must be submitted to DEA upon completion of the construction and rehabilitation activities. This report must indicate the date of the audit, the name of the auditor and the outcome of the audit in terms of compliance with the environmental authorisation conditions and the requirements of the EMPr.

MANAGEMENT PROGRAMME: REHABILITATION

CHAPTER 7

Overall Goal: Undertake the rehabilitation measures in a way that ensures rehabilitation of disturbed areas following the execution of the works, such that residual environmental impacts are remediated or curtailed

7.1. Objectives

In order to meet this goal, the following objective, actions and monitoring requirements are relevant:

OBJECTIVE R1: Ensure appropriate rehabilitation of disturbed areas such that residual environmental impacts are remediated or curtailed

Areas requiring rehabilitation will include all areas disturbed during the construction phase and that are not required for regular operation and maintenance operations. Rehabilitation should be undertaken in an area as soon as possible after the completion of construction activities within that area.

Project Component/s	» Area and linear infrastructure.
Potential Impact	» Environmental integrity of site undermined resulting in reduced visual aesthetics, erosion and increased runoff, and the requirement for on-going management intervention.
Activity/Risk Source	<ul style="list-style-type: none"> » Temporary construction areas. » Temporary access roads/tracks. » Power line servitudes. » Other disturbed areas/footprints.
Mitigation: Target/Objective	<ul style="list-style-type: none"> » Ensure and encourage site rehabilitation of disturbed areas. » Ensure that the site is appropriately rehabilitated following the execution of the works, such that residual environmental impacts (including erosion) are remediated or curtailed.

Mitigation: Action/Control	Responsibility	Timeframe
All temporary facilities, equipment, and waste materials must be removed from site.	Contractor and EPC	Following execution of the works
All temporary fencing and danger tape must be removed once the construction phase has been completed.	Contractor and EPC	Following completion of construction activities in an

Mitigation: Action/Control	Responsibility	Timeframe
		area
The area that previously housed the construction camp is to be checked for spills of substances such as oil, paint, etc. and these should be cleaned up.	Contractor and EPC	Following completion of construction activities in an area
All hardened surfaces within the construction camp area should be ripped, all imported materials removed, and the area shall be top soiled and re-vegetated.	Contractor and EPC	Following completion of construction activities in an area
Temporary roads must be closed and access across these blocked. Compacted surfaces of temporary roads must be ripped to facilitate their rehabilitation.	Contractor and EPC	Following completion of construction activities in an area
Necessary drainage works and anti-erosion measures must be installed, where required, to minimise loss of topsoil and control erosion.	Contractor and EPC	Following completion of construction activities in an area
Disturbed areas must be rehabilitated/re-vegetated with appropriate natural vegetation and/or local seed mix. Re-use of native/indigenous plant species removed from disturbance areas in the rehabilitation phase to be determined by a botanist as applicable.	Contractor in consultation with rehabilitation specialist	Following completion of construction activities in an area
Re-vegetated areas may have to be protected from wind erosion and maintained until an acceptable plant cover has been achieved.	Contractor in consultation with rehabilitation specialist	Post-rehabilitation
Erosion control measures should be used in sensitive areas such as steep slopes, hills, and drainage lines as necessary.	Contractor in consultation with rehabilitation specialist	Post-rehabilitation
On-going invasive and alien plant monitoring and removal must be undertaken on all areas within the development area vegetation on an annual basis.	Building Energy SpA in consultation with rehabilitation specialist	Post-rehabilitation

Performance Indicator	<ul style="list-style-type: none">» All portions of site, including construction equipment camp and working areas, cleared of equipment and temporary facilities not required for operation» Topsoil replaced on all areas and stabilised where practicable Disturbed areas rehabilitated and acceptable plant cover achieved on rehabilitated sites.» Completed site free of erosion and alien invasive plants.
Monitoring	<ul style="list-style-type: none">» On-going inspection of rehabilitated areas in order to determine effectiveness of rehabilitation measures implemented during the operational lifespan of the facility.» On-going alien plant monitoring and removal should be undertaken on an annual basis.

MANAGEMENT PROGRAMME: OPERATION

CHAPTER 8

Overall Goal: To ensure that the operation of the solar energy facility does not have unforeseen impacts on the environment and to ensure that all impacts are monitored and the necessary corrective action taken in all cases. In order to address this goal, it is necessary to operate the facility in a way that:

- » Ensures that operation activities are appropriately managed in respect of environmental aspects and impacts.
- » Enables the solar energy facility operation activities to be undertaken without significant disruption to other land uses in the area, in particular with regard to farming practices, traffic and road use, and effects on local residents.
- » Minimises impacts on fauna using the site.

An environmental manager must be appointed during operation whose duty it will be to ensure the implementation of the operational EMPr.

8.1. Objectives

In order to meet the above goal, the following objectives have been identified, together with necessary actions and monitoring requirements.

OBJECTIVE 01: Limit the ecological footprint of the facility

Indirect impacts on vegetation and fauna during operation could result from maintenance activities and the movement of people and vehicles on site and in the surrounding area. In order to ensure the long-term environmental integrity of the site following construction, maintenance of the areas rehabilitated post-construction must be undertaken until these areas have successfully re-established.

Project component/s	<ul style="list-style-type: none"> » Areas requiring regular maintenance. » Areas disturbed during the construction phase and subsequent rehabilitation at its completion. » Presence and operation of the facility
Potential Impact	<ul style="list-style-type: none"> » Impact on the surrounding landscape due to alien plant invasion, erosion or poor management of the facility.
Activity/Risk Source	<ul style="list-style-type: none"> » Alien plants within the facility » Erosion from within the facility » Human presence » Maintenance activities which may lead to negative impacts

	such as pollution etc.
Mitigation: Target/Objective	<ul style="list-style-type: none"> » Maintain minimised footprints of disturbance of vegetation/habitats on-site. » Ensure and encourage plant regrowth in non-operational areas of post-construction rehabilitation.

Mitigation: Action/Control	Responsibility	Timeframe
Vegetation control should be by manual clearing or the use of livestock. » Herbicides should not be used.	Management Environmental Manager	Operation
Vegetation control should be by manual clearing or the use of livestock. » Herbicides should not be used.	Management Environmental Manager	Operation
Bi-annual monitoring for alien plant species - with follow up clearing	Management Environmental Manager	Operation
Quarterly site inspection for erosion problems – with follow up remedial action where problems are identified	Management Environmental Manager	Operation
Notes of electrocution and collision events must be sent to a qualified Ornithologist for the recommendation of further mitigation measures if necessary.	ECO and avifauna specialist and EPC	Operation

Performance Indicator	<ul style="list-style-type: none"> » No complaints from the landowners in the area regarding trespassing on farmland attributable to maintenance personnel » No alien species within the site » No erosion problems within the site or from access roads » Maintenance of a ground cover of perennial grasses and forbs that resist erosion.
Monitoring	<ul style="list-style-type: none"> » Records of alien species presence and clearing actions » Records of erosion problems and mitigation actions taken with photographs » Management log detailing the management actions taken to maintain and control the vegetation within the facility.

OBJECTIVE O2: Minimise dust and air emissions

During the operational phase, limited gaseous or particulate emissions are anticipated from exhaust emissions (i.e. from operational vehicles). Windy conditions and the movement of vehicles on site may lead to dust creation.

Project Component/s	<ul style="list-style-type: none"> » Gravel access roads » On-site vehicles.
Potential Impact	<ul style="list-style-type: none"> » Dust and particulates from vehicle movement to and on-site. » Release of minor amounts of air pollutants (for example NO₂, CO and SO₂) from vehicles
Activities/Risk Sources	<ul style="list-style-type: none"> » Re-entrainment of deposited dust by vehicle movements. » Wind erosion from unsealed roads and surfaces. » Fuel burning vehicle and construction engines.
Mitigation: Target/Objective	<ul style="list-style-type: none"> » To ensure emissions from all vehicles are minimised, where possible. » To minimise nuisance to the community from dust emissions and to comply with workplace health and safety requirements.

Mitigation: Action/Control	Responsibility	Timeframe
Roads must be maintained in a manner that will ensure that nuisance to the community from dust is not visibly excessive.	Building Energy SpA	Operation
Appropriate dust suppression must be applied to the roads as required to minimise/control airborne dust.	Building Energy SpA	Operation
Speed of vehicles must be restricted, as defined by the Environmental Manager.	Building Energy SpA	Operation
Vehicles and equipment must be maintained in a road-worthy condition at all times.	Building Energy SpA	Operation

Performance Indicator	<ul style="list-style-type: none"> » No complaints from affected residents or community regarding dust or vehicle emissions. » Dust suppression measures implemented where required. » Drivers made aware of the potential safety issues and enforcement of strict speed limits when they are employed.
Monitoring	<ul style="list-style-type: none"> » Immediate reporting by personnel of any potential or actual issues with nuisance dust or emissions to the Environmental Manager. » A complaints register must be maintained by the Environmental Manager, in which any complaints from residents/the community will be logged, and thereafter complaints will be investigated and, where appropriate, acted upon. » An incident reporting system must be used to record non-conformances to the EMPr.

OBJECTIVE 03: Ensure the implementation of an appropriate fire management plan during the operation phase

The increased presence of people on the site could increase the risk of veld fires, particularly in the dry season.

Project Component/s	» Operation and maintenance of the solar energy facility and associated infrastructure.
Potential Impact	» Veld fires can pose a personal safety risk to local farmers and communities, and their homes, crops, livestock and farm infrastructure, such as gates and fences. In addition, fire can pose a risk to the solar energy facility infrastructure.
Activities/Risk Sources	» The presence of operation and maintenance personnel and their activities on the site can increase the risk of veld fires.
Mitigation: Target/Objective	» To avoid and or minimise the potential risk of veld fires on local communities and their livelihoods.

Mitigation: Action/Control	Responsibility	Timeframe
Join the local Fire Protection Agency (if established).	Building Energy SpA	Operation
Provide adequate fire fighting equipment on site.	Building Energy SpA	Operation
Provide fire-fighting training to selected operation and maintenance staff.	Building Energy SpA	Operation
Ensure that appropriate communication channels are established to be implemented in the event of a fire.	Building Energy SpA	Operation
Fire breaks should be established where and when required. Cognisance must be taken of the relevant legislation when planning and burning firebreaks (in terms of timing, etc.).	Building Energy SpA	Operation
Upon completion of the construction phase, an emergency evacuation plan must be drawn up to ensure the safety of the staff and surrounding land users in the case of an emergency.	Building Energy SpA	Operation
Contact details of emergency services should be prominently displayed on site.	Building Energy SpA	Operation

Performance Indicator	» Fire fighting equipment and training provided before the operational phase commences. » Appropriate fire breaks in place and maintained.
Monitoring	» Building Energy SpA must monitor indicators listed above to ensure that they have been met.

OBJECTIVE 04: Maximise local employment and business opportunities associated with the operational phase

The facility is expected to be operational for more than 20 years during which time approximately 24 staff members are expected to be required on-site. Therefore, long-term direct job opportunities for locals could exist, although limited. However, in an area with such high unemployment figures, these limited opportunities should still be seen as a positive impact on the quality of life of those benefiting from the employment.

Some local procurement of goods, materials and services could occur which would result in positive economic spin-offs. These opportunities for local service providers to render services to the proposed facility could include maintenance of the guardhouse, gardening at the guardhouse, cleaning services, security services and maintenance or replacement of general equipment

Project Component/s	» Day to day operational activities associated with the PV facility, including maintenance etc.
Potential Impact	» The opportunities and benefits associated with the creation of local employment and business should be maximised
Activities/Risk Sources	» The operational phase of the PV facility will create approximately 24 full time employment opportunities.
Mitigation: Target/Objective	» In the medium to long term employ as many locals as possible to fill the full time employment opportunities.

Mitigation: Action/Control	Responsibility	Timeframe
The workforce of 24 permanent staff is likely to be based in Mkuze. As part of the local content and support programs Building Energy SpA should commit to implementing a training and skills development and training programme to maximise employment for locals.	Building Energy SpA and EPC	Operations
Identify local members of the community who are suitably qualified or who have the potential to be employed full time.	Building Energy SpA	Prior to commencement of operation

Performance Indicator	» Training and skills development programme developed and designed before construction phase completed. » Potential locals identified before construction phase completed.
Monitoring	» Building Energy SpA must monitor indicators listed above to ensure that they have been met for the operational phase.

OBJECTIVE 05: Appropriate handling and management of waste including handling hazardous/dangerous substances

The operation of the facility will involve the storage of chemicals and hazardous substances, as well as the generation of limited waste products. The main wastes expected to be generated by the operation activities include general solid waste, and liquid waste.

Project Component/s	<ul style="list-style-type: none"> » PV facility » Substation. » Operation and maintenance staff. » Workshop.
Potential Impact	<ul style="list-style-type: none"> » Inefficient use of resources resulting in excessive waste generation. » Litter or contamination of the site or water through poor waste management practices. » Contamination of water or soil because of poor materials management.
Activity/Risk Source	<ul style="list-style-type: none"> » Transformers and switchgear for the substations. » Ancillary buildings.
Mitigation: Target/Objective	<ul style="list-style-type: none"> » Comply with waste management legislation. » Minimise production of waste. » Ensure appropriate waste disposal. » Avoid environmental harm from waste disposal. » Ensure appropriate storage of chemicals and hazardous substances.

Mitigation: Action/Control	Responsibility	Timeframe
Hazardous substances (such as used/new transformer oils, etc.) must be stored in sealed containers within a clearly demarcated designated area.	Building Energy SpA and EPC	Operation
Storage areas for hazardous substances must be appropriately sealed and banded.	Building Energy SpA and EPC	Operation
All structures and/or components replaced during maintenance activities must be appropriately disposed of at an appropriately licensed waste disposal site or sold to a recycling merchant for recycling.	Building Energy SpA and EPC	Operation
Care must be taken to ensure that spillage of oils and other hazardous substances are limited during maintenance. Handling of these materials should take place within an appropriately sealed and banded	Building Energy SpA and EPC	Operation and maintenance

Mitigation: Action/Control	Responsibility	Timeframe
area. Should any accidental spillage take place, it must be cleaned up according to specified standards regarding bioremediation.		
Spill kits must be made available on-site for the clean-up of spills and leaks of contaminants.	Building Energy SpA and EPC	Operation and maintenance
Disposal of waste must be in accordance with relevant legislative requirements, including the use of licensed contractors.	Building Energy SpA/ waste management contractor and EPC	Operation
Waste handling, collection, and disposal operations must be managed and controlled by a waste management contractor.	Building Energy SpA/ waste management contractor and EPC	Operation
Used oils and chemicals: » Appropriate disposal must be arranged with a licensed facility in consultation with the administering authority » Waste must be stored and handled according to the relevant legislation and regulations	Building Energy SpA and EPC	Operation
General waste must be recycled where possible or disposed of at an appropriately licensed landfill.	Building Energy SpA and EPC	Operation
Hazardous waste (including hydrocarbons) and general waste must be stored and disposed of separately.	Building Energy SpA and EPC	Operation
Disposal of waste must be in accordance with relevant legislative requirements, including the use of licensed contractors.	Building Energy SpA and EPC	Operation

Performance Indicator	<ul style="list-style-type: none"> » No complaints received regarding waste on site or indiscriminate dumping. » Internal site audits identifying that waste segregation recycling and reuse is occurring appropriately. » Provision of all appropriate waste manifests. » No contamination of soil or water.
Monitoring	<ul style="list-style-type: none"> » Waste collection must be monitored on a regular basis. » Waste documentation must be completed and available for inspection » An incidents/complaints register must be maintained, in which any complaints from the community must be logged. » Complaints must be investigated and, if appropriate, acted upon. » Regular reports on exact quantities of all waste streams exiting

	<p>the site must be compiled by the waste management contractor and monitored by the ECO.</p> <p>» All appropriate waste disposal certificates accompany the monthly reports.</p>
--	---

OBJECTIVE O6: Mitigate the possible visual impact associated with the operational phase.

A visual impact on the sense of place is one that alters the visual landscape to such an extent that the user experiences the environment differently, and more specifically, in a less appealing or less positive light.

Project Component/s	Construction site, various buildings, a generator, a substation, a power line, a fence and internal access roads.
Potential Impact	(Function of the project, Height of the proposed development above ground, Choice of technology and materials, Project association with similar developments locally, context , Numbers and degree of sensitive receptors, Shielding and exposure)
Activity/Risk Source	The viewing of the above mentioned by observers on or near the site (i.e. within 2km).
Mitigation: Target/Objective	Well maintained and neat facility.

Mitigation: Action/Control	Responsibility	Timeframe
Vegetation screening between the site and adjacent properties should be implemented and maintained. Where necessary additional vegetation screening should be established possibly with fast growing trees such as the the Acacia karroo, Acacia gerrardii, Dovyalis zeyheri etc..	Building Energy SpA/ operator and EPC	Throughout operational phase
Maintain the general appearance of the facility as a whole, including the panels, servitudes and the ancillary structures.	Building Energy SpA/ operator and EPC	Throughout operational phase

Performance Indicator	Vegetation cover on and in the vicinity of the site is intact (i.e. full cover as per natural vegetation within the environment) with no evidence of degradation or erosion.
Monitoring	Monitoring of the entire site on an ongoing basis (by operator).

MANAGEMENT PROGRAMME: DECOMMISSIONING

CHAPTER 9

The solar infrastructure which will be utilised for the proposed solar energy facility is expected to have a lifespan of 20 years (i.e. with maintenance). Equipment associated with this facility would only be decommissioned once it has reached the end of its economic life. It is most likely that decommissioning activities of the infrastructure of the facility would comprise the disassembly and replacement of the solar infrastructure with more appropriate technology/infrastructure available at that time.

The relevant mitigation measures contained under the construction and rehabilitation sections of this EMPr should be applied during decommissioning and therefore is not repeated in this section. It must be noted that decommissioning activities will need to be undertaken in accordance with the legislation applicable at that time, which may require this section of the EMPr to be revisited and amended.

Should the activity ever cease or become redundant, the applicant shall undertake the required actions as prescribed by legislation at the time and comply with all relevant legal requirements administered by any relevant and competent authority at that time.

9.1. Site Preparation

Site preparation activities will include confirming the integrity of the access to the site to accommodate required equipment, preparation of the site (e.g. lay down areas, construction platform) and the mobilisation of construction equipment.

9.2 Disassemble and Remove Infrastructure

Disassembled components will be reused, recycled, or disposed of in accordance with regulatory requirements.

OBJECTIVE D1: To avoid and or minimise the potential impacts associated with the decommissioning phase

Project Component/s	» Decommissioning phase of the PV facility and associated infrastructure
Potential Impact	» Decommissioning will result in job losses, which in turn can result in a number of social impacts, such as reduced quality of life, stress, depression etc. However, the number of people

	affected (24) is relatively small. Decommissioning is also similar to the construction phase in that it will also create temporary employment opportunities.
Activity/Risk Source	» Decommissioning of the PV facility
Mitigation: Target/Objective	» To avoid and or minimise the potential social impacts associated with decommissioning phase of the PV facility.

Mitigation: Action/control	Responsibility	Timeframe
Retrenchments should comply with South African Labour legislation	Building Energy SpA and EPC	When PV facility is decommissioned

Performance Indicator	» South African Labour legislation relevant at the time
Monitoring	» Building Energy SpA and Department of Labour

9.3 Rehabilitation

The site will be rehabilitated and can be returned to the current or other beneficial land-use. Areas requiring rehabilitation will include all areas disturbed during the construction phase and that are not required for regular operation and maintenance operations. Rehabilitation should be undertaken in an area as soon as possible after the completion of construction activities within that area.

FINALISATION OF THE EMPr

CHAPTER 10

The EMPr is a dynamic document, which must be updated to include any additional specifications as and when required. It is considered critical that this draft EMPr be updated to include site-specific information and specifications following the final walk-through survey by specialists (ecologist) of the PV facility development area, power line. This will ensure that the construction and operation activities are planned and implemented considering sensitive environmental features.

**APPENDIX A:
GRIEVANCE MECHANISM FOR PUBLIC COMPLAINTS
AND ISSUES**

GRIEVANCE MECHANISM / PROCESS

AIM

The aim of the grievance mechanism is to ensure that grievances / concerns raised by local landowners and or communities are addressed in a manner that is:

- Fair and equitable;
- Open and transparent;
- Accountable and efficient.

It should be noted that the grievance mechanism does not replace the right of an individual, community, group or organization to take legal action should they so wish. However, the aim should be to address grievances in a manner that does not require a potentially costly and time consuming legal process.

Proposed generic grievance process

- Local landowners, communities and authorities will be informed in writing by the proponent (the renewable energy company) of the grievance mechanism and the process by which grievances can be brought to the attention of the proponent.
- A company representative will be appointed as the contact person for grievances to be addressed to. The name and contact details of the contact person will be provided to local landowners, communities and authorities.
- Project related grievances relating to the construction, operational and or decommissioning phase must be addressed in writing to the contact person. The contact person should assist local landowners and or communities who may lack resources to submit/prepare written grievances.
- The grievance will be registered with the contact person who, within 2 working days of receipt of the grievance, will contact the Complainant to discuss the grievance and agree on suitable date and venue for a meeting. Unless otherwise agreed, the meeting will be held within 2 weeks of receipt of the grievance.
- The contact person will draft a letter to be sent to the Complainant acknowledging receipt of the grievance, the name and contact details of Complainant, the nature of the grievance, the date that the grievance was raised, and the date and venue for the meeting.
- Prior to the meeting being held the contact person will contact the Complainant to discuss and agree on who should attend the meeting. The people who will be required to attend the meeting will depend on the nature of the grievance. While the Complainant and or proponent are entitled to invite their legal representatives to attend the meeting/s, it should be made clear that to all the parties involved in the process that the grievance mechanism

process is not a legal process. It is therefore recommended that the involvement of legal representatives be limited.

- The meeting will be chaired by the company representative appointed to address grievances. The proponent will provide a person to take minutes of and record the meeting/s. The costs associated with hiring venues will be covered by the proponent. The proponent will also cover travel costs incurred by the Complainant, specifically in the case of local, resource poor communities.
- Draft copies of the minutes will be made available to the Complainant and the proponent within 4 working days of the meeting being held. Unless otherwise agreed, comments on the Draft Minutes must be forwarded to the company representative appointed to manage the grievance mechanism within 4 working days of receipt of the draft minutes.
- In the event of the grievance being resolved to the satisfaction of all the parties concerned, the outcome will be recorded and signed off by the relevant parties. The record should provide details of the date of the meeting/s, the names of the people that attended the meeting/s, the outcome of the meeting/s, and where relevant, the measures identified to address the grievance, the party responsible for implementing the required measures, and the agreed upon timeframes for the measures to be implemented.
- In the event of a dispute between the Complainant and the proponent regarding the grievance, the option of appointing an independent mediator to assist with resolving the issue should be discussed. The record of the meeting/s will note that a dispute has arisen and that the grievance has not been resolved to the satisfaction of all the parties concerned;
- In the event that the parties agree to appoint a mediator, the proponent will be required to identify three (3) mediators and forward the names and CVs to the Complainant within 2 weeks of the dispute being declared. The Complainant, in consultation with the proponent, will identify the preferred mediator and agree on a date for the next meeting. The cost of the mediator will be borne by the proponent. The proponent will provide a person to take minutes of and record the meeting/s.
- In the event of the grievance, with the assistance of the mediator, being resolved to the satisfaction of all the parties concerned, the outcome will be recorded and signed off by the relevant parties, including the mediator. The record should provide details on the date of the meeting/s, the names of the people that attended the meeting/s, the outcome of the meeting/s, and where relevant, the measures identified to address the grievance, the party responsible for implementing the required measures, and the agreed upon timeframes for the measures to be implemented.
- In the event of the dispute not being resolved, the mediator will prepare a draft report that summarizes the nature of the grievance and the dispute. The report should include a recommendation by the mediator on the proposed way forward with regard to the addressing the grievance.

- The draft report will be made available to the Complainant and the proponent for comment before being finalised and signed by all parties. Unless otherwise agreed, comments on the draft report must be forwarded to the company representative appointed to manage the grievance mechanism within 4 working days.

The way forward will be informed by the recommendations of the mediator and the nature of the grievance. As indicated above, the grievance mechanism does not replace the right of an individual, community, group or organization to take legal action should they so wish. In the event of the grievance not being resolved to the satisfaction of Complainant and or the proponent, either party may be of the opinion that legal action may be the most appropriate option.

**APPENDIX B:
DEPARTMENT OF WATER AFFAIRS: WORKING FOR
WATER PROGRAMME PRINCIPLES FOR INVASIVE
PLANT SPECIES**

ALIEN INVASIVE PLANT MANAGEMENT PLAN

OVERALL OBJECTIVE

Manage alien and invasive plant species during the construction and operation of the solar energy facility, through the implementation of an alien invasive species management and control programme.

PROBLEM OUTLINE

Alien plants replace indigenous vegetation leading to severe loss of biodiversity and change in landscape function. Potential consequences include loss of biodiversity, loss of grazing resources, increased fire risk, increased erosion, loss of wetland function, impacts on drainage lines, increased water use etc.

In addition, the Conservation of Agricultural Resources Act (Act 43 of 1983), as amended in 2001, requires that land users clear *Declared Weeds* from their properties and prevent the spread of *Declared Invader Plants* on their properties. A list of declared weeds and invader plants is attached.

Table 3 of CARA (the Conservation of Agricultural Resources Act) lists all declared weeds and invader plants. Alien plants are divided into 3 categories based on their risk as an invader.

- Category 1 - These plants must be removed and controlled by all land users. They may no longer be planted or propagated and all trade in these species is prohibited.
- Category 2 - These plants pose a threat to the environment but nevertheless have commercial value. These species are only allowed to occur in demarcated areas and a land user must obtain a water use license as these plants consume large quantities of water.
- Category 3 - These plants have the potential of becoming invasive but are considered to have ornamental value. Existing plants do not have to be removed but no new plantings may occur and the plants may not be sold.

The following guide is a useful starting point for the identification of alien species:

Bromilow, C. 2010. *Problem Plants and Alien Weeds of South Africa*. Briza, Pretoria.

SPECIFIC MANAGEMENT OBJECTIVES:

- Ensure alien plants do not become dominant in parts or the whole landscape

- Initiate and implement a monitoring and eradication programme for alien and invasive species
- Control alien and invasive species dispersal & encroachment
- Promote the natural reestablishment and planting of indigenous species

VULNERABLE ECOSYSTEMS AND HABITATS

Certain habitats and environments are more vulnerable to alien plant invasion and are likely to bear the brunt of alien plant invasion problems at the site. In addition, construction activities and changes in water distribution at the site following construction are also likely to increase and alter the vulnerability of the site to alien plant invasion.

Areas at the site which are likely to require specific attention include the following

- Wetlands, drainage lines and other mesic areas
- Cleared and disturbed areas such as road verges, crane pads and construction footprints etc.
- Construction camps and lay-down areas which are cleared or are active for an extended period

Wetlands, drainage lines and other mesic areas

There are a relatively large number of drainage lines at the site as well as a number of natural and artificial wetlands. Disturbance within these areas often results in alien plant invasion on account of the greater water and nutrient availability in this habitat. Although there are no turbines within such areas, numerous road crossings will be required. The disturbance footprint within such areas should be minimized and these areas should be checked for alien species more often than the surrounding landscape.

Cleared and disturbed areas

Cleared and disturbed areas are clearly vulnerable to invasion on account of the lack of existing plant cover to resist invasion as well as the disturbance which created during construction which promotes the germination and establishment of alien plant species.

Construction camps and laydown areas

Construction camps and lay down areas are either cleared of vegetation or prolonged activities in these areas result in negative impact on indigenous vegetation. In addition, repeated vehicle and human activity in these areas usually results in the import of alien plant seed on clothes, dirty vehicles or with construction machinery and materials.

GENERAL CLEARING & GUIDING PRINCIPLES

- Alien control programs are long-term management projects and should include a clearing plan which includes follow up actions for rehabilitation of the cleared area. Alien

problems at the site should be identified during preconstruction surveys of the development footprint. This may occur simultaneously to other required searches and surveys. The clearing plan should then form part of the preconstruction reporting requirements for the site.

- The plan should include a map showing the alien density & indicating dominant alien species in each area.
- Lighter infested areas should be cleared first to prevent the build-up of seed banks.
- Dense mature stands of woody species where present should be left for last, as they probably will not increase in density or pose a greater threat than they are at the moment.
- Collective management and planning with neighbours may be required as seeds of aliens are easily dispersed across boundaries by wind or water courses.
- All clearing actions should be monitored and documented to keep track of which areas are due for follow-up clearing.

CLEARING METHODS

- Different species require different clearing methods such as manual, chemical or biological or a combination of both.
- However care should be taken that the clearing method (s) used does not encourage further invasion. As such, regardless of the method (s) used, disturbance to the soil should be kept to a minimum. Fire is not a natural phenomenon at the site and fire should not be used as a clearing method or vegetation management approach at the site.
- The best-practice clearing method for each species identified should be used. The preferred clearing methods for most alien species can be obtained from the DWAF Working for Water Website. <http://www.dwaf.gov.za/wfw/Control/>

USE OF HERBICIDES FOR ALIEN CONTROL

Although it is usually preferable to use manual clearing methods where possible, such methods may create additional disturbance which stimulates alien invasion and may also be ineffective for many woody species which re-sprout. Where herbicides are to be used, the impact of the operation on the natural environment should be minimised by observing the following:

- Area contamination must be minimised by careful, accurate application with a minimum amount of herbicide to achieve good control.
- Specific care must be taken to prevent contamination of any water bodies. This includes: due care in storage, application, cleaning of equipment and disposal of containers, product and spray mixtures.
- Equipment should be washed where there is no danger of contaminating water sources and washings carefully disposed of in a suitable site.
- To avoid damage to indigenous or other desirable vegetation, products used should have least effect on non-target vegetation.

- Coarse droplet nozzles should be fitted to avoid drift onto neighboring vegetation.
- The appropriate health and safety procedures should also be followed regarding the storage, handling and disposal of herbicides.

For all herbicide applications, the following guidelines should be followed:

Working for Water: Policy on the Use of Herbicides for the Control of Alien Vegetation.

ALIEN PLANT MANAGEMENT PLAN

CONSTRUCTION PHASE ACTIVITIES

The following management actions are aimed at reducing soil disturbance during the construction phase of the development, as well as reducing the likelihood that alien species will be brought onto site or otherwise encouraged.

Action	Frequency
The ECO is to provide permission prior to any vegetation being cleared for development.	Daily
Clearing of vegetation must be undertaken as the work front progresses – mass clearing is not allowed unless the entire cleared area is to be rehabilitated immediately.	Weekly
Should re-vegetation not possible immediately, the cleared areas must be protected with packed brush, or appropriately battered with fascine work. Alternatively, jute (Soil Saver) may be pegged over the soil to stabilise it.	Weekly
Cleared areas that have become invaded can be sprayed with appropriate herbicides provided that these are such that break down on contact with the soil. Residual herbicides should not be used.	Weekly
Although organic matter is frequently used to encourage regrowth of vegetation on cleared areas, no foreign material for this purpose should be brought onto site. Brush from cleared areas should be used as much as possible. Arid soils are usually very low in organic matter and the use of manure or other soil amendments is likely to encourage invasion.	Weekly
Clearing of vegetation should not be allowed within 50m of any wetland or pan, 80m of any wooded area, within 1:100 year floodlines, in conservation servitude areas or on slopes steeper than 1:3, unless permission is granted by the ECO for specifically allowed construction activities in these areas.	Weekly
Care must be taken to avoid the introduction of alien plant species to the site and surrounding areas. (Particular attention must be paid to imported material such as building sand or dirty earth-moving equipment.) Stockpiles should be checked regularly and any weeds emerging from material stockpiles should be removed.	Weekly

Alien vegetation regrowth must be controlled throughout the entire site during the construction period.	Monthly
The alien plant removal and control method guidelines should adhere to best-practice for the species involved. Such information can be obtained from the DWAF Working for Water website.	Monthly
Clearing activities must be contained within the affected zones and may not spill over into demarcated No Go areas.	Daily
Pesticides may not be used. Herbicides may be used to control listed alien weeds and invaders only.	Monthly
Drainage lines and other sensitive areas should remain demarcated with appropriate fencing or hazard tape while construction activities within the area are underway. These areas are no-go areas (this must be explained to all workers) that must be excluded from all development activities.	Daily

MONITORING – CONSTRUCTION PHASE

The following monitoring actions should be implemented during the construction phase of the development.

Monitoring Action	Indicator	Timeframe
Document alien species present at the site	List of alien species	Preconstruction
Document alien plant distribution	Alien plant distribution map	3 Monthly
Document & record alien control measures implemented	Record of clearing activities	3 Monthly
Review & evaluation of control success rate	Decline in documented alien abundance over time	Biannually

OPERATIONAL PHASE ACTIVITIES

The following management actions are aimed at reducing the abundance of alien species within the site and maintaining non-invaded areas clear of aliens.

Action	Frequency
Surveys for alien species should be conducted regularly. Every 3 months for the first two years after construction and biannually thereafter. All aliens identified should be cleared.	Every 3 months for 2 years and biannually thereafter
Re-vegetation with indigenous, locally occurring species should take	Biannually, but re-

place in areas where natural vegetation is slow to recover or where repeated invasion has taken place.	vegetation should take place at the start of the rainy season.
Areas of natural vegetation that need to be maintained or managed to reduce plant height or biomass, should be controlled using methods that leave the soil protected, such as using a weed-eater to mow above the soil level.	When necessary
No alien species should be cultivated on-site. If vegetation is required for esthetic purposes, then non-invasive, water-wise locally-occurring species should be used.	When necessary

MONITORING – OPERATIONAL PHASE

The following monitoring and evaluation actions should take place during the operational phase of the development.

Monitoring Action	Indicator	Timeframe
Document alien species distribution and abundance over time at the site	Alien plant distribution map	Biannually
Document alien plant control measures implemented & success rate achieved	Records of control measures and their success rate. A decline in alien distribution and cover over time at the site	Quarterly
Document rehabilitation measures implemented and success achieved in problem areas	Decline in vulnerable bare areas over time	Biannually

DECOMMISSIONING PHASE ACTIVITIES

The following management actions are aimed at preventing the invasion, by alien plant species, of the re-vegetated areas created during the decommissioning phase. Re-vegetation of the disturbed site is aimed at approximating as near as possible the natural vegetative conditions prevailing prior to operation.

Action	Frequency
All damaged areas shall be rehabilitated if the infrastructure is removed and the facility is decommissioned.	Once off
All natural areas must be rehabilitated with species indigenous to the area. Re-seed with locally-sourced seed of indigenous grass species that were recorded on site pre-construction.	Once off, with annual follow up re-vegetation where

	required.
Maintain alien plant monitoring and removal programme for 3 years after rehabilitation.	Biannually

MONITORING – DECOMMISSIONING PHASE

The following monitoring and evaluation actions should take place during the decommissioning phase of the development.

Monitoring Action	Indicator	Timeframe
Monitor newly disturbed areas where infrastructure has been removed to detect and quantify any aliens that may become established for 3 years after decommissioning and rehabilitation.	Alien plant surveys and distribution map	Biannually until such time as the natural vegetation has recovered sufficiently to resist invasion.
Monitor re-vegetated areas to detect and quantify any aliens that may become established for 3 years after decommissioning and rehabilitation.	Alien plant surveys and distribution map	Biannually for 3 years
Document alien plant control measures implemented & success rate achieved	Records of control measures and their success rate. A decline in alien distribution and cover over time at the site	Annually for 3 years

REFERENCES:

AGIS (2006) Weeds and Invasive Plants Atlas (www.agis.agric.za/wip)

**APPENDIX C:
EROSION MANAGEMENT PLAN**

PRINCIPLES FOR EROSION MANAGEMENT

1. Purpose

An Erosion Management Plan addresses the management and mitigation of significant impacts relating to soil erosion. The objective of the plan is to provide:

- » A general framework for erosion management, which enables the contractor to identify areas where erosion can be accelerated from their action.
- » An outline of general methods to monitor, manage and rehabilitate erosion in ensuring that all erosion caused by this development is addresses.

2. Legislation and Standards

Soil conservation pertaining to erosion has been a topic within legislation form the 1930's till today in South Africa. Internationally, standards have been set by the International Finance Corporation and the World Bank to address soil erosion in construction and decommissioning of areas. Therefore this document will ensure that the developer meets the South African legislative requirements and the IFC standards with regards to monitoring, managing and rehabilitating soil erosion on the solar energy facility site.

Relevant legislation:

- » Conservation of Agricultural Resources Act No 43 of 1983
- » Environmental Conservation Act No 73 of 1989
- » National Forestry Act No 84 of 1998
- » National Environmental Management Act No 107 of 1998
- » The Department of Water Affairs and Forestry, February 2005. Environmental Best Practice Specifications: Construction Integrated Environmental Management Sub-Series No. IEMS 1.6. Third Edition. Pretoria.

3. Areas with a high soil erodability potential

The following areas are generally associated with high soil erodibility potential:

- » Any areas without vegetation cover
- » Excavated areas
- » Steep areas
- » Areas where the soil has been degraded already
- » Dispersive, duplexed soil areas
- » Areas with fine grained soil material with a low porosity
- » Areas which undergo overland flow of water.
- » Areas close to water

- » Irrigated areas
- » Compacted areas
- » Rivers
- » Drainage lines
- » And any areas where developments cause water flow to accelerate on a soil surface.
- » Coarsely gravelly covered surfaces

4. Precautionary management activities to avoid erosion

In the assessment process the contractor must assess all:

- » Infrastructure and equipment placements and function to ensure that the infrastructure or equipment is not causing accelerating soil erosion on the site.
- » Construction activities to ensure that no erosion indicators are forming as a result of the construction activities.

5. Monitoring

5.1. General Erosion

The developer must assess the site for erosion indicators in the monitoring process, which include:

- » Bare soil
- » Desiccation cracks
- » Terracettes
- » Sheet erosion
- » Rill erosion (small erosion features with the same properties and characteristics as gullies)
- » Hammocking (Soil build-up)
- » Pedestalling (Exposing plant roots)
- » Erosion pavements
- » Gullies
- » Evidence of Dispersive soils

In the assessment process, the contractor must assess all:

- » Infrastructure and equipment placements and function to ensure that the infrastructure or equipment is not causing accelerated soil erosion on the site.
- » Construction activities to ensure that no erosion indicators are forming as a result of the construction activities.

If any activities or placement of equipment cause pooling on the site, degrade the vegetation, result in removal of the surface or subsurface soil horizons, create

compacted surfaces with steep gradients, or minimise runoff areas, the erosion potential on the site will increase.

If any erosion features are begin forming or are present as a result of the activities mentioned above the developer:

- » Assess the situation.
- » Take photographs of the soil degradation.
- » Determine the cause of the soil erosion.
- » Inform and show the relevant contractors the soil degradation.
- » Inform the contractor that rehabilitation must take place and that the contractor is to implement a rehabilitation method statement and management plan.
- » Monitor that the contractor is taking action to stop the erosion and assist them where needed.
- » Report and monitor the progress of the rehabilitation weekly and recorded all the findings in a site diary.
- » All actions with regards to the incidents must be reported on a monthly compliance report which will be submitted to the department.

The contractor/ developer (in consultation with the ECO) must:

- » Select a system to treat the erosion
- » Design the treatment system
- » Implement the system
- » Monitor the area to see if the system functions like it should, if the system fails, the method must be adapt or adjust to ensure the accelerated erosion is controlled.
- » Monitoring must continue until the area has been stabilised

5.2. Stormwater Management

The developer must assess the site for erosion indicators such as:

- » Bare soil
- » Exposed plant roots, pedestalling
- » Sheet erosion
- » Rill erosion
- » Hammocking
- » Erosion pavements
- » Terracettes
- » Gullies

In the assessment process the developer must assess all:

- » Disturbed watercourse areas by the development: roads, bridges, river crossings, cabling, permanent laydown areas, crane pads and any other remaining hard surfaces.
- » Construction activity limited to specified areas. Stockpiles of aggregate and material will be positioned at least 50 m away from drainage lines and wetlands.

If any erosion features are present as a result of the activities mentioned above the developer must:

- » Assess the situation
- » Take photographs of the soil degradation.
- » Determine the cause of the erosion.
- » Inform and show the relevant contractors the soil degradation.
- » Inform the contractor that rehabilitation must take place and that the contractor is to implement a rehabilitation method statement and management plan.
- » Monitor that the contractor is taking action to stop the erosion and assist them where needed.
- » Monitor the rehabilitation weekly and record the findings in a site diary.
- » All actions with regards to the incidents must be reported on in the monthly compliance monitoring report.

The contractor/ developer must (in consultation with the ECO):

- » Select a system to treat the erosion
- » Design the treatment system
- » Implement the system
- » Monitor the area to ensure that the erosion has been addressed adequately.
- » Monitor the erosion until the area has been stabilised.

6. Rehabilitation

The following erosion control measures and rehabilitation specifications must be implemented to ensure that good environmental practice is conducted and environmental compliance is achieved.

6.1. General Erosion Management

In this section the equipment needed to remediate erosion, the precautionary measures which must be taken to avoid erosion and mitigation requirements for already degraded areas.

6.1.1. Equipment

The civil works contractor may use the following instruments to combat erosion when necessary:

- » Reno mattresses
- » Slope attenuation
- » Hessian material
- » Shade catch nets
- » Gabion baskets
- » Mulching Run-off control (increase the amounts of runoff areas to disperse the water)
- » Silt fences
- » Storm water channels and catch pits
- » Shade / catch nets
- » Soil bindings
- » Geofabrics
- » Hydroseeding and/or re-vegetating
- » Mulching over cleared areas
- » Stone packing
- » Tilling (roughing the surface)

6.1.2. Methods to prevent accelerated erosion

The following practises should be considered and adhered to:

- » Ensure steep slopes are stabilised.
- » Ensure that steep slopes are not stripped of vegetation and left to dry out and become water repellent (which will cause increased runoff and a decreased infiltration rate) increasing the erosion potential.
- » Ensure that all water on site (rain water or water wastage from the construction process) does not result in any surface flow (increase velocity and capacity of water) as a result of the poor drainage systems.
- » Ensure that pooling of water on site is avoided, as the site and the general area consists of dispersive soils, pooling will cause an increase of infiltration on one area, causing the subsurface to begin eroding.
- » Ensure that heavy machinery does not compact those areas which are not intended to be compacted (i.e. areas intended to be managed), as this will result in compacted hydrophobic, water repellent soils which increase the erosion potential of the area. where compaction does occur, the areas should be ripped.
- » Ensure that compacted areas have adequate drainage systems to avoid pooling and surface flow.
- » Prevent the concentration or flow of surface water or stormwater down cut or fill slopes, or along pipeline routes or roads, and ensure measures to prevent erosion are in place prior to construction.
- » Ensure that stormwater and any runoff generated by hard surfaces should be discharged into retention swales or areas with rock rip-rap. These areas should

be grassed with indigenous vegetation. These energy dissipation structures should be placed in a manner that surface flows are managed prior to being discharged back into a natural watercourse to support the maintenance of natural base flows within the ecological systems and prevent erosion, i.e. hydrological regime (water quantity and quality) is maintained.

- » Ensure siltation and sedimentation through the use of the erosion equipment mentioned structures.
- » Ensure that all stormwater control features have soft engineered areas that attenuate flows, allowing for water to percolate into the local ground watertable in low quantities (to reduce runoff but prevent subsurface erosion).
- » Minimise and restrict site clearing to areas required for construction purposes only and restrict disturbance to adjacent undisturbed natural vegetation.
- » Ensure that vegetation clearing is conducted in parallel with the construction progress across the site to minimise erosion and/or run-off.
- » Ensure that large tracts of bare soil which would cause dust pollution in high winds, or have high erosion susceptibility and increase sedimentation in the lower portions of the catchment are controlled through temporary surface covering.
- » Ensure no diversion of water flows in catchment occurs.
- » Ensure that dust control measures are implemented, but prevent over-wetting/saturating the area (to cause pooling) and run-off (that may cause erosion and sedimentation).
- » Watercourse (stream) crossings should not trap any run-off, thereby creating inundated areas, but allow for free flowing watercourses.

6.1.3. Mitigation for previously degraded areas

Previously degraded areas could pose a threat to construction activities in the area and must therefore be stabilised, then remediated and rehabilitated through:

- » Protecting, stabilise and isolate the degraded areas to ensure no further damage is caused by erosion due to construction activities.
- » Increase the drainage in the area but avoid pooling.
- » Prevent increasing sedimentation in areas that have been choked by soils from degraded areas.
- » Once construction has been completed, a method statement must be drafted for the rehabilitation of the previously degraded areas, using equipment mentioned above and implemented.
- » Stabilisation of steep slopes must be undertaken.
- » Ensure that bare soil is covered and hydro seeded to reduce topsoil loss.

6.2. Methodologies

The following erosion control measures and rehabilitation specifications may be required to be implemented to ensure that good environmental practice is conducted and environmental compliance is achieved.

- » Topsoil covered with a geotextile or hessian material and a grass seed mixture (see Rehabilitation Specifications).
- » Logging or stepping following the contours of the slope, to reduce surface runoff.
- » Earth or rock-pack cut-off berms.
- » Packed branches to roughen the surface and promote infiltration.
- » Benches (sand bags).
- » Stabilisation of near vertical slopes (1:1 – 1:2), if created during construction, will be required to utilise hard structures that have a natural look. The following methods may be considered:
 - Gabions (preferred method with geotextile material).
 - Retaining walls.
 - Stone pitching.
- » The slopes of all stream diversions must be protected. The following methods may be considered:
 - Reno mattresses (preferred method), ensure that the reno mattresses are buried deep into the subsurface, to avoid undercutting from the water.
 - Coarse rock (undersize rip-rap)
 - Sandbags.
 - Stone packing with geotextile
- » Where feasible use rubber dams as stream diversions when establishing water course crossings. Although (and considering that these are non-perennial watercourses) the recommendation is to construct watercourse crossings during dry periods (or no flow periods), where possible.
- » Any concentration of natural water flow caused by road works or hardstands areas will be treated as follows:
 - if water flow is sub-critical, nothing is required
 - if water flow is supercritical, the outlets will be provided with protection (either gabions or stone pitching – depending on the flows) to release water subcritical back into the watercourse at a low velocity.

6.3. Engineering Specifications

A detailed Stormwater Management Plan describing and illustrating the proposed stormwater control measures must be prepared by the Civil Engineers and this includes erosion control.

Requirements for project design:

- » Erosion control measures to be implemented before and during the construction period, including the final stormwater control measures (post construction).
- » The location, area/extent (m²/ha) and specifications of all temporary and permanent water management structures or stabilisation methods.
- » A resident Engineer to be responsible for ensuring implementation of the erosion control measures on site during the construction period.
- » The Developer holds ultimate responsibility for remedial action in the event that the approved stormwater plan is not correctly or appropriately implemented and damage to the environment is caused.
- » Concrete lined drains placed adjacent to road to transfer the water to the existing water courses.
- » Frequent gravel drains hydroseeded placed on permanent roadway edges.
- » At the point where stormwater is discharged, energy dissipaters to be constructed to reduce the flow rate of run-off.
- » All cut and fill banks will be seeded with an approved seed mix (as per the rehabilitation specifications) to ensure bank stabilisation and the elimination of potential erosion. Reno mattresses may be used to ensure that the area remains stable.

6.4. Rehabilitation Specifications

- » Employ a Horticultural Landscape Contractor to fulfil the rehabilitation of disturbed areas post-construction.
- » A detailed Rehabilitation Plan describing and illustrating the proposed rehabilitation activities on site must be prepared i.e. areas of top soiling, seeding and replanting of vegetation; species mix; requirements for fertilisation; seed sowing rates; watering etc. (i.e. bill of quantities).
- » The following document should be consulted for further support with respect to information regarding rehabilitation, namely: The Department of Water Affairs and Forestry, February 2005. Environmental Best Practice Specifications: Construction Integrated Environmental Management Sub-Series No. IEMS 1.6. Third Edition. Pretoria.
- » These specifications may be modified by the Horticultural Landscape Contractor on consideration of site conditions.

6.5. Post- and during construction rehabilitation activities

- » Correct and appropriate stockpile management of topsoil will be required during the construction phase.
- » Rehabilitation of disturbed areas will be implemented as these areas become available for rehabilitation.
- » Disturbed areas will include, for example: construction camp site, areas where underground cabling has been laid/buried, roadsides of new access roads.

7. Rehabilitation steps to mitigate the eroded areas

- » Stockpiled topsoil must be spread over disturbed areas (150 – 200mm thick) just prior to planting/seeding.
- » Rip and scarify along the contours of the newly spread topsoil prior to watering and seeding.
- » Organic fertilizers or compost shall be used if site conditions require it and can be applied as part of hydro-seeding applications.
- » Seed should be sown into weed-free topsoil that has been stockpiled (i.e. original topsoil from the site).
- » Indigenous plants shall be used to rehabilitate disturbed areas.
- » Applying the seed through hydromulching (hydro-seeding) is advantageous (or organic mulching after seeding).
- » Watering is essential and rehabilitation should ideally occur during the wet season.
- » The topsoil in the area is vulnerable to erosion therefore the hydro-seeded surfaces must be covered with a shade cloth material or natural fibre (hessian material) to reduce the loss of soil while the plants establish.

7.1. 'Watering' to avoid erosion

- » Movement of livestock in newly rehabilitated areas must be restricted, where possible, while taking into consideration drinking areas/paths.
- » Watering the rehabilitated areas should be undertaken in the wet/rainy season essential but if this is not possible, an initial watering period (supplemental irrigation) will be required to ensure plant establishment (germination and established growth).
- » Generous watering during the first two weeks, or until the seeds have germinated, is required (unless adequate rainfall occurs) i.e. seed beds will need to be kept moist for germination to occur.
- » For grass to establish (once germination has occurred), rainfall or irrigation is needed at regular intervals, ideally every few days and possibly every day if weather conditions require it.
- » During dry periods, with no rainfall, 100 litres per m² (or 100mm of rain) over a month or more, may be necessary to establish plants capable of surviving dry weather (or otherwise specified by the Horticultural Landscape Contractor).

7.2. Seeding

The developer should make use of an appropriate mix of grass species for rehabilitation to be determined in consultation with a suitably qualified ecologist) and they must be mixed for sowing either in summer or in winter. Grass species application (Rutherford, 2006) is at the rate specified as kg/ha.

7.3. Steep slopes

- » Areas that have a steep gradient and require seeding for rehabilitation purposes should be adequately protected against potential run-off erosion e.g. with coir geotextile netting or other appropriate methodology.
- » Provision for wind should also be made on these slopes to ensure the fine grained soil is not removed.

7.4. Maintenance and duration

- » Rehabilitation will occur during construction, as areas for plant rehabilitation become available.
- » The rehabilitation period post construction is estimated to be over a period of 6 (minimum) to 12 months (maximum), or a time period specified by the Horticultural Landscape Contractor, particularly if planting of trees and shrubs occurs.
- » The rehabilitation phase (including post seeding maintenance) should be at least 6 months (depending on time of seeding and rainfall) to ensure establishment of plants with a minimum 80% cover achieved (excluding alien plant species).
- » If the plants have not established and the 80% is not achieved within the specified maintenance period, maintenance of these areas shall continue until at least 80% cover is achieved (excluding alien plant species).
- » Additional seeding may be necessary to achieve 80% cover.
- » Any plants that die during the maintenance period must be replaced.
- » Succession of natural plant species should be encouraged.

8. Conclusion

The Erosion Management Plan is a document to assist the Developer with guidelines on how to manage erosion. The implementation of management measures is not only good practice to ensure minimisation of degradation, but also necessary to ensure comply with legislative requirements. This document forms part of the EMPr, and is required to be considered and adhered to during the design, construction, operation and decommissioning phases of the project.

9. References

- Department of Environmental Affairs. (1983). *Conservation of Agricultural Resources Act 43 of 1983*. Pretoria: Department of Environmental Affairs.
- Coetzee, K. (2005). *Caring for Natural Rangelands*. Scottsville: University of KwaZulu-Natal Press.

Commission, F. R. (2009, March 10). *Forestry Commission*. Retrieved August Tuesday, 2012, from Forestry Commission: Forest Research : www.forestry.gov.uk

Tongway, D. J., & Ludwig, J. A. (2004). *Heterogeneity in arid and semi arid lands*. Queensland: Sustainable Ecosystems.

van der Linde, M., & Feris, L. (2010). *Compendium of South African Legislation*. Pretoria: Pretoria University Press.

**APPENDIX D:
GUIDELINES FOR INTEGRATED MANAGEMENT OF
CONSTRUCTION WASTE**

ENVIRONMENT PROCEDURE

Waste Management Plan

Table of Contents

1. Introduction	4
a. Purpose of this document.....	4
b. Scope	4
c. Waste Management Strategy	4
d. Waste generation	5
2. Legal Requirements.....	5
3. Definations and Abbreviations.....	6
a. Defination of waste relevant to operations	6
b. Abbreviations	7
4. Responsibilities	8
5. General Waste	8
a. Management of General waste	8
b. General Waste Streams	8
i) Compactable General Waste	8
ii) Un-compactable General Waste	8
c. Recycling Procedure.....	9
6. Hazardous waste	9
a. Management of Hazardous waste.....	9
b. Hazardous waste types	9
7. Waste Containers	9
a. Waste Container conditions.....	9

b.	Inspection of containers	9
c.	Placement of Waste Containers.....	9
8.	Waste storage areas and collection points	10
a.	Specifications of waste storage areas	10
i)	General waste storage area	10
ii)	Hazardous waste storage area.....	10
b.	Requirements of collection points	10
c.	Waste removal schedule	10
d.	Operations of waste removal system	10
9.	General Rules	11
a.	Records	11
b.	Review	11
c.	Reporting	11
10.	Conclusion.....	11
11.	References	11

Introduction

Sound waste management is better achieved when an Integrated Waste Management System is implemented. This is more evident on sites or in areas where different parties and aspects are involved. Integrated Waste Management is better achieved when system is underlined by sound environmental principles. These principles derived from section 2 of the National Environmental Management Act (Act 107 of 1998). The following principles apply to waste management.

A **Precautionary approach** will be followed in the sense that harm to health and the environment is prevented when waste is generated, treated and disposed off. The contractor as the generator of waste have to abide by the **Duty of Care** principle by ensuring that waste is disposed off in a manner that is environmentally sound and responsible. Management of waste must also follow an **Integrated and Holistic Approach** integrating health, safety and the environment in to the management approach and managing all aspects as a whole. By following the Best Practical Environmental Option one selects and implements the most sustainable management option in terms of the environment and the people surrounding it. The last principle that has to be considered in waste management is the **Polluter Pays** principle. This principle indicates that the costs for remediation and prevention of further pollution will fall on the responsible party.

Purpose of this document

A Waste Management Plan plays a key role in achieving sustainable waste management. This document is set to indicate the procedure that has to be followed during the handling, storage, transportation and disposal of waste that is generated from the activities on site.

Scope

The Waste Management Plan Procedure provides guidelines for waste management and applicable to employees, sub-contractors working on behalf of the Developer.

Waste Management Strategy

Waste will be managed according to the waste hierarchy as set in the National Environmental Management: Waste Act (Act 59 of 2008).The waste hierarchy dictates that the generation of waste should be avoided and minimised. If this is not possible the most desirable options will be reuse, recycle and recover waste. The last option will be disposal.

When waste is disposed it must be done in an environmentally safe manner and at a disposal site that is permitted and authorised to dispose of that waste. It is the generators duty to ensure that such disposal sites have sound and responsible management practices.

Waste will be segregated at source to facilitate re-use, recycling, and recovery. Segregation of waste will be made possible by means of waste containers that are allocated and marked for different waste streams that are identified within the content of this document.

Emergency Procedures will be followed in the unforeseen event of a spill or if waste burns on site.

All employees will receive training on waste management issues by means of induction training and toolbox talks that will take place once per week. Littering on site is prohibited. No person is allowed to discard of any litter on site except in bins provided for that purpose.

Waste generation

Daily operational activities will generate general waste, metal waste as well as hazardous waste on monthly basis. Figures of these wastes are not yet known and will vary within project cycles as there will be times of acceleration in activity and times decreased activity.

Sources of waste will include: empty containers, office paper, plastic water bottles, and food waste canteens, printer cartridges, and used vehicle oil from workshops

Legal Requirements

The following sources of South African Law have been identified and will form the basis of the (WMP). Developer will comply with all environmental policies or Acts that apply to the Project, and the Project Manager should familiarize himself with, and have access to, the following pieces of legislation as a minimum:

- Constitution of South Africa (Act No. 108 of 1996);
- **National Environmental Management Act (Act 107 of 1998);**
- **National Environmental: Waste Act (Act No. 59 of 2008);**
- **Hazardous Substances Act (Act No. 15 of 1973);**
- **Impacts and Aspects Register;**
- **Environmental Management Plan (EMPr)**
- **Environmental Authorisation**
- Minimum Requirements for the Disposal of Waste by Landfill, Edition 3 (2005); and
- Minimum Requirements for the Handling, Classification and Disposal of Hazardous Waste, Edition 3 (2005).

Definations and Abbreviations

a. Defination of waste relevant to operations

Environment Surroundings within which human exists and that are made up of:

- The land, water and atmosphere of the earth;
- Micro- organisms, plant and animal life;

- Any part or combination of the above and the interrelationships among and between them; and
- The physical, chemical, aesthetic and cultural properties and conditions of foregoing that influence human health and well-being. (NEMA Act, Act No. 107 of 1998).

Waste	means any substance, whether or not that substance can be reduced, re-used, recycled or recovered: <ul style="list-style-type: none"> a) that is surplus, unwanted, rejected, discarded, abandoned or disposed of; b) which the generator has no further use of for the purposes of production; c) that must be treated or disposed of; or d) that is identified as a waste by the minister, by notice in the Gazette, but: <ul style="list-style-type: none"> i) a by-product is not considered waste; and ii) any portion of waste, once re-used, recycled and recovered, ceases waste.
Hazardous	Means a source of or exposure to danger (NEMA, 1998)
Recovery	Means the controlled extraction of a material or the retrieval of energy from waste to produce a product
Recycle	a process where waste is reclaimed for further use, which process involves the separation of waste from a waste stream for further use and the processing of that separated material as a product or raw material.
Re-use	to utilise articles from the waste stream again for a similar or different purpose without changing the form or properties of the articles
Container	means a disposable or re-usable vessel in which waste is placed for the purposes of storing, accumulating, handling, transporting, treating or disposing of that waste, and includes bins, bin –liners and skips
Disposal	Means the burial, deposit, discharge, abandoning, dumping, placing or release of any waste into air or any land.

Hazardous Waste

Waste that has the potential to cause a negative threat/impact to humans and/or the environment. It includes, but is not limited to, batteries, neon lights, fluorescent lights, printer cartridges, oil, paint, paint containers, oil filters, IT equipment etc.

General waste Waste which does not pose an immediate hazard or threat to health or to the environment' and includes the following waste flows: domestic waste, construction and demolition waste, business waste, insert waste.

EMP Environmental Management Plan. A detailed plan of action prepared to ensure that recommendations for preventing the negative environmental Impacts and where possible improving the environment are implemented during the life cycle of the project. (Project EMP).

b. Abbreviations

ECO Environmental Control Officer
EMP Environmental Management Plan
WMP Waste Management Plan
NEM: WA (Act 59 of 2009) National Environmental Management: Waste
DWA Department of Water Affairs
I&AP Interested and Affected Parties/Person

Responsibilities

- i) The Developer Environmental Officer shall be responsible for compliance with this waste management plan and ensure that all waste generated during construction activities on site is managed in safely and in accordance with legislations..
- ii) Developer EO shall provide the Team HSE and ECO with a written monthly waste report, detailing both compliance with the environmental Specifications as well as Environmental Performance;
- iii) It is the responsibility of all employees to segregate at source and store waste in the appropriate bins and in designated areas and to ensure that waste is kept to a minimum and environment is not polluted and contaminated.

General waste

a. Management of general waste

General waste will be segregated at source and place in the correct waste bins designated for each waste stream. General waste will not be stored on site for longer than 30 days and will be collected and emptied on a weekly basis by waste management company for disposal.

b. General waste stream

This is waste that does not pose an immediate threat to health or the environment. Most of these waste streams will be designated to be re-used, recycle and recovered.

i) Compactable General waste

This is any waste type that are small in size and that can be compacted

- General waste: waste that does not fall within the defined waste streams that will be disposed of in landfill. Domestic waste will be discarded in waste bins that are labelled "General Waste". Source of this waste will be kitchen, beverage cans, plastic waste and cartons.
- Waste papers: These are waste paper boxes that are unwanted. This waste will be discarded in waste bins labelled "Waste paper, Boxes"

ii) Un-compactable general waste

This is waste that is large in size that cannot be disposed of in normal waste bins or skip. Most of the waste types in this category can be recycled or re-used within the operations on a construction site or can be recycled in to the local community.

- Scrap metals: all metal or steel that is discarded or termed off-cuts will form the bulk of the scrap metal waste stream. These metals will be placed in waste bins labelled "Metal Waste"

c. Recycling Procedure

All scrap/metal waste generated will be collected and sent to the recycling facilities for recycling purpose. Used oil shall be collected by recycling companies where applicable.

Hazardous waste

a. Management of hazardous waste

Hazardous waste will be stored in a safe and responsible manner. Hazardous waste will not be stored on site for more than 30 days. This hazardous waste will be placed in a waste bin labelled 'Hazardous Waste' and will be collected and disposed of as Hazardous waste at approved landfill site. All hazardous waste types will be identifiable at all times. Incompatible waste type will be stored separately.

b. Hazardous waste types

- Hydrocarbon contaminated materials: such as soil due to spills and oil leaks;
- Used equipments/vehicles oils: from vehicles being serviced at workshop;
- Printing cartridges; and
- Chemical waste (such as used oil, paint, insecticide).

Waste bins

a. Waste bins conditions

Developer will ensure that the waste bins used are suitable for the waste that is to be stored within. The waste bins will be in a good condition, not be corroded and may not permit leachate or be otherwise unfit for the safe storage of waste designated to that container. Bins will have mechanisms in place to prevent waste from becoming wind blow litter and it must be scavenger proof. Hazardous waste bins will be sealed to ensure that no spillages can occur. These bins will be also be labelled so as to identify type of waste, date of storage commencement and generator details.

b. Inspections of waste bins

Waste bins will be inspected on a daily basis to ensure that they remain in an acceptable condition for safe storage of waste. These inspections will be documented and records will be kept for future references.

c. Placement of waste bins

The bins will be placed in centralised locations in order to ensure that it is accessible to all employees. The waste bins will be emptied and the waste will be taken to the relevant designated areas (the central storage area or the waste transfer station) awaiting collection by waste removal companies.

Waste storage areas and collection points

a. Specifications of waste storage areas

Waste will be managed in such a way as to prevent it from becoming a nuisance such as odour and to prevent the breeding of vermin and vectors. Management practices will ensure that no environmental harm is caused. All waste area will be clearly marked with signs to specify that waste is being stored in that area and to indicate what the nature of waste is. Storage areas will be fenced with access control to prevent unauthorised access.

i) General waste storage areas

Storage areas for general waste will be kept clean and neat, with a high level of housekeeping.

ii) Hazardous waste storage areas

Storage areas for hazardous waste will be having a roof to divert rain water from waste containers and must be fully bunded (110%) with pollution collection measurements in place in case of any spills or leakages. A high level of house keeping must be maintained in and around the storage. A file with (MSDS) documents and waste acceptance forms must be kept on site.

b. Requirements of collection points

Points from which waste is collected to be taken to the storage areas or the transfer stations will be clearly accessible for vehicles.

d. Waste removal schedule

Waste bins will be emptied on a regular basis. This will either be daily, weekly or when bins have reached their capacity. A call for service will be issued to the waste removal company when bins are full.

General rules

a. Records

All waste removal records will be maintained on site where it is accessible to all interested and affected parties. These records will include an updated list of the waste streams and volumes generated and disposed of, all collection certificates and disposal certificate and all material recycled or re-used and the volume thereof.

b. Review

Developer Project Manager and Developer Environmental Officer will review this Waste Management Plan on a monthly basis.

c. Reporting

Waste disposal figures will be reported on a monthly basis to the HSE and ECO.

Conclusion

Compliance and implementation of this procedure will ensure effective management of waste on site. Developer and their sub-contractors will comply with the requirements of the EMP, the project RoD and other legislative requirements that may have an impact on waste management in general.

References

- (Emergency preparedness and Response Plan
- ISO 14001:2004;

**APPENDIX E:
PLANT RESCUE AND RE-VEGETATION
MANAGEMENT PLAN**

METHODS FOR PLANT RESCUE AND RE-VEGETATION MANAGEMENT PLAN

List of Abbreviations

CARA:	Conservation of Agricultural Resources Act 43 of 1983
DEA:	Department of Environmental Affairs
EA:	Environmental Authorisation
ECO:	Environmental Control Officer
EMP:	Environmental Management Plan
NEMA:	National Environmental Management Act 107 of 1998
LFA:	Landscape Functional Analysis (Tongway and Hindley 2004)
IAP:	Invasive Alien Plant

List of Definitions:

Accelerated soil erosion: Soil erosion induced by human activities.

Acceptable cover: An acceptable cover shall mean that not less than 75% (in an area with rainfall above 400 mm per annum), or 40% (in regions receiving less than 400 mm rain per annum), of the area planted or hydroseeded shall be covered with grass and that there shall be no bare patches of more than 500 mm in maximum dimension.

Alien: originating from another country or continent and originally different environment, commonly used to describe plants that are not indigenous to South Africa and have become problematic (spreading rapidly, threatening existing biodiversity).

Allelopathic components: one or more biochemical compound produced by a plant and released through leaf litter or roots that suppresses the growth, survival, and reproduction of other surrounding vegetation.

Bare soil: Un-vegetated soil surface, unaltered by humans.

Compacted soil surface: A soil surface that has been hardened by an outside source, causing the soil to be more compacted than the surrounding area.

Container plants: Container plants include all vegetation which are bought or supplied in acceptable containers from nurseries or vegetation lifted out of their natural position and placed in containers.

Desirable end state: the future condition or target on which the rehabilitation is designed and that will serve later as a basis for rehabilitation success evaluation. This can be based on a reference site or modelled according to available information on historic vegetation.

Ecological rehabilitation: The process of assisting the recovery of a degraded or damaged ecosystem in a trajectory that renders the ecosystem fully functional, stable, and able to develop further, but not necessarily returning to the original historic state.

Ecological restoration: The process of assisting the recovery of an ecosystem that has been degraded damaged or destroyed, in a trajectory that ultimately returns the ecosystem to its natural successional stage.

Ecosystem: The combination of biota within a given area, together with a suitable environment that sustains the biota and the interactions between biota. It can have a spatial unit of any size, but shows some degree homogeneity as far as structure, function and species composition is concerned. Small-scale ecosystems typically link up to larger scale ecosystems and all contribute to the ecosystem function and services at the landscape-scale.

Establishment of grass: All procedures necessary to produce an acceptable cover of grass on an area.

Establishment Period: The Establishment Period is defined as the period beginning from the actual planting or placing of vegetation until three months thereafter, unless otherwise specified or unless grass cover is unacceptable or unless plants have not taken.

Extinction debt: is a concept that describes the future extinction of species due to events in the past. Extinction debt occurs because of time delays between impacts on a species, such as destruction of habitat or reduction of population size, and the species' ultimate disappearance.

Geophytic: resprouting during the growing season from an underground storage organ such as bulbs, corms, tubers or rhizomes, and dying back completely during unfavourable seasons.

Hydroseeding: To apply seed in a slurry with water (plus other materials to enhance growth) by means of a spraying device.

Indigenous: refers to a plant or animal that occurs naturally in the place in which it is currently found.

Invasive plant: a kind of plant which has under section 2 (3) of CARA been declared an invader plant, and includes the seed of such plant and any vegetative part of such plant which reproduces itself asexually.

Landscape: Consists of a mosaic of two or more ecosystems that exchange organisms, energy, water, and nutrients.

Nursery conditions: These are the necessary conditions to maintain healthy growth of rescued and/or container plants. This includes protection of such plants against wind, frost, direct sunlight, pests, rodents, diseases, and drought. It also includes the provision of suitable water, fertilizer and any other measures required to maintain the container plants.

Period of Maintaining: The Period of Maintaining is defined as the period following directly after the Establishment Period until the end of the Period of Maintenance for the whole Contract as defined in the General Conditions of Contract, unless otherwise specified.

Revegetation: The process of establishing a vegetative cover on exposed soils, regardless of species composition or structure, as long as the species are

non-invasive and their presence will not impede the gradual process of ecological rehabilitation or –restoration.

Soil Erosion: is a natural process whereby the ground level is lowered by wind or water action and may occur as a result of inter alia chemical processes and or physical transport on the land surface.

Scarifying: To roughen the surface of soil as a preparation for seeding or topsoil addition.

Trimming: To neatly round off the levels of existing or previously shaped earthworks to blend in with the levels of other earthworks, constructed works, or natural landforms.

Transformation: The conversion of an ecosystem to a different ecosystem or land use type.

Topsoil: uppermost layer of soil, in natural vegetation maximally 30 cm, in cultivated landscapes the total depth of cultivation, containing the layer with humus, seeds and nutrients. Topsoils that are applied to landscapes to be rehabilitated must be free of refuse, large roots and branches, stones, alien weeds and/or any other agents that would adversely affect the topsoils suitability for re-vegetation.

Weed: a plant that grows where it is not wanted, and can therefore be an indigenous or alien species. An unwanted plant growing in a garden is just called a weed, but the 198 listed IAPs are called “declared weeds and invaders”.

1. Purpose

The Plant Rescue and Revegetation Management Plan addresses the need to mitigate all impacts leading to disturbed vegetation, loss of species and/or agricultural potential, disturbed soil surfaces, and generally bare soils prone to erosion and further degradation on the proposed development site.

The objective of the plan is therefore to provide:

- » Protocols for the removal, temporary storage and replanting of plant species of conservation concern
- » Protocols for the rehabilitation of vegetative cover across the project area
- » Tools for planning the rehabilitation work and responding to unforeseen events
- » Guidelines on implementation and post-implementation tasks
- » Criteria for evaluating rehabilitation success
- » A summary of items to be included in the rehabilitation budget to ensure that there is sufficient allocation of resources on the project budget so that the scale of EMPr-related activities is consistent with the significance of project impacts

2. Scope

This document is a plant rescue, rehabilitation, and revegetation plan that provides a guideline to be applied by all contractors on the development site. This plan, as part of the project EMPr, is a legally binding document that must be implemented to fulfill the requirements of relevant legislation. However, the management plan is an evolving guideline that needs to be updated or adapted as progress is made with the rehabilitation and revegetation of the project area, and successes and failures of procedures identified.

The objective of rescuing plants, rehabilitation and revegetation on the project area is:

- » Preventing the loss of species either directly or through future extinction and minimising impacts of development on population dynamics of species of conservation concern.
- » Preserving the natural configuration of habitats as part of ecosystems, thus ensuring a diverse but stable hydrology, substrate and general environment for species to be able to become established and persist.
- » Preserving or re-creating the structural integrity of natural plant communities.
- » Actively aid the improvement of indigenous biodiversity according to a desirable end state according to a previously recorded reference state. This reference state, if healthy, will be dynamic and able to recover after occasional disturbances without returning to a degraded state.
- » Improving the ecosystem function of natural landscapes and their associated vegetation.

3. Legislation and Standards

Relevant legislation:

- » Conservation of Agricultural Resources Act 43 of 1983
- » Environmental Conservation Act 73 of 1989
- » National Forestry Act 84 of 1998
- » National Environmental Management Act 107 of 1998
- » Northern Cape Nature Conservation Act (Act No. 9 of 2009)

4. Effect of clearing alien vegetation

Invasive and Alien Plants (IAPs) gradually displace and suppress indigenous and/or herbaceous vegetation as their stands become bigger and denser. In addition, they use more water, hence desiccate the soil more, and may alter chemical properties of the soil – partially through secondary compounds released from their litter, partially from compounds released from roots. These altered soils suppress the germination and establishment of herbaceous species, leading to bare soil underneath dense IAP canopies.

After clearing dense stands of invasive shrubs, soil surfaces are thus generally bare with topsoil exposed to erosion and often already somewhat capped and eroded.

5. Effect of removing individuals of species of conservation concern

Species of conservation concern are declining either due to overexploitation or because their range of occupancy is limited and further infringed on by development. Most plant populations require a certain minimum number of individuals within a population or metapopulation to allow for sufficient genetic transfer between individuals. This prevents genetic erosion and hence weakening of the ability of individuals to persist in their environments. Similarly, where the distance between metapopulations is significantly increased due to fragmentation and the resultant loss of some populations, populations may suffer genetic decline due to restricted movement of pollen. Pollinators or other species that depend on a particular plant species for a specific microhabitat or food source may be equally affected because of the reduction of available resources. Therefore the aim of plant rescue actions are always to maintain as many individuals of a plant population in as close proximity to the original habitat as possible to minimise loss of individuals and fragmentation of populations to prevent the creation of future extinction debts of the development.

6. General: Plant rescue and protection

Successful plant rescue can only be achieved if:

- » Species can be removed from their original habitat with minimal damage to the plant, especially the roots.
- » All plants removed are safely stored and treated according to their specific requirements prior to being transplanted again.
- » They are relocated into a suitable habitat and protected from further damage and all disturbances to aid their re-establishment.
- » Timing of planting activities is planned with the onset of the growing season.
- » Steps are taken where necessary to aid the initial establishment of vegetation, including occasional watering.

6.1. Time of planting

- » All planting shall be carried out as far as is practicable during the period most likely to produce beneficial results (i.e. during the peak growing season), but as soon as possible after completion of a section of earthworks.
- » Drainage line rehabilitation preparation must be done during autumn, and planting of appropriate species in these areas should commence during early spring after the first rains.

7. General: IAP removal

Removal of invasive plants should at all time follow the specifications and guidelines of the Working for Water Programme (refer also to invasive plant management plan).

Information can be obtained from the relevant website:

<http://www.dwaf.gov.za/wfw>

Detailed information on clearing methods is available on the above websites "Alien Invasive Plants" menu (clearing methods, operational standards and species-specific treatment methods).

8. General: Rehabilitation and re-vegetation

Successful rehabilitation can only be achieved with:

- » A long-term commitment
- » Practical, adaptive management
- » Viable goals of desired outcomes

Prior to vegetation rehabilitation, all stakeholders involved should be consulted to determine:

- » What the rehabilitation is ultimately aiming for– rehabilitation of cropping/grazing lands or rehabilitation of indigenous vegetation, after soil erosion and storm water management is in place and IAPs have been cleared?

- » A clear definition of incompatible and compatible vegetation on and in the immediate surroundings of the development must be defined and maintained as such. No tree or shrubs shall be allowed to grow to a height in excess of the horizontal distance of that tree or shrub from the nearest newly developed structure or to grow in such a manner as to endanger the development or its operation
- » Who will take long-term ownership and hence responsibility for the rehabilitation and its subsequent monitoring and management? Continued monitoring of vegetation establishment and composition, as well as erosion detection will have to be coupled with continued follow-up maintenance of rehabilitation and erosion control from commencement of activity up to the decommissioning phase.

The ultimate objective for rehabilitation should focus on the stabilisation of soil erosion, retaining agricultural potential of transformed areas and /or the establishment of a dense and protective plant cover and the maintenance of habitats to enable vegetation to persist and flourish on rehabilitated areas indefinitely, ultimately relying only on environmental resources.

8.1. Map and create management areas

The entire project area must be mapped and divided into management areas indicating:

- » Current land cover
 - Roads and residential
 - Areas with IAPs, subdivided further in sparse or dense infestations where applicable
 - Transformed areas
 - Untransformed indigenous vegetation

For every one of the management areas, the project proponent, in consultation with the land users, will have to decide what intervention will be necessary, desirable, and feasible to enable the development of the project and long-term sustainable maintenance of infrastructure. Thus for every management area there must be an operational outline on:

- » what will happen there
- » what needs to be mitigated – including storm water- and erosion management
- » which management units need priority intervention/mitigation
- » how will this mitigation / intervention be done (method statements) including schedule of work
- » realistic and desirable end states including list of species that should be established to initiate rehabilitation after initial revegetation
- » approximate timeframes
- » monitoring protocol to evaluate success or failures of interventions

- establish permanently marked transects and monitor with fixed-point photography
- » who will be responsible for doing what
- » how will different actions be integrated to achieve and maintain or improve the desirable end state of the environment of that management unit

Special attention will have to be given to drainage zones, as these not only have very active morphodynamics, but are also distributors of seeds – both indigenous and of IAPs. Thus clearing a downstream invasion of aliens to enable maintenance of the development will be futile if the upstream IAPs are not cleared or at least aggressively controlled.

8.2. Setting realistic rehabilitation goals

Rehabilitation efforts typically aim at improving ecosystem function that consists of a series of processes, which can in the end be evaluated against a desired outcome or reference state of the vegetation and environment.

Attainable goals of rehabilitation on the project area should be possible and viable for at least the following:

- » Stabilisation of soils
- » Stabilisation of riparian areas
- » Storm water reduction through management and wetland integrity
- » Clearing of IAPs
 - The degree to which IAPs can be cleared from the project area needs to be determined according to desirability, available project funding, personnel and project requirements
- » Restoring and/or rehabilitating vegetative cover on non-transformed areas to obtain an acceptable vegetation cover that can be maintained or persists on its own indefinitely

8.3. Remove or ameliorate the cause of degradation

This will include:

- » Physical rehabilitation of topsoil where it has been removed.
- » Topsoil on areas that have not been cultivated are considered as the upper 20 - 30 cm only. These contain the most important nutrients, micro flora and –fauna essential for nutrient cycling processes. Topsoils are also an important source of seeds.
- » Subsoils and overburden substrata lack the above elements and will first have to be used for physical rehabilitation of landscapes as and where necessary, and then overlain with topsoils
- » Stabilisation of topsoils and prevention of erosion – refer to the Erosion management pan

- » Removal of all invasive vegetation – refer to the Invasive Management Plan
 - Where it is desirable to use brush or logs of the cleared vegetation for soil stabilisation, such material must be free of regenerative material – e.g. seeds or root suckers

8.4. Initial revegetation

Immediately after clearing of vegetation, the soil surface must be inspected for signs of erosion and stabilised as soon as possible. After completion of construction, such erosion stabilisation should preferably be with a cover of vegetation. A dense initial grass or other perennial cover will be desirable. The appropriate seed mix should be determined in consultation with an ecologist familiar with the area. The aim of the first vegetation cover is to form a protective, relatively dense indigenous layer to slow runoff, increase moisture infiltration into the soil, and gradually change the soil nutrient status in order for it to be more favourable for other desirable indigenous vegetation to become established.

8.5. Plant Search and Rescue

Prior to construction, once all the areas where topsoil will be removed or areas will be transformed have been demarcated, the contractor will be responsible to remove all bulbous species from the topsoil, as well as succulents and small indigenous shrubs that can be transplanted. These are to be kept in a raised, protected position in a designated area until they can be replanted again as part of the rehabilitation process. Further details are listed in the operation standards.

8.6. Natural seed banks and improvement of plant structural and compositional diversity

It is expected that soil seed banks of indigenous vegetation will be present to initiate initial vegetation cover, but may not be sufficient to establish an acceptable cover of desirable species. After deciding which indigenous species should be re-introduced, seed should be ideally collected from site or an environmentally-matched site nearby.

Seed collection may be done throughout the year as seed ripens, but can also be restricted to summer, when a large amount of the perennial seed should have ripened. Seeds should be stored in paper or canvas bags dusted with insecticide, and sown at the onset of the rainy season.

Alternatively, slower-growing perennials may be raised from seed or cuttings in a nursery and then transplanted once established. It will be beneficial to investigate if community members would be able to create and maintain such a nursery, or if there are nurseries in the area, that raise indigenous flora from the area.

The final vegetation cover should resemble the original (non-encroached) vegetation composition and structure as far as practicable possible or permissible within each management unit.

For drainage areas:

- » First restore drainage line morphology following the guidelines of the Erosion management plan – without that ecological recovery cannot be initiated
- » Determine if natural seed sources may be present further upstream
- » If such upstream seed sources are still present, rehabilitation of riparian vegetation after soil erosion management will most likely occur naturally, PROVIDED that follow-up monitoring of the establishment of vegetation is carried out, and all invasive species eradicated as they emerge. This can only be achieved with a long-term commitment (> 5 years minimum)
- » Should no upstream seed resources be available, suitable species (as determined in consultation with an ecologist) should be sown or planted.

8.7. Monitoring and follow-up action

Throughout the lifecycle of the development, regular monitoring and adaptive management must be in place to detect any new degradation of ecosystems affected by the development, and remedy these as soon as detected.

During the construction phase, the contractor will be responsible for initiating and maintaining a suitable monitoring system. Once the development is operational, the project proponent will have to identify a suitable entity that will be able to take over and maintain the monitoring cycle and initiate adaptive management as soon as it is required. Monitoring personnel must be adequately trained.

The following are the minimum criteria that should be monitored:

- » Composition and density of replanted vegetation, distinguishing between species introduced for initial revegetation only and species that are part of the pre-determined desirable end state
- » Associated nature and stability of surface soils
 - It is recommended that permanent transects are marked and surveyed annually according to the LFA technique (Tongway and Hindley 2004), adapted to integrate both surface soil characteristics and the vegetation to be monitored
- » Re-emergence of IAPs
 - If noted, remedial action must be taken immediately according to Working for Water specifications
- » Nature and dynamics of riparian zones
 - Stability of riparian vegetation
 - Any form of bank erosion, slumping or undercutting
 - Stability of channel form and width of streams – if this increases, it shows that vegetation on plains and/or riparian areas and upper drainage lines are

not yet in a stable enough state to be fully functional in reducing excess runoff and the ecosystem overall is losing valuable resources

8.8. Timeframes and duration

- » Rehabilitation will occur during construction, as areas for the re-application of topsoil and revegetation become available or where revegetation can be initiated after clearing of invasives or to stabilise erosion.
- » The initial revegetation period post construction is estimated to be over a period of 6 (minimum) to 12 months (maximum), or a time period specified by the Horticultural Landscape Contractor, particularly if planting of trees and shrubs occurs.
- » The rehabilitation phase (including post seeding maintenance) should be at least 12 months (depending on time of seeding and rainfall) to ensure establishment of an acceptable plant cover is achieved (excluding invasive plant species or weeds).
- » If the plants have not established and the acceptable plant cover is not achieved within the specified maintenance period, maintenance of these areas shall continue until at acceptable plant cover is achieved (excluding alien plant species or weeds).
- » Additional seeding or planting may be necessary to achieve acceptable plant cover. Hydroseeding may have to be considered as an option in this case.
- » Any plants that die, during the maintenance period, shall be replaced by the Horticultural Landscape Contractor (at the Horticultural Landscape Contractor's cost if it was due to insufficient maintenance).
- » Succession of natural plant species should be encouraged
- » Monitoring of rehabilitation success and follow-up adaptive management, together with clearing of emerging invasives shall be carried on until the decommissioning phase has been completed.

9. Conclusion

The Plant Rescue and Revegetation Management Plan is a document to assist the contractor and the developer with guidelines on how to plan and implement the required work, and understand the concepts behind successful rehabilitation. The exact details of the rehabilitation plan will depend on the determined extent of rehabilitation that will have to be undertaken, available funding, and desirable end state of the vegetation after rehabilitation.

10. References and further reading

- Clewell, A., Rieger, J. and Munro, J. (2005). *Guidelines for Developing and Managing Ecological Restoration Projects, 2 Edition*. www.ser.org and Tucson: Society for Ecological Restoration International.
- Coetzee, K. (2005). *Caring for Natural Rangelands*. Scottsville: University of KwaZulu-Natal Press.
- Department of Environmental Affairs,(1983). *Conservation of Agricultural Resources Act 43 of 1983*. Pretoria: Department of Environmental Affairs.
- Society for Ecological Restoration International Science & Policy Working Group. 2004. *The SER International Primer on Ecological Restoration*. www.ser.org & Tucson: Society for Ecological Restoration International.
- Tongway, D.J. and Hindley, N.L. (2004) *Landscape Function Analysis: Procedures for Monitoring and Assessing Landscapes*, CSIRO Sustainable Ecosystems, CANBERRA, AUSTRALIA.
- Tongway, D.J., Freudenberger, D.O., Noble, J.C., and Hodgkinson, K.C. (Eds). (2003). *Landscape Ecology, Function and Management*. CSIRO Sustainable Ecosystems, CANBERRA, AUSTRALIA.

A. APPENDIX: RECOMMENDED OPERATIONAL STANDARDS

OBJECTIVE: Revegetate and Rehabilitate disturbed areas

The Contractor must take all reasonable measures to ensure that plant species of conservation concern are rescued and survive indefinitely. Landscaped topsoils as well as areas cleared of IAPs must be adequately rehabilitated and /or revegetated to ensure that the ecosystems affected by the development regain and/or retain their functionality indefinitely.

Throughout the lifecycle of the development, regular monitoring and adaptive management must be in place to detect any new degradation of ecosystems affected by the development and remedy these as soon as detected.

Mitigation measures relating to the vegetative cover as part of a healthy ecosystem must be implemented in order to effectively limit and gradually reverse the impact on the environment. The focus of the mitigation measures laid out below relate to project-related disturbances. Where such disturbances are exacerbated by farming-related disturbances or vice versa, mitigation measures must be carried out in consultation with the land-user responsible.

Project component/s	Project components affecting the objective: <ul style="list-style-type: none"> » Turbines » Access roads and cabling between and to turbine units » Power line » Sealed surfaces (e.g. roofs, concrete surfaces, compacted road surfaces, paved roads / areas) » Substation » All other infrastructure
Potential Impact	<ul style="list-style-type: none"> » Loss of suitable substrate for a stable vegetation cover » De-stabilisation and/or alteration of substrate and hence degradation of vegetation cover, significant change in species composition or loss of agricultural potential » Loss of suitable habitat for flora and fauna » Leaky ecosystem due to loss of nutrients and moisture from the system, leading to a less resilient vegetation cover and loss of ecosystem function and -services » Degradation and/or loss of riparian areas and wetlands on and beyond the project boundaries » A loss of indigenous vegetation cover and possibly endangered species » Disturbance of fauna species
Activities/risk sources	<ul style="list-style-type: none"> » Rainfall and wind erosion of disturbed areas » Excavation, stockpiling and compaction of soil » Existing IAPs as well as clearing thereof » Concentrated discharge of water from construction activity or new

PROPOSED SENEKAL 2 SOLAR ENERGY FACILITY NEAR MKUZE, KWAZULU-NATAL
PLANT RESCUE AND RE-VEGETATION MANAGEMENT PLAN

	<p>infrastructure</p> <ul style="list-style-type: none"> » Storm water run-off from sealed, altered or bare surfaces » Mobile construction equipment movement on site » Cabling and access roads construction activities » Power line construction activities » River/stream/drainage line road crossings » Roadside drainage ditches » Project related infrastructure » Premature abandonment of follow-up monitoring and adaptive management of rehabilitation
Mitigation: Target/ Objective	<ul style="list-style-type: none"> » To minimise loss of plant species of conservation concern » To minimise unfavourable runoff conditions and loss of resources from the ecosystems » To minimise erosion of soil from site during and after construction » To minimise and mitigate unfavourable alteration to drainage lines, especially incision » To minimise damage to indigenous vegetation during and after construction » No accelerated overland flow related surface erosion as a result of project infrastructure » No reduction in the surface area or general nature and functionality of wetlands (drainage lines and other wetland areas) as a result of the establishment of infrastructure on the project areas and beyond its boundaries » A clear reduction of IAPs on the project area and replacement thereof by indigenous vegetation according to a pre-determined desirable end state

Mitigation: Action/control	Responsibility	Timeframe
Planning		
Classify the entire project area into management units according to current land cover and state of the environment and map accordingly	Developer / Contractor	Prior to construction
<p>For each management unit</p> <ul style="list-style-type: none"> » establish what interventions will be necessary relating to IAPs, soil erosion management, topsoil handling, landscape rehabilitation and revegetation » where rehabilitation and revegetation will be necessary, decide on the desired end state of vegetation for that management unit and create a list of species to be established on specific sites » outline the management of construction activities, including topsoils, excavated materials and felled biomass in a manner that will optimise the rehabilitation goals as fast and as effective as possible for that management unit 	Developer / Contractor in collaboration with ECO and land-users	Prior to construction
Plant Rescue and indigenous plant materials		
<p>All harvested plant materials shall be labelled with</p> <ul style="list-style-type: none"> » Genus as minimum, species if known 	Contractor	Prior to construction

PROPOSED SENEKAL 2 SOLAR ENERGY FACILITY NEAR MKUZE, KWAZULU-NATAL
PLANT RESCUE AND RE-VEGETATION MANAGEMENT PLAN

Mitigation: Action/control	Responsibility	Timeframe
<ul style="list-style-type: none"> » Habitat from which materials were collected 		
<p>Indigenous plant materials for re-vegetation:</p> <ul style="list-style-type: none"> » All plant material shall be obtained from the search-and-rescue operation on the site prior to clearing or from local nurseries or reputable seed providers » Indigenous materials shall only be removed from their habitat with the necessary permits whenever applicable » Each plant removed shall be handled, packed and stored in a manner suitable for that species » Removed plants shall be protected from windburn or other damage during transportation » No plants or plants with exposed roots shall be subjected to excessive exposure to drying winds and sun, or subjected to water logging » All plants shall be kept free from plant diseases and pests and protected from rodents or other damaging agents » All indigenous plants that have been removed prior to clearing shall be returned to conditions resembling their original habitat as close as practically possible 	Contractor in collaboration with ECO	Before, during and after construction
<p>Seed stocks for rehabilitation</p> <ul style="list-style-type: none"> » Seed can be used for cultivation of desirable species for revegetation » Seed shall be utilised for direct sowing or hydroseeding » Seed collected from the site must be dried and stored in a suitable facility under cool (7-10°C), dry, insect free conditions until required for cultivation or seeding. Only viable, ripe seed shall be used » Seed harvested shall be insect- and pathogen free » Seed harvested shall not contain materials of any invasive species » Prior to clearing, seed should be collected from the site on a regular basis as species start to seed to maximise the amount of fully developed seed secured » From sites that will be cleared, 100% of all seeds available may be collected » From sites adjacent to the development, 25% of seeds can be collected for rehabilitation 	Contractor and ECO	Before, during and after construction
<p>Site-specific nursery</p> <ul style="list-style-type: none"> » On-site nursery facilities shall be erected for the holding of rescued plant material and the propagation of appropriate species for re-vegetation » Where nursery facilities can only cater for rescued plants, a suitable (local) nursery shall be identified that will be willing to receive seeds collected and propagate the necessary species for later revegetation » Soil or other propagation media, were used, shall be weed- and pathogen free » Argentine ants shall be controlled at all times 	Contractor, ECO to control	Prior to construction

PROPOSED SENEKAL 2 SOLAR ENERGY FACILITY NEAR MKUZE, KWAZULU-NATAL
 PLANT RESCUE AND RE-VEGETATION MANAGEMENT PLAN

Mitigation: Action/control	Responsibility	Timeframe
<ul style="list-style-type: none"> » The area where plants are stored shall be kept free of weeds » Plants stored in the designated area shall be protected from rodents, excessive sun and wind, and inspected regularly until being planted for pathogens and pests, and then treated accordingly » The nursery shall be adequately secured to prevent loss or theft of species 		
<p>Protected flora</p> <ul style="list-style-type: none"> » Ensure that no indigenous protected flora is removed from its original habitat in the project area without legal documents from the relevant authorities 	Contractor	Before, during and after construction
Topsoil		
<p>Avoid</p> <ul style="list-style-type: none"> » Management units that will not be developed or selected elements – trees, rocky outcrops on site shall be maintained in situ and demarcated clearly to prevent any disturbance during construction » These units will be considered as NO-GO areas during construction 	Contractor and ECO	Before, during and immediately after construction
<p>Invasives</p> <ul style="list-style-type: none"> » Remove all invasive shrubs as per the Working for Water specifications 	Contractor, ECO to control	Before, during and after construction
<p>Mulch</p> <ul style="list-style-type: none"> » all trees felled shall be debranched and the logs used in controlling erosion from re-landscaped topsoils and/or adding surface roughness and organic matter to topsoils to be rehabilitated » all cut branches from trees, as well as all shrubs cleared from the construction site shall be shredded to mulch, either by a chipper or by hand to sticks no longer than 10 cm » preparation of mulch shall be done at source » mulched material shall be free of seed-bearing invasive plant material » the mulch shall be suitably stored – bagged if necessary - and will be used in rehabilitation and soil erosion management on the site » should additional mulch be used for rehabilitation, this should be obtained from invasive shrubs of areas not cleared » mulch shall be stored for as short a period as possible 	Contractor, ECO to control	Before, during and immediately after construction
<p>Storage of topsoil and subsoil:</p> <ul style="list-style-type: none"> » topsoils constitute the upper 20 – 30 cm of soil only, lower layers of soil are regarded as subsoil » stockpiling of topsoils and subsoils shall only be done on previously transformed areas, and be kept at least 50 m from any remaining natural vegetation 	Contractor, ECO to control	During and immediately after construction

Mitigation: Action/control	Responsibility	Timeframe
<ul style="list-style-type: none"> » care shall be taken during stockpiling to prevent the mixing of topsoil with subsoil and/or any other material » topsoils shall be stored in heaps no higher than 100 cm, and shall be re-applied as soon as possible » care shall be exercised during stockpiling of topsoils to prevent compaction thereof » topsoils shall be adequately protected from erosion by preventing concentration of surface water and scouring of slopes » erosion of topsoils has to be contained and repaired as soon as it occurs, before large scale erosion and loss of topsoil develops » any logs obtained during clearing operations can be used in continuous rows to curtail erosion where necessary. Geojute (geotextile) shall be used additionally if the logs are not sufficient to remedy any erosion – for details refer to the erosion management plan » where topsoils need to be stored longer than 6 months, such stockpiles shall be revegetated, even if this has to include re-seeding to achieve an acceptable cover of vegetation 		
<p>Boulders and rocks</p> <ul style="list-style-type: none"> » where removed during clearing, should be stored separately and used in the rehabilitation program » boulders and rocks must be partially buried within the topsoil layer wherever practical to provide greater soil-holding stability and reduce water erosion » placement of rocks and boulders shall mimic the natural occurrence of rocks and boulders in the area 	Contractor, ECO to control	During and after construction
Rehabilitation of surface		
<p>Prior to the application of topsoil</p> <ul style="list-style-type: none"> » subsoil shall be shaped and trimmed to blend in with the surrounding landscape or used for erosion mitigation measures » ground surface or shaped subsoil shall be ripped or scarified with a mechanical ripper or by hand to a depth of 15 – 20 cm, » compacted soil shall be ripped to a depth greater than 25 cm and the trimmed by hand to prevent re-compacting the soil » any rubbish, concrete remnants, steel remnants or other objects introduced to the site during the construction process shall be cleared before ripping, or shaping and trimming of any landscapes to be rehabilitated takes place » shaping will be to roughly round off cuts and fills and any other earthworks to stable forms, sympathetic to the natural surrounding landscapes 	Contractor, ECO to control	During and after construction

PROPOSED SENEKAL 2 SOLAR ENERGY FACILITY NEAR MKUZE, KWAZULU-NATAL
 PLANT RESCUE AND RE-VEGETATION MANAGEMENT PLAN

Mitigation: Action/control	Responsibility	Timeframe
<p>Application of topsoil</p> <ul style="list-style-type: none"> » topsoils shall be spread evenly over the ripped or trimmed surface, if possible not deeper than the topsoil originally removed » the final prepared surface shall not be smooth but furrowed to follow the natural contours of the land » the final prepared surface shall be free of any pollution or any kind of contamination » care shall be taken to prevent the compaction of topsoil » where applicable, the final prepared surface will also contain scattered rocks and/or logs to mimic the natural condition of the original habitat or area and to aid in soil stabilisation and erosion control 	Contractor, ECO to control	During and after construction
<p>Soil stabilisation</p> <ul style="list-style-type: none"> » mulch from brush shall be applied by hand to achieve a layer of uniform thickness » mulch shall be rotovated into the upper 10 cm layer of soil <ul style="list-style-type: none"> ○ this operation shall not be attempted if the wind strength is such as to remove the mulch before it can be incorporated into the topsoil » in very rocky areas a layer of mulch shall be applied prior to adding the topsoil » measures shall be taken to protect all areas susceptible to erosion by installing temporary and permanent drainage work as soon as possible <ul style="list-style-type: none"> ○ where natural water flow-paths can be identified, subsurface drains or suitable surface drains and chutes need to be installed » additional measures shall be taken to prevent surface water from being concentrated in streams and from scouring slopes, banks or other areas <ul style="list-style-type: none"> ○ if mulch is limited, available mulch, together with harvested seeds, should be concentrated in these hollows to promote rapid re-vegetation in them » runnels or erosion channels developing shall be back-filled and restored to a proper condition <ul style="list-style-type: none"> ○ such measures shall be effected immediately before erosion develops at a large scale » where erosion cannot be remedied with available mulch, logs or rocks, geojute shall be used to curtail erosion 	Contractor, ECO to control	During and after construction
<p>Borrow-pits</p> <ul style="list-style-type: none"> » shall be shaped to have undulating, low-gradient slopes and surfaces that are rough and irregular, suitable for trapping sediments and facilitation of plant growth » upon completion of rehabilitation these reshaped and 	Contractor, ECO to control	After construction

Mitigation: Action/control	Responsibility	Timeframe
revegetated areas shall blend into the natural terrain		
Revegetation		
Recreate a non-invasive, acceptable vegetation cover that will facilitate the establishment of desirable and/or indigenous species <ul style="list-style-type: none"> » revegetation of the final prepared area is expected to occur spontaneously to some degree where topsoils could be re-applied within 6 months » revegetation will be done according to an approved planting/landscaping plan according to the management units initially delineated and their respective desirable end states and permissible vegetation 	Contractor, ECO to control	Successively during construction , as construction of individual components is completed, then followed up until desired end state is reached
Re-seeding <ul style="list-style-type: none"> » revegetation can be increased where necessary by hand- seeding indigenous species <ul style="list-style-type: none"> ○ previously collected and stored seeds shall be sown evenly over the designated areas, and be covered by means of rakes or other hand tools » re-seeding shall occur at the recommended time to take advantage of the growing season » in the absence of sufficient follow-up rains after seeds started germinating, watering of the new vegetation cover until it is established shall become necessary to avoid loss of this vegetative cover and the associated seedbank » where, after initial re-seeding, the no acceptable vegetation cover has established within 12 months, hydroseeding should be considered as an option for follow-up revegetation work » sowing rates of seeds used during hydro-seeding should be obtained from the relevant supplier and in accordance with the existing environment 	Contractor, ECO to control	Successively during construction , as construction of individual components is completed, then followed up until desired end state is reached
Planting of species <ul style="list-style-type: none"> » species to be planted include all rescued species » the size of planting holes shall be sufficiently large to ensure that the entire root system is well covered with topsoil » soil around the roots of container plants shall not be disturbed » bulbous plants shall be planted in groups or as features in selected areas » before placement of larger plant specimens into prepared holes, the holes shall be watered if not sufficiently moist 	Contractor, ECO to control	Successively during construction , as construction of individual components is completed, then followed up until desired

PROPOSED SENEKAL 2 SOLAR ENERGY FACILITY NEAR MKUZE, KWAZULU-NATAL
 PLANT RESCUE AND RE-VEGETATION MANAGEMENT PLAN

Mitigation: Action/control	Responsibility	Timeframe
<ul style="list-style-type: none"> » during transplanting care shall be taken to limit or prevent damage to roots » plants should be watered immediately after transplanting to help bind soil particles to the roots (or soil-ball around rooted plants) and so facilitate the new growth and functioning of roots 		end state is reached
<p>Traffic on revegetated areas</p> <ul style="list-style-type: none"> » designated tracks shall be created for pedestrian of vehicle traffic where necessary » Disturbance of vegetation and topsoil must be kept to a practical minimum, no unauthorised off road driving will be allowed » All livestock shall be excluded from revegetated areas 	Contractor	Before, during and after construction
<p>Establishment</p> <ul style="list-style-type: none"> » The establishment and new growth of revegetated and replanted species shall be closely monitored » Where necessary, reseeding or replanting will have to be done if no acceptable plant cover has been created 	Contractor	Successively during construction , as construction of individual components is completed, then followed up until desired end state is reached
Monitoring and follow-up treatments		
<p>Monitor success of rehabilitation and revegetation and take remedial actions as needed according to the respective plan</p> <ul style="list-style-type: none"> » Erosion shall be monitored at all times and measures taken as soon as detected » Where necessary, reseeding or replanting will have to be done if no acceptable plant cover has been created 	ECO during construction, suitable designated person/institution after that	During and after construction , during operational and decommissioning phase
<p>Weeding</p> <ul style="list-style-type: none"> » It can be anticipated that invasive species and weeds will germinate on rehabilitated soils <ul style="list-style-type: none"> ○ These need to be hand-pulled before they are fully established and/or reaching a mature stage where they can regenerate ○ Where invasive shrubs re-grow, they will have to be eradicated according to the Working for Water specifications 		
<p>Performance Indicator » No activity in identified no-go areas</p>		

	<ul style="list-style-type: none"> » Acceptable level of activity within disturbance areas, as determined by ECO » Natural configuration of habitats as part of ecosystems or cultivated land is retained or recreated, thus ensuring a diverse but stable hydrology, substrate and general environment for species to be able to become established and persist » The structural integrity and diversity of natural plant communities is recreated or maintained » Indigenous biodiversity continually improves according to the pre-determined desirable end state <ul style="list-style-type: none"> ○ This end state, if healthy, will be dynamic and able to recover by itself after occasional natural disturbances without returning to a degraded state » Ecosystem function of natural landscapes and their associated vegetation is improved or maintained
<p>Monitoring</p>	<ul style="list-style-type: none"> » Fortnightly inspections of the site by ECO during construction » An incident reporting system must record non-conformances to the EMPr. » Quarterly inspections and monitoring of the site by the ECO or personnel designated to the rehabilitation process until 80% of the desired plant species have become established <ul style="list-style-type: none"> ○ These inspections should be according to the monitoring protocol set out in the rehabilitation plan » Thereafter annual inspections according to the minimal monitoring protocol

B. APPENDIX: CHECKLIST OF ACTIONS FOR REHABILITATION PLANNING

<p>Conceptual Planning</p>	<ul style="list-style-type: none"> » Identify rehabilitation site locations and its boundaries » Identify ownership of rehabilitation program » Describe improvements that are anticipated following rehabilitation » Identify the kind of ecosystem to be rehabilitated at each site » Identify rehabilitation goals and desirable end state » Identify physical site conditions in need of repair » Identify stressors in need of regulation or re-initiation to maintain the integrity of the ecosystem, such as aliens, erosion, fire-regime » Identify the list and kinds of interventions of abiotic and biotic interventions that are and will be needed » Identify landscape restrictions and whether or not its integrity is dependent on a functioning ecosystem outside the project area » Determine project funding and sources » Identify labour sources and equipment needs » Identify biotic resource needs and sources, e.g. suitable topsoil, seeds » Identify any permit requirements or other legal issues » Determine project duration » Outline adaptable strategies for long-term protection and management
<p>Preliminary Tasks</p>	<ul style="list-style-type: none"> » Appoint a rehabilitation practitioner who is in charge of all the technical aspects of rehabilitation » Appoint a restoration team and train where necessary to ensure effective implementation » Prepare a budget to accommodate the completion of preliminary tasks » Document existing site conditions, also describing biota » Conduct pre-project monitoring as needed, including soil chemistry, that may affect the success of the rehabilitation program » Establish a reference site or past reference that represents the desired end state of the site » Gather information on key species to be re-introduced » Conduct investigations as needed to assess the effectiveness of restoration methods and strategies used in similar habitats up to date » Decide if rehabilitation goals are realistic or need modification » Prepare a list of objectives that need to be reached to achieve restoration goals » Ensure liaison with affected stakeholders, especially as far as rehabilitation goals are concerned » Investigate available accedes and infrastructure needed to facilitate implementation of rehabilitation
<p>Implementation phase</p>	<ul style="list-style-type: none"> » Describe the interventions that will be implemented to attain each set objective » Acknowledge potential for passive restoration where viable » Prepare performance standards and monitoring protocols to measure the attainment of each objective » Schedule tasks needed to fulfil each objective

PROPOSED SENEKAL 2 SOLAR ENERGY FACILITY NEAR MKUZE, KWAZULU-NATAL
 PLANT RESCUE AND RE-VEGETATION MANAGEMENT PLAN

	<ul style="list-style-type: none"> » Obtain equipment, supplies and biotic resources as needed » Prepare an appropriate budget
Implementation tasks	<ul style="list-style-type: none"> » Mark boundaries and work areas » Install permanent monitoring fixtures » Implement restoration tasks
Post-implementation tasks	<ul style="list-style-type: none"> » Protect the rehabilitation site against initial disturbance, including herbivores » Perform post-implementation maintenance, especially continued monitoring and eradication of emerging IAPs » Monitor site at least once per year, using the LFA technique, and identify needs for adaptive management
Evaluation	<ul style="list-style-type: none"> » Assess monitoring data to determine whether performance standards are met and rehabilitation objectives reached and maintained » Conduct an ecological evaluation of the newly completed rehabilitation

**C. APPENDIX: TRANSPLANTING GUIDELINES FOR PLANTS WITH
UNDERGROUND STORAGE ORGANS**

Many of the plants in harsh environments have underground storage organs from which they resprout every year after sufficient rains, flower and then die back soon after fruiting and remain dormant, out of sight until the next growing season. All species of the families Amaryllidaceae, Iridaceae, Orchidaceae are protected provincially, nationally and/or internationally, as are many species of other monocot species.

Root system: underground storage organs are variable in size, but usually between 15 and 40 cm deep in the soil

Transplanting: success of transplanting is usually very high IF handled correctly

Rescue 101: Plants should be lifted and transplanted after flowering and fruiting, preferably as the leaves start to die back. For lifting, loosen the soil or wedge apart rocks working from a circle of about 20 cm away from the base of the plant, working inwards but not closer than about 5 cm of the plant with a sharp narrow object such as a koevoet. Once the soil is loosened, gently feel by hand where the bulb, corm, or other storage organ is, and wedge out by hand, taking care not to damage it. Remove loose soil, gently cleanse off most of remaining soil, or rinse off the storage organ. Group these according to species and label clearly, keep records of labels to include name if that is known, or a brief description or photo, also the average depth of the organs when they were removed, and the habitat they were removed from. Spread these plants so that the storage organ can dry completely, and then loosely pack into newspaper or paper bag and then store in a shaded, dry position for maximally 3 months. Transplant into soil that is as similar as possible to the original habitat, TAKING CARE that the growing point of the organ points to the top, else the plant will die. Make sure the storage organs are positioned according to the records kept about original depth of the storage organ.

Aftercare: Firm down soil around the base of the plant once it is in a new position. Allow plant to resprout naturally after sufficient rains, do not water. As these plants may not be visible for a while, clearly demarcate the area where these have been planted to avoid disturbing and potentially destroying them later on.