
PROPOSED GAROB WIND FARM TO KRONOS SUBSTATION 132kV POWER LINE, NEAR COPPERTON IN THE NORTHERN CAPE PROVINCE

ENVIRONMENTAL MANAGEMENT PROGRAMME (EMPr)

DEA Reference Number 14/12/16/3/3/1/769

DRAFT

Submitted as part of the Draft Basic Assessment Report
March 2013

Prepared for:

Garob Wind Farm (Pty) Ltd

(a Garob Wind Farm (Pty) Ltd Renewable Energies (Pty) Ltd initiative)

Suite # 431,

Private Bag X5061,

Stellenbosch,

7599



Prepared by

Savannah Environmental (Pty) Ltd

PO Box 148

Sunninghill

2175



PROJECT DETAILS

DEA Reference No. : 14/12/16/3/3/1/769

Title : Environmental Assessment Process
Draft Basic Assessment Report: Proposed Garob
Wind Farm to Kronos Substation 132 kV power line
near Copperton in the Northern Cape Province

Authors : Savannah Environmental
Umeshree Naicker
Karen Jodas
Steven Ingle

Client : Garob Wind Farm (Pty) Limited

Report Status : Draft Environmental Management Programme for
Public Review as part of the Draft Basic Assessment
Report.

Review Period : 27 March 2013 – 30 April 2013

When used as a reference this report should be cited as: Savannah Environmental (2013)
Draft Environmental Management Programme: Proposed Garob Wind Farm to Kronos Substation
132 kV power line, connecting the Garob Wind Energy Facility to the Kronos Substation near
Copperton in the Northern Cape Province.

COPYRIGHT RESERVED

This technical report has been produced by Savannah Environmental (Pty) Ltd for Garob Wind Farm (Pty) Ltd. No part of the report may be copied, reproduced or used in any manner without written permission from Garob Wind Farm (Pty) Ltd or Savannah Environmental (Pty) Ltd.

DEFINITIONS AND TERMINOLOGY

Alien species: A species that is not indigenous to the area or out of its natural distribution range.

Alternatives: Alternatives are different means of meeting the general purpose and need of a proposed activity. Alternatives may include location or site alternatives, activity alternatives, process or technology alternatives, temporal alternatives or the 'do nothing' alternative.

Ambient sound level: The reading on an integrating impulse sound level meter taken at a measuring point in the absence of any alleged disturbing noise at the end of a total period of at least 10 minutes after such meter was put into operation.

Assessment: The process of collecting, organising, analysing, interpreting and communicating information which is relevant.

Biological diversity: The variables among living organisms from all sources including, terrestrial, marine and other aquatic ecosystems and the ecological complexes they belong to.

Commence: The start of any physical activity, including site preparation and any other activity on site furtherance of a listed activity or specified activity, but does not include any activity required for the purposes of an investigation or feasibility study as long as such investigation or feasibility study does not constitute a listed activity or specified activity.

Cumulative impacts: Impacts that result from the incremental impact of the proposed activity on a common resource when added to the impacts of other past, present or reasonably foreseeable future activities (e.g. discharges of nutrients and heated water to a river that combine to cause algal bloom and subsequent loss of dissolved oxygen that is greater than the additive impacts of each pollutant). Cumulative impacts can occur from the collective impacts of individual minor actions over a period of time and can include both direct and indirect impacts.

Direct impacts: Impacts that are caused directly by the activity and generally occur at the same time and at the place of the activity (e.g. noise generated by blasting operations on the site of the activity). These impacts are usually associated with the construction, operation or maintenance of an activity and are generally obvious and quantifiable.

Disturbing noise: A noise level that exceeds the ambient sound level measured continuously at the same measuring point by 7 dB or more.

'Do nothing' alternative: The 'do nothing' alternative is the option of not undertaking the proposed activity or any of its alternatives. The 'do nothing' alternative also provides the baseline against which the impacts of other alternatives should be compared.

Ecosystem: A dynamic system of plant, animal and micro-organism communities and their non-living environment interacting as a functional unit.

Endangered species: Taxa in danger of extinction and whose survival is unlikely if the causal factors continue operating. Included here are taxa whose numbers of individuals have been reduced to a critical level or whose habitats have been so drastically reduced that they are deemed to be in immediate danger of extinction.

Endemic: An "endemic" is a species that grows in a particular area (is endemic to that region) and has a restricted distribution. It is only found in a particular place. Whether something is endemic or not depends on the geographical boundaries of the area in question and the area can be defined at different scales.

Environment: the surroundings within which humans exist and that are made up of:

- i. the land, water and atmosphere of the earth;
- ii. micro-organisms, plant and animal life;
- iii. any part or combination of (i) and (ii) and the interrelationships among and between them; and
- iv. the physical, chemical, aesthetic and cultural properties and conditions of the foregoing that influence human health and well-being.

Environmental Impact: An action or series of actions that have an effect on the environment.

Environmental impact assessment: Environmental Impact Assessment (EIA), as defined in the NEMA EIA Regulations and in relation to an application to which scoping must be applied, means the process of collecting, organising, analysing, interpreting and communicating information that is relevant to the consideration of that application.

Environmental management: Ensuring that environmental concerns are included in all stages of development, so that development is sustainable and does not exceed the carrying capacity of the environment.

Environmental management Programme: An operational plan that organises and co-ordinates mitigation, rehabilitation and monitoring measures in order to guide the implementation of a proposal and its on-going maintenance after implementation.

Environmental assessment practitioner: An individual responsible for the planning, management and coordinating of environmental management plan or any other appropriate environmental instruments introduced by legislation.

Habitat: The place in which a species or ecological community occurs naturally.

Hazardous waste: Any waste that contains organic or inorganic elements or compounds that may, owing to the inherent physical, chemical or toxicological characteristics of that waste, have a detrimental impact on health and the environment (Van der Linde and Feris, 2010; pg 185).

Indigenous: All biological organisms that occurred naturally within the study area prior to 1800

Indirect impacts: Indirect or induced changes that may occur as a result of the activity (e.g. the reduction of water in a stream that supply water to a reservoir that supply water to the activity). These types of impacts include all the potential impacts that do not manifest immediately when the activity is undertaken or which occur at a different place as a result of the activity.

Interested and Affected Party: Individuals or groups concerned with or affected by an activity and its consequences. These include the authorities, local communities, investors, work force, consumers, environmental interest groups and the general public.

Natural properties of an ecosystem (*sensu* Convention on Wetlands): Defined in Handbook 1 as the "...physical, biological or chemical components, such as soil, water, plants, animals and nutrients, and the interactions between them". (Ramsar Convention Secretariat. 2004. Ramsar handbooks for the wise use of wetlands. 2nd Edition. Handbook 1. Ramsar Convention Secretariat, Gland, Switzerland.) (see <http://www.ramsar.org/>).

Pollution: A change in the environment caused by substances (radio-active or other waves, noise, odours, dust or heat emitted from any activity, including the storage or treatment or waste or substances.

Rare species: Taxa with small world populations that are not at present Endangered or Vulnerable, but are at risk as some unexpected threat could easily cause a critical decline. These taxa are usually localised within restricted geographical areas or habitats or are thinly scattered over a more extensive range. This category was termed Critically Rare by Hall and Veldhuis (1985) to distinguish it from the more generally used word "rare".

Red data species: Species listed in terms of the International Union for Conservation of Nature and Natural Resources (IUCN) Red List of Threatened Species, and/or in terms of the South African Red Data list. In terms of the South African Red Data list, species are classified as being extinct, endangered, vulnerable, rare, indeterminate, insufficiently known or not threatened (see other definitions within this glossary).

Significant impact: An impact that by its magnitude, duration, intensity or probability of occurrence may have a notable effect on one or more aspects of the environment.

Waste: Any substance, whether or not that substance can be reduced re-used, recycled and recovered; that is surplus, unwanted, rejected, discarded, abandoned or disposed of which the generator has no further use for the purposes of production. Any product which must be treated and disposed of, that is identified as waste by the minister of Environmental affairs (by notice in the Gazette) and includes waste generated by the mining, medical or other sectors, but: A by-product is not considered waste, and portion of waste, once re-used, recycled and recovered, ceases to be waste (Van der Linde and Feris, 2010; pg 186).

TABLE OF CONTENTS

PAGE	
CHAPTER 1 PROJECT DETAILS....	1
1.1. Potential impacts.....	3
1.3 Potential Cumulative Impacts:.....	6
1.4. Activities and Components associated with the Proposed Power Line ...	9
CHAPTER 2 PURPOSE and OBJECTIVES OF THE EMP.....	11
CHAPTER 3 STRUCTURE OF THIS EMP.....	13
3.1. Project Team	14
CHAPTER 4 KEY LEGISLATION APPLICABLE TO THE DEVELOPMENT	16
CHAPTER 5 MANAGEMENT PROGRAMME: PLANNING AND DESIGN	28
5.1 Objectives	28
OBJECTIVE: Ensure the design responds to identified environmental constraints and opportunities (option for alignment/design of the power lines and associated access roads)	28
CHAPTER 6 MANAGEMENT PROGRAMME: CONSTRUCTION	32
6.1 Institutional Arrangements: Roles and Responsibilities for the Construction Phase	32
OBJECTIVE: Establish clear reporting, communication, and responsibilities in relation to overall implementation of the EMP	32
6.2 Objectives	36
OBJECTIVE: Environmentally sensitive location of construction equipment camps on site.....	36
OBJECTIVE: Minimise impacts related to inappropriate site establishment ..	38
OBJECTIVE: Appropriate management of the construction site and construction workers	39
OBJECTIVE: Maximise local employment and business opportunities associated with the construction phase	42
OBJECTIVE: Minimise impacts related to traffic management and transportation of equipment and materials to site.....	43
OBJECTIVE: To avoid and or minimise the potential impact of the activities during the construction on the safety of local communities	45
OBJECTIVE: Management of dust and air emissions (Refer to Appendix E: Standard specifications for Earth Works)	46
OBJECTIVE: Minimisation of development footprint and disturbance to topsoil	48
OBJECTIVE: Limit impacts on vegetation communities and species of special concern to limit the loss of biodiversity	50
OBJECTIVE: Limit direct and indirect terrestrial faunal impacts.....	51
OBJECTIVE: Prevent damage to the drainage system/ drainage lines	51
OBJECTIVE: Minimise the establishment and spread of alien invasive plants (refer to Appendix B: Invasive Management Plan)	53

OBJECTIVE: Minimise soil degradation and erosion (refer to Appendix C: Soil Erosion Management Plan)	54
OBJECTIVE: Protection of heritage resources	56
OBJECTIVE: Minimisation of visual impacts associated with construction....	58
OBJECTIVE: Appropriate handling and management of waste (Refer to Appendix D: Construction Waste Guideline)	59
OBJECTIVE: Appropriate handling and storage of chemicals, hazardous substances.....	61
OBJECTIVE: Noise control	63
6.3 Detailing Method Statements	64
OBJECTIVE: Ensure all construction activities are undertaken with the appropriate level of environmental awareness to minimise environmental risk	64
6.4 Awareness and Competence: Construction Phase	67
OBJECTIVE: To ensure all construction personnel have the appropriate level of environmental awareness and competence to ensure continued environmental due diligence and on-going minimisation of environmental harm.....	67
6.4.1 Environmental Awareness Training	68
6.4.2 Induction Training.....	68
6.4.3 Toolbox Talks.....	68
6.5 Monitoring Programme: Construction Phase	68
OBJECTIVE: To monitor the performance of the control strategies employed against environmental objectives and standards.....	69
6.5.1. Non-Conformance Reports	70
6.5.2. Monitoring Reports.....	70
6.5.3. Final Audit Report	70
CHAPTER 7 MANAGEMENT PROGRAMME: REHABILITATION.....	71
7.1. Objectives	71
OBJECTIVE: Ensure appropriate rehabilitation of disturbed areas such that residual environmental impacts are remediated or curtailed ...	71
CHAPTER 8 MANAGEMENT PROGRAMME: OPERATION	74
8.1. Objectives	74
OBJECTIVE: Management of Power Line Servitude.....	74
OBJECTIVE: To restrict the impacts of the proposed power line on birds to an absolute minimum.	75
OBJECTIVE: Minimise soil degradation and erosion	77
CHAPTER 9 MANAGEMENT PROGRAMME: DECOMMISSIONING.....	78
9.1. Site Preparation	78
9.2 Disassemble and Remove Infrastructure	78

PROJECT DETAILS

CHAPTER 1

Garob Wind Farm (Pty) Ltd (Garob Wind Farm) proposes to develop a wind farm facility (Garob Wind Energy Facility DEA ref: 14/12/16/3/3/2/279) within the Siyathemba Local Municipality, Northern Cape (see Figure 1). The Final EIA Report for the Garob Wind Farm application is currently under review by the Department of Environmental Affairs (DEA). However, in discussions with Eskom, it has been determined that a 132kV line would be required to link the Garob Wind Energy Facility to the existing Eskom Kronos Substation. This Draft Basic Assessment Report therefore assesses the impacts related to the proposed establishment of the 132kV power line from the Garob Wind Energy Facility to the existing Eskom Kronos Substation (DEA ref: . 14/12/16/3/3/1/769).

The proposed power line corridor is approximately 10 km east of the town of Copperton, and approximately 35 km south west of the town of Prieska in the Northern Cape Province. The project will include the following;

- » A 132 kV overhead power line connecting the proposed on-site substation at the Garob Wind Energy Facility to the existing Eskom Kronos Substation
- » Access roads along the servitude for construction and operational purposes.

A broader corridor of approximately 300m wide is being considered for the proposed power line and associated infrastructure (refer to Figure 1). A broader corridor of approximately 300m wide is being considered for the proposed power line and associated infrastructure. This corridor passes over the following farm portions: portion 5 of the farm Nelspoortje103, the remaining extent of the farm Humansrus 147, the remaining extent of the farm Hoekplaas 146; and portion 4 of the farm Klipgats Pan 117.

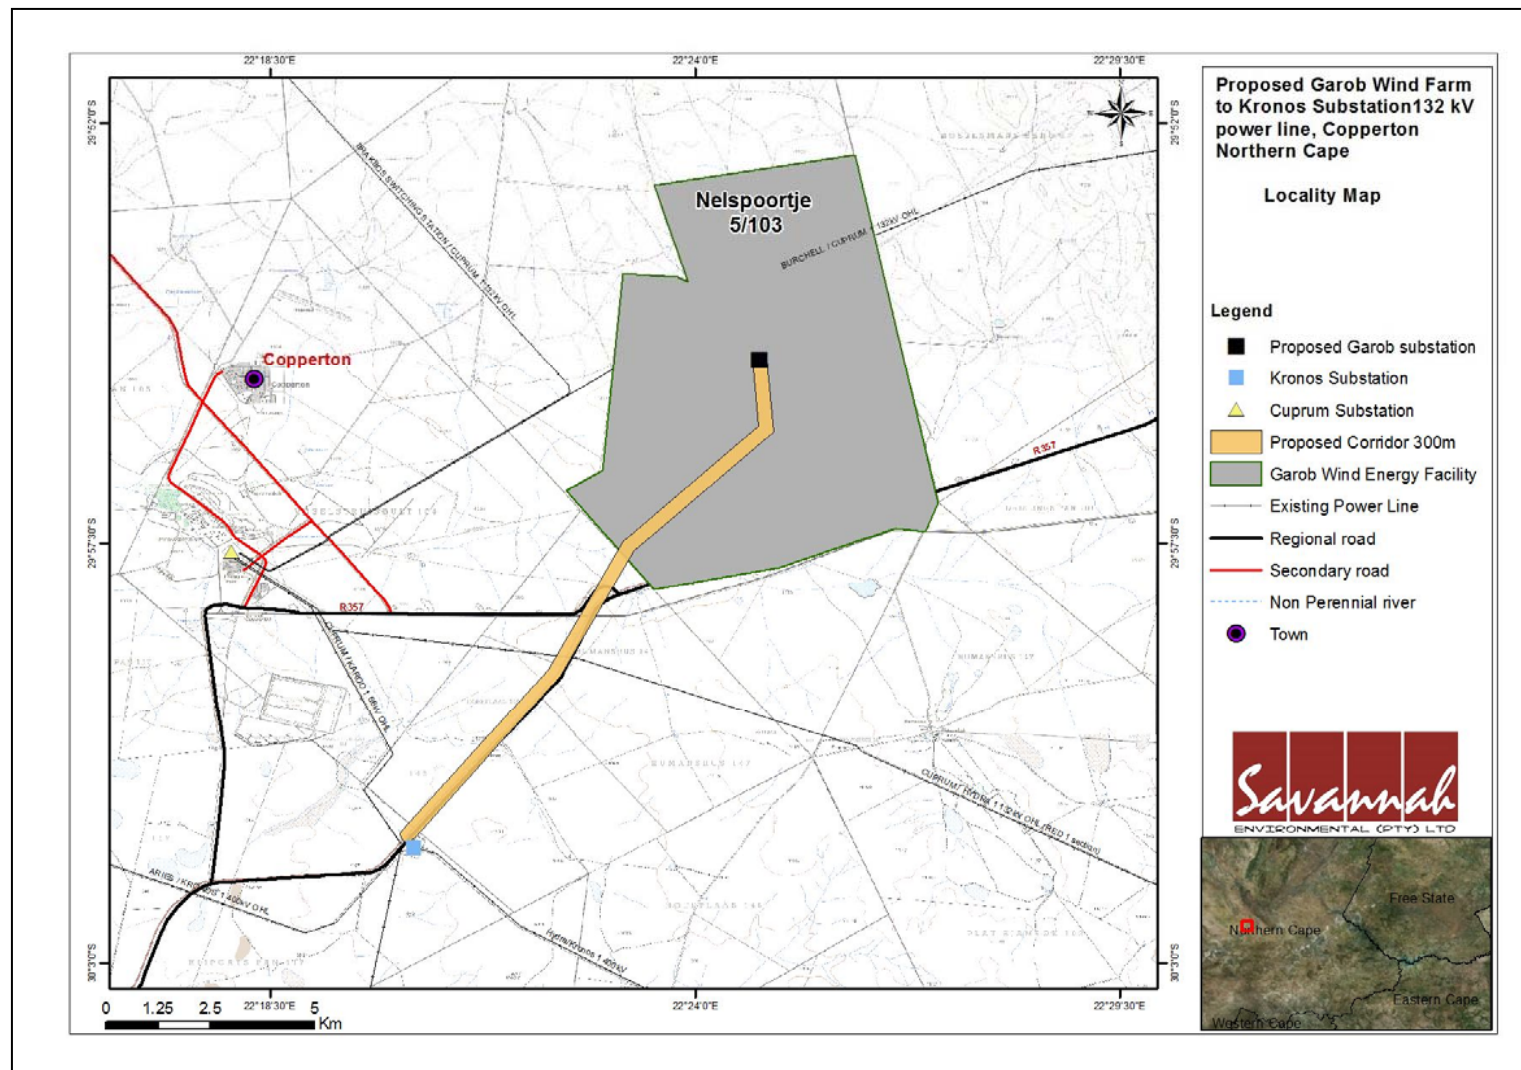


Figure 1.1: Locality map showing the proposed 132kV power line connecting the Garob Wind Energy Facility to the Kronos Substation

1.1. Potential impacts

A summary of the potential impacts as assessed through this BAR is provided below:

Ecology: Majority of impacts on ecology are of **low significance** and relate to the following:

- » Impacts on vegetation and listed or protected plant species
- » Direct and Indirect Faunal impacts
- » Habitat degradation and loss of landscape integrity

Heritage: The impacts on heritage resources by the proposed development are not considered to be highly significant. The recorded sites that will potentially be impacted on are all of **low significance**.

Visual: The placement of the power line and its associated infrastructure will have a **visual impact** on the natural scenic resources and rural character of this region. Potential visual impacts are considered to be of **low significance**. **These impacts include:**

- » Potential visual impact on users of arterial and secondary roads in close proximity to the proposed power line - of low significance.
- » Potential visual impact on residents of homesteads in close proximity to the proposed power line - expected to be of low significance.
- » Potential visual impact on sensitive visual receptors within the region - expected to be negligible.
- » Potential visual impact of construction on sensitive visual receptors in close proximity to the proposed power line - likely to be of low significance.
- » Potential visual impact of the proposed power line on the visual quality of the landscape and sense of place of the region - expected to be of low significance.

Avifauna: The proposed power line could have an impact of **medium significance** on selected avifauna species resident to the surrounding area. These impacts include:

- » Electrocution of birds whilst perched or roosting on pylons or towers.
- » Collision of birds with overhead cables.
- » Destruction of natural bird habitat on and near the site.
- » Disturbance of birds on site and in the surrounding area.

A sensitivity map has been prepared from the findings of the Basic Assessment studies undertaken (refer to Figure 1.2). In terms of this map, the majority of the study area is considered to be of low sensitivity. Areas of ecological

sensitivity that were identified in the power line corridor are regarding vegetation and avifauna sensitivities which are shown in the environmental sensitivity map. Through the implementation of the EMPr (Appendix G) it is expected that impacts on these sensitive areas can be mitigated to acceptable levels.

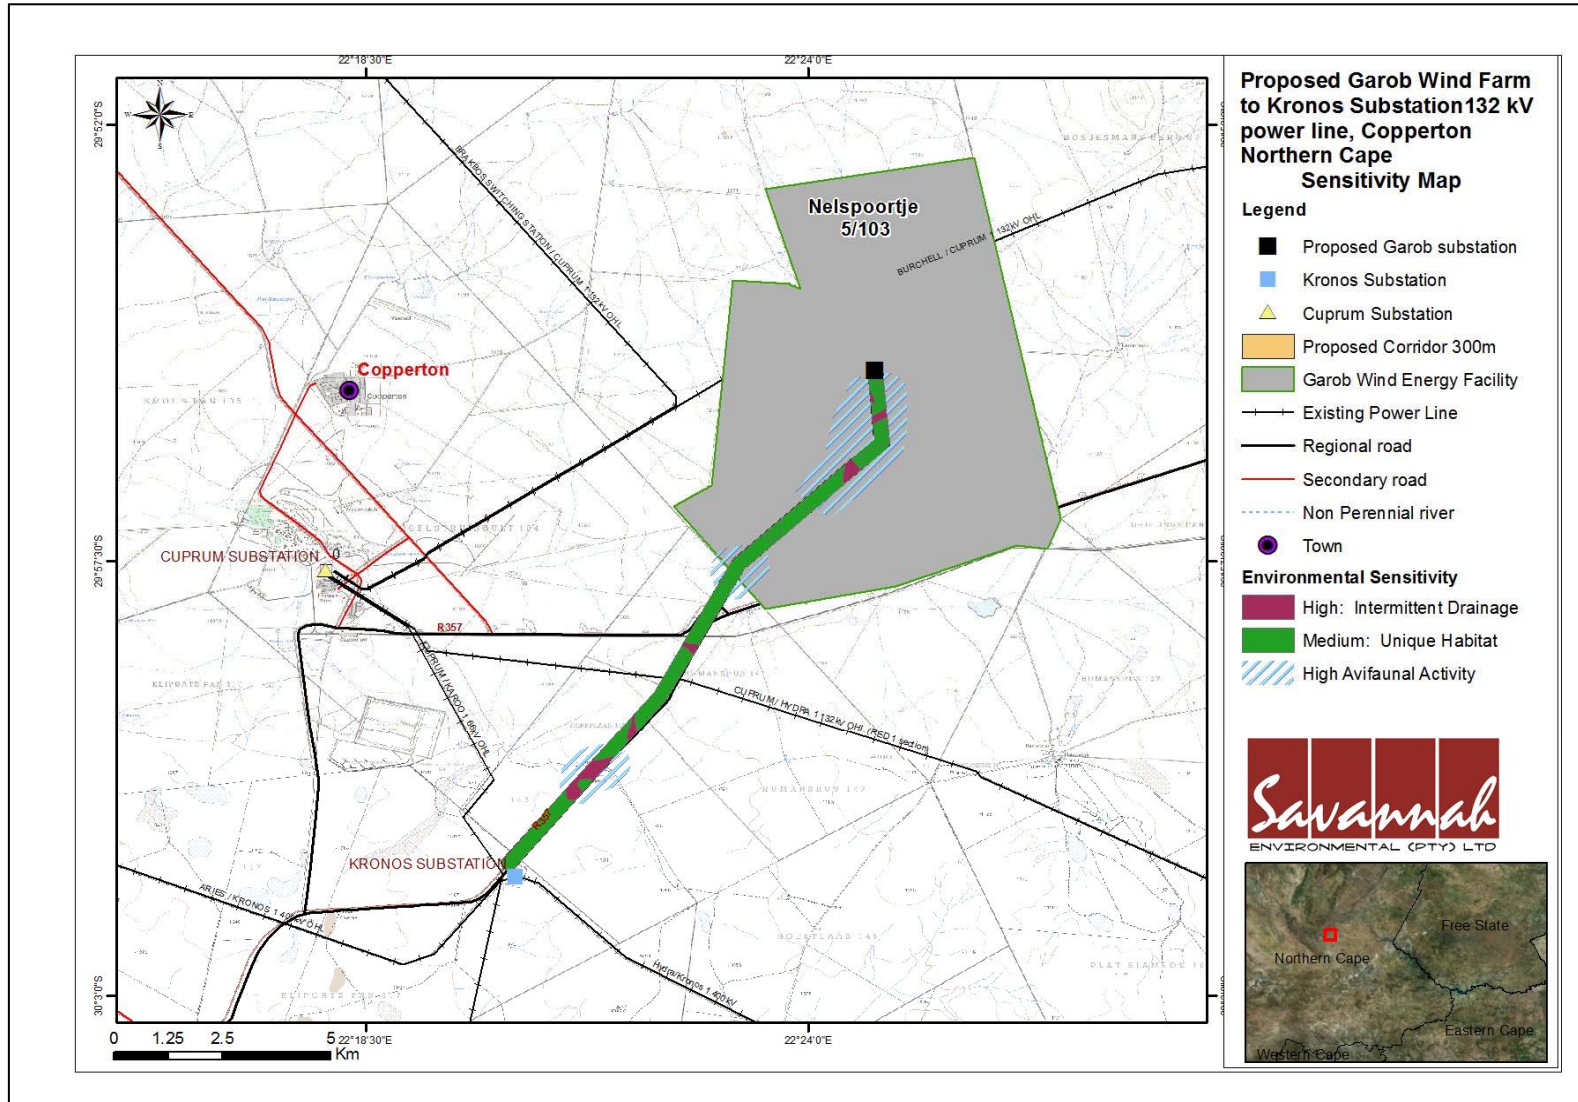


Figure 1.2: Sensitivity Map for the 132kV power line connecting the Garob Wind Energy Facility to the Kronos Substation

1.3 Potential Cumulative Impacts:

A cumulative impact, in relation to an activity, refers to the impact of an activity that in itself may not be significant, but may become significant when added to the existing and potential impacts eventuating from similar or diverse undertaking in the area¹. The Northern Cape is earmarked as a potential solar energy hub for South Africa. The other proposed renewable energy in the Copperton area (other than the proposed Garob Wind Energy Facility) include the following: Nelspoortje Wind Energy Facility (developer - Plan 8), Klipgats Pan Solar Energy facility (developer - Mulilo) and Plat Sjambok Solar and Wind Energy Facility (developer - Mainstream).

The cumulative impacts associated with the establishment and operation of the 132kV power line proposed to connect the Garob Wind Energy Facility to the Kronos Substation is predominantly of **low to medium** significance:

- » **Ecology:** A sensitivity analysis confirmed that the majority of the power line corridor is located in an area of low sensitivity. The operation of the infrastructure would contribute to cumulative disturbance and habitat loss for fauna, but the contribution would be very small and is not considered significant. The potential cumulative impact is rated as having a predominately **low significance**.
- » **Heritage:** Most of the Stone Age archaeology in the study area consists of low densities of scattered (and mixed) Middle Stone Age and Late Stone Age artefacts. The potential cumulative impact is rated as being **low or insignificant**
- » **Visual:** The construction of an additional power line, together with the existing power lines to the Kronos and Cuprum substations, the wind turbines of the Garob Wind Energy Facility, other renewable projects in the area, and the mining activity near Copperton, is likely to increase the potential cumulative visual impact of industrial type infrastructure within the region.
- » **Avifauna:** The cumulative impacts of the construction of new electrical and energy infrastructure in the Copperton area could be **significant**. Grid connection power lines will provide a significant amount of new perching substrate in this wider area, where natural perches are largely absent. This means that the cumulative electrocution and the cumulative collision risk could be quite substantial.

Based on the nature and extent of the proposed project, it is concluded that the potential impacts associated with the proposed power line and associated access

¹ Definition as provided by DEA in the EIA Regulations.

roads within the identified corridor can be mitigated to an acceptable level from an environmental perspective.

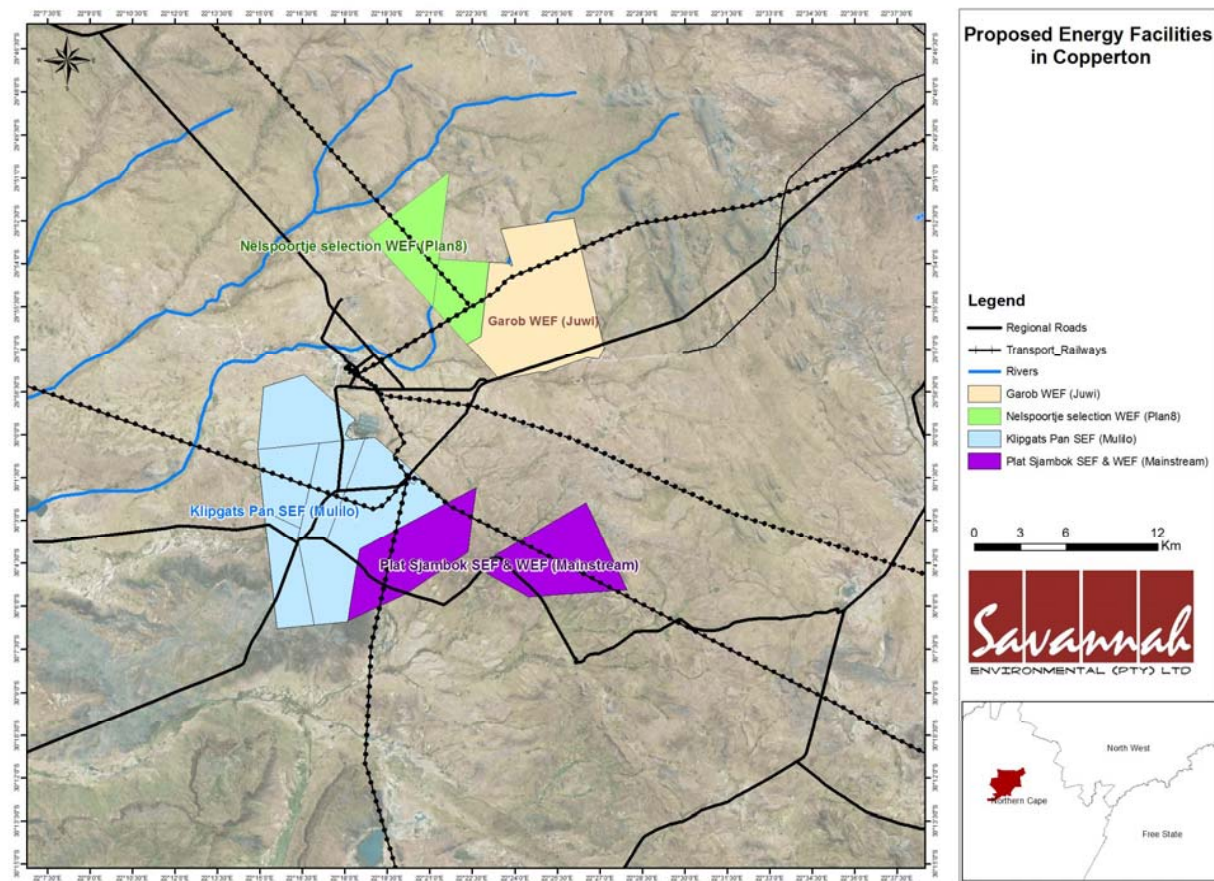


Figure 1.3: Other proposed renewable energy projects near the Garob Wind Farm

1.4. Activities and Components associated with the Proposed Power Line

The power line is to be constructed in accordance with the following simplified sequence:

- Step 1:** Survey of the route
- Step 2:** Selection of best-suited conductor, towers, insulators, foundations
- Step 3:** Final design of line and placement of towers
- Step 4:** Issuing of tenders and award of contract to construction companies
- Step 5:** Vegetation clearance and construction of access roads (where required)
- Step 6:** Tower pegging
- Step 7:** Construction of foundations
- Step 8:** Assembly and erection of towers on site
- Step 9:** Stringing of conductors
- Step 10:** Rehabilitation of disturbed area and protection of erosion sensitive areas
- Step 11:** Testing and commissioning
- Step 12:** Continued maintenance

Construction of the power line is required to be undertaken in accordance with the specifications of this Environmental Management Programme (EMP).

The construction of the power line will require the establishment of a construction equipment camp/s at an appropriate location along the route. The exact siting of this construction equipment camp/s is required to be negotiated with the relevant landowner, and must take cognisance of any no-go and sensitive areas identified by the Basic Assessment studies conducted for the proposed 132kV power line development (Savannah Environmental, 2013). The location of this construction equipment camp (or camps) must be approved by the project Environmental Control Officer (ECO).

The expected lifespan of the proposed power line is approximately 40 years, depending on the maintenance undertaken on the power line structures. During the life-span power line, on-going maintenance is performed. Power line inspections are undertaken on an average of 1 – 2 times per year, depending on the area. During this maintenance period, the line is accessed via the access routes established during the construction phase. Maintenance of the power line is required to be undertaken in accordance with the specifications of this EMP.

The management of power line servitude is dependent on the details and conditions of the agreement between the landowner, project owner and Eskom, and are therefore site-specific. These may, therefore, vary from one location to

another. However, it is a common occurrence that there is a dual responsibility for the maintenance of the servitude:

- » Eskom or the project owner will be responsible for the tower structures, maintenance of access roads, watercourse crossings, and gates and fences relating to servitude access.
- » The landowner will retain responsibility for the maintenance of the land and land use within the servitude (e.g. cropping activities, veld management, etc.).

Exceptions to the above may arise where, for example dual use is made of the access roads and gates or specific land use limitations are set by Eskom or the project owner within the servitude which directly affects the landowner. Maintenance responsibilities are, ultimately, clearly set out in the servitude agreement. Once agreed upon, these maintenance agreement conditions must be deemed to form part of this EMP and must be adhered to at all times.

PURPOSE AND OBJECTIVES OF THE EMP

CHAPTER 2

An Environmental Management Programme (EMP) is defined as “an environmental management tool used to ensure that undue or reasonably avoidable adverse impacts associated with the planning, construction, operation and decommissioning of a project are avoided or mitigated, and that the positive benefits of the projects are enhanced.”² The objective of this EMP is to provide consistent information and guidance for implementing the management and monitoring measures established in the permitting process and help achieve environmental policy goals. The purpose of an EMP is to ensure continuous improvement of environmental performance, reducing negative impacts and enhancing positive effects during the construction and operation. An effective EMP is concerned with both the immediate outcome as well as the long-term impacts of the project.

The EMP provides specific environmental guidance for the construction and operation phases of a project, and is intended to manage and mitigate construction and operation activities so that unnecessary or preventable environmental impacts do not result. These impacts range from those incurred during start up (i.e. site clearing and site establishment), during the construction activities themselves (i.e. erosion, noise, dust, and visual impacts), during site rehabilitation (i.e. soil stabilisation, re-vegetation), during operation and during decommissioning (i.e. similar to construction phase activities).

This EMP has been compiled in accordance with Section 33 of the EIA Regulations and will be further developed in terms of specific requirements listed in any authorisations issued for the proposed project. The EMP has been developed as a set of environmental specifications (i.e. principles of environmental management), which are appropriately contextualised to provide clear guidance in terms of the on-site implementation of these specifications (i.e. on-site contextualisation is provided through the inclusion of various monitoring and implementation tools).

This EMP has the following objectives:

- » Outline mitigation measures and environmental specifications which are required to be implemented for the planning, construction and rehabilitation, operation, and decommissioning phases of the project in order to manage and

² Provincial Government Western Cape, Department of Environmental Affairs and Development Planning: *Guideline for Environmental Management Plans*. 2005

minimise the extent of potential environmental impacts associated with the power line.

- » Ensure that all the phases of the project do not result in undue or reasonably avoidable adverse environmental impacts, and ensure that any potential environmental benefits are enhanced.
- » Identify entities responsible for the implementation of the measures and outline functions and responsibilities.
- » Propose mechanisms and frequency for monitoring compliance, and preventing long-term or permanent environmental degradation.
- » Facilitate appropriate and proactive responses to unforeseen events or changes in project implementation that was not considered in the EIA process.

The management and mitigation measures identified within the Environmental Basic Assessment (BA) process are systematically addressed in this EMP, and ensure the minimisation of adverse environmental impacts to an acceptable level.

Garob Wind Farm (Pty) Ltd must ensure that the implementation of the project complies with the requirements of all environmental authorisations, permits, and obligations emanating from relevant environmental legislation. This obligation is partly met through the development and the implementation of this EMP and through its integration into the contract documentation. Since this EMP is part of the EIA process, it is important that this document be read in conjunction with the Basic Assessment Report compiled for this project. This will contextualise the EMP and enable a thorough understanding of its role and purpose in the integrated environmental management process. Should there be a conflict of interpretation between this EMP and the environmental authorisation, the stipulations in the environmental authorisation shall prevail over that of the EMP, unless otherwise agreed by the authorities in writing. Similarly, any provisions in legislation overrule any provisions or interpretations within this EMP.

This EMP shall be binding on all the parties involved in the construction and operational phases of the project, and shall be enforceable at all levels of contract and operational management within the project.

STRUCTURE OF THIS EMP

CHAPTER 3

The first two chapters provide background to the EMP and the proposed project, while the chapters which follow consider the following:

- » Key legislation applicable to the development;
- » Planning and design activities;
- » Construction activities;
- » Operation activities; and
- » Decommissioning activities.

These chapters set out the procedures necessary for the construction of the proposed 132kV power line to minimise environmental impacts and achieve environmental compliance. For each of the phases of implementation, an overarching environmental **goal** is stated. In order to meet this goal, a number of **objectives** are listed. The EMP has been structured in table format in order to show the links between the goals for each phase and their associated objectives, activities/risk sources, mitigation actions, monitoring requirements and performance indicators. A specific EMP table has been established for each environmental objective. The information provided within the EMP table for each objective is outlined below.

OBJECTIVE: Description of the objective, which is necessary to meet the overall goals; which take into account the findings of the EIA specialist studies

Project Component/s	» List of project components affecting the objective.
Potential Impact	» Description of potential environmental impact if objective is not met.
Activity/Risk Source	» Description of activities which could affect achieving objective.
Mitigation: Target/Objective	» Description of the target and/or desired outcomes of mitigation.

Mitigation: Action/Control	Responsibility	Timeframe
List specific action(s) required to meet the mitigation target/objective described above.	Who is responsible for the measures?	Periods for implementation.

Performance Indicator	Description of key indicator(s) that track progress/indicate the effectiveness of the EMP.
Monitoring	Mechanisms for monitoring compliance; the key monitoring actions required to check whether the objectives are being achieved, taking into consideration responsibility, frequency, methods, and reporting.

The objectives and EMP tables are required to be reviewed and possibly modified whenever changes, such as the following, occur:

- » Planned activities change;
- » Modification to or addition to environmental objectives and targets;
- » Relevant legal or other requirements are changed or introduced; or
- » Significant progress has been made on achieving an objective or target such that it should be re-examined to determine if it is still relevant, should be modified, etc.

3.1. Project Team

This draft EMP was compiled by Umeshree Naicker and Karen Jodas.

- » *Umeshree Naicker* - Holds an Honours Bachelor of Science degree in Environmental Science and has 5 years' experience in environmental management. Her key focus is on environmental impact assessments, environmental permitting, public participation, environmental management plans and programmes, environmental compliance advice and monitoring as well as providing technical input for projects in the environmental management field. She is currently the responsible EAP for several renewable energy projects and other EIAs across the country.
- » *Karen Jodas* - a registered Professional Natural Scientist and holds a Master of Science degree. She has 16 years of experience consulting in the environmental field. Her key focus is on strategic environmental assessment and advice; management and co-ordination of environmental projects, which includes integration of environmental studies and environmental processes into larger engineering-based projects and ensuring compliance to legislation and guidelines; compliance reporting; the identification of environmental management solutions and mitigation/risk minimising measures; and strategy and guideline development. She is currently responsible for the project management of EIAs for several renewable energy projects across the country

- » *Steven Ingle* - Steven Ingle is a senior environmental consultant and holds a degree in Environmental Management with over 7 years of experience in the environmental field. His competencies lie in environmental impact assessments for large scale infrastructure, property and mining projects, environmental due diligence and risk assessment, environmental compliance monitoring, waste management licensing and strategic environmental assessment.

The Savannah Environmental team have extensive knowledge and experience in EIAs and environmental management, having been involved in EIA processes over the past 16 years. They have managed and drafted EMPs for other electricity transmission projects throughout South Africa, including major Eskom transmission lines.

KEY LEGISLATION APPLICABLE TO THE DEVELOPMENT CHAPTER 4

The following legislation and guidelines have informed the scope and content of this EMP Report:

- » National Environmental Management Act (Act No 107 of 1998).
- » EIA Regulations, published under Chapter 5 of the NEMA (GNR R545, GNR 546 in Government Gazette 33306 of 18 June 2010).
- » Guidelines published in terms of the NEMA EIA Regulations, in particular:
 - * Companion to the National Environmental Management Act (NEMA) Environmental Impact Assessment (EIA) Regulations of 2010 (Draft Guideline; DEA, 2010).
 - * Public Participation in the EIA Process (DEA, 2010).
 - * Integrated Environmental Management Information Series (published by DEA)
- » International guidelines, including the Equator Principles.

Several other Acts, standards, or guidelines have also informed the project process and the scope of issues addressed and assessed in the EIA Report. A review of legislative requirements applicable to the proposed project is provided in Table 4.1.

Table 4.1: Relevant legislative and permitting requirements applicable to the proposed power line

Legislation	Applicable Requirements	Relevant Authority	Compliance requirements
National Legislation			
National Environmental Management Act (Act No. 107 of 1998)	<p>The Basic Assessment Regulations have been promulgated in terms of Chapter 5 of the Act. Listed activities which may not commence without an environmental authorisation are identified within these Regulations.</p> <p>In terms of S24(1) of NEMA, the potential impact on the environment associated with these listed activities must be assessed and reported on to the competent authority charged by NEMA with granting of the relevant environmental authorisation.</p> <p>In terms of GN R543, R544 and R546 of 18 June 2010, a Basic Assessment Process is required to be undertaken for the proposed project.</p>	<ul style="list-style-type: none"> » National Department of Environmental Affairs » Northern Cape Department of Environment and Nature Conservation (DENC) 	<ul style="list-style-type: none"> » The listed activities triggered by the proposed substation have been identified and assessed in the Basic Assessment Process being undertaken. This Basic Assessment Report will be submitted to the competent and commenting authority in support of the application for authorisation. » The Draft BA Report is to be submitted to the DEA for review and decision making. » The NC DENC will act as the commenting authority.
National Environmental Management Act (Act No. 107 of 1998)	<ul style="list-style-type: none"> » A project proponent is required to consider a project holistically and to consider the cumulative effect of potential impacts. » In terms of the Duty of Care provision in S28(1) the project proponent must ensure that reasonable measures are taken throughout the life cycle of this 	<ul style="list-style-type: none"> » National Department of Environmental Affairs 	<ul style="list-style-type: none"> » While no permitting or licensing requirements arise directly, the holistic consideration of the potential impacts of the proposed project has found application in the environmental process. » The implementation of mitigation measures are included as part of the Draft EMP and will continue to apply

Legislation	Applicable Requirements	Relevant Authority	Compliance requirements
	project to ensure that any pollution or degradation of the environment associated with a project is avoided, stopped or minimised.		throughout the life cycle of the project.
National Environmental Management: Biodiversity Act (Act No. 10 of 2004)	<ul style="list-style-type: none"> » In terms of the Biodiversity Act, the developer has a responsibility for: <ul style="list-style-type: none"> * The conservation of endangered ecosystems and restriction of activities according to the categorisation of the area (not just by listed activity as specified in the EIA regulations). * The application of appropriate environmental management tools to ensure integrated environmental management of activities. * Limit further loss of biodiversity and conserve endangered ecosystems. » In terms of S57, a person may not carry out a restricted activity involving a specimen of a listed threatened or protected species without a permit issued in terms of Chapter 4. In this regard the Minister of Environmental Affairs has published a list of critically 	<ul style="list-style-type: none"> » National Department of Environmental Affairs 	<ul style="list-style-type: none"> » As the applicant will not carry on any restricted activity in terms of S57, no permit is required to be obtained in this regard. » A permit would be required for the protected/listed plant species found on site to be disturbed or destroyed because of the proposed development.

Legislation	Applicable Requirements	Relevant Authority	Compliance requirements
	<p>endangered, endangered, vulnerable, and protected species in GNR 151 in Government Gazette 29657 of 23 February 2007 and the regulations associated therewith in GNR 152 in GG29657 of 23 February 2007, which came into effect on 1 June 2007.</p> <p>» In terms of S75, (1) the control and eradication of a listed invasive species must be carried out by means of methods that are appropriate for the species concerned and the environment in which it occurs. (2) Any action taken to control and eradicate a listed invasive species must be executed with caution and in a manner that may cause the least possible harm to biodiversity and damage to the environment. (3) The methods employed to control and eradicate a listed invasive species must also be directed at the offspring, propagating material and re-growth of such invasive species in order to prevent such species from producing offspring, forming seed, regenerating, or re-establishing itself in any manner.</p> <p>» In terms of GNR 152 of 23 February 2007: regulations relating to listed</p>		

Legislation	Applicable Requirements	Relevant Authority	Compliance requirements
	<p>threatened and protected species, the relevant specialists must be employed during the EIA Phase to incorporate the legal provisions as well as the regulations associated with listed threatened and protected species (GNR 152) into specialist reports in order to identify permitting requirements.</p> <ul style="list-style-type: none"> » In terms of GNR 1477 of 2009: Draft National List of Threatened Ecosystems published under S52(1)(a) of the Act provides for the listing of threatened or protected ecosystems based on national criteria. The list of threatened terrestrial ecosystems supersedes the information regarding terrestrial ecosystem status in the National Spatial Biodiversity Assessment (2004). » GNR1187 Amendment of Critically Endangered, Endangered, Vulnerable and Protected Species List published under S56 (1)of the Act. 		
National Environmental Management: Waste Act, 2008 (Act No. 59 of 2008)	<ul style="list-style-type: none"> » The Minister may by notice in the Gazette publish a list of waste management activities that have, or are likely to have, a detrimental effect on the environment. 	<ul style="list-style-type: none"> » National Department of Water and Environmental Affairs » Provincial Department of Environmental Affairs 	<ul style="list-style-type: none"> » As no waste disposal site is to be associated with the proposed project, no permit is required in this regard. » Waste handling, storage and disposal during construction and operation is

Legislation	Applicable Requirements	Relevant Authority	Compliance requirements
	<ul style="list-style-type: none"> » In terms of the regulations published in terms of this Act (GN 718), a Basic Assessment or Environmental Impact Assessment is required to be undertaken for identified listed activities. » Any person who stores waste must at least take steps, unless otherwise provided by this Act, to ensure that <ul style="list-style-type: none"> (a) The containers in which any waste is stored, are intact and not corroded or in any other way rendered unfit for the safe storage of waste; (b) Adequate measures are taken to prevent accidental spillage or leaking; (c) The waste cannot be blown away; (d) Nuisances such as odour, visual impacts and breeding of vectors do not arise; and (e) Pollution of the environment and harm to health are prevented. 		<p>required to be undertaken in accordance with the requirements of this Act, as detailed in the EMP.</p> <ul style="list-style-type: none"> » The volumes of waste to be generated and stored on the site during construction and operation of the power line will not require a waste license (provided these remain below the prescribed thresholds).
National Environmental Management: Air Quality Act (Act No. 39 of 2004)	<ul style="list-style-type: none"> » S18, S19 and S20 of the Act allow certain areas to be declared and managed as "priority areas" » Declaration of controlled emitters (Part 3 of Act) and controlled fuels (Part 4 of Act) with relevant emission standards 	<ul style="list-style-type: none"> » National Department of Environmental Affairs » Provincial Department of Environmental Affairs 	<ul style="list-style-type: none"> » While no permitting or licensing requirements arise from this legislation, this Act will find application during the construction phase of the project.

Legislation	Applicable Requirements	Relevant Authority	Compliance requirements
	<ul style="list-style-type: none"> » The Act provides that an air quality officer may require any person to submit an atmospheric impact report if there is reasonable suspicion that the person has failed to comply with the Act. 		
National Water Act (Act No. 36 of 1998)	<ul style="list-style-type: none"> » Under S21 of the act, water uses must be licensed unless such water use falls into one of the categories listed in S22 of the Act or falls under the general authorisation. » In terms of S19, the project proponent must ensure that reasonable measures are taken throughout the life cycle of this project to prevent and remedy the effects of pollution to water resources from occurring, continuing, or recurring. 	<ul style="list-style-type: none"> » National Department of Water Affairs » Department of Water Affairs 	<ul style="list-style-type: none"> » A general permitting or licensing is a requirements from this legislation for river and wetland crossings. However, if the wetlands and rivers can be avoided or spanned by the proposed power line no licence will be needed.
Environment Conservation Act (Act No. 73 of 1989)	<ul style="list-style-type: none"> » National Noise Control Regulations (GN R154 dated 10 January 1992) 	<ul style="list-style-type: none"> » National Department of Environmental Affairs » Local Authorities 	<ul style="list-style-type: none"> » There is no requirement for a noise permit in terms of the legislation. » Any noisy activities carried out during the construction phase that could present an intrusion impact to the local community should be limited to 6:00am to 6:00pm Monday – Saturday (excluding public holidays). » Should these specific activities need to be undertaken outside of these times, the surrounding communities

Legislation	Applicable Requirements	Relevant Authority	Compliance requirements
			will need to be notified and appropriate approval will be obtained from the DEA and the Local Municipality.
Minerals and Petroleum Resources Development Act (Act No. 28 of 2002)	<ul style="list-style-type: none"> » A mining permit or mining right may be required where a mineral in question is to be mined (i.e. materials from a borrow pit) in accordance with the provisions of the Act. » Requirements for Environmental Management Programmes and Environmental Management Plans are set out in S39 of the Act. 	<ul style="list-style-type: none"> » Department of Minerals and Energy 	<ul style="list-style-type: none"> » As no borrow pits are expected to be required, no mining permit or mining right is required to be obtained.
National Heritage Resources Act (Act No. 25 of 1999)	<ul style="list-style-type: none"> » S38 states that Heritage Impact Assessments (HIAs) are required for certain kinds of development including <ul style="list-style-type: none"> » The construction of a road, power line, pipeline, canal or other similar linear development or barrier exceeding 300 m in length; » Any development or other activity which will change the character of a site exceeding 5 000 m² in extent » The relevant Heritage Authority must be notified of developments such as linear developments (i.e. roads and 	<ul style="list-style-type: none"> » South African Heritage Resources Agency 	<ul style="list-style-type: none"> » A permit may be required should heritage sites be unearthed on site during the construction phase. The HIA conducted that the findings were of low significance.

Legislation	Applicable Requirements	Relevant Authority	Compliance requirements
	<p>power lines), bridges exceeding 50 m, or any development or other activity which will change the character of a site exceeding 5 000 m²; or the re-zoning of a site exceeding 10 000 m² in extent. This notification must be provided in the early stages of initiating that development, and details regarding the location, nature and extent of the proposed development must be provided.</p> <p>» Stand alone HIAs are not required where an EIA is carried out as long as the EIA contains an adequate HIA component that fulfils the provisions of S38. In such cases only those components not addressed by the EIA should be covered by the heritage component.</p>		
<p>National Forests Act (Act No. 84 of 1998)</p>	<p>» In terms of S5(1) no person may cut, disturb, damage or destroy any protected tree or possess, collect, remove, transport, export, purchase, sell donate or in any other manner acquire or dispose of any protected tree or any forest product derived from a protected tree, except under a license granted by the Minister to an (applicant and subject to such</p>	<p>» National Department of Forestry</p>	<p>» None are likely to occur on site.</p>

Legislation	Applicable Requirements	Relevant Authority	Compliance requirements
	<p>period and conditions as may be stipulated".</p> <ul style="list-style-type: none"> » GN 1042 provides a list of protected tree species. 		
National Veld and Forest Fire Act (Act 101 of 1998)	<ul style="list-style-type: none"> » Provides requirements for veldfire prevention through firebreaks and required measures for fire-fighting. Chapter 4 places a duty on landowners to prepare and maintain firebreaks, and Chapter 5 places a duty on all landowners to acquire equipment and have available personnel to fight fires. » In terms of S21 the applicant would be obliged to burn firebreaks to ensure that should a veldfire occur on the property, that it does not spread to adjoining land. » In terms of S12 the firebreak would need to be wide and long enough to have a reasonable chance of preventing the fire from spreading, not causing erosion, and is reasonably free of inflammable material. » In terms of sS17ection 17, the applicant must have such equipment, protective clothing, and trained personnel for extinguishing fires. 	<ul style="list-style-type: none"> » National Department of Forestry 	<ul style="list-style-type: none"> » While no permitting or licensing requirements arise from this legislation, this act will find application during the operational phase of the project in terms of fire prevention and management.
Hazardous Substances Act	<ul style="list-style-type: none"> » This Act regulates the control of 	<ul style="list-style-type: none"> » Department of Health 	<ul style="list-style-type: none"> » It is necessary to identify and list all

Legislation	Applicable Requirements	Relevant Authority	Compliance requirements
<p>(Act No. 15 of 1973)</p>	<p>substances that may cause injury, or ill health, or death due to their toxic, corrosive, irritant, strongly sensitising, or inflammable nature or the generation of pressure thereby in certain instances and for the control of certain electronic products. To provide for the rating of such substances or products in relation to the degree of danger; to provide for the prohibition and control of the importation, manufacture, sale, use, operation, modification, disposal or dumping of such substances and products.</p> <ul style="list-style-type: none"> » Group I and II: Any substance or mixture of a substance that might by reason of its toxic, corrosive etc., nature or because it generates pressure through decomposition, heat or other means, cause extreme risk of injury etc., can be declared to be Group I or Group II hazardous substance; » Group IV: any electronic product; » Group V: any radioactive material. » The use, conveyance, or storage of any hazardous substance (such as distillate fuel) is prohibited without an appropriate license being in force. 		<p>the Group I, II, III, and IV hazardous substances that may be on the site and in what operational context they are used, stored or handled.</p>

Legislation	Applicable Requirements	Relevant Authority	Compliance requirements
Provincial Legislation			
Northern Cape Nature Conservation Act, Act No. 9 of 2009	<p>This Act provides for the sustainable utilisation of wild animals, aquatic biota and plants; provides for the implementation of the Convention on International Trade in Endangered Species of Wild Fauna and Flora; provides for offences and penalties for contravention of the Act; provides for the appointment of nature conservators to implement the provisions of the Act; and provides for the issuing of permits and other authorisations. Amongst other regulations, the following may apply to the current project:</p> <ul style="list-style-type: none"> » Boundary fences may not be altered in such a way as to prevent wild animals from freely moving onto or off of a property; » Aquatic habitats may not be destroyed or damaged; » The owner of land upon which an invasive species is found (plant or animal) must take the necessary steps to eradicate or destroy such species. » The Act provides lists of protected species for the Province. 	» Provincial Department of Environmental Affairs	» Permitting or licensing requirements may arise from this legislation for the proposed activities to be undertaken for the proposed project.

MANAGEMENT PROGRAMME: PLANNING AND DESIGN CHAPTER 5

Overall Goal: undertake the planning and design phase in a way that:

- » Ensures that the design responds to the identified environmental constraints and opportunities.
- » Ensures that adequate regard has been taken of any landowner and community concerns and that these are appropriately addressed through design and planning (where appropriate).
- » Ensures that the best environmental options are selected for the access roads and power line alignments within the investigated corridor.
- » Enables the construction activities to be undertaken without significant disruption to other land uses and activities in the area.

In order to meet this goal, the following objectives have been identified, together with necessary actions and monitoring requirements.

5.1 Objectives

OBJECTIVE: Ensure the design responds to identified environmental constraints and opportunities (option for alignment/design of the power lines and associated access roads)

In order to minimise impacts associated with the construction and operation of the power line, the following is required to be undertaken during the final design phase:

- » Geotechnical survey – this will investigate foundation conditions and the availability of natural construction materials.
- » Specialist walk-through surveys – undertake ecological, heritage and avifauna walk through surveys once final power line alignment and tower positions are known.

Project Component/s	<ul style="list-style-type: none"> » Power line » Access roads
Potential Impact	<ul style="list-style-type: none"> » Soil erosion » Impacts on ecology & birds » Impact on heritage sites » Route that degrades environment unnecessarily, particularly with respect to visual aesthetics, loss of indigenous flora, erosion, and impacts on local communities/residents

Activities/Risk Sources	<ul style="list-style-type: none"> » Positioning of all the facilities components » Alignment of power line and access roads within corridor
Mitigation: Target/Objective	<ul style="list-style-type: none"> » The design responds to the identified environmental constraints and opportunities » To ensure selection of best environmental option for alignment for the power line and access roads

Mitigation: Action/Control	Responsibility	Timeframe
Undertake negotiations with affected landowners and agree on landowner-specific conditions for construction and maintenance	Garob Wind Farm (Pty) Ltd	Project planning
Undertake specialist walk through surveys – ecology, heritage and avifauna.	Garob Wind Farm (Pty) Ltd Specialists	Design
Undertake a detailed geotechnical survey of the proposed realigned tower positions in order to fully understand the soils in terms of founding conditions and erosion potential.	Garob Wind Farm (Pty) Ltd	Design
Obtain any additional environmental permits required	Garob Wind Farm (Pty) Ltd	Project planning
Bird-friendly power line tower and conductor designs should be used. The tower designs used should be those which are poorly suited to serve as nesting substrates by most bird species and with perching areas situated in areas either off-set or well away from the conductors.	Garob Wind Farm (Pty) Ltd	Design phase
Ensure that erosion mitigation measures are considered when planning the project.	Garob Wind Farm (Pty) Ltd	Design
Ensure that riparian areas associated with drainage lines are spanned/ pole structures are not placed within proximity to rivers, streams. Ensure placement of footprints outside 1:100 year floodlines.	Garob Wind Farm (Pty) Ltd	Design
Plan to use existing roads as far as possible. Any new access roads required to be carefully planned to minimise the impacted area and prevent unnecessary degradation of soil.	Garob Wind Farm (Pty) Ltd	Design
Formal roads should not be planned through the sensitive rocky hills identified in the Basic Assessment, unless the power line cannot be built without it.	Garob Wind Farm (Pty) Ltd	Design
Select an alignment that curtails environmental impacts and enhances environmental benefits.	Garob Wind Farm (Pty) Ltd	Design phase
Consider design level mitigation measures recommended by the specialists, especially with respect to visual aesthetics, flora, ecology, avifauna,	Garob Wind Farm (Pty) Ltd	Design phase

Mitigation: Action/Control	Responsibility	Timeframe
and heritage, as detailed within the BA report and relevant appendices.		
Performance Indicator	<ul style="list-style-type: none"> » The design meets the objectives and does not degrade the environment. » Selected power line alignment that minimises any negative environmental impacts and maximises any benefits. » Design and layouts respond to the mitigation measures and recommendations in the BA Report. 	
Monitoring	<ul style="list-style-type: none"> » Review of the design by the Project Manager prior to the commencement of construction. » Review of the alignment of the servitude by the Environmental Control Officer (ECO) prior to the commencement of construction. » Ensure that the design implemented meets the objectives and mitigation measures in the EIA report through review of the design by the Project Manager, SHE representative and the ECO prior to the commencement of construction. 	

OBJECTIVE: To ensure effective communication mechanisms

On-going communication with affected and surrounding landowners is important to maintain during the construction and operational phases of the power line. Any issues and concerns raised should be addressed as far as possible in as short a timeframe as possible.

Project component/s	<ul style="list-style-type: none"> » Power line » Access roads
Potential Impact	» Impacts on affected and surrounding landowners and land uses
Activity/risk source	<ul style="list-style-type: none"> » Activities associated with construction » Activities associated with operation
Mitigation: Target/Objective	<ul style="list-style-type: none"> » Effective communication with affected and surrounding landowners » Addressing of any issues and concerns raised as far as possible in as short a timeframe as possible

Mitigation: Action/control	Responsibility	Timeframe
Compile and implement a grievance mechanism procedure for the public (as outlined in Appendix A) to be implemented during both the construction and	Garob Wind Farm (Pty) Ltd	Pre-construction (construction procedure) Pre-operation

Mitigation: Action/control	Responsibility	Timeframe
operational phases of the power line. This procedure should include details of the contact person who will be receiving issues raised by interested and affected parties, and the process that will be followed to address issues.		(operation procedure)
Develop and implement a grievance mechanism for the construction, operational and closure phases of the project for all employees, contractors, subcontractors and site personnel. This procedure should be in line with the South African Labour Law.	Garob Wind Farm (Pty) Ltd / Contractor	Pre-construction (construction procedure) Pre-operation (operation procedure)
Liaison with landowners is to be undertaken prior to the commencement of construction in order to provide sufficient time for them to plan agricultural activities.	Garob Wind Farm (Pty) Ltd / Contractor	Pre-construction

Performance Indicator	» Effective communication procedures in place.
Monitoring	» An incident reporting system should be used to record non-conformances to the EMP.

MANAGEMENT PROGRAMME: CONSTRUCTION

CHAPTER 6

Overall Goal: Undertake the construction phase in a way that:

- » Ensures that construction activities are properly managed in respect of environmental aspects and impacts.
- » Enables construction activities to be undertaken without significant disruption to other land uses and activities in the area, in particular concerning noise impacts, farming practices, traffic and road use, and effects on local residents.
- » Minimises the impact on the indigenous natural vegetation, and habitats of ecological value.
- » Minimises impacts on fauna (including birds) in the study area.
- » Minimises the impact on heritage sites should they be uncovered.
- » Establishes an environmental baseline during construction activities on the site, where possible.

6.1 Institutional Arrangements: Roles and Responsibilities for the Construction Phase

As the proponent, Garob Wind Farm (Pty) Ltd must ensure that the project complies with the requirements of all environmental authorisations and permits, and obligations emanating from other relevant environmental legislation. This obligation is partly met through the development of the EMP, and the implementation of the EMP through its integration into the contract documentation. Garob Wind Farm (Pty) Ltd will retain various key roles and responsibilities during the construction phase.

OBJECTIVE: Establish clear reporting, communication, and responsibilities in relation to overall implementation of the EMP

Formal responsibilities are necessary to ensure that key procedures are executed. Specific responsibilities of the Project Manager; Site Manager; Safety, Health and Environment Representative; Environmental Control Officer (ECO) and Contractor for the construction phase of this project are as detailed below.

Project Manager will:

- » Ensure all specifications and legal constraints specifically with regards to the environment are highlighted to the Contractor(s) so that they are aware of these.
- » Ensure that Garob Wind Farm (Pty) Ltd and its Contractor(s) are made aware of all stipulations within the EMP.
- » Ensure that the EMP is correctly implemented throughout the project by means of site inspections and meetings. This will be documented as part of the site meeting minutes.
- » Be fully knowledgeable with the contents of all relevant licences and permits.
- » Be fully conversant with the EIA for the project, the EMP, the conditions of the Environmental Authorisation (once issued), and all relevant environmental legislation.

Site Manager (Garob Wind Farm (Pty) Ltd 's on-site Representative) will:

- » Be fully knowledgeable with the contents of the EIA and risk management.
- » Be fully knowledgeable with the contents and conditions of the Environmental Authorisation (once issued).
- » Be fully knowledgeable with the contents of the EMP.
- » Be fully knowledgeable with the contents of all relevant environmental legislation, and ensure compliance with these.
- » Be fully knowledgeable with the contents of all relevant licences and permits.
- » Have overall responsibility of the EMP and its implementation.
- » Conduct audits to ensure compliance to the EMP.
- » Ensure there is communication with the Project Manager, the ECO, and relevant discipline engineers on matters concerning the environment.
- » Ensure that no actions are taken which will harm or may indirectly cause harm to the environment, and take steps to prevent pollution on the site.
- » Confine activities to the demarcated construction site.

The **Safety, Health and Environment Representative** (SHE officer) will:

- » Develop and compile environmental policies and procedures.
- » Direct and liaise with the Environmental Control Officer (ECO) regarding monitoring and reporting on the environmental performance of the construction phase.
- » Conduct internal environmental audits and co-ordinate external environmental audits.
- » Liaise with statutory bodies on environmental performance and other issues as required.

An independent **Environmental Control Officer (ECO)** must be appointed by the project proponent prior to the commencement of any authorised activities and will be responsible for monitoring, reviewing and verifying compliance by the

Contractor with the environmental specifications of the EMP and the conditions of the Environmental Authorisation Accordingly, the ECO will:

- » Be fully knowledgeable with the contents with the Basic Assessment.
- » Be fully knowledgeable with the contents with the conditions of the Environmental Authorisation (once issued).
- » Be fully knowledgeable with the contents with the EMP.
- » Be fully knowledgeable with the contents with all relevant environmental legislation, and ensure compliance with them.
- » Be fully knowledgeable of all the licences and permits issued to the site.
- » Be fully knowledgeable of the content of the water use licence and the authorisation granted from the department of forestry and fisheries.
- » Ensure that the contents of this document are communicated to the Contractor site staff and that the Site Manager and Contractor are constantly made aware of the contents through discussion.
- » Ensure that if the EMP conditions or specifications are not followed then appropriate measures are undertaken to address this.
- » Ensure that the compliance of the EMP, EA and the legislation is monitored through regular and comprehensive inspection of the site and surrounding areas.
- » Ensure that if the EMP, EA and/or the legislation conditions, regulations or specifications are not followed then appropriate measures are undertaken to address any non-compliances (for example an ECO may cease construction or an activity to prevent a non-compliance from continuing).
- » Monitoring and verification must be implemented to ensure that environmental impacts are kept to a minimum, as far as possible.
- » Ensure that the Site Manager has input into the review and acceptance of construction methods and method statements.
- » Ensure that activities on site comply with all relevant environmental legislation.
- » Ensure that a removal is ordered of any person(s) and/or equipment responsible for any contravention of the specifications of the EMP.
- » Ensure that the compilation of progress reports for submission to the Project Manager, with input from the Site Manager, takes place on a regular basis, including a final post-construction audit.
- » Ensure that there is communication with the Site Manager regarding the monitoring of the site.
- » Keep record of all activities on site, problems identified, transgressions noted and a task schedule of tasks undertaken by the ECO.
- » Ensure that any non-compliance or remedial measures that need to be applied are reported.
- » Keep record of all activities on site, problems identified, transgressions noted and a task schedule of tasks undertaken by the ECO.

- » Independently report to DEA in terms of compliance with the specifications of the EMP and conditions of the Environmental Authorisation (once issued).

Contractors and Service Providers: It is important that contractors are aware of the responsibilities in terms of the relevant environmental legislation and the contents of this EMP. The contractor is responsible for informing employees and sub-contractors of their environmental obligations in terms of the environmental specifications, and for ensuring that employees are adequately experienced and properly trained in order to execute the works in a manner that will minimise environmental impacts. The contractor's obligations in this regard include the following:

- » Employees must have a basic understanding of the key environmental features of the construction site and the surrounding environment.
- » A copy of the EMP must be easily accessible to all on-site staff members.
- » Employees must be familiar with the requirements of this EMP and the environmental specifications as they apply to the construction of the power line.
- » Prior to commencing any site works, all employees and sub-contractors must have attended an environmental awareness training course which must provide staff with an appreciation of the project's environmental requirements, and how they are to be implemented.
- » Staff will be informed of environmental issues as deemed necessary by the ECO.

Contractor's Safety, Health and Environment Representative: The Contractor's Safety, Health and Environment (SHE) Representative, employed by the Contractor, is responsible for managing the day-to-day on-site implementation of this EMP, and for the compilation of regular (usually weekly) Monitoring Reports. In addition, the SHE must act as liaison and advisor on all environmental and related issues and ensure that any complaints received from the public are duly recorded and forwarded to the Site Manager and Contractor.

The Contractor's Safety, Health and Environment Representative should:

- » Be well versed in environmental matters.
- » Understand the relevant environmental legislation and processes.
- » Understand the hierarchy of Environmental Compliance Reporting, and the implications of Non-Compliance.
- » Know the background of the project and understand the implementation programme.
- » Be able to resolve conflicts and make recommendations on site in terms of the requirements of this Specification.
- » Keep accurate and detailed records of all EMP-related activities on site.

All contractors (including sub-contractors and staff) and service providers are ultimately responsible for:

- » Ensuring adherence to the environmental management specifications.
- » Ensuring that Method Statements are submitted to the Site Manager (and ECO) for approval before any work is undertaken.
- » Any lack of adherence to the above will be considered as non-compliance to the specifications of the EMP.
- » Ensuring that any instructions issued by the Site Manager on the advice of the ECO are adhered to.
- » Ensuring that a report is tabled at each site meeting, which will document all incidents that have occurred during the period before the site meeting.
- » Ensuring that a register is kept in the site office, which lists all transgressions issued by the ECO.
- » Ensuring that a register of all public complaints is maintained.
- » Establish a complaints and communication hotline for the public
- » Ensuring that all employees, including those of sub-contractors receive training before the commencement of construction in order that they can constructively contribute towards the successful implementation of the EMP (i.e. ensure their staff are appropriately trained as to the environmental obligations).

6.2 Objectives

In order to meet the overall goal for construction, the following objectives, actions, and monitoring requirements have been identified.

OBJECTIVE: Environmentally sensitive location of construction equipment camps on site

No construction workers will be accommodated on site. However, construction equipment may need to be stored at an appropriate location along the power line route for the duration of the construction period.

Project component/s	Project components affecting the objective: » Construction equipment camp/s
Potential Impact	» Damage to protected / endangered vegetation » Damage to and/or loss of topsoil » Compacting of ground » Impacts on the surrounding environment due to inadequate sanitation and waste removal facilities

Activities/risk sources	<ul style="list-style-type: none"> » Bush clearing and levelling of equipment storage area/s » Access to and from the equipment storage area/s
Mitigation: Target/Objective	<ul style="list-style-type: none"> » To minimise impacts on the social and biophysical environment. » To limit equipment storage to within the demarcated site

Mitigation: Action/control	Responsibility	Timeframe
Before construction commences, representatives from the local authority and community-based organisations (e.g. residents associations), as well as neighbouring residents should be informed of the details of the construction company, size of the workforce and construction schedules.	Garob Wind Farm (Pty) Ltd	Pre-construction
The exact siting of the construction equipment camp shall be negotiated with the relevant landowner, and must take cognisance of any sensitive areas identified by the environmental studies. The location of this construction equipment camp shall be approved by the project Environmental Control Officer (ECO).	Contractor	Pre-construction
Minimise vegetation clearing and levelling for equipment storage areas. All plants that are able to be rescued and transplanted must be done in a manner recommended in the Plant Rescue Plan (refer to Appendix F), and then used for rehabilitation.	Contractor	Erection: during site establishment Maintenance: for duration of Contract
Rehabilitate all disturbed areas at the construction equipment camp as soon as construction is complete within an area.	Contractor	Duration of Contract

Performance Indicator	<ul style="list-style-type: none"> » No visible erosion scars once construction in an area is completed. » No claims regarding damage leading to litigation due to unauthorised removal of vegetation. » All damaged areas successfully rehabilitated one year after completion » No damage to identified sensitive areas. » Appropriate waste management.
Monitoring	<ul style="list-style-type: none"> » Regular audits of the construction camps and areas of construction on site. » An incident reporting system should be used to record non-conformances to the EMP.



OBJECTIVE: Minimise impacts related to inappropriate site establishment

Site establishment is the first activity which is to be undertaken within the construction phase. The Contractor must take all reasonable measures to ensure the safety of the public in the surrounding area. Where the public could be exposed to danger by any of the works or site activities, the Contractor must, as appropriate, provide suitable flagmen, barriers and/or warning signs in English, Afrikaans and any other relevant local languages, all to the approval of the Project Manager.

Project Component/s	» All infrastructure
Potential Impact	» Hazards to landowners and public. » Damage to indigenous natural vegetation, due largely to ignorance of where such areas are located. » Loss of threatened plant species
Activities/Risk Sources	» Excavations. » Movement of construction vehicles in the area and on-site.
Mitigation: Target/Objective	» To secure the site against unauthorised entry. » To protect members of the public/landowners/residents. » No loss of or damage to sensitive vegetation in areas outside the immediate development footprint.

Mitigation: Action/Control	Responsibility	Timeframe
Secure site, working areas and excavations in an appropriate manner, as agreed with the ECO.	Contractor	Site establishment, and duration of construction
Where necessary control access, fence, and secure area.	Contractor	Site establishment, and duration of construction
Fence and secure contractor's equipment camp.	Contractor	Site establishment
Where the public could be exposed to danger by any of the works or site activities, the contractor must, as appropriate, provide suitable flagmen, barriers and/or warning signs in English, Afrikaans and any other relevant local languages, all to the approval of the Site Manager.	Contractor	Site establishment and duration of construction

Mitigation: Action/Control	Responsibility	Timeframe
All unattended open excavations shall be adequately demarcated and/or fenced. Adequate protective measures must be implemented to prevent unauthorised access to the working area and the internal access/haul routes.	Contractor	Site establishment and duration of construction
Establish appropriately bunded areas for storage of hazardous materials (i.e. fuel to be required during construction).	Contractor	Site establishment
All development footprints should be appropriately fenced off and clearly demarcated.	Contractor	Site establishment, and duration of construction
Establish the necessary ablution facilities with chemical toilets and provide adequate sanitation facilities and ablutions for construction workers (1 toilet per every 15 workers) at appropriate locations on site.	Contractor	Site establishment, and duration of construction
Ablution or sanitation facilities should not be located within 100 m from a 1:100 year flood line including drainage lines.	Contractor	Site establishment, and duration of construction
Supply adequate (closable, tamper proof) waste collection bins at site where construction is being undertaken. Separate bins should be provided for general and hazardous waste. As far as possible, provision should be made for separation of waste for recycling.	Contractor	Site establishment, and duration of construction

Performance Indicator	<ul style="list-style-type: none"> » Site is secure and there is no unauthorised entry. » No members of the public/ landowners injured. » Appropriate and adequate waste management and sanitation facilities provided at construction site.
Monitoring	<ul style="list-style-type: none"> » An incident reporting system will be used to record non-conformances to the EMP. » ECO to monitor all construction areas on a continuous basis until all construction is completed. Non-conformances will be immediately reported to the site manager.

OBJECTIVE: Appropriate management of the construction site and construction workers

Project Component/s	» Power line infrastructure.
----------------------------	------------------------------

Potential Impact	<ul style="list-style-type: none"> » Damage to indigenous natural vegetation and sensitive areas. » Damage to and/or loss of topsoil (i.e. pollution, compaction etc.). » Impacts on the surrounding environment due to inadequate sanitation and waste removal facilities. » Pollution/contamination of the environment.
Activities/Risk Sources	<ul style="list-style-type: none"> » Vegetation clearing and levelling of equipment storage area/s. » Access to and from the equipment storage area/s. » Ablution facilities. » Contractors not aware of the requirements of the EMP, leading to unnecessary impacts on the surrounding environment.
Mitigation: Target/Objective	<ul style="list-style-type: none"> » Limit equipment storage within demarcated designated areas. » Ensure adequate sanitation facilities and waste management practices. » Ensure appropriate management of actions by on-site personnel in order to minimise impacts to the surrounding environment.

Mitigation: Action/Control	Responsibility	Timeframe
As far as possible, minimise vegetation clearing and levelling for equipment storage area/s.	Contractor	Site establishment, and during construction
Rehabilitate all disturbed areas at the construction equipment camp as soon as construction is complete within an area.	Contractor	Duration of Contract
Ensure waste removal facilities are maintained and emptied on a regular basis.	Contractor	Site establishment, and duration of construction
The terms of this EMP and the Environmental Authorisation (once issued) must be included in all tender documentation and Contractors contracts	Garob Wind Farm (Pty) Ltd	Tender process
Ensure that all personnel have the appropriate level of environmental awareness and competence to ensure continued environmental due diligence and on-going minimisation of environmental harm. This can be achieved through the provision of appropriate environmental awareness training to all personnel. Records of all training undertaken must be kept.	Contractor	Duration of construction
Contractors must use chemical toilets/ablution facilities situated at designated areas of the site; no ablution activities will be permitted outside the designated areas. These facilities must be regularly serviced by appropriate contractors. A minimum of	Contractor and sub-contractor/s	Duration of contract

Mitigation: Action/Control	Responsibility	Timeframe
one toilet shall be provided per 15 persons at each working area such as the Contractor's camp		
Cooking and eating of meals must take place in a designated area. No firewood or kindling may be gathered from the site or surrounds.	Contractor and sub-contractor/s	Duration of contract
All litter must be deposited in a clearly marked, closed, animal-proof disposal bin in the construction area. Particular attention needs to be paid to food waste.	Contractor and sub-contractor/s	Duration of contract
No one other than the ECO or personnel authorised by the ECO may disturb flora or fauna outside of the demarcated construction area/s.	Contractor and sub-contractor/s	Duration of contract
Fire fighting equipment and training must be provided before the construction phase commences.	Contractor and sub-contractor/s	Duration of contract
Draft Code of Conduct for construction workers.	Contractor and sub-contractor/s	Pre-construction
Contractors must ensure that all workers are informed at the outset of the construction phase of the conditions contained in the Code of Conduct, specifically consequences of stock theft and trespassing on adjacent farms.	Contractor and sub-contractor/s	Construction
On completion of the construction phase, all construction workers must leave the site within one week of their contract ending.	Contractor and sub-contractor/s	Construction

Performance Indicator	<ul style="list-style-type: none"> » The construction equipment camps have avoided sensitive areas, as approved by the ECO and agreed with the landowner. » Ablution and waste removal facilities are in a good working order and do not pollute the environment due to mismanagement. » All areas are rehabilitated promptly after construction in an area is complete. » Excess vegetation clearing and levelling is not reported by the ECO. » No complaints regarding contractor behaviour or habits. » Appropriate training of all staff is undertaken prior to them commencing work on the construction site. » Code of Conduct drafted before commencement of construction phase.
Monitoring	<ul style="list-style-type: none"> » Regular audits of the construction camps and areas of construction on site by the ECO. » Proof of disposal of sewage at an appropriate wastewater treatment works.

	<ul style="list-style-type: none"> » An incident reporting system should be used to record non-conformances to the EMP. » Observation and supervision of Contractor practices throughout construction phase by the ECO. » Complaints will be investigated and, if appropriate, acted upon. » An incident reporting system will be used to record non-conformances to the EMP.
--	---

OBJECTIVE: Maximise local employment and business opportunities associated with the construction phase

Although limited, employment opportunities could be created during the construction phase, specifically for semi-skilled and unskilled workers. Use should be made of local labour as far as possible.

Project Component/s	» Construction activities.
Potential Impact	» The opportunities and benefits associated with the creation of local employment and business.
Activities/Risk Sources	<ul style="list-style-type: none"> » Contractors who make use of their own labour for unskilled tasks, thereby reducing the employment and business opportunities for locals. » The inflow of various specialists from outside the study area and even abroad. » Sourcing of individuals with skills similar to the local labour pool outside the municipal area.
Mitigation: Target/Objective	» Employment of a maximum number of low-skilled to semi-skilled workers for the project from the local area where possible.

Mitigation: Action/Control	Responsibility	Timeframe
Construction workers should be recruited, as far as possible, from the local area in and around the Copperton Community area in the Siyathemba municipality.	Contractor	Duration of construction
Tender documentation should contain guidelines for the involvement of labour, entrepreneurs, businesses, and SMMEs from the local sector.	Contractor	Pre-construction
Develop a database of local BEE service providers and ensure that they are informed of tenders and job opportunities.	Contractor	Pre-construction and

Mitigation: Action/Control	Responsibility	Timeframe
		construction
Performance Indicator	<ul style="list-style-type: none"> » The involvement of local labour and previously disadvantaged individuals is promoted. » Labour, entrepreneurs, businesses, and SMMEs from the local sector are awarded jobs, where possible, based on requirements in the tender documentation. 	
Monitoring	<ul style="list-style-type: none"> » Developer and or appointed ECO must monitor indicators listed above to ensure that they have been met for the construction phase. 	

OBJECTIVE: Minimise impacts related to traffic management and transportation of equipment and materials to site

The construction phase of the project will be the most significant in terms of generating traffic impacts; resulting from the transport of equipment and materials and construction crews to the site and the return of the vehicles after delivery of materials.

Existing public roads will be used during construction, such as the R357. The section below provides a guideline for the Traffic Management and Transportation Plan on site and will need to be supplemented with the relevant final transport plan devised by the contractor.

Project Component/s	<ul style="list-style-type: none"> » Delivery of any component required within the construction phase.
Potential Impact	<ul style="list-style-type: none"> » Impact of heavy construction vehicles on road surfaces, and possible increased risk in accidents involving people and animals. » Traffic congestion, particularly on narrow roads or on road passes where overtaking is not permitted. » Deterioration of road pavement conditions (both surfaced and gravel road) due to abnormal loads.
Activities/Risk Sources	<ul style="list-style-type: none"> » Construction vehicle movement. » Speeding on local roads. » Degradation of local road conditions. » Site preparation and earthworks. » Foundations or plant equipment installation. » Transportation of ready-mix cement from off-site batching plant to the site.

	<ul style="list-style-type: none"> » Mobile construction equipment movement on-site. » Power line construction activities.
Mitigation: Target/Objective	<ul style="list-style-type: none"> » Minimise impact of traffic on local traffic volume, existing infrastructure, property owners, animals, and road users. » To ensure all vehicles are roadworthy and all materials/equipment are transported appropriately and within any imposed permit/licence conditions.

Mitigation: Action/Control	Responsibility	Timeframe
Appropriate dust suppression techniques must be implemented to minimise dust from gravel roads.	Garob Wind Farm (Pty) Ltd and ECO	Construction
Construction vehicles and those transporting materials and goods should be inspected by the contractor or a sub-contractor to ensure that these are in good working order and not overloaded.	Contractor	Construction
Strict vehicle safety standards should be implemented and monitored.	Contractor and ECO	Construction
No deviation from approved transportation routes must be allowed, unless roads are closed for whatever reason outside the control of the contractor.	Contractor	Duration of contract
Appropriate road management strategies must be implemented on external and internal roads with all employees and contractors required to abide by standard road and safety procedures.	Contractor (or appointed transportation contractor)	Pre-construction
Any traffic delays resulting from the presence of construction traffic must be co-ordinated with the appropriate authorities.	Contractor	Duration of contract
The movement of all vehicles within the site must be on designated roadways.	Contractor	Duration of contract
Signage must be established at appropriate points warning of turning traffic and the construction site (all signage to be in accordance with prescribed standards).	Contractor	Duration of contract
Appropriate maintenance of all vehicles of the contractor must be ensured.	Contractor	Duration of contract
All vehicles of the contractor travelling on public roads must adhere to the specified speed limits and all drivers must be in possession of an appropriate valid driver's license.	Contractor	Duration of contract
Signs must be placed along construction roads to identify speed limits, travel restrictions and other standard traffic control information.	Contractor	Duration of contract

Performance	» Vehicles keeping to the speed limits.
--------------------	---

Indicator	<ul style="list-style-type: none"> » Vehicles are in good working order and safety standards are implemented. » Local residents and road users are aware of vehicle movements and schedules. » No accidents related to construction traffic are experienced. » Local road conditions and road surfaces are up to standard. » Complaints of residents are not received (e.g. concerning the speeding of heavy vehicles).
Monitoring	<ul style="list-style-type: none"> » Developer and or appointed ECO must monitor indicators listed above to ensure that they have been implemented.

OBJECTIVE: To avoid and or minimise the potential impact of the activities during the construction on the safety of local communities

An inflow of workers could, as a worst case scenario and irrespective of the size of the workforce, pose some security risks. Criminals could also use the opportunity due to “outsiders” being in the area to undertake their criminal activities.

Project Component/s	» Construction and establishment activities
Potential Impact	<ul style="list-style-type: none"> » Impact on safety of farmers and communities (increased crime etc.) and potential loss of livestock due to stock theft by construction workers and also damage to farm infrastructure, such as gates and fences. » Impact on irrigated fields
Activities/Risk Sources	» The presence of construction workers on the site can pose a potential safety risk to local farmers and communities and may result in stock thefts. The activities of construction workers may also result in damage to farm infrastructure.
Mitigation: Target/Objective	» To avoid and or minimise the potential impact on local communities and their livelihoods.

Mitigation: Action/Control	Responsibility	Timeframe
The housing of construction workers on the site should be limited to security personnel.	Contractor	Construction
Ensure that all farm gates are locked and secure at all times	Garob Wind Farm (Pty) Ltd and Contractor	Construction and Operation
Inform all landowners of activity on their land	Garob Wind Farm (Pty) Ltd	All phases of the project
The construction site should be fenced and access to	Garob Wind	All phases of

Mitigation: Action/Control	Responsibility	Timeframe
the area controlled.	Farm (Pty) Ltd and Contractor	project
Procedures and measures to prevent, and in worst cases, attend to fires should be developed in consultation with the surrounding property owners and the local municipality.	Garob Wind Farm (Pty) Ltd , Local Municipality, and local communities	Pre-construction and when required
Contact details of emergency services should be prominently displayed on site.	Garob Wind Farm (Pty) Ltd and Contractor	Construction
Appropriate fire-fighting equipment must be present on site and members of the workforce should be appropriately trained in using this equipment in the fighting of veld fires	Garob Wind Farm (Pty) Ltd and Contractor	Construction

Performance Indicator	<ul style="list-style-type: none"> » No criminal activities and theft of livestock are reported. » No fires or on-site accidents occur.
Monitoring	<ul style="list-style-type: none"> » Garob Wind Farm (Pty) Ltd and appointed ECO must monitor indicators listed above to ensure that they have been implemented.

OBJECTIVE: Management of dust and air emissions (Refer to Appendix E: Standard specifications for Earth Works)

During the construction phase, limited gaseous or particulate emissions are anticipated from exhaust emissions from construction vehicles and equipment on-site, as well as vehicle entrained dust from the movement of vehicles on the main and internal access roads.

Project Component/s	<ul style="list-style-type: none"> » Power line infrastructure. » Access road
Potential Impact	<ul style="list-style-type: none"> » Dust and particulates from vehicle movement to and on-site, foundation excavation, road construction activities, road maintenance activities, temporary stockpiles, and vegetation clearing. Release of minor amounts of air pollutants (for example NO₂, CO and SO₂) from vehicles and construction equipment
Activities/Risk Sources	<ul style="list-style-type: none"> » Clearing of vegetation and topsoil. » Excavation, grading, scraping, levelling, digging, drilling.

	<ul style="list-style-type: none"> » Transport of materials, equipment, and components on internal access roads. » Re-entrainment of deposited dust by vehicle movements. » Wind erosion from topsoil and spoil stockpiles and unsealed roads and surfaces. » Fuel burning vehicle and construction engines.
Mitigation: Target/Objective	<ul style="list-style-type: none"> » To ensure emissions from all vehicles and construction engines are minimised, where possible, for the duration of the construction phase » To minimise nuisance to the community from dust emissions and to comply with workplace health and safety requirements for the duration of the construction phase

Mitigation: Action/Control	Responsibility	Timeframe
Roads must be maintained in a manner that will ensure that nuisance from dust emissions from road or vehicle sources are not visibly excessive.	Contractor	Site establishment and construction
Ensure that any damage to roads because of construction activities is repaired before completion of the construction phase.	Contractor	Site establishment and construction
Appropriate dust suppressant must be applied on all exposed areas and stockpiles as required to minimise/control airborne dust.	Contractor	Duration of contract
Haul vehicles moving outside the construction site carrying material that can be wind-blown must be covered with tarpaulins if required by the wind conditions.	Contractor	Duration of contract
Speed of construction vehicles must be restricted, as defined by the ECO.	Contractor	Duration of contract
Dust-generating activities or earthworks may need to be rescheduled or the frequency of application of dust control/suppressant increased during periods of high winds if visible dust is blowing toward nearby residences outside the site.	Contractor	Duration of contract
Disturbed areas must be re-vegetated as soon as practicable once construction in an area is completed.	Contractor	Completion of construction
Vehicles and equipment must be maintained in a road-worthy condition at all times.	Contractor	Duration of contract

Performance Indicator	<ul style="list-style-type: none"> » No complaints from affected residents or community regarding dust or vehicle emissions. » Dust suppression measures implemented for all heavy vehicles that require such measures during the construction phase
------------------------------	--

	<p>commences.</p> <ul style="list-style-type: none"> » Drivers made aware of the potential safety issues and enforcement of strict speed limits when they are employed. » All heavy vehicles equipped with speed monitors before they are used in the construction phase in accordance with South African vehicle legislation. » Road worthy certificates in place for all heavy vehicles at outset of construction phase and up-dated on a monthly basis.
Monitoring	<p>Monitoring must be undertaken to ensure emissions are not exceeding the prescribed levels via the following methods:</p> <ul style="list-style-type: none"> » Immediate reporting by personnel of any potential or actual issues with nuisance dust or emissions to the Site Manager. » A complaints register must be maintained, in which any complaints from residents/the community will be logged, and thereafter complaints will be investigated and, where appropriate, acted upon. » An incident reporting system must be used to record non-conformances to the EMP.

OBJECTIVE: Minimisation of development footprint and disturbance to topsoil

In order to minimise impacts on flora, fauna, and ecological processes, the development footprint should be limited.

Project Component/s	<ul style="list-style-type: none"> » Power line. » Access roads
Potential Impact	<ul style="list-style-type: none"> » Impacts on natural vegetation. » Impacts on soil. » Loss of topsoil.
Activity/Risk Source	<ul style="list-style-type: none"> » Site preparation and earthworks. » Excavation of foundations. » Construction of site access road. » Site preparation (e.g. compaction). » Power line construction activities. » Stockpiling of topsoil, subsoil and spoil material.
Mitigation: Target/Objective	<ul style="list-style-type: none"> » To retain natural vegetation, where possible. » To minimise footprints of disturbance of vegetation/habitats. » Remove and store all topsoil on areas that are to be excavated; and use this topsoil in subsequent rehabilitation of disturbed areas. » Minimise spoil material.

Mitigation: Action/Control	Responsibility	Timeframe
Areas to be cleared must be clearly marked on-site to eliminate the potential for unnecessary clearing.	Contractor in consultation with Specialist	Pre-construction
The extent of clearing and disturbance to the native vegetation must be kept to a minimum so that impact on flora and fauna and their habitats is restricted.	Contractor	Site establishment & duration of contract
Construction activities must be restricted to demarcated areas so that impact on flora and fauna is restricted.	Contractor	Site establishment & duration of contract
Any fill material required must be sourced from a commercial off-site suitable/permitted source, quarry or borrow pit. Where possible, material from foundation excavations must be used as fill on-site.	Contractor	Duration of contract
Excavated topsoil must be stockpiled in designated areas separate from base material at a maximum height and covered until replaced during rehabilitation.	Contractor	Site establishment & duration of contract
Topsoil must not be stripped or stockpiled when it is raining or when the soil is wet as compaction will occur.	Contractor	Site establishment Maintenance: for duration of contract
As far as possible, the maximum topsoil stockpile height must not exceed 2 m in order to preserve micro-organisms within the topsoil, which can be lost due to compaction and lack of oxygen.	Contractor	Duration of contract

Performance Indicator	<ul style="list-style-type: none"> » Minimal disturbance outside of designated work areas. » Minimise clearing of existing vegetation. » Topsoil appropriately stored.
Monitoring	<ul style="list-style-type: none"> » Observation of vegetation clearing and soil management activities by ECO throughout construction phase. » Supervision of all clearing and earthworks. » An incident reporting system will be used to record non-conformances to the EMP.

OBJECTIVE: Limit impacts on vegetation communities and species of special concern to limit the loss of biodiversity

Project Component/s	» All infrastructure and activities which result in vegetation loss or clearing including the power line support structures; access and maintenance roads.
Potential Impact	» Loss of plant cover leading to erosion as well as loss of faunal habitat and loss of specimens of protected plants.
Activity/Risk Source	» Construction activities
Mitigation: Target/Objective	» Minimal impact on biodiversity & terrestrial environment. » Low impact on protected species

Mitigation: Action/Control	Responsibility	Timeframe
Preconstruction walk-through of power line route and support structure positions and use micro-siting to reduce local impact. (Avifauna and Ecology specialist)	Specialist	Pre-construction
Affected individuals of protected species which cannot be avoided should be translocated to a safe area on the site prior to construction.	specialist	Construction
Erosion control measures should be implemented in areas where slopes have been disturbed.	Contractor	Construction
Revegetation of cleared areas or monitoring to ensure that recovery is taking place. Alien plant clearing where necessary	Contractor	Construction
No fuelwood collection should be allowed on-site. No fires allowed on-site.	Contractor	Construction
Vegetation clearing to be kept to a minimum. No unnecessary vegetation to be cleared.	Contractor	Construction & Operation

Performance Indicator	» Vegetation loss restricted to infrastructure footprint. » Protected species avoided as far as possible.
Monitoring	» Vegetation is cleared only within essential areas. » Monitor alien plant abundance within the servitude on an annual basis. » Document revegetation actions taken and their success. » Document erosion problems and the control measures implemented.

OBJECTIVE: Limit direct and indirect terrestrial faunal impacts

Project component/s	Construction activities, and human presence
Potential Impact	Disturbance of faunal communities due to construction as well as poaching and hunting risk from construction staff.
Activity/risk source	Habitat transformation during construction; site fencing, presence of construction and operation personnel.
Mitigation: Target/Objective	Low faunal impact, during construction and operation.

Mitigation: Action/control	Responsibility	Timeframe
Environmental induction for all staff	Management	Construction
Any fauna encountered during construction should be removed to safety by the ECO or other suitably qualified person.	Management	Construction
All vehicles to adhere to low speed limits (40km/h max) on the site, to reduce risk of faunal collisions as well as reduce dust.	Management	Construction
All night-lighting should use low-UV type lights (such as most LEDs), which do not attract insects. The lights should also be of types which are directed downward and do not result in large amounts of light pollution.	Management	Construction & Operation
Performance Indicator	<ul style="list-style-type: none"> » Low number of incidents with fauna during construction » No removal of vegetation/plants during construction 	
Monitoring	<ul style="list-style-type: none"> » Monitoring for compliance during the construction phase. All incidents to be noted. 	

OBJECTIVE: Prevent damage to the drainage system/ drainage lines

The drainage lines at the site are generally poorly developed on account of the low rainfall and flat topography. There are no major drainage lines within the power line corridor. Between the substation and the first deviation in the line, the route traverses a large drainage basin through which water occasionally moves, there is however no clearly defined drainage channel and the area is characterized by deeper sandy soils and the predominance of large shrubs such as *Rhigozum trichotomum*, *Phaeoptilum spinosum* and *Lycium oxycarpum*. Towards the Kronos substation the route traverses a depression with an open

drainage course at the bottom. In this area the vegetation is characterized by species such as *Lycium horridum*, *Rhigozum trichotomum* and *Osteospermum armatum*. These areas are considered more sensitive than the surrounding landscape and disturbance within these habitats should be kept to a minimum as they are vulnerable to erosion on account of the water which moves these areas on occasion.

Project Component/s	Any activity that could result in a disturbance or loss of the natural vegetation and change in soil properties e.g. construction of panel infrastructure, access roads, substation and power lines.
Potential Impact	Disturbance or loss of indigenous vegetation during the construction and operational phase results in a loss of biodiversity and habitat, increases declared weedy and alien invasive plant species and soil erosion; and disrupts natural faunal populations.
Activity/Risk Source	Construction and operational phases.
Mitigation: Target/Objective	Apply adequate erosion control measures as soon as construction begins

Mitigation: Action/Control	Responsibility	Timeframe
Minimise large-scale clearance of natural vegetation and disturbance to the proposed site.	Construction team Project management Environmental Control Officer.	Duration of construction
Use existing and dedicated access roads to limit disturbance of the natural vegetation.		
Minimise damage to natural vegetation during the construction of the associated infrastructure, for example, power lines and access road.		
Re-vegetate the disturbed areas as soon as possible with indigenous vegetation.		
Prevent soil erosion originating from the site or access road.		
Limit the use of underground water in order to prevent over utilisation of water resources.		
Place access road and power line along existing disturbed/ transformed areas such as cropped lands.		
Should erosion along drainage lines take place – the drainage lines should be stabilized.	Contractor ECO	Duration of construction and operational

Mitigation: Action/Control	Responsibility	Timeframe
		phases.

Performance Indicator	Minimal/no impact on drainage system.
Monitoring	Yearly monitoring of the area on foot to ensure that the hydrological system is functioning correctly.

OBJECTIVE: Minimise the establishment and spread of alien invasive plants (refer to Appendix B: Invasive Management Plan)

On-going alien plant monitoring and removal should be undertaken on all areas of natural vegetation on an annual

Project Component/s	Any activity that could result in a disturbance or loss of the natural vegetation e.g. construction of panel infrastructure, access roads, substation and power lines.
Potential Impact	Disturbance or loss of indigenous vegetation during the construction and operational phase results in a loss of biodiversity and habitat, increases declared weedy and alien invasive plant species and soil erosion; and disrupts natural faunal populations.
Activity/Risk Source	Construction and operational phases.
Mitigation: Target/Objective	Minimise loss or disturbance of natural vegetation. Re-vegetate denuded and disturbed areas as soon as possible. Early detection of declared weedy and alien invasive species. Control of declared weedy and alien invasive species. Time period: Construction and operational phases.

Mitigation: Action/Control	Responsibility	Timeframe
Minimise large-scale clearance of natural vegetation and disturbance to the proposed site.	Construction team Project management Environmental Control Officer.	Duration of construction and operational phases.
Use existing and dedicated access roads to limit disturbance of the natural vegetation.		
Minimise damage to natural vegetation during the construction of associated infrastructure, for example, the access road and power lines.		
Re-vegetate the disturbed areas as soon as possible with indigenous vegetation.		

Mitigation: Action/Control	Responsibility	Timeframe
Monitor and control declared weedy and alien invasive species.		
Prevent soil erosion originating from the site or access road.		

Performance Indicator	No (or a small number of) declared weedy and alien invasive species present on the developed site or along roads and power lines or in the surrounding area.
Monitoring	Regular surveys of the extent of declared weedy and alien invasive plant species and the implementation of control measures according to legislation. Monitoring should continue from the construction phase throughout the lifespan of the facility. The surrounding natural vegetation should also be monitored for the spread of invasive species.

OBJECTIVE: Minimise soil degradation and erosion (refer to Appendix C: Soil Erosion Management Plan)

Most of the study area appears to be underlain by unconsolidated sediments.

The soil on site may be impacted in terms of:

- » Soil degradation including erosion (by wind and water) and subsequent deposition elsewhere (i.e. into the drainage lines)
- » Uncontrolled run-off relating to construction activity (excessive wetting, uncontrolled discharge, etc.) will also lead to accelerated erosion and possible sedimentation of the drainage lines.
- » Degradation of the natural soil profile due to excavation, stockpiling, compaction, pollution and other construction activities will affect soil forming processes and associated ecosystems. Degradation of parent rock is considered low as there are no deep excavations envisaged.

Project Component/s	<ul style="list-style-type: none"> » Power line. » Access roads.
Potential Impact	<ul style="list-style-type: none"> » Soil and rock degradation. » Soil erosion. » Increased deposition of soil into drainage systems. » Increased run-off over the site.

Activities/Risk Sources	<ul style="list-style-type: none"> » Removal of vegetation, excavation, stockpiling, compaction, and pollution of soil. » Rainfall - water erosion of disturbed areas. » Wind erosion of disturbed areas. » Concentrated discharge of water from construction activity.
Mitigation: Target/Objective	<ul style="list-style-type: none"> » Minimise extent of disturbance areas. » Minimise activity within disturbance areas. » Minimise soil degradation (mixing, wetting, compaction, etc.). » Minimise soil erosion. » Minimise deposition of soil into drainage lines. » Minimise instability of embankments/excavations.

Mitigation: Action/Control	Responsibility	Timeframe
Identify disturbance areas and restrict construction activity to these areas.	Contractor	Before and during construction
Rehabilitate disturbance areas as soon as practicable when construction in an area is complete.	Contractor	During and after construction
Any new access roads required to be carefully planned and constructed to minimise the impacted area and prevent unnecessary excavation, placement, and compaction of soil.	Engineer, ECO, and Contractor	Design and construction
Where access roads cross natural drainage lines, culverts must be designed to allow free flow and regular maintenance must be carried out.	Engineer, ECO, and Contractor	Design, before and during construction
Dust control on construction site (i.e. wetting of denuded areas).	Contractor	Construction
Minimise removal of vegetation which adds stability to soil.	ECO/Contractor	Construction
Stockpile topsoil for re-use in rehabilitation phase, protect stockpile from erosion	Contractor	Before and during construction
Erosion control measures (i.e. run-off attenuation on slopes (sand bags, logs), silt fences, storm water catch-pits, shade nets, or temporary mulching over denuded area as required) must be implemented where required.	Contractor, and ECO	Erection: Before construction Maintenance: Duration of contract
Control depth of excavations and stability of cut faces/sidewalls.	Engineer, ECO, and Contractor	Before construction and Maintenance

Mitigation: Action/Control	Responsibility	Timeframe
		Duration of contract
Performance Indicator	<ul style="list-style-type: none"> » No activity outside demarcated disturbance areas. » Acceptable level of activity within disturbance areas, as determined by the ECO. » Acceptable level of soil erosion around site, as determined by the ECO. » Acceptable level of increased siltation in drainage lines, as determined by the ECO. » Acceptable state of excavations, as determined by the ECO. » No activity in restricted areas. 	
Monitoring	<ul style="list-style-type: none"> » Monthly inspections of sediment control devices. » Monthly inspections of surroundings, including drainage lines. » Immediate reporting of ineffective sediment control systems. » An incident reporting system will record non-conformances. 	

OBJECTIVE: Protection of heritage resources

The main cause of impacts to archaeological sites is physical disturbance of the material itself and its context. The heritage and scientific potential of an archaeological site is highly dependent on its geological and spatial context. Excavations for foundations may archaeological sites, as will road construction activities.

The impacts to heritage resources by the proposed development are not considered to be highly significant. The recorded sites that will potentially be impacted on are all of low significance. Most of the Stone Age archaeology in the study area consists of low densities of scattered (and mixed) Middle Stone Age (MSA) and Late Stone Age (LSA) artefacts. These occurrences are referred to as background scatter and are of low significance. However more substantial and significant MSA and LSA archaeological sites do occur in the areas surveyed but are not in close proximity to the proposed power line corridor.

Project Component/s	<ul style="list-style-type: none"> » Power line. » Access roads.
Potential Impact	<ul style="list-style-type: none"> » Heritage objects/ artefacts/ Unidentified Sites/ Burial and Grave Sites (found on site are inappropriately managed or destroyed
Activity/Risk	<ul style="list-style-type: none"> » Site preparation and earthworks

Source	<ul style="list-style-type: none"> » Foundations or plant equipment installation » Mobile construction equipment movement on site » Power line and access roads construction activities.
Mitigation: Target/Objective	<ul style="list-style-type: none"> » To ensure that any heritage objects found on site are treated appropriately and in accordance with the relevant legislation.

Mitigation: Action/control	Responsibility	Timeframe
Areas required to be cleared during construction must be clearly marked in the field to avoid unnecessary disturbance of adjacent areas.	Contractor in consultation with Specialist	Pre-construction
Project employees and any contract staff will maintain, at all times, a high level of awareness of the possibility of discovering heritage sites. Familiarise all staff and contractors with procedures for dealing with heritage objects/sites.	Garob Wind Farm (Pty) Ltd / Contractor	Duration of contract
If a heritage object is found (e.g. grave/ burial site, or archaeological site), work in that area must be stopped immediately, and an appropriate specialist brought in to assess to site, notify the administering authority of the item/site, and undertake due/required processes.	Garob Wind Farm (Pty) Ltd , and Contractor in consultation with Specialist	Duration of contract
Apply for sampling permits from SAHRA and/or provincial heritage authority for work on any archaeological sites identified as needing intervention.	Garob Wind Farm (Pty) Ltd in consultation with Specialist	Pre-construction
Placement of pylons should avoid potential sites of high archaeological sensitivity such as pans, rocky ridges and river beds.	Garob Wind Farm (Pty) Ltd in consultation with Specialist	Pre-construction

Performance Indicator	<ul style="list-style-type: none"> » Zero disturbance outside of designated work areas. » All heritage items located are dealt with as per the legislative guidelines.
Monitoring	<ul style="list-style-type: none"> » Observation of excavation activities by ECO throughout construction phase. » Supervision of all clearing and earthworks. » Due care taken during earthworks and disturbance of land by all staff and any heritage objects found reported. » Appropriate permits obtained from SAHRA prior to the disturbance or destruction of heritage sites. » An incident reporting system will be used to record non-conformances to the EMP.

OBJECTIVE: Minimisation of visual impacts associated with construction

During the construction phase heavy vehicles, components, equipment and construction crews will frequent the area and may cause, at the very least, a cumulative visual nuisance to landowners and residents in the area as well as road users. The placement of lay-down areas and temporary construction camps should be carefully considered in order to not negatively influence the future perception of the project. Secondary visual impacts associated with the construction phase, such as the sight of construction vehicles, dust and construction litter must be managed to reduce visual impacts. The use of dust-suppression techniques on the access roads (where required), timely removal of rubble and litter, and the erection of temporary screening will assist in doing this.

Project Component/s	Construction activities along the power line
Potential Impact	Visual impact of general construction activities, and the potential scarring of the landscape due to vegetation clearing.
Activity/Risk Source	The viewing of the above mentioned by observers near the infrastructure.
Mitigation: Target/Objective	Minimal visual intrusion by construction activities and intact vegetation cover outside of immediate works areas.

Mitigation: Action/Control	Responsibility	Timeframe
Ensure that vegetation is not unnecessarily cleared or removed during the construction period.	Garob Wind Farm (Pty) Ltd / contractor	Early in the construction phase.
Reduce the construction period through careful logistical planning and productive implementation of resources.	Garob Wind Farm (Pty) Ltd / contractor	Early in the construction phase.
Plan the placement of lay-down areas and temporary construction equipment camps in order to minimise vegetation clearing (i.e. in already disturbed areas) wherever possible.	Garob Wind Farm (Pty) Ltd / contractor	Early in and throughout the construction phase.
Restrict the activities and movement of construction workers and vehicles to the immediate construction site and existing access roads.	Garob Wind Farm (Pty) Ltd / contractor	Throughout the construction phase.
Ensure that rubble, litter, and disused construction	Garob Wind	Throughout

Mitigation: Action/Control	Responsibility	Timeframe
materials are appropriately stored (if not removed daily) and then disposed regularly at licensed waste facilities.	Farm (Pty) Ltd / contractor	the construction phase.
Reduce and control construction dust through the use of approved dust suppression techniques as and when required (i.e. whenever dust becomes apparent).	Garob Wind Farm (Pty) Ltd / contractor	Throughout the construction phase.
Restrict construction activities to daylight hours in order to negate or reduce the visual impacts associated with lighting.	Garob Wind Farm (Pty) Ltd / contractor	Throughout the construction phase.

Performance Indicator	Vegetation cover within the servitudes and in the vicinity of the infrastructure is intact with no evidence of degradation or erosion.
Monitoring	Monitoring of vegetation clearing during construction. Monitoring of rehabilitated areas post construction.

OBJECTIVE: Appropriate handling and management of waste (Refer to Appendix D: Construction Waste Guideline)

In order to manage the wastes effectively, guidelines for the assessment, classification, and management of wastes, along with industry principles for minimising construction wastes must be implemented.

Project Component/s	<ul style="list-style-type: none"> » Power line. » Access roads
Potential Impact	<ul style="list-style-type: none"> » Inefficient use of resources resulting in excessive waste generation. » Litter or contamination of the site or water through poor waste management practices.
Activity/Risk Source	<ul style="list-style-type: none"> » Packaging. » Other construction wastes. » Hydrocarbon use and storage. » Spoil material from excavation, earthworks, and site preparation.
Mitigation: Target/Objective	<ul style="list-style-type: none"> » To comply with waste management legislation. » To minimise production of waste. » To ensure appropriate waste storage and disposal. » To avoid environmental harm from waste disposal. » A waste manifests should be developed for the ablutions

	showing proof of disposal of sewage at appropriate water treatment works.
--	---

Mitigation: Action/Control	Responsibility	Timeframe
Construction method and materials should be carefully considered in view of waste reduction, re-use, and recycling opportunities.	Contractor	Duration of contract
Construction contractors must provide specific detailed waste management plans to deal with all waste streams.	Contractor	Duration of contract
Specific areas must be designated on-site for the temporary management of various waste streams, i.e. general refuse, construction waste (wood and metal scrap), and contaminated waste as required. Location of such areas must seek to minimise the potential for impact on the surrounding environment, including prevention of contaminated runoff, seepage, and vermin control.	Contractor	Duration of contract
Where practically possible, construction and general wastes on-site must be reused or recycled. Bins and skips must be available on-site for collection, separation, and storage of waste streams (such as wood, metals, general refuse etc.).	Contractor	Duration of contract
Disposal of waste must be in accordance with relevant legislative requirements, including the use of licensed contractors.	Contractor	Duration of contract
Uncontaminated waste will be removed at least weekly for disposal; other wastes will be removed for recycling/ disposal at an appropriate frequency.	Contractor	Duration of contract
Disposal of waste will be in accordance with relevant legislative requirements, including the use of licensed contractors.	Contractor	Duration of contract
Hydrocarbon waste must be contained and stored in sealed containers within an appropriately bunded area.	Contractor	Duration of contract
Waste must be kept to a minimum and must be transported by approved waste transporters to sites designated for their disposal.	Contractor	Duration of contract
Spilled cement will be cleaned up as soon as possible and disposed of at a suitably licensed waste disposal site.	Contractor	Duration of contract
Documentation (waste manifest) must be maintained detailing the quantity, nature, and fate of any regulated waste. Waste disposal records must be available for review at any time.	Contractor	Duration of contract
Regularly serviced chemical toilets facilities will be used	Contractor	Duration of

Mitigation: Action/Control	Responsibility	Timeframe
to ensure appropriate control of sewage.		contract
Upon the completion of construction, the area must be cleared of potentially polluting materials.	Contractor	Completion of construction
Dispose of all solid waste collected at an appropriately registered waste disposal site. Waste disposal shall be in accordance with all relevant legislation and under no circumstances may waste be burnt on site.	Contractor	Duration of construction
Where a registered waste site is not available close to the construction site, provide a method statement with regard to waste management.	Contractor	Duration of construction

Performance Indicator	<ul style="list-style-type: none"> » No complaints received regarding waste on site or indiscriminate dumping. » Internal site audits ensuring that waste segregation, recycling and reuse is occurring appropriately. » Provision of all appropriate waste manifests for all waste streams.
Monitoring	<ul style="list-style-type: none"> » Observation and supervision of waste management practices throughout construction phase. » Waste collection will be monitored on a regular basis. » Waste documentation completed. » A complaints register will be maintained, in which any complaints from the community will be logged. Complaints will be investigated and, if appropriate, acted upon. » An incident reporting system will be used to record non-conformances to the EMP.

OBJECTIVE: Appropriate handling and storage of chemicals, hazardous substances

The construction phase will involve the storage and handling of a variety of chemicals including adhesives, abrasives, oils and lubricants, paints and solvents.

Project Component/s	» Storage and handling of chemicals, hazardous substances.
Potential Impact	<ul style="list-style-type: none"> » Release of contaminated water from contact with spilled chemicals. » Generation of contaminated wastes from used chemical containers.

Activity/Risk Source	<ul style="list-style-type: none"> » Vehicles associated with site preparation and earthworks. » Construction activities of area and linear infrastructure. » Hydrocarbon use and storage.
Mitigation: Target/Objective	<ul style="list-style-type: none"> » To ensure that the storage and handling of chemicals and hydrocarbons on-site does not cause pollution to the environment or harm to persons. » To ensure that the storage and maintenance of machinery on-site does not cause pollution of the environment or harm to persons.

Mitigation: Action/Control	Responsibility	Timeframe
Spill kits must be made available on-site for the clean-up of spills and leaks of contaminants.	Contractor	Duration of contract
Corrective action must be undertaken immediately if a potential/actual leak or spill of a polluting substance identified. This includes stopping the contaminant from further escaping, cleaning up the affected environment as much as practically possible and implementing preventive measures.	Contractor	Duration of contract
In the event of a major spill or leak of contaminants, the relevant administering authority must be immediately notified as per the notification of emergencies/incidents.	Contractor	Duration of contract
Spilled cement must be cleaned up as soon as possible and disposed of at a suitably licensed waste disposal site.	Contractor	Duration of contract
Any contaminated/polluted soil removed from the site must be disposed of at a licensed hazardous waste disposal facility.	Contractor	Duration of contract
Routine servicing and maintenance of vehicles must not to take place on-site (except for emergencies). If repairs of vehicles must take place, an appropriate drip tray must be used to contain any fuel or oils.	Contractor	Duration of contract
All stored fuels to be maintained within a bund and on a sealed surface.	Contractor	Duration of contract
Fuel storage areas must be inspected regularly to ensure bund stability, integrity, and function.	Contractor	Duration of contract
Construction machinery must be stored in an appropriately sealed area.	Contractor	Duration of contract
The storage of flammable and combustible liquids such as oils will be in designated areas which are appropriately bunded, and stored in compliance with Material Safety Data Sheets (MSDS) files.	Contractor	Duration of contract
Any storage and disposal permits/approvals which may be required must be obtained, and the conditions	Contractor	Duration of contract

Mitigation: Action/Control	Responsibility	Timeframe
attached to such permits and approvals will be compiled with.		
Transport of all hazardous substances must be in accordance with the relevant legislation and regulations	Contractor	Duration of contract
The sediment control and water quality structures used on-site must be monitored and maintained in an operational state at all times.	Contractor	Duration of contract
Upon the completion of construction, the area must be cleared of potentially polluting materials.	Contractor	Completion of construction

Performance Indicator	<ul style="list-style-type: none"> » No chemical spills outside of designated storage areas. » No unattended water or soil contamination by spills. » No complaints received regarding waste on site or indiscriminate dumping.
Monitoring	<ul style="list-style-type: none"> » Observation and supervision of chemical storage and handling practices and vehicle maintenance throughout construction phase. » A complaints register must be maintained, in which any complaints from the community will be logged. » An incident reporting system will be used to record non-conformances to the EMP.

OBJECTIVE: Noise control

Traffic movement to and from the site, particularly of heavy-duty vehicles during construction, could potentially result in a noise impact on the residents (very low density) near the site.

Project component/s	<ul style="list-style-type: none"> » Power line » Access roads
Potential Impact	» Nuisance noise from construction affecting the surrounding community
Activity/risk source	<ul style="list-style-type: none"> » Site preparation and earthworks » Construction-related transport » Foundations or plant equipment installation » Power line construction activities
Mitigation: Target/Objective	<ul style="list-style-type: none"> » To minimise noise to any surrounding residences from the construction activities » To comply with Noise Control Regulations and SANS Guidelines

	» To ensure noise levels are acceptable at residences in close proximity to construction activities
--	---

Mitigation: Action/control	Responsibility	Timeframe
In areas where sensitive receptors are located in close proximity to the construction site, activities should be limited to 6:00am to 6:00pm Monday – Saturday (excluding public holidays) (in terms of the Environment Conservation Act). Should construction activities need to be undertaken outside of these times, the surrounding communities will be notified and appropriate approval will be obtained from DEA and/or the Local Authority.	Contractor	Duration of contract
Construction noise will be managed according to the Noise Control Regulations and SANS 10103.	Contractor	Duration of contract
All construction equipment, including vehicles, will be properly and appropriately maintained in order to minimise noise generation.	Contractor	Duration of contract

Performance Indicator	» No complaints received concerning noise
Monitoring	<ul style="list-style-type: none"> » A complaints register will be maintained, in which any complaints from the community will be logged. Complaints will be investigated and, if appropriate, acted upon. » An incident reporting system will be used to record non-conformances to the EMP.

6.3 Detailing Method Statements

OBJECTIVE: Ensure all construction activities are undertaken with the appropriate level of environmental awareness to minimise environmental risk

The environmental specifications are required to be underpinned by a series of Method Statements, within which the Contractors and Service Providers are required to outline how any identified environmental risks will practically be mitigated and managed for the duration of the contract, and how specifications within this EMP will be met. That is, the Contractor will be required to describe how specified requirements will be achieved through the submission of written Method Statements to the Site Manager and ECO.

A Method Statement is defined as “a written submission by the Contractor in response to the environmental specification or a request by the Site Manager, setting out the plant, materials, labour and method the Contractor proposes using to conduct an activity, in such detail that the Site Manager is able to assess whether the Contractor's proposal is in accordance with the Specifications and/or will produce results in accordance with the Specifications”. The Method Statement must cover applicable details with regard to:

- » Construction procedures;
- » Materials and equipment to be used;
- » Getting the equipment to and from site;
- » How the equipment/material will be moved while on-site;
- » How and where material will be stored;
- » The containment (or action to be taken if containment is not possible) of leaks or spills of any liquid or material that may occur;
- » Timing and location of activities;
- » Compliance/non-compliance with the Specifications; and
- » Any other information deemed necessary by the Site Manager.

Specific method statements required may include:

- » Site establishment (which explains all activities from induction training to offloading, construction sequence for site establishment and the different amenities and to be established etc. Including a site camp plan indicating all of these).
- » Preparation of the site (i.e. Clearing vegetation, compacting soils and removing existing infrastructure and waste).
- » Soil management/stockpiling and erosion control.
- » Excavations and backfilling procedure.
- » Stipulate norms and standards for water supply and usage (i.e.: comply strictly to licence and legislation requirements and restrictions)
- » Stipulate the storm water management procedures recommended in the storm water management method statement.
- » Ablution facilities (placement, maintenance, management and servicing)
- » Solid Waste Management:
 - * Description of the waste storage facilities (on site and accumulative).
 - * Placement of waste stored (on site and accumulative).
 - * Management and collection of waste process.
 - * Recycle, re-use and removal process and procedure.
- » Liquid waste management:
 - * The design, establish, maintain and operate suitable pollution control facilities necessary to prevent discharge of water containing polluting

- matter or visible suspended materials into rivers, streams or existing drainage systems.
- * Should grey water (i.e. water from basins, showers, baths, kitchen sinks etc.) need to be disposed of, link into an existing facilities where possible. Where no facilities are available, grey water runoff must be controlled to ensure there is no seepage into wetlands or natural watercourses.
- » Dust and noise pollution
 - * Describe necessary measures to ensure that noise from construction activities is maintained within lawfully acceptable levels (construction activities generating output levels of 85 dB(A) near human settlement, are to be confined to working hours (08h00 - 17h00) Mondays to Fridays).
 - * Procedure to control dust at all times on the site, access roads, borrow pits and spoil sites (dust control shall be sufficient so as not to have significant impacts in terms of the biophysical and social environments). These impacts include visual pollution, decreased safety due to reduced visibility, negative effects on human health and the ecology due to dust particle accumulation.
 - » Hazardous substance storage (Ensure compliance with all national, regional and local legislation with regard to the storage of oils, fuels, lubricants, solvents, wood treatments, bitumen, cement, pesticides and any other harmful and hazardous substances and materials. South African National Standards apply).
 - * Lists of all potentially hazardous substances to be used.
 - * Appropriate handling, storage and disposal procedures.
 - * Prevention protocol of accidental contamination of soil at storage and handling areas.
 - * All storage areas, (ie: for harmful substances appropriately bunded with a suitable collection point for accidental spills must be implemented and drip trays underneath dispensing mechanisms including leaking engines/machinery).
 - » Fire prevention and management measures on site.
 - » Fauna and flora protection process on and off site (ie removal to reintroduction or replanting, if necessary).
 - * Rehabilitation and re-vegetation process.
 - » Incident and accident reporting protocol.
 - » General administration
 - » Designate access road and the protocol on while roads are in use.
 - » Requirements on gate control protocols.

The Contractor may not commence the activity covered by the Method Statement until it has been approved by the Site Manager, except in the case of emergency activities and then only with the consent of the Site Manager. Approval of the

Method Statement will not absolve the Contractor from their obligations or responsibilities in terms of their contract.

Failure to submit a method statement may result in suspension of the activity concerned until such time as a method statement has been submitted and approved. The ECO should monitor the construction activities to ensure that these are undertaken in accordance with the approved Method Statement.

6.4 Awareness and Competence: Construction Phase

OBJECTIVE: To ensure all construction personnel have the appropriate level of environmental awareness and competence to ensure continued environmental due diligence and on-going minimisation of environmental harm

To achieve effective environmental management, it is important that Contractors are aware of the responsibilities in terms of the relevant environmental legislation and the contents of this EMP. The Contractor is responsible for informing employees and sub-contractors of their environmental obligations in terms of the environmental specifications, and for ensuring that employees are adequately experienced and properly trained in order to execute the works in a manner that will minimise environmental impacts.

The Contractors obligations in this regard include the following:

- » Employees must have a basic understanding of the key environmental features of the construction site and the surrounding environment.
- » Ensuring that a copy of the EMP is readily available on-site, and that all site staff are aware of the location and have access to the document.
- » Employees will be familiar with the requirements of the EMP and the environmental specifications as they apply to the construction of the power line.
- » Ensuring that, prior to commencing any site works, all employees and sub-contractors have attended an Environmental Awareness Training course.
- » The course should be sufficient to provide the site staff with an appreciation of the project's environmental requirements, and how they are to be implemented.
- » Awareness of any other environmental matters, which are deemed necessary by the ECO.
- » Ensuring that employee information posters, outlining the environmental "do's" and "don'ts" (as per the environmental awareness training course) are erected at prominent locations throughout the site.
- » Ensure that construction workers have received basic training in environmental management, including the storage and handling of hazardous

substances, minimisation of disturbance to sensitive areas, management of waste, and prevention of water pollution.

- » Records must be kept of those that have completed the relevant training.
- » Training should be done either in a written or verbal format but must be appropriate for the receiving audience.
- » Refresher sessions must be held to ensure the contractor staff are aware of their environmental obligations as practically possible, detailed below.

6.4.1 Environmental Awareness Training

Environmental Awareness Training must take the form of an on-site talk and demonstration by the ECO before the commencement of site establishment and construction on site. The education/awareness programme should be aimed at all levels of management and construction workers within the contractor team. A record of attendance of this training must be maintained by the ECO on site.

6.4.2 Induction Training

Environmental induction training must be presented to all persons who are to work on the site – be it for short or long durations; Contractor's or Engineer's staff; administrative or site staff; sub-contractors or visitors to site.

This induction training should include discussing the developer's environmental policy and values, the function of the EMP and Contract Specifications and the importance and reasons for compliance to these. The induction training must highlight overall do's and don'ts on site and clarify the repercussions of not complying with these. The non-conformance reporting system must be explained during the induction as well. Opportunity for questions and clarifications must form part of this training. A record of attendance of this training must be maintained by the SHE Officer on site.

6.4.3 Toolbox Talks

Toolbox talks should be held on a scheduled and regular basis (at least twice a month) where foremen, environmental and safety representatives of different components of the Works and sub-consultants hold talks relating to environmental practices and safety awareness on site. These talks should also include discussions on possible common incidents occurring on site and the prevention of reoccurrence thereof. Records of attendance and the awareness talk subject must be kept on file.

6.5 Monitoring Programme: Construction Phase

OBJECTIVE: To monitor the performance of the control strategies employed against environmental objectives and standards

A monitoring programme must be in place not only to ensure conformance with the EMP, but also to monitor any environmental issues and impacts which have not been accounted for in the EMP that are, or could result in significant environmental impacts for which corrective action is required. The period and frequency of monitoring will be stipulated by the Environmental Authorisation (once issued). The Project Manager will ensure that the monitoring is conducted and reported.

The aim of the monitoring and auditing process would be to monitor the implementation of the specified environmental specifications, in order to:

- » Monitor and audit compliance with the prescriptive and procedural terms of the environmental specifications.
- » Ensure adequate and appropriate interventions to address non-compliance.
- » Ensure adequate and appropriate interventions to address environmental degradation.
- » Provide a mechanism for the lodging and resolution of public complaints.
- » Ensure appropriate and adequate record keeping related to environmental compliance.

An independent Environmental Control Officer (ECO) must be appointed, and must have the appropriate experience and qualifications to undertake the necessary tasks. The ECO will ensure compliance with the environmental authorisation (once issued), EMP, relevant permits and licences and the environmental legislation during construction, and will conduct monitoring activities on a regular basis. The ECO will report any non-compliance or where corrective action is necessary to the Site Manager, DEA and/or any other monitoring body stipulated by the regulating authorities.

The ECO shall remain on site on a full-time basis as long as construction activities dictate. Thereafter provided compliance is maintained, monthly or bi-weekly site compliance inspections would be sufficient, reducing as construction proceeds. However, in the absence of the ECO there should be a designated environmental officer present to deal with any environmental issues that may arise such as fuel or oil spills.

6.5.1. Non-Conformance Reports

All supervisory staff including Foremen, Resident Engineers, and the ECO must be provided the means to be able to submit non-conformance reports to the Site Manager. Non-conformance reports will describe, in detail, the cause, nature and effects of any environmental non-conformance by the Contractor. Records of penalties imposed may be required by the relevant authority within 48 (forty eight) hours.

The non-conformance report will be updated on completion of the corrective measures indicated on the finding sheet. The report must indicate that the remediation measures have been implemented timeously and that the non-conformance can be closed-out to the satisfaction of the Site Manager and ECO.

6.5.2. Monitoring Reports

A monitoring report will be compiled by the ECO on a monthly basis and must be submitted to DEA for their records. This report should include details of the activities undertaken in the reporting period, any non-conformances or incidents recorded, corrective action required, and details of those non-conformances or incidents which have been closed out.

6.5.3. Final Audit Report

A final environmental audit report must be compiled by an independent auditor and be submitted to DEA upon completion of the construction and rehabilitation activities (within 30 days of completion of the construction phase (i.e.: within 30 days of site handover)) and within 30 days of completion of rehabilitation activities. This report must indicate the date of the audit, the name of the auditor and the outcome of the audit in terms of compliance with the environmental authorisation conditions and the requirements of the EMP.

MANAGEMENT PROGRAMME: REHABILITATION

CHAPTER 7

Overall Goal: Undertake the rehabilitation measures in a way that:

- » Ensures rehabilitation of disturbed areas following the execution of the works, such that residual environmental impacts are remediated or curtailed.

7.1. Objectives

In order to meet this goal, the following objective, actions and monitoring requirements are relevant:

OBJECTIVE: Ensure appropriate rehabilitation of disturbed areas such that residual environmental impacts are remediated or curtailed

Areas requiring rehabilitation will include all areas disturbed during the construction phase and that are not required for regular operation and maintenance operations. Rehabilitation should be undertaken in an area as soon as possible after the completion of construction activities within that area.

Project Component/s	<ul style="list-style-type: none"> » Power line. » Access roads.
Potential Impact	<ul style="list-style-type: none"> » Environmental integrity of site undermined resulting in reduced visual aesthetics, erosion and increased runoff, and the requirement for on-going management intervention.
Activity/Risk Source	<ul style="list-style-type: none"> » Temporary construction areas. » Temporary access roads/tracks. » Power line servitudes. » Other disturbed areas/footprints.
Mitigation: Target/Objective	<ul style="list-style-type: none"> » Ensure and encourage site rehabilitation of disturbed areas. » Ensure that the site is appropriately rehabilitated following the execution of the works, such that residual environmental impacts (including erosion) are remediated or curtailed.

Mitigation: Action/Control	Responsibility	Timeframe
All temporary facilities, equipment, and waste materials must be removed from site.	Contractor	Following execution of the works
All temporary fencing and danger tape must be removed once the construction phase has been	Contractor	Following completion of

Mitigation: Action/Control	Responsibility	Timeframe
completed.		construction activities in an area
The area that previously housed the construction equipment camp is to be checked for spills of substances such as oil, paint, etc. and these should be cleaned up.	Contractor	Following completion of construction activities in an area
All hardened surfaces within the construction equipment camp area should be ripped, all imported materials removed, and the area shall be top soiled and re-vegetated.	Contractor	Following completion of construction activities in an area
Temporary roads must be closed and access across these blocked.	Contractor	Following completion of construction activities in an area
Necessary drainage works and anti-erosion measures must be installed, where required, to minimise loss of topsoil and control erosion.	Contractor	Following completion of construction activities in an area
A rehabilitation plan should be drawn up that specifies the rehabilitation process and should be approved by the ECO.	Contractor, Garob Wind Farm (Pty) Ltd and ECO	Pre-construction
Where disturbed areas are not to be used during the construction of the proposed power line, these areas must be rehabilitated/re-vegetated with appropriate natural vegetation and/or local seed mix. Re-use of native/indigenous plant species removed from disturbance areas in the rehabilitation phase to be determined by a botanist, as applicable.	Contractor in consultation with rehabilitation specialist	Following completion of construction activities in an area
Re-vegetated areas may have to be protected from wind erosion and maintained until an acceptable plant cover has been achieved.	Garob Wind Farm (Pty) Ltd in consultation with rehabilitation specialist	Post-rehabilitation
Erosion control measures should be used in sensitive areas such as areas with steep slopes.	Garob Wind Farm (Pty) Ltd in consultation with ECO and	Post-rehabilitation

Mitigation: Action/Control	Responsibility	Timeframe
	rehabilitation specialist (if required)	
On-going alien plant monitoring and removal must be undertaken on all areas of natural vegetation on an annual basis.	Garob Wind Farm (Pty) Ltd	Post-rehabilitation

Performance Indicator	<ul style="list-style-type: none"> » All portions of site, including construction equipment camp and working areas, cleared of equipment and temporary facilities. » Topsoil replaced on all areas and stabilised where practicable or required after construction and temporally utilised areas. » Disturbed areas rehabilitated and acceptable plant cover achieved on rehabilitated sites. » Completed site free of erosion and alien invasive plants.
Monitoring	<ul style="list-style-type: none"> » On-going inspection of rehabilitated areas in order to determine effectiveness of rehabilitation measures implemented. » On-going alien plant monitoring and removal should be undertaken on an annual basis.

MANAGEMENT PROGRAMME: OPERATION

CHAPTER 8

Overall Goal: To ensure that the operation of the power line does not have unforeseen impacts on the environment and to ensure that all impacts are monitored and the necessary corrective action taken in all cases. In order to address this goal, it is necessary to operate the line in a way that:

- » Ensures that operation activities are properly managed in respect of environmental aspects and impacts.
- » Enables the operation activities to be undertaken without significant disruption to other land uses in the area, in particular with regard to farming practices, traffic and road use, and effects on local residents.

An environmental manager must ensure the implementation of the operational EMP.

8.1. Objectives

In order to meet this goal, the following objectives have been identified, together with necessary actions and monitoring requirements.

OBJECTIVE: Management of Power Line Servitude

Indirect impacts on vegetation and fauna during operation could result from maintenance activities and the movement of people and vehicles on site and in the surrounding area. In order to ensure the long-term environmental integrity of the site following construction, maintenance of the areas rehabilitated post-construction must be undertaken until these areas have successfully re-established.

Project component/s	» power line servitude
Potential Impact	» Disturbance to or loss of fauna and/or habitat » Increased erosion
Activity/risk source	» Management of power line servitude area
Mitigation: Target/Objective	» To minimise disturbance of natural vegetation/habitats within the servitude » To minimise erosion

Mitigation: Action/control	Responsibility	Timeframe
Utilise existing access roads as far as possible	Garob Wind Farm (Pty) Ltd	During construction and during operation
In sections that cross natural or semi-natural vegetation or land that has been left fallow for several years, no indigenous vegetation shall be brush-cut.	Garob Wind Farm (Pty) Ltd and contractors	Operation
Clear servitude of alien vegetation and implement an appropriate alien plant management plan.	Garob Wind Farm (Pty) Ltd	Operation
Implement appropriate erosion management measures within the servitude area (refer to Appendix H). The servitude and its access route must be monitored for signs of erosion, and signs of erosion remedied immediately	Garob Wind Farm (Pty) Ltd and contractors	Operation

Performance Indicator	» Limited disturbance to natural vegetation/habitats within the servitude area
Monitoring	» Annual monitoring must be carried out together with monitoring of the remainder of the development to detect and eradicate new infestations of alien plant species before they become well established and may spread » Monitoring of erosion within servitude.

OBJECTIVE: To restrict the impacts of the proposed power line on birds to an absolute minimum.

The proposed power line can be built with acceptable levels of impact on avifauna should the recommendations in this report be followed. Of particular importance are:

- using the correct pole or pylon structure to avoid electrocution of various large bird species, and
- installing and maintaining bird diverters within sensitive areas.

Project Component/s	» Overhead cables, in particular earth wire. » Tower structures
Potential Impact	» Collision of birds with overhead cables » Electrocution of birds
Activities/Risk Sources	» Operation of power line
Mitigation:	» Increase the visibility of the cables in order to reduce the

Target/Objective	number of bird collisions per year. » Utilise bird friendly tower designs to minimise electrocution impact
-------------------------	---

Mitigation: Action/Control	Responsibility	Timeframe
Install and maintain suitable, effective, Eskom approved line marking devices on the earth wire of high collision risk sections of power line. These should be installed according to Eskom standards in this regard.	Contractor	Line marking devices should be installed immediately after stringing of earth wire as it will immediately pose a collision risk.
Ensure bird-friendly tower designs are implemented to minimise the risk of electrocutions	Contractor	Construction
Identify the exact power line spans requiring marking to reduce the potential for collision.	Garob Wind Farm (Pty) Ltd and ornithologist	Construction
Insulate live components at support structures.	Garob Wind Farm (Pty) Ltd	Construction
Line to avoid areas with high bird densities or areas which attract birds.	Garob Wind Farm (Pty) Ltd	Pre-Construction

Performance Indicator	» Since the primary impact of this power line is likely to be collision of birds, the number of recorded bird collisions per year is the most appropriate indicator.
Monitoring	» This power line should be monitored regularly once operation in order to detect any bird collisions that may occur. It is recommended that this line be patrolled as part of the post construction bird monitoring programme for the Garob Wind Energy Facility once it is operational. This is likely to take place at least 4 times per year, and will be done by qualified independent staff.

OBJECTIVE: Minimise soil degradation and erosion

The soil on site may be impacted in terms of:

- » Soil degradation including erosion (by wind and water) and subsequent deposition elsewhere is of a concern across the entire site which is underlain by fine grained soil which can be mobilised when disturbed, even on relatively low slope gradients (accelerated erosion).
- » Uncontrolled run-off relating to construction activity (excessive wetting, uncontrolled discharge, etc.) will also lead to accelerated erosion and possible sedimentation of drainage systems.
- » Degradation of the natural soil profile due to pollution.

Project Component/s	<ul style="list-style-type: none"> » Power line. » Access roads.
Potential Impact	<ul style="list-style-type: none"> » Soil degradation. » Soil erosion. » Increased deposition of soil into drainage systems. » Increased run-off over the site.
Activities/Risk Sources	<ul style="list-style-type: none"> » Poor rehabilitation of cleared areas. » Rainfall - water erosion of disturbed areas. » Wind erosion of disturbed areas. » Concentrated discharge of water from construction activity.
Mitigation: Target/Objective	<ul style="list-style-type: none"> » Ensure rehabilitation of disturbed areas is maintained. » Minimise soil degradation (i.e. wetting). » Minimise soil erosion and deposition of soil into drainage lines. » Ensure continued stability of embankments/excavations.

Mitigation: Action/Control	Responsibility	Timeframe
Rehabilitate disturbance areas should the previous attempt be unsuccessful.	Contractor	Operation
Maintain erosion control measures implemented during the construction phase (i.e. run-off attenuation on slopes (sand bags, logs), silt fences, storm water catch-pits, and shade nets).	Contractor	Operation

Performance Indicator	<ul style="list-style-type: none"> » Acceptable level of soil erosion around site, as determined by the site manager. » Acceptable level of increased siltation in drainage lines, as determined by the site manager.
Monitoring	<ul style="list-style-type: none"> » Inspections of site on a bi-annual basis. » Water management plan

MANAGEMENT PROGRAMME: DECOMMISSIONING

CHAPTER 9

It is most likely that decommissioning activities of the infrastructure would comprise the disassembly and removal of the power line infrastructure from the site.

The relevant mitigation measures contained under the construction and rehabilitation management plan should be applied during decommissioning and therefore is not repeated in this section. It must be noted that decommissioning activities will need to be undertaken in accordance with the legislation applicable at that time, which may require this section of the EMP to be revisited and amended.

9.1. Site Preparation

Site preparation activities will include confirming the integrity of the access to the site to accommodate required equipment, preparation of the site (e.g. lay down areas, construction platform) and the mobilisation of construction equipment.

9.2 Disassemble and Remove Infrastructure

Disassembled components will be reused, recycled, or disposed of in accordance with regulatory requirements.

APPENDIX A: GRIEVANCE MECHANISM FOR PUBLIC COMPLAINTS AND ISSUES

GRIEVANCE MECHANISM / PROCESS

AIM

The aim of the grievance mechanism is to ensure that grievances / concerns raised by local landowners and or communities are addressed in a manner that is:

- Fair and equitable;
- Open and transparent;
- Accountable and efficient.

1 It should be noted that the grievance mechanism does not replace the right of an individual, community, group or organization to take legal action should they so wish. However, the aim should be to address grievances in a manner that does not require a potentially costly and time consuming legal process.

2

Proposed generic grievance process

- Local landowners, communities and authorities will be informed in writing by the proponent (the renewable energy company) of the grievance mechanism and the process by which grievances can be brought to the attention of the proponent.
- A company representative will be appointed as the contact person for grievances to be addressed to. The name and contact details of the contact person will be provided to local landowners, communities and authorities.
- Project related grievances relating to the construction, operational and or decommissioning phase must be addressed in writing to the contact person. The contact person should assist local landowners and or communities who may lack resources to submit/prepare written grievances.
- The grievance will be registered with the contact person who, within 2 working days of receipt of the grievance, will contact the Complainant to discuss the grievance and agree on suitable date and venue for a meeting. Unless otherwise agreed, the meeting will be held within 2 weeks of receipt of the grievance.
- The contact person will draft a letter to be sent to the Complainant acknowledging receipt of the grievance, the name and contact details of Complainant, the nature of the grievance, the date that the grievance was raised, and the date and venue for the meeting.
- Prior to the meeting being held the contact person will contact the Complainant to discuss and agree on who should attend the meeting. The people who will be required to attend the meeting will depend on the nature of the grievance. While the Complainant and or proponent are entitled to invite their legal representatives to attend the meeting/s, it should be made clear

that to all the parties involved in the process that the grievance mechanism process is not a legal process. It is therefore recommended that the involvement of legal representatives be limited.

- The meeting will be chaired by the company representative appointed to address grievances. The proponent will provide a person to take minutes of and record the meeting/s. The costs associated with hiring venues will be covered by the proponent. The proponent will also cover travel costs incurred by the Complainant, specifically in the case of local, resource poor communities.
- Draft copies of the minutes will be made available to the Complainant and the proponent within 4 working days of the meeting being held. Unless otherwise agreed, comments on the Draft Minutes must be forwarded to the company representative appointed to manage the grievance mechanism within 4 working days of receipt of the draft minutes.
- In the event of the grievance being resolved to the satisfaction of all the parties concerned, the outcome will be recorded and signed off by the relevant parties. The record should provide details of the date of the meeting/s, the names of the people that attended the meeting/s, the outcome of the meeting/s, and where relevant, the measures identified to address the grievance, the party responsible for implementing the required measures, and the agreed upon timeframes for the measures to be implemented.
- In the event of a dispute between the Complainant and the proponent regarding the grievance, the option of appointing an independent mediator to assist with resolving the issue should be discussed. The record of the meeting/s will note that a dispute has arisen and that the grievance has not been resolved to the satisfaction of all the parties concerned;
- In the event that the parties agree to appoint a mediator, the proponent will be required to identify three (3) mediators and forward the names and CVs to the Complainant within 2 weeks of the dispute being declared. The Complainant, in consultation with the proponent, will identify the preferred mediator and agree on a date for the next meeting. The cost of the mediator will be borne by the proponent. The proponent will provide a person to take minutes of and record the meeting/s.
- In the event of the grievance, with the assistance of the mediator, being resolved to the satisfaction of all the parties concerned, the outcome will be recorded and signed off by the relevant parties, including the mediator. The record should provide details on the date of the meeting/s, the names of the people that attended the meeting/s, the outcome of the meeting/s, and where relevant, the measures identified to address the grievance, the party responsible for implementing the required measures, and the agreed upon timeframes for the measures to be implemented.
- In the event of the dispute not being resolved, the mediator will prepare a draft report that summarises the nature of the grievance and the dispute. The

report should include a recommendation by the mediator on the proposed way forward with regard to the addressing the grievance.

- The draft report will be made available to the Complainant and the proponent for comment before being finalised and signed by all parties. Unless otherwise agreed, comments on the draft report must be forwarded to the company representative appointed to manage the grievance mechanism within 4 working days.

The way forward will be informed by the recommendations of the mediator and the nature of the grievance. As indicated above, the grievance mechanism does not replace the right of an individual, community, group or organization to take legal action should they so wish. In the event of the grievance not being resolved to the satisfaction of Complainant and or the proponent, either party may be of the opinion that legal action may be the most appropriate option.

**APPENDIX B:
DEPARTMENT OF WATER AFFAIRS: WORKING FOR
WATER PROGRAMME PRINCIPLES FOR INVASIVE
PLANT SPECIES**

METHODS FOR ALIEN SPECIES REMOVAL

The sections below are taken from the Department of water Affairs: Working for Water Programme, whose guidelines and policies on alien plant species removal should be adhered to.

In general the use of herbicide by is strongly discouraged – unless for direct stump applications in areas at least 30 m from any type of wetland. This is due to the potential for herbicide and related compounds to be distributed into the wetland areas and thus damaging indigenous vegetation all along the watercourses and beyond.

Any control programme for alien vegetation must include the following 3 phases:

- Initial control: drastic reduction of existing population
- Follow-up control: control of seedlings, root suckers, and coppice growth
- Maintenance control: sustain low alien plant numbers with annual control

2.1. Mechanical Clearing

2.1.1. ADULT PLANTS AND SAPLINGS

2.1.1.1. Felling

Consider as first option where possible, but see section 3 regarding kill standing – although this is only mandatory in pristine or near-natural environments, kill standing may have to be considered where the tree to be felled on the project area is very large or tilted and by falling it could significantly damage the surrounding habitat or other structures.

Where trees are to be felled and removed, the stem/trunk shall be cut as close to the ground as possible but not higher than 150mm, using chainsaws, bow saws, brush cutters or cane knives. Where felling is to be followed by herbicide treatment the cut shall either be made by means of a saw, so as to produce a clean, flat and generally horizontal surface or in the case of suitably small, thin barked species, the stem shall be cut with a lopper. A slasher or kapmes should preferably not be used because of the diagonal cut that is produced. This minimises the herbicide absorption and the “sharp sticks” are a Health and Safety risk.

In the case of larger trees, they shall, where possible, be felled to fall uphill in order to reduce breakage and minimise the danger to workmen.

Felled material and other dead material (brush and logs) shall not be allowed to block or impede water courses and must be removed from all water courses, either 30 m away from the river or out of the flood line itself.

Felled material (thicker than 7 cm) shall be debranched and cross cut in manageable logs of not longer than 2,4 m or in lengths as directed and then stacked in windrows (brush lines) with the contour or moved to or from identified locations as directed by Project Management.

The logs and brush shall be stacked separately, at least 3 m apart. Windrows shall be with gaps of 2 m every 15 m and be as narrow as possible but not wider than 3 m. Where windrows are impractical heap stacking may be allowed after approval by the Project Manager. Heaps shall be spaced at a minimum distance of 20 m with a maximum ground cover of 16 m² in other words heaps of maximum 4 X 4 m.

Windrows must be a minimum of 10 meters away from any indigenous forest (10 or more closely spaced indigenous trees). On a slope nothing should be packed below the indigenous forest, because burning of the windrows will cause damaged to the indigenous forest by burning up into it.

2.1.1.2. Ring barking

Where ring barking is directed, the Contractor shall remove all bark (including the inner bark or phloem) from ground level to 50 cm up or such lesser distance as may be specified. All bark must be removed to below ground level for good results. Where clean de-barking is not possible due to crevices in the stem or where exposed roots are present, a combination of bark removal and basal stem treatments should be carried out.

Bush knives or hatchets should be used for debarking. Herbicide can be applied to the exposed bark except in the case of Wattle spp. In the case of smaller trees and saplings with soft, thin skinned bark (especially *Acacia* and *Hakea* species.) the stem shall be beaten with the back of a hatchet and the bark peeled off.

2.1.1.3. Frilling

Where frilling is directed, the Contractor shall, at a height of approximately 50 cm, using an axe or bush knife, make angled cuts downward into the cambium layer through the bark in a ring. Ensure to affect the cuts around the entire stem and apply herbicide into the cuts.



The Frilling Method

2.1.1.4. Bark Stripping

Where bark stripping is specified all bark shall be stripped from the trunk between ground level and 1 m above ground level.

2.1.2. SEEDLINGS

2.1.2.1. Manual clearing

Where seedlings are relatively sparse, less than 1 m high and soil suitably soft or where specified in the Project Specification (where seedlings are growing in sensitive areas where chemicals cannot be used due to the risk of contamination or effect on adjacent plant populations or for any other reason), seedlings shall be removed by hand pulling which shall be so carried out as to ensure the removal of the roots. Hand pulled plants shall be left hanging on other vegetation or deposited in a pile to reduce the possibility of re-growth.

Where seedlings are dense or are too well established to be removed by hand and the Project Management has not directed hand pulling or herbicide treatment of the undisturbed plants, the seedlings shall be cut using a lopper or brush cutter (written approval must be obtained) and the stems then treated with herbicide.

It is anticipated that after initial clearing, every year there will be a multitude of seedlings of alien species emerging. Cleared sites will thus have to be constantly monitored, and as soon as a seedling can be identified as alien invasive species, these must be pulled out by hand.

2.2. Chemical Treatment

2.2.1. Foliar spray

(Not recommended due to potential distribution of poison beyond target plants and thus killing of indigenous species)

Where foliar spray has been specified, the spray shall be applied as to the leaves of the whole plant to the point of drip-off. Spraying shall not be done when the leaves are wet or in windy conditions. The herbicide shall under all circumstances be mixed with a suitable colour dye (if the product has no built in dye) and a wetting agent if specified on the herbicide label. Where the same herbicide is used for different methods e.g. foliar and cut-stump, different colour dyes must be used to identify the different herbicide mix ratios.

Spraying shall be done using a back-pack spraying system with a solid cone nozzle which allows for consistent, thorough application of the herbicide (e.g. Spraying systems TG 0,5 (or as indicated in the herbicide policy)).

2.2.2. Cut-stump treatment



Where stumps are to be treated with herbicide the herbicide shall under all circumstances be mixed with a suitable colour dye (if the product has no built in dye) and a wetting agent if specified on the herbicide label, this shall be applied as soon as possible but not later than 15 minutes after felling, stripping or frilling. In the case of felled stumps all sawdust shall first be brushed off the cut surface.

A knapsack or handheld pressurised spray can, with a narrow angle solid cone nozzle or adjustable nozzle set to a solid spray, should be used. The pressure should be as low as possible to avoid the herbicide from bouncing off the sprayed surface and to minimise contamination; attention must be paid to achieving an even coverage only on the outer rim (Cambium area).

2.2.3. Basal bark application

(Only after written approval has been obtained, due to environmental damage caused by diesel)

Where directed and after written approval, herbicide shall be applied directly to the basal bark of trees. The herbicide shall be applied by knapsack sprayer as a coarse, low

pressure spray, using a narrow angle solid cone nozzle, all around the basal stem or trunk of the plant, from the ground up to the height as specified on the herbicide label, as well as to any exposed roots. The area to be treated shall be thoroughly wetted by the herbicide. Attention shall be paid to ensuring adequate application taking note of the condition and age of the bark.

In the case of multi-stemmed plants, each stem shall be treated.

2.3. Kill Standing vs. Felling

This section is to further explain the National Circular 18 of 2002 under the same heading.

As this National Circular contains a policy clause on the operational approach all WfW projects need to align their operations accordingly as a matter of urgency. The policy should be interpreted as follows (National policy in *Italic* font with interpretation in normal font):

All trees must be killed standing (i.e. NOT felled), except when the following applies: (where cut stump operations are underway on a property this will be allowed to be finished if negotiations for the property has already been concluded and written into the landowner's agreement, negotiations on new areas should thus be adapted accordingly as no further cut stump operations will be allowed except as indicated below):

- *Danger to lives & property and the tree must be removed* (it is the responsibility of Project Management to assess this with the assistance of the landowner. These findings must be recorded in writing and should form part of the landowner's agreement. The person collecting the data for contract generation should be informed accordingly)
- *All alien clearing within two tree lengths of roads, buildings, power lines etc* (fences should be added to the possibilities. It is the responsibility of Project Management to assess this with the assistance of the landowner. These findings must be recorded in writing and should form part of the landowner's agreement. The person collecting the data for contract generation should be informed accordingly)
- *Specific requirement of a partnership to fell* (this will be when the Programme and what it stands for will directly benefit from an operation other than frilling e.g. secondary industry operations, if this is not the case then the landowner must contribute to the price difference due to a change in the preferred operational method)
- *Where required to remove trees for specific flood-control measures* (no frilling should take place within the riparian zone that is the 1:20 year flood level or closer than 30 metres from the natural bank of a river. Trees in these areas should be removed.)
- *Where frilling is not a practical method due to tree growth form, treatment efficacy* (It is the responsibility of Project Management to assess this. If these exceptions

influence the workload then the person collecting the data for contract generation should be informed of such exceptions)

- *Where the frilling of trees increases the fire danger in the area* (where such a scenario is suspected Project Management should liaise with the landowner and also get the opinion of a reputable person, these findings should be recorded in writing and added to the landowner's agreement)

In most cases the resistance towards frilling are based on the aesthetics of the area after the operation. The most economical and effective method of eradicating invasive alien vegetation within the Programme's guidelines should remain the prime objective of efforts. It is the obligation and responsibility of people in all spheres of management to maximise the effect and efficiency of any eradication programme.

2.4. Species-specific clearing methods

Various herbicides have been registered for the control of alien invasive species. The first option though should always be felling the species as low as possible, followed by localised stump treatment and the remaining only as last-resort alternatives or where the alien is a vicious multi-stemmed scrambler, such as the bramble.

Chemicals do not only come at a cost, but will require proper storage, management, and handling. For operation details refer to the Working for Water Operational Standards spreadsheet provided separately.

Information for each invasive alien species as encountered on the project area, as well as alien invasive species that are highly likely to become established after initial clearing, is listed below.

OBJECTIVE: Optimise Operational Standards for Clearing of Invasive Alien Plants

The Contractor must take all reasonable measures to ensure the efficient use of manpower, operational equipment and chemicals for the systematic eradication of alien invasives on site.

Project component/s	Project components affecting the objective: <ul style="list-style-type: none"> » solar energy turbines » access roads » substation » power line
Potential Impact	<ul style="list-style-type: none"> » Hazards to landowners, workers and public » Security of materials » Substantially increased damage to adjacent sensitive vegetation and wetland areas
Activities/risk sources	<ul style="list-style-type: none"> » Operation of equipment » Use of herbicides » Use of fire » Distribution of regenerative material of invasive alien plants
Mitigation: Target/Objective	<ul style="list-style-type: none"> » To ensure effective systematic removal of invasive alien plants » To prevent additional spreading of invasive alien plants » To maintain low numbers and eventually eradicate unwanted species from the project area » To prevent any spillage of chemicals into the surrounding environment » To prevent and reverse damage to wetlands/pans caused by invasive alien plants » To protect members of the public/landowners/residents
Timeframe	<ul style="list-style-type: none"> » Training required: training schedule and training opportunities identified and started within three months of commencement of clearing

	<ul style="list-style-type: none"> » Initial control involving planning and drastic reduction of existing population: during site establishment and construction phase » Follow-up control: control of seedlings, root suckers and coppice growth: during construction and operational phase » Maintenance control: sustain low alien plant numbers with annual control: during operational and decommissioning phase
Abbreviations	<ul style="list-style-type: none"> » Working for Water Programme (WfW) » Health and Safety (H&S)
Responsibility	RESPONSIBLE PERSON OR UNIT
	PROJECT MANAGER PM
	CONTRACTOR/COMMUNITY WORKER C
	ENVIRONMENTAL CONTROL OFFICER / COMMUNITY LIASION OFFICER ECO
	TRAINING UNIT TU
	PLANNING UNIT PU

Mitigation: Action/control	Responsibility
1. PROJECT OPERATIONAL PLANNING	
1.1. Creation of detailed map of the area: Provides an overview of the project and it must indicate the following:	
<ul style="list-style-type: none"> • Project boundaries 	PU
<ul style="list-style-type: none"> • Area/s where workers are sourced from 	PM
<ul style="list-style-type: none"> • Other features relevant to project wetlands, invasive thickets, grazing areas, cultivated areas 	PM, PU

Mitigation: Action/control	Responsibility
<ul style="list-style-type: none"> Clearly indicate areas that need to be cleared and divide into different Management Units according to location and most prevalent invasive 	PM, PU
1.2. Strategic plan and safety	
<ul style="list-style-type: none"> Project Management to create an Area Strategic Plan / Method Statement for clearing alien invasive vegetation 	ECO, PM
<ul style="list-style-type: none"> Project Management to be familiar with the Area Strategic Plan 	ECO, PM
<ul style="list-style-type: none"> Evidence of Rules & Regulations given and explained to Contractor or Community Workers (this should include the Operating Standards) 	PM, C
<ul style="list-style-type: none"> Emerging and potential weeds reported through agreed communication lines, ecologist can be consulted for proper identification 	PM
<ul style="list-style-type: none"> A copy of the emergency plan and telephone numbers must be on site, workers must demonstrate knowledge thereof 	PM
1.3. Management Unit Clearing Plan (MUCP)	
<ul style="list-style-type: none"> It must be up to date 	PU, PM
<ul style="list-style-type: none"> A clearing strategy must be evident and supported by the planned priorities 	PU, PM
<ul style="list-style-type: none"> Project Managers must be able to show actual work done vs. planned work, supported by fixed point photographs 	PM

2. TOOLS AND EQUIPMENT	
2.1. Hand tools in good condition and used correctly	
<ul style="list-style-type: none"> • Hand tools(e.g. lopper, pruning saw etc.) must be best suited to the work and the size of plants being cleared 	PM, C
<ul style="list-style-type: none"> • The tools must have correct and properly secured handles and must be in safe working order 	C
<ul style="list-style-type: none"> • A sharpening stone/file, with a hand grip, must be on site 	C
<ul style="list-style-type: none"> • Gloves and goggles must be worn when sharpening tools 	C
<ul style="list-style-type: none"> • The tools must be used in the correct manner; clearing must be done using the correct techniques 	C, PM
<ul style="list-style-type: none"> • Safe working distances of at least two (2) tool-reach lengths apart must be maintained 	C, PM
2.2. Chainsaws good condition and used correctly	
<ul style="list-style-type: none"> • Operators have received certified training in chainsaw operation, felling, cross-cutting and de-branching techniques and have been assessed for competence every six months. For training opportunities contact the regional WfW or otherwise qualified entity 	PM, TU
<ul style="list-style-type: none"> • The chainsaws must be best suited to the clearing work and timber size 	PM, C
<ul style="list-style-type: none"> • There must be a service maintenance schedule for all chainsaws Services (daily, weekly) are done and recorded 	PM, C
<ul style="list-style-type: none"> • Safety and operational features must be in good order as per standard checklist 	PM, C
<ul style="list-style-type: none"> • Chainsaw work is planned and executed for safe and efficient production 	PM, C
<ul style="list-style-type: none"> • Correct felling / clearing techniques are applied 	PM, C
<ul style="list-style-type: none"> • Correct cross-cutting and de-branching techniques are applied. 	PM, C

<ul style="list-style-type: none"> • Correct re-fuelling procedures are followed to prevent spillages 	C
<ul style="list-style-type: none"> • Chain sharpening is correctly done with the correct tools at each refueling 	C
2.3. In-field fuel site	
<ul style="list-style-type: none"> • A cleared area, at least six (6) metres from rest areas, demarcated with hazard tape must be used to store fuel 	C
<ul style="list-style-type: none"> • Fuel and oil containers at the in-field fuel site must be stored on an absorbent drip-mat or drip-tray 	C
<ul style="list-style-type: none"> • A 2 kg dry chemical powder (DCP) fire extinguisher must be at least 3m distant from the fuel site and easily visible 	C
3. STORES, WORKSHOPS AND OFFICES	
3.1. Stores, workshops and offices	
<ul style="list-style-type: none"> • Buildings and containers must be secure and provide safe storage space for equipment and/or supplies 	PM
<ul style="list-style-type: none"> • The office / stores area must show a high standard of housekeeping (A place for everything, everything in its place) 	PM
3.2. Herbicide stores	
<ul style="list-style-type: none"> • The building / container must meet the Herbicide Policy standards 	PM
<ul style="list-style-type: none"> • A Material Safety Data Sheet and Label must be in the store for each stock category of herbicide stored. (Each product.) 	PM
<ul style="list-style-type: none"> • Herbicides must be issued with reference to the WIMS contract number 	PM
<ul style="list-style-type: none"> • There must be stock control of empty containers. 	

<ul style="list-style-type: none"> • Empty containers must be stored until removal by a registered recycling company 	ECO
<ul style="list-style-type: none"> • Excess, undiluted herbicide must be returned to the stores and noted on the stock sheet. Excess, diluted herbicide must be stored in a UV-resistant container and allocated to another treatment within 2 days or returned to a suitable container in the stores 	ECO, C
<ul style="list-style-type: none"> • Burning of empty containers by Project staff or Contractor is prohibited 	PM, C
3.3. Fuel and flammable liquids stores	
<ul style="list-style-type: none"> • The building / container must be suitable for the liquids stored in them 	ECO
<ul style="list-style-type: none"> • Quantities limited to allowed maximum per class where proper storage facilities are not available: <ul style="list-style-type: none"> ○ Class I – 45L (petrol, thinners) ○ Class II – 270L (diesel, lube oils) 	
<ul style="list-style-type: none"> ○ Class I – 45L (petrol, thinners) 	PM
<ul style="list-style-type: none"> ○ Class II – 270L (diesel, lube oils) 	PM
<ul style="list-style-type: none"> • Proper housekeeping and handling procedures must be evident 	PM
<ul style="list-style-type: none"> • Adequate measures to deal with spillage and contamination e.g. spill kit 	PM
<ul style="list-style-type: none"> • Correct signage and fire-fighting equipment e.g. dry chemical powder fire extinguisher of at least 2.25kg 	PM
3.4. Storage at contractor stores / houses: Where contractors cannot make use of proper dedicated stores, the following standards apply:	
<ul style="list-style-type: none"> • All equipment, supplies, herbicides, fuel and oils must be safely and securely stored with controlled access, in a suitable lockable building, container or a lockable trailer 	C
<ul style="list-style-type: none"> • A 1kg dry chemical powder (DCP) fire extinguisher must be available outside the store / container 	C

<ul style="list-style-type: none"> PM to annually verify and keep record of inspection of compliance regarding storing facilities at contractors store / house 	PM
4. HERBICIDES	
4.1. General	
<ul style="list-style-type: none"> Workers must be specifically allocated and trained to work with herbicides and demonstrate knowledge of the risk of working with the selected chemicals and how to avoid that risk 	TU, PM
<ul style="list-style-type: none"> Only registered herbicides as detailed in the WfW herbicide policy or on the product label may be used 	PM
<ul style="list-style-type: none"> A Material Safety Data Sheet (MSDS) and Label must be in the field for each product used 	PM, C
<ul style="list-style-type: none"> Written approval must be obtained via the approved communication channels from the National Office to use an unregistered herbicide for a particular specie or situation 	PM, ECO
<ul style="list-style-type: none"> Mix water must be clean & clear (not muddy) 	C, PM
<ul style="list-style-type: none"> Spray mix adjuvants (e.g. wetters, buffers etc.) must be used according to label instructions 	PM, C
<ul style="list-style-type: none"> In the absence of a built-in colourant a suitable dye must be used in applications 	PM, C
<ul style="list-style-type: none"> Contractors and applicators must demonstrate an understanding of why herbicide applications should not be done in unsuitable weather conditions; e.g. foliar application in windy conditions 	C
<ul style="list-style-type: none"> Quality check records must show that application methods are monitored for targeting, rates and spray drift 	C, PM
<ul style="list-style-type: none"> Where there is a risk of herbicide applicators entering water, knapsacks should be filled only half full 	C, PM
<ul style="list-style-type: none"> PM must submit a Herbicide-used sheet for every completed contract, information must be captured 	PM, PU

<ul style="list-style-type: none"> • Herbicide applicators must demonstrate an understanding of spot spray patterns 	C
<ul style="list-style-type: none"> • For cut-stump / frill / ring-barking, coverage must be even and spraying must be monitored to limit excessive run-off 	C
4.2. Equipment	
<ul style="list-style-type: none"> • Equipment must be properly maintained according to regular scheduled services 	C
<ul style="list-style-type: none"> • Equipment must not leak. Faulty equipment must be serviced or decommissioned 	C
<ul style="list-style-type: none"> • Equipment appropriate to the application method and treatment must be used. 	PM, C
<ul style="list-style-type: none"> • When using knapsack sprayers the following apply: <ul style="list-style-type: none"> ○ Knapsack sprayers must be fitted with pressure regulators set to the correct pressure (1bar / 100Kpa) or fitted with a constant flow valve ○ Knapsack sprayers must be fitted with the correct nozzle in good condition, appropriate for the application method used (e.g. TG1; FL5VS; TFVS2 or equivalent) 	PM, C
<ul style="list-style-type: none"> • Lances must be secured to prevent damage when transporting. 	C
<ul style="list-style-type: none"> • Washing of equipment must take place in a designated area, using the triple-rinse method 	C
4.3. Safe storage and handling in-field	
<ul style="list-style-type: none"> • In a designated, shaded demarcated area <ul style="list-style-type: none"> ○ Away from rest / eating areas ○ At least 20m from any water body ○ Away from crops, gardens etc. 	C
	C
	C
	C

o Floor area covered suitable absorbent material	C
o Bucket & spade must be available in case of spills	C
o Clean water, washing bucket, soap & towel must be available for persons handling the herbicide & equipment	C
• Mixing containers must be UV resistant and leak proof	C
• Mixing containers must be clearly labeled, showing the brand name and concentration of the contents	C
• Refilling, mixing, washing and rinsing should only be done within the demarcated area	C
• Empty product containers must be triple-rinsed and punctured before it is returned to the store	C
• Rinsed water must be recycled for subsequent mixes	C
• Contractors must have proper records of daily herbicide mixtures and issues and actual herbicide use in the contracting teams on-site	C
5. SAFETY	
5.1. Hazard Identification and Risk Assessments (HIRA)	
• The HIRA process to be developed, recorded and available at the project / area and knowledge demonstrated by everyone.	PM,C
• Site Emergency Evacuation Plan must be drafted and communicated to all personnel.	PM,C
• Where relevant, hazards in the working area must be taped off. e.g. trenches, holes, hang-ups etc.	C
• The Written Safe Work Procedures Manual must be available, understood and adhered to by all working staff.	PM, C

5.2. First Aid kit	
<ul style="list-style-type: none"> • A first aid kit, fully stocked according to the standard stock list, must be easily accessible at all work sites, and regularly inspected by the PM. 	PM, C
<ul style="list-style-type: none"> • All first aid treatment and usage of stock must be recorded in the dressing book kept on site / regional office. 	C, PM
<ul style="list-style-type: none"> • The First Aid kit must be under control of a trained First Aider with a current valid certificate 	C, PM
<ul style="list-style-type: none"> • There must be an alternative trained First Aider of opposite gender in the team 	C
<ul style="list-style-type: none"> • A list of emergency numbers must be kept in the first aid box e.g. ambulance, doctor, hospital, fire brigade, poison info centre 	C, PM
<ul style="list-style-type: none"> • A copy of the competency certificate of the first-aider must be kept on-site in the H&S file. 	C, PM
5.3. Personal Protective Equipment and Clothing (PPE)	
<ul style="list-style-type: none"> • PPE must meet the minimum prescribed standards of quality (EU or SABS). 	C, PM
<ul style="list-style-type: none"> • PPE must be replaced when it becomes ineffective through wear & tear. 	C, PM
<ul style="list-style-type: none"> • PPE must be provided with due consideration to the hazard exposure as well as the PPE requirements as per occupation 	C, PM
<ul style="list-style-type: none"> • A record must be kept of all PPE issued to contractors and workers, and signed for by them, with the acknowledgement to wear the PPE. 	PM, C
<ul style="list-style-type: none"> • Project must conform to acceptable H&S Guidelines 	PM, C
5.4. Substance abuse	
<ul style="list-style-type: none"> • The use of any mind altering substances is not allowed on-site (e.g. alcohol, dagga). 	PM, C

<ul style="list-style-type: none"> Persons in the WfW programme must demonstrate knowledge of the potential dangers and the workplace policy of drug use 	ECO, PM, C
5.5. Extreme Weather Conditions	
<ul style="list-style-type: none"> Demonstrate knowledge that no work in / near / on water bodies may take place during rain or lightning. 	PM,C
<ul style="list-style-type: none"> No felling or spray application of herbicides may take place during high wind conditions 	PM,C
<ul style="list-style-type: none"> The contractor should be informed of any adverse weather conditions 	PM
6. METHOD OF WORK	
6.1. Appropriate clearing methods applied	
<ul style="list-style-type: none"> A process of appropriate clearing method selection must be followed and recorded - use the species guide provided 	PM
<ul style="list-style-type: none"> Handling / processing of cleared material must be kept to a minimum, but due to a potential fire hazard and the allelopathic effect of leaf litter, cleared material must not be left on site. A specific area must be designated to stack and process material to make maximum use of wood for community members, whilst regenerative material must be destroyed by controlled burning. 	PM, C
<ul style="list-style-type: none"> A copy of the Treatment Methods table must be available in the Project Office 	PM
<ul style="list-style-type: none"> No frilling / ring barking is allowed within two (2) tree lengths of roads, fences, telephone and power lines, infrastructure (e.g. buildings) or in the riparian zone of a river 	PM
6.2. Follow-up done timeously	
<ul style="list-style-type: none"> An up-to-date follow-up plan must be used to ensure treatment is done on time 	PM

<ul style="list-style-type: none"> • For foliar treatment there must be sufficient newly-growing foliage and plants must not exceed hip height 	PM, C
<ul style="list-style-type: none"> • When follow-up operations are not done at the most cost-efficient stage, there must be specific reasons on record including cost/person day variations between planned and actual follow-up to be recorded 	PM
6.3. Efficient team operation	
<ul style="list-style-type: none"> • Operational planning for the specific site must be evident. Different tasks must be coordinated in an efficient manner for optimum productivity. If possible, every management unit mapped should have its own team allocated. 	PM, C
<ul style="list-style-type: none"> • Tool use and tasks must be in line with the site-specific requirements 	C
<ul style="list-style-type: none"> • Daily or weekly production tasks must be set and actual production must be measured and recorded 	C
6.4. Work methods conform to WfW standards	
<ul style="list-style-type: none"> • Record of inspection of method, quantity and quality according to the contract. 	PM, C
<ul style="list-style-type: none"> • All invasive alien species treated within the contract boundaries 	PM, C
7. ENVIRONMENTAL AWARENESS	
7.1. Site clean and free of litter and waste	
<ul style="list-style-type: none"> • There must be no litter from clearing activities on work sites, at any time and there must be a litter bag on site at the demarcated gathering area, cleared or removed daily and disposed of in an acceptable manner. 	C

<ul style="list-style-type: none"> Existing litter not cleared in light of possible health risks, that may be associated with certain waste, reported to PM and disposal solution with relevant authority found 	PM, C
<ul style="list-style-type: none"> Project Manager and contractors to demonstrate knowledge that soil contaminated with oil must be appropriately treated and disposed of at a permitted landfill site. 	PM, C
<ul style="list-style-type: none"> When loose waste material is transported on vehicles, it must be adequately tied down / covered and contained. 	PM, C
7.2. Sanitation	
<ul style="list-style-type: none"> As far as practically possible, provide formal sanitation (chemical or water-born). Where this is not possible, a spade and toilet paper must be easily accessible on every site. 	C
<ul style="list-style-type: none"> Human waste and used toilet paper must be buried at least 20 m distant from any watercourses or bodies and at least 50 cm deep. 	C
<ul style="list-style-type: none"> In sensitive areas (urban sites, wetlands) a portable toilet must be provided on site and the waste removed and disposed of in an acceptable manner. 	C
<ul style="list-style-type: none"> Clean water and soap must be provided and used for hand washing. 	C
<ul style="list-style-type: none"> The workers should be informed of personal hygiene and demonstrate its practice 	C, PM
<ul style="list-style-type: none"> Where relevant, sufficient toilets per gender need to be available 	C, PM
7.3. Access routes	
<ul style="list-style-type: none"> Existing access routes must be used. Where new access routes or paths are required, these must be planned and made in co-operation with the landowner / manager and marked with hazard tape 	PM, C
7.4. Indigenous plants and animals	
<ul style="list-style-type: none"> Indigenous plants should not be damaged where possible and animals must not be harmed. 	C

<ul style="list-style-type: none"> • Alien trees with bird nests must be killed standing where possible. Site records must be kept. 	PM, C
<ul style="list-style-type: none"> • Collection of plant parts of alien plants for medicinal or other purposes, may only take place with the appropriate permission. Collection records must be kept. 	C
<ul style="list-style-type: none"> • Identify and protect indigenous plants and animals, especially: 	
<ul style="list-style-type: none"> <ul style="list-style-type: none"> ○ Red list data species (none recorded) 	C
<ul style="list-style-type: none"> <ul style="list-style-type: none"> ○ Protected plants (see species of conservation concern) 	C
<ul style="list-style-type: none"> <ul style="list-style-type: none"> ○ Sensitive communities (wetlands only, no other recorded on project area) 	C
<ul style="list-style-type: none"> <ul style="list-style-type: none"> ○ Wetlands 	C
<ul style="list-style-type: none"> • No species of animal may be poached, snared, hunted, captured or willfully harmed, damaged or destroyed. Snares must be reported to land owners, PM or conservation authorities and removed immediately. 	C
<ul style="list-style-type: none"> • Snakes and other reptiles that may be encountered on the treatment area must not be killed. 	C
<ul style="list-style-type: none"> • Anthills and/or termite nests that occur must not be disturbed. 	C
<ul style="list-style-type: none"> • Keep the relevant managers informed of dangerous or problem animals. Record sightings and encounters. 	PM, C
<ul style="list-style-type: none"> • Keep food and rubbish out of reach of scavengers, e.g. apes and birds. 	C
<p>7.5. Invasive alien plant identification (IAP)</p>	
<ul style="list-style-type: none"> • Alien invasive plants including aquatic alien plants must be identified, where required expert assistance must be used. 	PM, C
<ul style="list-style-type: none"> • The relevant species to be removed must be pointed out to contractors and workers on site. 	PM

<ul style="list-style-type: none"> • Damage to indigenous / desirable vegetation must be minimised. 	C
7.6. Alien invasive dispersal	
<ul style="list-style-type: none"> • Where cleared material must be moved from the site, measures must be taken to prevent dispersal of reproductive material (e.g. seeds, cuttings). 	PM, C
<ul style="list-style-type: none"> • Chipped plant material must be free of seed if used off-site (e.g. mulch). 	PM, C
<ul style="list-style-type: none"> • Plants which have been removed must not be transported across or near to rivers or dams in which the species is absent. 	PM, C
<ul style="list-style-type: none"> • Removed plants must not be stacked on top of indigenous flora. 	PM, C
<ul style="list-style-type: none"> • Method and specifications chosen with due consideration of impact on the site, natural vegetation & regeneration. 	PM
<ul style="list-style-type: none"> • Methods used must ensure that weeds are not distributed by the contractor and employees 	PM, C
7.7. Site stabilisation / anti-erosion / rehabilitation measures	
<ul style="list-style-type: none"> • Stack larger cut logs along the contour and below knee height with 2 m gaps at 10 to 15 m intervals for access, escape, animal movement and to reduce run-off and soil movement where there is an enhanced erosion risk along stream banks or steeper slopes 	PM, C
<ul style="list-style-type: none"> • Preserve indigenous plant cover and adapt treatment methods to allow indigenous plants to colonize the site. 	PM, C
<ul style="list-style-type: none"> • Identify sites requiring additional stabilisation structures / measures / re-vegetation and obtain expert advice & planning to implement. 	PM
<ul style="list-style-type: none"> • Take precautionary measures to protect stabilising plants (planted & natural) during follow-up spraying. 	C

7.8. Site stabilisation / anti-erosion / rehabilitation records	
<ul style="list-style-type: none"> Sites must be mapped and a unique Treatment Area number must be assigned. Comprehensive planting / maintenance records must be kept; including dates, species and number of plants and follow-up care. 	PM
<ul style="list-style-type: none"> A record of input costs must be kept, including: materials, plants, seeds, person-days etc. 	PM
8. FIRE FIGHTING AND PROTECTION	
8.1. Fire Precautions on work sites	
<ul style="list-style-type: none"> Smoking allowed in safe indicated areas, designated by the contractor / manager / landowner. 	PM, C
<ul style="list-style-type: none"> No fires are allowed on work sites. 	PM, C
<ul style="list-style-type: none"> Site specific reaction / evacuation rules must be applied in the case of wild fires. 	C
<ul style="list-style-type: none"> Basic appropriate fire-fighting equipment must be available at each work site; a minimum of five fire beaters and one filled knapsack fire-fighting pump, or alternative suitable equipment. 	PM, C
<ul style="list-style-type: none"> Where fuels and machines are used on site, a 2 kg dry chemical powder fire extinguisher in working condition must be available. 	PM, C
<ul style="list-style-type: none"> Fire Fighting & Extinguishing Equipment inspected and recorded. 	PM
8.2. Fire Protection	
<ul style="list-style-type: none"> The project must be a member of the Fire protection Association (FPA) and attend meetings where applicable 	ECO, PM
<ul style="list-style-type: none"> In FPA areas, the project must be on their communication network. 	ECO, PM

<ul style="list-style-type: none"> Fieldwork may not take place during red days or extreme danger rating days. (Contact Working on Fire office) 	ECO, PM
9. TRAINING	
9.1. Induction	
<ul style="list-style-type: none"> All new workers must receive orientation before starting work. 	PM
9.2. Compulsory functional training	
<ul style="list-style-type: none"> All training, including refresher courses, is compulsory. 	TU, PM
<ul style="list-style-type: none"> All training must be provided to workers and contractors within three months of commencement of work 	TU, PM
<ul style="list-style-type: none"> Project Managers must hold a valid training certificate, on file, for all the training courses required in their project. Alternatively, arrangement must be made with the WfW Programme or suitably qualified units to provide such training 	PM
<ul style="list-style-type: none"> Training must be in line with the latest WfW Training Policy 	TU, PM
<ul style="list-style-type: none"> Area / Project Managers must pass an Environmental Pest Control Course and apply for PCO Registration with the National Dept. Agric - Registrar. 	TU
<ul style="list-style-type: none"> Contractors - Limited Pest Control course. 	TU
<ul style="list-style-type: none"> Herbicide Applicators – WfW Herbicide Applicators course. 	TU
<ul style="list-style-type: none"> Other workers – Herbicide Awareness training. 	TU
<ul style="list-style-type: none"> Chain saw operators - chainsaw handling and maintenance, felling, cross-cutting and de-branching techniques. 	TU

<ul style="list-style-type: none"> Copies of all herbicide training certificates received and Pest Control Licenses must be available with the PM and contractor on-site. 	PM, C
9.3. Training Plan & Profiles	
<ul style="list-style-type: none"> The Training Annual Plan of Operations must be displayed. 	PM
<ul style="list-style-type: none"> The plan must be based on the WFW training matrix and policy. 	TU, PM
9.4. Training Records	
<ul style="list-style-type: none"> All training capture sheets, attendance registers, evaluation forms, and certificates must be filed in the Regional Training Manager’s office or Area office. 	TU, PM
<ul style="list-style-type: none"> All Department of Labour monitoring sheets, correspondence, financial records and training schedules must be filed in the Regional Training Manager’s office or Area office. 	TU
9.5. Accreditation	
<ul style="list-style-type: none"> All training must be aligned to unit standards, where possible. 	TU
<ul style="list-style-type: none"> All training must be provided by accredited training providers, where possible. 	TU
Performance Indicator	<ul style="list-style-type: none"> » Project area is consistently cleared of invasive alien vegetation » Remnants of alien vegetation removed from where they were cleared to make way for the proposed development and rehabilitation of natural vegetation surrounding the development » No indication of further degradation and/or pollution of the areas surrounding the development » No members of staff/ public/ landowners injured
Monitoring	<ul style="list-style-type: none"> » Regular visual inspection of cleared areas for signs of resprouting, alien plant seedling emergence, new alien species invasions » An incident reporting system will be used to record non-conformances to the EMP.

- » Public complaints register must be developed and maintained on site.
- » ECO to monitor all construction areas on a continuous basis until all construction is completed; immediate report backs to site manager.
- » ECO to address any infringements with responsible contractors as soon as these are recorded.

APPENDIX C: EROSION MANAGEMENT PLAN

PRINCIPLES FOR EROSION MANAGEMENT

1. Purpose

An Erosion Management Plan addresses the management and mitigation of significant impacts relating to soil erosion. The objective of the plan is to provide:

- » A general framework for erosion management, which enables the contractor to identify areas where erosion can be accelerated from their action.
- » An outline of general methods to monitor, manage and rehabilitate erosion in ensuring that all erosion caused by this development is addresses.

2. Legislation and Standards

Soil conservation pertaining to erosion has been a topic within legislation form the 1930's till today in South Africa. Internationally, standards have been set by the International Finance Corporation and the World Bank to address soil erosion in construction and decommissioning of areas. Therefore this document will ensure that the developer meets the South African legislative requirements and the IFC standards with regards to monitoring, managing and rehabilitating soil erosion on the Cookhouse wind energy facility site.

Relevant legislation:

- » Conservation of Agricultural Resources Act No 43 of 1983
- » Environmental Conservation Act No 73 of 1989
- » National Forestry Act No 84 of 1998
- » National Environmental Management Act No 107 of 1998
- » The Department of Water Affairs and Forestry, February 2005. Environmental Best Practice Specifications: Construction Integrated Environmental Management Sub-Series No. IEMS 1.6. Third Edition. Pretoria.

3. Areas with a high soil erodability potential

The following areas are generally associated with high soil erodibility potential:

- » Any areas without vegetation cover
- » Excavated areas
- » Steep areas
- » Areas where the soil has been degraded already
- » Dispersive, duplexed soil areas
- » Areas with fine grained soil material with a low porosity
- » Areas which undergo overland flow of water.
- » Areas close to water
- » Irrigated areas

- » Compacted areas
- » Rivers
- » Drainage lines
- » And any areas where developments cause water flow to accelerate on a soil surface.
- » Coarsely gravelly covered surfaces

4. Precautionary management activities to avoid erosion

In the assessment process the ECO and the contractor must assess all:

- » Infrastructure and equipment placements and function to ensure that the infrastructure or equipment is not causing accelerating soil erosion on the site.
- » Construction activities to ensure that no erosion indicators are forming as a result of the construction activities.

5. Monitoring

7.1. General Erosion

The ECO must assess the site for erosion indicators in the monitoring process, which include:

- » Bare soil
- » Desiccation cracks
- » Terracettes
- » Sheet erosion
- » Rill erosion (small erosion features with the same properties and characteristics as gullies)
- » Hammocking (Soil build-up)
- » Pedestalling (Exposing plant roots)
- » Erosion pavements
- » Gullies
- » Evidence of Dispersive soils

In the assessment process, the ECO and the contractor must assess all:

- » Infrastructure and equipment placements and function to ensure that the infrastructure or equipment is not causing accelerated soil erosion on the site.
- » Construction activities to ensure that no erosion indicators are forming as a result of the construction activities.

If any activities or placement of equipment cause pooling on the site, degrade the vegetation, result in removal of the surface or subsurface soil horizons, create compacted surfaces with steep gradients, or minimise runoff areas, the erosion potential on the site will increase.

If any erosion features are begin forming or are present as a result of the activities mentioned above the ECO must:

- » Assess the situation.
- » Take photographs of the soil degradation.
- » Determine the cause of the soil erosion.
- » Inform and show the relevant contractors the soil degradation.
- » Inform the contractor that rehabilitation must take place and that the contractor is to implement a rehabilitation method statement and management plan.
- » Monitor that the contractor is taking action to stop the erosion and assist them where needed.
- » Report and monitor the progress of the rehabilitation weekly and recorded all the findings in a site diary.
- » All actions with regards to the incidents must be reported on a monthly compliance report which will be submitted to the department.

The contractor/ developer (with the ECO's consultation) must:

- » Select a system to treat the erosion
- » Design the treatment system
- » Implement the system
- » Monitor the area to see if the system functions like it should, if the system fails, the method must be adapt or adjust to ensure the accelerated erosion is controlled.
- » Monitoring must continue until the area has been stabilised

7.2. Stormwater Management

The ECO is responsible to monitor the site and the activities to ensure that no unnatural soil degradation is taking place.

The ECO must assess the site for erosion indicators such as:

- » Bare soil
- » Exposed plant roots, pedestalling
- » Sheet erosion
- » Rill erosion
- » Hammocking
- » Erosion pavements
- » Terracettes
- » Gullies

In the assessment process the ECO and the contractor must assess all:

- » Disturbed watercourse areas by the development: roads, bridges, river crossings, cabling, permanent laydown areas, crane pads and any other remaining hard surfaces.
- » Construction activity limited to specified areas. Stockpiles of aggregate and material will be positioned at least 50m away from drainage lines and wetlands.

If any erosion features are present as a result of the activities mentioned above the ECO must:

- » Assess the situation
- » Take photographs of the soil degradation.
- » Determine the cause of the erosion.
- » Inform and show the relevant contractors the soil degradation.
- » Inform the contractor that rehabilitation must take place and that the contractor is to implement a rehabilitation method statement and management plan.
- » Monitor that the contractor is taking action to stop the erosion and assist them where needed.
- » Monitor the rehabilitation weekly and record the findings in a site diary.
- » All actions with regards to the incidents must be reported on in the monthly compliance monitoring report.

The contractor/ developer must (with the ECO's consultation):

- » Select a system to treat the erosion
- » Design the treatment system
- » Implement the system
- » Monitor the area to ensure that the erosion has been addressed adequately.
- » Monitor the erosion until the area has been stabilised.

6. Rehabilitation

The following erosion control measures and rehabilitation specifications must be implemented to ensure that good environmental practice is conducted and environmental compliance is achieved.

6.1. General Erosion Management

In this section the equipment needed to remediate erosion, the precautionary measures which must be taken to avoid erosion and mitigation requirements for already degraded areas.

6.1.1. Equipment

The civil works contractor may use the following instruments to combat erosion when necessary:

- » Reno mattresses
- » Slope attenuation
- » Hessian material
- » Shade catch nets
- » Gabion baskets
- » Mulching Run-off control (increase the amounts of runoff areas to disperse the water)
- » Silt fences
- » Storm water channels and catch pits
- » Shade / catch nets
- » Soil bindings
- » Geofabrics
- » Hydroseeding and/or re-vegetating
- » Mulching over cleared areas
- » Stone packing
- » Tilling (roughing the surface)

6.1.2. Methods to prevent accelerated erosion

The following practises should be considered and adhered to:

- » Ensure steep slopes are stabilised.
- » Ensure that steep slopes are not stripped of vegetation and left to dry out and become water repellent (which will cause increased runoff and a decreased infiltration rate) increasing the erosion potential.
- » Ensure that all water on site (rain water or water wastage from the construction process) does not result in any surface flow (increase velocity and capacity of water) as a result of the poor drainage systems.
- » Ensure that pooling of water on site is avoided, as the site and the general area consists of dispersive soils, pooling will cause an increase of infiltration on one area, causing the subsurface to begin eroding.
- » Ensure that heavy machinery does not compact those areas which are not intended to be compacted (i.e. areas intended to be managed), as this will result in compacted hydrophobic, water repellent soils which increase the erosion potential of the area. where compaction does occur, the areas should be ripped.
- » Ensure that compacted areas have adequate drainage systems to avoid pooling and surface flow.
- » Prevent the concentration or flow of surface water or stormwater down cut or fill slopes, or along pipeline routes or roads, and ensure measures to prevent erosion are in place prior to construction.
- » Ensure that stormwater and any runoff generated by hard surfaces should be discharged into retention swales or areas with rock rip-rap. These areas should be grassed with indigenous vegetation. These energy dissipation structures should be placed in a manner that surface flows are managed prior to being discharged back into a natural watercourse to support the maintenance of natural

base flows within the ecological systems and prevent erosion, i.e. hydrological regime (water quantity and quality) is maintained.

- » Ensure siltation and sedimentation through the use of the erosion equipment mentioned structures.
- » Ensure that all stormwater control features have soft engineered areas that attenuate flows, allowing for water to percolate into the local ground watertable in low quantities (to reduce runoff but prevent subsurface erosion).
- » Minimise and restrict site clearing to areas required for construction purposes only and restrict disturbance to adjacent undisturbed natural vegetation.
- » Ensure that vegetation clearing is conducted in parallel with the construction progress across the site to minimise erosion and/or run-off.
- » Ensure that large tracts of bare soil which would cause dust pollution in high winds, or have high erosion susceptibility and increase sedimentation in the lower portions of the catchment are controlled through temporary surface covering.
- » Ensure no diversion of water flows in catchment occurs.
- » Ensure that dust control measures are implemented, but prevent over-wetting/saturating the area (to cause pooling) and run-off (that may cause erosion and sedimentation).
- » Watercourse (stream) crossings should not trap any run-off, thereby creating inundated areas, but allow for free flowing watercourses.

6.1.3. Mitigation for previously degraded areas

Previously degraded areas could pose a threat to construction activities in the area and must therefore be stabilised, then remediated and rehabilitated through:

- » Protecting, stabilise and isolate the degraded areas to ensure no further damage is caused by erosion due to construction activities.
- » Increase the drainage in the area but avoid pooling.
- » Prevent increasing sedimentation in areas that have been choked by soils from degraded areas.
- » Once construction has been completed, a method statement must be drafted for the rehabilitation of the previously degraded areas, using equipment mentioned above and implemented.
- » Stabilisation of steep slopes must be undertaken.
- » Ensure that bare soil is covered and hydro seeded to reduce topsoil loss.

6.2. Methodologies

The following erosion control measures and rehabilitation specifications may be required to be implemented to ensure that good environmental practice is conducted and environmental compliance is achieved.

- » Topsoil covered with a geotextile or hessian material and a grass seed mixture (see Rehabilitation Specifications).

- » Logging or stepping following the contours of the slope, to reduce surface runoff.
- » Earth or rock-pack cut-off berms.
- » Packed branches to roughen the surface and promote infiltration.
- » Benches (sand bags).
- » Stabilisation of near vertical slopes (1:1 – 1:2), if created during construction, will be required to utilise hard structures that have a natural look. The following methods may be considered:
 - Gabions (preferred method with geotextile material).
 - Retaining walls.
 - Stone pitching.
- » The slopes of all stream diversions must be protected. The following methods may be considered:
 - Reno mattresses (preferred method), ensure that the reno mattresses are buried deep into the subsurface, to avoid undercutting from the water.
 - Coarse rock (undersize rip-rap)
 - Sandbags.
 - Stone packing with geotextile
- » Where feasible use rubber dams as stream diversions when establishing water course crossings. Although (and considering that these are non-perennial watercourses) the recommendation is to construct watercourse crossings during dry periods (or no flow periods), where possible.
- » Any concentration of natural water flow caused by road works or hardstands areas will be treated as follows:
 - if water flow is sub-critical, nothing is required
 - if water flow is supercritical, the outlets will be provided with protection (either gabions or stone pitching – depending on the flows) to release water subcritical back into the watercourse at a low velocity.

6.3. Engineering Specifications

A detailed Stormwater Management Plan describing and illustrating the proposed stormwater control measures must be prepared by the Civil Engineers and this includes erosion control.

Requirements for project design:

- » Erosion control measures to be implemented before and during the construction period, including the final stormwater control measures (post construction).
- » The location, area/extent (m²/ha) and specifications of all temporary and permanent water management structures or stabilisation methods.
- » A resident Engineer to be responsible for ensuring implementation of the erosion control measures on site during the construction period.
- » The Developer holds ultimate responsibility for remedial action in the event that the approved stormwater plan is not correctly or appropriately implemented and damage to the environment is caused.

- » Concrete lined drains placed adjacent to road to transfer the water to the existing water courses.
- » Frequent gravel drains hydroseeded placed on permanent roadway edges.
- » At the point where stormwater is discharged, energy dissipaters to be constructed to reduce the flow rate of run-off.
- » All cut and fill banks will be seeded with an approved seed mix (as per the rehabilitation specifications) to ensure bank stabilisation and the elimination of potential erosion. Reno mattresses may be used to ensure that the area remains stable.

6.4. Rehabilitation Specifications

- » Employ a Horticultural Landscape Contractor to fulfil the rehabilitation of disturbed areas post-construction.
- » A detailed Rehabilitation Plan describing and illustrating the proposed rehabilitation activities on site must be prepared i.e. areas of top soiling, seeding and replanting of vegetation; species mix; requirements for fertilisation; seed sowing rates; watering etc. (i.e. bill of quantities).
- » The following document should be consulted for further support with respect to information regarding rehabilitation, namely: The Department of Water Affairs and Forestry, February 2005. Environmental Best Practice Specifications: Construction Integrated Environmental Management Sub-Series No. IEMS 1.6. Third Edition. Pretoria.
- » These specifications may be modified by the Horticultural Landscape Contractor on consideration of site conditions.

6.5. Post- and during construction rehabilitation activities

- » Correct and appropriate stockpile management of topsoil will be required during the construction phase.
- » Rehabilitation of disturbed areas will be implemented as these areas become available for rehabilitation.
- » Disturbed areas will include, for example: construction camp site, areas where underground cabling has been layed/buried, roadsides of new access roads.

7. Rehabilitation steps to mitigate the eroded area

- » Stockpiled topsoil must be spread over disturbed areas (150 – 200mm thick) just prior to planting/seeding.
- » Rip and scarify along the contours of the newly spread topsoil prior to watering and seeding.
- » Organic fertilizers or compost shall be used if site conditions require it and can be applied as part of hydro-seeding applications.
- » Seed should be sown into weed-free topsoil that has been stockpiled (i.e. original topsoil from the site).

- » Indigenous plants (e.g. grass species such as *Cynodon dactylon*, *Eragrostis curvula*) shall be used to rehabilitate disturbed areas.
- » Applying the seed through hydromulching (hydro-seeding) is advantageous (or organic mulching after seeding).
- » Watering is essential and rehabilitation should ideally occur during the wet season.
- » The topsoil in the area is vulnerable to erosion therefore the hydro-seeded surfaces must be covered with a shade cloth material or natural fibre (hessian material) to reduce the loss of soil while the plants establish.

7.1. 'Watering' to avoid erosion

- » Movement of livestock in newly rehabilitated areas must be restricted, where possible, while taking into consideration drinking areas/paths.
- » Watering the rehabilitated areas should be undertaken in the wet/rainy season essential but if this is not possible, an initial watering period (supplemental irrigation) will be required to ensure plant establishment (germination and established growth).
- » Generous watering during the first two weeks, or until the seeds have germinated, is required (unless adequate rainfall occurs) i.e. seed beds will need to be kept moist for germination to occur.
- » For grass to establish (once germination has occurred), rainfall or irrigation is needed at regular intervals, ideally every few days and possibly every day if weather conditions require it.
- » During dry periods, with no rainfall, 100 litres per m² (or 100mm of rain) over a month or more, may be necessary to establish plants capable of surviving dry weather (or otherwise specified by the Horticultural Landscape Contractor).

7.2. Seeding

The developer should make use of an appropriate mix of grass species for rehabilitation to be determined in consultation with a suitably qualified ecologist) and they must be mixed for sowing either in summer or in winter. Grass species application (Rutherford, 2006) is at the rate specified as kg/ha.

7.3. Steep slopes

- » Areas that have a steep gradient and require seeding for rehabilitation purposes should be adequately protected against potential run-off erosion e.g. with coir geotextile netting or other appropriate methodology.
- » Provision for wind should also be made on these slopes to ensure the fine grained soil is not removed.

7.4. Maintenance and duration

- » Rehabilitation will occur during construction, as areas for plant rehabilitation become available.
- » The rehabilitation period post construction is estimated to be over a period of 6 (minimum) to 12 months (maximum), or a time period specified by the Horticultural Landscape Contractor, particularly if planting of trees and shrubs occurs.
- » The rehabilitation phase (including post seeding maintenance) should be at least 6 months (depending on time of seeding and rainfall) to ensure establishment of plants with a minimum 80% cover achieved (excluding alien plant species).
- » If the plants have not established and the 80% is not achieved within the specified maintenance period, maintenance of these areas shall continue until at least 80% cover is achieved (excluding alien plant species).
- » Additional seeding may be necessary to achieve 80% cover.
- » Any plants that die during the maintenance period must be replaced.
- » Succession of natural plant species should be encouraged.

8. Conclusion

The Erosion Management Plan is a document to assist the contractor, the Developer and the ECO with guidelines on how to manage erosion. The implementation of management measures is not only good practice to ensure minimisation of degradation, but also necessary to ensure comply with legislative requirements. This document forms part of the EMP, and is required to be considered and adhered to during the design, construction, operation and decommissioning phases of the project.

9. References


- Department of Environmental Affairs. (1983). *Conservation of Agricultural Resources Act 43 of 1983*. Pretoria: Department of Environmental Affairs.
- Coetzee, K. (2005). *Caring for Natural Rangelands*. Scottsville: University of KwaZulu-Natal Press.
- Commission, F. R. (2009, March 10). *Forestry Commission*. Retrieved August Tuesday, 2012, from Forestry Commission: Forest Research : www.forestry.gov.uk
- Tongway, D. J., & Ludwig, J. A. (2004). *Heterogeneity in arid and semi arid lands*. Queensland: Sustainable Ecosystems.
- van der Linde, M., & Feris, L. (2010). *Compendium of South African Legislation*. Pretoria: Pretoria University Press.

**APPENDIX D:
GUIDELINES FOR INTEGRATED MANAGEMENT OF
CONSTRUCTION WASTE**

GUIDELINE FOR INTEGRATED MANAGEMENT OF CONSTRUCTION WASTE

Waste is broadly defined by the Department of Water Affairs in 1994 as: 'an undesirable or superfluous by-product, emission, residue or remainder of any process or activity'. An integrated approach to waste management on site is needed. Such an approach is illustrated in the figure below.

The Integrated Waste Management Approach to Waste

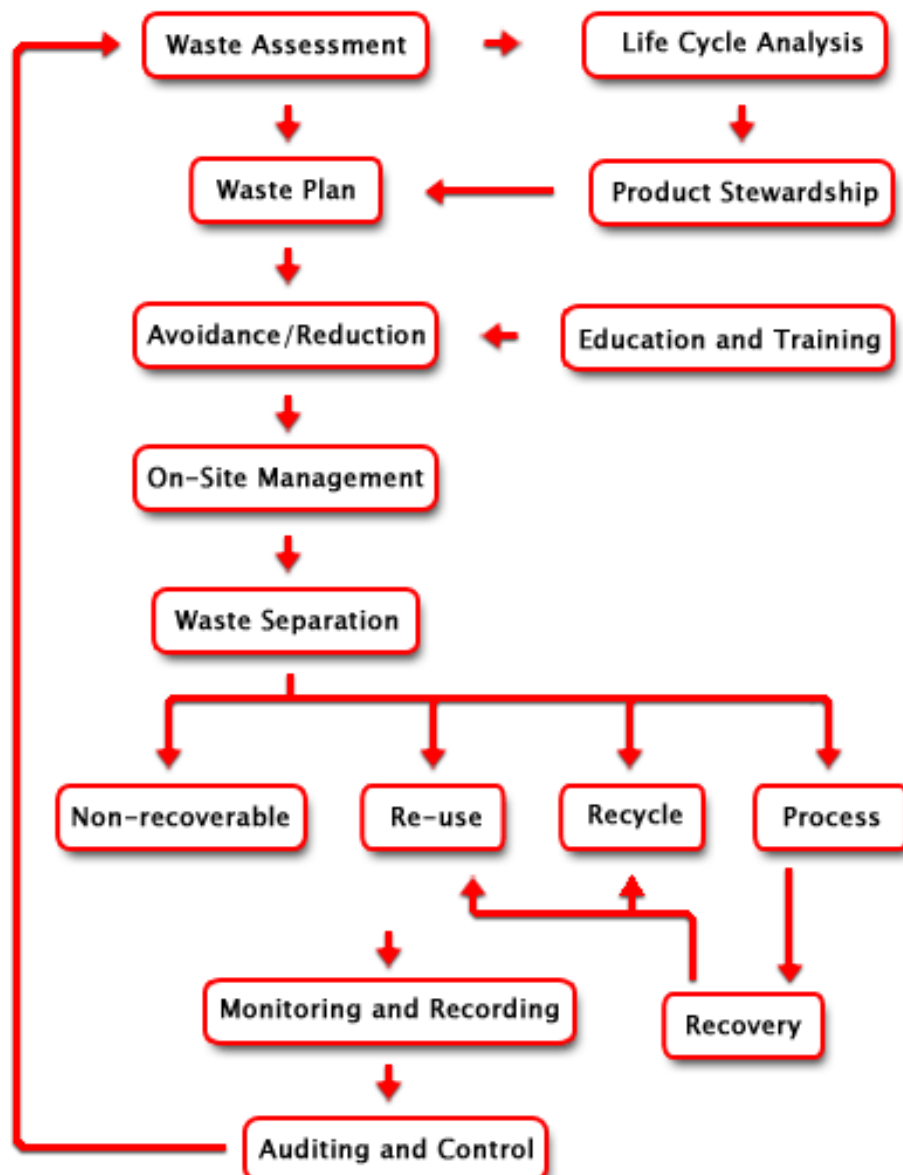

Source: <http://www.enviroserv.co.za/pages/content.asp?SectionId=496>

1. Waste Assessment

A detailed waste assessment is necessary to understand the waste types and volumes being produced. In order to achieve this, construction practices must be measured and analysed.

2. Waste Plan

A waste plan must be developed to provide appropriate solutions for managing the entire waste stream on site. The objective of the plan should be to reduce the volumes of waste to disposal and thereby to reduce the cost of management of the waste stream without compromising environmental standards. The plan should include recovery, re-use and recycle recommendations.

Construction Waste Management is the practice of reducing the actual waste that goes to the landfill site. Waste reduction is best met by recycling, and construction wastes offer several opportunities in this regard. In fact, 80% of the wastes found in construction waste piles are recyclable in some form or another. Wood, concrete, bricks, metals, glass and even paint offer several options for recycling.

There are three basic steps for construction waste management, i.e. Reduce, Reuse, and Recycle. **Reduce** is the prevention of the waste from arising and optimising material usage. Waste avoidance and waste reduction can be achieved through improved education and training - by improving efficiencies and by making staff environmentally aware.

Reuse is using existing materials instead of throwing these away. Reusing does not mean that it needs to be reused on the same construction site. Selling or donating waste materials to a third party is one option of construction waste management.

Recycle is somewhat limited since it only allows for those items that can be used on-site. The most important step for recycling of construction waste is on-site separation. Initially, this will take additional effort and training of construction personnel. Targets should be set for the levels of recycling. Once separation habits are established, on-site separation can be done at little or no additional cost.

3. What to Recycle

Before recycling construction waste, identify who will accept it. This is important in designating type of waste to separate, and in making arrangements for drop-off or delivery of materials. Materials that can be recycled include:

- » Cardboard and Paper
- » Wood

- » Metals
- » Plastics
- » Glass
- » Paints, Stains, Solvents and Sealants
- » Oil

4. Materials Separation

Successful recycling requires good clean uniform collections of single waste types. This is most effectively achieved by separating the waste streams close to source rather than at the landfill site. Containers for material recycling must be set up on site and clearly labelled. Construction personnel must be trained in material sorting policy, and bins must be monitored periodically to prevent waste mixing as a result of construction employees throwing rubbish into the bins.

Some materials will require bins or storage that protect these from rain. Other bins may be locked to prevent tampering.

5. Recycling and Waste Minimisation Guidelines

- » *Wood*
 - * Optimise building dimensions to correspond to standard wood dimensions in order to reduce the need for cutting.
 - * Store wood on level blocking under cover to minimize warping, twisting and waste.
- » *Metals*
 - * During construction, separate metals for recycling, including copper piping, wire, aluminium, iron and steel, nails and fasteners, galvanized roofing. It is critical to keep lead out of landfills because it could leach into groundwater.
- » *Cardboard and Paper*
 - * Avoid excessively packaged materials and supplies. However, be sure packaging is adequate to prevent damage and waste.
 - * As far as possible, use recyclable packaging.
 - * Separate cardboard waste, bundle, and store in a dry place.
 - * Minimise the number of blueprints and reproductions necessary during the design and construction process.
- » *Plastic*
 - * Avoid excessively packaged materials and supplies. However, be sure packaging is adequate to prevent damage and waste.
 - * As far as possible, use recyclable packaging.

Since more than 60 different types of plastic resins exist, the Plastics Federation of South Africa has adopted a voluntary number coding system for each category of plastics to aid in their sorting by material type for recycling (Bruyns et al, 2002). The most common resin types are itemised in Table 1.

Table 1: Identification System for Plastic

Id Number	Plastic Resin Type
1	PET (polyethylene terephthalate)
2	HDPE (high-density polyethylene)
3	PVC (polyvinyl chloride) or V (vinyl)
4	LDPE (low-density polyethylene)
5	PP (polypropylene)
6	PS (polystyrene)
7	Other (laminates, etc.)

» *Paints, Stains, Solvents and Sealants*

* Unused materials should be taken to a hazardous waste collection facility.

6. On-site Management

Good supervision of the waste management programme on site is critical to success. Management of the entire on-site program is critical to ensure smooth operations.

7. Auditing and Control

The success of the waste plan is determined by measuring criteria such as waste volumes, cost recovery from recycling, cost of disposal. Recorded data can indicate the effect of training and education, or the need for education. It will provide trends and benchmarks for setting goals and standards. It will provide clear evidence of the success or otherwise of the plan. Finally, good record keeping and control, becomes a continuous waste assessment process, allowing the waste plan to be improved and adjusted as required.

8. Useful contacts:

<http://www.transpaco.co.za/page5.htm>

Transpaco, a manufacturing and distribution company operating extensively in the plastics and packaging industries, conducts plastic reclamation and recycling.

<http://www.jclenterprises.co.za/>

JCL Enterprises for plastic sales of quality recycled plastic materials as well as the recycling of plastic.

<http://www.rosefoundation.org.za/>

The Rose Foundation specialises in the collection and recycling of used motor (engine) oil.

Information Sources:

<http://www.greenbuilder.com/sourcebook/ConstructionWaste.html#Guidelines>

<http://www.enviroserv.co.za/pages/Content.asp?SectionID=587>

<http://www.enviroserv.co.za/pages/content.asp?SectionId=496>

Programme for the Implementation of the National Waste Management Strategy. DEAT, May 2000

Residential Construction Waste Management Demonstration and Evaluation. Prepared for U.S. Environmental Protection Agency by NAHB Research Center, May 2, 1995

APPENDIX E: SPECIFICATIONS FOR EARTHWORKS (ENVIRONMENTAL MEASURES)

METHODS FOR PLANT RESCUE AND HABITAT REHABILITATION

List of Abbreviations

CARA:	Conservation of Agricultural Resources Act 43 of 1983
DEA:	Department of Environmental Affairs
EA:	Environmental Authorisation
ECO:	Environmental Control Officer
EMP:	Environmental Management Plan
NEMA:	National Environmental Management Act 107 of 1998
LFA:	Landscape Functional Analysis (Tongway and Hindley 2004)
IAP:	Invasive Alien Plant

List of Definitions:

Accelerated soil erosion: Soil erosion induced by human activities.

Acceptable cover: An acceptable cover shall mean that not less than 75% (in an area with rainfall above 400 mm per annum), or 40% (in regions receiving less than 400 mm rain per annum), of the area planted or hydroseeded shall be covered with grass and that there shall be no bare patches of more than 500 mm in maximum dimension.

Alien: originating from another country or continent and originally different environment, commonly used to describe plants that are not indigenous to South Africa and have become problematic (spreading rapidly, threatening existing biodiversity).

Allelopathic components: one or more biochemical compound produced by a plant and released through leaf litter or roots that suppresses the growth, survival, and reproduction of other surrounding vegetation.

Bare soil: Un-vegetated soil surface, unaltered by humans.

Compacted soil surface: A soil surface that has been hardened by an outside source, causing the soil to be more compacted than the surrounding area.

Container plants: Container plants include all vegetation which are bought or supplied in acceptable containers from nurseries or vegetation lifted out of their natural position and placed in containers.

Desirable end state: the future condition or target on which the rehabilitation is designed and that will serve later as a basis for rehabilitation success evaluation. This can be based on a reference site or modelled according to available information on historic vegetation.

Ecological rehabilitation: The process of assisting the recovery of a degraded or damaged ecosystem in a trajectory that renders the ecosystem fully functional, stable, and able to develop further, but not necessarily returning to the original historic state.

Ecological restoration: The process of assisting the recovery of an ecosystem that has been degraded damaged or destroyed, in a trajectory that ultimately returns the ecosystem to its natural successional stage.

Ecosystem: The combination of biota within a given area, together with a suitable environment that sustains the biota and the interactions between biota. It can have a spatial unit of any size, but shows some degree homogeneity as far as structure, function and species composition is concerned. Small-scale ecosystems typically link up to larger scale ecosystems and all contribute to the ecosystem function and services at the landscape-scale.

Environmental Management Plan: an environmental management tool used to ensure that undue or reasonably avoidable adverse impacts of the construction and operation, and decommissioning of a project are prevented; and that the positive benefits of the projects are enhanced.

Establishment of grass: All procedures necessary to produce an acceptable cover of grass on an area.

Establishment Period: The Establishment Period is defined as the period beginning from the actual planting or placing of vegetation until three months thereafter, unless otherwise specified or unless grass cover is unacceptable or unless plants have not taken.

Extinction debt: is a concept that describes the future extinction of species due to events in the past. Extinction debt occurs because of time delays between impacts on a species, such as destruction of habitat or reduction of population size, and the species' ultimate disappearance.

Geophytic: resprouting during the growing season from an underground storage organ such as bulbs, corms, tubers or rhizomes, and dying back completely during unfavourable seasons.

Hydroseeding: To apply seed in a slurry with water (plus other materials to enhance growth) by means of a spraying device.

Indigenous: refers to a plant or animal that occurs naturally in the place in which it is currently found.

Invasive plant: a kind of plant which has under section 2 (3) of CARA been declared an invader plant, and includes the seed of such plant and any vegetative part of such plant which reproduces itself asexually.

Landscape: Consists of a mosaic of two or more ecosystems that exchange organisms, energy, water, and nutrients.

Nursery conditions: These are the necessary conditions to maintain healthy growth of rescued and/or container plants. This includes protection of such plants against wind, frost, direct sunlight, pests, rodents, diseases, and drought. It also includes the provision of suitable water, fertilizer and any other measures required to maintain the container plants.

Period of Maintaining: The Period of Maintaining is defined as the period following directly after the Establishment Period until the end of the Period

of Maintenance for the whole Contract as defined in the General Conditions of Contract, unless otherwise specified.

Revegetation: The process of establishing a vegetative cover on exposed soils, regardless of species composition or structure, as long as the species are non-invasive and their presence will not impede the gradual process of ecological rehabilitation or –restoration.

Soil Erosion: is a natural process whereby the ground level is lowered by wind or water action and may occur as a result of inter alia chemical processes and or physical transport on the land surface.

Scarifying: To roughen the surface of soil as a preparation for seeding or topsoil addition.

Trimming: To neatly round off the levels of existing or previously shaped earthworks to blend in with the levels of other earthworks, constructed works, or natural landforms.

Transformation: The conversion of an ecosystem to a different ecosystem or land use type.

Topsoil: uppermost layer of soil, in natural vegetation maximally 30 cm, in cultivated landscapes the total depth of cultivation, containing the layer with humus, seeds and nutrients. Topsoils that are applied to landscapes to be rehabilitated must be free of refuse, large roots and branches, stones, alien weeds and/or any other agents that would adversely affect the topsoils suitability for re-vegetation.

Weed: a plant that grows where it is not wanted, and can therefore be an indigenous or alien species. An unwanted plant growing in a garden is just called a weed, but the 198 listed IAPs are called “declared weeds and invaders”.

1. Purpose

The Plant Rescue and Revegetation Management Plan addresses the need to mitigate all impacts leading to disturbed vegetation, loss of species and/or agricultural potential, disturbed soil surfaces, and generally bare soils prone to erosion and further degradation on the proposed development site. The plan overlaps to some degree with the Storm Water and Erosion Management Plan, and for successful rehabilitation, it is imperative that this plan is at all times used in conjunction with other EMPs mentioned.

The objective of the plan is therefore to provide:

- » Protocols for the removal, temporary storage and replanting of plant species of conservation concern
- » Protocols for the rehabilitation of vegetative cover across the project area
- » Tools for planning the rehabilitation work and responding to unforeseen events
- » Guidelines on implementation and post-implementation tasks
- » Criteria for evaluating rehabilitation success
- » A summary of items to be included in the rehabilitation budget to ensure that there is sufficient allocation of resources on the project budget so that the scale of EMP-related activities is consistent with the significance of project impacts

2. Scope

This document is a plant rescue, rehabilitation, and revegetation plan that provides a guideline to be applied by all contractors on the development site. This plan, as part of the project EMP, is a legally binding document that must be implemented to fulfill the requirements of relevant legislation. However, the management plan is an evolving guideline that needs to be updated or adapted as progress is made with the rehabilitation and revegetation of the project area, and successes and failures of procedures identified.

The objective of rescuing plants, rehabilitation and revegetation on the project area is:

- » Preventing the loss of species either directly or through future extinction and minimising impacts of development on population dynamics of species of conservation concern.
- » Preserving the natural configuration of habitats as part of ecosystems, thus ensuring a diverse but stable hydrology, substrate and general environment for species to be able to become established and persist.
- » Preserving or re-creating the structural integrity of natural plant communities.
- » Actively aid the improvement of indigenous biodiversity according to a desirable end state according to a previously recorded reference state. This reference

state, if healthy, will be dynamic and able to recover after occasional disturbances without returning to a degraded state.

- » Improving the ecosystem function of natural landscapes and their associated vegetation.

3. Legislation and Standards

Relevant legislation:

- » Conservation of Agricultural Resources Act 43 of 1983
- » Environmental Conservation Act 73 of 1989
- » National Forestry Act 84 of 1998
- » National Environmental Management Act 107 of 1998
- » Northern Cape Nature Conservation Act (Act No. 9 of 2009)

4. Effect of clearing alien vegetation

Invasive and Alien Plants (IAPs) gradually displace and suppress indigenous and/or herbaceous vegetation as their stands become bigger and denser. In addition, they use more water, hence desiccate the soil more, and may alter chemical properties of the soil – partially through secondary compounds released from their litter, partially from compounds released from roots. These altered soils suppress the germination and establishment of herbaceous species, leading to bare soil underneath dense IAP canopies.

After clearing dense stands of invasive shrubs, soil surfaces are thus generally bare with topsoil exposed to erosion and often already somewhat capped and eroded.

5. Effect of removing individuals of species of conservation concern

Species of conservation concern are declining either due to overexploitation or because their range of occupancy is limited and further infringed on by development. Most plant populations require a certain minimum number of individuals within a population or metapopulation to allow for sufficient genetic transfer between individuals. This prevents genetic erosion and hence weakening of the ability of individuals to persist in their environments. Similarly, where the distance between metapopulations is significantly increased due to fragmentation and the resultant loss of some populations, populations may suffer genetic decline due to restricted movement of pollen. Pollinators or other species that depend on a particular plant species for a specific microhabitat or food source may be equally affected because of the reduction of available resources. Therefore the aim of plant rescue actions are always to maintain as many individuals of a plant population in as close proximity to the original habitat as possible to minimise loss of individuals and fragmentation of populations to prevent the creation of future extinction debts of the development.

6. General: Plant rescue and protection

Successful plant rescue can only be achieved if:

- » Species can be removed from their original habitat with minimal damage to the plant, especially the roots.
- » All plants removed are safely stored and treated according to their specific requirements prior to being transplanted again.
- » They are relocated into a suitable habitat and protected from further damage and all disturbances to aid their re-establishment.
- » Timing of planting activities is planned with the onset of the growing season.
- » Steps are taken where necessary to aid the initial establishment of vegetation, including occasional watering.

6.1. Time of planting

- » All planting shall be carried out as far as is practicable during the period most likely to produce beneficial results (i.e. during the peak growing season), but as soon as possible after completion of a section of earthworks.
- » Drainage line rehabilitation preparation must be done during autumn, and planting of appropriate species in these areas should commence during early spring after the first rains.

7. General: IAP removal

Removal of invasive plants should at all time follow the specifications and guidelines of the Working for Water Programme (refer also to invasive plant management plan).

Information can be obtained from the relevant website:

<http://www.dwaf.gov.za/wfw>

Detailed information on clearing methods is available on the above websites "Alien Invasive Plants" menu (clearing methods, operational standards and species-specific treatment methods).

8. General: Rehabilitation and re-vegetation

Successful rehabilitation can only be achieved with:

- » A long-term commitment
- » Practical, adaptive management
- » Viable goals of desired outcomes

Prior to vegetation rehabilitation, all stakeholders involved should be consulted to determine:

- » What the rehabilitation is ultimately aiming for– rehabilitation of cropping/grazing lands or rehabilitation of indigenous vegetation, after soil erosion and storm water management is in place and IAPs have been cleared?
- » A clear definition of incompatible and compatible vegetation on and in the immediate surroundings of the development must be defined and maintained as such. No tree or shrubs shall be allowed to grow to a height in excess of the horizontal distance of that tree or shrub from the nearest newly developed structure or to grow in such a manner as to endanger the development or its operation
- » Who will take long-term ownership and hence responsibility for the rehabilitation and its subsequent monitoring and management? Continued monitoring of vegetation establishment and composition, as well as erosion detection will have to be coupled with continued follow-up maintenance of rehabilitation and erosion control from commencement of activity up to the decommissioning phase.

The ultimate objective for rehabilitation should focus on the stabilisation of soil erosion, retaining agricultural potential of transformed areas and /or the establishment of a dense and protective plant cover and the maintenance of habitats to enable vegetation to persist and flourish on rehabilitated areas indefinitely, ultimately relying only on environmental resources.

8.1. Map and create management areas

The entire project area must be mapped and divided into management areas indicating:

- » Current land cover
 - Roads and residential
 - Areas with IAPs, subdivided further in sparse or dense infestations where applicable
 - Transformed areas
 - Untransformed indigenous vegetation

For every one of the management areas, the project proponent, in consultation with the land users, will have to decide what intervention will be necessary, desirable, and feasible to enable the development of the project and long-term sustainable maintenance of infrastructure. Thus for every management area there must be an operational outline on:

- » what will happen there
- » what needs to be mitigated – including storm water- and erosion management
- » which management units need priority intervention/mitigation
- » how will this mitigation / intervention be done (method statements) including schedule of work
- » realistic and desirable end states including list of species that should be established to initiate rehabilitation after initial revegetation

- » approximate timeframes
- » monitoring protocol to evaluate success or failures of interventions
 - establish permanently marked transects and monitor with fixed-point photography
- » who will be responsible for doing what
- » how will different actions be integrated to achieve and maintain or improve the desirable end state of the environment of that management unit

Special attention will have to be given to drainage zones, as these not only have very active morphodynamics, but are also distributors of seeds – both indigenous and of IAPs. Thus clearing a downstream invasion of aliens to enable maintenance of the development will be futile if the upstream IAPs are not cleared or at least aggressively controlled.

8.2. Setting realistic rehabilitation goals

Rehabilitation efforts typically aim at improving ecosystem function that consists of a series of processes, which can in the end be evaluated against a desired outcome or reference state of the vegetation and environment.

Attainable goals of rehabilitation on the project area should be possible and viable for at least the following:

- » Stabilisation of soils
- » Stabilisation of riparian areas
- » Storm water reduction through management and wetland integrity
- » Clearing of IAPs
 - The degree to which IAPs can be cleared from the project area needs to be determined according to desirability, available project funding, personnel and project requirements
- » Restoring and/or rehabilitating vegetative cover on non-transformed areas to obtain an acceptable vegetation cover that can be maintained or persists on its own indefinitely

8.3. Remove or ameliorate the cause of degradation

This will include:

- » Physical rehabilitation of topsoil where it has been removed.
- » Topsoil on areas that have not been cultivated are considered as the upper 20 - 30 cm only. These contain the most important nutrients, micro flora and –fauna essential for nutrient cycling processes. Topsoils are also an important source of seeds.
- » Subsoils and overburden substrata lack the above elements and will first have to be used for physical rehabilitation of landscapes as and where necessary, and then overlain with topsoils

- » Stabilisation of topsoils and prevention of erosion – refer to the Erosion management plan
- » Removal of all invasive vegetation – refer to the Invasive Management Plan
 - Where it is desirable to use brush or logs of the cleared vegetation for soil stabilisation, such material must be free of regenerative material – e.g. seeds or root suckers

8.4. Initial revegetation

Immediately after clearing of vegetation, the soil surface must be inspected for signs of erosion and stabilised as soon as possible. After completion of construction, such erosion stabilisation should preferably be with a cover of vegetation. A dense initial grass or other perennial cover will be desirable. The appropriate seed mix should be determined in consultation with an ecologist familiar with the area. The aim of the first vegetation cover is to form a protective, relatively dense indigenous layer to slow runoff, increase moisture infiltration into the soil, and gradually change the soil nutrient status in order for it to be more favourable for other desirable indigenous vegetation to become established.

8.5. Plant Search and Rescue

Prior to construction, once all the areas where topsoil will be removed or areas will be transformed have been demarcated, the ECO and contractor will be responsible to remove all bulbous species from the topsoil, as well as succulents and small indigenous shrubs that can be transplanted. These are to be kept in a raised, protected position in a designated area until they can be replanted again as part of the rehabilitation process. Further details are listed in the operation standards.

8.6. Natural seed banks and improvement of plant structural and compositional diversity

It is expected that soil seed banks of indigenous vegetation will be present to initiate initial vegetation cover, but may not be sufficient to establish an acceptable cover of desirable species. After deciding which indigenous species should be re-introduced, seed should be ideally collected from site or an environmentally-matched site nearby.

Seed collection may be done throughout the year as seed ripens, but can also be restricted to summer, when a large amount of the perennial seed should have ripened. Seeds should be stored in paper or canvas bags dusted with insecticide, and sown at the onset of the rainy season.

Alternatively, slower-growing perennials may be raised from seed or cuttings in a nursery and then transplanted once established. It will be beneficial to investigate if community members would be able to create and maintain such a nursery, or if there are nurseries in the area, that raise indigenous flora from the area.

The final vegetation cover should resemble the original (non-encroached) vegetation composition and structure as far as practicable possible or permissible within each management unit.

For drainage areas:

- » First restore drainage line morphology following the guidelines of the Erosion management plan – without that ecological recovery cannot be initiated
- » Determine if natural seed sources may be present further upstream
- » If such upstream seed sources are still present, rehabilitation of riparian vegetation after soil erosion management will most likely occur naturally, PROVIDED that follow-up monitoring of the establishment of vegetation is carried out, and all invasive species eradicated as they emerge. This can only be achieved with a long-term commitment (> 5 years minimum)
- » Should no upstream seed resources be available, suitable species (as determined in consultation with an ecologist) should be sown or planted.

8.7. Monitoring and follow-up action

Throughout the lifecycle of the development, regular monitoring and adaptive management must be in place to detect any new degradation of ecosystems affected by the development, and remedy these as soon as detected.

During the construction phase, the ECO and contractor will be responsible for initiating and maintaining a suitable monitoring system. Once the development is operational, the project proponent will have to identify a suitable entity that will be able to take over and maintain the monitoring cycle and initiate adaptive management as soon as it is required. Monitoring personnel must be adequately trained.

The following are the minimum criteria that should be monitored:

- » Composition and density of replanted vegetation, distinguishing between species introduced for initial revegetation only and species that are part of the pre-determined desirable end state
- » Associated nature and stability of surface soils
 - It is recommended that permanent transects are marked and surveyed annually according to the LFA technique (Tongway and Hindley 2004), adapted to integrate both surface soil characteristics and the vegetation to be monitored
- » Re-emergence of IAPs
 - If noted, remedial action must be taken immediately according to Working for Water specifications
- » Nature and dynamics of riparian zones
 - Stability of riparian vegetation
 - Any form of bank erosion, slumping or undercutting

- Stability of channel form and width of streams – if this increases, it shows that vegetation on plains and/or riparian areas and upper drainage lines are not yet in a stable enough state to be fully functional in reducing excess runoff and the ecosystem overall is losing valuable resources

8.8. Timeframes and duration

- » Rehabilitation will occur during construction, as areas for the re-application of topsoil and revegetation become available or where revegetation can be initiated after clearing of invasives or to stabilise erosion.
- » The initial revegetation period post construction is estimated to be over a period of 6 (minimum) to 12 months (maximum), or a time period specified by the Horticultural Landscape Contractor, particularly if planting of trees and shrubs occurs.
- » The rehabilitation phase (including post seeding maintenance) should be at least 12 months (depending on time of seeding and rainfall) to ensure establishment of an acceptable plant cover is achieved (excluding invasive plant species or weeds).
- » If the plants have not established and the acceptable plant cover is not achieved within the specified maintenance period, maintenance of these areas shall continue until at acceptable plant cover is achieved (excluding alien plant species or weeds).
- » Additional seeding or planting may be necessary to achieve acceptable plant cover. Hydroseeding may have to be considered as an option in this case.
- » Any plants that die, during the maintenance period, shall be replaced by the Horticultural Landscape Contractor (at the Horticultural Landscape Contractor's cost if it was due to insufficient maintenance).
- » Succession of natural plant species should be encouraged
- » Monitoring of rehabilitation success and follow-up adaptive management, together with clearing of emerging invasives shall be carried on until the decommissioning phase has been completed.

9. Conclusion

The Plant Rescue and Revegetation Management Plan is a document to assist the contractor, the developer, and the ECO with guidelines on how to plan and implement the required work, and understand the concepts behind successful rehabilitation. This plan will have to be implemented in conjunction with erosion-, storm water- and IAP management plans. The exact details of the rehabilitation plan will depend on the determined extent of rehabilitation that will have to be undertaken, available funding, and desirable end state of the vegetation after rehabilitation.

10. References and further reading

- Clewell, A., Rieger, J. and Munro, J. (2005). *Guidelines for Developing and Managing Ecological Restoration Projects, 2 Edition*. www.ser.org and Tucson: Society for Ecological Restoration International.
- Coetzee, K. (2005). *Caring for Natural Rangelands*. Scottsville: University of KwaZulu-Natal Press.
- Department of Environmental Affairs,(1983). *Conservation of Agricultural Resources Act 43 of 1983*. Pretoria: Department of Environmental Affairs.
- Society for Ecological Restoration International Science & Policy Working Group. 2004. *The SER International Primer on Ecological Restoration*. www.ser.org & Tucson: Society for Ecological Restoration International.
- Tongway, D.J. and Hindley, N.L. (2004) *Landscape Function Analysis: Procedures for Monitoring and Assessing Landscapes*, CSIRO Sustainable Ecosystems, CANBERRA, AUSTRALIA.
- Tongway, D.J., Freudenberg, D.O., Noble, J.C., and Hodgkinson, K.C. (Eds). (2003). *Landscape Ecology, Function and Management*. CSIRO Sustainable Ecosystems, CANBERRA, AUSTRALIA.

A. APPENDIX: RECOMMENDED OPERATIONAL STANDARDS

OBJECTIVE: Revegetate and Rehabilitate disturbed areas

The Contractor must take all reasonable measures to ensure that plant species of conservation concern are rescued and survive indefinitely. Landscaped topsoils as well as areas cleared of IAPs must be adequately rehabilitated and /or revegetated to ensure that the ecosystems affected by the development regain and/or retain their functionality indefinitely.

Throughout the lifecycle of the development, regular monitoring and adaptive management must be in place to detect any new degradation of ecosystems affected by the development and remedy these as soon as detected.

Mitigation measures relating to the vegetative cover as part of a healthy ecosystem must be implemented in order to effectively limit and gradually reverse the impact on the environment. The focus of the mitigation measures laid out below relate to project-related disturbances. Where such disturbances are exacerbated by farming-related disturbances or vice versa, mitigation measures must be carried out in consultation with the land-user responsible.

Project component/s	<p>Project components affecting the objective:</p> <ul style="list-style-type: none"> » Turbines » Access roads and cabling between and to turbine units » Power line » Sealed surfaces (e.g. roofs, concrete surfaces, compacted road surfaces, paved roads / areas) » Substation » All other infrastructure
Potential Impact	<ul style="list-style-type: none"> » Loss of suitable substrate for a stable vegetation cover » De-stabilisation and/or alteration of substrate and hence degradation of vegetation cover, significant change in species composition or loss of agricultural potential » Loss of suitable habitat for flora and fauna » Leaky ecosystem due to loss of nutrients and moisture from the system, leading to a less resilient vegetation cover and loss of ecosystem function and -services » Degradation and/or loss of riparian areas and wetlands on and beyond the project boundaries » A loss of indigenous vegetation cover and possibly endangered species » Disturbance of fauna species
Activities/risk sources	<ul style="list-style-type: none"> » Rainfall and wind erosion of disturbed areas » Excavation, stockpiling and compaction of soil » Existing IAPs as well as clearing thereof » Concentrated discharge of water from construction activity or new

	<p>infrastructure</p> <ul style="list-style-type: none"> » Storm water run-off from sealed, altered or bare surfaces » Mobile construction equipment movement on site » Cabling and access roads construction activities » Power line construction activities » River/stream/drainage line road crossings » Roadside drainage ditches » Project related infrastructure » Premature abandonment of follow-up monitoring and adaptive management of rehabilitation
Mitigation: Target/ Objective	<ul style="list-style-type: none"> » To minimise loss of plant species of conservation concern » To minimise unfavourable runoff conditions and loss of resources from the ecosystems » To minimise erosion of soil from site during and after construction » To minimise and mitigate unfavourable alteration to drainage lines, especially incision » To minimise damage to indigenous vegetation during and after construction » No accelerated overland flow related surface erosion as a result of project infrastructure » No reduction in the surface area or general nature and functionality of wetlands (drainage lines and other wetland areas) as a result of the establishment of infrastructure on the project areas and beyond its boundaries » A clear reduction of IAPs on the project area and replacement thereof by indigenous vegetation according to a pre-determined desirable end state

Mitigation: Action/control	Responsibility	Timeframe
Planning		
Classify the entire project area into management units according to current land cover and state of the environment and map accordingly	Developer / Contractor	Prior to construction
<p>For each management unit</p> <ul style="list-style-type: none"> » establish what interventions will be necessary relating to IAPs, soil erosion management, topsoil handling, landscape rehabilitation and revegetation » where rehabilitation and revegetation will be necessary, decide on the desired end state of vegetation for that management unit and create a list of species to be established on specific sites » outline the management of construction activities, including topsoils, excavated materials and felled biomass in a manner that will optimise the rehabilitation goals as fast and as effective as possible for that management unit 	Developer / Contractor in collaboration with ECO and land-users	Prior to construction
Plant Rescue and indigenous plant materials		
<p>All harvested plant materials shall be labelled with</p> <ul style="list-style-type: none"> » Genus as minimum, species if known » Habitat from which materials were collected 	ECO	Prior to construction

Mitigation: Action/control	Responsibility	Timeframe
<p>Indigenous plant materials for re-vegetation:</p> <ul style="list-style-type: none"> » All plant material shall be obtained from the search-and-rescue operation on the site prior to clearing or from local nurseries or reputable seed providers » Indigenous materials shall only be removed from their habitat with the necessary permits whenever applicable » Each plant removed shall be handled, packed and stored in a manner suitable for that species » Removed plants shall be protected from windburn or other damage during transportation » No plants or plants with exposed roots shall be subjected to excessive exposure to drying winds and sun, or subjected to water logging » All plants shall be kept free from plant diseases and pests and protected from rodents or other damaging agents » All indigenous plants that have been removed prior to clearing shall be returned to conditions resembling their original habitat as close as practically possible 	Contractor in collaboration with ECO	Before, during and after construction
<p>Seed stocks for rehabilitation</p> <ul style="list-style-type: none"> » Seed can be used for cultivation of desirable species for revegetation » Seed shall be utilised for direct sowing or hydroseeding » Seed collected from the site must be dried and stored in a suitable facility under cool (7-10°C), dry, insect free conditions until required for cultivation or seeding. Only viable, ripe seed shall be used » Seed harvested shall be insect- and pathogen free » Seed harvested shall not contain materials of any invasive species » Prior to clearing, seed should be collected from the site on a regular basis as species start to seed to maximise the amount of fully developed seed secured » From sites that will be cleared, 100% of all seeds available may be collected » From sites adjacent to the development, 25% of seeds can be collected for rehabilitation 	Contractor and ECO	Before, during and after construction
<p>Site-specific nursery</p> <ul style="list-style-type: none"> » On-site nursery facilities shall be erected for the holding of rescued plant material and the propagation of appropriate species for re-vegetation » Where nursery facilities can only cater for rescued plants, a suitable (local) nursery shall be identified that will be willing to receive seeds collected and propagate the necessary species for later revegetation » Soil or other propagation media, were used, shall be weed- and pathogen free » Argentine ants shall be controlled at all times » The area where plants are stored shall be kept free of 	Contractor, ECO to control	Prior to construction

Mitigation: Action/control	Responsibility	Timeframe
weeds <ul style="list-style-type: none"> » Plants stored in the designated area shall be protected from rodents, excessive sun and wind, and inspected regularly until being planted for pathogens and pests, and then treated accordingly » The nursery shall be adequately secured to prevent loss or theft of species 		
Protected flora <ul style="list-style-type: none"> » Ensure that no indigenous protected flora is removed from its original habitat in the project area without legal documents from the relevant authorities 	ECO	Before, during and after construction
Topsoil		
Avoid <ul style="list-style-type: none"> » Management units that will not be developed or selected elements – trees, rocky outcrops on site shall be maintained in situ and demarcated clearly to prevent any disturbance during construction » These units will be considered as NO-GO areas during construction 	Contractor and ECO	Before, during and immediately after construction
Invasives <ul style="list-style-type: none"> » Remove all invasive shrubs as per the Working for Water specifications 	Contractor, ECO to control	Before, during and after construction
Mulch <ul style="list-style-type: none"> » all trees felled shall be debranched and the logs used in controlling erosion from re-landscaped topsoils and/or adding surface roughness and organic matter to topsoils to be rehabilitated » all cut branches from trees, as well as all shrubs cleared from the construction site shall be shredded to mulch, either by a chipper or by hand to sticks no longer than 10 cm » preparation of mulch shall be done at source » mulched material shall be free of seed-bearing invasive plant material » the mulch shall be suitably stored – bagged if necessary - and will be used in rehabilitation and soil erosion management on the site » should additional mulch be used for rehabilitation, this should be obtained from invasive shrubs of areas not cleared » mulch shall be stored for as short a period as possible 	Contractor, ECO to control	Before, during and immediately after construction
Storage of topsoil and subsoil: <ul style="list-style-type: none"> » topsoils constitute the upper 20 – 30 cm of soil only, lower layers of soil are regarded as subsoil » stockpiling of topsoils and subsoils shall only be done on previously transformed areas, and be kept at least 50 m from any remaining natural vegetation » care shall be taken during stockpiling to prevent the 	Contractor, ECO to control	During and immediately after construction

Mitigation: Action/control	Responsibility	Timeframe
<p>mixing of topsoil with subsoil and/or any other material</p> <ul style="list-style-type: none"> » topsoils shall be stored in heaps no higher than 100 cm, and shall be re-applied as soon as possible » care shall be exercised during stockpiling of topsoils to prevent compaction thereof » topsoils shall be adequately protected from erosion by preventing concentration of surface water and scouring of slopes » erosion of topsoils has to be contained and repaired as soon as it occurs, before large scale erosion and loss of topsoil develops » any logs obtained during clearing operations can be used in continuous rows to curtail erosion where necessary. Geojute (geotextile) shall be used additionally if the logs are not sufficient to remedy any erosion – for details refer to the erosion management plan » where topsoils need to be stored longer than 6 months, such stockpiles shall be revegetated, even if this has to include re-seeding to achieve an acceptable cover of vegetation 		
<p>Boulders and rocks</p> <ul style="list-style-type: none"> » where removed during clearing, should be stored separately and used in the rehabilitation program » boulders and rocks must be partially buried within the topsoil layer wherever practical to provide greater soil-holding stability and reduce water erosion » placement of rocks and boulders shall mimic the natural occurrence of rocks and boulders in the area 	Contractor, ECO to control	During and after construction
Rehabilitation of surface		
<p>Prior to the application of topsoil</p> <ul style="list-style-type: none"> » subsoil shall be shaped and trimmed to blend in with the surrounding landscape or used for erosion mitigation measures » ground surface or shaped subsoil shall be ripped or scarified with a mechanical ripper or by hand to a depth of 15 – 20 cm, » compacted soil shall be ripped to a depth greater than 25 cm and the trimmed by hand to prevent re-compacting the soil » any rubbish, concrete remnants, steel remnants or other objects introduced to the site during the construction process shall be cleared before ripping, or shaping and trimming of any landscapes to be rehabilitated takes place » shaping will be to roughly round off cuts and fills and any other earthworks to stable forms, sympathetic to the natural surrounding landscapes 	Contractor, ECO to control	During and after construction

Mitigation: Action/control	Responsibility	Timeframe
<p>Application of topsoil</p> <ul style="list-style-type: none"> » topsoils shall be spread evenly over the ripped or trimmed surface, if possible not deeper than the topsoil originally removed » the final prepared surface shall not be smooth but furrowed to follow the natural contours of the land » the final prepared surface shall be free of any pollution or any kind of contamination » care shall be taken to prevent the compaction of topsoil » where applicable, the final prepared surface will also contain scattered rocks and/or logs to mimic the natural condition of the original habitat or area and to aid in soil stabilisation and erosion control 	Contractor, ECO to control	During and after construction
<p>Soil stabilisation</p> <ul style="list-style-type: none"> » mulch from brush shall be applied by hand to achieve a layer of uniform thickness » mulch shall be rotovated into the upper 10 cm layer of soil <ul style="list-style-type: none"> ○ this operation shall not be attempted if the wind strength is such as to remove the mulch before it can be incorporated into the topsoil » in very rocky areas a layer of mulch shall be applied prior to adding the topsoil » measures shall be taken to protect all areas susceptible to erosion by installing temporary and permanent drainage work as soon as possible <ul style="list-style-type: none"> ○ where natural water flow-paths can be identified, subsurface drains or suitable surface drains and chutes need to be installed » additional measures shall be taken to prevent surface water from being concentrated in streams and from scouring slopes, banks or other areas <ul style="list-style-type: none"> ○ if mulch is limited, available mulch, together with harvested seeds, should be concentrated in these hollows to promote rapid re-vegetation in them » runnels or erosion channels developing shall be back-filled and restored to a proper condition <ul style="list-style-type: none"> ○ such measures shall be effected immediately before erosion develops at a large scale » where erosion cannot be remedied with available mulch, logs or rocks, geojute shall be used to curtail erosion 	Contractor, ECO to control	During and after construction
<p>Borrow-pits</p> <ul style="list-style-type: none"> » shall be shaped to have undulating, low-gradient slopes and surfaces that are rough and irregular, suitable for trapping sediments and facilitation of plant growth » upon completion of rehabilitation these reshaped and revegetated areas shall blend into the natural terrain 	Contractor, ECO to control	After construction

Mitigation: Action/control	Responsibility	Timeframe
Revegetation		
<p>Recreate a non-invasive, acceptable vegetation cover that will facilitate the establishment of desirable and/or indigenous species</p> <ul style="list-style-type: none"> » revegetation of the final prepared area is expected to occur spontaneously to some degree where topsoils could be re-applied within 6 months » revegetation will be done according to an approved planting/landscaping plan according to the management units initially delineated and their respective desirable end states and permissible vegetation 	Contractor, ECO to control	Successively during construction , as construction of individual components is completed, then followed up until desired end state is reached
<p>Re-seeding</p> <ul style="list-style-type: none"> » revegetation can be increased where necessary by hand- seeding indigenous species <ul style="list-style-type: none"> ○ previously collected and stored seeds shall be sown evenly over the designated areas, and be covered by means of rakes or other hand tools » re-seeding shall occur at the recommended time to take advantage of the growing season » in the absence of sufficient follow-up rains after seeds started germinating, watering of the new vegetation cover until it is established shall become necessary to avoid loss of this vegetative cover and the associated seedbank » where, after initial re-seeding, the no acceptable vegetation cover has established within 12 months, hydroseeding should be considered as an option for follow-up revegetation work » sowing rates of seeds used during hydro-seeding should be obtained from the relevant supplier and in accordance with the existing environment 	Contractor, ECO to control	Successively during construction , as construction of individual components is completed, then followed up until desired end state is reached
<p>Planting of species</p> <ul style="list-style-type: none"> » species to be planted include all rescued species » the size of planting holes shall be sufficiently large to ensure that the entire root system is well covered with topsoil » soil around the roots of container plants shall not be disturbed » bulbous plants shall be planted in groups or as features in selected areas » before placement of larger plant specimens into prepared holes, the holes shall be watered if not sufficiently moist » during transplanting care shall be taken to limit or 	Contractor, ECO to control	Successively during construction , as construction of individual components is completed, then followed up until desired end state is

Mitigation: Action/control	Responsibility	Timeframe
<p>prevent damage to roots</p> <ul style="list-style-type: none"> » plants should be watered immediately after transplanting to help bind soil particles to the roots (or soil-ball around rooted plants) and so facilitate the new growth and functioning of roots 		reached
<p>Traffic on revegetated areas</p> <ul style="list-style-type: none"> » designated tracks shall be created for pedestrian or vehicle traffic where necessary » Disturbance of vegetation and topsoil must be kept to a practical minimum, no unauthorised off road driving will be allowed » All livestock shall be excluded from revegetated areas 	Contractor	Before, during and after construction
<p>Establishment</p> <ul style="list-style-type: none"> » The establishment and new growth of revegetated and replanted species shall be closely monitored » Where necessary, reseeding or replanting will have to be done if no acceptable plant cover has been created 	Contractor	Successively during construction, as construction of individual components is completed, then followed up until desired end state is reached
Monitoring and follow-up treatments		
<p>Monitor success of rehabilitation and revegetation and take remedial actions as needed according to the respective plan</p> <ul style="list-style-type: none"> » Erosion shall be monitored at all times and measures taken as soon as detected » Where necessary, reseeding or replanting will have to be done if no acceptable plant cover has been created 	ECO during construction, suitable designated person/institution after that	During and after construction, during operational and decommissioning phase
<p>Weeding</p> <ul style="list-style-type: none"> » It can be anticipated that invasive species and weeds will germinate on rehabilitated soils <ul style="list-style-type: none"> ○ These need to be hand-pulled before they are fully established and/or reaching a mature stage where they can regenerate ○ Where invasive shrubs re-grow, they will have to be eradicated according to the Working for Water specifications 		
Performance Indicator	<ul style="list-style-type: none"> » No activity in identified no-go areas » Acceptable level of activity within disturbance areas, as 	

	<p>determined by ECO</p> <ul style="list-style-type: none">» Natural configuration of habitats as part of ecosystems or cultivated land is retained or recreated, thus ensuring a diverse but stable hydrology, substrate and general environment for species to be able to become established and persist» The structural integrity and diversity of natural plant communities is recreated or maintained» Indigenous biodiversity continually improves according to the pre-determined desirable end state<ul style="list-style-type: none">○ This end state, if healthy, will be dynamic and able to recover by itself after occasional natural disturbances without returning to a degraded state» Ecosystem function of natural landscapes and their associated vegetation is improved or maintained
Monitoring	<ul style="list-style-type: none">» Fortnightly inspections of the site by ECO during construction» An incident reporting system must record non-conformances to the EMP.» Quarterly inspections and monitoring of the site by the ECO or personnel designated to the rehabilitation process until 80% of the desired plant species have become established<ul style="list-style-type: none">○ These inspections should be according to the monitoring protocol set out in the rehabilitation plan» Thereafter annual inspections according to the minimal monitoring protocol

B. APPENDIX: CHECKLIST OF ACTIONS FOR REHABILITATION PLANNING

<p>Conceptual Planning</p>	<ul style="list-style-type: none"> » Identify rehabilitation site locations and its boundaries » Identify ownership of rehabilitation program » Describe improvements that are anticipated following rehabilitation » Identify the kind of ecosystem to be rehabilitated at each site » Identify rehabilitation goals and desirable end state » Identify physical site conditions in need of repair » Identify stressors in need of regulation or re-initiation to maintain the integrity of the ecosystem, such as aliens, erosion, fire-regime » Identify the list and kinds of interventions of abiotic and biotic interventions that are and will be needed » Identify landscape restrictions and whether or not its integrity is dependent on a functioning ecosystem outside the project area » Determine project funding and sources » Identify labour sources and equipment needs » Identify biotic resource needs and sources, e.g. suitable topsoil, seeds » Identify any permit requirements or other legal issues » Determine project duration » Outline adaptable strategies for long-term protection and management
<p>Preliminary Tasks</p>	<ul style="list-style-type: none"> » Appoint a rehabilitation practitioner who is in charge of all the technical aspects of rehabilitation » Appoint a restoration team and train where necessary to ensure effective implementation » Prepare a budget to accommodate the completion of preliminary tasks » Document existing site conditions, also describing biota » Conduct pre-project monitoring as needed, including soil chemistry, that may affect the success of the rehabilitation program » Establish a reference site or past reference that represents the desired end state of the site » Gather information on key species to be re-introduced » Conduct investigations as needed to assess the effectiveness of restoration methods and strategies used in similar habitats up to date » Decide if rehabilitation goals are realistic or need modification » Prepare a list of objectives that need to be reached to achieve restoration goals » Ensure liaison with affected stakeholders, especially as far as rehabilitation goals are concerned » Investigate available accedes and infrastructure needed to facilitate implementation of rehabilitation
<p>Implementation phase</p>	<ul style="list-style-type: none"> » Describe the interventions that will be implemented to attain each set objective » Acknowledge potential for passive restoration where viable » Prepare performance standards and monitoring protocols to measure the attainment of each objective » Schedule tasks needed to fulfil each objective

	<ul style="list-style-type: none">» Obtain equipment, supplies and biotic resources as needed» Prepare an appropriate budget
Implementation tasks	<ul style="list-style-type: none">» Mark boundaries and work areas» Install permanent monitoring fixtures» Implement restoration tasks
Post-implementation tasks	<ul style="list-style-type: none">» Protect the rehabilitation site against initial disturbance, including herbivores» Perform post-implementation maintenance, especially continued monitoring and eradication of emerging IAPs» Monitor site at least once per year, using the LFA technique, and identify needs for adaptive management
Evaluation	<ul style="list-style-type: none">» Assess monitoring data to determine whether performance standards are met and rehabilitation objectives reached and maintained» Conduct an ecological evaluation of the newly completed rehabilitation

C. APPENDIX: TRANSPLANTING GUIDELINES FOR PLANTS WITH UNDERGROUND STORAGE ORGANS

Many of the plants in harsh environments have underground storage organs from which they resprout every year after sufficient rains, flower and then die back soon after fruiting and remain dormant, out of sight until the next growing season. All species of the families Amaryllidaceae, Iridaceae, Orchidaceae are protected provincially, nationally and/or internationally, as are many species of other monocot species.

Root system: underground storage organs are variable in size, but usually between 15 and 40 cm deep in the soil

Transplanting: success of transplanting is usually very high IF handled correctly

Rescue 101: Plants should be lifted and transplanted after flowering and fruiting, preferably as the leaves start to die back. For lifting, loosen the soil or wedge apart rocks working from a circle of about 20 cm away from the base of the plant, working inwards but not closer than about 5 cm of the plant with a sharp narrow object such as a koevoet. Once the soil is loosened, gently feel by hand where the bulb, corm, or other storage organ is, and wedge out by hand, taking care not to damage it. Remove loose soil, gently cleanse off most of remaining soil, or rinse off the storage organ. Group these according to species and label clearly, keep records of labels to include name if that is known, or a brief description or photo, also the average depth of the organs when they were removed, and the habitat they were removed from. Spread these plants so that the storage organ can dry completely, and then loosely pack into newspaper or paper bag and then store in a shaded, dry position for maximally 3 months. Transplant into soil that is as similar as possible to the original habitat, TAKING CARE that the growing point of the organ points to the top, else the plant will die. Make sure the storage organs are positioned according to the records kept about original depth of the storage organ.

Aftercare: Firm down soil around the base of the plant once it is in a new position. Allow plant to resprout naturally after sufficient rains, do not water. As these plants may not be visible for a while, clearly demarcate the area where these have been planted to avoid disturbing and potentially destroying them later on.

APPENDIX F: PLANT RESCUE PLAN