# KIARA PV3 FACILITY AND ASSOCIATED INFRASTRUCTURE, NORTH WEST PROVINCE

Environmental Management Programme for the facility on-site substation associated with the 120MW Kiara PV3 Facility

January 2023

## GENERIC ENVIRONMENTAL MANAGEMENT PROGRAMME (EMPr) FOR THE DEVELOPMENT AND EXPANSION OF SUBSTATION INFRASTRUCTURE FOR THE TRANSMISSION AND DISTRIBUTION OF ELECTRICITY











#### TABLE OF CONTENTS

INTRO	DDUC	TION	1
1.	Вас	ckground	1
2.	Pur	pose	1
3.	Obj	ective	1
4.	Scc	pe	1
5.	Stru	cture of this document	2
6.	Coi	mpletion of part B: section 1: the pre-approved generic EMPr template	4
7. mo		endments of the impact management outcomes and impact ement actions	4
8. an		cuments to be submitted as part of part B: section 2 site specific informati	
(a)	) A	mendments to Part B: Section 2 – site specific information and declaratio	n 5
PART	A – G	ENERAL INFORMATION	2
1.	DEF	INITIONS	2
2.	AC	RONYMS and ABBREVIATIONS	3
3. PR		LES AND RESPONSIBILITIES FOR ENVIRONMENTAL MANAGEMENT AMME (EMPr) IMPLEMENTATION	4
4.	EΝ\	/IRONMENTAL DOCUMENTATION REPORTING AND COMPLIANCE	. 10
4	4.1	Document control/Filing system	. 10
4	4.2	Documentation to be available	. 10
4	4.3	Weekly Environmental Checklist	. 10
4	4.4	Environmental site meetings	.11
4	4.5	Required Method Statements	.11
4	4.6	Environmental Incident Log (Diary)	. 12
2	4.7	Non-compliance	. 12
4	4.8	Corrective action records	. 13
2	4.9	Photographic record	. 13
4	4.10	Complaints register	. 14
4	4.11	Claims for damages	. 14
4	4.12	Interactions with affected parties	. 14
4	4.13	Environmental audits	. 15
2	4.14	Final environmental audits	. 15
PART	B: SEC	CTION 1: Pre-approved generic EMPr template	.16

5.	IMPA	CT MANAGEMENT OUTCOMES AND IMPACT MANAGEMENT ACTIONS	16
	5.1	Environmental awareness training	17
	5.2	Site Establishment development	20
	5.3	Access restricted areas	22
	5.4	Access roads	23
	5.5	Fencing and Gate installation	26
	5.6	Water Supply Management	31
	5.7	Storm and waste water management	32
	5.8	Solid and hazardous waste management	34
	5.9	Protection of watercourses and estuaries	37
	5.10	Vegetation clearing	41
	5.11	Protection of fauna	45
	5.12	Protection of heritage resources	49
	5.13	Safety of the public	50
	5.14	Sanitation	52
	5.15	Prevention of disease	54
	5.16	Emergency procedures	57
	5.17	Hazardous substances	59
	5.18	Workshop, equipment maintenance and storage	66
	5.19	Batching plants	68
	5.20	Dust emissions	71
	5.21	Blasting	74
	5.22	Noise	75
	5.23	Fire prevention	76
	5.24	Stockpiling and stockpile areas	78
	5.25	Civil works	79
	5.26	Excavation of foundation, cable trenching and drainage systems	82
	5.27	Installation of foundations, cable trenching and drainage systems	83
	5.28 Insulc	Installation of equipment (circuit breakers, current Transformers, Isolators, surge arresters, voltage transformers, earth switches)	
	5.30	Cabling and Stringing	87
	5.31 syster	Testing and Commissioning (all equipment testing, earthing system, mintegration)	89
	5.32	Socio-economic	89

	5.33	3 Temporary closure of site	92
	5.34	Dismantling of old equipment	95
	5.35	5 Landscaping and rehabilitation	97
6	ACC	CESS TO THE GENERIC EMPr	101
PART	B: SEC	CTION 2	102
7	SITE	SPECIFIC INFORMATION AND DECLARATION	102
7	7.1	Sub-section 1: contact details and description of the project	102
7	7.2	Sub-section 2: Development footprint site map	103
7	7.3	Sub-section 3: Declaration	116
7		Sub-section 4: amendments to site specific information (Part B; section 116	on 2)
PART	C		117
8	SITE	SPECIFIC ENVIRONMENTAL ATTRIBUTES	117
CON	STRUC	CTION AND DECOMMISSIONING OUTCOMES AND ACTIONS	118
7	7.1	Ecology (Fauna and Flora)	118
7	7.2	Avifauna	123
7	7.3	Heritage	124
7	7.4	Visual	124
OPER	ATION	NAL PHASE OUTCOMES AND ACTIONS	129
7	7.5	Ecology (Fauna and Flora)	129
APPE	NDIX 1	1: METHOD STATEMENTS	133
APPE	NDIX 2	2: CV OF THE EAP	134
List of	table	es	
Table	e 1: G	Guide to roles and responsibilities for implementation of an EMPr	4

#### **INTRODUCTION**

#### 1. Background

The National Environmental Management Act, 1998 (Act No. 107 of 1998) (NEMA) requires that an environmental management programme (EMPr) be submitted where an environmental impact assessment (EIA) has been identified as the environmental instrument to be utilised as the basis for a decision on an application for environmental authorisation (EA). The content of an EMPr must either contain the information set out in Appendix 4 of the Environmental Impact Assessment Regulations, 2014, as amended (EIA Regulations) or must be a generic EMPr relevant to an application as identified and gazetted by the Minister in a government notice. Once the Minister has identified, through a government notice that a generic EMPr is relevant to an application for EA, that generic EMPr must be applied by all parties involved in the EA process, including but not limited to the applicant and the competent authority (CA).

#### 2. Purpose

This document constitutes a generic EMPr relevant to applications for the development or expansion of substation infrastructure for the transmission and distribution of electricity, and all listed and specified activities necessary for the realisation of such infrastructure.

#### 3. Objective

The objective of this generic EMPr is to prescribe and pre-approve generally accepted impact management outcomes and impact management actions, which can commonly and repeatedly be used for the avoidance, management and mitigation of impacts and risks associated with the development or expansion of substation infrastructure for the transmission and distribution of electricity. The use of a generic EMPr is intended to reduce the need to prepare and review individual EMPrs for applications of a similar nature.

#### 4. Scope

The scope of this generic EMPr applies to the development or expansion of substation infrastructure for the transmission and distribution of electricity requiring EA in terms of NEMA. This generic EMPr applies to activities requiring EA, mainly activity 11 and 47 of the Environmental Impact Assessment Regulations Listing Notice 1 of 2014, as amended, and activity 9 of the Environmental Impact Assessment Regulations Listing Notice 2 of 2014, as amended, and all associated listed or specified activities necessary for the realization of such infrastructure.

#### 5. Structure of this document

This document is structured in three parts with an Appendix as indicated in the table below:

Part	Section	Heading	Content
A		Provides general guidance and information and is <b>not</b> legally binding	Definitions, acronyms, roles & responsibilities and documentation and reporting.
В	1	Pre-approved generic EMPr template	Contains generally accepted impact management outcomes and impact management actions required for the avoidance, management and mitigation of impacts and risks associated with the development or expansion of substation infrastructure for the transmission and distribution of electricity, which are presented in the form of a template that has been preapproved.
			The template in this section is to be completed by the contractor, with each completed page signed and dated by the holder of the EA prior to commencement of the activity.
			Where an impact management outcome is not relevant, the words "not applicable" can be inserted in the template under the "responsible persons" column.
			Once completed and signed, the template represents the EMPr for the activity approved by the CA and is legally binding. The template <b>is not required</b> to be submitted to the CA as once the generic EMPr is gazetted for implementation, it has been approved by the CA.
			To allow interested and affected parties access to the pre-approved EMPr template for consideration through the decision-making process, the EAP on behalf of the applicant /proponent must make the hard copy of this EMPr available at a public location and where the applicant has a website, the EMPr should also be made available on such publicly accessible website.
	2	Site specific information	Contains preliminary infrastructure layout and a declaration that the applicant/holder of the EA

Section	Heading	Content
		will comply with the pre-approved generic EMPr template contained in <u>Part B: Section 1</u> , and understands that the impact management outcomes and impact management actions are <b>legally binding</b> . The preliminary infrastructure layout must be finalized to inform the final EMPr that is to be submitted with the basic assessment report (BAR) or environmental impact assessment report (EIAR), ensuring that all impact management outcomes and impact management actions have been either preapproved or approved in terms of <u>Part C</u> .
		This section <b>must be</b> submitted to the CA together with the final BAR or EIAR. The information submitted to the CA will be considered to be incomplete should a signed copy of <u>Part B: section 2</u> not be submitted. Once approved, this Section forms part of the EMPr for the development and is legally binding.
	Site specific sensitivities/attributes	If any specific environmental sensitivities/ attributes are present on the site which require site specific impact management outcomes and impact management actions, not included in the pre-approved generic EMPr, to manage impacts, these specific impact management outcomes and impact management actions must be included in this section. These specific environmental attributes must be referenced spatially and impact management outcomes and impact management actions must be provided. These specific impact management outcomes and impact management actions must be presented in the format of the preapproved EMPr template (Part B: section 1)  This section will not be required should the site contain no specific environmental sensitivities or attributes. However, if Part C is applicable to the site, it is required to be submitted together with the BAR or EIAR, for consideration of, and decision on, the application for EA. The information in this section must be prepared by
		·

Part	Section	Heading	Content
			approved, Part C forms part of the EMPr for the site and is legally binding.
			This section applies only <b>to additional</b> impact management outcomes and impact management actions that are necessary for the avoidance, management and mitigation of impacts and risks associated with the specific development or expansion and which are not already included in <u>Part B: section 1</u> .
Арре	endix 1		Contains the method statements to be prepared prior to commencement of the activity. The method statements are <b>not required</b> to be submitted to the competent authority.

#### 6. Completion of part B: section 1: the pre-approved generic EMPr template

The template is to be completed prior to commencement of the activity, by providing the following information for each environmental impact management action:

- For implementation
  - a 'responsible person',
  - a method for implementation,
  - a timeframe for implementation
- For monitoring
  - a responsible person
  - frequency
  - evidence of compliance.

The completed template must be signed and dated by the holder of the EA prior to commencement of the activity. The method statements prepared and agreed to by the holder of the EA must be appended to the template as <u>Appendix 1</u>. Each method statement must be signed and dated on each page by the holder of the EA. This template once signed and dated is legally binding. The holder of the EA will remain responsible for its implementation.

#### 7. Amendments of the impact management outcomes and impact management actions

Once the activity has commenced, a holder of an EA may make amendments to the impact management outcomes and impact management actions in the following manner:

- Amendment of the impact management outcomes: in line with the process contemplated in Regulation 37 of the EIA Regulations; and
- Amendment of the impact management actions: in line with the process contemplated in Regulation 36 of the EIA Regulations.

### 8. Documents to be submitted as part of part B: section 2 site specific information and declaration

<u>Part B: Section 2</u> has three distinct sub-sections. The first and third sub-sections are in a template format. Sub-section two requires a map to be produced.

<u>Sub-section 1</u> contains the project name, the applicant's name and contact details, the site information, which includes coordinates of the property or farm in which the proposed substation infrastructure is proposed as well as the 21-digit Surveyor General code of each cadastral land parcel and, where available, the farm name.

<u>Sub-section 2</u> is to be prepared by an EAP and must contain his/her name and expertise including a curriculum vitae. This sub-section must include a map of the site sensitivity overlaid with the preliminary infrastructure layout using the national web based environmental screening tool, when available for compulsory use at: <a href="https://screening.environment.gov.za/screeningtool">https://screening.environment.gov.za/screeningtool</a>. The sensitivity map shall identify the nature of each sensitive feature e.g. threatened plant species, archaeological site, etc. Sensitivity maps shall identify features both within the planned working area and any known sensitive features and within 50 m from the development footprint.

<u>Sub-section 3</u> is the declaration that the applicant (s)/proponent (s) or holder of the EA in the case of a change of ownership must complete which confirms that the applicant/EA holder will comply with the pre-approved 'generic EMPr' template in <u>Section 1</u> and understands that the impact management outcomes and impact management actions are legally binding.

#### (a) Amendments to Part B: Section 2 – site specific information and declaration

Should the EA be transferred, <u>Part B: Section 2</u> must be completed by the new applicant/proponent and submitted with the application for an amendment of the EA in terms of regulations 29 or 31 of the EIA Regulations, whichever applies. The information submitted as part of such an application for an amendment to an EA will be considered to be incomplete should a signed copy of <u>Part B: Section 2</u> not be submitted. Once approved, <u>Part B: Section 2</u> forms part of the EMPr for the development and the EMPr becomes legally binding to the new EA holder.

#### **PART A - GENERAL INFORMATION**

#### 1. **DEFINITIONS**

In this EMPr any word or expression to which a meaning has been assigned in the NEMA or EIA Regulations has that meaning, and unless the context requires otherwise –

"clearing" means the clearing and removal of vegetation, whether partially or in whole, including trees and shrubs, as specified;

"construction camp" is the area designated for key construction infrastructure and services, including but not limited to offices, overnight vehicle parking areas, stores, the workshop, stockpile and lay down areas, hazardous storage areas (including fuels), the batching plant (if one is located at the construction camp), designated access routes, equipment cleaning areas and the placement of staff accommodation, cooking and ablution facilities, waste and wastewater management;

"contractor" - The Contractor has overall responsibility for ensuring that all work, activities, and actions linked to the delivery of the contract, are in line with the Environmental Management Programme and that Method Statements are implemented as described.

"hazardous substance" is a substance governed by the Hazardous Substances Act, 1973 (Act No. 15 of 1973) as well as the Hazardous Chemical and Substances Regulations, 1995;

"method statement" means a written submission by the Contractor to the Project Manager in response to this EMPr or a request by the Project Manager and ECO. The method statement must set out the equipment, materials, labour and method(s) the Contractor proposes using to carry out an activity identified by the Project Manager when requesting the Method Statement. This must be done in such detail that the Project Manager and ECO is able to assess whether the Contractor's proposal is in accordance with this specification and/or will produce results in accordance with this specification;

The method statement must cover as a minimum applicable details with regard to:

- (i) Construction procedures;
- (ii) Plant, materials and equipment to be used;
- (iii) Transporting the equipment to and from site;
- (iv) How the plant/ material/ equipment will be moved while on site;
- (v) How and where the plant/ material/ equipment will be stored;
- (vi) The containment (or action to be taken if containment is not possible) of leaks or spills of any liquid or material that may occur;
- (vii) Timing and location of activities;
- (viii) Compliance/ non-compliance; and
- (ix) Any other information deemed necessary by the Project Manager.

"slope" means the inclination of a surface expressed as one unit of rise or fall for so many horizontal units;

"solid waste" means all solid waste, including construction debris, hazardous waste, excess cement/ concrete, wrapping materials, timber, cans, drums, wire, nails, food and domestic waste (e.g. plastic packets and wrappers);

**"spoil"** means excavated material which is unsuitable for use as material in the construction works or is material which is surplus to the requirements of the construction works;

**"topsoil"** means a varying depth (up to 300 mm) of the soil profile irrespective of the fertility, appearance, structure, agricultural potential, fertility and composition of the soil;

"works" means the works to be executed in terms of the Contract

#### 2. ACRONYMS and ABBREVIATIONS

Competent Authority	
Contractors Environmental Officer	
Developer Environmental Officer	
Developer Project Manager	
Developer Site Supervisor	
Environmental Audit Report	
Environmental Conservation Act No. 73 of	
1989	
Environmental Control Officer	
Environmental Authorisation	
Environmental Impact Assessment	
Emergency Response Action Plan	
Environmental Management Programme	
Report	
Environmental Assessment Practitioner	
Fire Protection Agency	
Hazardous chemical Substance	
National Environmental Management Act,	
1998 (Act No. 107 of 1998)	
National Environmental Management:	
Biodiversity Act, 2004 (Act No. 10 of 2004)	
National Environmental Management:	
Waste Act, 2008 (Act No. 59 of 2008)	
Material Safety Data Sheet	
Registered Interested and affected parties	

#### 3. ROLES AND RESPONSIBILITIES FOR ENVIRONMENTAL MANAGEMENT PROGRAMME (EMPr) IMPLEMENTATION

The effective implementation of this generic EMPr is dependent on established and clear roles, responsibilities and reporting lines within an institutional framework. This section of the EMPr gives guidance to the various environmental roles and reporting lines, however, project specific requirements will ultimately determine the need for the appointment of specific person(s) to undertake specific roles and or responsibilities. As such, it must be noted that in the event that no specific person, for example, an environmental control officer (ECO) is appointed, the holder of the EA remains responsible for ensuring that the duties indicated in this document for action by the ECO are undertaken.

**Table 1:** Guide to roles and responsibilities for implementation of an EMPr

Responsible Person(s)	Role and Responsibilities
Developer's Project Manager (DPM)	Role The Project Developer is accountable for ensuring compliance with the EMPr and any conditions of approval from the competent authority (CA). Where required, an environmental control officer (ECO) must be contracted by the Project Developer to objectively monitor the implementation of the EMPr according to relevant environmental legislation, and the conditions of the environmental authorisation (EA). The Project Developer is further responsible for providing and giving mandate to enable the ECO to perform responsibilities, and he must ensure that the ECO is integrated as part of the project team while remaining independent.  Responsibilities
	<ul> <li>Be fully conversant with the conditions of the EA;</li> <li>Ensure that all stipulations within the EMPr are communicated and adhered to by the Developer and its Contractor(s);</li> <li>Issuing of site instructions to the Contractor for corrective actions required;</li> <li>Monitor the implementation of the EMPr throughout the project by means of site inspections and meetings. Overall management of the project and EMPr implementation; and</li> <li>Ensure that periodic environmental performance audits are undertaken on the project implementation.</li> </ul>

Responsible Person(s)	Role and Responsibilities
Developer Site Supervisor (DSS)	Role The DSS reports directly to the DPM, oversees site works, liaises with the contractor(s) and the ECO. The DSS is responsible for the day to day implementation of the EMPr and for ensuring the compliance of all contractors with the conditions and requirements stipulated in the EMPr.
	Responsibilities  - Ensure that all contractors identify a contractor's Environmental Officer (cEO);  - Must be fully conversant with the conditions of the EA. Oversees site works, liaison with Contractor, DPM and ECO;
	<ul> <li>Must ensure that all landowners have the relevant contact details of the site staff, ECO and cEO;</li> <li>Issuing of site instructions to the Contractor for corrective actions required;</li> <li>Will issue all non-compliances to contractors; and</li> <li>Ratify the Monthly Environmental Report.</li> </ul>
Environmental Control Officer (ECO)	Role The ECO should have appropriate training and experience in the implementation of environmental management specifications. The primary role of the ECO is to act as an independent quality controller and monitoring agent regarding all environmental concerns and associated environmental impacts. In this respect, the ECO is to conduct periodic site inspections, attend regular site meetings, pre-empt problems and suggest mitigation and be available to advise on incidental issues that arise. The ECO is also required to conduct compliance audits, verifying the monitoring reports submitted by the cEO. The ECO provides feedback to the DSS and Project Manager regarding all environmental matters. The Contractor, cEO and dEO are answerable to the Environmental Control Officer for non-compliance with the Performance Specifications as set out in the EA and EMPr.
	The ECO provides feedback to the DSS and Project Manager, who in turn reports back to the Contractor and potential and Registered Interested &Affected Parties' (RI&AP's), as required. Issues of non-compliance raised by the ECO must be taken up by the Project Manager, and resolved with the Contractor as per the conditions of his contract. Decisions regarding environmental procedures, specifications and requirements which have a cost implication (i.e. those that are deemed to be a variation, not allowed for in the

Responsible Person(s)	Role and Responsibilities
	Performance Specification) must be endorsed by the Project Manager. The ECO must also, as specified by the EA, report to the relevant CA as and when required.
	Responsibilities  The responsibilities of the ECO will include the following:  - Be aware of the findings and conclusions of all EA related to the development;  - Be familiar with the recommendations and mitigation measures of this EMPr;  - Be conversant with relevant environmental legislation, policies and procedures, and ensure compliance with them;  - Undertake regular and comprehensive site inspections / audits of the construction site according to
	<ul> <li>the generic EMPr and applicable licenses in order to monitor compliance as required;</li> <li>Educate the construction team about the management measures contained in the EMPr and environmental licenses;</li> <li>Compilation and administration of an environmental monitoring plan to ensure that the environmental management measures are implemented and are effective;</li> <li>Monitoring the performance of the Contractors and ensuring compliance with the EMPr and associated Method Statements;</li> </ul>
	<ul> <li>In consultation with the Developer Site Supervisor order the removal of person(s) and/or equipment which are in contravention of the specifications of the EMPr and/or environmental licenses;</li> <li>Liaison between the DPM, Contractors, authorities and other lead stakeholders on all environmental concerns;</li> </ul>
	<ul> <li>Compile a regular environmental audit report highlighting any non-compliance issues as well as satisfactory or exceptional compliance with the EMPr;</li> <li>Validating the regular site inspection reports, which are to be prepared by the contractor Environmental Officer (cEO);</li> </ul>
	<ul> <li>Checking the cEO's record of environmental incidents (spills, impacts, legal transgressions etc.) as well as corrective and preventive actions taken;</li> <li>Checking the cEO's public complaints register in which all complaints are recorded, as well as action taken;</li> </ul>

Responsible Person(s)	Role and Responsibilities		
	<ul> <li>Assisting in the resolution of conflicts;</li> <li>Facilitate training for all personnel on the site – this may range from carrying out the training, to reviewing the training programmes of the Contractor;</li> <li>In case of non-compliances, the ECO must first communicate this to the Senior Site Supervisor, who has the power to ensure this matter is addressed. Should no action or insufficient action be taken, the ECO may report this matter to the authorities as non-compliance;</li> <li>Maintenance, update and review of the EMPr;</li> <li>Communication of all modifications to the EMPr to the relevant stakeholders.</li> </ul>		
developer Environmental Officer (dEO)	Role  The dEOs will report to the Project Manager and are responsible for implementation of the EMPr, environmental monitoring and reporting, providing environmental input to the Project Manager and Contractor's Manager, liaising with contractors and the landowners as well as a range of environmental coordination responsibilities.		
	Responsibilities  - Be fully conversant with the EMPr;  - Be familiar with the recommendations and mitigation measures of this EMPr, and implement these measures;  - Ensure that all stipulations within the EMPr are communicated and adhered to by the Employees, Contractor(s);  - Confine the development site to the demarcated area;  - Conduct environmental internal audits with regards to EMPr and authorisation compliance (on cEO);  - Assist the contractors in addressing environmental challenges on site;  - Assist in incident management:  - Reporting environmental incidents to developer and ensuring that corrective action is taken, and lessons learnt shared;  - Assist the contractor in investigating environmental incidents and compile investigation reports;  - Follow-up on pre-warnings, defects, non-conformance reports;		

Role and Responsibilities
<ul> <li>Measure and communicate environmental performance to the Contractor;</li> <li>Conduct environmental awareness training on site together with ECO and cEO;</li> <li>Ensure that the necessary legal permits and / or licenses are in place and up to date;</li> <li>Acting as Developer's Environmental Representative on site and work together with the ECO and contractor;</li> </ul>
Role  The Contractor appoints the cEO and has overall responsibility for ensuring that all work, activities, and actions linked to the delivery of the contract are in line with the EMPr and that Method Statements are implemented as described. External contractors must ensure compliance with this EMPr while performing the onsite activities as per their contract with the Project Developer. The contractors are required, where specified, to provide Method Statements setting out in detail how the impact management actions contained in the EMPr will be implemented during the development or expansion of substation infrastructure for the transmission and distribution of electricity activities.  Responsibilities  - project delivery and quality control for the development services as per appointment; - employ a suitably qualified person to monitor and report to the Project Developer's appointed person on the daily activities on-site during the construction period; - ensure that safe, environmentally acceptable working methods and practices are implemented and that equipment is properly operated and maintained, to facilitate proper access and enable any operation to be carried out safely; - attend on site meeting(s) prior to the commencement of activities to confirm the procedure and designated activity zones; - ensure that contractors' staff repair, at their own cost, any environmental damage as a result of a

Responsible Person(s)	Role and Responsibilities
contractor Environmental Officer (cEO)	Role Each Contractor affected by the EMPr should appoint a cEO, who is responsible for the on-site implementation of the EMPr (or relevant sections of the EMPr). The Contractor's representative can be the site agent; site engineer; a dedicated environmental officer; or an independent consultant. The Contractor must ensure that the Contractor's Representative is suitably qualified to perform the necessary tasks and is appointed at a level such that she/he can interact effectively with other site Contractors, labourers, the Environmental Control Officer and the public. As a minimum the cEO shall meet the following criteria:
	<ul> <li>Responsibilities</li> <li>Be on site throughout the duration of the project and be dedicated to the project;</li> <li>Ensure all their staff are aware of the environmental requirements, conditions and constraints with respect to all of their activities on site;</li> <li>Implementing the environmental conditions, guidelines and requirements as stipulated within the EA, EMPr and Method Statements;</li> <li>Attend the Environmental Site Meeting;</li> <li>Undertaking corrective actions where non-compliances are registered within the stipulated timeframes;</li> <li>Report back formally on the completion of corrective actions;</li> <li>Assist the ECO in maintaining all the site documentation;</li> <li>Prepare the site inspection reports and corrective action reports for submission to the ECO;</li> <li>Assist the ECO with the preparing of the monthly report; and</li> <li>Where more than one Contractor is undertaking work on site, each company appointed as a Contractor will appoint a cEO representing that company.</li> </ul>

#### 4. ENVIRONMENTAL DOCUMENTATION REPORTING AND COMPLIANCE

To ensure accountable and demonstrated implementation of the EMPr, a number of reporting systems, documentation controls and compliance mechanisms must be in place for all substation infrastructure projects as a minimum requirement.

#### 4.1 Document control/Filing system

The holder of the EA is solely responsible for the upkeep and management of the EMPr file. As a minimum, all documentation detailed below will be stored in the EMPr file. A hard copy of all documentation shall be filed, while an electronic copy may be kept where relevant. A duplicate file will be maintained in the office of the DSS (where applicable). This duplicate file must remain current and up-to-date. The filing system must be updated and relevant documents added as required. The EMPr file must be made available at all times on request by the CA or other relevant authorities. The EMPr file will form part of any environmental audits undertaken as prescribed in the EIA Regulations.

#### 4.2 Documentation to be available

At the outset of the project the following preliminary list of documents shall be placed in the filing system and be accessible at all times:

- Full copy of the signed EA from the CA in terms of NEMA, granting approval for the development or expansion;
- Copy of the generic and site specific EMPr as well as any amendments thereof;
- Copy of declaration of implementing generic EMPr and subsequent approval of site specific EMPr and amendments thereof;
- All method statements;
- Completed environmental checklists;
- Minutes and attendance register of environmental site meetings;
- An up-to-date environmental incident log;
- A copy of all instructions or directives issued;
- A copy of all corrective actions signed off. The corrective actions must be filed in such a way that a clear reference is made to the non-compliance record;
- Complaints register.

#### 4.3 Weekly Environmental Checklist

The ECOs are required to complete a Weekly Environmental Checklist, the format of which is to be agreed prior to commencement of the activity. The ECOs are required to sign and date the checklist, retain a copy in the EMPr file and submit a copy of the completed checklist to the DSS on a weekly basis.

The checklists will form the basis for the Monthly Environmental Reports. Copies of all completed checklists will be attached as Annexures to the Environmental Audit Report as required in terms of the EIA Regulations.

#### 4.4 Environmental site meetings

Minutes of the environmental site meetings shall be kept. The minutes must include an attendance register and will be attached to the Monthly Report that is distributed to attendees. Each set of minutes must clearly record "Matters for Attention" that will be reviewed at the next meeting.

#### 4.5 Required Method Statements

The method statement will be done in such detail that the ECOs are enabled to assess whether the contractor's proposal is in accordance with the EMPr.

The method statement must cover applicable details with regard to:

- development procedures;
- materials and equipment to be used;
- getting the equipment to and from site;
- how the equipment/ material will be moved while on site;
- how and where material will be stored:
- the containment (or action to be taken if containment is not possible) of leaks or spills of any liquid or material that may occur;
- timing and location of activities;
- compliance/ non-compliance with the EMPr; and
- any other information deemed necessary by the ECOs.

Unless indicated otherwise by the Project Manager, the Contractor shall provide the following method statements to the Project Manager no less than 14 days prior to the commencement date of the activity:

- Site establishment Camps, Lay-down or storage areas, satellite camps, infrastructure;
- Batch plants;
- Workshop or plant servicing;
- Handling, transport and storage of Hazardous Chemical Substance's;
- Vegetation management Protected, clearing, aliens, felling;
- Access management Roads, gates, crossings etc.;
- Fire plan;
- Waste management transport, storage, segregation, classification, disposal (all waste streams);
- Social interaction complaints management, compensation claims, access to properties etc.;
- Water use (source, abstraction and disposal), access and all related information, crossings and mitigation;
- Emergency preparedness Spills, training, other environmental emergencies;
- Dust and noise management methodologies;
- Fauna interaction and risk management only if the risk was identified wildlife interaction especially on game farms; and
- Heritage and palaeontology management.

The ECOs shall monitor and ensure that the contractors perform in accordance with these method statements. Completed and agreed method statements between the holder of the EA and the contractor shall be captured in Appendix 1.

#### 4.6 Environmental Incident Log (Diary)

The ECOs are required to maintain an up-to-date and current Environmental Incident Log (environmental diary). The Environmental Incident Log is a means to record all environmental incidents and/or all non-compliance notice would not be issued. An environmental incident is defined as:

- Any deviation from the listed impact management actions (listed in this EMPr) that
  may be addressed immediately by the ECOs. (For example a contractor's staff
  member littering or a drip tray that has not been emptied);
- Any environmental impact resulting from an action or activity by a contractor in contravention of the environmental stipulations and guidelines listed in the EMPr which as a single event would have a minor impact but which if cumulative and continuous would have a significant effect (for example no toilet paper available in the ablutions for an afternoon); and
- General environmental information such as road kills or injured wildlife.

The ECOs are to record all environmental incidents in the Environmental Incident Log. All incidents regardless of severity must be reported to the Developer. The Log is to be kept in the EMPr file and at a minimum the following will be recorded for each environmental incident:

- The date and time of the incident;
- Description of the incident;
- The name of the Contractor responsible;
- The incident must be listed as significant or minor;
- If the incident is listed as significant, a non-compliance notice must be issued, and recorded in the log;
- Remedial or corrective action taken to mitigate the incident; and
- Record of repeat minor offences by the same contractor or staff member.

The Environmental Incident Log will be captured in the EAR.

#### 4.7 Non-compliance

A non-compliance notice will be issued to the responsible contractor by the ECOs via the DSS or Project Manager. The non-compliance notice will be issued in writing; a copy filed in the EMPr file and will at a minimum include the following:

- Time and date of the non-compliance;
- Name of the contractor responsible;
- Nature and description of the non-compliance;
- Recommended / required corrective action; and
- Date by which the corrective action to be completed.
- The contractors shall act immediately when a notice of non-compliance is received and correct whatever is the cause for the issuing of the notice. Complaints received regarding activities on the development site pertaining to the environment shall be

recorded in a dedicated register and the response noted with the date and action taken. The ECO should be made aware of any complaints. Any non-compliance with the agreed procedures of the EMPr is a transgression of the various statutes and laws that define the manner by which the environment is managed. Failure to redress the cause shall be reported to the relevant CA for them to deal with the transgression, as it deems fit. The contractor is deemed not to have complied with the EMPr if, inter alia, There is a deviation from the environmental conditions, impact management outcomes and impact management actions activities, as approved in generic and site specific EMPr as relevant as set out in the EMPr, which deviation has, or may cause, an environmental impact.

#### 4.8 Corrective action records

For each non-compliance notice issued, a documented corrective action must be recorded. On receiving a non-compliance notice from the DSS, the contractor's cEO will ensure that the corrective actions required take place within the stipulated timeframe. On completion of the corrective action the cEO is to issue a Corrective Action Report in writing to the ECOs. If satisfied that the corrective action has been completed, the ECOs are to sign-off on the Corrective Action Report, and attach the report to the non-compliance notice in the EMPr file. A corrective action is considered complete once the report has signed off by the ECOs.

#### 4.9 Photographic record

A digital photographic record will be kept. The photographic record will be used to show before, during and post rehabilitation evidence of the project as well used in cases of damages claims if they arise. Each image must be dated and a brief description note attached.

#### The Contractor shall:

1. Allow the ECOs access to take photographs of all areas, activities and actions.

The ECOs shall keep an electronic database of photographic records which will include:

- 1. Pictures of all areas designated as work areas, camp areas, development sites and storage areas taken before these areas are set up;
- 2. All bunding and fencing;
- 3. Road conditions and road verges;
- 4. Condition of all farm fences;
- 5. Topsoil storage areas;
- 6. All areas to be cordoned off during construction;
- 7. Waste management sites;
- 8. Ablution facilities (inside and out);
- 9. Any non-conformances deemed to be "significant";
- 10. All completed corrective actions for non-compliances;
- 11. All required signage;
- 12. Photographic recordings of incidents;
- 13. All areas before, during and post rehabilitation; and
- 14. Include relevant photographs in the Final Environmental Audit Report.

#### 4.10 Complaints register

The ECOs shall keep a current and up-to-date complaints register. The complaints register is to be a record of all complaints received from communities, stakeholders and individuals. The Complaints Record shall:

- 1. Record the name and contact details of the complainant;
- 2. Record the time and date of the complaint;
- 3. Contain a detailed description of the complaint;
- 4. Where relevant and appropriate, contain photographic evidence of the complaint or damage (ECOs to take relevant photographs); and
- 5. Contain a copy of the ECOs written response to each complaint received and keep a record of any further correspondence with the complainant. The ECO's written response will include a description of any corrective action to be taken and must be signed by the Contractor, ECO and affected party. Where a damage claim is issued by the complainant, the ECOs shall respond as described in (section 4.11) below.

#### 4.11 Claims for damages

In the event that a Claim for Damages is submitted by a community, landowner or individual, the ECOs shall:

- 1. Record the full detail of the complaint as described in (section 4.10) above;
- 2. The DPM will evaluate the claim and associated damage and submit the evaluation to the Senior Site Representative for approval;
- 3. Following consideration by the DPM, the claim is to be resolved and settled immediately, or the reason for not accepting the claim communicated in writing to the claimant. Should the claimant not accept this, the ECO shall, in writing report the incident to the Developer's negotiator and legal department; and
- 4. A formal record of the response by the ECOs to the claimant as well as the rectification of the method of making payments not amount will be recorded in the EMPr file.

#### 4.12 Interactions with affected parties

Open, transparent and good relations with affected landowners, communities and regional staff are an essential aspect to the successful management and mitigation of environmental impacts.

#### The ECOs shall:

- 1. Ensure that all queries, complaints and claims are dealt within an agreed timeframe;
- 2. Ensure that any or all agreements are documented, signed by all parties and a record of the agreement kept in the EMPr file;
- 3. Ensure that a complaints telephone numbers are made available to all landowners and affected parties; and
- 4. Ensure that contact with affected parties is courteous at all times;

#### 4.13 Environmental audits

Internal environmental audits of the activity and implementation of the EMPr must be undertaken. The findings and outcomes included in the EMPr file and submitted to the CA at intervals as indicated in the EA.

The ECOs must prepare a monthly EAR. The report will be tabled as the key point on the agenda of the Environmental Site Meeting. The Report is submitted for acceptance at the meeting and the final report will be circulated to the Project Manager and filed in the EMPr file. At a frequency determined by the EA, the ECOs shall submit the monthly reports to the CA. At a minimum the monthly report is to cover the following:

- Weekly Environmental Checklists;
- Deviations and non-compliances with the checklists;
- Non-compliances issued;
- Completed and reported corrective actions;
- Environmental Monitoring;
- General environmental findings and actions; and
- Minutes of the Bi-monthly Environmental Site Meetings.

#### 4.14 Final environmental audits

On final completion of the rehabilitation and/or requirements of the EA a final EAR is to be prepared and submitted to the CA. The EAR must comply with Appendix 7 of the EIA Regulations.

#### PART B: SECTION 1: Pre-approved generic EMPr template

#### 5. IMPACT MANAGEMENT OUTCOMES AND IMPACT MANAGEMENT ACTIONS

This section provides a pre-approved generic EMPr template with aspects that are common to the development of substation infrastructure for the transmission and distribution of electricity. There is a list of aspects identified for the development or expansion of substation infrastructure for the transmission and distribution of electricity, and for each aspect a set of prescribed impact management outcomes and associated impact management actions have been identified. Holders of EAs are responsible to ensure the implementation of these outcomes and actions for all projects as a minimum requirement, in order to mitigate the impact of such aspects identified for the development or expansion of substation infrastructure for the transmission and distribution of electricity.

The template provided below is to be completed by providing the information under each heading for each environmental impact management action.

The completed template must be signed and dated on each page by both the contractor and the holder of the EA prior to commencement of the activity. The method statements prepared and agreed to by the holder of the EA must be appended to the template as Appendix 1. Each method statement must also be duly signed and dated on each page by the contactor and the holder of the EA. This template, once signed and dated, is legally binding. The holder of the EA will remain responsible for its implementation.

#### 5.1 Environmental awareness training

Impact management outcome: All onsite staff are aware and understands the individual responsibilities in terms of this EMPr.

Impact Management Actions	Implementation	n		Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
All staff must receive environmental awareness training prior to commencement of the activities;	ECO / cEO / dEO	Hold environmental awareness training workshops	Pre-construction Construction and Operations	ECO dEO	Monthly and as and when required	Attendance register and training minutes / notes for the record
<ul> <li>The Contractor must allow for sufficient sessions to train all personnel with no more than 20 personnel attending each course;</li> </ul>	Contractor	Scheduling of sufficient sessions through consultation with the ECO / cEO / dEO	Pre-construction Construction	ECO dEO	Monthly and as and when required	Attendance register and training minutes / notes for the record
Refresher environmental awareness training is available as and when required;	cEO / dEO in consultation with the ECO	Hold refresher environmental awareness training workshops	During the construction phase	ECO dEO	Monthly and as and when required	Attendance register and training minutes / notes for the record
<ul> <li>All staff are aware of the conditions and controls linked to the EA and within the EMPr and made aware of their individual roles and responsibilities in achieving compliance with the EA and EMPr;</li> </ul>	cEO / dEO	Hold training workshops and ensure that the EA and EMPr is readily available	During the construction phase	ECO dEO	Monthly and as and when required	Attendance register and training minutes / notes for the record

- The Contractor must erect and maintain information	Contractor	Develop and	Pre-construction	ECO	Monthly	Photographic
posters at key locations on site, and the posters must		place appropriate	Construction	dEO	,	record
include the following information as a minimum:		posters at key		cEO		
a) Safety notifications; and		locations		010		
b) No littering.						
- Environmental awareness training must include as a	cEO / dEO in	Develop	Pre-construction	ECO	Prior to the	Environment
minimum the following:	consultation	environmental	Construction	dEO	commence	al awareness
a) Description of significant environmental	with the ECO	awareness training			ment of the	training
impacts, actual or potential, related to their		material which			environmen	material
work activities;		covers the			tal	requirements
b) Mitigation measures to be implemented		minimum			awareness	checklist
when carrying out specific activities;		requirements			training	
c) Emergency preparedness and response						
procedures;						
d) Emergency procedures;						
e) Procedures to be followed when working						
near or within sensitive areas;						
f) Wastewater management procedures;						
g) Water usage and conservation;						
h) Solid waste management procedures;						
i) Sanitation procedures;						
j) Fire prevention; and						
k) Disease prevention.						
A record of all environmental awareness training courses	ECO / cEO /	Filing system	During the	ECO	Monthly	Completed
undertaken as part of the EMPr must be available;	dEO	including all proof	construction	dEO		and up to
		of training (i.e.	phase			date filing
		attendance				system with
		register and				proof of
		training minutes /				training
		notes for the				
		record)				
- Educate workers on the dangers of open and/or		Develop	Pre-construction	ECO	Prior to the	Environment
unattended fires;	consultation	environmental	Construction	dEO	commence	al awareness
	with the ECO	awareness training			ment of the	training

		material which				environmen	material
		covers the				tal	requirements
		dangers of open				awareness	checklist
		and/or				training	
		unattended fire					
<ul> <li>A staff attendance register of all staff to have received</li> </ul>	ECO / cEO /	Filing system	During	the	ECO	Monthly	Completed
environmental awareness training must be available.	dEO	including all proof	construction		dEO		and up to
		of training (i.e.	phase				date filing
		attendance					system
		register)					inclusive of all
							attendance
							registers
- Course material must be available and presented in	ECO / cEO /	Develop	During	the	ECO	Monthly	Environment
appropriate languages that all staff can understand.	dEO	environmental	construction		dEO		al awareness
		awareness training	phase				training
		material in the					material
		required					requirements
		languages.					checklist and
		Training material					the training
		must by readily					register which
		available to all					must indicate
		staff					the language
							of the training

#### 5.2 Site Establishment development

**Impact management outcome:** Impacts on the environment are minimised during site establishment and the development footprint are kept to demarcated development area.

Impact Management Actions	Implementatio	Implementation			Monitoring		
	Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of	
	person	implementation	implementation	person		compliance	
A method statement must be provided by the contractor prior to any onsite activity that includes the layout of the construction camp in the form of a plan showing the location of key infrastructure and services (where applicable), including but not limited to offices, overnight vehicle parking areas, stores, the workshop, stockpile and lay down areas, hazardous materials storage areas (including fuels), the batching plant (if one is located at the construction camp), designated access routes, equipment cleaning areas and the placement of	Contractor	Development of an appropriate method statement	Pre-construction	ECO dEO	Once, prior to constructio n	Availability of the method statement which complies with the minimum requirements listed	
staff accommodation, cooking and ablution facilities, waste and wastewater management;							
<ul> <li>Location of camps must be within approved area to ensure that the site does not impact on sensitive areas identified in the environmental assessment or site walk through;</li> </ul>	DPM	Place construction camps outside of sensitive areas identified in the Basic Assessment Report	Pre-construction Construction	ECO dEO	Once, prior to constructio n	Availability of a layout and sensitivity map indicating avoidance of sensitive areas	
Sites must be located where possible on previously disturbed areas;	DPM	Place site outside of sensitive areas and within previously disturbed areas	Pre-construction	ECO dEO	Once, prior to constructio n	Availability of a layout and sensitivity map indicating	

Impact Management Actions	Implementation	Implementation				Monitoring		
	Responsible person	Method of implementation		Timeframe implementation	for on	Responsible person	Frequency	Evidence of compliance
		identified in the B. Report	A					avoidance of sensitive areas and placement within disturbed areas
The camp must be fenced in accordance with Section     5.5: Fencing and gate installation; and	DPM	Design and implementation of fencing as per the requirements of Section 5.5 of this EMPr	C	re- onstruction & Construction	ECO dEO		Once, prior to construction and once during the construction of the fencing	The camp is fenced in accordance with Section 5.5 of this EMPr
The use of existing accommodation for contractor staff, where possible, is encouraged.	DPM	Identify existing accommodati on for contactor staff	C	re- onstruction & Construction	ECO dEO		Once, prior to construction	Contractor staff are accommodat ed in existing accomodatio n

#### 5.3 Access restricted areas

**Impact management outcome:** Access to restricted areas prevented.

Impact Management Actions	Implementatio	n		Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul> <li>Identification of access restricted areas is to be informed by the environmental assessment, site walk through and any additional areas identified during development;</li> </ul>	dEO / cEO in consultation with the ECO	Spatially demarcate access restricted areas informed by the BA Report	Pre-construction	ECO	Once, prior to constructio n	Access restricted areas are identified and provided in a spatial format
<ul> <li>Erect, demarcate and maintain a temporary barrier with clear signage around the perimeter of any access restricted area, colour coding could be used if appropriate; and</li> </ul>	dEO / cEO in consultation with the ECO	Erect appropriate temporary barriers around access restricted areas	At the commencement and for the duration of the construction phase	ECO	Monthly	Access restricted areas are closed-off through temporary barriers and barriers are maintained to a sufficient standard
<ul> <li>Unauthorised access and development related activity inside access restricted areas is prohibited.</li> </ul>	Contractor / dEO / cEO	Erect appropriate temporary barriers around access restricted areas and provide clear signage of restricted status	During the construction phase	ECO	Monthly, and as and when required	Photographic evidence and notes of compliance that no unauthorised access or

Impact Management Actions	Implementation			Monitoring		
	Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of
	person	implementation	implementation	person		compliance
						activities has
						taken place
						within the
						access
						restricted
						areas

#### 5.4 Access roads

Impact management outcome: Minimise impact to the environment through the planned and restricted movement of vehicles on site.

Impact Management Actions	Implementatio	n		Monitoring	Monitoring		
	Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of	
	person	implementation	implementation	person		compliance	
<ul> <li>An access agreement must be formalised and signed by</li> </ul>	DPM	Develop access	Pre-construction	dEO	Once, prior	Availability of	
the DPM, Contractor and landowner before	Contractor	agreements with		ECO	to	approved	
commencing with the activities;		the affected			constructio	and signed	
		landowners.			n	negotiations	
		Ensure that					
		agreements are					
		approved and					
		signed					
- All private roads used for access to the servitude must be	Contractor	Undertake	During the	cEO / ECO	Weekly	Photographic	
maintained and upon completion of the works, be left in		maintenance	construction			record of the	
at least the original condition		activities on	phase			pre-	
		private roads used				construction	
		for construction as				condition	

Impact Management Actions	Implementatio	n		Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
		degradation takes place				and degradation of roads, and records of the implementati on and effectiveness of maintenance activities
All contractors must be made aware of all these access routes.	dEO / cEO	Develop a map illustrating all access routes associated with the project and present and provide the map to all contractors	Pre-construction Construction	ECO	Once, prior to constructio n	Access routes map readily available
Any access route deviation from that in the written agreement must be closed and re-vegetated immediately, at the contractor's expense;	Contractor	All access routes developed that are not in-line with the access route agreements must be closed and rehabilitated to the pre-disturbance state	Construction and Rehabilitation	cEO ECO	Bi-weekly (every two weeks)	Photographic record of the closure of access roads and revegetation
<ul> <li>Maximum use of both existing servitudes and existing roads must be made to minimize further disturbance through the development of new roads;</li> </ul>	Contractor (and Eskom maintenance	Existing access routes to be used must be specified	Construction and operation	cEO Operation and	Weekly	Implementati on of the

Impact Management Actions	Implementatio	n		Monitoring		
	Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of
	person	implementation	implementation	person		compliance
	staff where	and the		maintenance		approved
	relevant to	development of		team		layout
	operation)	new roads must be				
		avoided as far as				
		possible				
- In circumstances where private roads must be used, the	dEO / cEO	Record the	During the	ECO	Prior to the	Photographic
condition of the said roads must be recorded in		conditions of	construction		use of	record and
accordance with section 4.9: photographic record; prior		private roads to be	phase		private	proof of the
to use and the condition thereof agreed by the		used (prior to use)			roads	road
landowner, the DPM, and the contractor;		as per the				conditions
		requirements of				agreed upon
		section 4.9 and				with the
		agree on the				relevant 
		required condition				parties
		of the roads with				
		the landowner, DPM and				
		DPM and contractor				
Access roads in flattish areas must follow fence lines and	DPM and	Design access	Pre-construction	ECO	Once	Implementati
tree belts to avoid fragmentation of vegetated areas or	Contractor	roads to follow	FIE-CONSTRUCTION		during the	on of the
croplands	Cormación	fence lines and			design and	approved
Cropianas		avoid vegetated			once prior	layout
		areas			to	layool
					constructio	
					n	
<ul> <li>Access roads must only be developed on pre-planned</li> </ul>	Contractor	Construction of	During the	ECO once	Once	Implementati
and approved roads.		access roads only	construction	during the	during the	on of the
		on pre-planned	phase	design	design and	approved
		and approved		dEO	weekly	layout
		access roads			during the	
					constructio	

Impact Management Actions	Implementation	n	Monitoring			
	Responsible Method of Timeframe for Re			Responsible	Frequency	Evidence of
	person	implementation	implementation	person	,	compliance
					n of access	
					roads	

#### 5.5 Fencing and Gate installation

**Impact management outcome:** Minimise impact to the environment and ensure safe and controlled access to the site through the erection of fencing and gates where required.

Impact Management Actions	Implementation	n	Monitoring			
		1	T		Ī	
	Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of
	person	implementation	implementation	person		compliance
<ul> <li>Use existing gates provided to gain access to all parts of</li> </ul>	Contractor	Identify and inform	Pre-construction &	dEO	Monthly	Existing gates
the area authorised for development, where possible;		all relevant staff of	Construction			are utilised on
		the existing gates				a frequent
		to be used				basis and
						only limited
						new access
						gates are
						developed
- Existing and new gates to be recorded and	ECO	Existing and new	During the	ECO	Once,	Photographic
documented in accordance with section 4.9:		gates will be	construction		when the	record of the
photographic record;		recorded and	phase		constructio	existing and
		documented as			n of all new	new gates as
		per the			gates have	per the
		requirements of			been	requirements
		section 4.9			completed	of section4.9

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
All gates must be fitted with locks and be kept locked at all times during the development phase, unless otherwise agreed with the landowner;	Contractor	Ensure all relevant gates are fitted with locks and are always locked	Construction and Operation	ECO monthly, Operation and maintenance team and cEO	Bi-weekly (every second week)	All gates are locked and no complaints from landowners are received in this regard
<ul> <li>At points where the line crosses a fence in which there is no suitable gate within the extent of the line servitude, on the instruction of the DPM, a gate must be installed at the approval of the landowner;</li> </ul>	dEO	Install new gates where required with the approval of the affected landowner	During the construction phase	ECO	Once, prior to constructio n and during the constructio n phase, as and when required	New gates are installed where the power line crosses fences
Care must be taken that the gates must be so erected that there is a gap of no more than 100 mm between the bottom of the gate and the ground;	Contractor	Install gates in a manner so that there is a gap of no more than 100mm between the bottom of the gate and the ground	During the construction phase	CEO	Once, during the erection of the gates during the constructio n phase	New gates installed as per the requirement
Where gates are installed in jackal proof fencing, a suitable reinforced concrete sill must be provided beneath the gate;	Contractor	Implement a reinforced concrete sill beneath gates installed for jackal proofing	During the construction phase	CEO	Once, during the erection of the gates during the constructio n phase	New gates installed as per the requirement

Impact Management Actions	Implementatio	n		Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
Original tension must be maintained in the fence wires;	Contractor	Maintain original tension of fences through required activities	During the construction phase	ECO	Monthly	No tension reduction on fence wires
All gates installed in electrified fencing must be re- electrified;	Contractor	Electrify gates installed in electrified fencing	During the construction phase	ECO	Once, during the erection of the gates during the constructio n phase	Gates installed in electrified fencing is electrified
<ul> <li>All demarcation fencing and barriers must be maintained in good working order for the duration of the development activities;</li> </ul>	Contractor	Undertake maintenance activities on fences and barriers	During the construction phase	ECO	Monthly	Photographic record of maintained fences and barriers
<ul> <li>Fencing must be erected around the camp, batching plants, hazardous storage areas, and all designated access restricted areas, where applicable;</li> </ul>	Contractor	Fence construction camps, batching plants, hazardous storage areas and access restricted areas. Avoid sensitive flora	During the construction phase	ECO	Once during the erection of fencing	Photographic record of fences erected
<ul> <li>Any temporary fencing to restrict the movement of life- stock must only be erected with the permission of the land owner.</li> </ul>	dEO/cEO Contractor	Obtain written approval from the relevant landowner where temporary fencing is required to	During the construction phase	ECO	To be monitored as temporary fencing is required	Written approval to be provided by the dEO

Impact Management Actions	Implementatio	n	Monitoring			
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
	·	restrict livestock movement		·		
All fencing must be developed of high quality material bearing the SABS mark;	Contractor	Make use of high quality materials approved by SABS	During the construction phase	CEO	To be monitored as fencing is erected during the constructio n phase	Use of high quality materials for fencing approved by SABS
The use of razor wire as fencing must be avoided;	Contractor	Razor wire must not be sourced or used for the erection of fencing	During the construction phase	ECO	To be monitored as fencing is erected during the constructio n phase	Fences erected do not make use of razor wire
Fenced areas with gate access must remain locked after hours, during weekends and on holidays if staff is away from site. Site security will be required at all times;	DSS and Contractor	Ensure fenced areas are locked as required through the implementation of a formalised process. Appoint a security company	During the construction phase	CEO	Weekly and as and when required	Fences are locked and no complaints from landowners are received. A security company is appointed
On completion of the development phase all temporary fences are to be removed;	Contractor	Removal of all temporary fences	At the end of the Construction Phase	ECO dEO	Once, following the completion	No temporary fences associated

Impact Management Actions	Implementatio	n		Monitoring	Monitoring			
	Responsible person	Method o implementation	f Timeframe	Responsible person	Frequency	Evidence of compliance		
					of the constructio n phase	with the project is present following the completion of the construction phase		
The contractor must ensure that all fence uprights are appropriately removed, ensuring that no uprights are cut at ground level but rather removed completely.	Contractor	Appropriate removal of a fence uprights	At the end Construction Phase	ECO dEO	Once, following the completion of the constructio n phase	No fence uprights associated with the project is present following the completion of the construction phase		

# 5.6 Water Supply Management

Impact management outcome: Undertake responsible water usage.

Impact Management Actions	Implementatio	n		Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
All abstraction points or bore holes must be registered with the DWS and suitable water meters installed to ensure that the abstracted volumes are measured on a daily basis;	DPM and Contractor	Obtaining relevant registrations from DWS and installation of water meters	Pre-construction	CEO	To be monitored with the installation of water meters and daily during constructio n and operation	Use of high quality water meters
<ul> <li>The Contractor must ensure the following:</li> <li>a. The vehicle abstracting water from a river does not enter or cross it and does not operate from within the river;</li> <li>b. No damage occurs to the river bed or banks and that the abstraction of water does not entail stream diversion activities; and</li> <li>c. All reasonable measures to limit pollution or sedimentation of the downstream watercourse are implemented.</li> </ul>	Not applicable	e - water will not be ab	ostracted from a river			

Impact Management Actions	Implementation				Monitoring			
	Responsible	Method	of	Timeframe	for	Responsible	Frequency	Evidence of
	person	implemento	ation	implementation	on	person		compliance
<ul> <li>Ensure water conservation is being practiced by:</li> </ul>	Contractor /	Implement	the	During	the	ECO	Monthly,	Successful
a. Minimising water use during cleaning of equipment;	dEO / cEO in	required	water	construction			and as and	implementati
b. Undertaking regular audits of water systems; and	consultation	conservatio	n	phase			when	on of water
c. Including a discussion on water usage and	with the ECO	measures					required	conservation
conservation during environmental awareness training.		throughout	on-site					
d. The use of grey water is encouraged.		construction	า					
		processes						

### 5.7 Storm and waste water management

Impact management outcome: Impacts to the environment caused by storm water and wastewater discharges during construction are avoided.

Impact Management Actions	Implementation	n		Monitoring	Monitoring		
	Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of	
	person	implementation	implementation	person		compliance	
<ul> <li>Runoff from the cement/ concrete batching areas must</li> </ul>	Contractor	Implement	During the	cEO	Weekly	No	
be strictly controlled, and contaminated water must be		measures for the	construction			mismanage	
collected, stored and either treated or disposed of off-		control and	phase			ment of	
site, at a location approved by the project manager;		management of				runoff or	
		runoff				contaminate	
						d water due	
						to the	
						temporary	
						concrete	
						batching	
						plant	

Impact Management Actions	Implementation	n		Monitoring		
	Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of
	person	implementation	implementation	person	, ,	compliance
- All spillage of oil onto concrete surfaces must be	Contractor	Obtain approved	During the	ECO	Monthly	Availability of
controlled by the use of an approved absorbent	and cEO	absorbent material	Construction			approved
material and the used absorbent material disposed of at		and make use of	Phase			absorbent
an appropriate waste disposal facility;		licensed waste				material at
		disposal facilities				the
		for disposal of oil				construction
						site and proof
						of disposal of
						oil at licensed
						disposal
						facilities
Natural storm water runoff not contaminated during the	DPM in	Consultation	During the	ECO	As and	Proof of
development and clean water can be discharged	consultation	between the DPM	construction		when the	consultation
directly to watercourses and water bodies, subject to the	with the ECO	and the ECO to	phase		need arises	between the
Project Manager's approval and support by the ECO;		determine if water			to	DPM and
		can be			discharge	ECO and the
		discharged			natural	outcomes
		directly into water			stormwater	thereof to be
		bodies (where			runoff and	provided.
		present). The			clean water	Proof of
		necessary water				water quality
		quality testing must be undertaken				testing and the results
		prior to discharge				thereof.
Water that has been contaminated with suspended	DPM in	Consultation	During the	ECO	As and	Proof of
solids, such as soils and silt, may be released into	consultation	between the DPM	construction		when the	consultation
watercourses or water bodies only once all suspended	with the ECO	and the ECO to	phase		need arises	between the
solids have been removed from the water by settling out		determine if water	15.13.00		to	DPM and
these solids in settlement ponds. The release of settled		can be released			discharge	ECO and the
water back into the environment must be subject to the		following settling.			settled	outcomes
Project Manager's approval and support by the ECO.					water	

Method of	Timeframe for	Responsible	T	
		KO3POLISIDIO	Frequency	Evidence of
implementation	implementation	person		compliance
				thereof to be
				provided.
	implementation	препению	препению препению резон	ппретиенталот регзон

# 5.8 Solid and hazardous waste management

Impact management outcome: Wastes are appropriately stored, handled and safely disposed of at a recognised waste facility.

Impact Management Actions	Implementatio	n			Monitoring			
	Responsible	Method	of	Timeframe	for	Responsible	Frequency	Evidence of
	person	implementation	n	implementation	on	person		compliance
- All measures regarding waste management must be	Contractor	Develop	and	During	the	ECO	Monthly	Implementati
undertaken using an integrated waste management		implement	а	construction				on of the
approach;		waste		phase				waste
		management						management
		plan						plan and
								proof of
								waste
								management
								through proof
								of responsible
								disposal
- Sufficient, covered waste collection bins (scavenger and	Contractor	Provision	of	During	the	cEO	Weekly	Appropriate
weatherproof) must be provided;		appropriate w	/aste	construction				waste
		collection	bins	phase				collection

Impact Management Actions	Implementatio	n		Monitoring			
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance	
		strategically placed throughout the site				bins are available throughout the site	
A suitably positioned and clearly demarcated waste collection site must be identified and provided;	DPM and Contractor	Identify an appropriate location for the waste collection site which must be clearly demarcated through signage and temporary fencing	Design and Construction Phase	ECO	Once, prior to the commence ment of construction	A waste collection site is appropriately placed and demarcated	
The waste collection site must be maintained in a clean and orderly manner;	Contractor	Regular collection of waste and maintenance of the area must be undertaken as per the waste requirements for the project during construction	During the Construction Phase	cEO	Weekly	The waste collection site is maintained and clean	
Waste must be segregated into separate bins and clearly marked for each waste type for recycling and safe disposal;	Contractor	Provide separate and marked bins for the different waste types associated with the construction phase	During the Construction Phase	cEO	Weekly	Separate waste bins are available on site and waste generated is separated	

Impact Management Actions	Implementatio	n		Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance into the
Staff must be trained in waste segregation;	cEO / dEO in consultation with the ECO	Include waste segregation as part of the environmental awareness training material.	Pre-construction Construction	ECO	Monthly, and as and when required	relevant bins  Environmenta I awareness training material requirements checklist
Bins must be emptied regularly;	Contractor	Bins must be emptied before reaching total capacity and on a regular basis as required for the project	During the construction phase	ECO	Monthly	No mismanagem ent of bins.
General waste produced onsite must be disposed of at registered waste disposal sites/ recycling company;	Contractor	Disposal of general waste at licensed waste disposal facilities must be undertaken as per the waste management plan	During the construction phase	ECO	Monthly	Disposal certificates of disposal at licensed facilities to be provided
Hazardous waste must be disposed of at a registered waste disposal site;	Contractor	Disposal of hazardous waste at licensed waste disposal facilities must be undertaken as per the waste	During the construction phase	ECO	Monthly	Disposal certificates of disposal at licensed facilities to be provided

Impact Management Actions	Implementatio	n		Monitoring		
	Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of
	person	implementation	implementation	person		compliance
		management				
		plan				
<ul> <li>Certificates of safe disposal for general, hazardous and</li> </ul>	Contractor	Obtain certificates	During the	ECO	Monthly	Disposal
recycled waste must be maintained.		for safe disposal of	construction			certificates of
		waste	phase			disposal at
						licensed
						facilities to be
						provided and
						filed as part of
						the filing
						system

#### 5.9 Protection of watercourses and estuaries

Impact management outcome: Pollution and contamination of the watercourse environment and or estuary erosion are prevented.

Impact Management Actions	Implementation			Monitoring		
	Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of
	person	implementation	implementation	person		compliance
- All watercourses must be protected from direct or	Contractor	Contractor to	During the	cEO	Weekly	No incidents
indirect spills of pollutants such as solid waste, sewage,		undertake	construction			reported of
cement, oils, fuels, chemicals, aggregate tailings, wash		activities which	phase			spillage of
and contaminated water or organic material resulting		can cause spills of				pollutants
from the Contractor's activities;		pollutants outside				into
		of watercourses				watercourses

Impact Management Actions	Implementatio	n		Monitoring		
		T	1		_	1 =
	Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of
	person	implementation	implementation	person		compliance
- In the event of a spill, prompt action must be taken to	Contractor	Develop a	During the	cEO	Weekly	Feedback
clear the polluted or affected areas;	and cEO	management plan	construction			must be
		or process for	phase			provided by
		implementation				the
		should a spill take				contractor in
		place				terms of how
						the spill was
						handled and
						photographi
						c evidence
						of the
						feedback
						must be
						provided and
						kept on
						record
- Where possible, no development equipment must	cEO and		Construction	ECO	Once off	Confirm no
traverse any seasonal or permanent wetland	Contractor	been informed by	Phase		review that	development
		the environmental			the layout	equipment
		sensitivities as			used is the	traverses any
		determined by the			approved	seasonal or
		basic assessment			one	permanent
		and specialist				wetland as
		studies				per the
						authorised
						layout by
						reviewing the
						as-built
						designs
						(once-off

Impact Management Actions	Implementation			Monitoring		
	Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of
	person	implementation	implementation	person		compliance
						confirmation)
No return flow into the estuaries must be allowed and no disturbance of the Estuarine functional Zone should occur;	Not applicable – no estuaries present					
Development of permanent watercourse or estuary crossing must only be undertaken where no alternative access to tower position is available;	cEO, Contractor	Ensure that permenant crossings (access roads) are provided for access to the substations if no alternative crossing is available.	During the construction phase	CEO	Weekly	Ensure that permenant crossings are developed if there is no alternative.
There must not be any impact on the long term morphological dynamics of watercourses or estuaries;	DPM, cEO	Develop a management plan or process for implementation should a spill take place within a watercourse and ensure continuous monitoring	During the construction and operation phase	ECO, dEO	For all phases of the project life cycle (i.e. constructio n, operation, decommissi oning)	No incidents reported of spillage of pollutants into watercourses
Existing crossing points must be favored over the creation of new crossings (including temporary access)	DPM, cEO	Develop a management plan or process for implementation should a spill take	During the pre- construction and construction phase	ECO, dEO	During the construction phase of the project.	Existing crossing points utilised as opposed to new ones

Impact Management Actions	Implementatio	n		Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
		place within a watercourse and ensure continuous monitoring				created and no incidents reported of spillage of pollutants into watercourses
<ul> <li>When working in or near any watercourse or estuary, the following environmental controls and consideration must be taken:</li> <li>a) Water levels during the period of construction;</li> <li>No altering of the bed, banks, course or characteristics of a watercourse</li> <li>b) During the execution of the works, appropriate measures to prevent pollution and contamination of the riparian environment must be implemented e.g. including ensuring that construction equipment is well maintained;</li> <li>c) Where earthwork is being undertaken in close proximity to any watercourse, slopes must be stabilised using suitable materials, i.e. sandbags or geotextile fabric, to prevent sand and rock from entering the channel; and</li> <li>d) Appropriate rehabilitation and re-vegetation measures for the watercourse banks must be implemented timeously. In this regard, the banks should be appropriately and incrementally stabilised as soon as development allows.</li> </ul>	Contractor	Activities undertaken near watercourses must be in-line with and consider the specified environmental controls	During the construction phase	ECO	Monthly, and as and when required	No degradation of the watercourses and no incidents of destruction reported

# 5.10 Vegetation clearing

**Impact management outcome:** Vegetation clearing is restricted to the authorised development footprint of the proposed infrastructure.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
General:	<u>'</u>	<u>'</u>	<u> </u>		<u> </u>	<u>'</u>
Indigenous vegetation which does not interfere with the development must be left undisturbed;	cEO and contractor	Demarcate areas of indigenous vegetation to be avoided before clearance is	Construction and operation (i.e. for maintenance purposes)	ECO monthly, Operation and maintenance team weekly	Weekly, and as and when required	No unnecessary clearance of indigenous vegetation is
Protected or endangered species may occur on or near the development site. Special care should be taken not to damage such species;	Contractor	undertaken  Demarcate areas containing protected or endangered species to be avoided by construction activities	During the Construction Phase	ECO monthly and Operation and maintenance team weekly	Weekly, and as and when required	undertaken  No clearance of protected or endangered species other than those permitted to be removed
<ul> <li>Search, rescue and replanting of all protected and endangered species likely to be damaged during project development must be identified by the relevant specialist and completed prior to any development or clearing;</li> </ul>	Relevant specialist in consultation with the Contractor	Develop and implement a Plant Search and Rescue Plan	Pre-construction & Construction	CEO	Weekly, and as and when required	Implementati on of the Plant Search and Rescue Plan and photographi c evidence and notes of the

Impact Management Actions	Implementation	on	Monitoring			
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
						implementati on of the plan
Permits for removal must be obtained from the relevant CA prior to the cutting or clearing of the affected species, and they must be filed;	DPM	Undertake the permitting process in order to obtain the relevant permits for the removal of protected species. Permits must be kept on file	Pre-construction	ECO	Once, prior to the commence ment of the constructio n phase and removal of the protected species	CA permits on file
The Environmental Audit Report must confirm that all identified species have been rescued and replanted and that the location of replanting is compliant with conditions of approvals;	ECO	Ensure that the audit report indicates all species rescued and replanted and provides feedback in terms of compliance with the conditions of permits for replanting	During the Construction Phase and following the completion of the Construction Phase	ECO	Once off or as and when required	ECO confirmed rescued and replanted programme implemented correctly.
Trees felled due to construction must be documented and form part of the Environmental Audit Report;	ECO	Ensure that the audit report documents the details of trees felled	During the Construction Phase and following the completion of the	ECO	Once, prior to the commence ment of the constructio n phase	CA permits on file

Impact Management Actions	Implementatio	n	Monitoring			
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
			Construction Phase		and removal of the protected species	
Rivers and watercourses must be kept clear of felled trees, vegetation cuttings and debris;	Contractor	Felled trees, vegetation cuttings and debris must be disposed of at a licensed waste disposal facility	During the Construction Phase	ECO	Monthly	No felled trees, vegetation cuttings and debris are dumped in inappropriate locations and disposal certificates are available as proof of responsible disposal
<ul> <li>Only a registered pest control operator may apply herbicides on a commercial basis and commercial application must be carried out under the supervision of a registered pest control operator, supervision of a registered pest control operator or is appropriately trained;</li> </ul>	DPM qnd Contractor	A suitably qualified pest control operator must be appointed	Construction and Operation	ECO	As and when the use of herbicides is required	Only registered pest control operators must be appointed and proof of their registration must be provided

Impact Management Actions	Implementation			Monitoring			
	Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of	
	person	implementation	implementation	person		compliance	
- A daily register must be kept of all relevant details of	DPM qnd	A suitably qualified	Construction and	ECO	As and	Only	
herbicide usage;	Contractor	pest control	Operation		when the	registered	
		operator must be			use of	pest control	
		appointed			herbicides is	operators	
					required	must be	
						appointed	
						and proof of	
						their	
						registration must be	
						provided	
No herbicides must be used in estuaries	Not					provided	
- No herbicides most be osed in estodiles	Applicable -						
	no estuaries						
	applicable						
- All protected species and sensitive vegetation not	Contractor in	Spatially	During the	ECO	Once,	Demarcation	
removed must be clearly marked and such areas	consultation	demarcate	construction		during the	and fencing	
fenced off in accordance to Section 5.3: Access	with the cEO	protected species	phase		undertaking	is undertaken	
restricted areas.		and sensitive			of the	in-line with	
		vegetation and			demarcatio	the	
		implement			n of the	requirements	
		appropriate			areas and	of section 5.3	
		fencing where			the erection		
		required as per			of the		
		section 5.3		500	fencing		
- Alien invasive vegetation must be removed and	Contractor	Undertake	Construction and	ECO	Monthly,	Proof must be	
disposed of at a licensed waste management facility.		removal of alien	Operation	Operation	and as and	provided that	
		invasive		and	when	alien invasive	
		vegetation in		maintenance	required	vegetation	
		accordance with		team		has been	
		the relevant				cleared in	

Impact Management Actions	Implementation	n	Implementation			Monitoring			
	Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of			
	person	implementation	implementation	person		compliance			
		guideline and				accordance			
		ensure the				to the			
		vegetation is				relevant			
		disposed of at a				guideline and			
		licensed waste				that the			
		disposal facility				vegetation			
						was disposed			
						of at a			
						licensed			
						waste			
						disposal			
						facility			

### 5.11 Protection of fauna

**Impact management outcome:** Disturbance to fauna is minimised.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
No interference with livestock must occur without the landowner's written consent and with the landowner or a person representing the landowner being present;	dEO / cEO Contractor	Develop a procedure for dealing with livestock within the affected properties	Pre-construction and during the construction phase	ECO	Once, prior to the commence ment of construction and as and when	Written consent provided by the landowner and proof of representatio

Impact Management Actions	Implementation	n		Monitoring		
	Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of
	person	implementation	implementation	person		compliance
					required	n of the
					during the	landowner
					construction	during
					phase	interference
<ul> <li>The breeding sites of raptors and other wild birds species</li> </ul>	dEO / cEO in	Ensure that the	Pre-construction &	ECO	Once, prior	The planning
must be taken into consideration during the planning of	consultation	planning and	Construction		to the	and
the development programme;	with the	development			commence	development
	Contractor	programme			ment of	programme
		considers breeding			construction	includes the
		sites for wild bird			and as and	consideration
		species			when	of breeding
					required	sites for wild
						bird species
- Breeding sites must be kept intact and disturbance to	dEO / cEO in	Avoid breeding	During the	ECO	Weekly, and	Photographic
breeding birds must be avoided. Special care must be	consultation	sites and ensure	Construction	monthly,	as an when	record of
taken where nestlings or fledglings are present;	with the	that special care is	Phase	cEO and	required	intact
	Contractor	taken in the	Operation Phase	Operation	during the	breeding sites
		presence of		and	construction	
		nestlings and		maintenanc	. Monthly,	
		fledglings		e team	and as and	
				weekly	when	
					required	
					during	
Special recommendations of the guide specialist must	dEO / cEO in	All mitigation	During the	ECO	operation	Dhatagraphia
<ul> <li>Special recommendations of the avian specialist must be adhered to at all times to prevent unnecessary</li> </ul>	consultation	All mitigation	During the		Monthly during	Photographic record of
disturbance of birds;	with the	measures recommended by	Construction	Operation and	construction	compliance
distribution of bilas,	Contractor	the avifauna	Phase	maintenanc	and	and
	Confidence	specialist must be	Operation Phase	e team	monthly	successful
		implemented		e leam	during	implementati
		Implemented			operation	on of the
					operation	on or me

Impact Management Actions	Implementatio	n		Monitoring		
	Dana anailala	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	T: f f	Dana andilala	I ====================================	F. dalaman af
	Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of
	person	implementation	implementation	person		compliance
						recommend
						ed measures
- No poaching must be tolerated under any	dEO / cEO in		During the	ECO	Monthly,	No instances
circumstances. All animal dens in close proximity to the	consultation	informed of this	Construction		and as and	of poaching
works areas must be marked as Access restricted areas;	with the	requirement	Phase		when	is reported
	Contractor	during the			required	
		Environmental				
		Awareness Training				
		and the				
		consequences of				
		not adhering to				
		the requirement.				
		These areas must				
		be demarcated as				
		Access Restricted				
	150 / 50 :	Areas		500		
<ul> <li>No deliberate or intentional killing of fauna is allowed;</li> </ul>	dEO / cEO in	All site staff must be	During the	ECO	Monthly,	No instances
	consultation	informed of this	Construction		and as and	of deliberate
	with the	requirement	Phase		when	or intentional
	Contractor	during the			required	killing is
		Environmental				reported
		Awareness Training				
		and the				
		consequences of				
		not adhering to				
		the requirement.				
		These areas must				
		be demarcated as				
		Access Restricted				
		Areas				

Impact Management Actions	Implementation	n				Monitoring				
	Responsible	Method	of	Timeframe	for	Responsible	Freque	ncy	Evidenc	
	person	implementation		implementation		person			complic	
<ul> <li>In areas where snakes are abundant, snake deterrents to</li> </ul>	dEO / cEO in	Implement	and	During	the	ECO	Once,		Photogr	aphic
be deployed on the pylons to prevent snakes climbing	consultation	maintain s	snake	Construction		Operation	during	the	record (	of the
up, being electrocuted and causing power outages;	with the	deterrents	on	Phase		and	constru	ction	impleme	entati
and	Contractor	pylons in o	areas	Operation Pho	ase	maintenanc	of	the	on	and
		where snakes	s are			e team	pylons	and	mainter	iance
		abundant					as	and	of	snake
							when		deterrer	nts
							require	d.		
							Monthly	У		
							during			
							operati	on		
- No Threatened or Protected species (ToPs) and/or	DPM in	Undertake	а	Pre-construction	on	ECO	Once,	prior	Permits	for
protected fauna as listed according NEMBA (Act No. 10	consultation	permitting pro	ocess				to	the	remova	ĺ
of 2004) and relevant provincial ordinances may be	with the dEO	to obtain	the				comme	ence	and/rela	ocati
removed and/or relocated without appropriate		required perm	nits				ment	of	on mu	st be
authorisations/permits.							constru	ction	kept o	n file
							and as	and	and	be
							when		readily	
							require	d	availabl	е

# 5.12 Protection of heritage resources

**Impact management outcome:** Impact to heritage resources is minimised.

Impact Management Actions	Implementation	n		Monitoring		
Identify, demarcate and prevent impact to all known     constitute heritage features and its in appared and a with the	Responsible person  DPM and a	Method of implementation  Spatially identify	Timeframe for implementation  Pre-construction	Responsible person ECO	Frequency Once, prior to the	Evidence of compliance  Proof of avoidance of
sensitive heritage features on site in accordance with the No-Go procedure in <b>Section 5.3: Access restricted areas</b> ;	suitably qualified specialist  dEO / cEO in consultation with the Contractor and ECO	and demarcate areas of heritage significance as per the Heritage Impact Assessment and the Heritage Walk-through Report and as per the requirements of section 5.3			to the commence ment of construction	sensitive heritage features through details of avoidance and photographi c records
Carry out general monitoring of excavations for potential fossils, artefacts and material of heritage importance;	dEO (in consultation with specialists if/as required).	Ensure construction staff are adequately informed (via environmental awareness training) to carry out monitoring of excavations for fossils, artefacts and important heritage material	During the Construction Phase	ECO	Monthly, or as required	Environment al awareness training includes measures relating to monitoring for chance finds

Impact Management Actions	Implementation	n		Monitoring			
	Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of	
	person	implementation	implementation	person		compliance	
<ul> <li>All work must cease immediately, if any human remains</li> </ul>	dEO / cEO in	Develop and	During the	ECO	As and	Proof of work	
and/or other archaeological, palaeontological and	consultation	implement	Construction		when	ceased and	
historical material are uncovered. Such material, if	with the	procedures for	Phase		required	the required	
exposed, must be reported to the nearest museum,	Contractor	situations where				procedures	
archaeologist/ palaeontologist (or the South African	and ECO	human remains,				followed in	
Police Services), so that a systematic and professional		archaeological,				cases where	
investigation can be undertaken. Sufficient time must be		palaeontolgoical				material is	
allowed to remove/collect such material before		or historical				discovered.	
development recommences.		material are					
		uncovered					

# 5.13 Safety of the public

Impact management outcome: All precautions are taken to minimise the risk of injury, harm or complaints.

Impact Management Actions	Implementation	n	Monitoring			
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul> <li>Identify fire hazards, demarcate and restrict public access to these areas as well as notify the local authority of any potential threats e.g. large brush stockpiles, fuels etc.;</li> </ul>	cEO in consultation with the Contractor	Develop an Emergency Preparedness, Response and Fire Management Plan specific to the project	Pre-construction Construction	CEO	Once, prior to the commence ment of constructio n and weekly during the	Compliance with the Emergency Preparedness , Response and Fire Managemen t Plan

Impact Management Actions	Implementatio	n	Monitoring			
	Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of
	person	implementation	implementation	person		compliance
					constructio	
					n phase	
All unattended open excavations must be adequately fenced or demarcated;	Contractor	Ensure that all excavations undertaken is fenced and demarcated within a reasonable timeframe and in instances where excavations will be open for longperiods of time	During the Construction Phase	cEO	Weekly	Excavations are fenced where required and photographi c proof can be provided
Adequate protective measures must be implemented to prevent unauthorised access to and climbing of partly constructed towers and protective scaffolding;	Contractor	All staff must be easily identifiable and the climbing of towers and scaffolding must only be undertaken by authorised personnel as managed by the Contractor	During the construction phase	ECO	Monthly, and as and when required	No incidents of unauthorised climbing is reported
Ensure structures vulnerable to high winds are secured;	Contractor	Ensure that sufficient stabilisation measures are implemented to	During the construction phase	CEO	Weekly, and as and when required	No incidents of unstable structures due to high

Impact Management Actions	Implementatio	n		Monitoring			
	Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of	
	person	implementation	implementation	person		compliance	
		secure structures				winds is	
		vulnerable to high				reported	
		winds					
- Maintain an incidents and complaints register in which	cEO	Compile and	During the	ECO	Monthly,	The incidents	
all incidents or complaints involving the public are		regularly update	construction		and as and	and	
logged.		as incidents and	phase		when	complaints	
		complaints are			required	register is	
		submitted from the				complete	
		public and				and provides	
		indicate the				all the	
		actions taken to				required	
		resolve the				details	
		complaint					

#### 5.14 Sanitation

**Impact management outcome:** Clean and well maintained toilet facilities are available to all staff in an effort to minimise the risk of disease and impact to the environment.

Impact Management Actions	Implementation	n	Monitoring			
	Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of
	person	implementation	implementation	person		compliance
- Mobile chemical toilets are installed onsite if no other	Contractor	Mobile chemical	During the	cEO	Weekly	Mobile toilets
ablution facilities are available;		toilets must be	Construction			are installed
		placed	Phase			and avoid
		appropriately and				environment
		in areas that avoid				al sensitivities

Impact Management Actions	Implementatio	n		Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
		environmental sensitivities				
The use of ablution facilities and or mobile toilets must be used at all times and no indiscriminate use of the veld for the purposes of ablutions must be permitted under any circumstances;	Contractor in consultation with the cEO	All site staff must be informed of this requirement during the Environmental Awareness Training and the consequences of not adhering to the requirement.	Pe-construction & Construction	ECO	Monthly, and as and when required	No evidence of non-compliance identified
<ul> <li>Where mobile chemical toilets are required, the following must be ensured:</li> <li>a) Toilets are located no closer than 100 m to any watercourse or water body;</li> <li>b) Toilets are secured to the ground to prevent them from toppling due to wind or any other cause;</li> <li>c) No spillage occurs when the toilets are cleaned or emptied and the contents are managed in accordance with the EMPr;</li> <li>d) Toilets have an external closing mechanism and are closed and secured from the outside when not in use to prevent toilet paper from being blown out;</li> <li>e) Toilets are emptied before long weekends and workers holidays, and must be locked after working hours;</li> <li>f) Toilets are serviced regularly and the ECO must inspect toilets to ensure compliance to health standards;</li> </ul>	Contractor in consultation with the cEO	The installation of the toilets by the Contractor must be as per the listed requirements	During the Construction Phase	cEO	Weekly	No evidence of non-compliance identified

Impact Management Actions	Implementatio	n	Monitoring			
	Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of
	person	implementation	implementation	person		compliance
- A copy of the waste disposal certificates must be	Contractor	Certificates	During the	ECO	Monthly,	Certificates
maintained.		obtained from the	Construction		and as and	for waste
		licensed waste	Phase		when	disposal from
		disposal facility			required	the licensed
		with the emptying				waste
		of the toilets must				disposal
		be kept on file				facility
						available on
						site

#### 5.15 Prevention of disease

**Impact Management outcome:** All necessary precautions linked to the spread of disease are taken.

Impact Management Actions	Implementatio	n		Monitoring			
	Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of	
	person	implementation	implementation	person		compliance	
- Undertake environmentally-friendly pest control in the	Contractor	Only	During the	ECO	As and	Contractor to	
camp area;		environmentally-	Construction		when pest	provide proof	
		friendly pest	Phase		control is	of pest	
		control must be			required for	control used	
		used, when			the project	being	
		required				environment	
						ally-friendly	
- Ensure that the workforce is sensitised to the effects of	cEO /	The effects of	Pre-construction &	ECO	Once, prior	Environment	
sexually transmitted diseases, especially HIV AIDS;	Contractor in	sexually	Construction		to the	al awareness	
		transmitted			commence	training	

Impact Management Actions	Implementation			Monitoring			
	Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of	
	consultation with the ECO	implementation diseases and HIV/ AIDS must be covered in the Environmental Awareness Training	implementation	person	ment of construction and monthly during constructio	compliance material requirements checklist	
The Contractor must ensure that information posters on AIDS are displayed in the Contractor Camp area;	Contractor	Develop and place information posters on HIV/	During the Construction Phase	cEO	n Weekly	Photographic evidence of poster placement	
<ul> <li>Information and education relating to sexually transmitted diseases to be made available to both construction workers and local community, where applicable;</li> </ul>	CEO / Contractor in consultation with the ECO	Information and education of sexually transmitted diseases must be covered in the Environmental Awareness Training.	Pre-construction & Construction	ECO	Monthly	Environment al awareness training material requirements checklist	
Free condoms must be made available to all staff on site at central points;	Contractor	Placement of free condoms in mobile toilets and at the construction camps	During the Construction Phase	ECO	Monthly	Proof of placement of free condoms by the contractor to be provided	
Medical support must be made available;	dEO / cEO in consultation with the Contractor	Ensure that designated personnel with first aid training are	Construction and Operations	ECO	Monthly	Check the availability of first aid trained	

Impact Management Actions	Implementatio	n		Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
		available on site and that first aid kits to provide medical support is readily available				personnel and medical kits (including if these are complete in terms of supplies)
<ul> <li>Provide access to Voluntary HIV Testing and Counselling Services.</li> </ul>	Contractor	Compile a HIV testing schedule and provide counselling services where required	During the Construction Phase	ECO	Quarterly, and as and when required	Voluntary testing schedules and proof of counselling (where undertaken)

### 5.16 Emergency procedures

**Impact management outcome:** Emergency procedures are in place to enable a rapid and effective response to all types of environmental emergencies.

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
Compile an Emergency Response Action Plan (ERAP) prior to the commencement of the proposed project;	Contractor	Develop an Emergency Preparedness, Response and Fire Management Plan specific to the project	Pre-construction	ECO	Once, prior to the commence ment of construction	Emergency Preparedness , Response and Fire Managemen t Plan compiled
The Emergency Plan must deal with accidents, potential spillages and fires in line with relevant legislation;	Contractor	Develop an Emergency Preparedness, Response and Fire Management Plan specific to the project which covers accidents, potential spillages and fires	Pre-construction	ECO	Once, prior to the commence ment of construction	Emergency Preparedness , Response and Fire Managemen t Plan includes required specifications
All staff must be made aware of emergency procedures as part of environmental awareness training;	cEO / dEO in consultation with the ECO	Develop environmental awareness training material which covers the relevant	Pre-construction	ECO	Prior to the commence ment of the environmen tal	Environment al awareness training material requirements checklist

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
		emergency procedures			awareness training	
The relevant local authority must be made aware of a fire as soon as it starts;	Contractor in consultation with the ECO	Develop and include a procedure in the Emergency Preparedness, Response and Fire Management Plan for the event of a fire and the procedure to be followed for informing the local authority	Construction	ECO	As and when a fire occurs	The local authority was informed as per the relevant procedure set out in the Emergency Preparedness , Response and Fire Managemen t Plan
<ul> <li>In the event of emergency necessary mitigation measures to contain the spill or leak must be implemented (see Hazardous Substances section 5.17).</li> </ul>	Contractor	Implement the required mitigation measures in the event of a spill or leak as per the requirements of Section 5.17.	Construction and Operations	ECO	As and when a spill or leak occurs	The mitigation measures included under Section 5.17 have been adhered to

#### 5.17 Hazardous substances

**Impact management outcome:** Safe storage, handling, use and disposal of hazardous substances.

Impact Management Actions	Implementatio	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance	
The use and storage of hazardous substances to be minimised and non-hazardous and non-toxic alternatives substituted where possible;	cEO in consultation with the Contractor	Develop a strategy of how hazardous	Pre-construction & Construction	ECO	Once, prior to the commence ment of constructio n and monthly during the constructio n phase	Contractor to provide evidence of substances used for proof of compliance	
All hazardous substances must be stored in suitable containers as defined in the Method Statement;	Contractor	Develop a Method Statement for the storage of hazardous substances in suitable containers	Pre-construction & Construction	ECO	Once, prior to the commence ment of constructio n and monthly during the constructio n phase	Photographic proof that hazardous substances are stored in suitable containers as per the requirements of the relevant Method Statements	

Impact Management Actions	Implementatio	n	Monitoring			
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
Containers must be clearly marked to indicate contents, quantities and safety requirements;	Contractor	Where hazardous waste is stored these must be clearly marked indicating the required details of the contents	During the Construction Phase	ECO	Monthly	Photographic proof that containers are marked as per the requirements
All storage areas must be bunded. The bunded area must be of sufficient capacity to contain a spill / leak from the stored containers;	Contractor	Ensure that storage areas are sufficiently bunded which are of sufficient capacity to contain a spill / leak from the stored containers	During the Construction Phase	ECO	Monthly during the Constructio n Phase	Photographic proof that storage areas are bunded and proof that the bund areas are of sufficient capacity to contain a spill / leak from the stored containers
Bunded areas to be suitably lined with a SABS approved liner;	Contractor	Ensure that bunded storage areas are suitably lined	During the Construction Phase	ECO	Once, during the Constructio n Phase	Photographic proof that bunded storage areas are suitably lined
An Alphabetical Hazardous Chemical Substance (HCS) control sheet must be drawn up and kept up to date on a continuous basis;	cEO / Contractor	Compile and update an Alphabetical Hazardous Chemical	During the Construction Phase	ECO	Monthly, and as and when required	Complete and up to date control sheet provided by

Impact Management Actions	Implementatio	n		Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
		Substance (HCS) control sheet specific to the project				the Contractor
All hazardous chemicals that will be used on site must have Material Safety Data Sheets (MSDS);	cEO / Contractor	Keep a record of all hazardous chemicals and the respective MSDS	During the Construction Phase	ECO	Monthly, and as and when required	Record of hazardous chemicals and the respective MSDS
All employees working with HCS must be trained in the safe use of the substance and according to the safety data sheet;	cEO / Contractor	Provide training for personnel working with HCS	Pre-construction	ECO	Once, prior to the commence ment of constructio n and as and when required	Record of training provided to personnel working with HCS
Employees handling hazardous substances / materials must be aware of the potential impacts and follow appropriate safety measures. Appropriate personal protective equipment must be made available;	cEO / Contractor	Develop environmental awareness training material which covers the relevant impacts and safety measures.  Provide appropriate training and personal	Pre-construction & Construction	ECO	Prior to the commence ment of the environmen tal awareness training and monthly during the construction phase for personal	Environment al awareness training material requirements checklist and all relevant personnel have undergone appropriate training and have access

Impact Management Actions	Implementation			Monitoring	Monitoring		
	Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of	
	person	implementation	implementation	person		compliance	
		protective			protective	to personal	
		equipment for the			equipment	protective	
		relevant personnel				equipment	
		handling					
		hazardous					
		substances and					
The Control of would also use the stational and athory liquid	Camtralatar	materials	During the	ECO	A A a sa Hali	Ctororo tombro	
The Contractor must ensure that diesel and other liquid  final call and budgetties their in strengt in appropriate.	Contractor	Appropriate	During the	ECO	Monthly,	Storage tanks for the	
fuel, oil and hydraulic fluid is stored in appropriate storage tanks or in bowsers;		storage facilities must be	Construction Phase		and as and when	for the project are	
storage ratiks of itt bowsers,		constructed or	THOSE		required	appropriate	
		obtained for the			required	and no	
		storing of diesel,				incidents are	
		other liquid fuel, oil				reported in	
		and hydraulic fluid				this regard	
- The tanks/ bowsers must be situated on a smooth	Contractor	Appropriate	During the	ECO	Monthly,	Storage	
impermeable surface (concrete) with a permanent		storage facilities	Construction		and as and	areas for the	
bund. The impermeable lining must extend to the crest		must be	Phase		when	tanks/	
of the bund and the volume inside the bund must be		constructed or			required	bowsers for	
130% of the total capacity of all the storage tanks/		obtained for tanks				the project	
bowsers (110% statutory requirement plus an allowance		as per the				are	
for rainfall);		requirements listed				appropriate	
						and no	
						incidents are	
						reported in	
						this regard	
- The floor of the bund must be sloped, draining to an oil	Contractor	Appropriate	During the	ECO	Once,	Bunded	
separator;		storage facilities	Construction		during	storage areas	
		must be	Phase		constructio	are	
		constructed as per			n	constructed	
						according to	

Impact Management Actions	Implementation	on		Monitoring		
	Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of
	person	implementation	implementation	person		compliance
		the requirements				the
		listed				requirements
- Provision must be made for refueling at the storage area	Contractor	Appropriately	During the	ECO	Monthly	Soils at the
by protecting the soil with an impermeable		constructed	Construction	cEO	Weekly	refuelling
groundcover. Where dispensing equipment is used, a		refuelling facility	Phase			facility are
drip tray must be used to ensure small spills are		must be				protected as
contained;		developed as per				required and
		the requirements.				drip trays are
		Drip trays must be				provided and
		provided for use				used
All empty externally dirty drums must be stored on a drip	Contractor	Ensure that empty	During the	ECO	Monthly	Drip trays or
tray or within a bunded area;		dirty drums are	Construction	cEO	Weekly	bunded
		stored	Phase			areas are
		appropriately as				used for the
		per the				storage of
		requirements				dirty drums
- No unauthorised access into the hazardous substances	Contractor	Ensure through the	During the	ECO	Monthly	Proof of the
storage areas must be permitted;		implementation of	Construction			implementati
		procedures that	Phase			on of the
		no unauthorised				relevant
		access is				procedure
		undertaken into				must be
		the storage areas				provided by
						the
						contractor
- No smoking must be allowed within the vicinity of the	Contractor	Inform all	During the	ECO	Monthly	Photographic
hazardous storage areas;		employees of the	Construction	cEO	Weekly	record of the
		requirement and	Phase			signage
		develop and				placed must
		place relevant				be provided

Impact Management Actions	Implementation				Monitoring			
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance		
		signage in the relevant areas						
Adequate fire-fighting equipment must be made available at all hazardous storage areas;	Contractor	Hazardous storage areas must be fitted with adequate fire- fighting equipment	During the Construction Phase	ECO	Monthly	Adequate fire-fighting equipment is available and has been serviced		
<ul> <li>Where refueling away from the dedicated refueling station is required, a mobile refueling unit must be used.</li> <li>Appropriate ground protection such as drip trays must be used;</li> </ul>	Contractor	Provide a mobile refuelling unit as well as suitable ground protection, where required	During the Construction Phase	ECO	Monthly, and as and when required	A mobile refuelling unit and suitable ground protection is available for use		
<ul> <li>An appropriately sized spill kit kept onsite relevant to the scale of the activity/s involving the use of hazardous substance must be available at all times;</li> </ul>	Contractor	Provide an appropriate spill kit for the project for the use of hazardous substances	During the Construction Phase	ECO	Monthly, and as and when required	Appropriate spill kits are available for use		
The responsible operator must have the required training to make use of the spill kit in emergency situations;	cEO and Contractor	Provide training on the use of spill kits to the relevant employees	Pre-construction	ECO	Once, prior to the commence ment of construction	Proof of training to be provided by the contractor		
<ul> <li>An appropriate number of spill kits must be available and must be located in all areas where activities are being undertaken;</li> </ul>	cEO and Contractor	Provide an appropriate number of spill kits in relevant areas	During the Construction Phase	ECO	Monthly	Proof of appropriate number of spill kits in		

Impact Management Actions	Implementation	n		Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul> <li>In the event of a spill, contaminated soil must be</li> </ul>	cEO and	Storage and	During the	ECO	Monthly,	appropriate areas to be provided by the contractor Proof of
collected in containers and stored in a central location and disposed of according to the National Environmental Management: Waste Act 59 of 2008. Refer to Section 5.7 for procedures concerning storm and waste water management and 5.8 for solid and hazardous waste management.	Contractor	disposal of contaminated soil must be in accordance with the National Environmental Management: Waste Act and sections 5.7 and 5.8 of this EMPr	Construction Phase		and as and when required	storage and disposal in terms of the National Environment al Managemen t: Waste Act must be provided.  Certificates of disposal at licensed waste disposal facilities must be provided

# 5.18 Workshop, equipment maintenance and storage

Impact management outcome: Soil, surface water and groundwater contamination is minimised.

Impact Management Actions	Implementation	on			Monitoring		
	Responsible person	Method of implementation	Timeframe implementation	for	Responsible person	Frequency	Evidence of compliance
Where possible and practical all maintenance of vehicles and equipment must take place in the workshop area;	Contractor	Demarcate specific areas for the maintenance of vehicles and equipment	During Construction Phase	the	ECO	Monthly	A dedicated area for the maintenance of vehicles and machinery is used.
<ul> <li>During servicing of vehicles or equipment, especially where emergency repairs are effected outside the workshop area, a suitable drip tray must be used to prevent spills onto the soil. The relevant local authority must be made aware of a fire as soon as it starts;</li> </ul>	Contractor	Ensure that a drip tray is available for any emergency repairs required	During Construction Phase	the	ECO	Monthly	Contractor to provide evidence of drip tray use for emergency repairs
Leaking equipment must be repaired immediately or be removed from site to facilitate repair;	Contractor	Ensure that where leaking equipment is identified it is repaired immediately or removed from site for repairs	During Construction Phase	the	ECO	Monthly	Contractor to provide details of equipment repaired or removed from site
Workshop areas must be monitored for oil and fuel spills;	cEO	Undertake regular inspections of the workshop areas for oil and fuel spills	During Construction Phase	the	ECO	Monthly	Register of inspection

Impact Management Actions	Implementatio	n		Monitoring	Monitoring			
	Dosponsible	Method of	Timeframe for	Dosponsible	Fraguanay	Evidence of		
	Responsible			Responsible	Frequency	Evidence of		
	person	implementation	implementation	person		compliance		
		and keep an						
		updated register						
		of inspection on						
		site						
- Appropriately sized spill kit kept onsite relevant to the	Contractor	Provide an	During the	ECO	Monthly,	Appropriate		
scale of the activity taking place must be available;		appropriate spill kit	Construction		and as and	spill kits are		
		for the project	Phase		when	available for		
					required	use		
- The workshop area must have a bunded concrete slab	Contractor	Ensure that the	During the	ECO	Once,	Workshop		
that is sloped to facilitate runoff into a collection sump or		workshop area is	Construction		during the	area is		
suitable oil / water separator where maintenance work		sufficiently bunded	Phase		Constructio	bunded in		
on vehicles and equipment can be performed;		in accordance			n Phase	accordance		
		with the required			and as and	with the		
		specification			when	required		
					required	specification		
Water drainage from the workshop must be contained	Contractor	Ensure that water	During the	ECO	Monthly	Workshop		
and managed in accordance Section 5.7: Storm and		drainage from	Construction			drainage is		
waste water management.		workshop area is	Phase			managed in		
		managed as per				accordance		
		the requirements				with the		
		of section 5.7				requirements		

# 5.19 Batching plants

Impact management outcome: Minimise spillages and contamination of soil, surface water and groundwater.

Impact Management Actions	Implementation	on			Monitoring		
	Responsible person	Method of implementation	Timeframe implementation	for	Responsible person	Frequency	Evidence of compliance
Concrete mixing must be carried out on an impermeable surface;	Contractor	Provide impermeable surface for the mixing of concrete	During Construction Phase	the	cEO	Weekly	No concrete mixing is undertaken on open ground
Batching plants areas must be fitted with a containment facility for the collection of cement laden water.	Contractor	Implement measures for the control and management of cement laden water	During construction phase	the	CEO	Weekly	No mismanage ment of laden water due to the temporary concrete batching plant
Dirty water from the batching plant must be contained to prevent soil and groundwater contamination	Contractor	Implement measures for the control and management of dirty water to prevent soil and groundwater contamination	During construction phase	the	cEO	Weekly	No mismanage ment of dirty water due to the temporary concrete batching plant and no/minimal soil and

Impact Management Actions	Implementation	on		Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
						groundwater contaminatio n
<ul> <li>Bagged cement must be stored in an appropriate facility and at least 10 m away from any water courses, gullies and drains;</li> </ul>	Contractor	Demarcate and provide a storage area for bagged cement in-line with the listed requirements	During the Construction Phase	cEO	Weekly	Photographic proof of bagged cement stored within the demarcated area
<ul> <li>A washout facility must be provided for washing of concrete associated equipment. Water used for washing must be restricted;</li> </ul>	Contractor	Provide a washout facility for the washing of associated equipment. Enforce limitations on water use for washing of equipment	During the Construction Phase	cEO	Weekly	No cement laden water is released into the environment. Only minimal water is used for washing
Hardened concrete from the washout facility or concrete mixer can either be reused or disposed of at an appropriate licensed disposal facility;	Contractor	Make use of hardened concrete where possible or dispose of concrete in a suitable manner	During the Construction Phase	ECO	Monthly	Certificates of disposal of concrete at licensed waste disposal facility
Empty cement bags must be secured with adequate binding material if these will be temporarily stored on site;	Contractor	Bind empty cement bags and temporarily store it	During the Construction Phase	ECO	Monthly	Proof of binding of empty cement bags

Impact Management Actions	Implementatio	on		Monitoring			
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance	
		in an appropriate area on site				and storage in an appropriate are on site to be provided by the Contractor	
Sand and aggregates containing cement must be kept damp to prevent the generation of dust (Refer to Section 5.20: Dust emissions)	Contractor	Ensure that sand and aggregates are kept damp or otherwise protected from dust generation	During the Construction Phase	ECO	Monthly	Proof of damping (or alternative dust suppression) of sand and aggregates must be provided by the Contractor	
Any excess sand, stone and cement must be removed or reused from site on completion of construction period and disposed at a registered disposal facility;	Contractor	Ensure that all excess sand, stone and cement is removed or reused	At the completion of the Construction Phase	ECO	Once, with the completion of constructio n	Certificates for the disposal of sand, stone and cement at licensed waste disposal facilities or proof of reuse must be provided	

Impact Management Actions	Implementation				Monitoring			
	Responsible	Method	d of	Timeframe	for	Responsible	Frequency	Evidence of
	person	implem	nentation	implementation	n	person		compliance
- Temporary fencing must be erected around batching	Contractor	Erect	Temporary	During	the	cEO	Weekly	Temporary
plants in accordance with Section 5.5: Fencing and gate		fencing	9	construction				fencing
installation.				phase				around
								batching
								plants

#### 5.20 Dust emissions

**Impact management outcome:** Dust prevention measures are applied to minimise the generation of dust.

Impact Management Actions	Implementatio	n		Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul> <li>Take all reasonable measures to minimise the generation of dust as a result of project development activities to the satisfaction of the ECO;</li> </ul>	Contractor	Apply appropriate dust suppressant	During the Construction Phase	CEO	Weekly	Contractor to provide proof of use of appropriate dust suppressants
Removal of vegetation must be avoided until such time as soil stripping is required and similarly exposed surfaces must be re- vegetated or stabilised as soon as is practically possible;	Contractor	Proper planning for vegetation removal must be undertaken as well as for the associated rehabilitation	During the Construction Phase and Rehabilitation	cEO	Weekly	Plan for implementati on must be provided by the Contractor

Impact Management Actions	Implementatio	n		Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
Excavation, handling and transport of erodible materials must be avoided under high wind conditions or when a visible dust plume is present;	Contractor	Ensure that specific limitations are placed on the transport and handling of erodible materials during high wind conditions or when a visible dust plume is present	During the Construction Phase	CEO	Bi-weekly (every second week)	No complaints submitted in this regard
<ul> <li>During high wind conditions, the ECO must evaluate the situation and make recommendations as to whether dust-damping measures are adequate, or whether working will cease altogether until the wind speed drops to an acceptable level;</li> </ul>	ECO	ECO to provide adequate recommendations	During the Construction Phase	Not Applicable		
<ul> <li>Where possible, soil stockpiles must be located in sheltered areas where they are not exposed to the erosive effects of the wind;</li> </ul>	Contractor	Place soil stockpiles in areas less affected by wind	During the Construction Phase	cEO and	Bi-weekly (every second week)	Soil stockpiles are not exposed to wind and have not been eroded
Where erosion of stockpiles becomes a problem, erosion control measures must be implemented at the discretion of the ECO;	Contractor in consultation with the ECO	Contractor to implement erosion control measures as recommended and agreed with the ECO	During the Construction Phase	CEO	Weekly, until erosion is no longer a problem	Recommend ations made by the ECO have been implemented by the Contractor

Impact Management Actions	Implementatio	n		Monitoring	Monitoring		
	Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of	
	person	implementation	implementation	person		compliance	
- Vehicle speeds must not exceed 40 km/h along dust	cEO / dEO /	Inform all drivers of	During the	ECO	Monthly	No	
roads or 20 km/h when traversing unconsolidated and	contractor	speed limits and	Construction	Operation		complaints	
non-vegetated areas;		place appropriate	Phase	and		from	
		signage along the	Operation Phase	Maintenance		community	
		relevant roads		team		members are	
						submitted	
- Straw stabilisation must be applied at a rate of one	Contractor	Ensure that straw	During the	ECO	Monthly	Photographic	
bale/10 m² and harrowed into the top 100 mm of top		stabilisation is	Construction			record of al	
material, for all completed earthworks;		undertaken as per	Phase			straw	
		the listed				stabilisation	
		requirements				undertaken	
<ul> <li>For significant areas of excavation or exposed ground,</li> </ul>	Contractor	Appropriate dust	During the	cEO	Weekly	Photographic	
dust suppression measures must be used to minimise the		suppressant	Construction			record of	
spread of dust.		measures are	Phase			measures	
		implemented				being	
						implemented	
						and the	
						results thereo	

# 5.21 Blasting

**Impact management outcome:** Impact to the environment is minimised through a safe blasting practice.

Impact Management Actions	Implementatio	n		Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
Any blasting activity must be conducted by a suitably licensed blasting contractor; and	cEO / dEO / contractor	Ensure the contractor is suitably licensed with all necessary credentials and certifications	Pre-Construction Phase	ECO/EO	Once off, before blasting activities commence .	ECO/EO to check all valid credentials and certifications on hand.
<ul> <li>Notification of surrounding landowners, emergency services site personnel of blasting activity 24 hours prior to such activity taking place on Site.</li> </ul>	cEO / dEO / contractor	Ensure all responsible personnel and landowners have been notified of blasting activities 24 hours in advance and keep records of notifications.	Pre-Construction Phase	ECO/EO	Once off, before blasting activities commence .	ECO/EO to confirm all necessary personnel and landowners have been notified. Notification records to be provided.

#### 5.22 Noise

Impact Management outcome: Prevent unnecessary noise to the environment by ensuring that noise from development activity is mitigated.

Impact Management Actions	Implementatio	n			Monitoring		
	Responsible person	Method of implementation	Timeframe implementation	for	Responsible person	Frequency	Evidence of compliance
The Contractor must keep noise level within acceptable limits, Restrict the use of sound amplification equipment for communication and emergency only;	Contractor	Ensure that noise limits do not exceed acceptable limits and avoid the use of amplification communication	During to Construction Phase	the	ECO	Monthly, and as and when required	No complaints registered in this regard. No amplification equipment is used.
<ul> <li>All vehicles and machinery must be fitted with appropriate silencing technology and must be properly maintained;</li> </ul>	Contractor	Provide and implement silencing technology	During to Construction Phase	the	ECO	Monthly, and as and when required	No complaints registered in this regard. Silencing technology is utilised.
<ul> <li>Any complaints received by the Contractor regarding noise must be recorded and communicated. Where possible or applicable, provide transport to and from the site on a daily basis for construction workers;</li> </ul>	CEO	Update complaints register. Provide daily transport to and from site for employees	During to Construction Phase	the	ECO	Monthly, and as and when required	Complaints register provided by the cEO and proof of transportatio n services provided

Impact Management Actions	Implementation	n	Monitoring			
	Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of
	person	implementation	implementation	person		compliance
Develop a Code of Conduct for the construction phase	cEO and	Compile a Code	Pre-construction	ECO	Once, prior	No
in terms of behaviour of construction staff. Operating	Contractor in	of Conduct for	and Construction		to the	complaints
hours as determined by the environmental authorisation	consultation	staff. Appropriate			commence	registered in
are adhered to during the development phase. Where	with the ECO	operating hours			ment of	this regard.
not defined, it must be ensured that development		must be identified			constructio	
activities must still meet the impact management		for the project.			n	
outcome related to noise management.						

# 5.23 Fire prevention

**Impact management outcome:** Prevention of uncontrollable fires.

Impact Management Actions	Implementation	n		Monitoring			
	Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of	
	person	implementation	implementation	person		compliance	
<ul> <li>Designate smoking areas where the fire hazard could be</li> </ul>	cEO /	Identify and	Pre-construction &	ECO	Monthly	Photographic	
regarded as insignificant;	Contractor	demarcate	Construction			record of	
		through signage				designated	
		designated				smoking area	
		smoking areas					
<ul> <li>Firefighting equipment must be available on all vehicles</li> </ul>	cEO / dEO in	Provide all vehicles	Construction	ECO	Monthly	All vehicles	
located on site;	consultation	with firefighting				are fitted with	
	with the	equipment				firefighting	
	Contractor					equipment	
						and the	
						details	

Impact Management Actions	Implementatio	n		Monitoring		
	Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of
	person	implementation	implementation	person		compliance
						thereof are
						provided by
						the cEO
The local Fire Protection Agency (FPA) must be informed	cEO in	Undertake formal	Pre-construction	ECO	Once,	Proof of
of construction activities;	consultation	consultation to			during the	consultation
	with the ECO	inform the local			commence	with the FPA
		FPA of the			ment of the	
		associated			Constructio	
		construction			n Phase	
Contact numbers for the FPA and emergency services	dEO / cEO /	activities	Pre-construction &	ECO	Prior to the	Environment
must be communicated in environmental awareness	Contractor in	Develop environmental	Construction	ECO	commence	al awareness
training and displayed at a central location on site;	consultation		Construction		ment of the	training
irdining and displayed at a certiful location on site,	with the ECO	awareness training material which			environmen	material
	***************************************	covers the contact			tal	requirements
		numbers for the			awareness	checklist and
		FPA and			training and	photographi
		emergency			once during	c record of
		services.			the	contact
		301 11003.			constructio	numbers on
		Place the contact			n phase	display
		numbers for the				
		FPA and				
		emergency				
		services at a visible				
		and central				
		location				
- Two way swop of contact details between ECO and FPA.	ECO	Consultation	Pre-construction	Not		
		between the ECO		Applicable		
		and FPA in order to				

Impact Management Actions	Implementation				Monitoring			
	Responsible	Method o	of	Timeframe	for	Responsible	Frequency	Evidence of
	person	implementation		implementation	1	person		compliance
		exchange contac	ct					
		details						

# 5.24 Stockpiling and stockpile areas

Impact management outcome: Reduce erosion and sedimentation as a result of stockpiling.

Impact Management Actions	Implementatio	n	Monitoring			
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul> <li>All material that is excavated during the project development phase (either during piling (if required) or earthworks) must be stored appropriately on site in order to minimise impacts to watercourses, watercourses and water bodies;</li> </ul>	Contractor	Identify and demarcate an appropriate location for the storage of excavated materials	Pre-construction & Construction	ECO	Monthly	Excavated material is not stored within sensitive environment al areas
All stockpiled material must be maintained and kept clear of weeds and alien vegetation growth by undertaking regular weeding and control methods;	Contractor	Implement appropriate and sufficient maintenance on stockpiled material regularly	During the Construction Phase	ceo eco	Bi-weekly (every second month) Monthly	Stockpiled material is maintained sufficiently and is clear of weeds and alien vegetation

Impact Management Actions	Implementation	on			Monitoring		
	Responsible person	Method of implementation	Timeframe implementation	for n	Responsible person	Frequency	Evidence of compliance
Topsoil stockpiles must not exceed 2 m in height;	Contractor	Enforce limitations for the height of topsoil stockpiles	During Construction Phase	the	cEO ECO	Bi-weekly (every second month)	Topsoil stockpiles do not exceed 2m in height
During periods of strong winds and heavy rain, the stockpiles must be covered with appropriate material (e.g. cloth, tarpaulin etc.);	Contractor	Appropriate material must be provided in order to cover stockpiles when required	During Construction Phase	the	ECO	Monthly	Contractor to provide proof of availability of appropriate material to cover stockpiles when required
Where possible, sandbags (or similar) must be placed at the bases of the stockpiled material in order to prevent erosion of the material.	Contractor	Sandbags must be provided in order to prevent erosion of stockpiled materials	During Construction Phase	the	ECO	Monthly	Contractor to provide proof of availability of sandbags to prevent erosion of stockpiled materials

#### 5.25 Civil works

Impact management outcome: Impact to the environment minimised during civil works to create the substation terrace.

Impact Management Actions	Implementatio	n		Monitoring			
	Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of	
	person	implementation	implementation	person	riequency	compliance	
Where terracing is required, topsoil must be collected.	Contractor	Collection and	During the	ECO	Monthly	Visual	
and retained for the purpose of re-use later to	oorm doror	safe storage of	Construction	200	1110111111	inspection of	
rehabilitate disturbed areas not covered by yard stone;		topsoil for later use	Phase			topsoil	
		in rehabilitation				stockpiles for	
		phase				later use	
<ul> <li>Areas to be rehabilitated include terrace embankments</li> </ul>	Contractor	Regard areas that	During the	ECO	Monthly	Visual	
and areas outside the high voltage yards;		do not house	Construction		,	inspection of	
		infrastructure as	Phase, where the			rehabilitation	
		requiring	area is no longer			implementati	
		rehabilitation and	going to be utilised			on to ensure	
		apply				these areas	
		rehabilitation				are being	
		measures to these				rehabilitated	
		regions					
- Where required, all sloped areas must be stabilised to	Contractor	If required stabilise	Duration of the	ECO	Monthly	Visual	
ensure proper rehabilitation is effected and erosion is		soil using	construction			inspection of	
controlled;		recognised	phase			stabilised soil	
		methods to ensure				regions and	
		proper				descriptions	
		rehabilitation and				of staff of	
		erosion control				stabilisation	
The control of the co	Caratraratar	If we arrive all at a leiling	Duration of the	ECO	Monthly	method used	
These areas can be stabilised using design structures or  vegetation as specified in the design to prevent eresign.	Contractor	If required stabilise soil using	construction	ECO	Monthly	Visual	
vegetation as specified in the design to prevent erosion of embankments. The contract design specifications		soil using recognised	phase			inspection of stabilised soil	
must be adhered to and implemented strictly;		methods to ensure	priuse			regions and	
		proper				descriptions	
		rehabilitation and				of staff of	
		erosion control				stabilisation	
		Crosion Cornio				method used	
						method used	

Impact Management Actions	Implementation	on		Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
Rehabilitation of the disturbed areas must be managed in accordance with Section 5.35: Landscaping and rehabilitation;	Contractor	Review and ensure that all rehabilitation measures are implemented in accordance with the requirements of Section 5.35	Duration of the construction phase	ECO	Monthly	Visual inspection of rehabilitation conducted and the degree of conformanc e with the requirements set out in Section 35.5 of this report
All excess spoil generated during terracing activities must be disposed of in an appropriate manner and at a recognised landfill site; and	Contractor	Dispose of all excess spoil using appropriate means and at recognised landfill sites. Keep written registers of the disposal conducted	Duration of the construction phase	ECO	Monthly	Evidence of disposal slips as applicable kept in the site environment al file
Spoil can however be used for landscaping purposes and must be covered with a layer of 150 mm topsoil for rehabilitation purposes.	Contractor	Where spoil is utilised for landscaping purposes implement a 150mm topsoil layer on top following shaping and compaction	Duration of the construction phase	ECO	Monthly	Spoil material used in landscaping is suitably covered with a later of topsoil at least 150mm deep

Impact Management Actions	Implementatio	n	Monitoring				
	Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of	
	person	implementation	implementation	person		compliance	
		to promote					
		rehabilitation					

### 5.26 Excavation of foundation, cable trenching and drainage systems

Impact management outcome: No environmental degradation occurs as a result of excavation of foundation, cable trenching and drainage systems.

Impact Management Actions	Implementatio	n		Monitoring		
	D	L A A . H	T f	D	I e	le the entre
	Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of
	person	implementation	implementation	person		compliance
All excess spoil generated during foundation excavation	Contractor	Use a licensed	During the	ECO	Monthly	Certificates
must be disposed of in an appropriate manner and at a		waste disposal	Construction			obtained for
licensed landfill site, if not used for backfilling purposes;		facility for the	Phase			the disposal
		disposal of excess				of excess
		spoil				spoil at a
						licensed
						waste
						disposal
						facility
<ul> <li>Spoil can however be used for landscaping purposes</li> </ul>	Contractor	Spoil used for	Construction and	ECO	Monthly	Photographic
and must be covered with a layer of 150 mm topsoil for		landscaping must	Rehabilitation			record of
rehabilitation purposes;		be applied as per				spoil used for
		the listed				landscaping
		requirements				purposes as
						well as
						feedback

Impact Management Actions	Implementatio	n				Monitoring			
	Responsible person	Method complementation		Timeframe implementatio	for	Responsible person	Frequency	Evidence of compliance from the	
<ul> <li>Management of equipment for excavation purposes</li> </ul>	Contractor	Undertake the	e	During	the	ECO	Monthly	contractor  Managemen	
must be undertaken in accordance with Section 5.18:  Workshop, equipment maintenance and storage; and		management of equipment for excavation as per the requirement of section 5.18	of or er	Construction Phase				t of equipment is undertaken in line with the requirements of section 5.18	
<ul> <li>Hazardous substances spills from equipment must be managed in accordance with Section 5.17: Hazardous substances.</li> </ul>	Contractor	Undertake the management of hazardous substances spill from equipment a per the requirements of section 5.17	of Is as e	During Construction Phase	the	ECO	Monthly	Managemen t of hazardous substances spills from equipment is undertaken in line with the requirements of section 5.17	

# 5.27 Installation of foundations, cable trenching and drainage systems

Impact management outcome: No environmental degradation occurs during the installation of foundation, cable trenching and drainage system.

Impact Management Actions	Implementation				Monitoring			
	Responsible	Method implement	of	Timeframe	for	Responsible	Frequency	Evidence of compliance
	person			implementation		person		
<ul> <li>Batching of cement to be undertaken in accordance with Section 5.19: Batching plants; and</li> </ul>	Contractor	Ensure batching cement	correct of	During construction phase	the	cEO	Weekly	Measures in place to ensure the batching of cement is done in accordance with Section 5.19:
<ul> <li>Residual solid waste must be disposed of in accordance</li> </ul>	Contractor	Undertake	the	During	the	ECO	Monthly	Batching plants  The disposal
with Section 5.8: Solid waste and hazardous management.	Schingeror	disposal of solid waste	residual e as per irements	Construction Phase			, we may	of residual solid waste is undertaken in line with section 5.8.

#### 5.28 Installation of equipment (circuit breakers, current Transformers, Isolators, Insulators, surge arresters, voltage transformers, earth switches)

Impact management outcome: No environmental degradation occurs as a result of installation of equipment.

Impact Management Actions	Implementatio	n		Monitoring		
	Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of
	person	implementation	implementation	person		compliance
Management of dust must be conducted in accordance with Section 5. 20: Dust emissions;	Contractor	Review and implement dust management actions in accordance with the requirement of Section 5.20 of this report	During the Construction Phase	ECO	Monthly	Dust managemen t actions observed to be in accordance with the requirement of Section 5.20 of this report
Management of equipment used for installation must be conducted in accordance with Section 5.18: Workshop, equipment maintenance and storage;	Contractor	Review and implement equipment management actions in accordance with the requirement of Section 5.18 of this report	During the Construction Phase	ECO	Monthly	Equipment managemen t actions observed to be in accordance with the requirement of Section 18 of this report
Management hazardous substances and any associated spills must be conducted in accordance with Section 5.17: Hazardous substances; and	Contractor	Review and implement hazardous substances and any associated spills in accordance with the requirement of	During the Construction Phase	ECO	Monthly	Hazardous substances and any associated spills managemen t actions observed to

Impact Management Actions	Implementatio	n		Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
	person	Section 5.17 of this report	препенанон	person		be in accordance with the requirement of Section 5.17 of this report
Residual solid waste must be recycled or disposed of in accordance with Section 5.8: Solid waste and hazardous management.	Contractor	Review and dispose/recycle residual solid waste in accordance with the requirement of Section 5.8 of this report	During the Construction Phase	ECO	Monthly	Dispose/recy cle residual solid waste observed to be in accordance with the requirement of Section 5.8 of this report

## 5.29 Steelwork Assembly and Erection

Impact management outcome: No environmental degradation occurs as a result of steelwork assembly and erection.

Impact Management Actions	Implementation	n	Monitoring			
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
During assembly, care must be taken to ensure that no wasted/unused materials are left on site e.g. bolts and nuts	Contractor	Conduct an inspection of the site once assembly is complete to remove all stray bolts or unused materials that may be left on site	Duration of the construction phase	ECO	Monthly	Evidence of leftover waste/unuse d materials on site following closure of assembly
Emergency repairs due to breakages of equipment must be managed in accordance with Section 5.18: Workshop, equipment maintenance and storage and Section 5.16: Emergency procedures.	Contractor	Review and conduct all emergency repairs in accordance with Sections 5.18 and 5.16 of this report	Duration of the construction phase	ECO	Monthly	Evidence of emergency repairs carried out having been conducted in accordance with Sections 5.18 and 5.16 of this report

# 5.30 Cabling and Stringing

Impact management outcome: No environmental degradation occurs as a result of stringing.

Impact Management Actions	Implementation Monitoring					
	Responsible person	Method of implementation	Timeframe f implementation	or Responsible person	Frequency	Evidence of compliance
<ul> <li>Residual solid waste (off cuts etc.) shall be recycled or disposed of in accordance with Section 6.8: Solid waste and hazardous Management;</li> </ul>	Contractor	Undertake recycling or disposal of solid waste as per the requirements of section 6.8	During the Construction Phase	ne ECO	Monthly	Undertake recycling or disposal of solid waste as per the requirements of section 6.8
Management of equipment used for installation shall be conducted in accordance with Section 5.18: Workshop, equipment maintenance and storage;	Contractor	Undertake the management of equipment as per the requirements of section 5.18	During the Construction Phase	ne ECO	Monthly	Managemen t of equipment is undertaken in line with the requirements of section 5.18
Management hazardous substances and any associated spills shall be conducted in accordance with Section 5.17: Hazardous substances.	Contractor	Undertake the management of hazardous substances as per the requirements of section 5.17	During th Construction Phase	ne ECO	Monthly	Managemen t of hazardous substances is undertaken in line with the requirements of section 5.17

### 5.31 Testing and Commissioning (all equipment testing, earthing system, system integration)

Impact management outcome: No environmental degradation occurs as a result of Testing and Commissioning.

Impact Management Actions	Implementation	n	Monitoring	Monitoring		
	Responsible	Method of	Timeframe fo	r Responsible	Frequency	Evidence of
	person	implementation	implementation	person		compliance
<ul> <li>Residual solid waste must be recycled or disposed of in</li> </ul>	Contractor	Undertake	During the	e ECO	Monthly	Undertake
accordance with Section 5.8: Solid waste and hazardous		recycling or	Construction			recycling or
management.		disposal of solid	Phase			disposal of
		waste as per the				solid waste as
		requirements of				per the
		section 5.8				requirements
						of section 5.8

#### 5.32 Socio-economic

Impact management outcome: enhanced socio-economic development.

Impact Management Actions	Implementation			Monitoring			
	Responsible	Method	of	Timeframe for	Responsible	Frequency	Evidence of
	person	implementation	n	implementation	person		compliance
- Develop and implement communication strategies to	dEO / cEO	Identify	and	Pre-construction &	ECO	Once, prior	Communicati
facilitate public participation;		implement		Construction		to the	on is
		appropriate				commence	undertaken
		strategies	for			ment of	as per the
		communication	on			constructio	identified
		with	the			n and	strategies

Impact Management Actions	Implementatio	Implementation				
	Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of
	person	implementation	implementation	person	rioquoricy	compliance
		communities		·	monthly	and no
		through			during the	complaints
		consideration of			constructio	are submitted
		the community			n	regarding
		needs				communicati
						on
- Develop and implement a collaborative and	Contractor	Development and	Pre-construction &	ECO	Once, prior	Conflict
constructive approach to conflict resolution as part of		implement a	Construction		to the	resolution is
the external stakeholder engagement process;		Grievance			commence	undertaken in
		Mechanism which			ment of	line with the
		considers the			constructio	requirements
		community needs			n and	of the
		and provides			monthly	Grievance
		procedures for			during the	Mechanism.
		conflict resolution			constructio	No
					n phase	complaints on conflict
						on conflict resolution is
						submitted by
						the
						community
- Sustain continuous communication and liaison with	Contractor	Development and	Pre-construction &	ECO	Once, prior	Communicati
neighboring owners and residents		implement and	Construction		to the	on / liaison
		Grievance			commence	with
		Mechanism			ment of	neighbouring
		provides			constructio	landowners
		procedures for			n and	and residents
		communication /			monthly	are
		liaison with			during the	undertaken in
		neighbouring			constructio	line with the
					n phase	requirements

Impact Management Actions	Implementatio	n		Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
	person	landowners and residents	implementation	person		of the Grievance Mechanism. No complaints on communicati on with neighbouring landowners and residents
Create work and training opportunities for local stakeholders; and	Contractor	Develop and implement a "locals first" policy for the provision of employment opportunities	Pre-construction & Construction	ECO	Once, prior to the commence ment of constructio n and monthly during the constructio n phase	are submitted The "locals first" policy is considered in terms of the employment and training opportunities
<ul> <li>Where feasible, no workers, with the exception of security personnel, must be permitted to stay over-night on the site. This would reduce the risk to local farmers.</li> </ul>	Contractor	Ensure no workers are permitted to stay over night on the site	Construction	ECO	Throughout constructio n	No workers remaining on site over night

# 5.33 Temporary closure of site

Impact management outcome: Minimise the risk of environmental impact during periods of site closure greater than five days.

Impact Management Actions	Implementation	n		Monitoring	Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	r Responsible person	Frequency	Evidence of compliance	
Bunds must be emptied (where applicable) and need to be undertaken in accordance with the impact management actions included in sections 5.17:     Hazardous substances and 5.18: Workshop, equipment maintenance and storage;	Contractor	Regular emptying of the bunds must be undertaken. This must be undertaken as per the requirements listed in sections 5.17 and 5.18	During the Construction Phase	e ECO	Prior to site closure for more than 05 days	Bunds are emptied as per the requirements listed under sections 5.17 and 5.18	
Hazardous storage areas must be well ventilated;	Contractor	Install appropriate ventilation in all hazardous storage areas	During the construction phase	ECO ECO	Prior to site closure for more than 05 days	Effective ventilation is installed in hazardous storage areas	
Fire extinguishers must be serviced and accessible.  Service records to be filed and audited at last service;	Contractor / cEO	Ensure fire extinguishers are serviced, as required and are easily accessible with appropriate signage indicating location. Ensure service records and kept up to date and filed	During the Construction Phase	e ECO	Prior to site closure for more than 05 days	Signage placed indicating location of fire extinguishers and service records	

Responsible person   Method of implementation   Timeframe for implementation   During the closure for more than of displayed;   COntractor / cEO	Monitoring			
person implementation implementation person compliant contact details displayed must be displayed;  - Emergency and contact details displayed must be displayed;  - Eo Contractor / cEO Prior to site closure for more than 05 days details a display accessible  - Security personnel must be briefed and have the facilities to contact or be contacted by relevant management and emergency personnel;  - Security personnel must be briefed and have the facilities to contact or be contacted by relevant management and emergency personnel;  - Security personnel must be briefed and have the facilities to contact or be contacted by relevant management and emergency personnel;  - Security personnel must be briefed and have the facilities to contact or be contacted by relevant management and emergency personnel;  - Security personnel must be briefed and have the facilities to contact or be contacted by relevant management and emergency personnel;  - Security personnel must be briefed and have the facilities to contact or be contacted by relevant management and emergency personnel;  - Security personnel must be briefed and have the facilities to contact or be contacted by relevant management and emergency personnel;  - Security personnel must be briefed and have the facilities to contact or be contacted by relevant with all security personnel to provide a brief of the project and security requirements.  - Provide facilities in order to contact	nce of			
displayed;  cEO  and contact details which are readily available and easily accessible  - Security personnel must be briefed and have the facilities to contact or be contacted by relevant management and emergency personnel;  CEO  and contact details which are readily available and easily accessible  - Security personnel must be briefed and have the facilities to contact or be contacted by relevant management and emergency personnel;  CEO  and contact Construction Phase  Pre-construction & ECO Prior to site closure for workshop with all security personnel to provide a brief of the project and security requirements. Provide facilities in order to contact				
details which are readily available and easily accessible  - Security personnel must be briefed and have the facilities to contact or be contacted by relevant management and emergency personnel;  - Security personnel must be briefed and have the facilities to contact or be contacted by relevant management and emergency personnel;  - Security personnel must be briefed and have the facilities to contact or be contacted by relevant management and emergency personnel;  - Security personnel must be briefed and have the facilities to contact or be contacted by relevant management and emergency personnel;  - Security personnel must be briefed and have the facilities to contact or be contacted by relevant management and emergency personnel;  - Security personnel must be briefed and have the facilities to contact or be contacted by relevant management and emergency personnel;  - Security personnel must be briefed and have the facilities to contact or be contacted by relevant management and emergency personnel;  - Security personnel must be briefed and have the facilities to contact or be contacted by relevant consultation with all security personnel to provide a brief of the project and security requirements.  - Provide facilities in order to contact	graphic			
readily available and easily accessible  - Security personnel must be briefed and have the facilities to contact or be contacted by relevant management and emergency personnel;  - Security personnel must be briefed and have the facilities to contact or be contacted by relevant management and emergency personnel;  - Security personnel must be briefed and have the facilities to contact or be contacted by relevant management and emergency personnel;  - Contractor in consultation with all security personnel to provide a brief of the project and security requirements.  - Pre-construction & ECO  - Prior to site construction workshop workshop personnel to provide a brief of the project and security requirements.  - Provide facilities in order to contact	of			
and easily accessible  - Security personnel must be briefed and have the facilities to contact or be contacted by relevant management and emergency personnel;  - Security personnel must be briefed and have the facilities to contact or be contacted by relevant management and emergency personnel;  - Security personnel must be briefed and have the facilities to contact or be contacted by relevant with all security personnel to provide a brief of the project and security requirements.  - Provide facilities in order to contact	ct			
- Security personnel must be briefed and have the facilities to contact or be contacted by relevant management and emergency personnel;  - Security personnel must be briefed and have the facilities to contact or be contacted by relevant management and emergency personnel;  - Security personnel must be briefed and have the facilities to contact or be contacted by relevant management and emergency personnel;  - Security personnel must be briefed and have the facilities to contact or be contacted by relevant consultation with all security personnel to provide a brief of the project and security requirements.  - Provide facilities in order to contact	s on			
- Security personnel must be briefed and have the facilities to contact or be contacted by relevant management and emergency personnel;  Hold a workshop with all security personnel to provide a brief of the project and security requirements.  Provide facilities in order to contact	У			
facilities to contact or be contacted by relevant management and emergency personnel;  with the ECO  with all security personnel to provide a brief of the project and security requirements.  Provide facilities in order to contact  with all security construction  closure for more than 05 days  construction  closure for more than 05 days  requirements.				
management and emergency personnel;  with the ECO  personnel to provide a brief of the project and security requirements.  Provide facilities in order to contact  more than 05 days  held must kept on first the contract.				
provide a brief of the project and security requirements.  Provide facilities in order to contact				
the project and security requirements.  Provide facilities in order to contact				
security requirements. Provide facilities in order to contact	n file by			
requirements.  Provide facilities in order to contact	actor			
Provide facilities in order to contact	icioi.			
order to contact				
emergency				
personnel				
- Night hazards such as reflectors, lighting, traffic signage Contractor Regular checks of During the ECO Prior to site Proof	of			
etc. must have been checked; night hazards must   Construction   closure for   checks				
be undertaken Phase more than night haz	hazards			
05 days must	be			
provided	ded by			
the				
contractor				
- Fire hazards identified and the local authority must have CEO / Identify any During the ECO Prior to site Proof been notified of any potential threats e.a. large brush Contractor in potential fire Construction closure for notification	of			
been notified of any potential threats e.g. large brush   Contractor in   potential   fire   Construction   closure   for   notification   stockpiles, fuels etc.;   consultation   hazards and notify   Phase   more   than   the	fire			
with the ECO   the relevant local   05 days   hazards				
	local			
authority				

Impact Management Actions	Implementation	on		Monitoring	Monitoring		
	Responsible person	Method of implementation	Timeframe for implementation	r Responsible person	Frequency	Evidence of compliance	
						must be provided by the Contractor	
Structures vulnerable to high winds must be secured;	Contractor	Ensure structures vulnerable to wind are secure prior to site closure	During th Construction Phase	e ECO	Prior to site closure for more than 05 days	Structures vulnerable to wind are secured prior to site closure	
Wind and dust mitigation must be implemented;	Contractor	Implement wind and dust mitigation prior to site closure	During th Construction Phase	e ECO	Prior to site closure for more than 05 days	Wind and dust mitigation is implemented prior to site closure	
Cement and materials stores must have been secured;	Contractor	Ensure cement and material stores are secured prior to site closure	During th Construction Phase	e ECO	Prior to site closure for more than 05 days	Cement and material stores are secured prior to site closure	
Toilets must have been emptied and secured;	Contractor	Ensure toilets are emptied and secured prior to site closure	During th Construction Phase	e ECO	Prior to site closure for more than 05 days	Toilets are emptied and secured prior to site closure	
Refuse bins must have been emptied and secured;	Contractor	Ensure refuse bins are emptied and secured prior to site closure	During th Construction Phase	e ECO	Prior to site closure for more than 05 days	Refuse bins are emptied and secured prior to site closure	

Impact Management Actions	Implementatio	n	Monitoring			
	Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of
	person	implementation	implementation	person		compliance
<ul> <li>Drip trays must have been emptied and secured.</li> </ul>	Contractor	Ensure drip trays	During the	ECO	Prior to site	Drip trays are
		are emptied and	Construction		closure for	emptied and
		secured prior to	Phase		more than	secured prior
		site closure			05 days	to site closure

### 5.34 Dismantling of old equipment

**Impact management outcome:** Impact to the environment to be minimised during the dismantling, storage and disposal of old equipment commissioning.

Impact Management Actions	Implementatio	n	Monitoring			
	Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of
	person	implementation	implementation	person		compliance
- All old equipment removed during the project must be	Contractor	Ensure old	During the	ECO	Monthly	Drip trays are
stored in such a way as to prevent pollution of the		equipment is	Construction			emptied and
environment		secured and	Phase			secured prior
		where required,				to site closure
		stored in				
		contained areas				
		where no spillage				
		or pollution may				
		result				
- Oil containing equipment must be stored to prevent	Contractor	Ensure old	During the	ECO	Monthly	Drip trays are
leaking or be stored on drip trays;		equipment is	Construction			emptied and
		secured and	Phase			secured prior
		where required,				to site closure
		stored in				
		contained areas				

Impact Management Actions	Implementatio	n	Monitoring	Monitoring			
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance	
		where no spillage or pollution may result					
All scrap steel must be stacked neatly and any disused and broken insulators must be stored in containers;	Contractor	Store defunct insulators in containers and scrap steel in one single place, neatly secured	During the Construction Phase		Monthly	Where needed, insulators observed to be stored in containers and scrap stored neatly as determined by the ECO	
<ul> <li>Once material has been scrapped and the contract has been placed for removal, the disposal Contractor must ensure that any equipment containing pollution causing substances is dismantled and transported in such a way as to prevent spillage and pollution of the environment;</li> </ul>	Contractor , cEO	Ensure dismantling and packaging of scrapped material is transported in such a way as to prevent spillage and pollution of the environment;	During the Construction Phase	ECO	Monthly	Where needed, insulators observed to be stored in containers and scrap stored neatly as determined by the ECO	
The Contractor must also be equipped to contain and clean up any pollution causing spills; and	cEO and Contractor	Provide training on the use of spill kits to the relevant employees	During the Construction Phase	ECO	Monthly	Proof of training to be provided by the contractor	

Impact Management Actions	Implementation	n	Monitoring			
	Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of
	person	implementation	implementation	person		compliance
- Disposal of unusable material must be at a licensed	cEO and	Ensure a registered	During the	ECO	Monthly	Visual
waste disposal site.	Contractor	waste disposal site	Construction			inspection of
		is utilised and keep	Phase			disposal
		disposal slips and				record
		record in the site				documentati
		environmental file				on and
						registration of
						the waste
						disposal site
						utilised.

### 5.35 Landscaping and rehabilitation

Impact management outcome: Areas disturbed during the development phase are returned to a state that approximates the original condition.

Impact Management Actions	Implementation				Monitoring			
	Responsible	Method	of	Timeframe	for	Responsible	Frequency	Evidence of
	person	implementation	า	implementation	n	person		compliance
- All areas disturbed by construction activities must be	Contractor	Develop	and	Pre-construction	on &	cEO	Weekly	Rehabilitation
subject to landscaping and rehabilitation; All spoil and		implement	а	Rehabilitation				of the
waste must be disposed of to a registered waste site;		rehabilitation p	olan					disturbed
		for	the					areas is
		rehabilitation o	of all					undertaken
		disturbed areas	S.					as per the
								rehabilitation

Impact Management Actions	Implementatio	n	Monitoring			
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
		Dispose of all spoil and waste at a licensed waste disposal facility				plan. All certificates of waste disposal at licensed facilities are available.
<ul> <li>All slopes must be assessed for contouring, and to contour only when the need is identified in accordance with the Conservation of Agricultural Resources Act, No 43 of 1983</li> </ul>	Contractor in consultation with the ECO	Assess all slopes and determine whether contouring is required	Rehabilitation	CEO	Weekly	All slopes are assessed and contoured as required
<ul> <li>All slopes must be assessed for terracing, and to terrace only when the need is identified in accordance with the Conservation of Agricultural Resources Act, No 43 of 1983;</li> </ul>	Contractor in consultation with the ECO	Assess all slopes and determine whether terracing is required	Rehabilitation	cEO	Weekly	All slopes are assessed and terraced as required
Berms that have been created must have a slope of 1:4 and be replanted with indigenous species and grasses that approximates the original condition;	Contractor	Ensure all berms have a slope of 1:4 and is replanted with indigenous species and grasses	Rehabilitation	CEO	Weekly	All berms have a slope of 1:4 and is replanted with indigenous species and grasses
<ul> <li>Where new access roads have crossed cultivated farmlands, that lands must be rehabilitated by ripping which must be agreed to by the holder of the EA and the landowners;</li> </ul>	Not applicable	>				
<ul> <li>Rehabilitation of access roads outside of farmland;</li> </ul>	Not applicable	<del></del>				

Impact Management Actions	Implementation	on	Monitoring			
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
<ul> <li>Indigenous species must be used for with species and/grasses to where it compliments or approximates the original condition;</li> </ul>	Contractor	Make use of indigenous species for rehabilitation	Rehabilitation	CEO	Weekly	Indigenous species are used for rehabilitation
Stockpiled topsoil must be used for rehabilitation (refer to Section 5.24: Stockpiling and stockpiled areas);	Contractor	Ensure stockpiled topsoil is used as per the requirements listed under section 5.24	Rehabilitation	cEO	Weekly	Stockpiled topsoil is used as per the requirements listed under section 5.24
<ul> <li>Stockpiled topsoil must be evenly spread so as to facilitate seeding and minimise loss of soil due to erosion;</li> </ul>	Contractor	Ensure that topsoil is spread evenly	Rehabilitation	cEO	Weekly	Topsoil is spread evenly
Before placing topsoil, all visible weeds from the placement area and from the topsoil must be removed;	Contractor	Remove all visible weeds from placement area and topsoil before spreading the topsoil	Rehabilitation	cEO	Weekly	No weeds are visible in the placement area or the topsoil
Subsoil must be ripped before topsoil is placed;	Contractor	Undertake the ripping of subsoil prior to the spreading of topsoil	Rehabilitation	CEO	Weekly	Subsoil is ripped before topsoil is placed
<ul> <li>The rehabilitation must be timed so that rehabilitation can take place at the optimal time for vegetation establishment;</li> </ul>	Contractor	Plan the timeframe for rehabilitation in order to undertake vegetation planting during the optimal time for	Rehabilitation	ECO	At the start of rehabilitation to confirm correct timeframe	Rehabilitation is undertaken during the optimal time

Impact Management Actions	Implementatio	n		Monitoring		
	Responsible person	Method of implementation vegetation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance
Where impacted through construction related activity,     all sloped areas must be stabilised to ensure proper     rehabilitation is effected and erosion is controlled;	Contractor	establishment  All disturbed slope areas must be stabilised	Rehabilitation	cEO	Weekly	Disturbed slopes are stabilised sufficiently
<ul> <li>Sloped areas stabilised using design structures or vegetation as specified in the design to prevent erosion of embankments. The contract design specifications must be adhered to and implemented strictly;</li> </ul>	Contractor	Stabilise slopes as per the design specifications	Pre-construction & Rehabilitation	cEO	Weekly	Slopes are stabilised as per the design specifications
Spoil can be used for backfilling or landscaping as long as it is covered by a minimum of 150 mm of topsoil.	Contractor	Spoil used for landscaping must be applied as per the listed requirements	Rehabilitation	CEO	Weekly	Photographic record of spoil used for landscaping purposes as well as feedback from the contractor
<ul> <li>Where required, re-vegetation including hydro-seeding can be enhanced using a vegetation seed mixture as described below. A mixture of seed can be used provided the mixture is carefully selected to ensure the following:</li> <li>a) Annual and perennial plants are chosen;</li> <li>b) Pioneer species are included;</li> <li>c) Species chosen must be indigenous to the area with the seeds used coming from the area;</li> <li>d) Root systems must have a binding effect on the soil;</li> </ul>	Contractor in consultation with a suitably qualified specialist	Make use of a suitable vegetation seed mixture should enhancement be required	Rehabilitation	ECO	As and when required	Use of a suitable vegetation seed mixture if required

Impact Management Actions	Implementatio	n	Monitoring			
	Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of
	person	implementation	implementation	person		compliance
e) The final product must not cause an ecological						
imbalance in the area						

## 6 ACCESS TO THE GENERIC EMPr

Once completed and signed, to allow the public access to the generic EMPr, the holder of the EA must make the EMPr available to the public in accordance with the requirements of Regulation 26(h) of the EIA Regulations.

#### **PART B: SECTION 2**

#### 7 SITE SPECIFIC INFORMATION AND DECLARATION

#### 7.1 Sub-section 1: contact details and description of the project

#### 7.1.1 Details of the applicant:

Name of applicant: Voltalia South Africa (Pty) Ltd

Contact person: Armandt Andre Joubert

Tel No: n/a

Postal Address: 30th Floor, The Box. 9 Riebeek Street, Cape Town, Physical Address: 30th Floor, The Box. 9 Riebeek Street, Cape Town,

# 7.1.2 Details and expertise of the EAP:

Name of EAP: Jo-Anne Thomas

Tel No: 011-656-3237 Fax No: 086-684-0547

E-mail address: joanne@savannahsa.com

Expertise of the EAP (Curriculum Vitae included): Refer to Appendix 2 of this EMPr for

a CV of the EAP

7.1.3 Project name: Kiara PV3 Facility and Associated Infrastructure, North West Province

### 7.1.4 Description of the project:

Voltalia South Africa (Pty) Ltd is proposing the development of a commercial photovoltaic (PV) solar energy facility and associated infrastructure on a site located approximately 16km north-east of the town of Lichtenburg, within the Ditsobotla Local Municipality and the Ngaka Modiri Molema District Municipality in the North West The facility will have a contracted capacity of up to 120MW and will be known as the Kiara PV3 Facility. The project is planned as part of a larger cluster of renewable energy projects, which include six (6) additional PV facilities, each up to 130MW (known as the Kiara PV1, Kiara PV2, Kiara PV4, Kiara PV5 and Kiara PV6 and Kiara PV7) and grid connection infrastructure connecting the facilities to the existing Watershed Substation (refer to These projects are proposed by separate Specialist Purpose Vehicles (SPVs)<sup>1</sup>, and are assessed through separate Environmental Impact Assessment (EIA) processes.

The project site (~856.5ha in extent) has been identified by the applicant as a technically feasible site which has the potential for the development of the Kiara PV3 Facility, including a Battery Energy Storage System (BESS).

<sup>&</sup>lt;sup>1</sup> The development of the various projects under separate SPVs is in accordance with the DMRE's requirements under the REIPPPP.

Infrastructure associated with the solar PV facility will include:

- » Solar PV array comprising PV modules and mounting structures
- » Inverters and transformers
- » Cabling between the panels
- » 132kV onsite facility substation/ 132kV powerline from the onsite substation to the switching collector substation
- » Cabling from the onsite substation to the collector substation (either underground or overhead).
- » Electrical and auxiliary equipment required at the collector substation that serves the solar energy facility, including switchyard/bay, control building, fences, etc.
- » Battery Energy Storage System (BESS)
- » Site and internal access roads (up to 8m wide)
- » Site offices and maintenance buildings, including workshop areas for maintenance and storage.
- » Temporary and permanent laydown area

### 7.2 Sub-section 2: Development footprint site map

This sub-section must include a map of the site sensitivity overlaid with the preliminary infrastructure layout. The sensitivity map must be prepared from the national web based environmental screening tool, when available for compulsory use at: <a href="https://screening.environment.gov.za/screeningtool">https://screening.environment.gov.za/screeningtool</a>. The sensitivity map shall identify the nature of each sensitive feature e.g. threatened plant species, archaeological site, etc. Sensitivity maps shall identify features both within the planned working area and any known sensitive features within 50 m from the development footprint.

It must be noted that the maps provided below relate to the larger PV facility which the power line is associated with.



Figure 1: Sensitivity map of the development footprint of the Kiara PV3 Facility

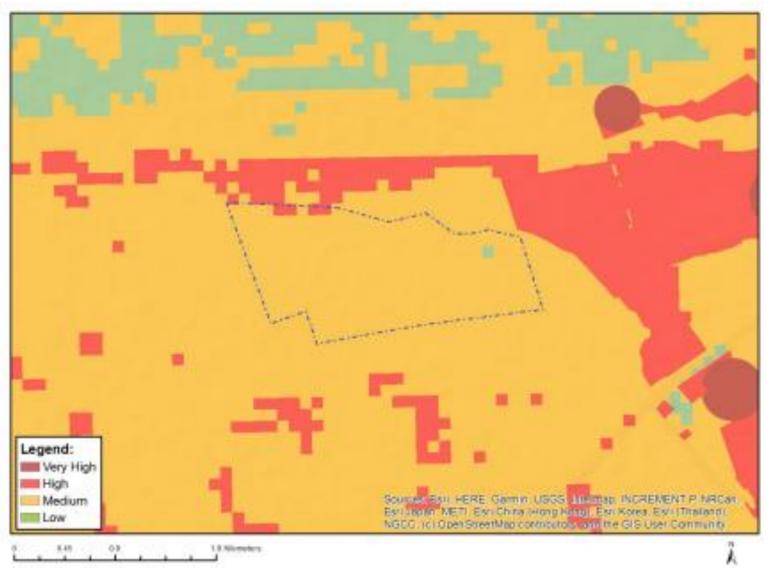


Figure 2: Map of relative agriculture theme sensitivity



Figure 3: Map of relative animal species theme sensitivity



Figure 4: Map of relative aquatic biodiversity theme sensitivity



Figure 5: Map of relative archaeological and cultural heritage theme sensitivity.



Figure 6: Map of relative avian theme sensitivity

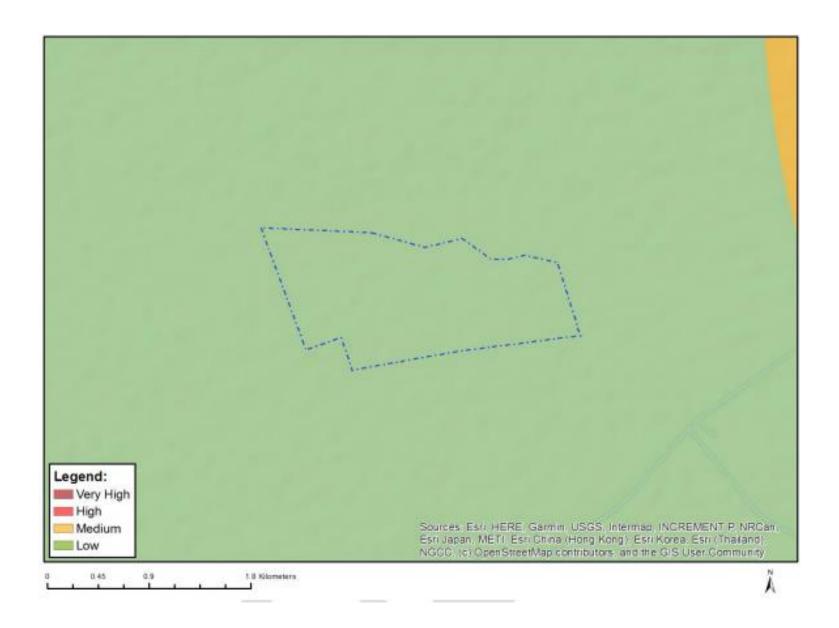


Figure 7: Map of relative civil aviation theme sensitivity



Figure 8: Map of relative defence theme sensitivity



Figure 9: Map of relative palaeontology theme sensitivity

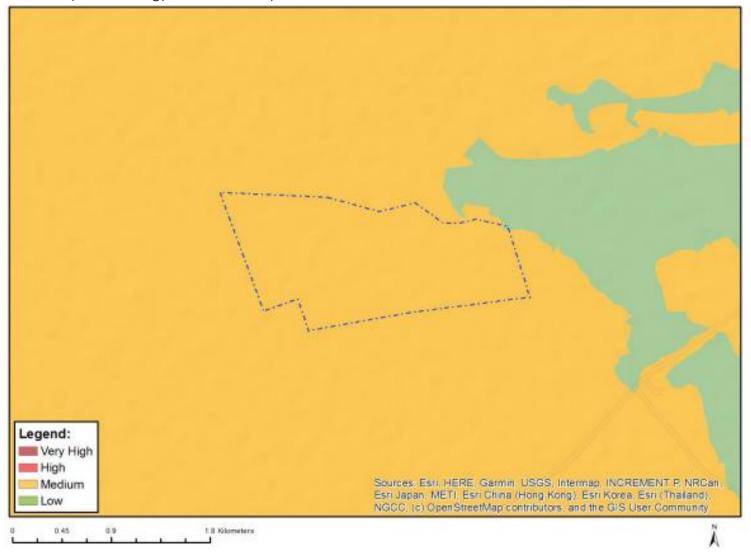


Figure 10: Map of relative plant species theme sensitivity



Figure 11: Map of relative RFI theme sensitivity



Figure 12: Map of relative terrestrial biodiversity theme sensitivity

#### 7.3 Sub-section 3: Declaration

The proponent/applicant or holder of the EA affirms that he/she will abide and comply with the prescribed impact management outcomes and impact management actions as stipulated in part B: section 1 of the generic EMPr and have the understanding that the impact management outcomes and impact management actions are legally binding. The proponent/applicant or holder of the EA affirms that he/she will provide written notice to the CA 14 day prior to the date on which the activity will commence of commencement of construction to facilitate compliance inspections.

Signature Proponent/applicant/ holder of EA	Date:

### 7.4 Sub-section 4: amendments to site specific information (Part B; section 2)

Should the EA be transferred to a new holder, <u>Part B: Section 2</u> must be completed by the new holder and submitted with the application for an amendment of the EA in terms of Regulations 29 or 31 of the EIA Regulations, whichever applies. The information submitted for an amendment to an environmental authorisation will be considered to be incomplete should a signed copy of <u>Part B: Section 2</u> not be submitted. Once approved, <u>Part B: Section 2</u> forms part of the EMPr for the development and the EMPr becomes legally binding to the new EA holder.

#### 8 SITE SPECIFIC ENVIRONMENTAL ATTRIBUTES

If any specific environmental sensitivities/attributes are present on the site which require more specific impact management outcomes and actions, not included in the pre-approved generic EMPr template, to manage impacts, those impact management outcomes and impact management actions must be included in this section. These specific management controls must be referenced spatially and must include impact management outcomes and impact management actions. The management controls including impact management outcomes and impact management actions must be presented in the format of the preapproved generic EMPr template. This applies only to additional impact management outcomes and impact management actions that are necessary.

If <u>Part C</u> is applicable to the development as authorised in the EA, it is required to be submitted to the CA together with the BAR or EIAR, for consideration of, and decision on, the application for EA. The information in this section must be prepared by an EAP and the name and expertise of the EAP, including the curriculum vitae are to be included. Once approved, <u>Part C</u> forms part of the EMPr for the site and is legally binding.

This section will **not be required** should the site contain no specific environmental sensitivities or attributes.

# **CONSTRUCTION AND DECOMMISSIONING OUTCOMES AND ACTIONS**

# 7.1 Ecology (Fauna and Flora)

**Impact management outcome:** Direct loss of vegetation, including listed and protected species is reduced.

Impact Management Actions	Implementation			Monitoring		
	Responsible	Method of	Timeframe for	Responsible	Timeframe	Evidence of
	person	implementation	implementati	person		compliance
			on			
Pre-construction walk-through of the grid corridor to locate species of conservation concern that can be translocated or avoided.	dEO, Specialist	Visual inspection of the layout with walk-through report produced	Prior to construction	ECO	Once prior to commencement of construction	Walk-through report produced and kept on file during construction
Vegetation clearing to commence only after     walkthrough has been conducted and necessary     permits obtained	Contractor	Clearing vegetation in line with the obtained permits	Prior to commence ment of construction	ECO	Once prior to commencement of construction	Record of permits
Demarcate all areas to be cleared with construction tape or similar material where practical. However, caution should be exercised to avoid using material that might entangle fauna.	Contractor	Erect appropriate temporary barriers around construction areas and ensure material used is fauna-friendly and must be removed following completion of construction.	At the commence ment and for the duration of the construction phase	ECO	Monthly	Access to construction area is closed-off through temporary barriers and barriers are maintained to a sufficient standard

Impact Management Actions	Implementation			Monitoring		
	Responsible person	Method of implementation	Timeframe for implementati on	Responsible person	Timeframe	Evidence of compliance
- Ensure that laydown areas, construction camps and other temporary use areas are located in areas of low and medium sensitivity and are properly fenced or demarcated as appropriate and practically possible.	cEO, Specialist, Contractor	Laydown areas to be defined during planning of construction activities	Duration of construction phase	ECO	Weekly	Material used to demarcate construction area is fauna-friendly and removed following completion of construction.  Laydown areas located within previously transformed areas or areas of low sensitivity
<ul> <li>Pre-construction environmental induction for all construction staff on site to ensure that basic environmental principles are adhered to. This includes topics such as no littering, appropriate handling of pollution and chemical spills, avoiding fire hazards, minimizing wildlife interactions, remaining within demarcated construction areas etc.</li> </ul>	cEO	Requirement for induction of all staff prior to commencement activities, as well as the development and application of an induction programme	Duration of construction phase	ECO	Monthly	Induction roster of all staff completed, maintained and available on site, induction programme material observed and on file on site.

Impact Management Actions	Implementation			Monitoring		
	Responsible	Method of	Timeframe for	Responsible	Timeframe	Evidence of
	person	implementation	implementati	person		compliance
			on			
Demarcate all areas to be cleared with construction tape or other appropriate and effective means. However, caution should be exercised to avoid using material that might entangle fauna.	dEO / cEO in consultation with the ECO	Erect appropriate temporary barriers around construction areas and ensure material used is fauna-friendly and must be removed following completion of construction.	At the commence ment and for the duration of the construction phase	ECO	Monthly	Access to construction area is closed- off through temporary barriers and barriers are maintained to a sufficient standard  Material used to demarcate construction
						area is fauna- friendly and removed following completion of construction.
<ul> <li>Pre-construction walk-through of the footprint to locate any active burrows within the site. If there are any active burrows present, the resident fauna should be captured and translocated prior to construction.</li> </ul>	cEO, Specialist	Develop a search and relocation plan for fauna species and obtain the relevant permits for the removal of protected species	Prior to construction	ECO	Monthly	No fauna unnecessarily harmed by construction activities  Necessary permits obtained prior to the removal of threatened

Impact Management Actions	Implementation			Monitoring		
	Responsible	Method of	Timeframe for	Responsible	Timeframe	Evidence of
	person	implementation	implementati	person		compliance
			on			
						fauna species,
						and copies of
						permits
						observed during
						audit
- During construction, any fauna directly threatened by	cEO, Specialist,	Implement search	Operation	Auditor	Annually	No fauna
the construction activities should be removed to a safe	Contractor	and relocation plan				harmed as a
location by the ECO or other suitably qualified person.		for threatened or				result of
		dangerous fauna				maintenance
		species and obtain				activities.
		the relevant permits				
		for the removal of				Necessary
		these species				permits
						obtained prior
						to the removal
						of threatened
						fauna species,
						and copies of
						permits
						observed during
The West College Park In Proceedings of the Alberta		A	D will be a	500		audit.
- The illegal collection, hunting or harvesting of any plants	Contractor	Awareness created	Duration of	ECO	Weekly	No evidence of
or animals at the site should be strictly forbidden.	cEO	regarding	construction			collection,
Personnel should not be allowed to wander off of the		prohibition on the				hunting or
construction site.		collection, hunting				harvesting of
		or harvesting of any				any plants or
No fires should be allowed within the site as the section with	aFO	plants or animals	Duration of	ECO	Woolds:	animals
No fires should be allowed within the site as there is a risk     of many and all fires.	cEO	Awareness created	Duration of	ECO	Weekly	No fires on site
of runaway veld fires.		regarding the prohibition of fires	construction			
		on site				
		011 3116				

Impact Management Actions	Implementation	n		Monitoring		
	Responsible	Method of	Timeframe for	Responsible	Timeframe	Evidence of
	person	implementation	implementati	person		compliance
			on			
No fuelwood collection should be allowed on-site.	cEO, Developer	Place signs on site indicating the fuelwood collection is prohibited and include this point in the environmental induction training	During the construction phase	ECO	Weekly	Sign prohibiting collection of fuelwood observed on site and evidence of discussion of this point contained in environmental induction training material
<ul> <li>All construction vehicles should adhere to a low-speed limit (40km/h for cars and 30km/h for trucks) to avoid collisions with susceptible species such as snakes and tortoises and rabbits or hares. Speed limits should apply within the facility as well as on the public gravel access roads to the site.</li> </ul>	Contractor, cEO	Install speed signage throughout site, include speed limit into induction and ensure all staff entering site are aware of the requirement to implement speed limits. Institute verbal and written warnings for violations and appropriate fines for repeat contraventions. Written log of fines and warning issued kept on site	During the construction phase	ECO	Monthly	Minimal instances of speeding as observed on site during audits and as evidenced in the written log of warnings and fines issued for contraventions

Impact Management Actions	Implementation			Monitoring		
	Responsible	Method of	Timeframe for	Responsible	Timeframe	Evidence of
	person	implementation	implementati	person		compliance
			on			
- All personnel should undergo environmental induction	cEO	Requirement for	Duration of	ECO	Monthly	Induction roster
with regards to fauna and in particular awareness about		induction of all staff	construction			of all staff
not harming or collecting species such as snakes,		prior to entry, as	phase			completed,
tortoises and snakes which are often persecuted out of		well as the				maintained and
fear or superstition.		development and				available on
		application of an				site, induction
		induction				programme
		programme				material
						observed and
						on file on site
						during audits

# 7.2 Avifauna

Impact management outcome: Displacement of priority bird species and collision trauma

Impact Management Actions	Implementation			Monitoring			
	Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of	
	person	implementation	implementation	person		compliance	
<ul> <li>Reduce or minimise the use of outdoor lighting to avoid attracting birds to the lights or to reduce potential disorientation to migrating birds.</li> </ul>	Developer cEO	Communicate this requirement to the	During the construction phase	ECO	Throughout the construction face.	Use of minimal lighting observed	
poternial disorientation to migrating birds.	CEO	appropriate	priase		idce.	observed	
	Contractor	Contractor					

# 7.3 Heritage

Impact management outcome: Impacts on heritage and potential burial sites

Impact Management Actions	Implementation			Monitoring		
	Responsible Method of Timeframe for Res		Responsible	Frequency	Evidence of	
	person	implementation	implementation	person		compliance
- A chance find procedure must be implemented in the	Contractor/E	Training of staff of	During	ECO	As and when	Register indicating
event that archaeological or palaeontological	CO	possible find of	construction		required	any heritage
resources are found.		heritage resources.				resources finds.

## 7.4 Visual

**Impact management outcome:** Visual impact of construction activities on sensitive visual receptors, and the potential impact on the sense of place is reduced.

Impact Management Actions	Implementatio	Implementation			Monitoring			
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance		
Retain and maintain natural vegetation immediately adjacent to the development footprint.	Project proponent/ design consultant Contractor	Visual inspection of the layout to ensure that vegetation immediately adjacent to the development footprint will not be disturbed	Prior to construction and during construction	ECO	Ongoing throughout construction	Onsite evidence that natural vegetation immediately adjacent to the development footprint/servitu de is retained and maintained.		
		Ensure that natural vegetation immediately adjacent to the						

Impact Management Actions	Implementation			Monitoring			
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance	
		development footprint/servitude is retained and maintained.					
Consult adjacent landowners (if present) in order to inform them of the development and to identify any (valid) visual impact concerns.	Developer	Consultation between the developer and adjacent landowners.	During construction	ECO	As and when required	Proof of consultation with adjacent landowners	
Ensure that vegetation is not unnecessarily removed during the construction phase.	Contractor	Visual inspection of the project site to ensure that no unnecessary vegetation clearance is being undertaken.  Include this mitigation in the contractor's environmental awareness training.	During construction	ECO	Daily, during the vegetation clearance phase and monthly thereafter	Onsite evidence that not unnecessary vegetation clearance is being undertaken.	
<ul> <li>Plan the placement of laydown areas and temporary construction equipment camps in order to minimise vegetation clearing (i.e., in already disturbed areas) wherever possible.</li> </ul>	Project proponent/ design consultant  Contractor cEO	Ensure that temporary construction infrastructure in the final layout is placed within already disturbed areas, where possible.	Prior to construction and during construction	ECO	Once-off review of the final layout prior to construction and as and when required during the	Photographic proof that temporary construction infrastructure is placed in already disturbed areas, where possible.	

Impact Management Actions	Implementation	on		Monitoring			
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance	
Restrict the activities and movement of construction workers and vehicles to the immediate construction site and existing access roads.		Ensure that temporary construction infrastructure is established within already disturbed areas, where possible, during the construction phase.  Demarcate construction site to restrict movement within the construction site and immediate area. Inform the contractors, through inclusion of this condition in the environmental awareness training and contractor's packs, that movement should be restricted to existing access	Duration of the construction phase	ECO	Construction phase  Monthly	Final layout shows placemen of temporary construction infrastructure within already disturbed areas.  Reduced duration of the construction phase. Copy of construction programme provided during audit	

Impact Management Actions	Implementation	on		Monitoring			
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance	
<ul> <li>Ensure that rubble, litter, and disused construction materials are appropriately stored (if not removed daily) and then disposed regularly at licensed waste facilities.</li> </ul>	Contractor	Waste to be appropriately stored in designated areas.  Disposal of waste at licensed waste disposal facilities must be undertaken as per the waste management plan	Duration of the construction phase	ECO	Monthly	Appropriate storage of waste in designated areas.  Disposal certificates of disposal at licensed facilities to be provided	
Reduce and control construction dust using approved dust suppression techniques as and when required (i.e. whenever dust becomes apparent).	Contractor	Apply appropriate dust suppression techniques.	Duration of the construction phase	ECO	Weekly	Contractor to provide proof of use of appropriate dust suppression technique. Photographic evidence that dust suppression is being undertaken on site	
<ul> <li>Restrict construction activities to daylight hours whenever possible in order to reduce lighting impacts.</li> </ul>	Developer Contractor cEO	Ensure that working hours are clearly communicated to construction workers and that the working hours are restricted to	Duration of the construction phase	ECO	Daily	Limited construction activities taking place at night.	

Impact Management Actions	Implementation	on		Monitoring			
	Responsible person	Method of implementation	Timeframe for implementation	Responsible person	Frequency	Evidence of compliance	
		daylight hours and are adhered to.					
Remove infrastructure not required for the post-decommissioning use.	Contractor	Removal of all infrastructure not required for the post-decommissioning use.	At the end of the Construction Phase	ECO dEO	Once, following the completion of the construction phase	No infrastructure that is not required for the post-decommissionin g use is present following the completion of the construction phase.	
Rehabilitate all disturbed areas immediately after the completion of construction works.	Contractor	Ensure that disturbed areas are rehabilitated immediately after completion of construction works and that this is communicated to the contractor.  Develop and implement a rehabilitation plan for the site.	Following completion of construction	ECO	As and when required	Visual observation that disturbed areas are rehabilitated immediately after the completion of construction works.	

# **OPERATIONAL PHASE OUTCOMES AND ACTIONS**

# 7.5 Ecology (Fauna and Flora)

**Impact management outcome:** Direct loss of vegetation, including listed and protected species is reduced.

lm	pact Management Actions	Implementation			Monitoring			
		Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of	
		person	implementation	implementation	person		compliance	
-	Any potentially dangerous fauna such as snakes or fauna	cEO, Specialist,	Develop a	Operation and	dEO	As and	Necessary	
	threatened by the maintenance and operational activities	Contractor	search and	maintenance		when	permits	
	should be removed to a safe location.		relocation plan			required	obtained prior	
			for threatened				to the removal	
			or dangerous				of threatened	
			fauna species				fauna species,	
			and obtain the				and copies of	
			relevant permits				permits	
			for the removal				observed during	
			of these species				audit.	
-	All hazardous materials should be stored in the appropriate	Contractor	Suitable bunding	Duration of the	dEO	Monthly	Effective	
	manner to prevent contamination of the site. Any accidental		and	project			bunding and	
	chemical, fuel and oil spills that occur at the site should be		containment,				containment of	
	cleaned up in the appropriate manner as related to the nature		demarcation				hazardous	
	of the spill.		and access				materials as	
			control				evidenced on	
			measures				site, along with	
			implemented for				suitable access	
			hazardous				control and	
			materials at				demarcation	
			onsite stores. Spill				provided at	
			prevention and				hazardous	
			response plan				materials stores.	
			developed, and				Written log of	

Impact Management Actions	Implementation	1		Monitoring			
	Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of	
	person	implementation	implementation	person		compliance	
		spill kits made				spills and clean	
		available, as				up actions	
		well as all staff				implemented	
		inducted with				observed and	
		spill response				kept on file at	
		procedure and				site	
		a log of					
		inductions kept					
		on file. Written					
		record of spills					
		and clean up					
		actions kept on					
		site					
- All vehicles accessing the site should adhere to a low-speed limit	Contractor,	Install speed	During the	dEO	Monthly	Minimal	
(30km/h max) to avoid collisions with susceptible species such as	cEO	signature	construction			instances of	
snakes and tortoises.		throughout site,	phase			speeding as	
		include speed				observed on site	
		limit into				during audits	
		induction and				and as	
		ensure all staff				evidenced in	
		entering site is				the written log	
		aware of the				of warnings and	
		requirement to				fines issued for	
		implement				contraventions	
		speed limits.					
		Institute verbal					
		and written					
		warnings for					
		violations and					
		appropriate					
		fines for repeat					
		contraventions.					

Impact Management Actions	Implementation			Monitoring			
	Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of	
	person	implementation	implementation	person		compliance	
		Written log of					
		fines and					
		warning issued					
		kept on site					
- Alien plant control and erosion management at the site	Operator	Invasive Alien	Operation	External	Annually –	Invasive alien	
should take place according to the respective		Plant species		Auditor, dEO	external	plant species	
management plans.	Specialist	eradication and			audit and	appropriately	
		management			quarterly	managed	
		programme			dEO		
		developed for					
		the construction					
		phase of the					
		project,					
		detailing					
		monitoring					
		required, control					
		methods and					
		frequency.					
- All roads and other hardened surfaces should have runoff	Contractor,	Develop and	Prior to	dEO/cEO	Monthly	Evidence of	
control features which redirect water flow and dissipate any	cEO	implement a	construction			implementation	
energy in the water which may pose an erosion risk.		stormwater	commencing,			of the	
		management	and for the			stormwater	
		plan	duration of			management	
			construction			plan is observed	
			and operation				
			phase				
- Regular monitoring for alien plant invasion and erosion after	Operator	Invasive Alien	Operation	External	Annually –	Invasive alien	
construction to ensure that no invasion or erosion problems		Plant species		Auditor, dEO	external	plant species	
have developed as result of the disturbance must be	Specialist	eradication and			audit and	appropriately	
undertaken, as per the respective Management Plans for the		management			quarterly	managed	
project.		programme			dEO		

Impact Management Actions	Implementation	1		Monitoring			
	Responsible	Method of	Timeframe for	Responsible	Frequency	Evidence of	
	person	implementation	implementation	person		compliance	
		developed for					
		the construction					
		phase of the					
		project,					
		detailing					
		monitoring					
		required, control					
		methods and					
		frequency.					
- All disturbed areas that are not used such as excess road	Contractor,	Visual inspection	Operation	cEO, dEO	Monthly	No evidence of	
widths, should be rehabilitated with locally occurring shrubs	cEO	of infrastructure	phase			disturbed areas	
and grasses after construction to reduce the overall footprint		to determine if				affected by	
of the development.		all areas have				development	
		been re-				and negligible	
		vegetated				erosion	
						observed	
- No planting or importing any listed invasive alien plant	Contractor	Identify listed	Prior to	cEO, dEO	When	No evidence of	
species (all Category 1a, 1b and 2 invasive species) to the	cEO	alien invasive	operation		required	identified alien	
site for landscaping, rehabilitation or any other purpose must		plants which	(rehabilitation)			invasive species	
be undertaken.		may not be				for site	
		used for				landscaping or	
		rehabilitation				rehabilitation	

To be prepared by the contractor prior to commencement of the activity. The method statements are <b>not required</b> to be submitted to the CA.	APPENDIX 1: METHOD STATEMENTS

# **APPENDIX 2: CV OF THE EAP**