


- 2 3 6 use existing roads and gates giving access to and running across the Property and to erect in any fence such gates as may be necessary or convenient to gain access to or exit from the Property and the Goods or in order to gain access to any adjacent property in the exercise of rights similar to the Rights,
- 2 3 7 remove any material or structures, and cut or trim any tree, bush or grass within the Wayleave Area or to the extent necessary where the Goods extends beyond the Wayleave Area, in order to comply with the restrictions referred to in paragraph 3 2 hereof,
- 2 3 8 every ancillary right necessary or convenient for the proper exercise of the Rights granted to Eskom, and
- 2 3 9 At Eskom's election, have this wayleave registered as a servitude against the title deed of the Property
- 2 4 The Rights will apply to all electricity infrastructure on the Property and the area which such infrastructure covers will be deemed to be included in the Wayleave Area and/or Restricted Area It is agreed that the Owner herewith grants permission for all electricity infrastructure on the Property to remain on the Property
- 2 5 Any expenses to be incurred, which are necessitated by a change to or removal of the Goods in the Wayleave Area required by the Owner, are for the Owner's account and must be paid for by the Owner in advance Eskom will effect such changes or removals after receipt of such payment, if such changes or removal are technically possible
- 2 6 The Contractor may exercise any of the Rights
- 2 7 Eskom may
- 2 7 1 let any portion of the Goods to any third party on such conditions as Eskom may deem fit,
- 2 7 2 cede all or any of the Rights granted in terms of this Wayleave to any third party

3. THE OBLIGATIONS

- 3 1 Eskom must
- 3 1 1 ensure that any of Eskom's gates that it had used is closed after use,
- 3 1 2 pay reasonable compensation for intentional damage or damage caused through a negligent act or omission, caused by Eskom, its employees or agents in pursuit of the Rights, save where Eskom is acting in accordance with sub-clause 2 3 7 of this document, and
- 3 1 3 where a Contractor exercises the Rights, ensure that the Contractor complies with the obligations contained in this sub-clause 3 1 1

3 2 The Owner, or anyone with rights on the property, must ensure that no

 3 2 1 building or structure is erected or installed above or below the surface of the ground within the Wayleave Area and no tree or bush is planted within the Wayleave Area or within 5 metres from any structure-supporting mechanism (the "Restricted Area"),

3 2 2 tree, which could grow to a height in excess of the horizontal distance of that tree from the nearest conductor of any power line is planted or allowed to continue growing, regardless if it is outside of the Wayleave or Restricted Area,

3 2 3 material which may in the opinion of Eskom endanger any electricity infrastructure is placed within the Wayleave or Restricted Area

3 3 The Owner, or anyone with rights on the property, must bring the existence of this wayleave contract to the attention of any purchaser or other transferee of the Property (or of any portion of the Property) before the Property (or any portion thereof) is sold and/or transferred to such purchaser or transferee, or if the Owner grants any further rights in or to the Property to any other third party, to such third Party

3 4 The Owner must inform Eskom in writing if it is going to sell the Property

3 5 The Owner's, or anyone with rights on the property, attention is drawn to the provisions of section 10 17 1 of the regulations promulgated in terms of the Explosives Act 26 of 1956, which prescribes that when blasting is to be done within 500 (five hundred) metres of any electricity infrastructure, written confirmation must first be obtained from Eskom concerning the protection of electricity infrastructure

Signed at SHEMANSOP on 13/07/2020


ZOJ. MALULEKA 

The Owner

Witnesses

1 _____

2 _____

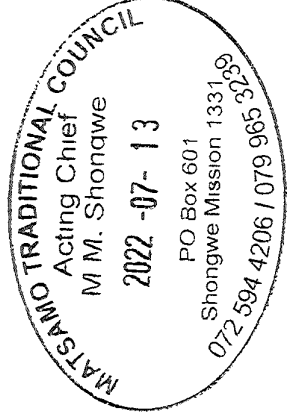



Signed at _____ on _____

Spouse of the Owner if married in community of property

Witnesses

1 _____

2 _____

Signed at _____ on _____

The Usufructuary

Witnesses

1 _____

2 _____

Signed at _____ on _____

The Lessee

Witnesses

1 _____

2 _____

Signed at _____ on _____

The Servitude Holder

Witnesses

1 _____

2 _____

Signed at _____ on _____

Eskom Holdings SOC Limited

Witnesses

1 _____

2 _____

A handwritten signature in black ink, appearing to be 'S. J. M.' or similar, written in a cursive style.

Annex B - Distribution Environmental Screening Document (DESD)
(Informative)

Reticulation Powerlines and Ancillary Services

Ratified and accepted by
Environmental Practitioner
Environmental Specialist
Head of Engineering Survey

(one signature please)

Accepted by Land Owner/s/Users

I have seen the completed document and accept the
recommendations made

MATSAMO

Z.S. maluleka.

Assessor/s


Form completed by

Signature

in consultation with *Z.S. maluleka* Signature *Z.S. maluleka*

CAPACITY (e.g. land owner, specialist) *CHAI R.P. PERSON*

DATE COMPLETED *13/07/2022*

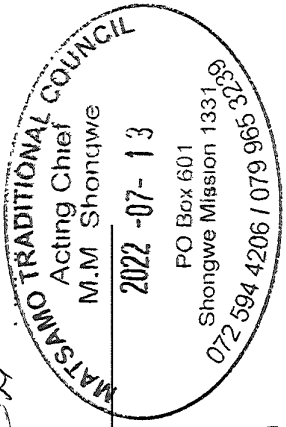

Instructions

- 1 Fill the report in as neatly and completely as possible
- 2 Where the question / statement is not applicable mark N/A.
- 3 Indicate sensitive areas on a map and/or spanning plans
- 4 When in doubt, consult the Environmental Practitioner in your region

The purpose of this *DESD* is to

- Determine whether or not the project should be subject to R543-7, published in terms of the National Environmental management Act 107 of 1998
- Identify and mitigate the negative impact of Eskom's activities to a minimum in line with both Legislation and Eskom's Environmental Policies
- This report is a guide to Route Selection, Construction and Field Services

NOTE Complete the report before the survey!!

This is not an office exercise.

Extra sheets of paper may be added and referenced if insufficient space has been provided.

ESKOM COPYRIGHT PROTECTED

When downloaded from the WEB, this document is uncontrolled and the responsibility rests with the user to ensure it is in line with the authorized version on the WEB

Annex B
(continued)

1 Project description

Project name/Survey Request *NTUNDA ELECTRICITY AREA N. TUNDA*
 Project number *NTUNDA ELECTRICITY FILE NUMBER*
 Rural scheme/Feeder *MZINTI MATABULA Voltage 22KV*
 Supply from
 (scheme name, pole numbers for tee-off)
 Supply to
 (Farm name, etc.)

2 Properties traversed

Farm name *MATABULA*
 Registration number and Division *701 JU*
 Compilation number
 Farm name
 Registration number and Division
 Compilation number

3 Brief description of the surrounding area

RESIDENTIAL AREA

Could the proposed project have an impact on or be constrained by any of the following environmental aspects?
 Encircle the appropriate aspect, giving a description of the present state as well as an indication of the possible negative impact **Note that mitigating measures for these impacts are to be included in the Environmental Management Programme.**

Annex B
(continued)

4 Physical environment

4.1 Water streams rivers dams wetlands springs floodplains OTHER *N/A*

Present condition

Potential impact (e.g. threat of pollution) *No impact*

.. . . .

4.2 Soil: sandy rocky clayey OTHER

Present condition *compact*

Potential impact (e.g. of erosion) *No impact.*
4.3 Topography mountains ridges hills valleys ravines dongas OTHER *N/A*

Present condition

Potential impact (e.g. of erosion)

Comments/mitigating measures
.. . . .
.. . . .
.. . . .
.. . . .
.. . . .

ESKOM COPYRIGHT PROTECTED

When downloaded from the WEB, this document is uncontrolled and the responsibility rests with the user to ensure it is in line with the authorized version on the WEB

ENVIRONMENTAL IMPACT ASSESSMENT FOR DISTRIBUTION ACTIVITIES

Unique Identifier 240-72597722
 Revision 1
 Page 21 of 70

Annex B
(continued)

5 Natural environment

5.1 Flora: indigenous protected exotic OTHER

Brief description and conservation status (e.g. rare, etc., mention trees/bush/grass)
are protected trees that needs to be trimmed!
 Potential impact (e.g. permit applications, tree cutting permit required).

5.2 Fauna: mammals birds OTHER *1574*

Brief description and conservation status

(e.g. rare, protected, etc., mention giraffe, elephants, eagles, vultures, etc., mention migratory paths)

Potential impact (e.g. threat of electrocution, collision, etc)

Comments/mitigating

measures

6 Social environment

6.1 Restricted areas: nature/game reserves hiking trails tourism routes parks recreational areas

Residential-areas green belts sacred/holy grounds OTHER

Brief description *It is a residential area.*

ESKOM COPYRIGHT PROTECTED

¹When downloaded from the WEB this document is uncontrolled and the responsibility rests with the user to ensure it is in line with the authorized version on the WEB

Annex B
(continued)

Potential impact e.g. threat of encroachment, etc

NO impact

6.2 Visual aesthetics: easily seen

hidden

partially

Brief description *It is next to the Ntinda Mosque*

Potential impact *So impact*

6.3 Natural heritage: cultural significance, graves, archaeological objects, meteorites, monuments, ruins, palaeontological objects, OTHER

Note: Should any natural heritage resource as listed above, or as defined in the National Heritage Resource Act, No 25 of 1999 be identified, the requirements of Act 25 of 1999 shall be followed by notifying the SAHRA. If line of access road length exceeds 300m SAHRA shall be notified.

Potential impact *Show to any of the above to find out what findings must be reported to the Environmental*
Comments/mitigating measures *Other not project. Contractor and project stopped work. It has been fully investigated.*

7 Economic environment

7.1 Land use: crops, game farming, orchards, forestry areas, grazing, mining, crop spraying, OTHER *NSA*

Brief description

Annex B
(continued)

Potential impact

7.1.1 Commercial: factories shops OTHER *NSA*

Brief description
Potential impact

.. . . .

7.1.2 Infrastructure: roads pipelines railways sewage communications power lines air fields
OTHER

Brief description
The are underground water pipes

Potential impact
Pipes / caution must be exercised when excavating

Comments/mitigating measures.

If any damage has occurred please report to Nkomai municipality to repair

ESKOM COPYRIGHT PROTECTED

Annex B
(continued)

What impact will this project have on elements 4 to 7?

- 1 Physical
No impact (0) Medium impact (2) High impact (4)
- 2 Natural
No impact (0) Medium impact (2) High impact (4)
- 3 Social
No impact (0) Medium impact (2) High impact (4)

Overall impact

This section addresses the overall environmental impact of the project. The impacts as assessed in the above three spheres (physical, natural and social) need to be considered to determine the overall impact

0 _____
 2 Medium impact
 4 _____
 No impact _____ High impact _____

If the overall impact is between 2 and 4, contact the Environmental Management Officer or the Environmental Senior Superintendent

Alternatives

Have alternative routes been discussed with the relevant land owner/s or users?

Yes _____
No /

Detailed study

Is an environmental assessment required in terms of Regulation R543?

Yes _____
No /

Should a permit application be made to DWA?

Yes _____
No /

Should the SAHRA be notified?

Yes /
No _____

ESKOM COPYRIGHT PROTECTED

Annex C - Environmental Management Plan
(Normative)

1 General conditions

- 1.1** The Eskom project manager or co-ordinator shall be responsible for ensuring that the land owners have been informed before any work is carried out on site. Contractors shall find out if the landowners have been informed before moving onto site.
- 1.2** No fences, gates or locks shall be damaged to obtain access onto a line route. Arrangements shall be made in advance to obtain permission for access.
- 1.3** Use of private roads shall be arranged in advance. Any damage to private roads shall be repaired at the contractor's expense and to the satisfaction of the landowner. This shall be the responsibility of the project manager or co-ordinator.
- 1.4** Gates shall be left as they are found, i.e. closed gates shall be kept closed and open gates shall be left open. Gates to adjacent properties or onto public roads shall be closed at all times. Any Eskom gates installed on the line route shall be kept closed and locked except while stringing is taking place. Open gates shall be guarded to prevent animals straying and unauthorised persons and vehicles entering into adjacent camps or properties.
- 1.5** Permission shall be obtained from landowners before any water is used.
- 1.6** No fires shall be lit on private property. If fires are lit on Eskom's property or in the construction camp, provision shall be made that no accidental fires are started. No firewood shall be collected in the veld.
- 1.7** If activities that can cause a fire are carried out, fire extinguishers shall be available on site and in the construction camp.
- 1.8** No property may be accessed after normal working hours except with the permission of the landowner. Privacy shall be respected at all times.
- 1.9** Eskom, Eskom's contractors and their employees shall at all times be courteous towards landowners, tenants and the local community.
- 1.10** Eskom, Eskom's contractors and their employees shall not cause damage to property, crops or animals. Activities that may cause conflict with landowners, tenants, the local work force or the local community shall be avoided. Should conflict arise it shall be immediately reported to the Eskom project manager or co-ordinator.
- 1.11** Vehicles shall be driven at a moderate speed on private roads and stay within the statutory speed limit on public roads.
- 1.12** All movement of vehicles shall take place on the established Eskom servitude road or on private roads as agreed in advance. Keep to existing tracks. No movement shall take place through the veld. Special care shall be taken to prevent excess damage during wet weather.

Annex C
(continued)

- 1.13** If any vehicle should get stuck, the damage shall be repaired immediately so that no deep ruts remain
- 1.14** Any damage to private property shall immediately be reported to Eskom and the owner. The damage shall be rectified immediately if possible and/or appropriate compensation shall be paid to the owner at the discretion of the project manager/co-ordinator in consultation with the property owner. A record of damages and rectifying action shall be kept. The landowner's satisfaction with the outcome of rectifying action shall be obtained in writing
- 1.15** A proper system of waste management shall be instituted in the construction camp. This entails that sufficient waste bins are available on site and in the construction camp. The waste shall be dumped at an approved waste disposal site. No containers, scrap metal, conductor etc. shall be left on site.
All scrap shall be removed and taken to an appropriate disposal site. No oil, diesel or other chemicals shall be spilled or discarded anywhere. If an accidental spill occurs, it shall be reported immediately and cleaned to the satisfaction of Eskom and the landowner. No waste shall be left in the veld or on the line route
- 1.16** Washing and toilet facilities shall be provided on site and in the construction camp. The facilities shall comply with Eskom standards and shall have the approval of the landowner
- 1.17** No human excrement shall be left in the veld. If no toilet facilities are available such waste shall be buried *immediately*
- 1.18** Herbicides shall only be applied with Eskom's permission and in accordance with the Eskom Policy on Herbicides ESKPBAAD4.
- 1.19** Camp and office sites shall be dismantled and removed after completion of the construction phase of the project. The site shall be rehabilitated to as close as possible to its original condition to the satisfaction of the landowner, which shall be in writing
- 1.20** All excavations shall be enclosed to prevent animals or people from accidentally falling into excavations
- 1.21** No trees shall be cut or removed without prior permission from the landowner. Permits shall be obtained for the cutting and removal of protected trees (protected trees shall be dealt with in 2, **Special conditions**)
- 1.22** Should any natural heritage object be found, or exposed during excavations, all work shall be terminated immediately and the finding reported to the Project Manager who shall inform the Eskom Environmental Practitioner and the SAHRA

ESKOM COPYRIGHT PROTECTED

Annex C
(continued)

2 Special conditions

(Specific issues identified during the scoping as needing attention i.e erosion berms, bird flappers, protected trees etc.)

TYPICAL MITIGATION MEASURES

ENVIRONMENTAL CONCERNS	MITIGATION MEASURES
AGRICULTURE	
Loss of standing crop due to access road and tower work site	<ul style="list-style-type: none"> - limit width of access and size of tower site - avoidance of crop areas - monetary compensation for crop loss - time construction to avoid growing season
Soil Compaction	<ul style="list-style-type: none"> - scheduling activities to times of the year when soils are least susceptible to compaction - stop activities when ground conditions are poor - use of equipment with low bearing capacity - chisel ploughing
Construction of new lines	<ul style="list-style-type: none"> - locate access roads along existing traffic routs
Topsoil – subsoil mixing/soil rutting	<ul style="list-style-type: none"> - scheduling activities - stop activity when ground conditions are poor - use of equipment with low bearing capacity - use of gravel roads - addition of manures to offset fertility loss - compensation for reduced soil pEAactivity - removal of spoil and/or bentonite from foundation operations - Segregation of topsoil and subsoil.
Disturbance to farm operations	<ul style="list-style-type: none"> - maintain contact with landowner/tenant regarding preferences
Loss of livestock	<ul style="list-style-type: none"> - employ noise control measures near sensitive livestock - Construction of farm gates - Securing farm gates - Clean-up construction materials which could be ingested - Compensation for lost, injured livestock
SOCIAL IMPACTS	
Mud and Dust	<ul style="list-style-type: none"> - wetting down dry soils - chemical control of dust - cleaning roads to remove mud - temporary planting of grasses

ESKOM COPYRIGHT PROTECTED

When downloaded from the VWEB, this document is uncontrolled and the responsibility rests with the user to ensure it is in line with the authorized version on the VWEB

Annex C
(continued)

Aesthetics	<ul style="list-style-type: none"> - screen with natural of planted vegetation restoration - avoid linear access down the right-of-way - addition of topsoil to gravel access roads - hoarding construction sites - installation of landscaping in advance of site completion
Inconvenience	<ul style="list-style-type: none"> - select route and method of installation to suit landowners' conditions - select timing of activity
Heritage resources	<ul style="list-style-type: none"> - avoidance/isolation - design measures to make facility less obtrusive - screening - alternate methods of equipment - protection by use of enclosures, barrier fencing, covering - salvage in conjunction with SAHRA - relocation in conjunction with SAHRA
Tourism and recreation resources	<ul style="list-style-type: none"> - design measures to make facility less obtrusive of disruptive - screening and restoration - minimise noise and dust. - safety precautions to protect the public - scheduling to avoid peak use periods.
WATER QUALITY	
Sedimentation of streams due to erosion from the right-of way	<ul style="list-style-type: none"> - minimise use of slopes adjacent to streams during soils testing, construction and maintenance - maintain a cover crop - retain buffers
Stream bank erosion	<ul style="list-style-type: none"> - mechanical erosion control - retain shrubby stream bank vegetation and selectively cut or prune trees during line clearing/maintenance - selective spraying of herbicides - Mechanical erosion control
Impedance of natural flow streams/others surface waters	<ul style="list-style-type: none"> - use and maintenance of appropriate stream crossing device
Ponding or channelization of surface waters due to rutting	<ul style="list-style-type: none"> - timing activities to stable ground conditions - use of gravel roads
Contamination of surface or ground waters through spills or leaks of toxic substances	<ul style="list-style-type: none"> - spill control material and procedures readily available - site selection where possible
Soil compaction/topsoil-subsoil mixing	<ul style="list-style-type: none"> - avoidance of rutting by vehicles where possible - construction timing - use of gravel roads - use of vehicles with low bearing pressures - stop activities when ground conditions are poor.
Wind/water erosion	<ul style="list-style-type: none"> - avoidance of areas with high erosion potential - timing activities to the most stable ground conditions - slope stabilisation - mechanical erosion control - vegetation erosion control - recompaction of trenches - avoid trenching parallel to the fall of a slope

ESKOM COPYRIGHT PROTECTED

When downloaded from the V/EB, this document is uncontrolled and the responsibility rests with the user to ensure it is in line with the authorized version on the WEB

**ENVIRONMENTAL IMPACT ASSESSMENT FOR
DISTRIBUTION ACTIVITIES**

Unique Identifier 240-72597722

Revision 1


Page 29 of 70

Annex C
(continued)

Contamination by petrochemicals	<ul style="list-style-type: none"> - spill control material and procedures made readily available - restoration methods investigated
FAUNA & FLORA	
Loss of habitat, breeding and/or food source for terrestrial wildlife	<ul style="list-style-type: none"> - environmental mapping to identify sensitive areas - avoidance of areas containing rare/endangered species - construction and maintenance activities to be timed where possible to avoid peak breeding periods - the creation of "edge" (may be considered a positive impact) - promotion of wildlife habitat through vegetation control - avoid the filling of small wetlands - use design with low risk to wildlife electrocution or collision - fit bird flight divertors to powerlines in bird migration areas
Changes in composition of vegetation as a result of disturbance	<ul style="list-style-type: none"> - construction timing to minimise soil disturbance - restoration of soils to a stable condition
Removal or burial of stream bottom habitat and increased turbidity due to sedimentation	<ul style="list-style-type: none"> - minimise erosion from the right-of-way by maintaining a cover crop - mechanical erosion control - minimise stream bank erosion by retaining shrubby bank vegetation and selective cutting, pruning of trees near watercourses - installation of sediment traps when necessary
Possible loss of wildlife/fish migration/travel routes	<ul style="list-style-type: none"> - avoid filling small wetlands servings as staging areas for waterfowl migration - Installation and maintenance of a proper stream crossing device - time construction activities to avoid disturbance to migrating fish and wildlife or during breeding - Follow Eskom standards for the application of herbicides near watercourses - Preserve and/or augment existing natural corridor crossings, investigate lower placement to optimise clearances to preserve existing vegetation - use of native species for erosion control
IntEAruction of exotic plant species resulting from vegetative erosion control	<ul style="list-style-type: none"> - use of native species for erosion control
Vegetation stress due to nutrient loss as a result of soil deterioration	<ul style="list-style-type: none"> - erosion control measures
Changes in vegetation due to soil disturbance (topsoil-subsoil mixing)	<ul style="list-style-type: none"> - time construction/clearing to take advantage of stable soil conditions

ESKOM COPYRIGHT PROTECTED

When downloaded from the V/IEB, this document is uncontrolled and the responsibility rests with the user to ensure it is in line with the authorized version on the V/IEB

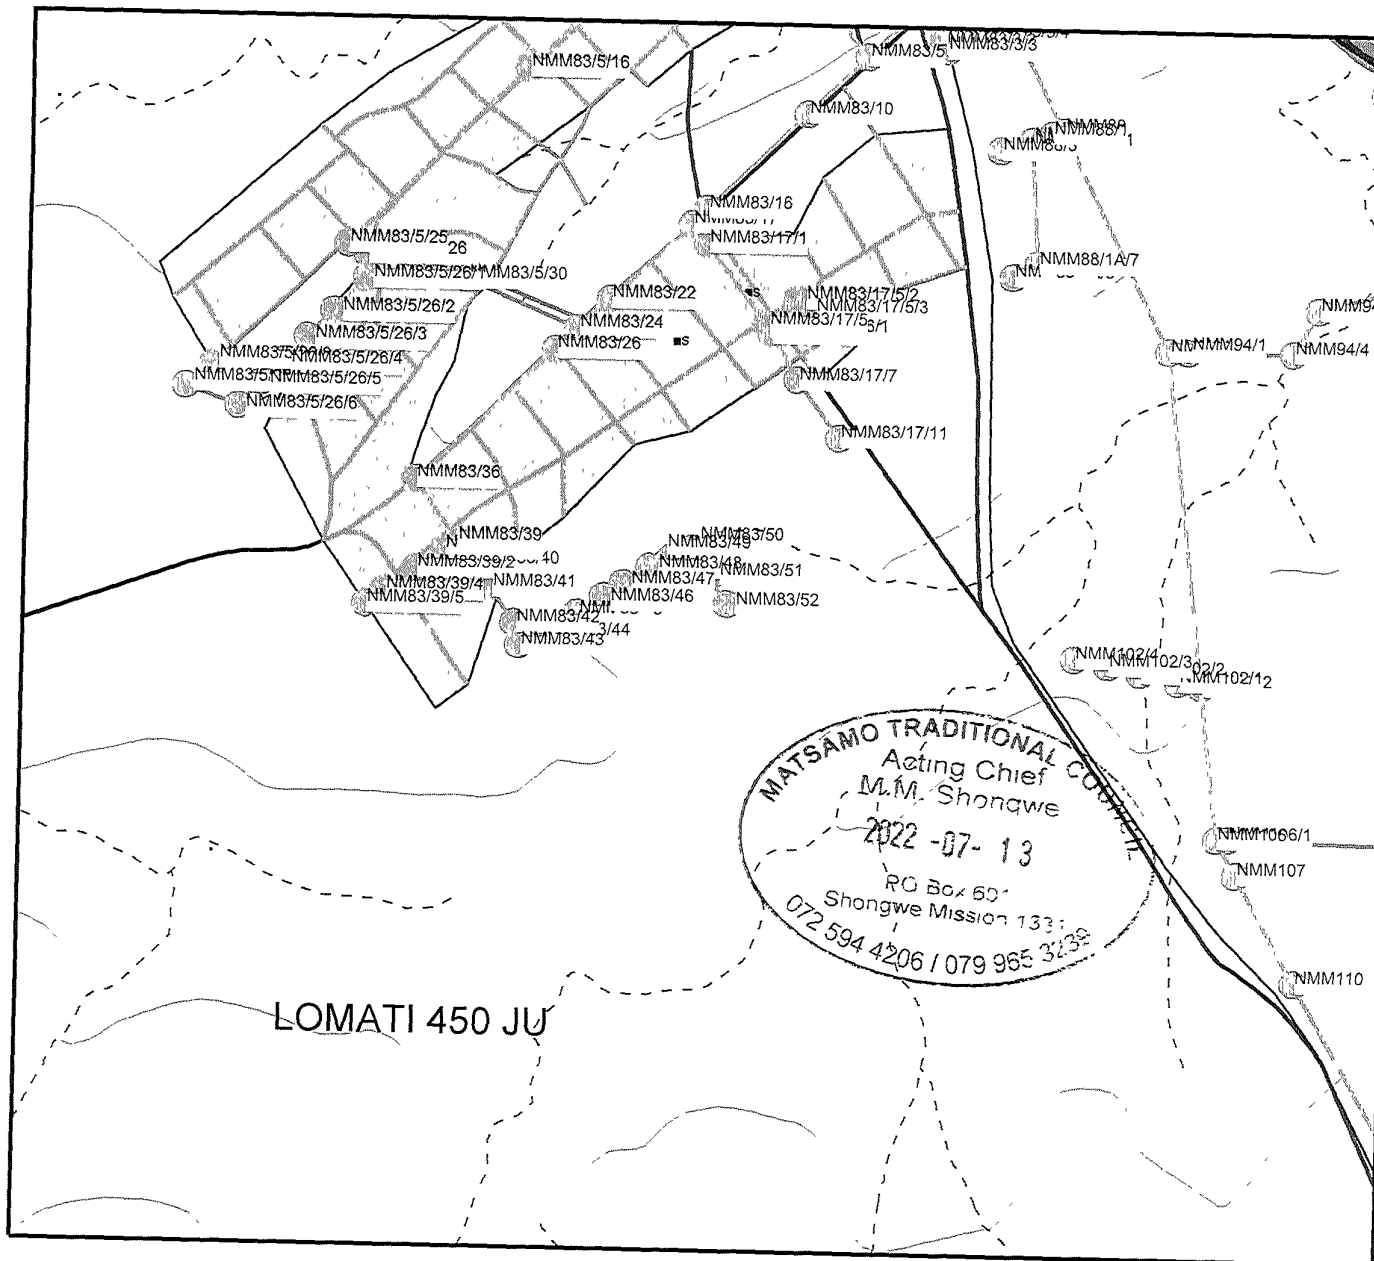

25 maluleka
 Owner Maluleka
 Witness _____
 Witness _____
 Date 2022/07/13

Eskom _____
 Witness _____
 Witness _____
 Date 2022/07/13

Wayleave Sketch
 The route depicted by
 Eskom is not responsible for any errors in the information displayed on this map



Scale 1 15000
 Projection Lo84/31 (cm)



Author _____
 Map Number _____
 Revision _____ Date 2022-07-04

